



(11) **EP 3 737 082 A1**

(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(43) Date of publication:  
**11.11.2020 Bulletin 2020/46**

(51) Int Cl.:  
**H04N 5/232** (2006.01) **F16M 11/08** (2006.01)  
**F16M 11/10** (2006.01)

(21) Application number: **18898954.5**

(86) International application number:  
**PCT/CN2018/071534**

(22) Date of filing: **05.01.2018**

(87) International publication number:  
**WO 2019/134117 (11.07.2019 Gazette 2019/28)**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**MA MD TN**

(72) Inventor: **SU, Tie**  
**Shenzhen, Guangdong 518057 (CN)**

(74) Representative: **Goddard, Heinz J.**  
**Boehmert & Boehmert**  
**Anwaltpartnerschaft mbB**  
**Pettenkoferstrasse 22**  
**80336 München (DE)**

(71) Applicant: **SZ DJI Technology Co., Ltd.**  
**Shenzhen, Guangdong 518057 (CN)**

(54) **PAN-TILT CONTROL METHOD, PAN-TILT AND MACHINE READABLE STORAGE MEDIUM**

(57) The present disclosure provides a gimbal control method, a gimbal and a machine-readable storage medium. In this disclosure, a follow speed of the gimbal for following a target object is adjusted when a follow-con-

figuration button provided at the gimbal is triggered, instead of through a mobile APP. The follow speed of the gimbal for following the target object can be ensured to be adjusted flexibly in the present disclosure.

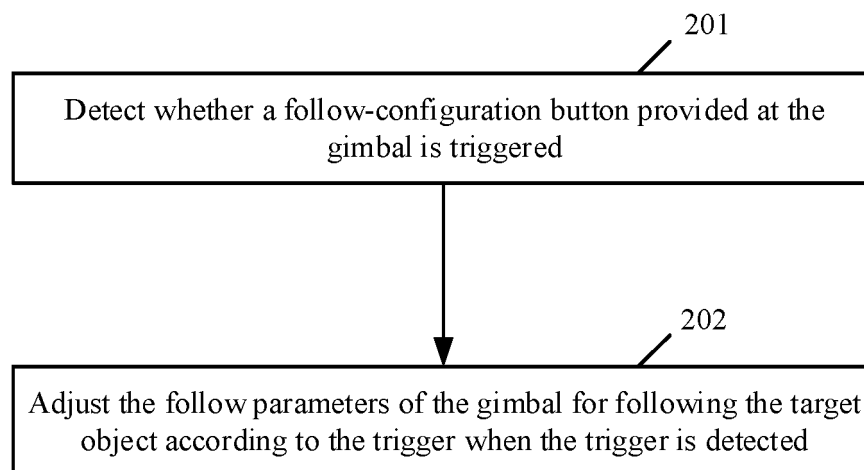


FIG. 2

EP 3 737 082 A1

## Description

### TECHNICAL FIELD

[0001] The present disclosure relates to the field of control, and in particular, to a gimbal control method, a gimbal and a machine-readable storage medium.

### BACKGROUND

[0002] With the development of shooting technology, handheld gimbals are becoming more and more popular with users. In the process of following the target object, the handheld gimbal sometimes needs to respond quickly to the motion of the handle to make the handheld gimbal closely follow the movement of the target object, and sometimes it needs to respond slowly to the motion of the handle to make pictures shot with handheld gimbal smooth.

[0003] At present, the user connects the handheld gimbal from a mobile phone APP via Bluetooth, and then sets the follow parameters such as the speed and acceleration of the handheld gimbal. In this way, the follow parameters of the handheld gimbal for following the target object can be adjusted.

[0004] However, this requires the user to pull out the mobile phone to connect with the handheld gimbal, which is a waste of time. Moreover, once the follow parameters such as the speed and acceleration of the handheld gimbal are set, it means that the speed and acceleration of the handheld gimbal are fixed. In the future, if the follow parameters such as the speed and acceleration of the handheld gimbal are required to change, a reset is needed, which has poor flexibility.

### SUMMARY

[0005] The present disclosure provides a gimbal control method, a gimbal and a machine-readable storage medium.

[0006] One aspect of the disclosure provides a gimbal control method including detecting whether a follow-configuration button provided at the gimbal is triggered, and adjusting follow parameters of the gimbal for following a target object according to the trigger when the trigger is detected.

[0007] One aspect of the disclosure provides a gimbal including a memory, a processor, and a follow-configuration button. The memory is used to store control instructions of the gimbal, wherein the processor calls the control instructions and performs operations including detecting whether the follow-configuration button is triggered and adjusting the follow parameters of the gimbal for following the target object according to the trigger when the trigger is detected.

[0008] One aspect of the disclosure provides a machine-readable storage medium. The machine-readable storage medium stores a plurality of computer instructions,

and the executed computer instructions perform the method described above.

[0009] In accordance with the disclosure, the follow speed of the gimbal for following the target object is adjusted when the follow-configuration button provided at the gimbal is triggered, instead of through the mobile APP. The follow speed of gimbal for following the target object can be ensured to be adjusted flexibly in the present disclosure.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] To more clearly illustrate the technical solution of the present disclosure, the accompanying drawings used in the description of the disclosed embodiments are briefly described below. The drawings described below are merely some embodiments of the present disclosure. Other drawings may be derived from such drawings by a person with ordinary skill in the art without creative efforts.

FIG. 1 is a structural diagram of a three-axis gimbal (labeled as a bracket assembly 100);

FIG. 2 is a flowchart of a gimbal control method according to embodiment 1 of the disclosure;

FIG. 3 is a structural diagram of a handle according to an embodiment of the disclosure;

FIG. 4 is a flowchart of a gimbal control method according to embodiment 2 of the disclosure;

FIG. 5 is a flowchart of a gimbal control method according to embodiment 3 of the disclosure;

FIG. 6 is a flowchart of a gimbal control method according to embodiment 4 of the disclosure;

FIG. 7 is a structural diagram of a gimbal according to embodiment 6 of the disclosure.

### DETAILED DESCRIPTION OF THE EMBODIMENTS

[0011] The technical solutions in the example embodiments of the present disclosure will be described clearly and completely with reference to the accompanying drawings. The described embodiments are only some of the embodiments of the present disclosure, rather than all the embodiments. Based on the embodiments of the present disclosure, all other embodiments obtained by a person of ordinary skill in the art without creative efforts shall fall within the scope of the present disclosure.

[0012] Before a gimbal control method provided by the present disclosure is described, the gimbal involved in the present disclosure will be described first.

[0013] The gimbal is used to carry a camera. In the embodiments of the disclosure, the gimbal can be a two-axis gimbal or a three-axis gimbal.

[0014] FIG. 1 is a structural diagram of a bracket assembly of a three-axis gimbal (labeled as bracket assembly 100). As shown in FIG. 1, the bracket assembly 100 mainly includes a pitch axis motor 101, a roll axis motor 102, a yaw axis motor 103, a gimbal base 104, a yaw

axis arm 105, a photographing device fixation mechanism 106 (including an inertial measurement unit (IMU) inside), a pitch axis arm 107, and a roll axis arm 108. The photographing device fixation mechanism 106 is used to connect the photographing device 109 to the bracket assembly 100. The roll axis arm 108 is used to support the pitch axis arm 107 and the pitch axis motor 101, the yaw axis arm 105 is used to support the yaw axis motor 103 and the roll axis motor 102, and the pitch axis arm 107 is used to support the photographing device 109. An angle sensor and a circuit board can be installed inside the pitch axis motor 101, the roll axis motor 102, and the yaw axis motor 103 (these three motors can be referred to as driving motors). The angle sensor can be electrically connected to the circuit board. When the driving motor rotates, the angle sensor installed at the driving motor can measure the rotation angle of the driving motor. The angle sensor can be one or multiple of a potentiometer, a Hall sensor, or an encoder. The bracket assembly 100 may be connected to the handle or a mobile platform (not shown in FIG. 1) through the gimbal base 104.

**[0015]** The gimbal mainly uses an inertial measurement unit as a feedback element and uses the driving motors of the gimbal's axes (yaw axis, pitch axis, roll axis) as output elements to form a closed loop control system to control the attitude of the gimbal. In the process of controlling the attitude of the gimbal, the control parameter is the attitude of the gimbal. Given a target attitude, the current attitude of the gimbal is corrected to the target attitude through feedback control, so that the gimbal approaches to the target attitude from the current attitude, and finally reaches the target attitude.

**[0016]** Based on the above description, the embodiments of the disclosure are described below.

#### Embodiment 1

**[0017]** FIG. 2 is a flowchart of a gimbal control method according to embodiment 1 of the disclosure. This process is applied to a handheld gimbal, which includes a handle and a bracket assembly for adjusting the attitude of the gimbal. The bracket assembly includes at least one rotation axis.

**[0018]** As shown in FIG.2, at 201, whether a follow-configuration button provided at the gimbal is triggered is detected.

**[0019]** In the embodiments of the disclosure, compared with the existing gimbal, the improvements of setting the follow-configuration button at the gimbal is made. The follow-configuration button is a physical button. In other embodiments, the follow-configuration button can be a virtual button displayed on a screen provided at the gimbal.

**[0020]** In the embodiments of the disclosure, the gimbal is a handheld gimbal and includes a handle. The number of the physical buttons is at least one and the physical buttons are disposed at the handle. The specific position of the follow-configuration button disposed at the

handle is not limited in the embodiments of the disclosure. In one example, the follow-configuration button can be set at a position at the handle that is convenient for a user to operate. FIG. 3 illustrates an example of setting a follow-configuration button at the handle.

**[0021]** At 202, when the trigger is detected, the follow parameters of the gimbal for following the target object are adjusted according to the trigger.

**[0022]** According to 202, in the embodiments of the disclosure, the follow parameters of the gimbal for following the target object are adjusted based on whether the follow-configuration button provided at the gimbal is triggered, instead of through the mobile APP. The follow parameters of the gimbal for following the target object can be ensured to be adjusted flexibly in the present disclosure.

**[0023]** Embodiment 1 is described above.

#### Embodiment 2

**[0024]** In embodiment 2, a gimbal control method is provided based on embodiment 1. FIG. 4 is a flowchart of the gimbal control method according to embodiment 2. As shown in Figure 4, at 401, whether a follow-configuration button provided at the gimbal is triggered is detected.

**[0025]** The process of 401 is similar to the process of 201 and is not described again.

**[0026]** At 402, a follow coefficient corresponding to the follow-configuration button after receiving the trigger is determined.

**[0027]** In one embodiment, at 402, determining the follow coefficient corresponding to the follow-configuration button after receiving the trigger includes the following.

**[0028]** At a1, a first state of the follow-configuration button before receiving the trigger is identified.

**[0029]** In the embodiments of the disclosure, at least one follow-configuration button can be disposed at the gimbal.

**[0030]** When a relatively small number of follow-configuration buttons are disposed at the gimbal, taking one follow-configuration button as an example, and if there are many different states such as three states of high state, middle state, and low state, the same follow-configuration button will correspond to multiple different states. In this case, a2 is performed.

**[0031]** At a2, it is determined that the follow-configuration button sequentially switches from the first state to a second state according to a specified state cycle order after receiving the trigger.

**[0032]** If the specified state cycle order is middle state-> high state-> low state, and at a1, the first state to which the follow-configuration button corresponds before receiving the trigger is identified as middle state, then when the trigger is received, according to the specified state cycle order as middle state-> high state-> low state, the state of the follow-configuration button will be switched from the currently indicated first state (taking the middle

state as an example) to the second state (taking the high state as an example) .

**[0033]** After the state of the follow-configuration button is sequentially switched from the first state to the second state, a3 is performed.

**[0034]** At a3, a follow coefficient corresponding to the second state is determined as the follow coefficient corresponding to the follow-configuration button after receiving the trigger.

**[0035]** In one example, the states corresponding to the follow-configuration buttons are different, and the different states of the follow-configuration buttons correspond to different follow coefficients. In this way, at a3, the follow coefficient corresponding to the second state after the switch is determined as the follow coefficient corresponding to the follow-configuration button after receiving the trigger, and then the follow coefficient corresponding to the second state after switching can be used to adjust the follow parameters of the gimbal for following the target object. Therefore, the follow parameters of the gimbal for following the target object can be adjusted automatically. The details are described at 403 below.

**[0036]** In another example, the states corresponding to the follow-configuration buttons are different, and the different states of the follow-configuration buttons correspond to same follow coefficients. In this way, when the follow coefficient corresponding to the second state after switching is the same as the follow coefficient corresponding to the first state before switching, in one embodiment, the follow-configuration button may be again triggered until the follow coefficient corresponding to the state after switching is different from the follow coefficient corresponding to the state before switching. Then the follow coefficient corresponding to the state after switching can be used to adjust the follow parameters of the gimbal for following the target object. Therefore, the follow parameters of the gimbal for following the target object can be adjusted automatically. The details are described at 403 below. In another example, when the follow coefficient corresponding to the second state after switching is the same as the follow coefficient corresponding to the first state before switching, the follow-configuration button may not be triggered again. Instead, the follow parameters before switching can be directly used to control the gimbal to follow the target object.

**[0037]** At 403, the follow parameters of the gimbal for following the target object is adjusted according to the follow coefficient.

**[0038]** Finally, at 402 and 403, the adjustment of follow parameters of the gimbal for following the target object according to the trigger at 202 is implemented.

**[0039]** According to 402 and 403, in the embodiments of the disclosure, the follow parameters of the gimbal for following the target object are adjusted based on whether the follow-configuration button provided at the gimbal is triggered, instead of through the mobile APP. The follow parameters of the gimbal for following the target object can be ensured to be adjusted flexibly in the present dis-

closure.

**[0040]** Embodiment 2 is described above.

#### Embodiment 3

**[0041]** In embodiment 3, a gimbal control method is provided based on embodiment 2. FIG. 5 is a flowchart of the gimbal control method according to embodiment 3. In embodiment 3, a follow speed is used as the follow parameter to describe how to implement the gimbal control.

**[0042]** At 501, whether a follow-configuration button provided at the gimbal is triggered is detected.

**[0043]** The process of 501 is similar to the process of 201 and is not described again.

**[0044]** At 502, a follow coefficient corresponding to the follow-configuration button after receiving the trigger is determined.

**[0045]** The process of 502 is similar to the process of 402 and is not described again.

**[0046]** In the embodiments of the disclosure, the follow coefficients determined at 502 include a follow speed coefficient.

**[0047]** In one embodiment, the follow speed coefficients include follow speed coefficients corresponding to different rotation axes and the follow speed coefficients corresponding to different rotation axes are the same or different. In the embodiments of the disclosure, the follow speed coefficient can be pre-configured through an application program (APP). The pre-configured follow speed coefficient can be adaptively adjusted according to requirements and is not fixed.

**[0048]** In one embodiment, the follow coefficient may further include a follow identifier. In the embodiments of the disclosure, the follow identifier may be pre-configured through an APP. The follow identifiers corresponding to different rotation axes can be set separately. For example, the follow identifier corresponding to the roll axis is the first identifier representing to follow, the follow identifier corresponding to the yaw axis is the second identifier representing not to follow, and the follow identifier corresponding to the pitch axis is the first identifier representing to follow. In this way, 503 may further include determining the follow identifier corresponding to each rotation axis and, when the follow identifier corresponding to a rotation axis is the first identifier representing to follow, performing the processes at 503 to 504 for the rotation axis. That is, the processes at 503 and 504 are performed for a rotation axis whose corresponding follow identifier is the first identifier representing to follow.

**[0049]** In the embodiments of the disclosure, the states corresponding to the follow-configuration buttons are different, and the follow identifiers of the follow coefficients corresponding to different states may also be different. For example, if three different states are set for the follow-configuration button, the three different states are low state, middle state, and high state. The follow coefficients corresponding to the low state include the follow identifier

corresponding to the pitch axis that is the second identifier representing not to follow, and the follow identifiers corresponding to the remaining two rotation axes (roll axis, yaw axis) that are the first identifier representing to follow, which means that only the roll axis and yaw axis follow. The follow coefficients corresponding to the middle state include the follow identifier corresponding to the roll axis that is the second identifier representing not to follow, and the follow identifier corresponding to the remaining two rotation axes (roll axis, pitch axis) that are the first identifier representing to follow, which means that only the roll axis and pitch axis follow. The follow coefficients corresponding to the high state include the follow identifiers corresponding to the pitch axis, the roll axis, and the yaw axis that are the first identifier representing to follow, which means that the pitch axis, the roll axis, and the yaw axis all follow. In specific implementations, the follow identifiers in the follow coefficients corresponding to different states may be specifically set according to actual needs and are not limited in the embodiments of the disclosure.

**[0050]** In one special embodiment, the follow coefficients that can also be set for a certain state, such as the low state described above, include the follow identifiers corresponding to the pitch axis, roll axis, and yaw axis that are the second identifier representing not to follow. In this case, there is no need to follow. The follow mode is stopped, and a free mode is switched to.

**[0051]** As described above, in the embodiments of the disclosure, the gimbal includes at least one rotation axis such as a pitch axis, a roll axis, and a yaw axis for adjusting the attitude of the gimbal. At 503, for each rotation axis, a first difference value is obtained by calculating the difference between the handle attitude information and the gimbal target attitude information along the rotation axis.

**[0052]** In one embodiment, at 503, the handle attitude information along the rotation axis includes a Euler angle of the handle along the rotation axis.

**[0053]** As an example, the Euler angle of the handle along the rotation axis includes the Euler angle of the handle along the rotation axis obtained by converting the attitude quaternion of the handle along the rotation axis, which is obtained by rotating the attitude quaternion of the inertial measurement element (IMU) itself around the rotation axis of the gimbal.

**[0054]** In applications, a quaternion is a mathematical representation of an attitude. In general, a quaternion can be expressed as  $q = w + xi + yj + zk$ , where  $q = w + xi + yj + zk$  can be divided into a scalar  $w$  and a vector  $xi + yj + zk$ . For convenience,  $q$  is expressed as  $(S, V)$ , where  $S$  represents the scalar  $w$  and  $V$  represents the vector  $xi + yj + zk$ . So that the quaternion multiplication can be expressed as:  $q_1 * q_2 = (S_1 + V_1) * (S_2 + V_2) = S_1 * S_2 - V_1 * V_2 + V_1 * V_2 + S_1 * V_2 + S_2 * V_1$ . A Euler angle is another representation of an attitude. Quaternions and Euler angles can be converted to each other through corresponding formulas. The following is

the formula for converting a quaternion to a Euler angle:

$$\begin{bmatrix} \varphi \\ \theta \\ \psi \end{bmatrix} = \begin{bmatrix} \text{atan2}(2(wx + yz), 1 - 2(x^2 + y^2)) \\ \arcsin(2(wy - zx)) \\ \text{atan2}(2(wz + xy), 1 - 2(y^2 + z^2)) \end{bmatrix}$$

**[0055]** Based on the above formula, in the embodiments of the disclosure, it is easy to convert the attitude quaternion of the handle along the rotation axis into the Euler angle of the handle along the rotation axis.

**[0056]** In another embodiment, at 503, the gimbal target attitude information along the rotation axis includes determining the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger.

**[0057]** In one embodiment, determining the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis when receiving the trigger may include obtaining the gimbal target attitude information along the rotation axis by integrating the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger. The obtained gimbal target attitude information is also an angle.

**[0058]** Through 503, it is realized that for each rotation axis, a first difference value is obtained by calculating the difference between the handle attitude information along the rotation axis and the gimbal target attitude information.

**[0059]** At 504, the follow speed of the gimbal for following the target object along the rotation axis is calculated according to the first difference value and the follow speed coefficient corresponding to the rotation axis.

**[0060]** In one embodiment, at 504, calculating the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis may be implemented by the following formula:

**[0061]**  $\text{follow\_speed} = (\text{atti\_handler} - \text{atti\_target}) * \text{speed\_coef} / \text{freq}$ , where,  $\text{follow\_speed}$  represents the follow speed along the rotation axis,  $\text{handler}$  represents the handle attitude information along the rotation axis;  $\text{atti\_target}$  represents the gimbal target attitude information along the rotation axis;  $\text{atti\_handler} - \text{atti\_target}$  is the first difference value,  $\text{speed\_coef}$  represents the follow speed coefficient corresponding to the rotation axis, and  $\text{freq}$  is a pre-configured frequency, specifically the frequency of IMU sampling.

**[0062]** Through 504, the follow speed of the gimbal for following the target object along the rotation axis can be calculated. In this way, the gimbal can be controlled to follow the target object along the rotation axis according to the calculated follow speed of the gimbal for following the target object along the rotation axis. The details are

described at 505.

**[0063]** At 505, the gimbal is controlled to follow the target object along the rotation axis according to the follow speed.

**[0064]** In one embodiment, the follow speed of the gimbal for following the target object along the rotation axis is essentially the speed at which a photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, responds to a change in attitude of the rotation axis. At 505, if the absolute value of the follow speed calculated at 504 is greater than 0, it means that the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, responds to the change in attitude of the rotation axis according to the calculated follow speed to better follow the target object. When the follow speed calculated at 504 is equal to 0, it means that the attitude of the rotation axis is close to the target attitude at this time, and the responding speed of the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, to the change in attitude of the rotation axis is close to 0. That is, the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, is controlled to stop following the change in attitude of the rotation axis.

**[0065]** Finally, processes from 502 to 505 are used to implement the adjustment of the follow parameters of the gimbal for following the target object according to the trigger at 202.

**[0066]** From 502 to 505 in the embodiments of the disclosure, the follow speed of the gimbal for following the target object is adjusted based on whether the follow-configuration button provided at the gimbal is triggered, instead of through the mobile APP. The follow speed of the gimbal for following the target object can be ensured to be adjusted flexibly in the present disclosure.

**[0067]** Embodiment 3 is described above.

#### Embodiment 4

**[0068]** In embodiment 4, a gimbal control method is provided based on embodiment 3. FIG. 6 is a flowchart of the gimbal control method according to embodiment 4. As shown in FIG. 6, at 601, whether a follow-configuration button provided at the gimbal is triggered is detected.

**[0069]** The process of 601 is similar to the process of 201 and is not described again.

**[0070]** At 602, a follow coefficient corresponding to the follow-configuration button after receiving the trigger is determined.

**[0071]** The process of 502 is similar to the process of 402 and is not described again.

**[0072]** In the embodiments of the disclosure, the follow coefficient determined at 602 includes a follow speed coefficient and a follow dead band. The follow speed coefficient is as described in embodiment 3. In the embodiments of the disclosure, the follow dead band is pre-configured through the APP.

**[0073]** In the embodiments of the disclosure, the follow-configuration button may be set in advance with follow speed coefficients and follow dead bands corresponding to different states. In one example, the follow speed coefficients and follow dead bands can be set through the APP for the follow-configuration button. In another example, a software program may be written into the follow-configuration button in advance, so as to set a plurality of follow speed coefficients and follow dead bands corresponding to different states for the follow-configuration button.

**[0074]** In some embodiments, the follow-configuration button is set with the follow speed coefficients and follow dead bands corresponding to three different states, and the three different states are the low state, middle state, and high state, where the follow speed coefficient corresponding to the low state is speed\_coef10 and the follow dead band corresponding to the low state is deadband201; the follow speed coefficient corresponding to the middle state is speed\_coef102 and the follow dead band corresponding to the low state is deadband202; the follow speed coefficient corresponding to the high state is speed\_coef103 and the follow dead band corresponding to the low state is deadband203. If initially the state corresponding to the follow-configuration button is the middle state. Thus, initially, the follow coefficients determined at 602 are the follow speed coefficient speed\_coef102 and the follow dead band deadband202 corresponding to the middle state. Then, when the follow-configuration button is triggered and if the designated state cycle order is middle state-> high state-> low state, the state corresponding to the follow-configuration button will be switched from the original middle state to the high state. At this time, the follow coefficients determined at 602 are the follow speed coefficient speed\_coef103 and follow dead band deadband203 corresponding to the high state. If the follow-configuration button is triggered again, the state corresponding to the follow-configuration button will be switched from the original high state to the low state. At this time, the follow coefficients determined at 602 are the follow speed coefficient speed\_coef101 and following dead band deadband201 corresponding to the low state. Then, if the follow-configuration button is triggered again, the state corresponding to the follow-configuration button will be switched from the original low state to the middle state. At this time, the follow coefficients determined at 602 are the follow speed coefficient speed\_coef102 and follow dead band deadband202 corresponding to the middle state, and so on.

**[0075]** In one embodiment, the follow coefficients may further include a follow identifier. The follow identifiers corresponding to different rotation axes may be set separately. For example, the follow identifier corresponding to the roll axis is the first identifier representing to follow, the follow identifier corresponding to the yaw axis is the second identifier representing not to follow, and the follow identifier corresponding to the pitch axis is the first identifier

tifier representing to follow. In this way, 602 may further include determining the follow identifier corresponding to each rotation axis and performing the processes from 603 to 607 for the rotation axis when the follow identifier corresponding to the rotation axis is the first identifier representing to follow. That is, the processes from 603 to 607 are performed for a rotation axis whose corresponding follow identifier is the first identifier representing to follow.

**[0076]** In the embodiments of the disclosure, the states corresponding to the follow-configuration buttons are different, and the follow identifiers of the follow coefficients corresponding to different states may also be different. For example, if three different states are set for the follow-configuration button, the three different states are low state, middle state, and high state. The follow coefficients corresponding to the low state include the follow identifier corresponding to the pitch axis that is the second identifier representing not to follow, and the follow identifiers corresponding to the remaining two rotation axes (roll axis, yaw axis) that are the first identifier representing to follow, which means that only the roll axis and yaw axis follow. The follow coefficients corresponding to the middle state include the follow identifier corresponding to the roll axis that is the second identifier representing not to follow, and the follow identifiers corresponding to the remaining two rotation axes (roll axis, pitch axis) that are the first identifier representing to follow, which means that only the roll axis and pitch axis follow. The follow coefficients corresponding to the high state include the follow identifiers corresponding to the pitch axis, the roll axis, and the yaw axis that are the first identifiers representing to follow, which means that the pitch axis, the roll axis, and the yaw axis all follow. In specific implementations, the follow identifiers in the follow coefficients corresponding to different states may be specifically set according to actual requirements and are not limited in the embodiments of the disclosure.

**[0077]** In one embodiment, the follow speed coefficients include follow speed coefficients corresponding to different rotation axes and the follow speed coefficients corresponding to different rotation axes are the same or different. In the embodiments of this disclosure, the follow speed coefficient can be pre-configured. The pre-configured follow speed coefficient can be adaptively adjusted according to requirements and is not fixed.

**[0078]** In one embodiment, the follow dead bands include the follow dead bands corresponding to different rotation axes, where the follow dead bands corresponding to different rotation axes are the same or different. In the embodiments of the disclosure, the follow dead band may be pre-configured. The pre-configured follow dead band can be adaptively adjusted according to requirements and is not fixed.

**[0079]** At 603, for each rotation axis, a first difference value is obtained by calculating the difference between the handle attitude information and the gimbal target attitude information along the rotation axis.

**[0080]** The process of 603 is similar to the process of 402 and is not described again.

**[0081]** At 604, the absolute value of the first difference value is compared with the follow dead band corresponding to the rotation axis. If the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis, 605 is performed. If the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis, 606 is performed.

**[0082]** At 605, a second difference value is obtained by calculating the difference between the absolute value of the first difference value and the follow dead band corresponding to the rotation axis, and a gimbal follow speed for following the target object along the rotation axis is calculated using the second difference value and the follow speed coefficient corresponding to the rotation axis. After that, 607 is performed.

**[0083]** 605 is performed on the premise that the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis.

**[0084]** In one embodiment, 605 may be implemented with the following formula:

**[0085]**  $\text{atti\_err} = \text{atti\_handler} - \text{atti\_target}$ , where  $\text{handler\_atti}$  represents handle attitude information along the rotation axis,  $\text{atti\_target}$  represents the gimbal target attitude information along the rotation axis, and  $\text{atti\_err}$  is the first difference value.

**[0086]**  $\text{atti\_use} = |\text{atti\_err}| - \text{deadband}$ , where  $\text{deadband}$  is the follow dead band, and  $\text{atti\_use}$  is the second difference value.

**[0087]**  $\text{follow\_speed} = \text{atti\_use} * \text{speed\_coef} / \text{freq}$ , where  $\text{follow\_speed}$  represents the follow speed along the rotation axis,  $\text{speed\_coef}$  represents the follow speed coefficient corresponding to the rotation axis, and  $\text{freq}$  is a pre-configured frequency, specifically the frequency of the IMU sampling.

**[0088]** The above formulas are used to calculate the gimbal follow speed for following the target object along the rotation axis using the second difference value and the follow speed coefficient corresponding to the rotation axis.

**[0089]** At 606, the gimbal follow speed for following the target object along the rotation axis is determined as zero and then 607 is performed.

**[0090]** 606 is performed on the premise that the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis. When the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis, it means that the absolute value of the first difference value is smaller than the follow dead band corresponding to the rotation axis, or is equal to the follow dead band corresponding to the rotation axis. When the absolute value of the first difference value is smaller than the follow dead band corresponding to the rotation axis, or when the absolute value of the first difference value is equal to the follow dead band corresponding to the

rotation axis, it means that the attitude of the rotation axis is close to the target attitude at this time, and the speed of the photographic device on the gimbal, such as the photographing device 109 shown in FIG. 1, in response to the attitude change of the rotational axis is close to 0. Therefore, a photographing device on the gimbal, such as the photographing device 109 shown in FIG. 1, does not need to follow the attitude change of the rotation axis.

**[0091]** At 607, the gimbal is controlled to follow the target object along the rotation axis according to the follow speed.

**[0092]** In the embodiments of the disclosure, the follow speed of the gimbal for following the target object along the rotation axis is essentially the speed at which the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, responds to a change in attitude of the rotation axis. In one example, if 607 is performed after 605 as described above, at 607, the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, responds to the change in attitude of the rotation axis according to the calculated follow speed to better follow the target object. In another example, if 607 is performed after 606 as described above, at 607, the attitude of the rotation axis is close to the target attitude at this time, and the responding speed of the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, to the change in attitude of the rotation axis is close to 0. That is, the photographing device at the gimbal, such as the photographing device 109 shown in FIG. 1, does not need to follow the change in attitude of the rotation axis.

**[0093]** Finally, processes from 602 to 607 are used to implement the adjustment of the follow parameters of the gimbal for following the target object according to the trigger at 202.

**[0094]** From 602 to 607, in the embodiments of the disclosure, the follow speed of the gimbal for following the target object is adjusted based on whether the follow-configuration button provided at the gimbal is triggered, instead of through the mobile APP. The follow speed of the gimbal for following the target object can be ensured to be adjusted flexibly in the present disclosure.

**[0095]** Embodiment 4 is described above.

#### Embodiment 5

**[0096]** A gimbal is provided in embodiment 5. FIG. 7 is a structural diagram of the gimbal provided by the present disclosure. The gimbal includes a memory, a processor, and a follow-configuration button. The memory is used to store control instructions of the gimbal. The processor calls the control instructions and performs operations including detecting whether the follow-configuration button is triggered and adjusting the follow parameters of the gimbal for following the target object according to the trigger when the trigger is detected.

**[0097]** In one example, the follow-configuration button is a physical button, or the follow-configuration button

can be a virtual button displayed on a screen provided at the gimbal.

**[0098]** In one example, the gimbal is a handheld gimbal and includes a handle. The number of the physical buttons is at least one and the physical buttons are disposed at the handle.

**[0099]** In one example, the processor calls the control instruction of the gimbal to perform the adjustment of the follow parameters of the gimbal for following the target object according to the trigger, which includes determining that a corresponding follow coefficient after the trigger is received by the follow-configuration button, and adjusting the follow parameters of the gimbal for following the target object according to the follow coefficient.

**[0100]** In one example, the processor calls the control instruction of the gimbal to perform the determination of the follow coefficient corresponding to the follow-configuration button after receiving the trigger, which includes identifying a first state corresponding to the follow-configuration button before receiving the trigger, determining that the follow-configuration button is sequentially switched from the first state to a second state according to a specified state cycle order after receiving the trigger, and determining that the follow coefficient corresponding to the second state is the follow coefficient corresponding to the follow-configuration button after receiving the trigger.

**[0101]** In one example, if the states corresponding to the follow-configuration buttons are different, the corresponding follow coefficients are different, or if the states corresponding to the follow-configuration buttons are different, but the corresponding follow coefficients are the same.

**[0102]** In one example, the follow coefficient includes a follow speed coefficient. The follow speed coefficients include follow speed coefficients corresponding to different rotation axes, and the follow speed coefficients corresponding to different rotation axes are the same or different.

**[0103]** In one example, the gimbal further includes at least one rotation axis for adjusting the attitude of the gimbal. In one example, the processor calls the control instruction of the gimbal to perform the adjustment of the follow parameters of the gimbal for following the target object according to the follow coefficients, which includes, for each rotation axis, obtaining a first difference value by calculating a difference between the handle attitude information and the gimbal target attitude information along the rotation axis, calculating the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis, and controlling the gimbal to follow the target object along the rotation axis according to the follow speed.

**[0104]** In one example, the follow coefficient further includes a follow dead band. The follow dead band includes follow dead bands corresponding to different rotation axes, and the follow dead bands corresponding to different

rotation axes are the same or different.

**[0105]** In one example, the processor calls the control instruction of the gimbal to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the calculated first difference value and the follow speed coefficient corresponding to the rotation axis, which includes comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis. If the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis, a second difference value is obtained by calculating the difference between the absolute value of the first difference value and the follow dead band corresponding to the rotation axis, and a gimbal follow speed for following the target object along the rotation axis is calculated using the second difference value and the follow speed coefficient corresponding to the rotation axis.

**[0106]** In one example, the processor calls the control instruction of the gimbal to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the calculated first difference value and the follow speed coefficient corresponding to the rotation axis, which includes comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis. If the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis, the gimbal follow speed for following the target object along the rotation axis is determined as zero.

**[0107]** In one example, the processor calls the control instruction to control the gimbal to follow the target object along the rotation axis according to the follow speed, which includes controlling the gimbal to stop following the target object along the rotation axis.

**[0108]** In one example, the handle attitude information along the rotation axis includes a Euler angle of the handle along the rotation axis.

**[0109]** The processor calls the control instruction of the gimbal to determine the Euler angle of the handle along the rotation axis, which includes obtaining the attitude quaternion of the handle along the rotation axis by rotating the attitude quaternion of the inertial measurement element

**[0110]** (IMU) itself around the rotation axis of the gimbal and converting the attitude quaternion of the handle along the rotation axis into the Euler angle of the handle along the rotation axis.

**[0111]** In one example, the processor calls the control instruction of the gimbal to perform the determination of the gimbal target attitude information along the rotation axis, which includes determining the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis when receiving the trigger.

**[0112]** In one example, the processor calls the control instruction of the gimbal to perform the determination of the gimbal target attitude information along the rotation

axis according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger, which includes obtaining the gimbal target attitude information along the rotation axis by integrating the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger.

**[0113]** In one example, the follow speed coefficient can be pre-configured through an application program (APP). The pre-configured follow speed coefficient can be adaptively adjusted according to requirements.

**[0114]** In one example, the follow dead band can be pre-configured through an application program (APP). The pre-configured follow dead band can be adaptively adjusted according to requirements.

**[0115]** Embodiment 5 is described above.

#### Embodiment 6

**[0116]** A machine-readable storage medium is provided in embodiment 6. In this disclosure, the machine-readable storage medium includes a U disk, a mobile hard disk, a read-only memory (ROM), a random access memory (RAM), a magnetic disk, or an optical disk, and etc., which can store program codes.

**[0117]** In the embodiments of the present disclosure, a plurality of computer instructions are stored on the machine-readable storage medium. When the computer instructions are executed, the processing of the foregoing embodiments 1 to 4 is performed, which specifically includes detecting whether the follow-configuration button provided at the gimbal is triggered and adjusting the follow parameters of the gimbal for following the target object according to the trigger when the trigger is detected.

**[0118]** In one example, the follow-configuration button is a physical button, or the follow-configuration button can be a virtual button.

**[0119]** In one example, the number of the follow-configuration button is at least one.

**[0120]** In one example, the computer instruction is executed to adjust the follow parameters of the gimbal for following the target object according to the trigger, which includes determining that a corresponding follow coefficient after the trigger is received by the follow-configuration button, and adjusting the follow parameters of the gimbal for following the target object according to the follow coefficient.

**[0121]** In one example, the computer instruction is executed to determine the follow coefficient corresponding to the follow-configuration button after receiving the trigger, which includes identifying a first state corresponding to the follow-configuration button before receiving the trigger, determining that the follow-configuration button is sequentially switched from the first state to a second state according to a specified state cycle order after receiving the trigger, and determining that the follow coefficient corresponding to the second state is the follow coefficient corresponding to the follow-configuration but-

ton after receiving the trigger.

**[0122]** In one example, if the states corresponding to the follow-configuration buttons are different, the corresponding follow coefficients are different, or if the states corresponding to the follow-configuration buttons are different, but the corresponding follow coefficients are the same.

**[0123]** In one example, the follow coefficient includes a follow speed coefficient.

**[0124]** In one example, the follow speed coefficients include follow speed coefficients corresponding to different rotation axes, and the follow speed coefficients corresponding to different rotation axes are the same or different.

**[0125]** In one example, the computer instruction is executed to adjust the follow parameters of the gimbal for following the target object according to the follow coefficients, which includes for each rotation axis, obtaining a first difference value by calculating the difference between the handle attitude information and the gimbal target attitude information along the rotation axis, calculating the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis, and controlling the gimbal to follow the target object along the rotation axis according to the follow speed.

**[0126]** In one example, the follow coefficient further includes a follow dead band. The follow dead band includes follow dead bands corresponding to different rotation axes, and the follow dead bands corresponding to different rotation axes are the same or different.

**[0127]** In one example, the computer instruction is executed to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis, which includes comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis. If the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis, a second difference value is obtained by calculating the difference between the absolute value of the first difference value and the follow dead band corresponding to the rotation axis, and a gimbal follow speed for following the target object along the rotation axis is calculated using the second difference value and the follow speed coefficient corresponding to the rotation axis.

**[0128]** In one example, the computer instruction is executed to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the calculated first difference value and the follow speed coefficient corresponding to the rotation axis, which includes comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis. If the absolute value of the first difference value is not greater than the follow dead

band corresponding to the rotation axis, the gimbal follow speed for following the target object along the rotation axis is determined as zero.

**[0129]** In one example, the computer instruction is executed to control the gimbal to follow the target object along the rotation axis according to the follow speed, which includes controlling the gimbal to stop following the target object along the rotation axis.

**[0130]** In one example, the handle attitude information along the rotation axis includes a Euler angle of the handle along the rotation axis.

**[0131]** In one example, the Euler angle of the handle along the rotation axis includes the Euler angle of the handle along the rotation axis obtained by converting the attitude quaternion of the handle along the rotation axis, which is obtained by rotating the attitude quaternion of the inertial measurement element (IMU) itself around the rotation axis of the gimbal.

**[0132]** In one example, the computer instruction is executed to perform the determination of the gimbal target attitude information along the rotation axis, which includes determining the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis when receiving the trigger.

**[0133]** In one example, the computer instruction is executed to perform the determination of the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger, which includes obtaining the gimbal target attitude information along the rotation axis by integrating the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger.

**[0134]** In one example, the follow speed coefficient can be pre-configured and the pre-configured follow speed coefficient can be adaptively adjusted according to requirements.

**[0135]** In one example, the follow dead band can be pre-configured and the pre-configured follow dead band can be adaptively adjusted according to requirements.

**[0136]** Embodiment 6 is described above.

**[0137]** Since the device embodiment basically corresponds to the method embodiment, the relevant part may refer to the description of the method embodiment. The device embodiments described above are only schematic. The units described as separate components may or may not be physically separated, and the components shown as units may or may not be physical units, that is, they may be located at one place, or may be distributed across multiple network units. Some or all of the modules may be selected according to actual needs to achieve the objective of the embodiment. Those of ordinary skill in the art can understand and implement the embodiments without creative efforts.

**[0138]** In the present disclosure, relational terms such as first and second are only used to distinguish one entity or operation from another entity or operation, and do not

necessarily require or imply that there is any such actual relationship or order between these entities or operations. The term "comprising," "including" or any other variation thereof is non-exclusive inclusion, such that a process, method, article, or device that include a series of elements include not only those elements but also other elements that are not explicitly listed, or elements that are inherent to such a process, method, article, or device. Without more restrictions, the elements defined by the sentence "including a ..." do not exclude the existence of other identical elements in the process, method, article, or equipment that includes the elements.

**[0139]** The methods and devices provided by the present disclosure are described in detail above. Specific examples are used to explain the principles and implementation of the present disclosure. The descriptions of the above embodiments are only for facilitating the understanding of the present disclosure; meanwhile, for a person of ordinary skill in the art, according to the present disclosure, there will be changes in the specific implementation and application. In summary, the content of this specification is not a limitation to this disclosure.

## Claims

1. A gimbal control method applied to a gimbal, comprising:

detecting whether a follow-configuration button provided at the gimbal is triggered;  
adjusting a follow parameter of the gimbal for following a target object according to the trigger when the trigger is detected.

2. The gimbal control method of claim 1, wherein:

the follow-configuration button is a physical button; or  
the follow-configuration button is a virtual button displayed on a screen provided at the gimbal.

3. The gimbal control method of claim 2, wherein the gimbal is a handheld gimbal including a handle, the number of the physical button is at least one and the physical button is disposed at the handle.

4. The gimbal control method of claim 3, wherein adjusting the follow parameter of the gimbal for following the target object according to the trigger includes:

determining a follow coefficient corresponding to the follow-configuration button after receiving the trigger; and  
adjusting the follow parameter of the gimbal for following the target object according to the follow coefficient.

5. The gimbal control method of claim 4, wherein determining the follow coefficient corresponding to the follow-configuration button after receiving the trigger includes:

identifying a first state corresponding to the follow-configuration button before receiving the trigger;  
determining that the follow-configuration button is sequentially switched from the first state to a second state according to a specified state cycle order after receiving the trigger; and  
determining a follow coefficient corresponding to the second state as the follow coefficient corresponding to the follow-configuration button after receiving the trigger.

6. The gimbal control method of claim 4, wherein follow coefficients corresponding to different states corresponding to the follow-configuration button are different, or follow coefficients corresponding to different states corresponding to the follow-configuration buttons are same.

7. The gimbal control method of claim 4, wherein the follow coefficient includes a follow speed coefficient.

8. The gimbal control method of claim 7, wherein the follow speed coefficient includes follow speed coefficients corresponding to different rotation axes, and the follow speed coefficients corresponding to different rotation axes are the same or different.

9. The gimbal control method of claim 7, wherein the gimbal includes at least one rotation axis for adjusting a gimbal attitude and adjusting the follow parameter of the gimbal for following the target object according to the follow coefficients includes:

for each rotation axis, obtaining a first difference value by calculating a difference between handle attitude information and gimbal target attitude information along the rotation axis;  
calculating a follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis; and  
controlling the gimbal to follow the target object along the rotation axis according to the follow speed.

10. The gimbal control method of claim 9, wherein the follow coefficient further includes a follow dead band.

11. The gimbal control method of claim 10, wherein the follow dead band includes follow dead bands corresponding to different rotation axes, and the follow

dead bands corresponding to different rotation axes are the same or different.

12. The gimbal control method of claim 10, wherein calculating the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis includes:

comparing an absolute value of the first difference value with the follow dead band corresponding to the rotation axis;  
if the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis, calculating a difference between the absolute value of the first difference value and the follow dead band corresponding to the rotation axis to obtain a second difference value, and calculating the follow speed of the gimbal for following the target object along the rotation axis using the second difference value and the follow speed coefficient corresponding to the rotation axis.

13. The gimbal control method of claim 10, wherein calculating the follow speed of the gimbal for following the target object along the rotation axis according to the calculated first difference value and the follow speed coefficient corresponding to the rotation axis includes:

comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis;  
if the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis, determining that the follow speed of the gimbal for following the target object along the rotation axis is zero.

14. The gimbal control method of claim 13, wherein controlling the gimbal for following the target object along the rotation axis according to the follow speed includes controlling a photographing device at the gimbal to stop following attitude change along the rotation axis.

15. The gimbal control method of claim 9, wherein the handle attitude information along the rotation axis includes:  
a Euler angle of the handle along the rotation axis.

16. The gimbal control method of claim 15, wherein the Euler angle of the handle along the rotation axis is converted from an attitude quaternion of the handle along the rotation axis, which is obtained by rotating an attitude quaternion of an inertial measurement element (IMU) around a rotation axis of the gimbal.

17. The gimbal control method of claim 9, wherein the gimbal target attitude information along the rotation axis is determined according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger.

18. The gimbal control method of claim 17, wherein determination of the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis when receiving the trigger includes:  
obtaining the gimbal target attitude information along the rotation axis by integrating the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger.

19. The gimbal control method of claim 7, wherein the follow speed coefficient is pre-configured through an application program APP and the pre-configured follow speed coefficient is adaptively adjusted according to needs.

20. The gimbal control method of claim 10, wherein the follow dead band is pre-configured through an application program APP and the pre-configured follow dead band is adaptively adjusted according to needs.

21. A gimbal comprising a memory, a processor, and a follow-configuration button; the memory is used for storing gimbal control instructions, wherein the processor calls the gimbal control instructions to perform operations including:

detecting whether the follow-configuration button is triggered;  
adjusting a follow parameter of the gimbal for following a target object according to the trigger when the trigger is detected.

22. The gimbal of claim 21, wherein:

the follow-configuration button is a physical button; or  
the follow-configuration button is a virtual button displayed on a screen provided at the gimbal.

23. The gimbal of claim 21, wherein the gimbal is a handheld gimbal including a handle, the number of the physical buttons is at least one and the physical button is disposed at the handle.

24. The gimbal of claim 21, wherein the processor calls the gimbal control instructions to perform adjusting the follow parameter of the gimbal for following the target object according to the trigger including:

determining a follow coefficient corresponding

- to the follow-configuration button after receiving the trigger; and  
adjusting the follow parameter of the gimbal for following the target object according to the follow coefficient.
25. The gimbal of claim 24, wherein the processor calls the gimbal control instructions to perform the determination of the follow coefficient corresponding to the follow-configuration button after receiving the trigger including:
- identifying a first state corresponding to the follow-configuration button before receiving the trigger;  
determining that the follow-configuration button is sequentially switched from the first state to a second state according to a specified state cycle order after receiving the trigger; and  
determining a follow coefficient corresponding to the second state as the follow coefficient corresponding to the follow-configuration button after receiving the trigger.
26. The gimbal of claim 25, wherein follow coefficients corresponding to different states corresponding to the follow-configuration buttons are different, or follow coefficients corresponding to different states corresponding to the follow-configuration buttons are same.
27. The gimbal of claim 25, wherein the follow coefficient includes a follow speed coefficient.
28. The gimbal of claim 27, wherein the follow speed coefficient includes follow speed coefficients corresponding to different rotation axes, and the follow speed coefficients corresponding to different rotation axes are the same or different.
29. The gimbal of claim 27, wherein the gimbal includes at least one rotation axis for adjusting a gimbal attitude and the processor calls the gimbal control instruction to perform the adjustment of the follow parameter of the gimbal for following the target object according to the follow coefficients including:
- for each rotation axis, obtaining a first difference value by calculating a difference between handle attitude information and gimbal target attitude information along the rotation axis;  
calculating a follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis; and  
controlling the gimbal to follow the target object along the rotation axis according to the follow speed.
30. The gimbal of claim 29, wherein the follow coefficient further includes a follow dead band.
31. The gimbal of claim 30, wherein the follow dead band includes follow dead bands corresponding to different rotation axes, and the follow dead bands corresponding to different rotation axes are the same or different.
32. The gimbal of claim 30, wherein the processor calls the gimbal control instructions to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis including:
- comparing an absolute value of the first difference value with the follow dead band corresponding to the rotation axis;  
if the absolute value of the first difference value is greater than the follow dead band corresponding to the rotation axis, calculating a difference between the absolute value of the first difference value and the follow dead band corresponding to the rotation axis to obtain a second difference value, and calculating the follow speed of the gimbal for following the target object along the rotation axis using the second difference value and the follow speed coefficient corresponding to the rotation axis.
33. The gimbal of claim 29, wherein the processor calls the gimbal control instructions to perform the calculation of the follow speed of the gimbal for following the target object along the rotation axis according to the first difference value and the follow speed coefficient corresponding to the rotation axis including:
- comparing the absolute value of the first difference value with the follow dead band corresponding to the rotation axis;  
if the absolute value of the first difference value is not greater than the follow dead band corresponding to the rotation axis, determining that the follow speed of the gimbal for following the target object along the rotation axis is zero.
34. The gimbal of claim 33, wherein the processor calls the gimbal control instructions to control the gimbal for following the target object along the rotation axis according to the follow speed, which includes controlling a photographing device at the gimbal to stop following the attitude change along the rotation axis.
35. The gimbal of claim 29, wherein the handle attitude information along the rotation axis includes:

a Euler angle of the handle along the rotation axis.

- 36.** The gimbal of claim 35, wherein the processor calls the gimbal control instructions to perform the determination of the Euler angle of the handle along the rotation axis including: 5

obtaining an attitude quaternion of the handle along a rotation axis by rotating the attitude quaternion of an inertial measurement element (IMU) itself around the rotation axis of the gimbal; and 10  
converting the attitude quaternion of the handle along the rotation axis into the Euler angle of the handle along the rotation axis. 15

- 37.** The gimbal of claim 29, wherein the processor calls the gimbal control instructions to perform the determination of the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger. 20

- 38.** The gimbal of claim 37, wherein the processor calls the gimbal control instructions to perform the determination of the gimbal target attitude information along the rotation axis according to the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger including: 25  
obtaining the gimbal target attitude information along the rotation axis by integrating the follow speed of the gimbal for following the target object along the rotation axis after receiving the trigger. 30

- 39.** The gimbal of claim 27, wherein the follow speed coefficient is pre-configured through an application program APP and the pre-configured follow speed coefficient is adaptively adjusted according to needs. 35

- 40.** The gimbal of claim 30, wherein the follow dead band is pre-configured through an application program APP and the pre-configured follow dead band is adaptively adjusted according to needs. 40

- 41.** A machine-readable storage medium, wherein a plurality of computer instructions are stored on the machine-readable storage medium and the computer instructions are executed to perform the method of any one of claims 1-20. 45

50

55

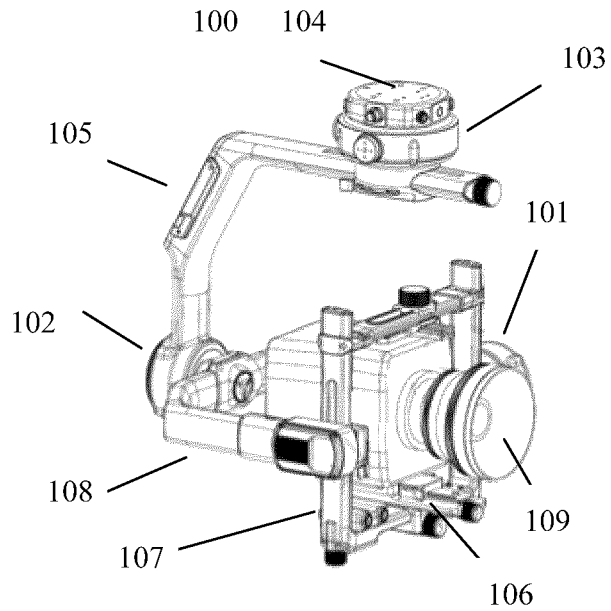


FIG. 1

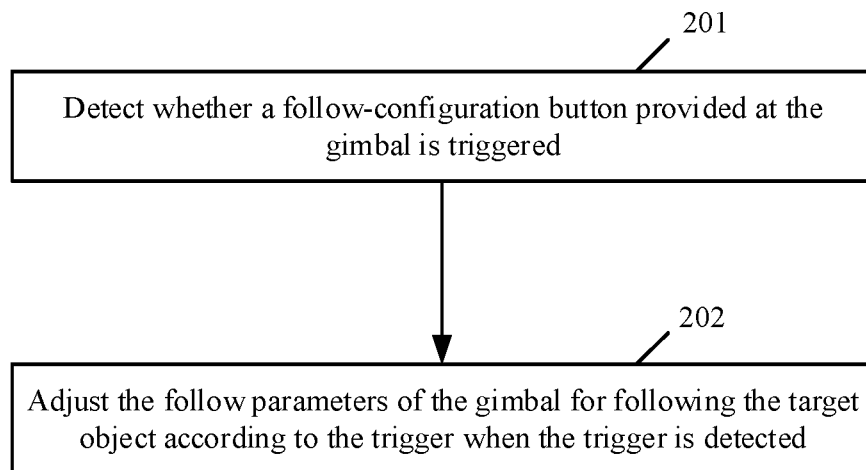


FIG. 2

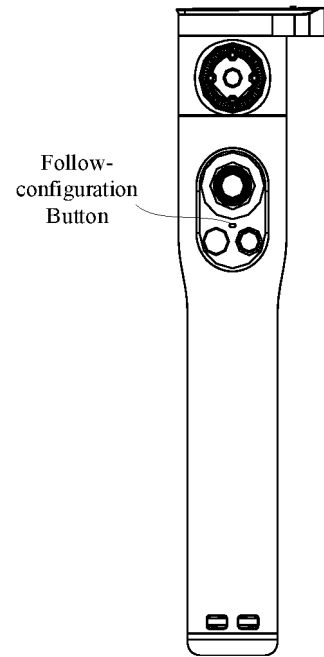


FIG. 3

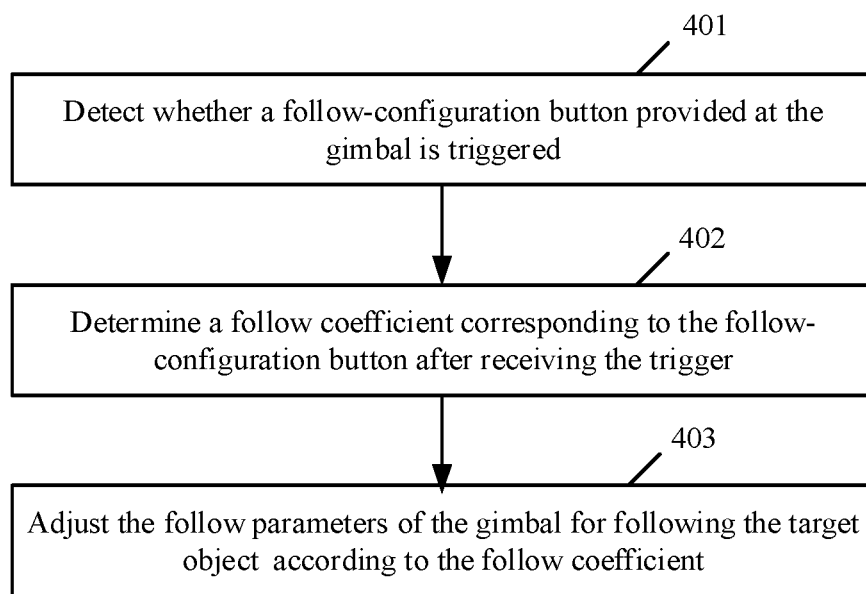


FIG. 4

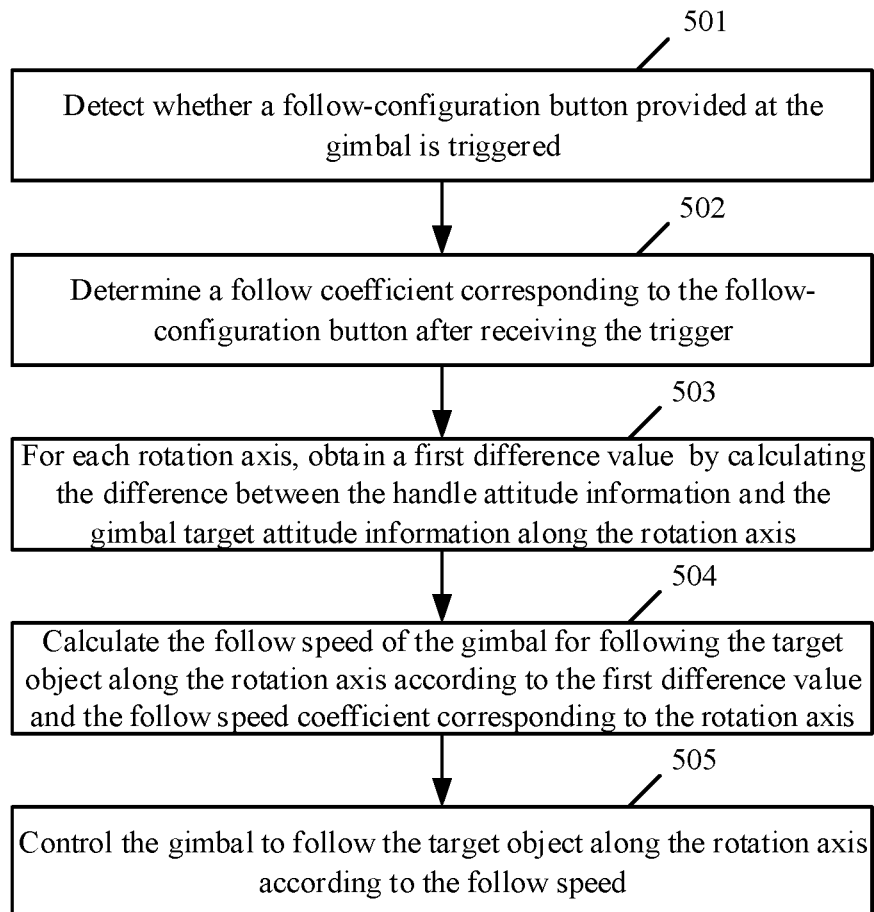


FIG. 5

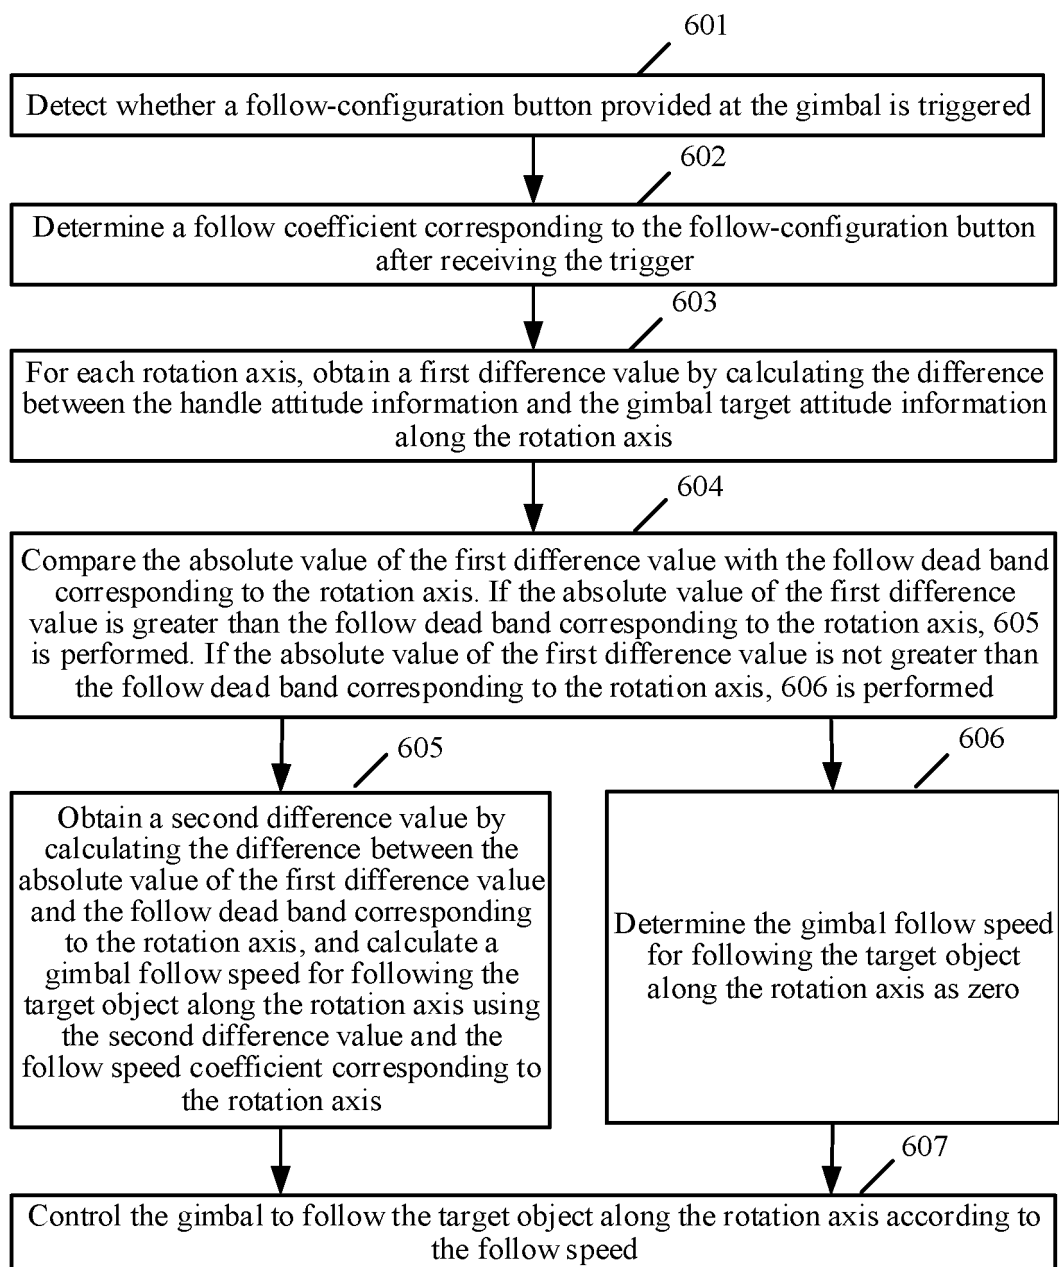


FIG. 6

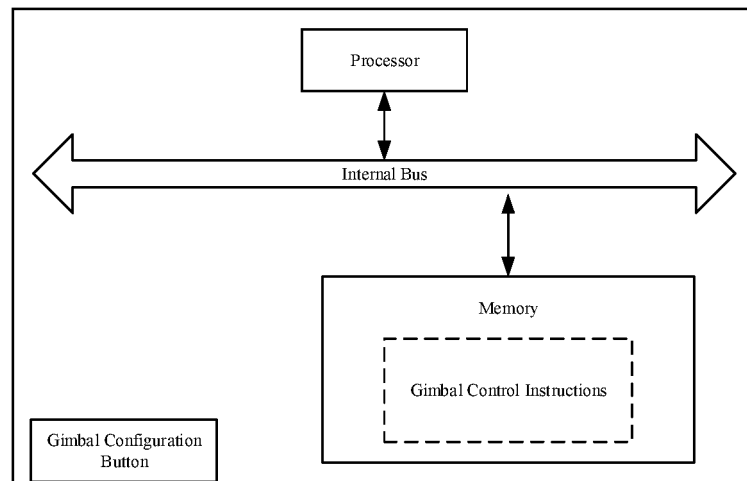


FIG. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/071534

## A. CLASSIFICATION OF SUBJECT MATTER

H04N 5/232(2006.01)i; F16M 11/08(2006.01)i; F16M 11/10(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N; F16M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNTXT; CNABS; CNKI; VEN: 云台, 按键, 按钮, 跟随, 调整, 手持, 云台, 系数, 参数, 目标, 手柄, 调节, 死区, 速度, 跟踪, 转动轴, key, button, handle, tripod, head, coefficient, parameter, deadband, track, follow, rate, target, speed, velocity, axis, rotation

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                  | Relevant to claim No.   |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| X         | CN 107079103 A (SHENZHEN DJI OSMO TECHNOLOGY CO., LTD.) 18 August 2017 (2017-08-18)<br>description, paragraphs [0025]-[0051] and [0253]-[0264], and figures 1 and 7 | 1-8, 19, 21-28, 39, 41  |
| Y         | CN 107079103 A (SHENZHEN DJI OSMO TECHNOLOGY CO., LTD.) 18 August 2017 (2017-08-18)<br>description, paragraphs [0025]-[0051] and [0253]-[0264], and figures 1 and 7 | 9-18, 20, 29-38, 40, 41 |
| Y         | CN 102662404 A (TIANJIN ANDON HEALTH CO., LTD. ET AL.) 12 September 2012 (2012-09-12)<br>description, paragraphs [0027]-[0054], and figures 1 and 2                 | 9-18, 20, 29-38, 40, 41 |
| A         | CN 106249888 A (NINEBOT (BEIJING) TECHNOLOGY CO., LTD.) 21 December 2016 (2016-12-21)<br>entire document                                                            | 1-41                    |
| A         | CN 105223967 A (SHENZHEN DAJIANG INNOVATION TECHNOLOGY CO., LTD.) 06 January 2016 (2016-01-06)<br>entire document                                                   | 1-41                    |
| A         | JP 3959363 B2 (NIAV) 15 August 2007 (2007-08-15)<br>entire document                                                                                                 | 1-41                    |

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

\* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&amp;” document member of the same patent family

Date of the actual completion of the international search

18 September 2018

Date of mailing of the international search report

08 October 2018

Name and mailing address of the ISA/CN

State Intellectual Property Office of the P. R. China (ISA/  
CN)  
No. 6, Xitucheng Road, Jimenqiao, Haidian District, Beijing  
100088  
China

Authorized officer

Facsimile No. (86-10)62019451

Telephone No.

Form PCT/ISA/210 (second sheet) (January 2015)

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2018/071534**

| Patent document<br>cited in search report | Publication date<br>(day/month/year) | Patent family member(s) | Publication date<br>(day/month/year) |
|-------------------------------------------|--------------------------------------|-------------------------|--------------------------------------|
| CN 107079103 A                            | 18 August 2017                       | WO 2017206072 A1        | 07 December 2017                     |
| CN 102662404 A                            | 12 September 2012                    | None                    |                                      |
| CN 106249888 A                            | 21 December 2016                     | WO 2018019290 A1        | 01 February 2018                     |
| CN 105223967 A                            | 06 January 2016                      | CN 105223967 B          | 28 November 2017                     |
| JP 3959363 B2                             | 15 August 2007                       | JP 2004304244 A         | 28 October 2004                      |

Form PCT/ISA/210 (patent family annex) (January 2015)