



(22) Date de dépôt/Filing Date: 2006/08/24

(41) Mise à la disp. pub./Open to Public Insp.: 2007/03/13

(45) Date de délivrance/Issue Date: 2010/11/23

(30) Priorité/Priority: 2005/09/13 (US11/224,772)

(51) Cl.Int./Int.Cl. *F16K 15/08* (2006.01),
F16K 15/12 (2006.01)


(72) Inventeur/Inventor:
CORNWELL, JAMES P., US

(73) Propriétaire/Owner:
R. CONRADER COMPANY, US

(74) Agent: GIERCZAK, EUGENE J. A.

(54) Titre : CLAPET DE RETENUE A RESSORT

(54) Title: SPRING ACTUATED CHECK VALVE

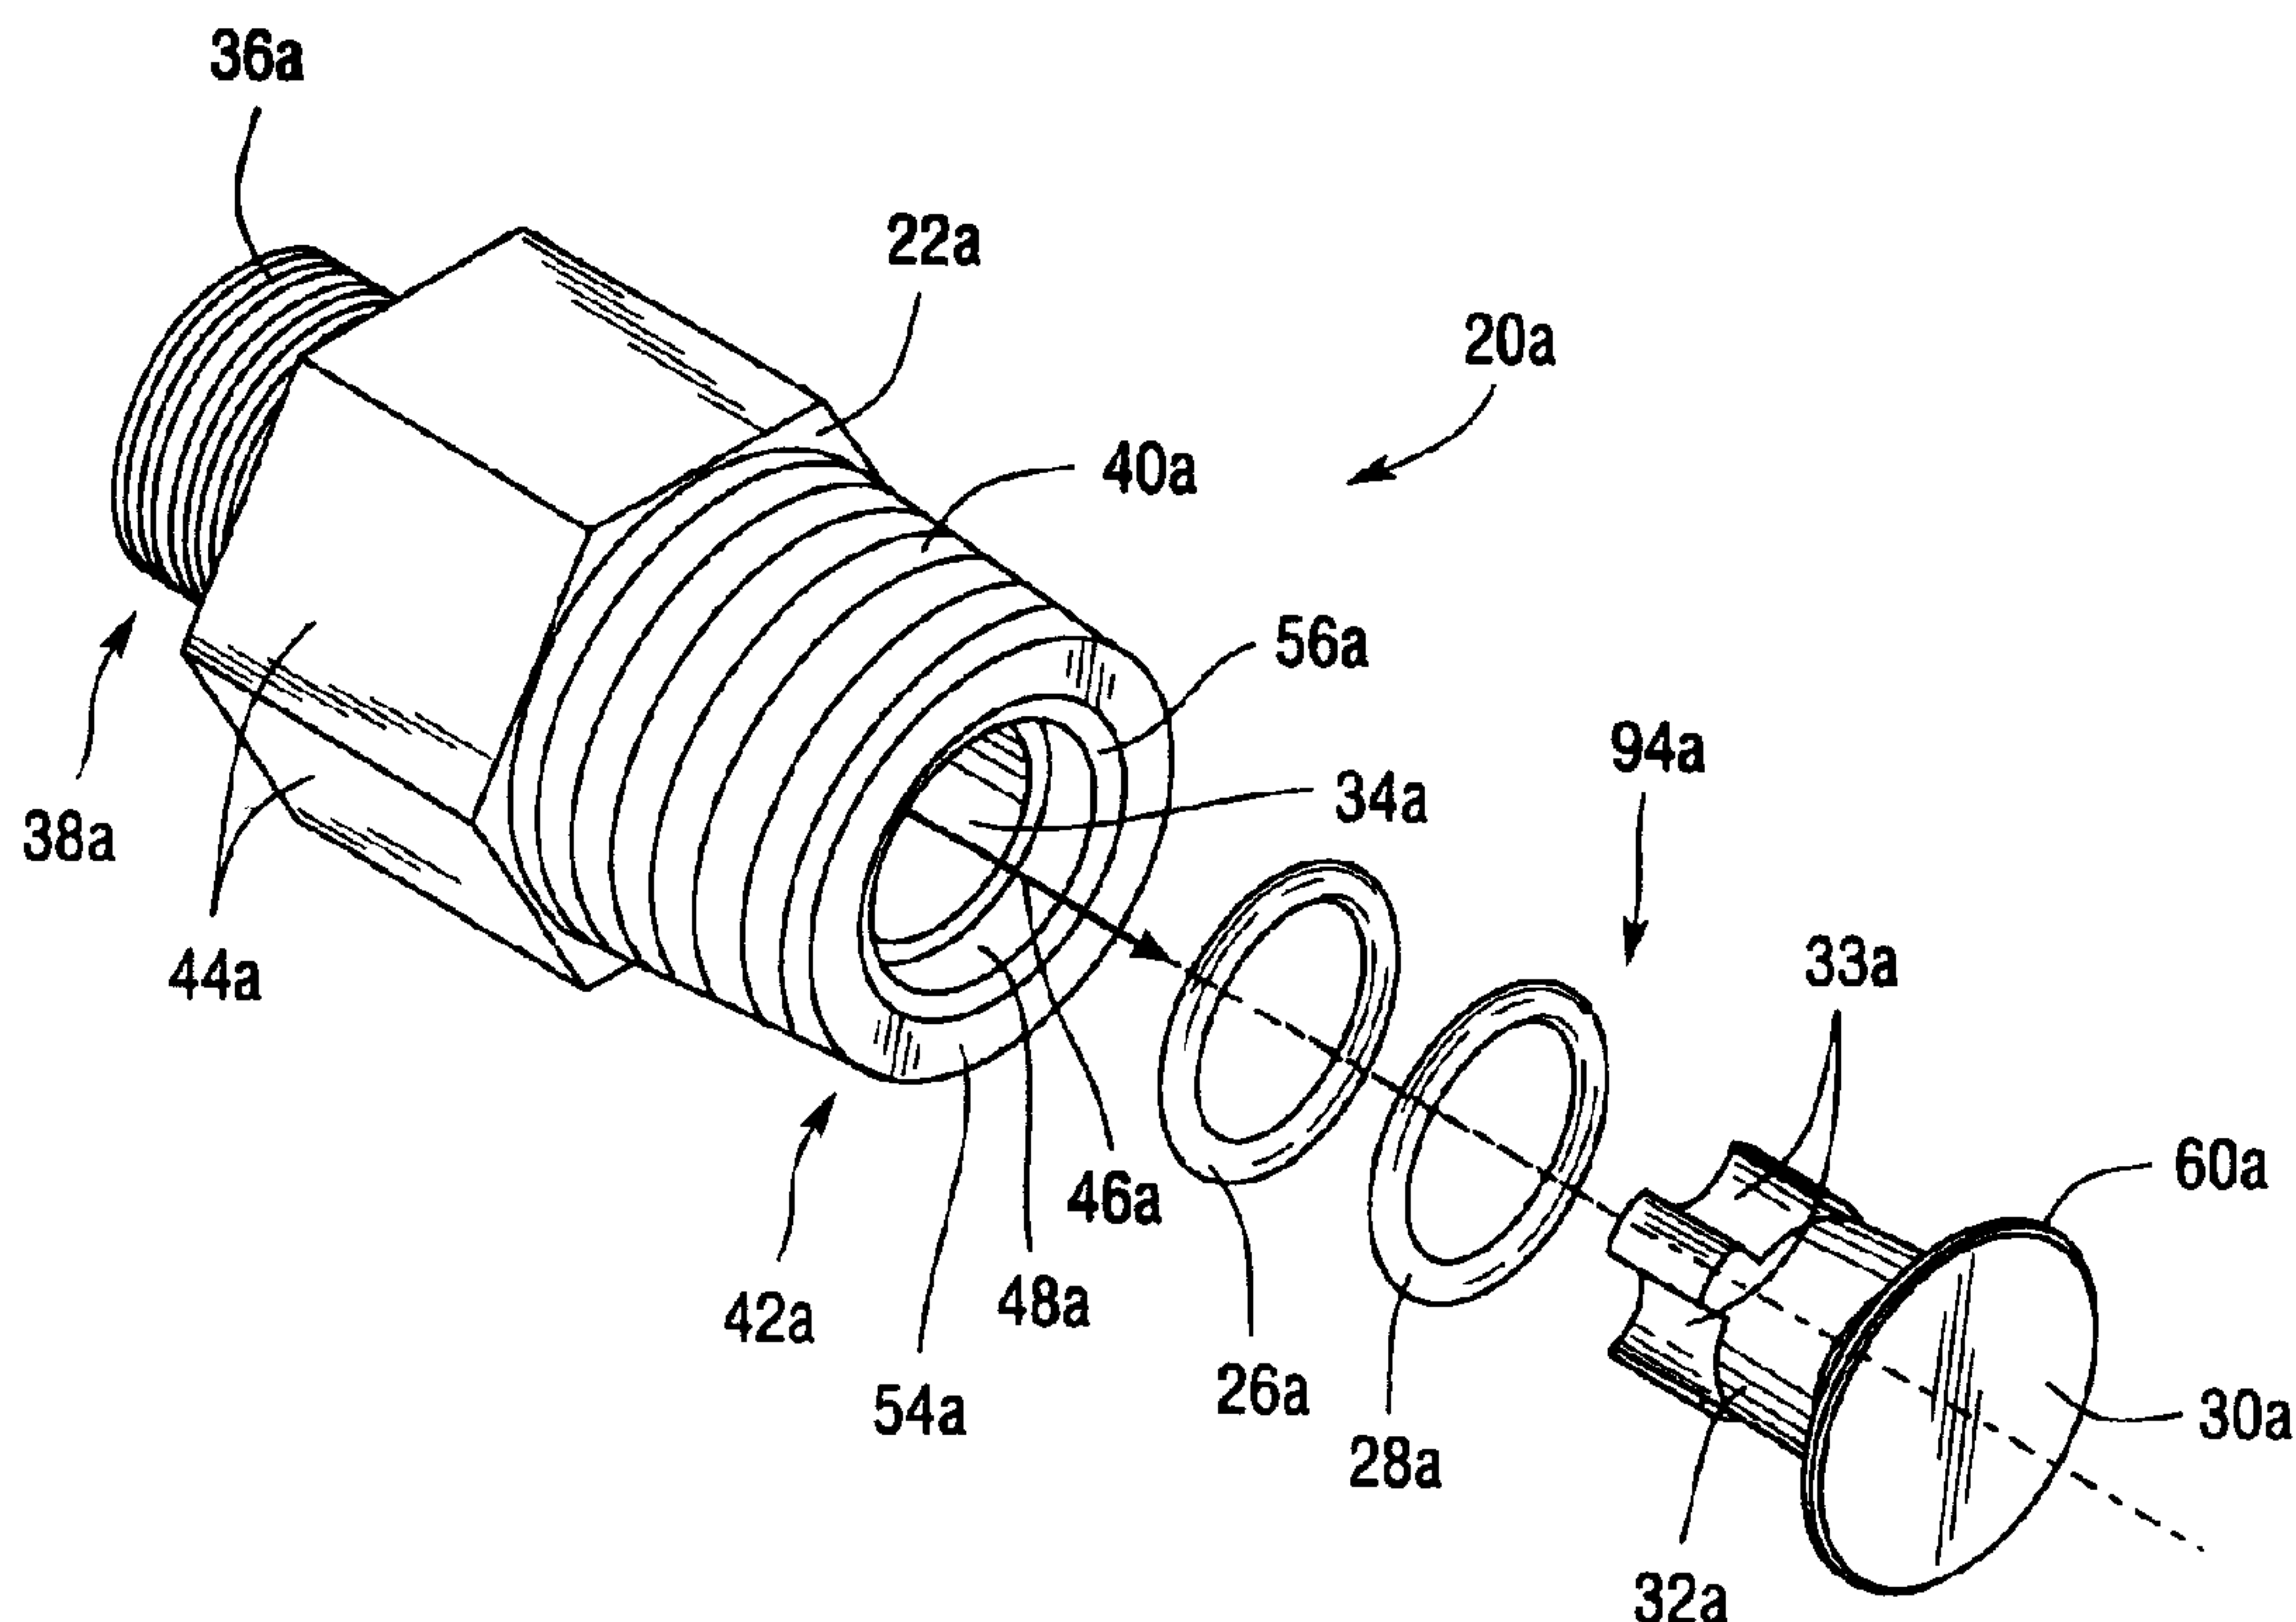

(57) Abrégé/Abstract:

A check valve is for use in a fluid system. A valve body has an inlet end, a valve cavity, and an outlet end. A valve enables a valve assembly to control the flow of fluid therethrough. A plug of the valve assembly includes tapered and non-tapered sections, the tapered section having a cross section that increases in diameter in a direction that is downstream from the inlet end of the valve body. A sealing ring is mounted to reciprocate on the non-tapered section and an elastomeric actuation ring is mounted along the tapered section. The tapered section biases the actuation ring to a normal position, at which the actuation ring contacts and positions the sealing ring in contact with the valve body and the valve assembly to prevent fluid from flowing out the outlet end of the valve body.

Abstract

- 5 A check valve is for use in a fluid system. A valve body has an inlet end, a valve cavity, and an outlet end. A valve enables a valve assembly to control the flow of fluid therethrough. A plug of the valve assembly includes tapered and non-tapered sections, the tapered section having a cross section that increases in diameter in a direction that is downstream from the inlet end of the valve body. A sealing ring is mounted to reciprocate on the non-tapered section and an elastomeric
- 10 actuation ring is mounted along the tapered section. The tapered section biases the actuation ring to a normal position, at which the actuation ring contacts and positions the sealing ring in contact with the valve body and the valve assembly to prevent fluid from flowing out the outlet end of the valve body.

Spring Actuated Check Valve

Background

Check valves are used in a variety of applications in fluid systems to allow for the
5 unidirectional passage of upstream pressurized fluid, that is, pressurized fluid upstream of the
outlet of a check valve, above a particular preselected threshold pressure level. Check valves of
the expandable o-ring style type can include an elastomeric ring that can be mounted on a conical
shaped tapered surface of a valve. The elastomeric ring usually has a memory shape and is
mounted to constrict the tapered surface, causing the ring to be biased to a normal position on the
10 tapered surface that has a smaller cross sectional diameter. When the elastomeric ring is in this
normal position, the ring normally seals against the valve body to prevent the flow of fluid
through the valve.

If fluid pressure downstream from the elastomeric ring is greater than fluid pressure
upstream from the ring, the downstream pressure along with the bias of the elastomeric ring will
15 cause the ring to return to the normal position, closing the valve. The check valve will also
remain closed if upstream fluid pressure is greater than downstream pressure unless the upstream
pressure exerts a total force against the elastomeric ring that is greater than a predetermined
cracking force, opening the valve. The predetermined cracking pressure is typically dependent on
the total biasing force of the ring's memory shape and the amount of surface area of the ring that
20 is exposed to fluid pressure at a given time.

Expandable o-ring style check valves are desirable to use since they have an inherent
advantage in that a check valve spring and sealing member are usually combined into a single
elastomeric ring component. However, where a single elastomeric ring is used both as a valve
spring and sealing member, a ring material must be selected that can allow the ring to perform

adequately both in spring actuation and sealing capacities. It follows that the use of a single elastomeric ring may not allow for the use of ring shapes and materials optimal for both spring actuation and sealing.

Summary

5 A check valve is for use in a fluid system such as an air compressor system, liquid pump or other fluid system that allows for the movement of fluid through the valve. A valve body has an inlet end through which a fluid, such as atmospheric air, enters the check valve, and an outlet end, through which fluid exits the check valve. A valve cavity within the valve body extends between about the inlet end and the outlet end of the valve. A valve assembly is located at a
10 position relative to the valve cavity that enables the valve assembly to control the flow of fluid through the valve cavity.

 A plug of the valve assembly includes both tapered and non-tapered sections, the tapered section having a cross section that increases in diameter in a direction that is downstream from the inlet end of the valve body. The valve assembly also includes a sealing ring that is mounted
15 to reciprocate on the non-tapered section and an elastomeric actuation ring mounted along the tapered section. The tapered section biases the actuation ring to a normal position, at which the actuation ring contacts and positions the sealing ring in contact with the valve body and the valve assembly to prevent fluid from flowing downstream from the inlet end out the outlet end of the valve body.

20 The valve assembly allows fluid to flow downstream from the inlet and out the outlet end of the valve body when the fluid pump produces an amount of fluid pressure that is necessary to create a force against the sealing ring that is sufficient to cause the sealing ring to exert a force against the actuation ring and cause the sealing ring to be located at a position away from the valve body to create a preselected clearance between the valve body and sealing ring.

By including separate actuation and sealing rings, the invention allows each ring to have a shape or be constructed of a material that is better suited for performing the respective function of each ring. The combination of rings also allows the check valve to be better optimized to accommodate a particular liquid or gas, be better incorporated into in a particular system type, or
5 be better adapted to a particular check valve application.

In some embodiments of the invention, the portion of the valve cavity, between about the inlet end of the valve body and the location where the sealing ring contacts the valve body, can have a minimum cross sectional area that allows the pressure of fluid flowing through the preselected clearance to be sufficient to continuously remove fluid from the valve cavity to
10 prevent substantial accumulation of back pressure produced by the fluid pump upstream of the valve when the sealing ring is located at a position away from the valve body to create the preselected clearance between the valve body and sealing ring. Thus, in some embodiments, this ability to continuously remove fluid to prevent substantial accumulation of back pressure enables the accommodation of a process flow of fluid through the valve. The invention can also be
15 incorporated in valves that are limited to accommodating non-process flows of fluid, such as leakage clearance flows and control flows, or applications where substantial accumulations of back pressure are acceptable or desirable.

Those skilled in the art will realize that this invention is capable of embodiments that are different from those shown and that details of the structure of the disclosed check valve can be
20 changed in various manners without departing from the scope of this invention. Accordingly, the following drawings and descriptions are to be regarded as including such equivalent check valves as do not depart from the spirit and scope of the invention.

Brief Description of the Drawings

For a more complete understanding and appreciation of this invention, and many of its advantages, reference will be made to the following detailed description taken in conjunction with the accompanying drawings.

5 FIG. 1 is an exploded perspective view of a check valve according to one embodiment of the invention;

FIG. 2A is a side cross sectional view of the check valve of FIG. 1 depicting an elastomeric actuation ring and sealing ring in a normal position;

10 FIG. 2B is a side cross sectional view of the check valve of FIG. 1 depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 3A is a side cross sectional view of a check valve of the invention depicting an elastomeric actuation ring and sealing ring in a normal position;

FIG. 3B is a side cross sectional view of the check valve of FIG. 3A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

15 FIG. 4 is a side partial cross sectional view of an air compressor system incorporating check valves according to the invention;

FIG. 5 is a magnified side partial cross sectional view of an unloader and check valve included in the air compressor system of FIG. 4;

20 FIG. 6 is a magnified side partial cross sectional view of the compressor pump of the air compressor system of FIG. 4;

FIG. 7A is a side cross sectional view of a check valve of the invention depicting an elastomeric actuation ring and sealing ring in a normal position;

FIG. 7B is a front view of the check valve of FIG. 7A;

FIG. 8A is a side cross sectional view of a check valve of the invention depicting an elastomeric actuation ring and sealing ring in a normal position;

FIG. 8B is a side cross sectional view of the check valve of FIG. 8A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

5 FIG. 9A is a side cross sectional view of a check valve of the invention depicting an elastomeric actuation ring and sealing ring in a normal position;

FIG. 9B is a side cross sectional view of the check valve of FIG. 9A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

10 FIG. 10A is a side cross sectional view of a check valve of the invention depicting an elastomeric actuation ring and sealing ring in a normal position;

FIG. 10B is a side cross sectional view of the check valve of FIG. 10A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 11A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

15 FIG. 11B is a side cross sectional view of the check valve of FIG. 11A depicting a preselected clearance between the sealing ring and the valve body;

FIG. 11C is a side cross sectional view of the check valve of FIG. 11A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

20 FIG. 12A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

FIG. 12B is a side cross sectional view of the check valve of FIG. 12A depicting a preselected clearance between the sealing ring and the valve body;

FIG. 12C is a side cross sectional view of the check valve of FIG. 12A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 13A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

FIG. 13B is a side cross sectional view of the check valve of FIG. 13A depicting a preselected clearance between the sealing ring and the valve body;

5 FIG. 13C is a side cross sectional view of the check valve of FIG. 13A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 14A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

10 FIG. 14B is a side cross sectional view of the check valve of FIG. 14A depicting a preselected clearance between the sealing ring and the valve body;

FIG. 14C is a side cross sectional view of the check valve of FIG. 14A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 15A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

15 FIG. 15B is a side cross sectional view of the check valve of FIG. 15A depicting a preselected clearance between the sealing ring and the valve body;

FIG. 15C is a side cross sectional view of the check valve of FIG. 15A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

20 FIG. 16A is a side cross sectional view of an outlet end of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions;

FIG. 16B is a side cross sectional view of the check valve of FIG. 16A depicting a preselected clearance between the sealing ring and the valve body;

FIG. 16C is a side cross sectional view of the check valve of FIG. 16A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body;

FIG. 17A is a side cross sectional view of a check valve according to one embodiment of the invention having an actuation ring and sealing ring in normal positions; and

FIG. 17B is a side cross sectional view of the check valve of FIG. 17A depicting a preselected clearance that is a valve clearance between the sealing ring and the valve body.

5

Detailed Description

Referring to the drawings, similar reference numerals are used to designate the same or corresponding parts throughout the several embodiments and figures. Specific embodiment variations in corresponding parts are denoted with the addition of lower case letters and/or single or multiple prime indicators to reference numerals.

10

FIG. 1 is an exploded perspective view of a check valve **20a** of the invention depicting an exterior view of a valve body **22a**. A valve assembly **24a** includes an elastomeric sealing ring **26a**, actuation ring **28a**, and plug **30a**. The plug **30a** includes a shaft **32a** having multiple flutes **33a** positioned to function as air passages when the plug **30a** is inserted into a valve cavity **34a** of the valve body **22a**. The valve body **22a** includes upstream threads **36a** located at an inlet end **38a** of the valve body **22a** and downstream threads **40a** located at an outlet end **42a** of the valve body **22a**. The upstream and downstream threads **36a** and **40a** allow for attachment to other components of a fluid system along a path of flowing fluid. Engagement surfaces **44a** allow for installation of the valve body **22a** into the fluid system using a wrench or other suitable installation tool.

20

As best understood with reference to the assembled side cross sectional view of the check valve **20a** depicted in FIGS. 2A and 2B, the valve cavity **34a** extends through the valve body **22a** from the inlet end **38a** to the outlet end **42a** and is intended to allow air to pass in a direction **46a**

that is downstream from the inlet end **38a**. A pressure chamber **48a** is the portion of the valve cavity **34a** that is located upstream from and adjacent the sealing ring **26a**.

The plug **30a** includes a tapered section **50a** and a non-tapered section **52a**. The tapered section **50a** has a cross section that increases in diameter in the direction **46a**, that is away from the face **54a** of the valve body **22a** and downstream from the inlet end **38a** of the valve body **22a**. The actuation ring **28a** is mounted around the plug **30a** to reciprocate on the tapered section **50a**. Due to an elastic spring force creating a memory shape, the internal diameter of the actuation ring **28a**, when assuming its memory shape, is slightly less than the smallest diameter of the tapered section **50a** that the actuation ring **28a** surrounds when positioned along the tapered section **50a**. As a result, the elastomeric seal **74a** maintains a sealing fit against the tapered section **50a** to prevent the passage of air therebetween. The memory shape of the actuation ring **28a** also serves to bias the actuation ring **28a** to move along the tapered section **50a** to a normal position where the actuation ring **28a** is located at or toward the smallest diameter of the tapered section **50a**, as depicted in FIG. 2A.

The sealing ring **26a** is mounted around the plug **30a** to reciprocate on the non-tapered section **52a**. When the actuation ring **28a** is located at the normal position, the positioning of the actuation ring **28a** and its contact with the sealing ring **26a** also causes the sealing ring **26a** to move along the non-tapered section **52a** to a normal position as depicted in FIG. 2A. When the sealing ring **26a** and actuation ring **28a** are in the normal positions, the sealing ring **26a** contacts the valve body **22a** at an inside chamfer **56a** of the valve cavity **34a**. The chamfer **56a** has a cross section that increases in diameter in the direction **46a** that is downstream from the inlet end **38a** of the valve body **22a**. While the sealing ring **26a** is in the normal position, the curvature of the sealing ring **26a** partially fits into and seals with the chamfer **56a**, preventing the flow of air therebetween. Since the sealing ring **26a**, when in contact with the chamfer **56a**, seals against

both the valve body **22a** and the actuation ring **28a**, the sealing ring **26a** prevents the passage of air through the outlet end **42a** when in the normal position to close the check valve **20a**.

When the sealing ring **26a** moves along the non-tapered section **52a** in the downstream direction **46a**, the sealing ring **26a** pushes against the actuation ring **28a** to move it in the downstream direction **46a** on the tapered section **50a**. The tapered section **50a** expands the actuation ring **28a** in an outwardly radial direction from the tapered section **50a**, as shown in FIG. 2B. The memory shape of the actuation ring **28a** provides a spring force that opposes this radial expansion, biasing the actuation and sealing rings **28a** and **26a** to the normal positions shown in FIG. 2A.

Consider the check valve **20a** when used with an air compressor system in which a compressor pump (not shown in FIGS. 2A and 2B) forces air to enter the check valve **20a** through the inlet end **38a**. Referring to FIG. 2A, as the compressor pump begins to pressurize the valve cavity **34a**, the amount of force exerted by the increased pressure against the sealing ring **26a** is directly related to the amount of surface area of the sealing ring **26a** that is exposed to the amount of pressure produced by the compressor pump and present in the valve cavity **34a**. A cracking pressure is the minimum level of air pressure that must be present in the valve cavity **34a** to create a cracking force against the sealing ring **26a**. Such force is required to initially move the sealing ring **26a** against the biasing force of the actuation ring **28a** and away from contact with the valve body **22a** toward a position that establishes a preselected clearance between the sealing ring **74a** and valve body **22a**.

The position of the sealing ring **26a** on the non-tapered section **50a** of the plug **30a** exposes the sealing ring **26a** to air pressure that is present throughout the valve cavity **34a**, including the flutes **33a** and pressure chamber **48a**. Thus, the actual amount of force that the sealing ring **26a** is subjected to is a result of the air pressure within the check valve **20a**. The

sealing ring **26a** in turn exerts a force against the bias of the actuation ring **28a**. When a cracking force is exerted against the sealing ring **26a**, both the sealing ring **26a** and actuation ring **28a** move in the downstream direction **46a** against the bias of the actuation ring **28a** to create the preselected clearance between the sealing ring **26a** and valve body **22a**. Since the biasing force
5 of the actuation ring **28a** is created by the memory shape of the actuation ring **28a** as it is stretched in a radial direction by the tapered section **50a**, the maintenance of the preselected clearance continues to depend on the actual force exerted by the air pressure against the sealing ring **26a** and actuation ring **28a**. This remains true even if the magnitude of the force is not directly and proportionately related to the magnitude of air pressure in the valve cavity **34a**.

10 Comparing FIGS. 2A and 2B, when the air pressure within the valve cavity **34a** of the closed check valve **20a** reaches the cracking pressure to exert a cracking force against the sealing ring **26a**, the sealing ring **26a** loses contact with the chamfer **56a**. As the sealing ring **26a** moves away from contact with the chamfer **56a**, an increased amount of surface area of the sealing ring **26a** becomes exposed to upstream air pressure from the compressor pump. Some surface area of
15 the actuation ring **28a** also becomes initially exposed to upstream air pressure. Since the force exerted against the sealing ring **26a** is directly related to the amount of surface area that is exposed to air pressure moving downstream from the inlet end **38a**, the amount of force exerted against the sealing ring **26a** will increase in direct proportion to the increase in the amount of surface area that becomes exposed due to the lost contact between the sealing ring **26a** and
20 chamfer **56a**. Therefore, once the sealing ring **26a** moves out of contact with the chamfer **56a**, the amount of force exerted against the sealing ring **26a** will increase by virtue of the increased amount of exposed surface area of the sealing ring **26a**, even if the amount of air pressure produced by the compressor pump does not itself increase further.

Once the contact between the sealing ring **26a** and chamfer **56a** is lost, the subsequent movement of air through the open valve **20a** past the sealing ring **26a** will also create a dynamic force, in addition to the force produced by the upstream air pressure itself, that will further increase the total amount of force that is exerted against the sealing ring **26a**. Since the lost
5 contact between the sealing ring **26a** and chamfer **56a** also results in the actuation ring **28a** becoming initially exposed to upstream air pressure, an additional amount of force, directly related to the amount of area of the actuation ring **28a** exposed to upstream air moving in the downstream direction **46a**, will be exerted against the actuation ring **28a** as well. This additional force against the actuation ring **28a** is added to the force exerted by the sealing ring **26a** to
10 comprise the total force acting against the bias of the actuation ring **28a** after it has moved on the tapered section **50a** in the downstream direction **46a**.

Due to the increased total forces that result from the lost contact between the chamfer **56a** and sealing ring **26a**, it may be possible to reduce the air pressure produced by the air compressor to a level that is below the cracking pressure, once the sealing ring **26a** and chamfer
15 **56a** are out of contact, without causing the check valve **20a** to close. However, due to the spring force of the actuation ring **28a**, the total force actually exerted against the sealing ring **26a** and actuation ring **28a** that is necessary to keep the sealing ring **26a** out of contact with the chamfer **56a** and maintain a preselected clearance must be at least as great as the cracking force, which is the total force exerted against the sealing ring **26a** and actuation ring **26a** by the cracking
20 pressure produced by the compressor pump when the sealing ring **26a** initially moves out of contact with the chamfer **56a**. If at any time the total force exerted against the sealing ring **26a** and actuation ring **28a** falls below the cracking force, the spring force of the actuation ring **28a** will again cause the sealing ring **26a** to seal against the chamfer **56a** and close the check valve **70a**.

If the force exerted against the sealing and actuation rings **26a** and **28a** continues to increase beyond the cracking force after the sealing ring **26a** and chamfer **56a** lose contact, the sealing ring **26a** will continue to move along the non-tapered section **52a** and the actuation ring **28a** will continue to move along the tapered section until the check valve **20a** is opened fully and

5 has reached a maximum preselected clearance or a "valve clearance" **58a** between sealing ring **28a** and valve body **22a**, as depicted in FIG. 2B. The minimum amount of air pressure that the compressor pump must produce and maintain in the valve cavity **34a** of the check valve **20a** to create sufficient clearance force against the sealing and actuation rings **26a** and **28a** and maintain the check valve **20a** in the fully open position is the clearance pressure of the check valve **20a**.

10 When the check valve **20a** is fully open, the increased total amount of clearance force exerted against the sealing ring **24a** is partly due to the increased amount of surface area of the sealing and actuation rings **26a** and **28a** exposed to air from the compressor and also partly due to the dynamic force of the air as it passes the sealing and actuation rings **26a** and **28a**.

When opened fully, the check valve **20a** restricts further movement of the sealing and

15 actuation rings **26a** and **28a** with a restrictor **60a**, which impedes further radial stretching and movement of the actuation ring **28a** in the downstream direction **46a**. In this position, a valve clearance **58a** exists between the valve body **22a** and the sealing ring **26a**, which is the maximum preselected clearance that the check valve **20a** provides for the passage of air from the valve cavity **34a** out the outlet end **42a** of the valve body **22a**.

20 Since the total amount of force exerted against the sealing and actuation rings **26a** and **28a** increases due to increased exposed surface area of the sealing and actuation rings **26a** and **28a** due to the dynamic forces of moving air, for some embodiments of the invention, the amount of air pressure that must be maintained in the valve cavity **34a** to maintain the check valve **20a** in

a fully open position and to maintain the valve clearance **58a** between the valve body **22a** and the sealing ring **26a** may be an amount that is substantially less than the cracking pressure.

With the inclusion of separate actuation and sealing rings, the invention allows each ring to be constructed of a material that is better suited for performing the respective function of each ring. The combination of rings also allows the check valve to be better optimized to
5 accommodate a particular liquid or gas, be better incorporated into in a particular system type, or be better adapted to a particular check valve application.

In one example, a suitable combination includes the use of a silicone elastomer actuation ring with a Teflon sealing ring for a check valve used in an air compressor system. Such
10 combination is evaluated for the highly elastomeric, high-temperature resistance, viscosity-retaining, and hardening resistance properties of silicone, making silicone highly suited for use as an actuation ring. Other suitable actuation ring materials for air compressor systems include nitrile elastomers and viton elastomers. Nitrile and viton elastomers can also be appropriately implemented in actuation rings of check valves used in liquid systems such as those that
15 accommodate oil and water.

However, in some check valve applications, such as those that accommodate liquid fluids such as oil or water, silicone is considered to be less effective as a sealing material due to its tendency to swell and its relatively low tear resistance. In comparison, Teflon, though lacking the highly elastic properties of silicone, exhibits resistance swelling, a low coefficient of friction, and
20 effective sealing properties enabling the material to more effectively reciprocate along a non-tapered section of a plug of the invention and seal against a valve body of the invention. Although some properties of silicone can be improved with the addition of appropriate additives or when silicone is incorporated in certain gasket forms, Teflon is often considered superior as a sealing ring in such liquid-accommodating applications.

Other suitable sealing ring materials for both air compressor systems and liquid accommodating systems such as water and oil pump systems include hard viton elastomers, hard nitrate elastomers, and stainless steel. Brass is also considered suitable as a sealing ring material for some air compressor system applications.

5 Some types of materials, such as Aflas, include multiple material varieties that can be separately incorporated as either sealing rings, actuation rings, or both. However, such materials are often expensive and are therefore optimal only in highly specific applications.

Some embodiments of the invention can be sized with sufficient cross sectional clearances to prevent substantial accumulations of fluid backpressure upstream of the valve. This
 10 can be true regardless of whether the pumped fluid creating the backpressure is liquid or gas. For example, consider the check valve **20a** of FIGS. 2A and B used with a fluid pump that is a compressor pump of an air compressor system. Referring to FIG. 2B, the portion of the valve cavity **34a**, that is between about the inlet end **38a** and about the location where the sealing ring **26a** contacts the valve body **22a** at the chamfer **56a**, is sized to have a cross sectional area that
 15 allows the pressure of air flowing through the valve clearance **58a** to be sufficient to continuously remove air from the valve cavity **34a** so as to prevent a substantial accumulation of back pressure produced by the air compressor upstream of the check valve **20a**, when repeated cycles of the compressor pump's compression cylinder repeatedly cause the sealing ring **26a** and actuation ring **28a** to be located at a position away from the valve body **22a** to create the
 20 preselected valve clearance **58a**. This holds true as the compressor pump maintains levels of air pressure in the valve cavity **34a** up to and including the clearance pressure, even if the clearance pressure is greater than the cracking pressure. Since in FIG. 2B, the location where the sealing ring **28a** contacts the body **22a** is the chamfer **56a** and since the pressure chamber **48a** of the valve cavity **34a** is directly adjacent the chamfer **56a**, the valve cavity **34a** is directly open to

clearances between the valve body **22a** and sealing ring **26a** via the flutes **33a** whenever the valve **20a** is partially or fully open.

There will be a continuous flow of air from the valve cavity **34a** through the clearance between the valve body **22a** and sealing ring **26a** so long as the total force exerted on the sealing
5 ring **26a** and actuation ring **28a** is at least as great as the clearance force. This configuration removes the possibility that air pressure within the pressure chamber **48a** might "starve" or decrease at a rate that is greater than the pressure supplied by the valve cavity **34a**, so that air pressure from the valve cavity **34a** might decrease until it would become insufficient to maintain the preselected clearance **58a** between the sealing ring **26a** and chamfer **56a** of the valve body
10 **22a**. In accordance with one embodiment, the relationship between the size of the cross sectional area along the length of the valve cavity **46a** and the preselected valve clearance **58a** is determined empirically. However, check valves constructed as described above have operated satisfactorily with the cross sectional area of the valve cavity **34a** about equal to or greater than that of the preselected clearance **58a**. When the size of the cross sectional area of the length of
15 the valve cavity is sized appropriately, the pressure chamber **48a** can only starve if the compressor pump fails to maintain sufficient air pressure in the valve cavity **34a** to produce sufficient force to remove contact between the sealing ring **26a** and chamfer **56a**.

Referring to FIG. 2B, the valve clearance **58a** is sufficient for the pressure of air flowing there through to continuously remove air from the valve cavity **34a** through the outlet end **42a** of
20 the valve body **22a**. This continues to occur throughout the repeated cycles of the compression cylinder of the compressor pump. Since the valve cavity **34a** is directly open, via the flutes **33a** and pressure chamber **48a**, to the valve clearance **58a**, there is no substantial obstruction to prevent the continuous removal of air from the valve cavity **34a** through the outlet end **42a** of the

valve body **22a** to prevent substantial accumulation of back pressure in the valve cavity **34a** or upstream of the check valve **20a**.

As the compressor pump continues to pressurize the valve cavity **34a** to maintain an air pressure level that is sufficient to maintain a cracking force against the sealing and actuation rings **26a** and **28a**, the valve clearance **58a** will continue to exist between the sealing ring **26a** and valve body **22a**. If movement of the sealing ring **26a** in the downstream direction **46a** to locations along the non-tapered section **52a** that are away from the valve body **22a** results in significant additional amounts of backpressure in the valve cavity **34a**, the resulting smaller clearance between the sealing ring **26a** and valve body **22a** will still allow the pressure of air flowing through the clearance between the sealing ring **26a** and valve body **22a** to remove sufficient amounts of air from the valve cavity **34a** to prevent substantial accumulation of back pressure. Referring to FIG. 2B, the pressure of air flowing through a valve clearance reduced in size from the preselected valve clearance **58a** continues to be sufficient to continuously remove air from the valve cavity **34a** to prevent substantial accumulation of back pressure whenever the compressor pump produces a clearance pressure.

The ability of the check valve **20a** to operate without substantial accumulations of back pressure from the valve cavity **34a** enables the valve **20a** to be used to pass process flows of air from the inlet end **38a** through the outlet end **42b** of the valve body **22a** without creating substantial back pressure. Process flows of air generally involve the movement of substantial volumes of air such as those used to effect the operation of mechanical devices and fluid-driven processes. The ability of the check valve **20a** to admit large amounts of air through the preselected clearance **58a** between the valve body **22a** and sealing ring **26a** enables the check valve **20a** to perform this function.

FIGS. 4-6 depict an air compressor system **62a** incorporating check valves of the invention into various system components. The compressor system **62a** includes an electric motor **64** configured to operate a piston **66** that is located within the compression cylinder **68** of a compressor pump **70**. A valve plate **72** positioned above the compression cylinder **68** includes an inlet check valve **20a'** and an outlet check valve **20a''** of the invention and forms the valve body of both valves. Air enters the compressor pump **70** through an inlet filter **74** and inlet port **76** to enter into and create upstream atmospheric air pressure in a cylinder inlet chamber **78**. When the piston **66** reciprocates within the compression cylinder **68**, the piston **66** makes repeated intake strokes (moving in a downward direction in FIGS. 4 and 6) and compression strokes (moving in an upward direction in FIGS. 4 and 6).

As best understood with reference to FIG. 6, during each intake stroke, the piston **66** creates a vacuum in the compression cylinder **68**. This causes a differential in air pressure between the cylinder inlet chamber **78** and compression cylinder **68** that is greater than the cracking pressure of the inlet check valve **20a'**. As a result, air from the cylinder inlet chamber **78** flows through the flutes **33a'** and pressure chamber **48a'** to push the sealing ring **26a'** along the non-tapered section **52a'** of the plug **30a'** which in turn creates a preselected clearance by removing sealing contact between the sealing ring **26a'** and valve plate **72**, allowing air to enter the compression cylinder **68** through the inlet check valve **20a'**. During each intake stroke, air cannot enter through the outlet check valve **20a''** from a cylinder outlet chamber **80** since air pressure contained in the cylinder outlet chamber **80** and the spring force of the actuation ring **28a''** force the sealing ring **26a''** into sealing contact with the valve plate **72**, preventing the backflow of downstream air into the compression cylinder **68**.

During each compression stroke, the piston **66** compresses air previously drawn into the compression cylinder **68** during the preceding intake stroke. This causes a differential in air

pressure between the compression cylinder **68** and cylinder outlet chamber **80** that is greater than the cracking pressure of the outlet check valve **20a''**. As a result, air from the compression cylinder **68** flows through the flutes **33a''** and pressure chamber **48a''** to force the sealing ring **26a''** along the non-tapered section **52a''** of the plug **30a''** which in turn creates a preselected clearance by removing sealing contact between the sealing ring **26a''** and valve plate **72**, allowing air to enter the cylinder outlet chamber **80** through the outlet check valve **70a''**. During each compression stroke, air cannot enter through the inlet check valve **20a'** from the cylinder inlet chamber **78** since the compressed air of the compression cylinder **68** and the spring force of the actuation ring **28a'** force the sealing ring **26a'** into sealing contact with the valve plate **72**, preventing the flow of air into the compression cylinder **68** from the cylinder inlet chamber **78**.

Repeated compression strokes by the piston **66** will lead to pressurization of the air contained within the cylinder outlet chamber **80** and, via the outlet port **82**, the discharge tube **84**. Referring to FIG. 4, the discharge tube **84** leads to a reservoir check valve **20a'''** of the invention which is connected to allow for the flow of compressed air into an air reservoir **86**. As best understood by comparing FIG. 4 with the magnified view of the reservoir check valve **20a'''** and an unloader valve **88** in FIG. 5, the discharge tube **84** connects to the inlet end **38a'''** of the reservoir check valve **20a'''** to allow compressed air from the compressor pump **70** to flow through the valve cavity **34a'''** toward the outlet end **42a'''**. When air pressure in the valve cavity **34a'''** exceeds the air pressure within the air reservoir **86** by a pressure differential that results in a force exceeding the cracking force of the check valve **20a'''**, the sealing ring **26a'''** moves along the non-tapered section **52a'''** of the plug **30a'''** against the bias of the actuation ring **28a'''** to remove the sealing ring **26a'''** from sealing contact with the valve body **22a'''** and creates a preselected clearance there between. This allows air to flow from the valve cavity **34a'''** through

the flutes **33a'''** and pressure chamber **48a'''** and past the sealing ring **26a'''** into the air reservoir **86**.

Referring to FIG. 4, a pilot valve **90** is mounted on the air reservoir **86** and is responsive to the level of air pressure that is present within the air reservoir **86**. A pilot valve tube **92** extends from the pilot valve **90** to the unloader valve **88** and allows the pilot valve **90** to transmit a pneumatic pressure signal to the unloader valve **88** which the unloader valve **88** receives from the pilot valve tube **92** through a signal chamber **94**.

Referring to FIGS. 4 and 5, consider a situation in which the compressor pump **20** continues to pressurize the air reservoir **86** until the air pressure within the reservoir **86** reaches a preselected maximum level. The pilot valve **90**, being responsive to the level of air pressure within the air reservoir **86**, detects that the level of air pressure present in the reservoir **86** is at the preselected maximum level and responds by transmitting a pneumatic signal through the pilot valve tube **92**. The pneumatic signal is received by the signal chamber **94** of the unloader valve **88**, resulting in an increase in the amount of pneumatic pressure present within the signal chamber **94**. The increased pressure in the signal chamber **94** results in pneumatic pressure being exerted through a signal aperture **96** to push against a sealing diaphragm **98**. The sealing diaphragm **98** in turn pushes against an actuating stem **100** connected to an unloader piston **102** located in an unloader chamber **104**.

The unloader valve **88** connects to the check valve **20a'''** to link the unloader chamber **104** to the valve cavity **34a'''** of the check valve **20a'''**. The unloader chamber **104** opens to the valve cavity **34a'''** at a location that is upstream of the sealing ring **26a'''**, and extends to a vent **106** that is open to atmosphere. The unloader piston **102** is biased with an unloader spring **108** to a sealing position (shown in FIG. 5) that seals the unloader piston **102** against an unloader seat

110, preventing the flow of air from the valve cavity **34a'''** of the check valve **20a'''** through the unloader chamber **104** and vent **106** to atmosphere.

When the sealing diaphragm **98** pushes against the actuating stem **100**, the stem **100** pushes the unloader piston **102** against the bias of the unloader spring **108**, removing the sealing
 5 contact of the unloader piston **102** against the unloader seat **110**. Therefore, in response to the maximum reservoir air pressure detected by the pilot valve **90**, the unseated unloader piston **102** allows air to flow from the valve cavity **34a'''** of the check valve **20a'''** through the unloader valve **88** to atmosphere. This also causes the pressure differential between the valve cavity **34a'''** and air reservoir **86** to drop to such an extent that air pressure in the valve cavity **34a'''** can no
 10 longer exert a cracking force against the sealing ring **26a'''** and actuation ring **26a'''** and maintain the sealing ring **26a'''** at a location along the non-tapered section **52a'''** of the plug **30a'''** that is away from the valve body **22a'''**, allowing the check valve **20a'''** to close under the spring force of the actuation ring **28a'''**.

The unloader valve **88** continues to allow compressed air from the discharge tube **84** and
 15 valve cavity **34a'''** to exit to atmosphere until the pilot valve **90** detects that the air pressure contained within the air reservoir **86** has fallen below a preselected minimum level. When such a fall in the level of reservoir air pressure occurs, the pilot valve **90** removes the pneumatic air signal from the pilot valve tube **92**, allowing the unloader piston **102** to move under the biasing force of the unloader spring **108** back into sealing contact with the unloader seat **110** and prevent
 20 the flow of air through the unloader valve **88** to atmosphere. This in turn allows air pressure in the valve cavity **34a'''** of the check valve **20a'''** to again rise to a cracking pressure to create a cracking force to move the sealing ring **26a'''** from contact with the valve body **22a'''** and allow for the further pressurization of the air reservoir **86** until the air pressure in the reservoir **86** again

reaches the preselected maximum level. This configuration allows the compressor pump 70 to run continuously without exceeding the preselected maximum air pressure in the air reservoir 86.

Although the invention has been shown and described with respect to an embodiment in which a sealing ring contacts a chamfer or flattened surface of the valve body, it will be appreciated that various types of sealing contact surfaces can be incorporated into a valve body within the scope of the invention, some of which are described below. By way of example, FIG. 3A is a side cross sectional view of a check valve 20b in which the valve body 22b has a face 54b at the outlet end 42b that intersects the pressure chamber 48b at an edge 112b. The sealing ring 26b is reciprocally mounted around the non-tapered section 52b and biased with the actuation ring 28b to a normal position in which the sealing ring 26b makes sealing contact with the edge 112b to prevent the flow of fluid from the pressure chamber 48b through the outlet end 42b of the valve body 22b.

When the sealing ring 26b is in this normal position, a portion of the curved outside surface of the sealing ring 26b remains exposed to the pressure chamber 48b. The edge 112b forms a relatively small point for contact with the sealing ring 26b, increasing the remaining curved outside surface area of the sealing ring 26b that remains exposed to the pressure chamber 48b. By increasing the outside surface area of the sealing ring 26b that is exposed to the pressure chamber 48b, the edge 112b increases the amount of sealing ring surface area that is exposed to fluid pressure present in the valve cavity 34b, reducing the cracking pressure required to initially move the sealing ring 26b away from the edge 112b to create a preselected clearance there between and open the check valve 20b. By forming a relatively small point of contact with the sealing ring 26b, the edge 112b also reduces the distance that the sealing ring 26b must move in the downstream direction 46b along the tapered section 50b to lose sealing contact with the edge

112b and allow for the flow of fluid between the pressure chamber **48b** and outlet end **42b**, further reducing the cracking pressure of the check valve **20b**.

It will be further appreciated that some embodiments may allow variations in the configurations of the plug and pressure chamber. FIGS. 7A and 7B depict side cross sectional and front views of a check valve **20c** having a plug **30c** that is suspended in position at the outlet end **42c** of the valve body **22c** with a restrictor disk **60c**. The plug **30c** is shaftless, with the valve assembly **24c** extending only slightly into the valve cavity **34c** at the outlet end **42c** of the check valve **20c**. This configuration eliminates the need for flutes for the passage of fluid in the valve cavity **34c** in the downstream direction **46c** from the inlet end **38c** to the pressure chamber **48c**. Fluid passages **114** allow fluid to pass through the valve assembly **24c** and out the outlet end **42c** when the sealing ring **26c** moves in the downstream direction **46c** away from the valve body **22c** to create a preselected clearance and open the check valve **20c**. The edge **112c** of the pressure chamber **48c** is located upstream of the downstream terminus **116c** of the valve cavity **34c**.

In some contemplated embodiments of the invention, in which the elastomeric seal seals against an edge of the pressure chamber in the normal position, the edge may vary in construction, placement, and/or orientation with respect to the valve body or other check valve components. FIGS. 8A and 8B depict side cross sectional views of a check valve **20d** in which the valve body **22d** includes a washer insert **118d** that is compression fit into the valve cavity **34d** at the outlet end **42d** to become part of the valve body **22d**. An exposed, downstream surface of the washer insert **118d** forms the face **54d** of the valve body **22d**. The washer insert **118d** also forms part of the inside surface of the valve cavity **34d** in the pressure chamber **48d**. Referring to FIG. 8B, when the check valve **20d** is fully open, the preselected valve clearance **58d** is determined by the clearance that exists between the sealing ring **26d**, as it is positioned against the restrictor **60d**, and the edge **112d** of the valve body **22c** that is created by the washer

insert **118d**. In addition to compression fitting, similar washer inserts can also be connected to the rest of the valve body with threads, adhesives, or other forms of attachment.

Such washer inserts can also be positioned within the valve cavity of a check valve to form a flange or similar structure that is part of the valve body extending inwardly into the valve cavity. FIGS. 9A and 9B depict side cross sectional views of such a check valve **20e** having a washer insert **118e** that is compression fit to a position that is within the valve cavity **34e** near the outlet end **42e** to become part of the valve body **22e**. Due to this positioning of the washer insert **118e**, the face **54e** of the valve **20e** is formed by a downstream surface of the washer insert **118e** and is located in a position that is upstream of the downstream terminus **116e** of the valve cavity **34e**. The washer insert **118e** also forms an inside surface **120e** of the valve cavity **34e** that intersects the face **54e** to create an edge **112e** against which the sealing ring **26e** can seal when in the normal position (as shown in FIG. 9A). The pressure chamber **48e** is located in a position that is immediately upstream of the washer insert **118e**.

Rather than including a separate washer insert or other assembly, the valve body can also include a flange extension or other inwardly extending formation that is formed directly from the valve body material itself. FIGS. 10A and 10B depict a check valve **20f** having a flange extension **122** that extends inwardly into the valve cavity **34f** from the valve body **22f**. The flange extension **122** is machined, cast, or otherwise formed from the material of the valve body **22f** and is located near the outlet end **42f**. Due to this positioning of the flange extension **122**, the face **54f** of the valve **20f** is formed by a downstream surface of the flange extension **122** and is located in a position that is upstream of the downstream terminus **116f** of the valve cavity **34f**. The flange extension **122** also forms an inside surface **120** of the valve cavity **34f** that intersects the face **54f** to create an edge **112f** against which the sealing ring **26f** can seal when in the

normal position (as shown in FIG. 10A). The pressure chamber **48f** is located in a position that is immediately upstream of the flange extension **126**.

Some contemplated embodiments may also include tapered sections divided into segments having different incident angles. For example, FIGS. 11A-C depict a check valve outlet
 5 end **42g** in which the valve assembly **24g** is constructed around a plug **36g** having a tapered section **50g** divided into a first tapered segment **128g** and an adjacent second tapered segment **130g**. The included angle of the second tapered segment **130g** is shallower than the included angle of the first tapered segment **128g**. However, the diameter of the second tapered segment **130g** is greater than the diameter of the first tapered segment **128g**. This difference between the
 10 included angles and diameters of the first and second tapered segments **128g** and **130g** enables the valve assembly **24g** to allow for an increased fluid flow capacity during operation.

Consider the valve assembly **24g** prior to operation when the sealing ring **26g** and actuation ring **28g** are in the normal positions as depicted in FIG. 11A. The sealing ring **26g** remains in contact with the edge **112g** at the face **54g** to close the valve assembly **24g** and
 15 prevents fluid flow through the outlet end **42g**. At the normal position, the actuation ring **28g** contacts the first tapered segment **128g** but not the second tapered segment **130g** of the plug **30g**. The sealing and actuation rings **26g** and **28g** remain in their normal positions until a cracking pressure is introduced in the pressure chamber **48g**. To initially open the valve assembly **24g**, the cracking pressure must be sufficiently large to exert a sufficient amount of force against the
 20 sealing ring **26g**, acting on the limited surface areas of the sealing ring **26g** exposed to the pressure chamber **48g**, to move the sealing ring **26g** away from the valve face **54g** and against the frictional forces encountered by the actuation ring **28g** against the steeper included angle of the first tapered segment **128g**. A sufficient amount of total force exerted against the sealing ring **26g** and actuation ring **28g** must also continue to be present to move the actuation ring **28g**

against the included angle of the first tapered segment **128g** until the sealing and actuation rings **26g** and **28g** move to the positions shown in FIG. 11B. However, since the diameter of the first tapered segment **128g** is less than the diameter of the second tapered segment **130g**, inward radial forces exerted by the actuation ring **28g** are relatively low. As the valve assembly **24g** opens, more surface area of the sealing ring **26g** becomes exposed to the fluid pressure from the pressure chamber **48g**, increasing the total force exerted against the sealing ring **26g** and against the biasing force of the actuation ring **28g**.

Referring now to FIG. 11B, as the sealing ring **26g** continues to move along the non-tapered portion **52g** in the downstream direction **46g**, the actuation ring **28g** moves to the second tapered segment **130g**. As the actuation ring **28g** moves in the downstream direction **46g** along the second tapered segment **130g**, the increased diameter of the second tapered segment **130g** results in increased inward radial forces being exerted by the actuation ring **28g** as it increasingly stretches. Frictional forces between the actuation ring **28g** and second tapered segment **130g** also increase as the actuation ring **28g** stretches further. Thus, as the diameter of the second tapered segment **130g** increases, it becomes increasingly important to keep additional stretching of the sealing ring **26g** to a minimum.

The shallower included angle of the second tapered segment **130g** allows for a reduction in such stretching. As the actuation ring **28g** moves along the second tapered segment **130g** to allow the sealing ring **30g** to move along the non-tapered section **52g** toward the fully open preselected valve position depicted in FIG. 11C, the increased inward radial forces exerted by the actuation ring **28g** are less than they would be if the included angle of second tapered segment **130g** were as steep as the first tapered segment **128g**. Thus, the overall amount of force required to move the actuation ring **28g** to points along the second tapered segment **130g** is reduced. For many operating conditions, and particularly those conditions in which there is sufficient pressure

and force to move the actuation ring **28g** to the second tapered segment **130g**, this tends to allow for the displacement of the sealing ring **26g** a greater distance from the valve face **54g** for a given pressure, allowing a larger volume of fluid to flow through the valve assembly **24g** at the given pressure.

5 It will be appreciated that any number of tapered sections or tapered segments can be included within the contemplated scope of the invention, and it is further contemplated that different tapered segments can share or have different included angles. For example, FIGS. 12A-C depict a check valve outlet end **42h** of the invention in which the valve assembly **24h** includes a tapered section **50h** having a third tapered segment **132h** that has an included angle that is
10 shallower than the included angles of either the first tapered segment **128h** or second tapered segment **130h**. Due to the shallower included angle of the second tapered segment **132h**, after the actuation ring **28h** moves along the first tapered segment **128h**, as depicted in FIG. 12A, less force is required to move the actuation ring **28h** along points of the second tapered segment **130h**, as depicted in FIG. 12B, than would be required if the second tapered segment **132h** had
15 the included angle of the first tapered segment **128h**. Due to the even shallower included angle of the third tapered segment **132h**, after the actuation ring **28h** moves along the second tapered segment **130h**, less force is required to move the actuation ring **28h** along points of the third tapered segment **132h** than would be required if the third tapered segment **132h** had the included angles of either the first tapered segment **128h** or second tapered segment **130h**.

20 It will be further appreciated that tapered sections that are curved or that are otherwise shaped to have a non-constant incident angle can also be incorporated within the contemplated scope of the invention. For example, FIGS. 13A-C depict a check valve outlet end **42i** of the invention that includes a valve assembly **24i** having a curved tapered section **50i** with a diameter that becomes increasingly wider but which has a curved slope that is increasingly shallow in

downstream direction **46i**. The curved shape of the cross sectional slope of the tapered section **50i** can allow for increased flow capacity by the valve assembly **24i** under some operating conditions.

Consider the valve assembly **24i** prior to operation when the sealing ring **26i** and
 5 actuation ring **28i** are in the normal positions as depicted in FIG. 13A. The sealing ring **26i** remains in contact with the edge **112i** at the face **54i** to close the valve assembly **24i** and to prevent fluid flow through the outlet end **42i**. At this position, the actuation ring **28i** contacts the curved tapered section **50i** at a position where the tapered section **50i** has a relatively steep slope. The sealing and actuation rings **26i** and **28i** remain in the normal positions until a cracking
 10 pressure is introduced in the pressure chamber **48i**. To initially open the valve assembly **24i**, the cracking pressure must be sufficiently large to exert a sufficient amount of force against the sealing ring **26i**, acting on the limited surface areas of the sealing ring **26i** exposed to the pressure chamber **48i**, to move the sealing ring **26i** away from the valve face **54i** and against the frictional forces of the actuation ring **28i** encountered as the sealing ring **26i** moves along the
 15 non-tapered section **52i** and the actuation ring **28i** moves along the tapered section **50i**. However, since the diameter of the tapered section **50i** is smaller near the non-tapered section **52i**, inward radial forces exerted by the actuation ring **28i** are relatively low. As the valve assembly **24i** opens, more surface area of the sealing ring **26i** and actuation ring **28i** becomes exposed to the fluid pressure from the pressure chamber **48i**, increasing the total force exerted against the
 20 sealing ring **26i** and actuation ring **28i**.

Referring now to FIG. 13B, once the sealing ring **26i** moves away from the edge **112i**, the actuation ring **28i** moves along the tapered section **50i**, with the increased diameter of the tapered section **50i** causing the actuation ring **28i** to stretch, resulting in increased inward radial forces being exerted by the actuation ring **28i**. Frictional forces between the actuation ring **28i** and

tapered section **50i** also increase as the actuation ring **28i** stretches further. Thus, as the actuation ring **28i** moves further along the tapered section **50i** and away from the valve face **54i**, it becomes increasingly important to keep additional stretching of the actuation ring **28i** to a minimum.

5 The curved cross sectional shape of the tapered section **50i**, in which the slope of the tapered section **50i** becomes increasingly shallower in the downstream direction **46i**, allows for a reduction in such stretching. As the actuation ring **28i** moves along the tapered section **50i** to allow the valve assembly **24i** to assume the fully open preselected valve position depicted in FIG. 13C, the increased inward radial forces exerted by the actuation ring **28i** are less than they
10 would be if the slope of the tapered section **50i** was the same near the restrictor **60i** as it is near the non-tapered portion **52i**. Thus, the overall amount of force required to move the actuation ring **28i** to points along the tapered section **50i** is reduced. This tends to allow the sealing ring **26i** to be displaced a greater distance from the valve face **54i** for a given pressure, allowing a larger volume of fluid to flow through the valve assembly **24i** at the given pressure.

15 Although the invention has been shown and described as having sealing and actuation rings that are cross sectional in shape, it will be appreciated that in some embodiments, other cross sectional shapes can be incorporated within the anticipated scope of the invention. For example, FIGS. 14A-C depict a check valve outlet end **42j** of the invention that includes a valve assembly **24j** having a sealing ring **26j** that is rectangular in its cross sectional shape. As best
20 understood with reference to FIG. 14A, the rectangular cross sectional shape of the sealing ring **26j** allows for increased surface contact between the sealing ring **26j** and the flat surface of the face **54j** when the valve assembly **24j** is closed and the sealing ring **26j** and actuation ring **28j** are in the normal positions. This can serve to enhance sealing of the valve assembly, depending on the selected material of the sealing ring **26j**, for some applications. It will be further

appreciated that other cross sectional ring shapes are possible and that such variations in cross sectional ring shapes can also be made to actuation rings.

Although the invention has been shown and described as being incorporated into check valves of the invention having sufficient cross sectional clearances to allow for the evacuation of substantial accumulations of backpressure, it will be appreciated that the invention can also be incorporated into check valves where the cross sectional clearance of the valve is not sufficient to continuously remove fluid from the valve cavity so as to prevent a substantial accumulation of back pressure produced by the fluid compressor upstream of the check valve. Some embodiments may incorporate configurations in which such accumulations of gas or liquid fluid backpressure or valve starving is either intended or desired due to the specific application of the valve.

FIGS. 15A-C are cross sectional views of the outlet end **42k** of a check valve of the invention having a threaded shank member **134k** that engages the inside threads **136** of the valve cavity **34k**. The shank member **134k** includes a tapered section **50k** on which the sealing ring **26k** and actuation ring **28k** are reciprocally mounted. The sealing ring **26k** and actuation ring **28k** are biased to position the sealing ring **26k** against the face **54k** and prevent the flow of fluid through the outlet end **42k**, as shown in FIG. 15A.

As best understood by comparing FIG. 15A with 15B, the fitting between the shank member **134k** and inside threads **136** is sufficiently loose that a leakage clearance **138** exists between the mating threads of the shank member **134k** and inside threads **136**, permitting fluid **140** to flow through the leakage clearance **138** from upstream of the shank member **134k**, around an indentation fitting **144** of the non-tapered section **52k**, and toward the sealing ring **26k**. The leakage clearance **138** is small in comparison with the amount of fluid that would typically be fed by the compressor pump from upstream of the shank member **134k**.

As a result, the leakage clearance **138** does not generally allow for the passage of a sufficient amount of fluid from upstream of the shank member **134k** to prevent a substantial accumulation of upstream backpressure unless a check valve of an impractically large size is used. Under typical operating conditions, the compressor may therefore create a substantial backpressure in the valve cavity **34k** before a sufficient amount of flowing fluid **140** is capable of creating a cracking force to move the sealing and actuation rings **26k** and **28k** to the partially open positions depicted in FIG. 15B. Additional backpressure may be required to move the sealing and actuation rings **26k** and **28k** to the fully open positions to create a valve clearance **58k**, as depicted in FIG. 15C. However, such a configuration of the outlet end **42k** may be used where the desired accommodated flow is less than a process flow, such as in smaller control flows of fluid for logic operations.

FIGS. 16A-16C depict cross sectional views of the outlet end **42l** of a check valve of the invention having a threaded shank member **134l** that engages the inside threads **136** of the valve cavity **34k** to provide a leakage clearance **138**. As best understood by comparing FIGS. 16A and 16B, the threaded shank member **134l** and non-tapered section **52l** of the plug **30l** are sized to create a shank clearance **142** with the valve cavity **34l** to allow flowing fluid **140** to pass toward the sealing ring **26l**. While this allows fluid to pass from upstream of the threaded shank member **134l** to the sealing ring more easily than through an indentation fitting, the shank clearance **142** would not normally create a sufficient cross sectional area to allow a substantial evacuation of backpressure from the valve cavity **34l** during normal operation of the compressor pump. Thus, it is would be highly likely for a substantial accumulation of backpressure to exist in the valve cavity **34l** by the time that flowing fluid **140** created sufficient force against the sealing ring **26l** and actuation ring **28l** to create a valve clearance **58l** between the sealing ring **26l** and face **54l**.

Thus, such a configuration of the outlet end **42f** can be similarly limited to the accommodation of flows less than a process flow of fluid, such as control flows of fluid for logic operations.

FIGS. 17A and B depict a check valve **20m** of the invention having valve cavity **34m** opening to an fluid hole **145** that leads to a non-tapered section **52m** via a slant passage **150**. The fluid hole **145** and slant passage **150** have cross sectional areas that are control clearances that are much smaller than the valve cavity **34m**. Due to the relatively small size of the control clearances, neither the fluid hole **145** nor slant passage **150** are capable of accommodating a process flow of fluid during normal operation. Thus, the valve **20m** cannot be used to continuously remove backpressure from the valve cavity **34m** during normal operation of the compressor pump, but may be used for accommodating smaller fluid flows such as logic control flows.

As best understood with a comparison of FIGS. 17A and B, the slant passage **150** opens to only a single opening point **152** along the circumference of the non-tapered section **52m**. It is only generally at the opening point **152** that upstream fluid pressure contacts and exerts fluid pressure against the sealing ring **26m** and against the biasing force of the actuation ring **28m**. The position of the sealing ring **26m** mounted around the non-tapered section **52m** is generally represented with dotted lines **26m'**, and the position of the actuation ring **28m** mounted around the tapered section **50m** is generally represented with dotted lines **28m'**.

When sufficient pressure is present within the fluid hole **145** and slant passage **150** to exert a cracking force against the sealing ring **26m** and actuation ring **28m**, only the general area of the sealing ring **26m** near the opening point **152** receives the force of the fluid pressure, resulting in a slightly crooked positioning of the sealing ring **26m** and actuation ring **28m**, as shown by dotted lines **26m'** and **28m'**, on the non-tapered and tapered sections **52m** and **50m**.

Thus, when sufficient fluid pressure is present in the fluid hole **145** and slant passage **150** to create a valve clearance **58m** near the opening point **152**, there is normally insufficient fluid force to create such a clearance at other positions along the circumference of the non-tapered and tapered sections **52m** and **50m**, leaving a gap **154** between the actuation ring **28m** and restrictor
5 **60m** at positions that are not in the general area of the opening point **152** even though the valve **20m** is fully open.

This invention has been described with reference to several preferred embodiments. Many modifications and alterations will occur to others upon reading and understanding the preceding specification. It is intended that the invention be construed as including all such
10 alterations and modifications in so far as they come within the scope of the appended claims or the equivalents of these claims.

What is Claimed

1. A check valve for use in a fluid system that includes a fluid pump for moving a fluid, said
5 check valve comprising:

a valve body having an inlet end through which fluid enters said check valve and an outlet end through which fluid exits said check valve, and a valve cavity within said valve body extending between about said inlet end and about said outlet end;

a valve assembly located at a position with respect to said valve cavity which enables
10 said valve assembly to control the flow of fluid through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said tapered section having a cross section that increases in diameter in a direction that is downstream from said inlet end;

said valve assembly having a sealing ring that is mounted to reciprocate at least along
15 said non-tapered section;

said valve assembly having an elastomeric actuation ring that is mounted to said tapered section, said tapered section biasing said actuation ring to a normal position where said actuation ring contacts and positions said sealing ring in contact with said valve body and said valve assembly to prevent fluid from flowing downstream from said inlet end and out said outlet end;
20 and

said valve assembly allowing fluid to flow downstream from said inlet and out said outlet end of said valve body when the fluid pump produces an amount of fluid pressure necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from
25 said valve body to create a preselected clearance between said valve body and said sealing ring.

2. The check valve of claim 1 further comprising an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position.

5

3. The check valve of claim 1 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange extending inwardly in said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when said actuation ring is in the normal position.

10

4. The check valve of claim 1 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange that is a circular washer which is compression fit to be part of said valve body and which extends inwardly into said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when

15 said actuation ring is in the normal position.

5. The check valve of claim 1, said plug further comprises a shaft that includes four separate fluid passages through which fluid can flow downstream from said inlet end of said valve body through said valve cavity to said outlet end.

20

6. The check valve of claim 1 further comprising a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring.

7. The check valve of claim 1, said preselected clearance between said sealing ring and said outlet end is sufficiently large to allow a process flow of fluid from said inlet end through said outlet end of said valve body when the fluid pump produces a clearance pressure.

5 8. The check valve of claim 1, a leakage clearance existing within said check valve to allow for the passage of fluid from said inlet end through said outlet end when the fluid pump produces a fluid pressure.

9. The check valve of claim 1, said tapered section including a restrictor to restrict further
10 movement of said actuation ring in a direction that is downstream and away from said inlet end of said valve body when said sealing ring is separated from said valve body by a preselected clearance there between.

10. The check valve of claim 1, said sealing ring including an outside surface area, said
15 sealing ring seal being positioned to allow more of said outside surface area to be exposed to fluid pressure produced by the fluid pump when said actuation ring is not in the normal position and when said sealing ring is not in sealing contact with said valve body than when said actuation ring is in the normal position and when said sealing ring is in sealing contact with said valve body.

20 11. The check valve of claim 1, said valve body including an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said actuation ring is in the normal position.

12. The check valve of claim 1, said plug extending across the diameter of said valve cavity at about said outlet end of said valve body, said plug having at least a fluid passage to allow for fluid to pass therethrough.

5

13. The check valve of claim 1, said tapered section including at least a first tapered segment and at least a second tapered segment, said first tapered segment having an incident angle that is different from an incident angle of said second tapered segment.

10 14. The check valve of claim 1, said tapered section including at least a first tapered segment and at least a second tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment.

15 15. The check valve of claim 1, said tapered section including at least a first tapered segment, at least a second tapered segment, and at least a third tapered segment, said first tapered segment having an incident angle that is different than an incident angle of said second tapered segment, and said second tapered segment having an incident angle that is different than said incident angle of said third tapered segment.

20 16. The check valve of claim 1, said tapered section including at least a first tapered segment, a second tapered segment, and a third tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment, and said third tapered segment having an incident angle that is shallower than said incident angle of said second tapered segment.

17. The check valve of claim 1, said tapered section having a curved cross sectional shape.

18. The check valve of claim 1, said tapered section having a curved cross sectional shape at
5 which the slope of said tapered section becomes increasingly shallower in a direction that is
downstream of said inlet end and in which a diameter of said tapered section becomes
increasingly wider in a direction that is downstream of said inlet end.

19. The check valve of claim 1, said actuation ring having a circular cross shape.

20. The check valve of claim 1, said sealing ring having a circular cross shape.

21. The check valve of claim 1, said sealing ring having a rectangular cross shape.

22. The check valve of claim 1, said sealing ring having a cross sectional shape that is
15 different from a cross sectional shape of said actuation ring.

23. The check valve of claim 1, said actuation ring being constructed of a material selected
from the group consisting of viton, nitrile rubber, silicone, Aflas, and EPDM.

24. The check valve of claim 1, said sealing ring being constructed of a material selected
from the group consisting of viton, nitrile rubber, silicone, EPDM, Teflon, Rulon, Delrin, PVC,
20 ABS, Stainless Steel, Brass, Aflas, and Aluminum.

25. The check valve of claim 1, the fluid pump being a liquid pump, said sealing ring and said actuation ring comprising materials capable of withstanding liquid fluids.

26. The check valve of claim 1, the fluid pump being a water pump, said sealing ring and
5 said actuation ring comprising materials capable of withstanding water.

27. The check valve of claim 1, the fluid pump being an oil pump, said sealing ring and said actuation ring comprising materials capable of withstanding oil.

10 28. A check valve for use in a fluid system that includes a fluid pump for moving a fluid, said check valve comprising:

a valve body having an inlet end through which fluid enters said check valve and an outlet end through which fluid exits said check valve, and a valve cavity within said valve body extending between about said inlet end and about said outlet end;

15 a valve assembly located at a position with respect to said valve cavity which enables said valve assembly to control the flow of fluid through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said tapered section having a cross section that increases in diameter in a direction that is downstream from said inlet end;

20 said valve assembly having a sealing ring that is mounted to reciprocate at least along said non-tapered section;

said valve assembly having an elastomeric actuation ring that is mounted to reciprocate at least along said tapered section, said tapered section biasing said actuation ring to a normal position where said actuation ring contacts and positions said sealing ring in contact with said

valve body and said valve assembly to prevent fluid from flowing downstream from said inlet end and out said outlet end;

5 said valve assembly allowing fluid to flow downstream from said inlet and out said outlet end of said valve body when the fluid pump produces an amount of fluid pressure necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from said valve body to create a preselected clearance between said valve body and said sealing ring; and

10 a portion of said valve cavity, between about said inlet end and about the location where said sealing ring contacts said valve body, having a minimum cross sectional area that allows the pressure of the fluid flowing through said preselected clearance to be sufficient to continuously remove fluid from said valve cavity to prevent substantial accumulation of back pressure produced by the fluid pump upstream of said valve when continuous operation of the fluid pump repeatedly causes said sealing ring to be located at a position away from said valve body and
15 create said preselected clearance between said valve body and said sealing ring.

29. The check valve of claim 28 further comprising an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position.

20

30. The check valve of claim 28 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange extending inwardly in said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when said actuation ring is in the normal position.

31. The check valve of claim 28 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange that is a circular washer which is compression fit to be part of said valve body and which extends inwardly into said valve cavity, said actuation
5 ring being biased to position said sealing ring in contact with said valve body at said edge when said actuation ring is in the normal position.

32. The check valve of claim 28, said plug further comprising a shaft that includes four separate fluid passages through which fluid can flow downstream from said inlet end of said
10 valve body through said valve cavity to said outlet end.

33. The check valve of claim 28 further comprising a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring.

15 34. The check valve of claim 28, said preselected clearance between said sealing ring and said outlet end being sufficiently large to allow a process flow of fluid from said inlet end through said outlet end of said valve body when the fluid pump produces a clearance pressure.

20 35. The check valve of claim 28, said tapered section including a restrictor to restrict further movement of said actuation ring in a direction that is downstream and away from said inlet end of said valve body when said sealing ring is separated from said valve body by a preselected clearance there between.

36. The check valve of claim 28, said sealing ring including an outside surface area, said sealing ring seal being positioned to allow more of said outside surface area to be exposed to fluid pressure produced by the fluid pump when said actuation ring is not in the normal position and when said sealing ring is not in sealing contact with said valve body than when said actuation ring is in the normal position and when said sealing ring is in sealing contact with said valve body.

37. The check valve of claim 28, said valve body including an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said actuation ring is in the normal position.

38. The check valve of claim 28, said plug extending across the diameter of said valve cavity at about said outlet end of said valve body, said plug having at least a fluid passage to allow for fluid to pass therethrough.

39. The check valve of claim 28, said tapered section including at least a first tapered segment and at least a second tapered segment, said first tapered segment having an incident angle that is different from an incident angle of said second tapered segment.

40. The check valve of claim 28, said tapered section including at least a first tapered segment and at least a second tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment.

41. The check valve of claim 28, said tapered section including at least a first tapered segment, at least a second tapered segment, and at least a third tapered segment, said first tapered segment having an incident angle that is different than an incident angle of said second tapered segment, said second tapered segment having an incident angle that is different than said incident
5 angle of said third tapered segment.

42. The check valve of claim 28, said tapered section including at least a first tapered segment, a second tapered segment, and a third tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment,
10 and said third tapered segment having an incident angle that is shallower than said incident angle of said second tapered segment.

43. The check valve of claim 28, said tapered section having a curved cross sectional shape.

15 44. The check valve of claim 28, said tapered section having a curved cross sectional shape at which the slope of said tapered section becomes increasingly shallower in a direction that is downstream of said inlet end and in which a diameter of said tapered section becomes increasingly wider in a direction that is downstream of said inlet end.

20 45. The check valve of claim 28, said actuation ring having a circular cross shape.

46. The check valve of claim 28, said sealing ring having a circular cross shape.

47. The check valve of claim 28, said sealing ring having a rectangular cross shape.

48. The check valve of claim 28, said sealing ring having a cross sectional shape that is different from a cross sectional shape of said actuation ring.

49. The check valve of claim 28, said actuation ring having constructed of a material selected
5 from the group consisting of viton, nitrile rubber, silicone, Aflas, and EPDM.

50. The check valve of claim 28, said sealing ring being constructed of a material selected from the group consisting of viton, nitrile rubber, silicone, EPDM, Teflon, Rulon, Delrin, PVC, ABS, Stainless Steel, Brass, Aflas, and Aluminum.

10

51. The check valve of claim 28, the fluid pump being a liquid pump, said sealing ring and said actuation ring comprising materials capable of withstanding liquid fluids.

52. The check valve of claim 28, the fluid pump being a water pump, said sealing ring and
15 said actuation ring comprising materials capable of withstanding water.

53. The check valve of claim 28, the fluid pump being an oil pump, said sealing ring and said actuation ring comprising materials capable of withstanding oil.

20 54. A check valve for use in an air compressor system that includes an air compressor having a compression cylinder, said check valve comprising:

a valve body having an inlet end through which air enters said check valve and an outlet end through which air exits said check valve, and a valve cavity within said valve body extending between about said inlet end and about said outlet end;

a valve assembly located at a position with respect to said valve cavity which enables said valve assembly to control the flow of air through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said tapered section having a cross section that increases in diameter in a direction that is downstream from said inlet
5 end;

said valve assembly having an sealing ring that is mounted to reciprocate at least along said non-tapered section;

said valve assembly having an elastomeric actuation ring that is mounted to reciprocate at least along said tapered section, said tapered section biasing said actuation ring to a normal
10 position where said actuation ring contacts and positions said sealing ring in contact with said valve body and valve assembly to prevent air from flowing downstream from said inlet end and out said outlet end; and

said valve assembly allowing air to flow downstream from said inlet end and out said outlet end of said valve body when the air compressor produces an amount of air pressure
15 necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from said valve body to create a preselected clearance between said valve body and said sealing ring.

20 55. The check valve of claim 54 further comprising an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position.

56. The check valve of claim 54 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange extending inwardly in said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when said actuation ring is in the normal position.

5

57. The check valve of claim 54 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange that is a circular washer that is compression fit to be part of said valve body and which extends inwardly into said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when

10 said actuation ring is in the normal position.

58. The check valve of claim 54, said plug further comprising a shaft that includes four separate fluid passages through which air can flow downstream from said inlet end of said valve body through said valve cavity to said outlet end.

15

59. The check valve of claim 54 further comprising a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring.

20 60. The check valve of claim 54, said preselected clearance between said sealing ring and said outlet end being sufficiently large to allow a process flow of air from said inlet end through said outlet end of said valve body when the air compressor produces a clearance pressure.

61. The check valve of claim 54, a leakage clearance existing within said check valve to allow for the passage of air from said inlet end through said outlet end when the air compressor produces an air pressure.

5 62. The check valve of claim 54, said tapered section including a restrictor to restrict further movement of said actuation ring in a direction that is downstream and away from said inlet end of said valve body when said sealing ring is separated from said valve body by a preselected clearance there between.

10 63. The check valve of claim 54, said sealing ring including an outside surface area, said sealing ring seal being positioned to allow more of said outside surface area to be exposed to air pressure produced by the air compressor when said actuation ring is not in the normal position and when said sealing ring is not in sealing contact with said valve body than when said actuation ring is in the normal position and when said sealing ring is in sealing contact with said
15 valve body.

64. The check valve of claim 54, said valve body including an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said
20 actuation ring is in the normal position.

65. The check valve of claim 54, said plug extending across the diameter of said valve cavity at about said outlet end of said valve body, said plug having at least a fluid passage to allow for air to pass therethrough.

66. The check valve of claim 54, said tapered section including at least a first tapered segment and at least a second tapered segment, said first tapered segment having an incident angle that is different from an incident angle of said second tapered segment.

5

67. The check valve of claim 54, said tapered section including at least a first tapered segment and at least a second tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment.

10 68. The check valve of claim 54, said tapered section including at least a first tapered segment, at least a second tapered segment, and at least a third tapered segment, said first tapered segment having an incident angle that is different than an incident angle of said second tapered segment, said second tapered segment having an incident angle that is different than said incident angle of said third tapered segment.

15

69. The check valve of claim 54, said tapered section including at least a first tapered segment, a second tapered segment, and a third tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment, said third tapered segment having an incident angle that is shallower than said incident angle of
20 said second tapered segment.

70. The check valve of claim 54, said tapered section having a curved cross sectional shape.

71. The check valve of claim 54, said tapered section having a curved cross sectional shape at which the slope of said tapered section becomes increasingly shallower in a direction that is downstream of said inlet end and in which a diameter of said tapered section becomes increasingly wider in a direction that is downstream of said inlet end.

5

72. The check valve of claim 54, said actuation ring having a circular cross sectional shape.

73. The check valve of claim 54, said sealing ring having a circular cross sectional shape.

10 74. The check valve of claim 54, said sealing ring having a rectangular cross sectional shape.

75. The check valve of claim 54, said sealing ring having a cross sectional shape that is different from a cross sectional shape of said actuation ring.

15 76. The check valve of claim 54, said actuation ring being constructed of a material selected from the group consisting of viton, nitrile rubber, silicone, Aflas, and EPDM.

77. The check valve of claim 54, said sealing ring being constructed of a material selected from the group consisting of viton, nitrile rubber, silicone, EPDM, Teflon, Rulon, Delrin, PVC,
20 ABS, Stainless Steel, Brass, Aflas, and Aluminum.

78. A check valve for use in an air compressor system that includes an air compressor having a compression cylinder, said check valve comprising:

a valve body having an inlet end through which air enters said check valve and an outlet end through which air exits said check valve, and a valve cavity within said valve body extending between about said inlet end and about said outlet end;

5 a valve assembly located at a position with respect to said valve cavity which enables said valve assembly to control the flow of air through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said tapered section having a cross section that increases in diameter in a direction that is downstream from said inlet end;

10 said valve assembly having an sealing ring that is mounted to reciprocate at least along said non-tapered section;

said valve assembly having an elastomeric actuation ring that is mounted to reciprocate at least along said tapered section, said tapered section biasing said actuation ring to a normal position where said actuation ring contacts and positions said sealing ring in contact with said valve body and said valve assembly to prevent air from flowing downstream from said inlet end and out said outlet end;

15 said valve assembly allowing air to flow downstream from said inlet and out said outlet end of said valve body when the air compressor produces an amount of air pressure necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from said valve body to create a preselected clearance between said valve body and said sealing ring; and

20 a portion of said valve cavity, between about said inlet end and about the location where said sealing ring contacts said valve body, having a minimum cross sectional area that allows the pressure of the air flowing through said preselected clearance to be sufficient to continuously

remove air from said valve cavity to prevent substantial accumulation of back pressure produced by the air compressor upstream of said valve when repeated cycles of the compression cylinder of said air compressor repeatedly cause said sealing ring to be located at a position away from said valve body and create the preselected clearance between said valve body and said sealing
5 ring.

79. The check valve of claim 78 further comprising an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position.

80. The check valve of claim 78 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange extending inwardly in said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when said actuation ring is in the normal position.

81. The check valve of claim 78 further comprising an edge at about said outlet end of said valve body, said edge being formed from a flange that is a circular washer that is compression fit to be part of said valve body and which extends inwardly into said valve cavity, said actuation ring being biased to position said sealing ring in contact with said valve body at said edge when
20 said actuation ring is in the normal position.

82. The check valve of claim 78, said plug further comprising a shaft that includes four separate fluid passages through which air can flow downstream from said inlet end of said valve body through said valve cavity to said outlet end.

83. The check valve of claim 78 further comprising a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring.

5 84. The check valve of claim 78, said preselected clearance between said sealing ring and said outlet end being sufficiently large to allow a process flow of air from said inlet end through said outlet end of said valve body when the air compressor produces a clearance pressure.

85. The check valve of claim 78, said tapered section including a restrictor to restrict further
10 movement of said actuation ring in a direction that is downstream and away from said inlet end of said valve body when said sealing ring is separated from said valve body by a preselected clearance there between.

86. The check valve of claim 78, said sealing ring including an outside surface area, said
15 sealing ring seal being positioned to allow more of said outside surface area to be exposed to air pressure produced by the air compressor when said actuation ring is not in the normal position and when said sealing ring is not in sealing contact with said valve body than when said actuation ring is in the normal position and when said sealing ring is in sealing contact with said valve body.

20

87. The check valve of claim 78, said valve body including an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said actuation ring is in the normal position.

88. The check valve of claim 78, said plug extending across the diameter of said valve cavity at about said outlet end of said valve body, said plug having at least a fluid passage to allow for air to pass therethrough.

5

89. The check valve of claim 78, said tapered section including at least a first tapered segment and at least a second tapered segment, said first tapered segment having an incident angle that is different from an incident angle of said second tapered segment.

10 90. The check valve of claim 78, said tapered section including at least a first tapered segment and at least a second tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment.

15 91. The check valve of claim 78, said tapered section including at least a first tapered segment, at least a second tapered segment, and at least a third tapered segment, said first tapered segment having an incident angle that is different than an incident angle of said second tapered segment, said second tapered segment having an incident angle that is different than said incident angle of said third tapered segment.

20 92. The check valve of claim 78, said tapered section including at least a first tapered segment, a second tapered segment, and a third tapered segment, said second tapered segment having an incident angle that is shallower than an incident angle of said first tapered segment, said third tapered segment having an incident angle that is shallower than said incident angle of said second tapered segment.

93. The check valve of claim 78, said tapered section having a curved cross sectional shape.

94. The check valve of claim 78, said tapered section having a curved cross sectional shape at
5 which the slope of said tapered section becomes increasingly shallower in a direction that is
downstream of said inlet end and in which a diameter of said tapered section becomes
increasingly wider in a direction that is downstream of said inlet end.

95. The check valve of claim 78, said actuation ring having a circular cross sectional shape.

96. The check valve of claim 78, said sealing ring having a circular cross sectional shape.

97. The check valve of claim 78, said sealing ring having a rectangular cross sectional shape.

98. The check valve of claim 78, said sealing ring having a cross sectional shape that is
15 different from a cross sectional shape of said actuation ring.

99. The check valve of claim 78, said actuation ring being constructed of a material selected
from the group consisting of viton, nitrile rubber, silicone, Aflas and EPDM.

100. The check valve of claim 78, said sealing ring being constructed of a material selected
from the group consisting of viton, nitrile rubber, silicone, EPDM, Teflon, Rulon, Delrin, PVC,
20 ABS, Stainless Steel, Brass, Aflas, and Aluminum.

101. A check valve for use in a fluid system that includes a fluid pump for moving a fluid, said check valve comprising:

a valve body having an inlet end through which fluid enters said check valve and an outlet end through which fluid exits said check valve, and a valve cavity within said valve body
5 extending between about said inlet end and about said outlet end;

a valve assembly located at a position with respect to said valve cavity which enables said valve assembly to control the flow of fluid through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said plug having a shaft that includes four separate fluid passages through which fluid can flow downstream from
10 said inlet end of said valve body through said valve cavity to said outlet end, said tapered section having a cross section that increases in diameter in a direction that is downstream from said inlet end;

said valve assembly having a sealing ring that is mounted to reciprocate at least along said non-tapered section;

15 said valve assembly having an elastomeric actuation ring that is mounted to reciprocate at least along said tapered section, said tapered section biasing said actuation ring to a normal position where said actuation ring contacts and positions said sealing ring in contact with said valve body and said valve assembly to prevent fluid from flowing downstream from said inlet end and out said outlet end;

20 an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position;

a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring;

said valve assembly allowing fluid to flow downstream from said inlet and out said outlet end of said valve body when the fluid pump produces an amount of fluid pressure necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from
5 said valve body to create a preselected clearance between said valve body and said sealing ring, said preselected clearance being sufficiently large to allow a process flow of fluid from said inlet end through said outlet end of said valve body when the fluid pump produces a clearance pressure;

said tapered section including a restrictor to restrict further movement of said actuation
10 ring in a direction that is downstream and away from said inlet end of said valve body when said sealing ring is separated from said valve body by said preselected clearance there between;

said sealing ring including an outside surface area, said sealing ring seal being positioned to allow more of said outside surface area to be exposed to fluid pressure produced by the fluid pump when said actuation ring is not in the normal position and when said sealing ring is not in
15 sealing contact with said valve body than when said actuation ring is in the normal position and when said sealing ring is in sealing contact with said valve body;

said valve body having an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said actuation ring is in the normal
20 position; and

a portion of said valve cavity, between about said inlet end and about the location where said sealing ring contacts said valve body, having a minimum cross sectional area that allows the pressure of the fluid flowing through said preselected clearance to be sufficient to continuously remove fluid from said valve cavity to prevent substantial accumulation of back pressure

produced by the fluid pump upstream of said valve when continuous operation of the fluid pump repeatedly causes said sealing ring to be located at a position away from said valve body and create said preselected clearance between said valve body and said sealing ring.

5 102. A check valve for use in an air compressor system that includes an air compressor having a compression cylinder, said check valve comprising:

a valve body having an inlet end through which air enters said check valve and an outlet end through which air exits said check valve, and a valve cavity within said valve body extending between about said inlet end and about said outlet end;

10 a valve assembly located at a position with respect to said valve cavity which enables said valve assembly to control the flow of air through said valve cavity, said valve assembly including a plug having at least a tapered section and a non-tapered section, said plug having a shaft that includes four separate fluid passages through which air can flow downstream from said inlet end of said valve body through said valve cavity to said outlet end, said tapered section
15 having a cross section that increases in diameter in a direction that is downstream from said inlet end;

said valve assembly having a sealing ring that is mounted to reciprocate at least along said non-tapered section;

said valve assembly having an elastomeric actuation ring that is mounted to reciprocate at
20 least along said tapered section, said tapered section biasing said actuation ring to a normal position where said actuation ring contacts and positions said sealing ring in contact with said valve body and said valve assembly to prevent air from flowing downstream from said inlet end and out said outlet end;

an edge at about said outlet end of said valve body, said sealing ring being biased to contact said valve body at said edge when said actuation ring is in the normal position;

a pressure chamber that is the portion of said valve cavity that is located upstream of and about adjacent said sealing ring;

5 said valve assembly allowing air to flow downstream from said inlet and out said outlet end of said valve body when the air compressor produces an amount of air pressure necessary to create a force against said sealing ring that is sufficient to cause said sealing ring to exert a force against said actuation ring and to cause said sealing ring to be located at a position away from said valve body to create a preselected clearance between said valve body and said sealing ring,
10 said preselected clearance being sufficiently large to allow a process flow of air from said inlet end through said outlet end of said valve body when the air compressor produces a clearance pressure;

 said tapered section including a restrictor to restrict further movement of said actuation ring in a direction that is downstream and away from said inlet end of said valve body when said
15 sealing ring is separated from said valve body by said preselected clearance there between;

 said sealing ring including an outside surface area, said sealing ring seal being positioned to allow more of said outside surface area to be exposed to air pressure produced by the air compressor when said actuation ring is not in the normal position and when said sealing ring is not in sealing contact with said valve body than when said actuation ring is in the normal
20 position and when said sealing ring is in sealing contact with said valve body;

 said valve body having an inside chamfer in said valve cavity, said valve cavity having a diameter at said chamfer that increases in size in a downstream direction, said sealing ring being biased to contact said valve body at said chamfer when said actuation ring is in the normal position; and

a portion of said valve cavity, between about said inlet end and about the location where said sealing ring contacts said valve body, having a minimum cross sectional area that allows the pressure of the air flowing through said preselected clearance to be sufficient to continuously remove air from said valve cavity to prevent substantial accumulation of back pressure produced
5 by the air compressor upstream of said valve when continuous operation of the air compressor repeatedly causes said sealing ring to be located at a position away from said valve body and create said preselected clearance between said valve body and said sealing ring.

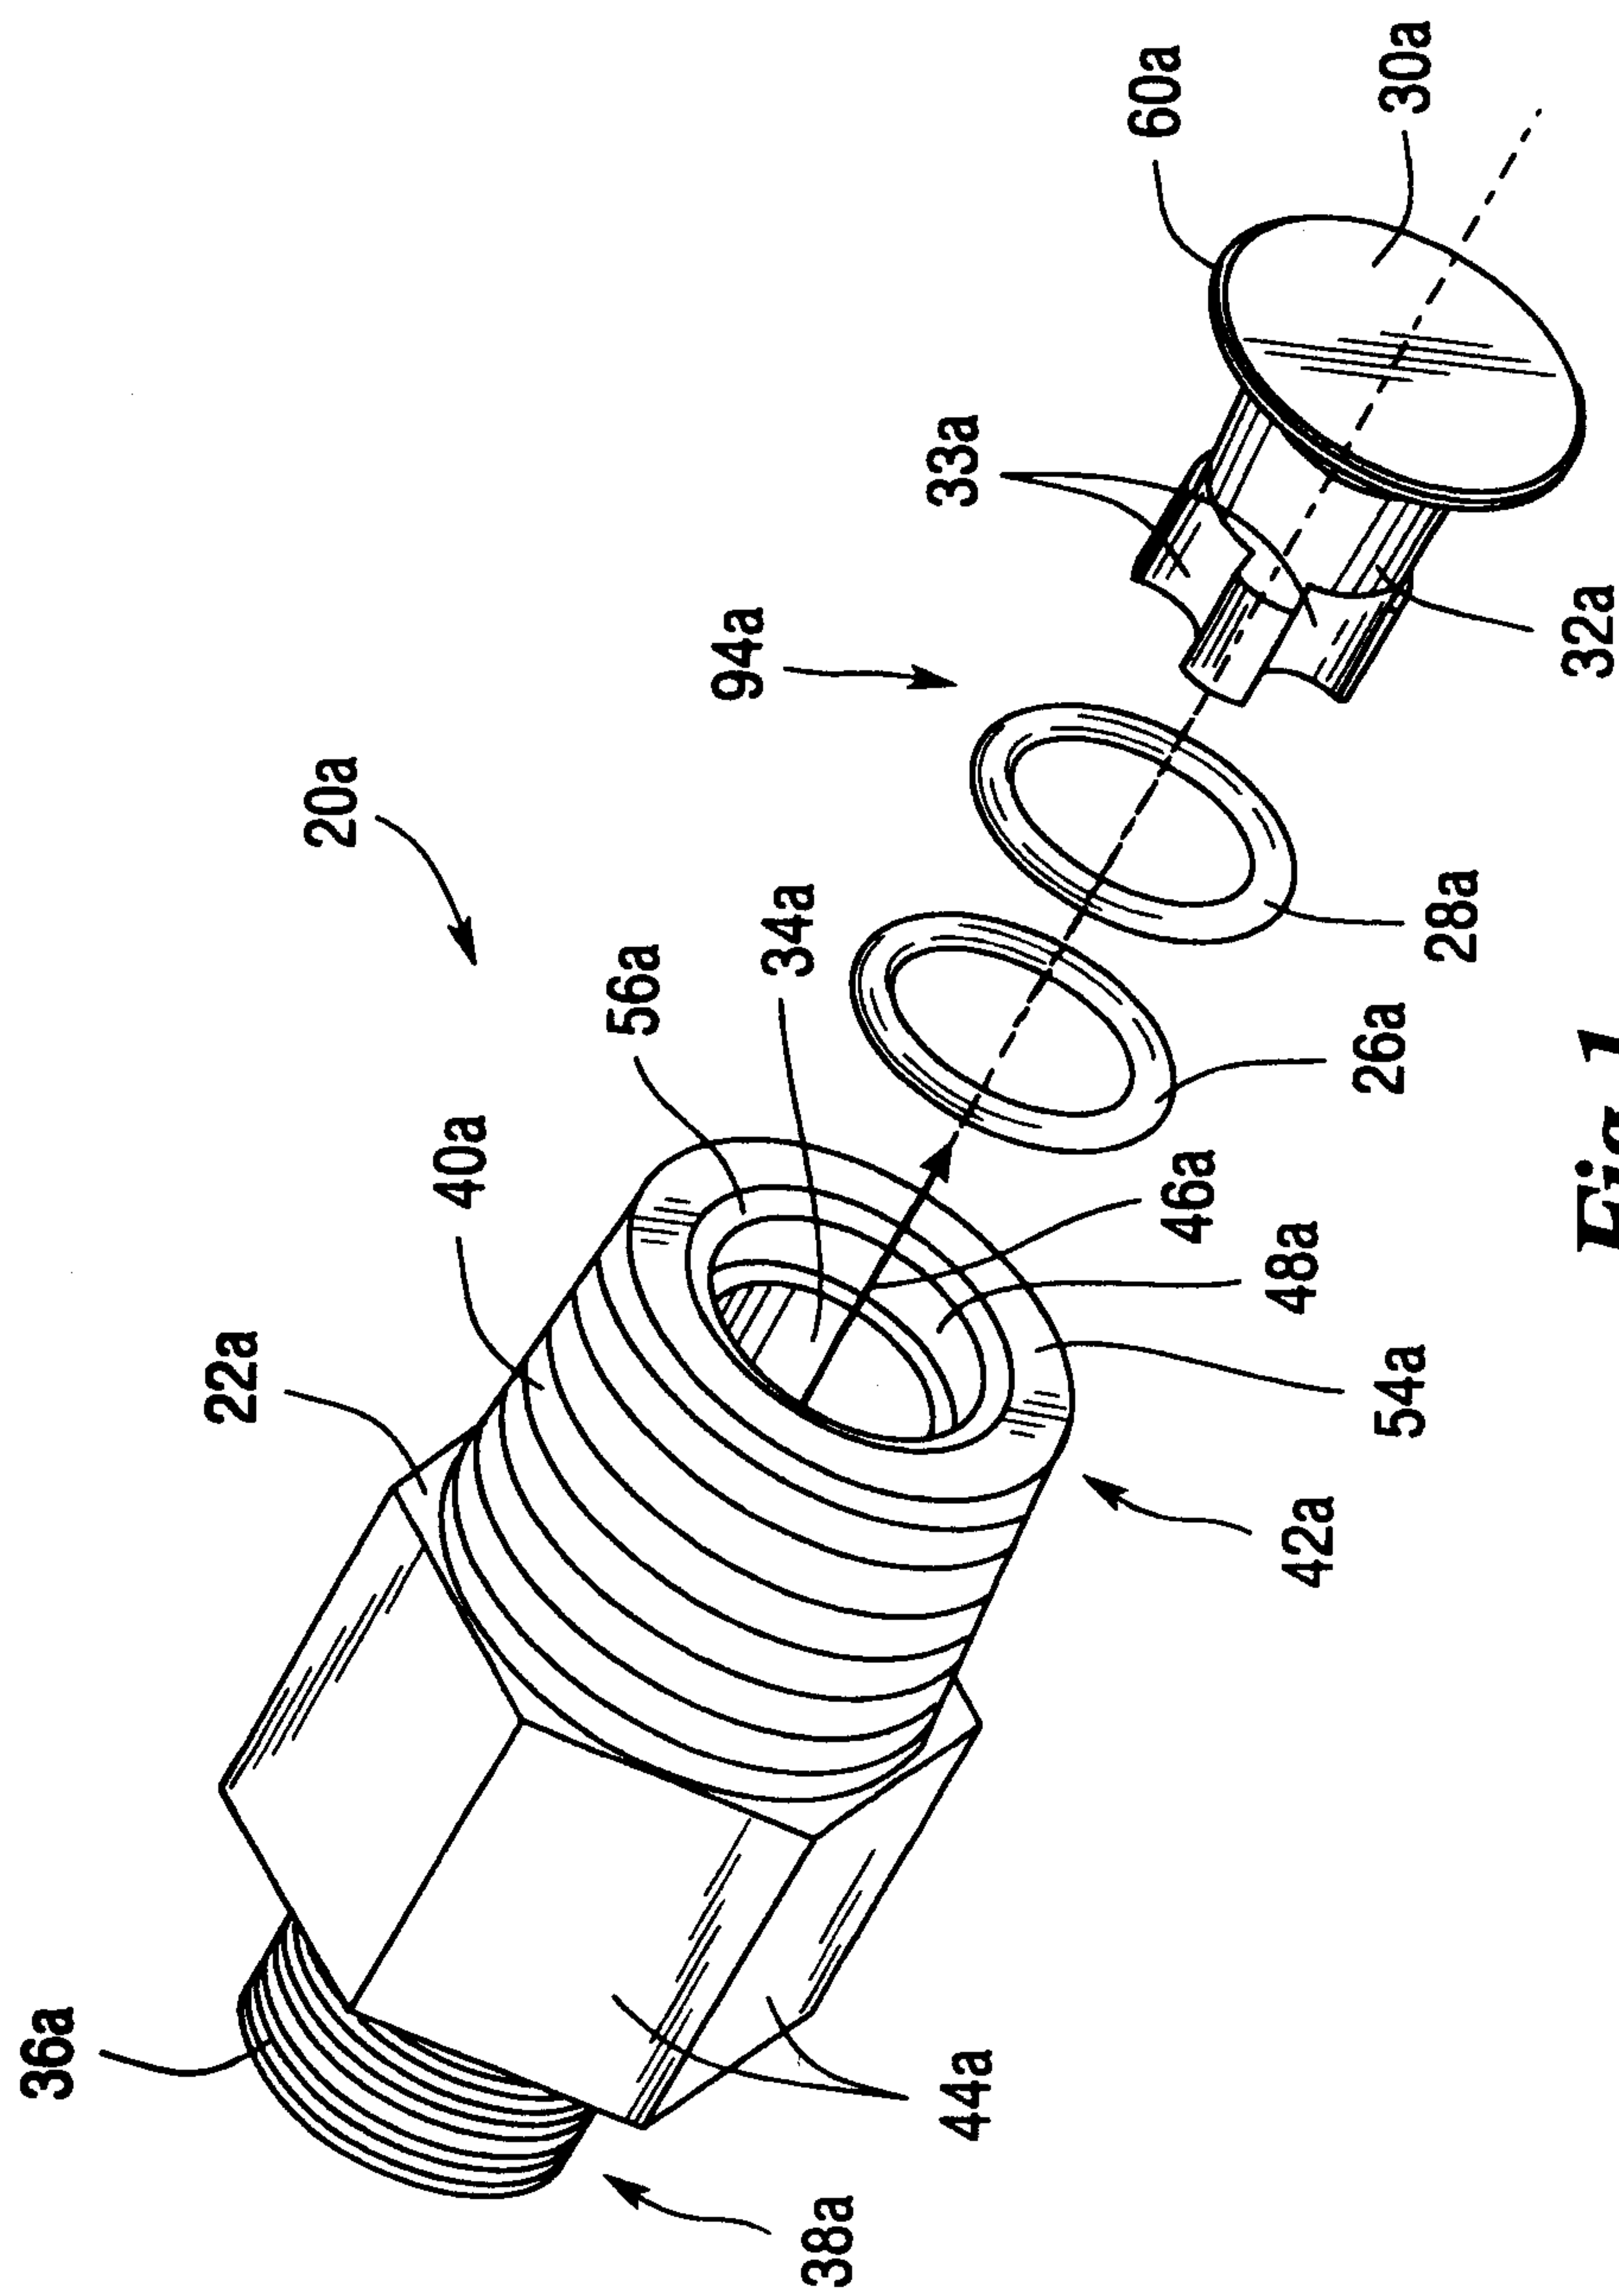


Fig. 1

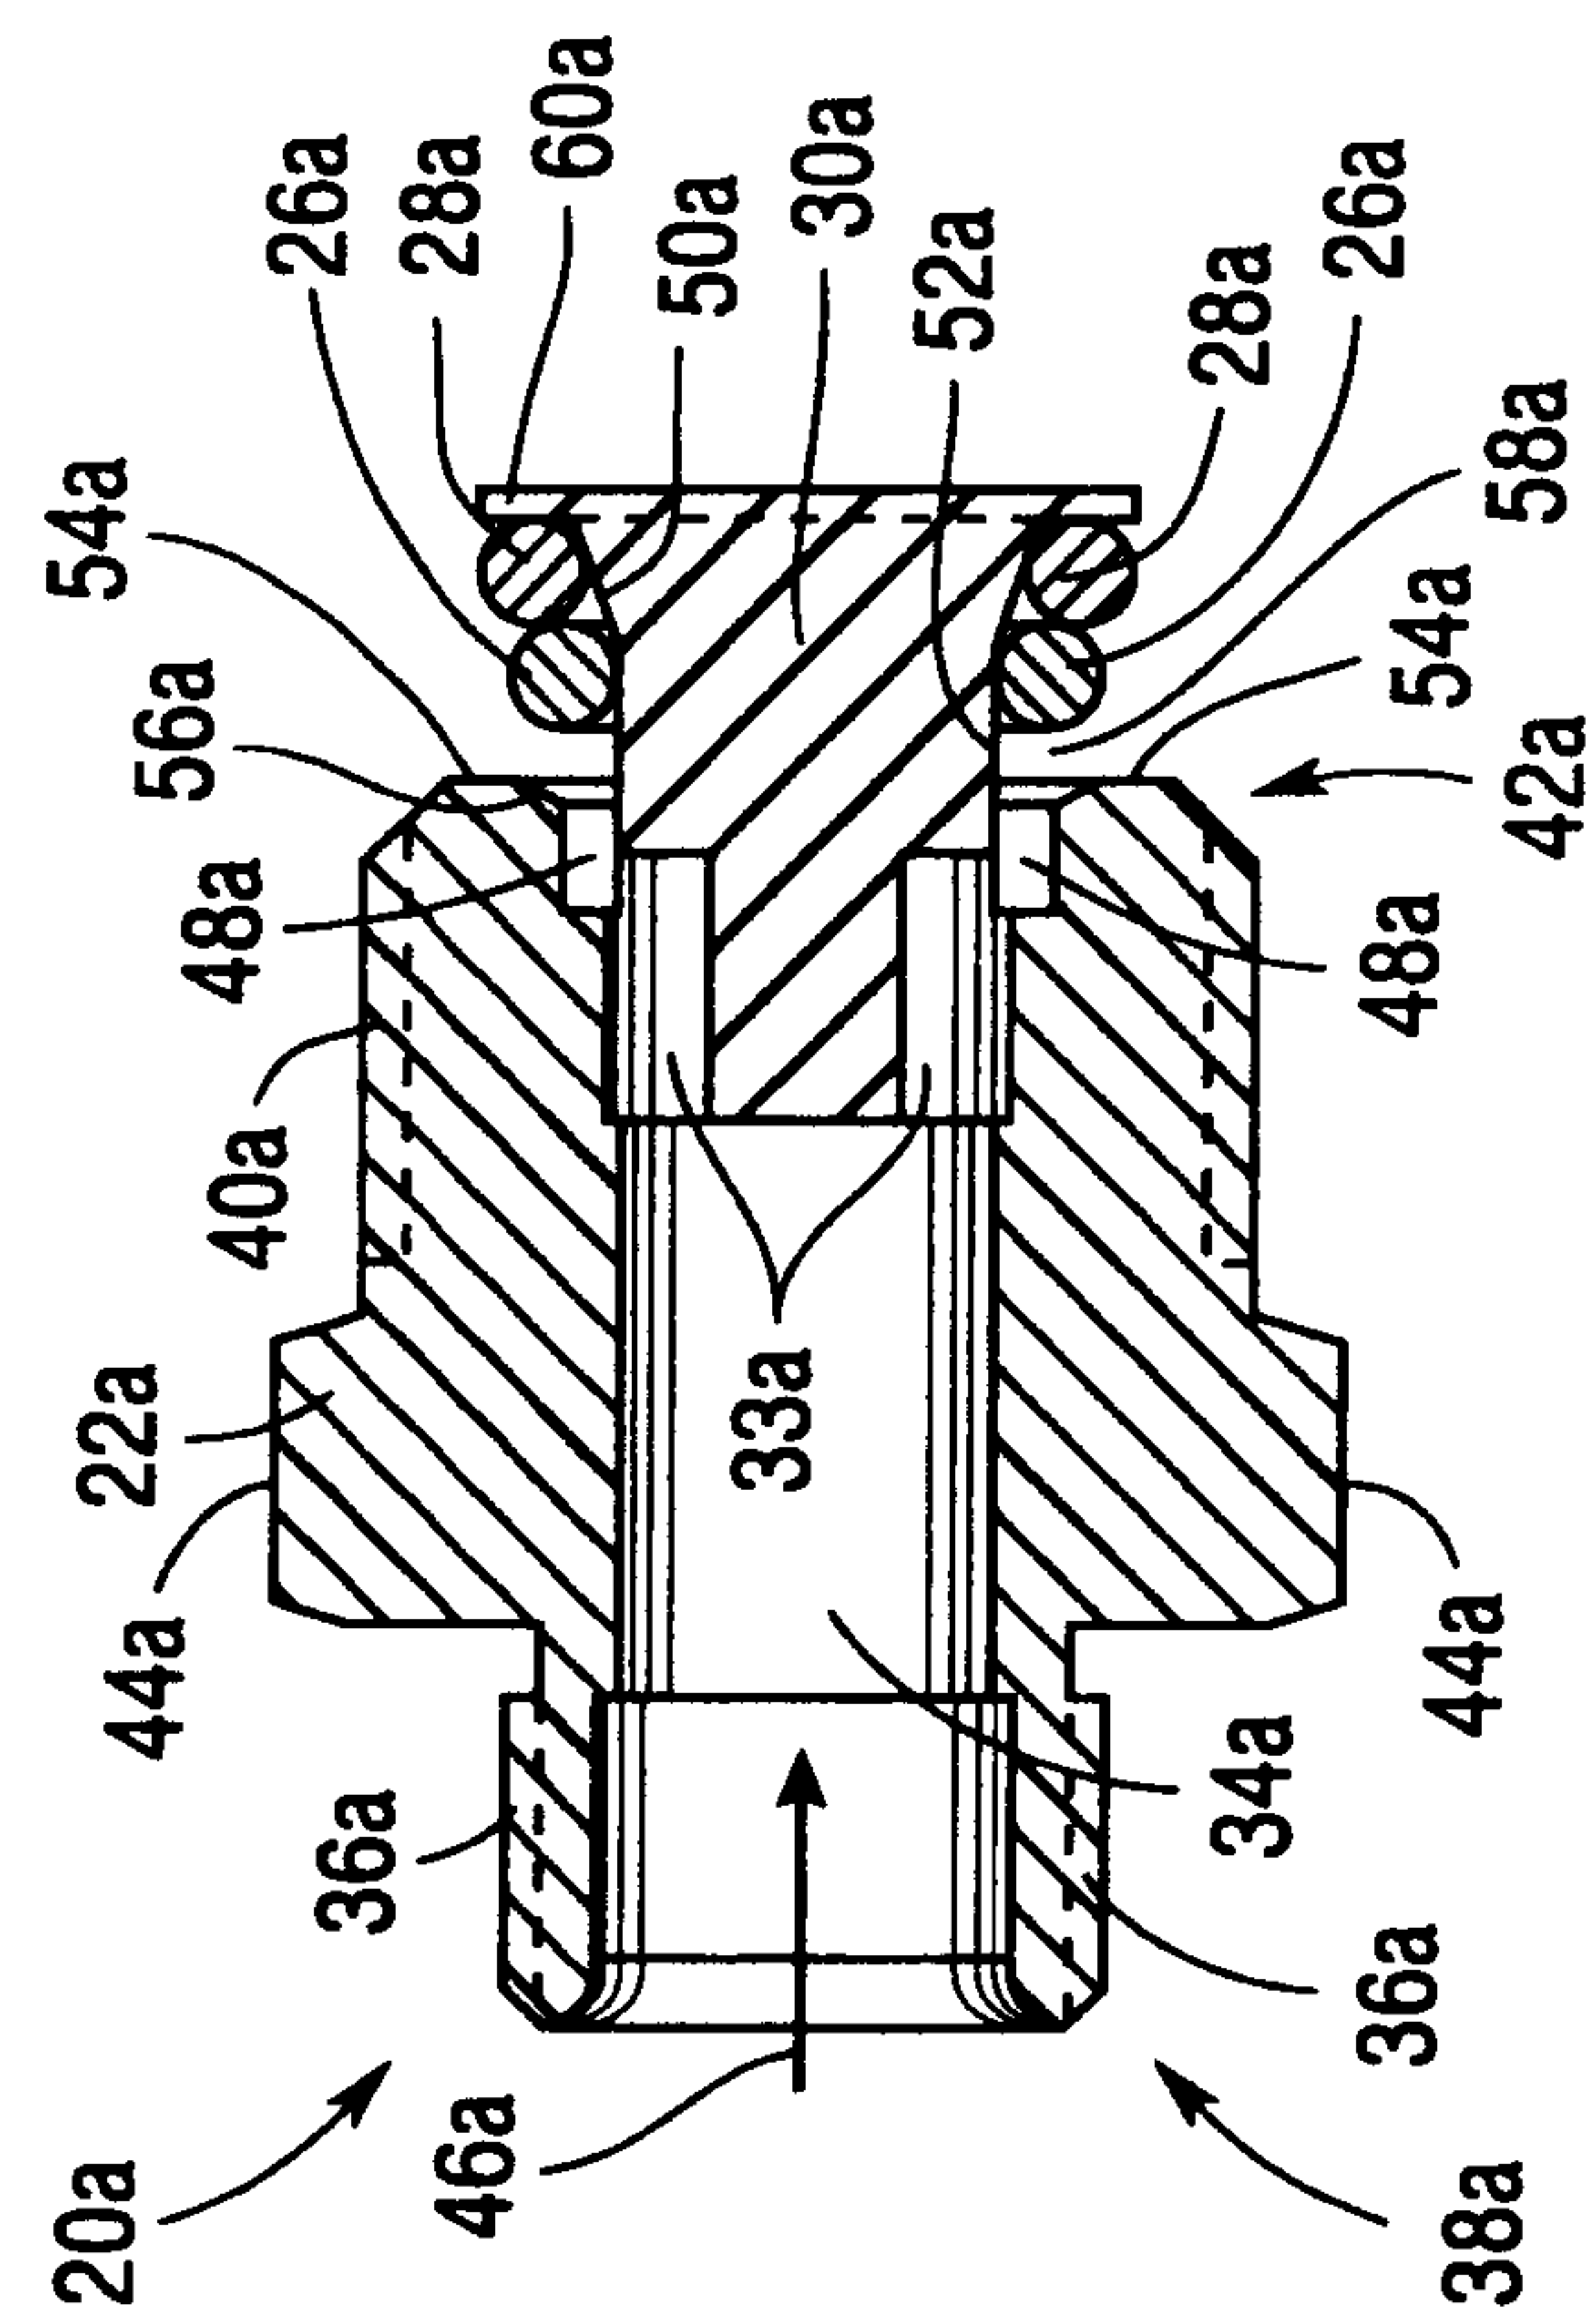


Fig. 2A

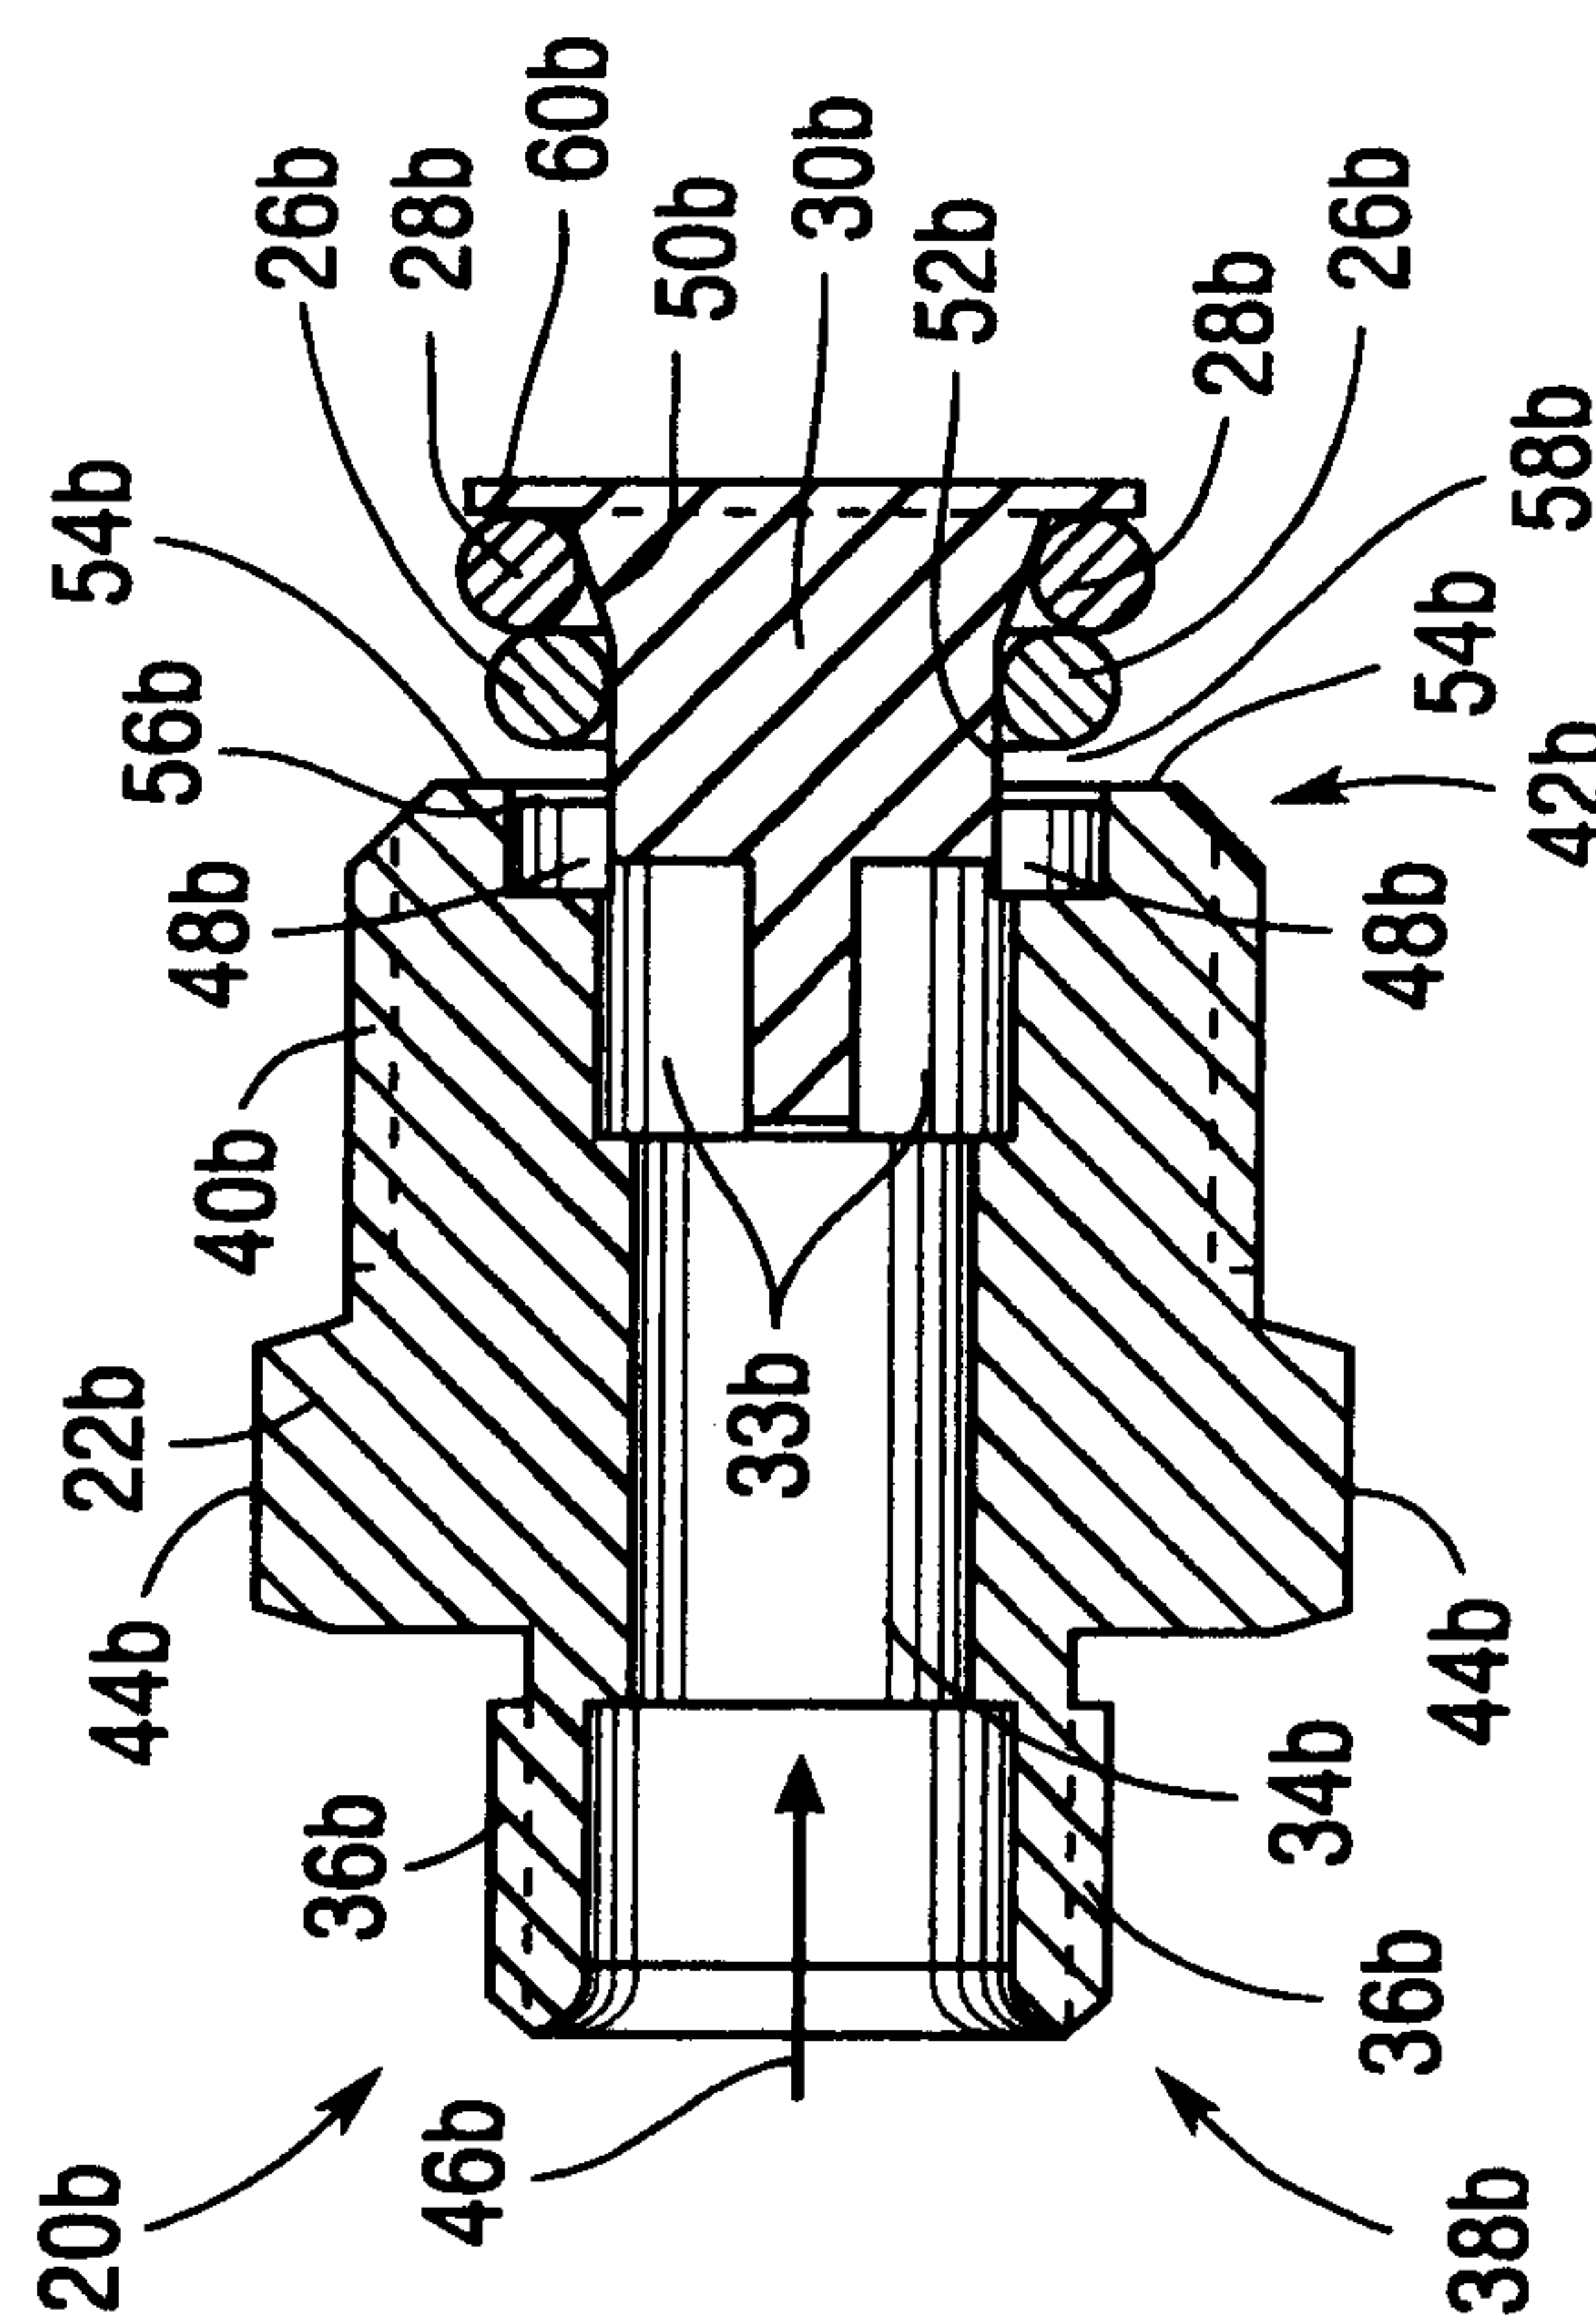


Fig. 2B

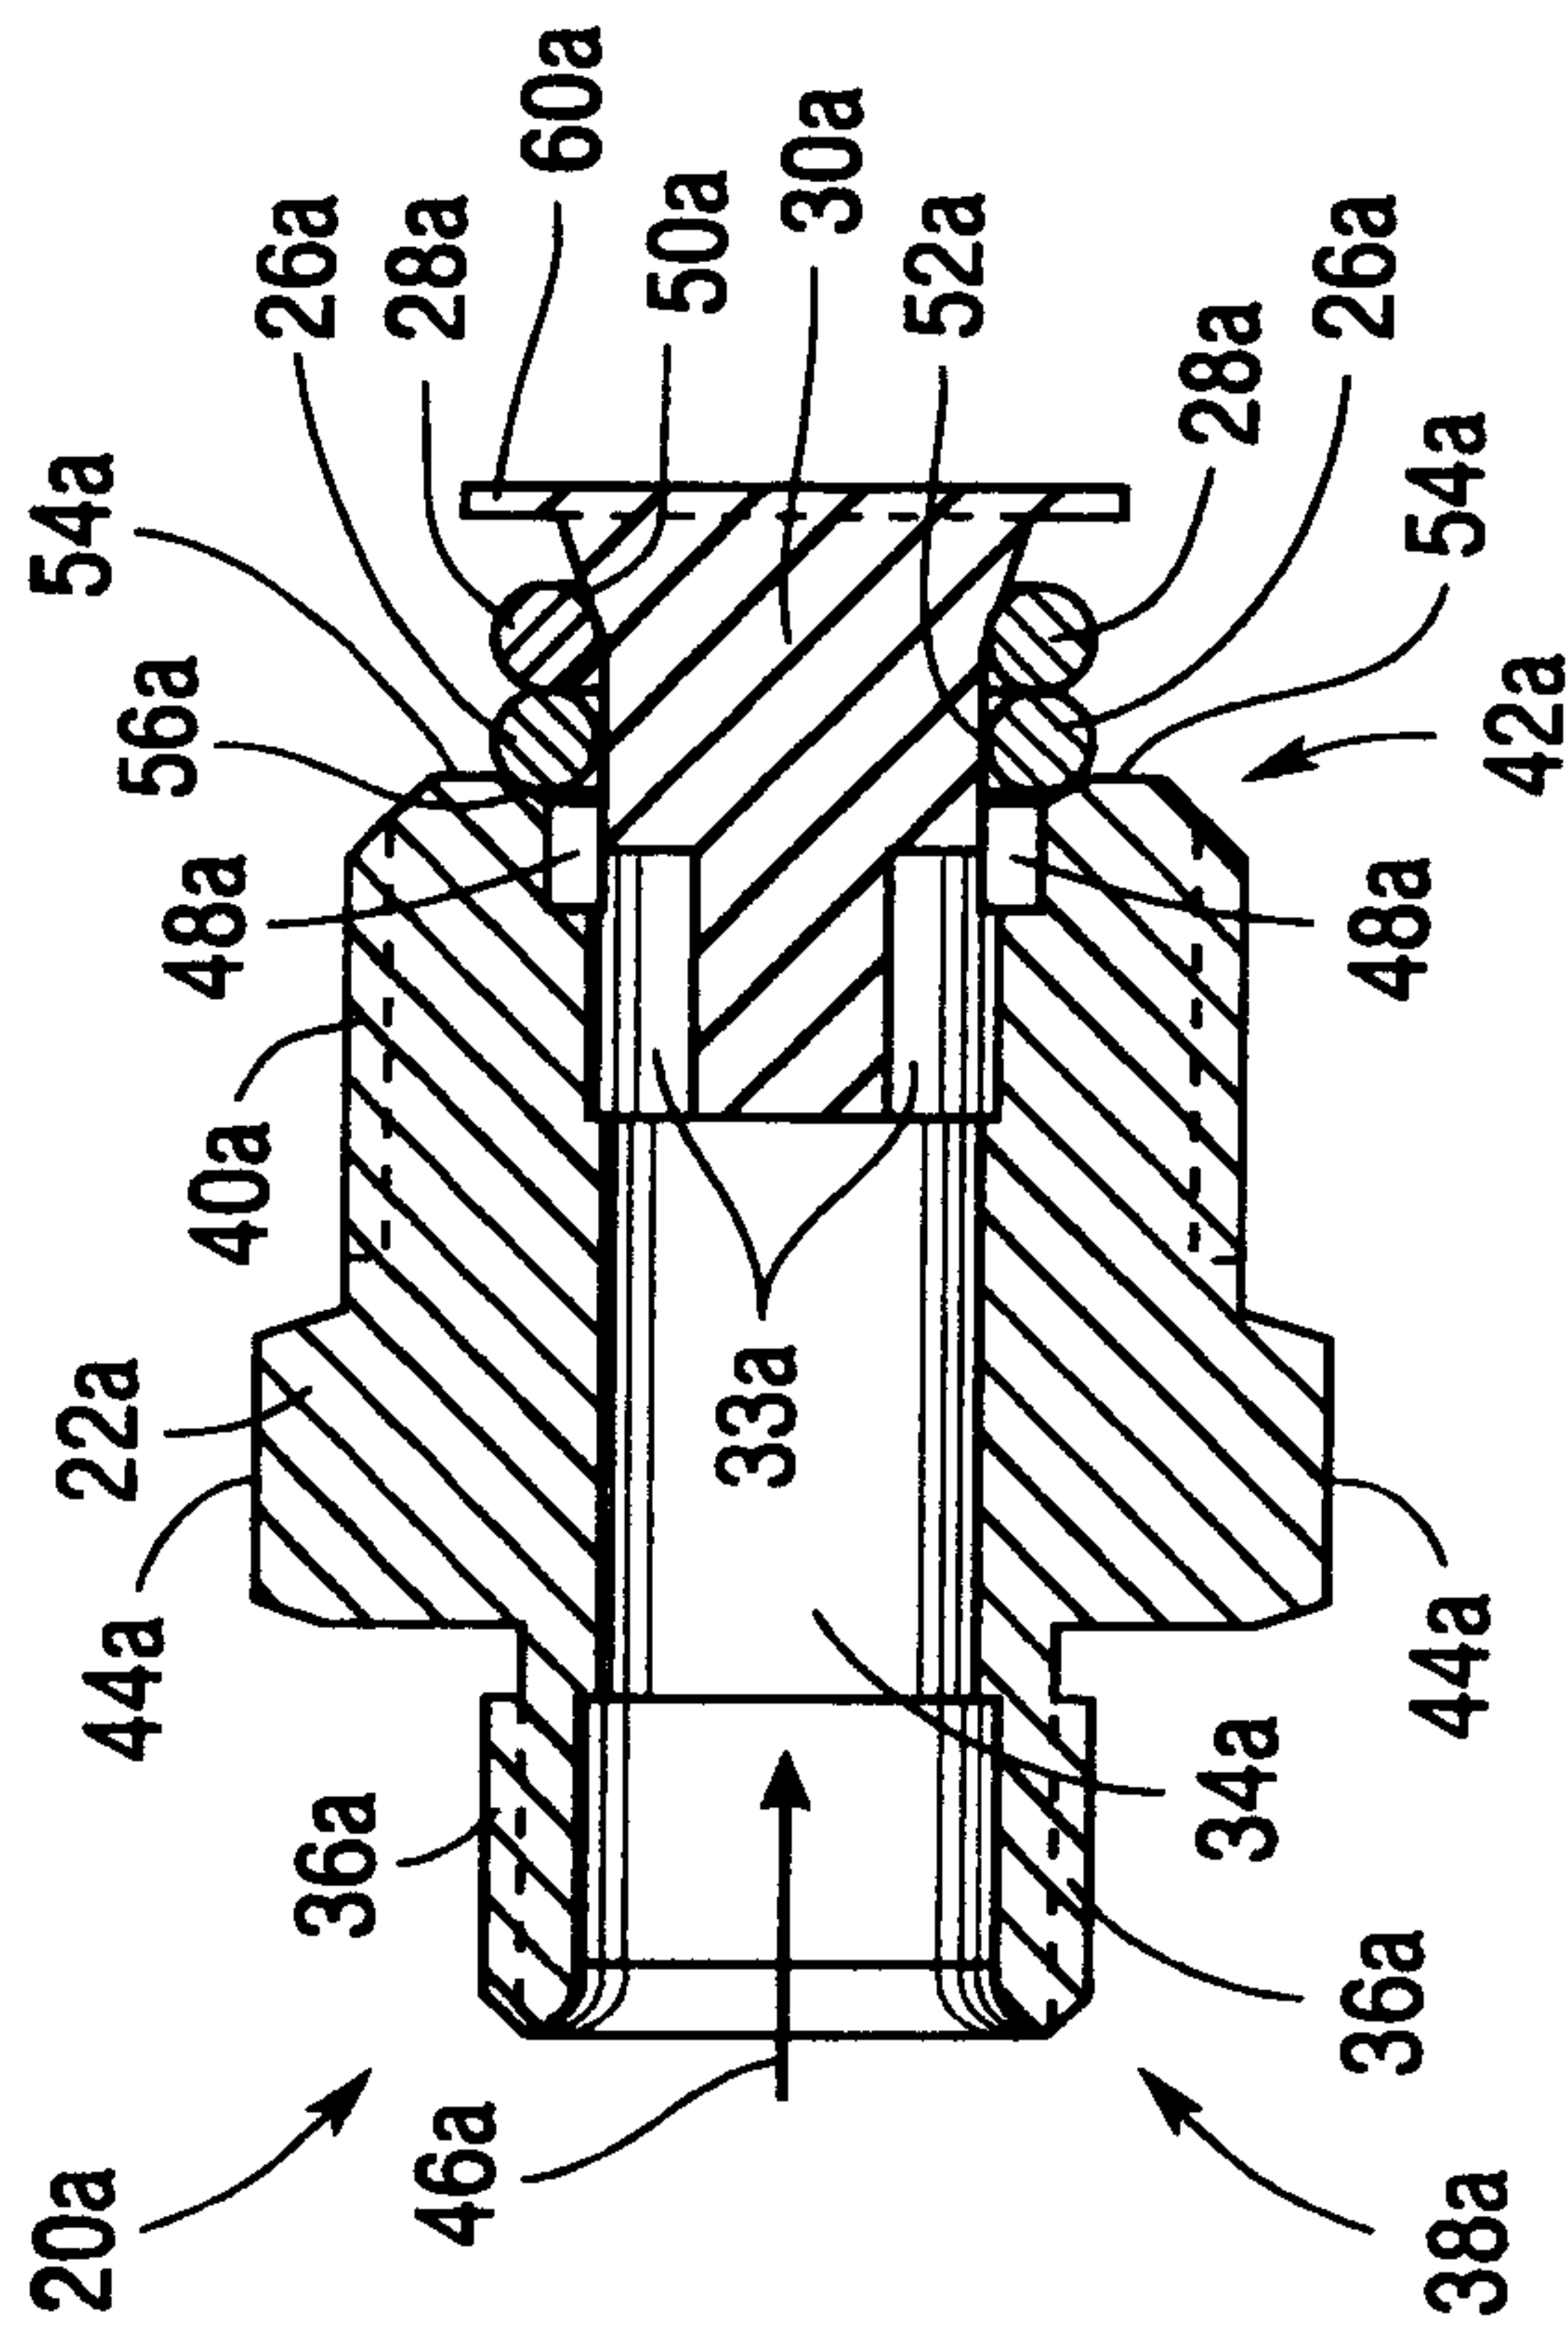


Fig. 3A

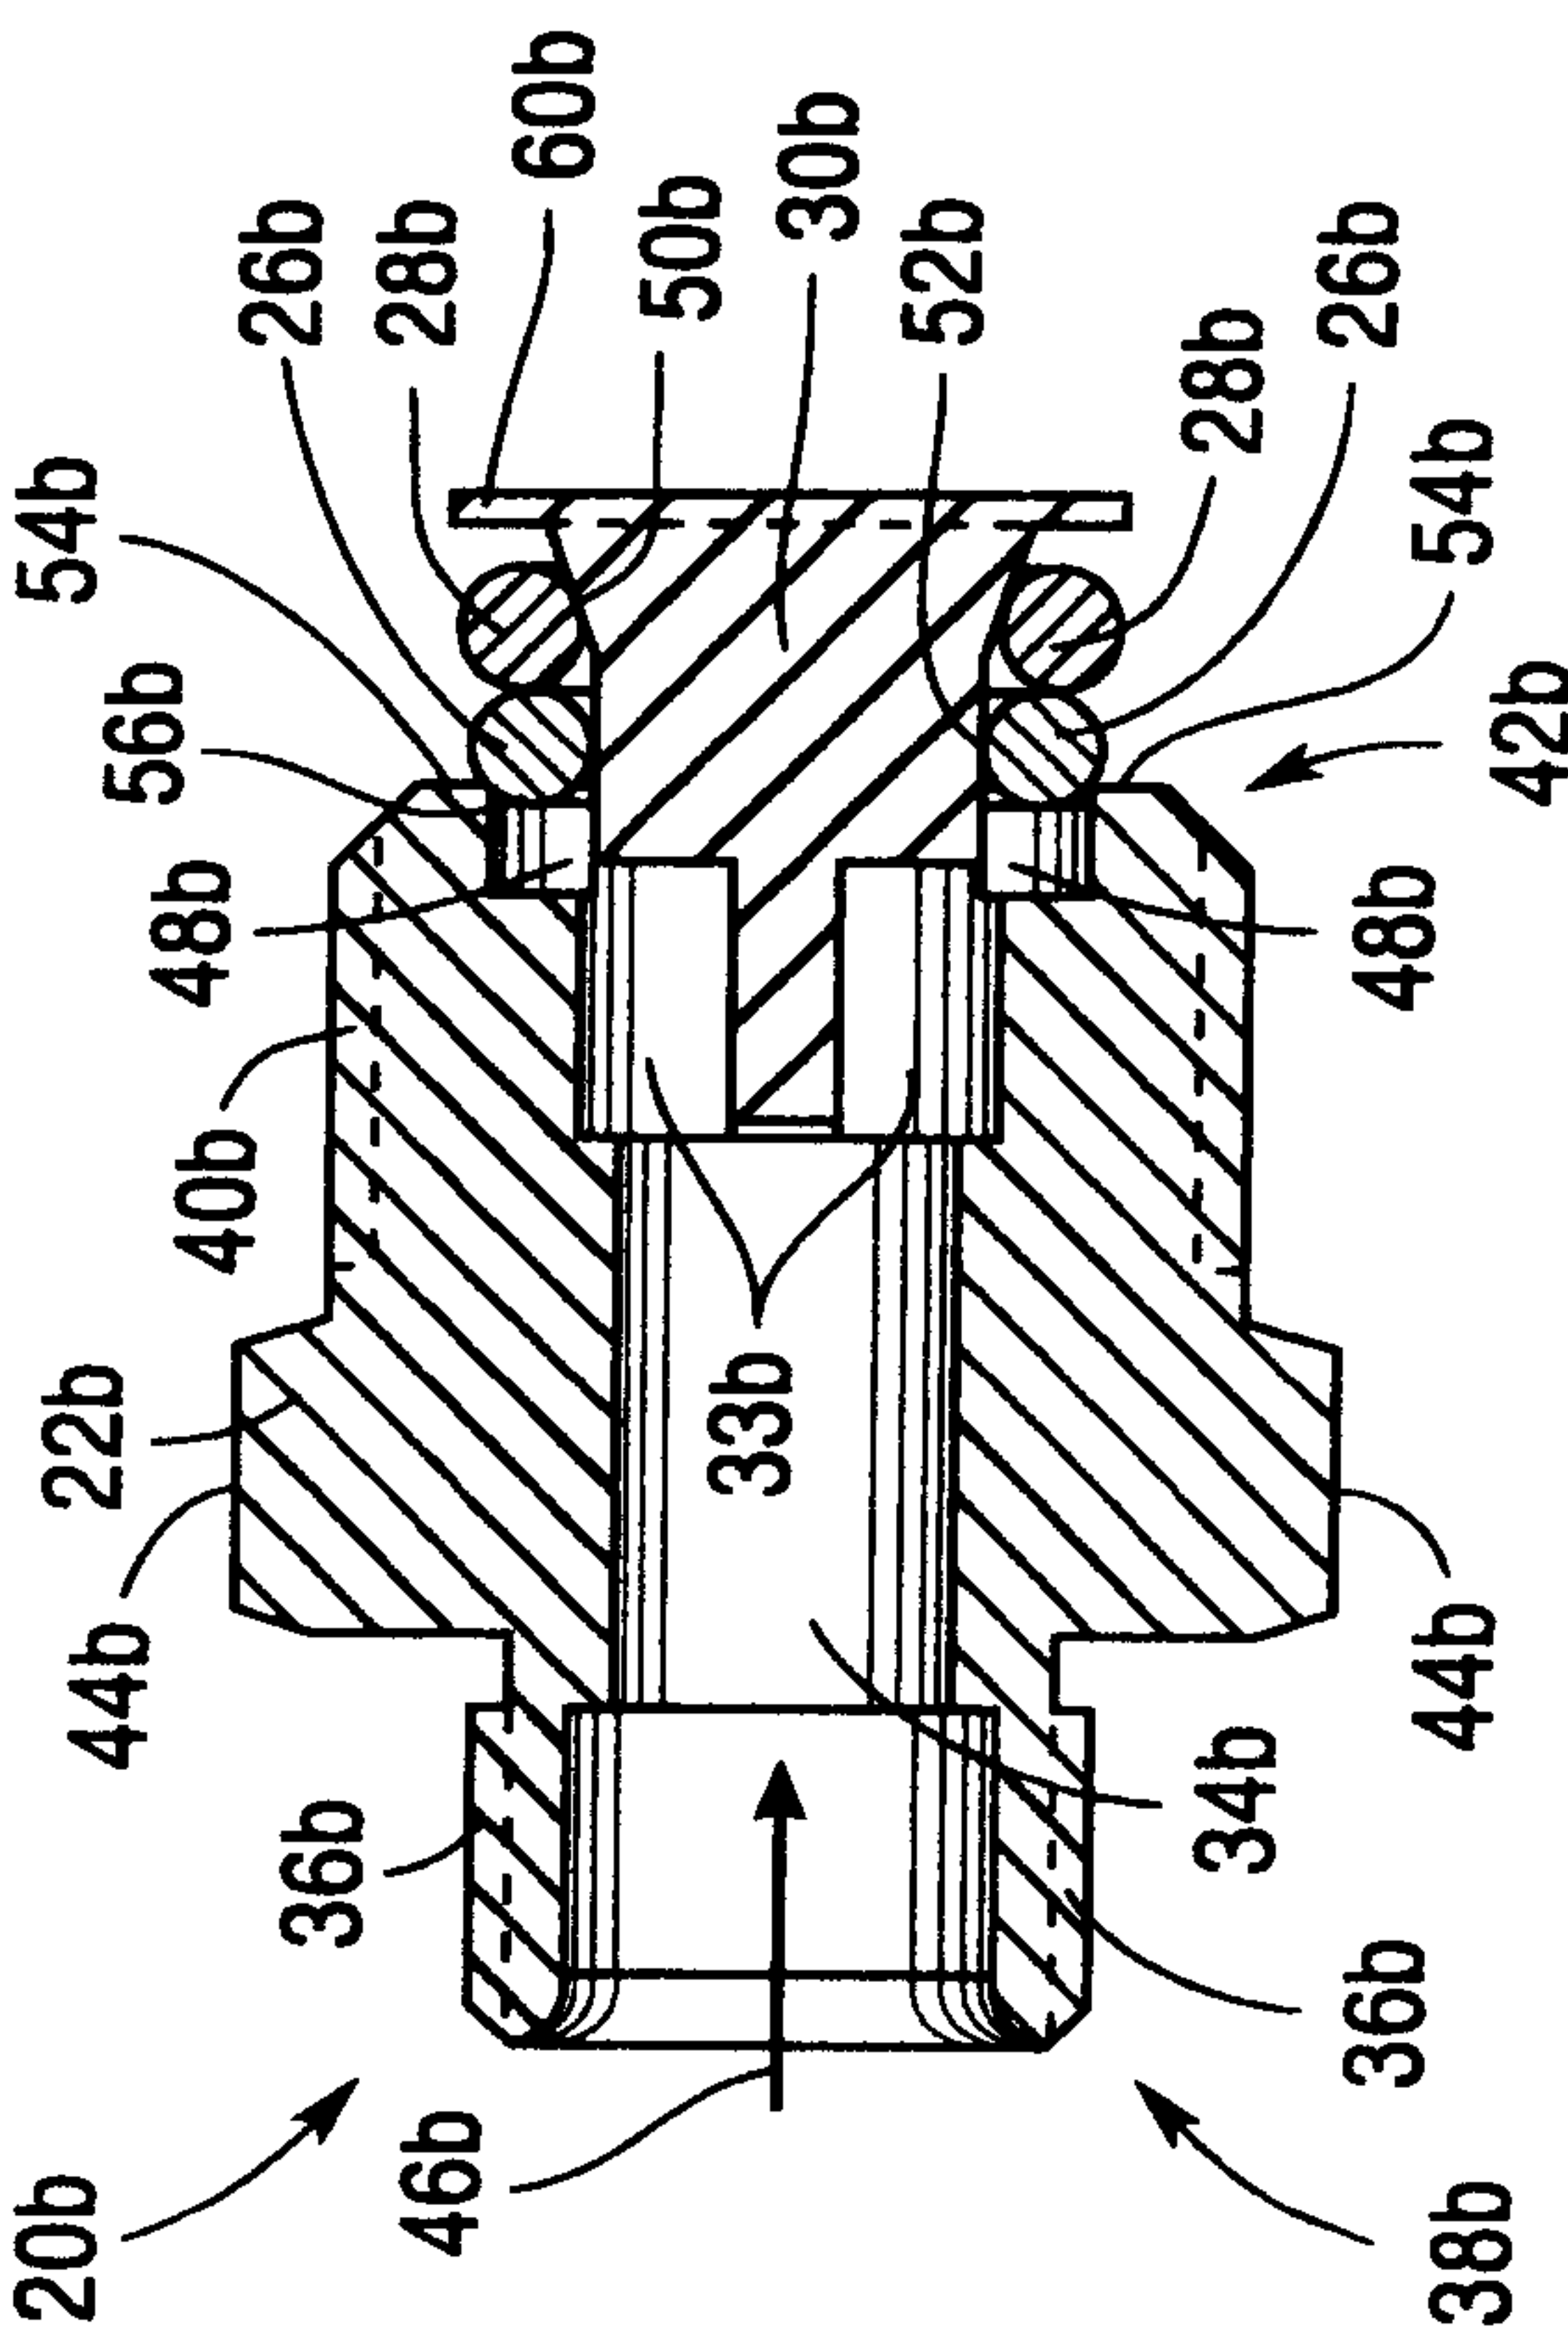


Fig. 3B

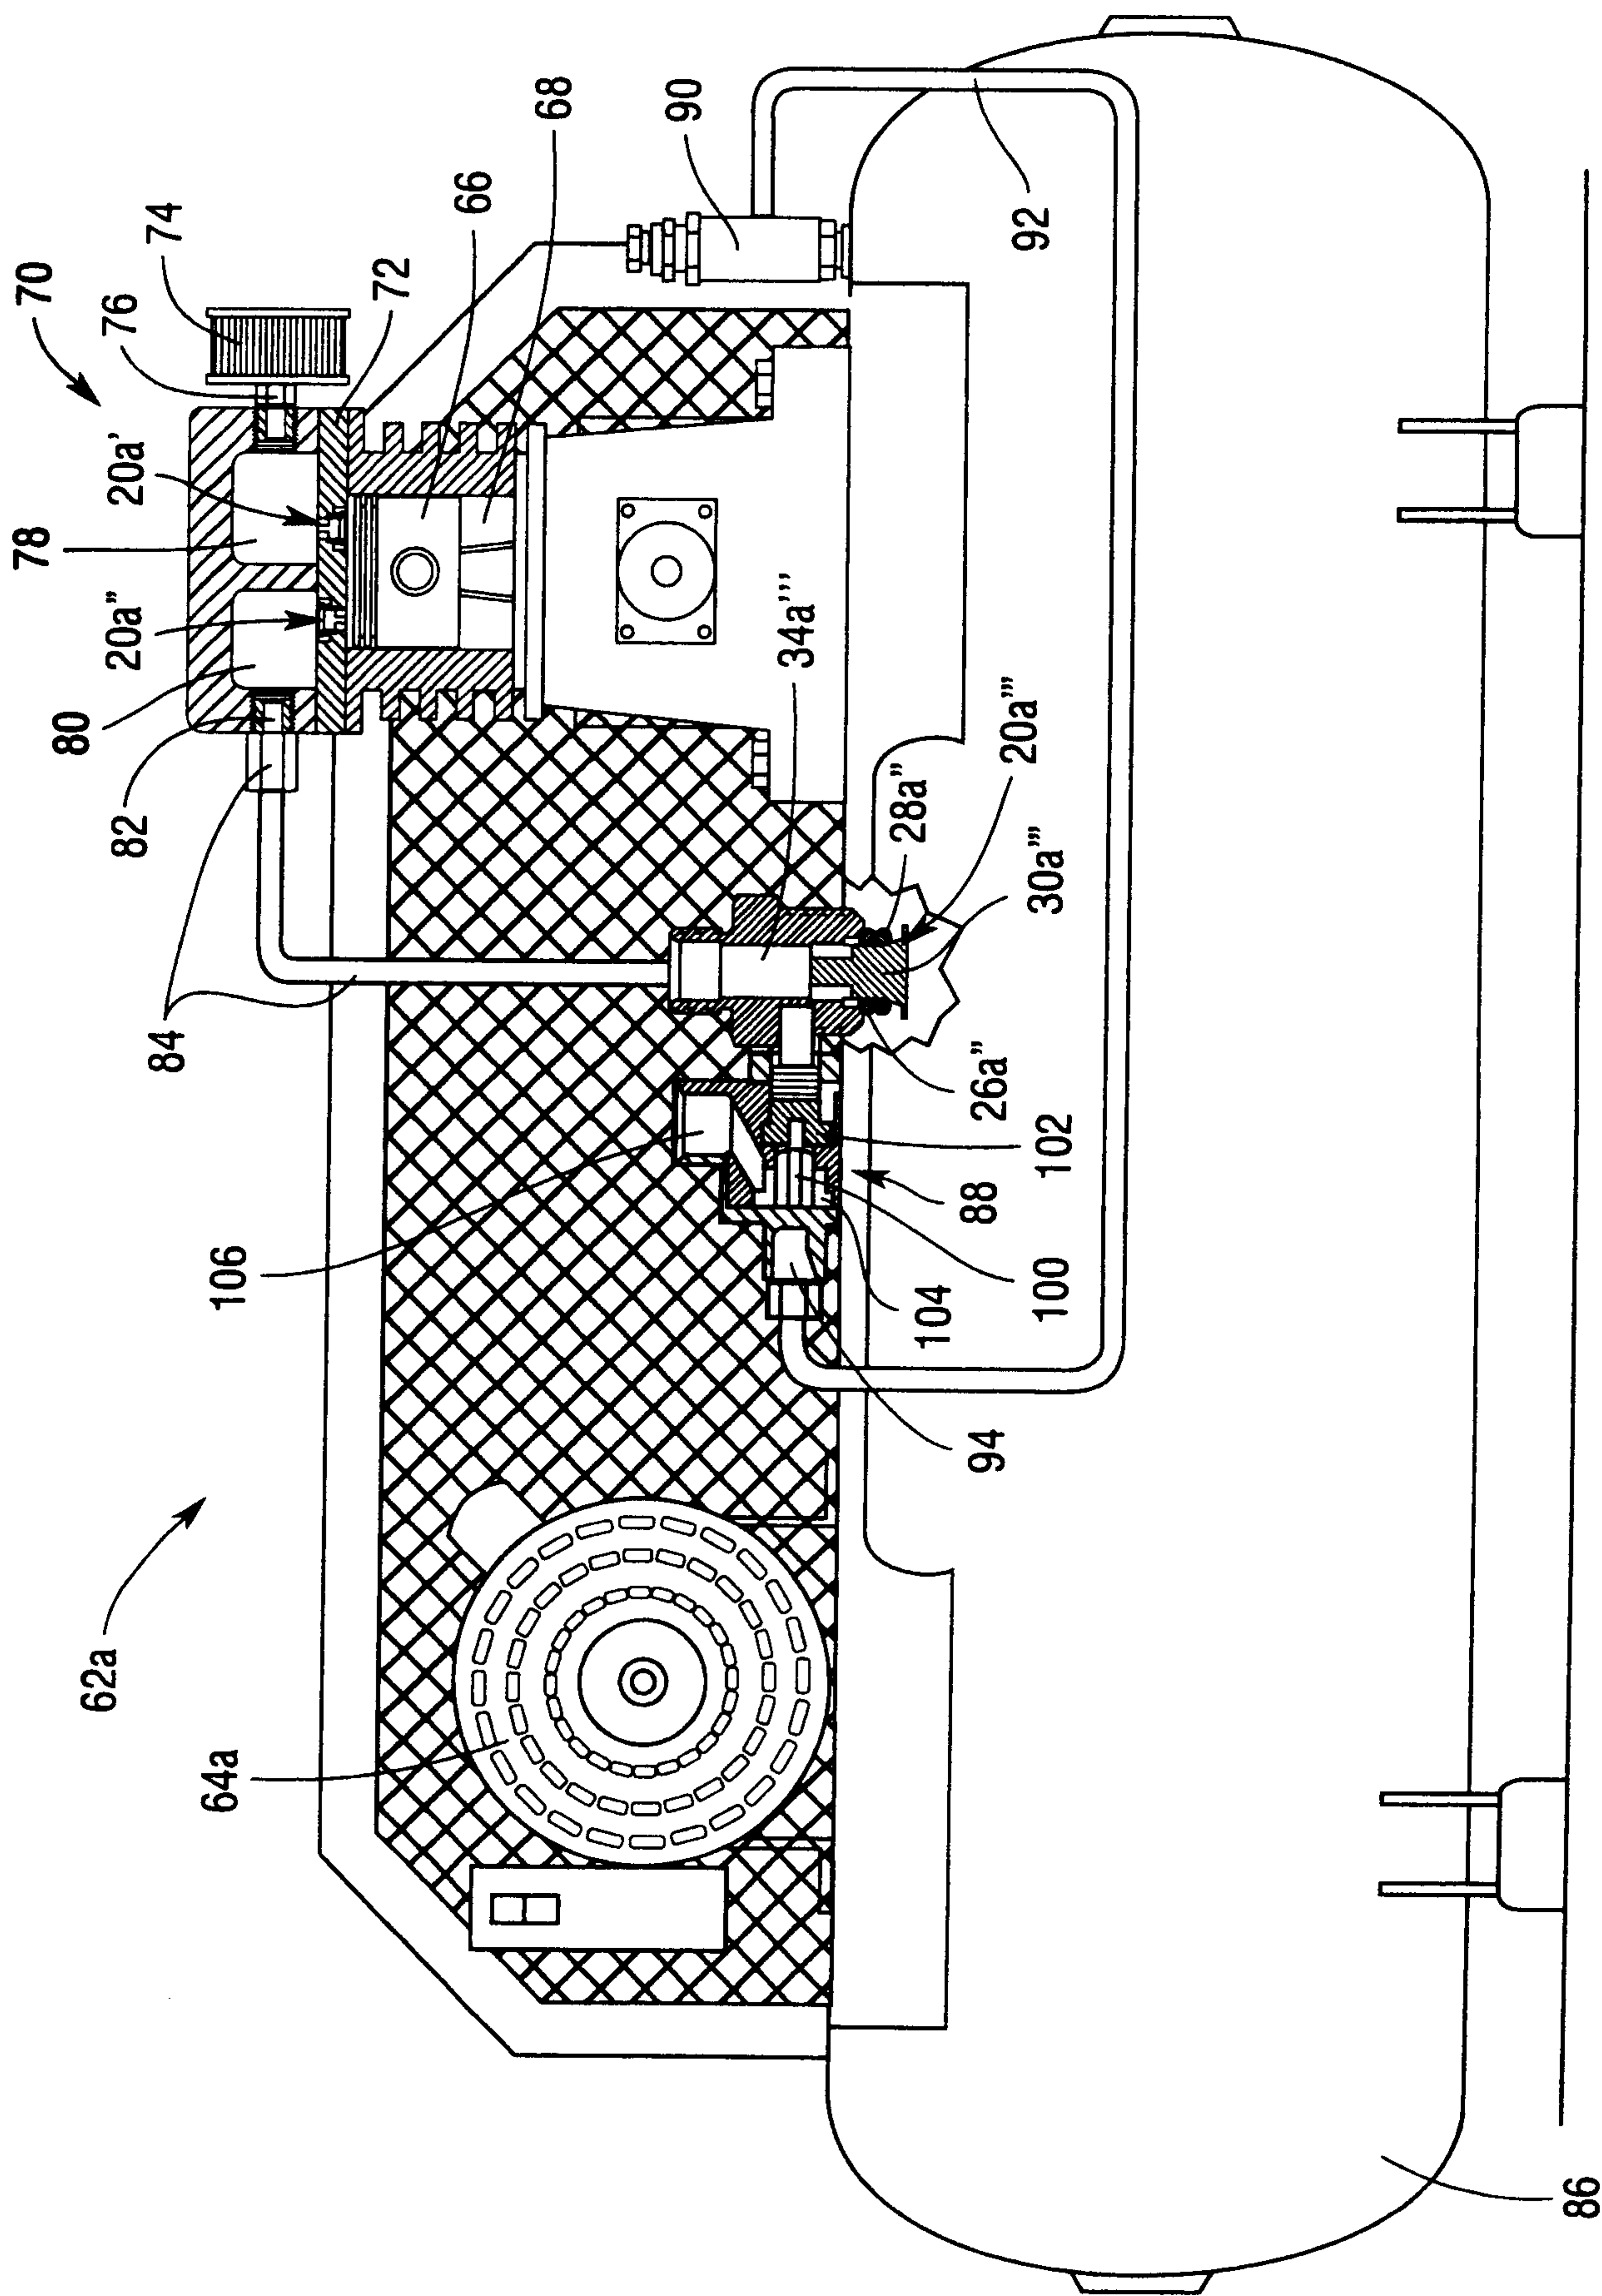


Fig. 4

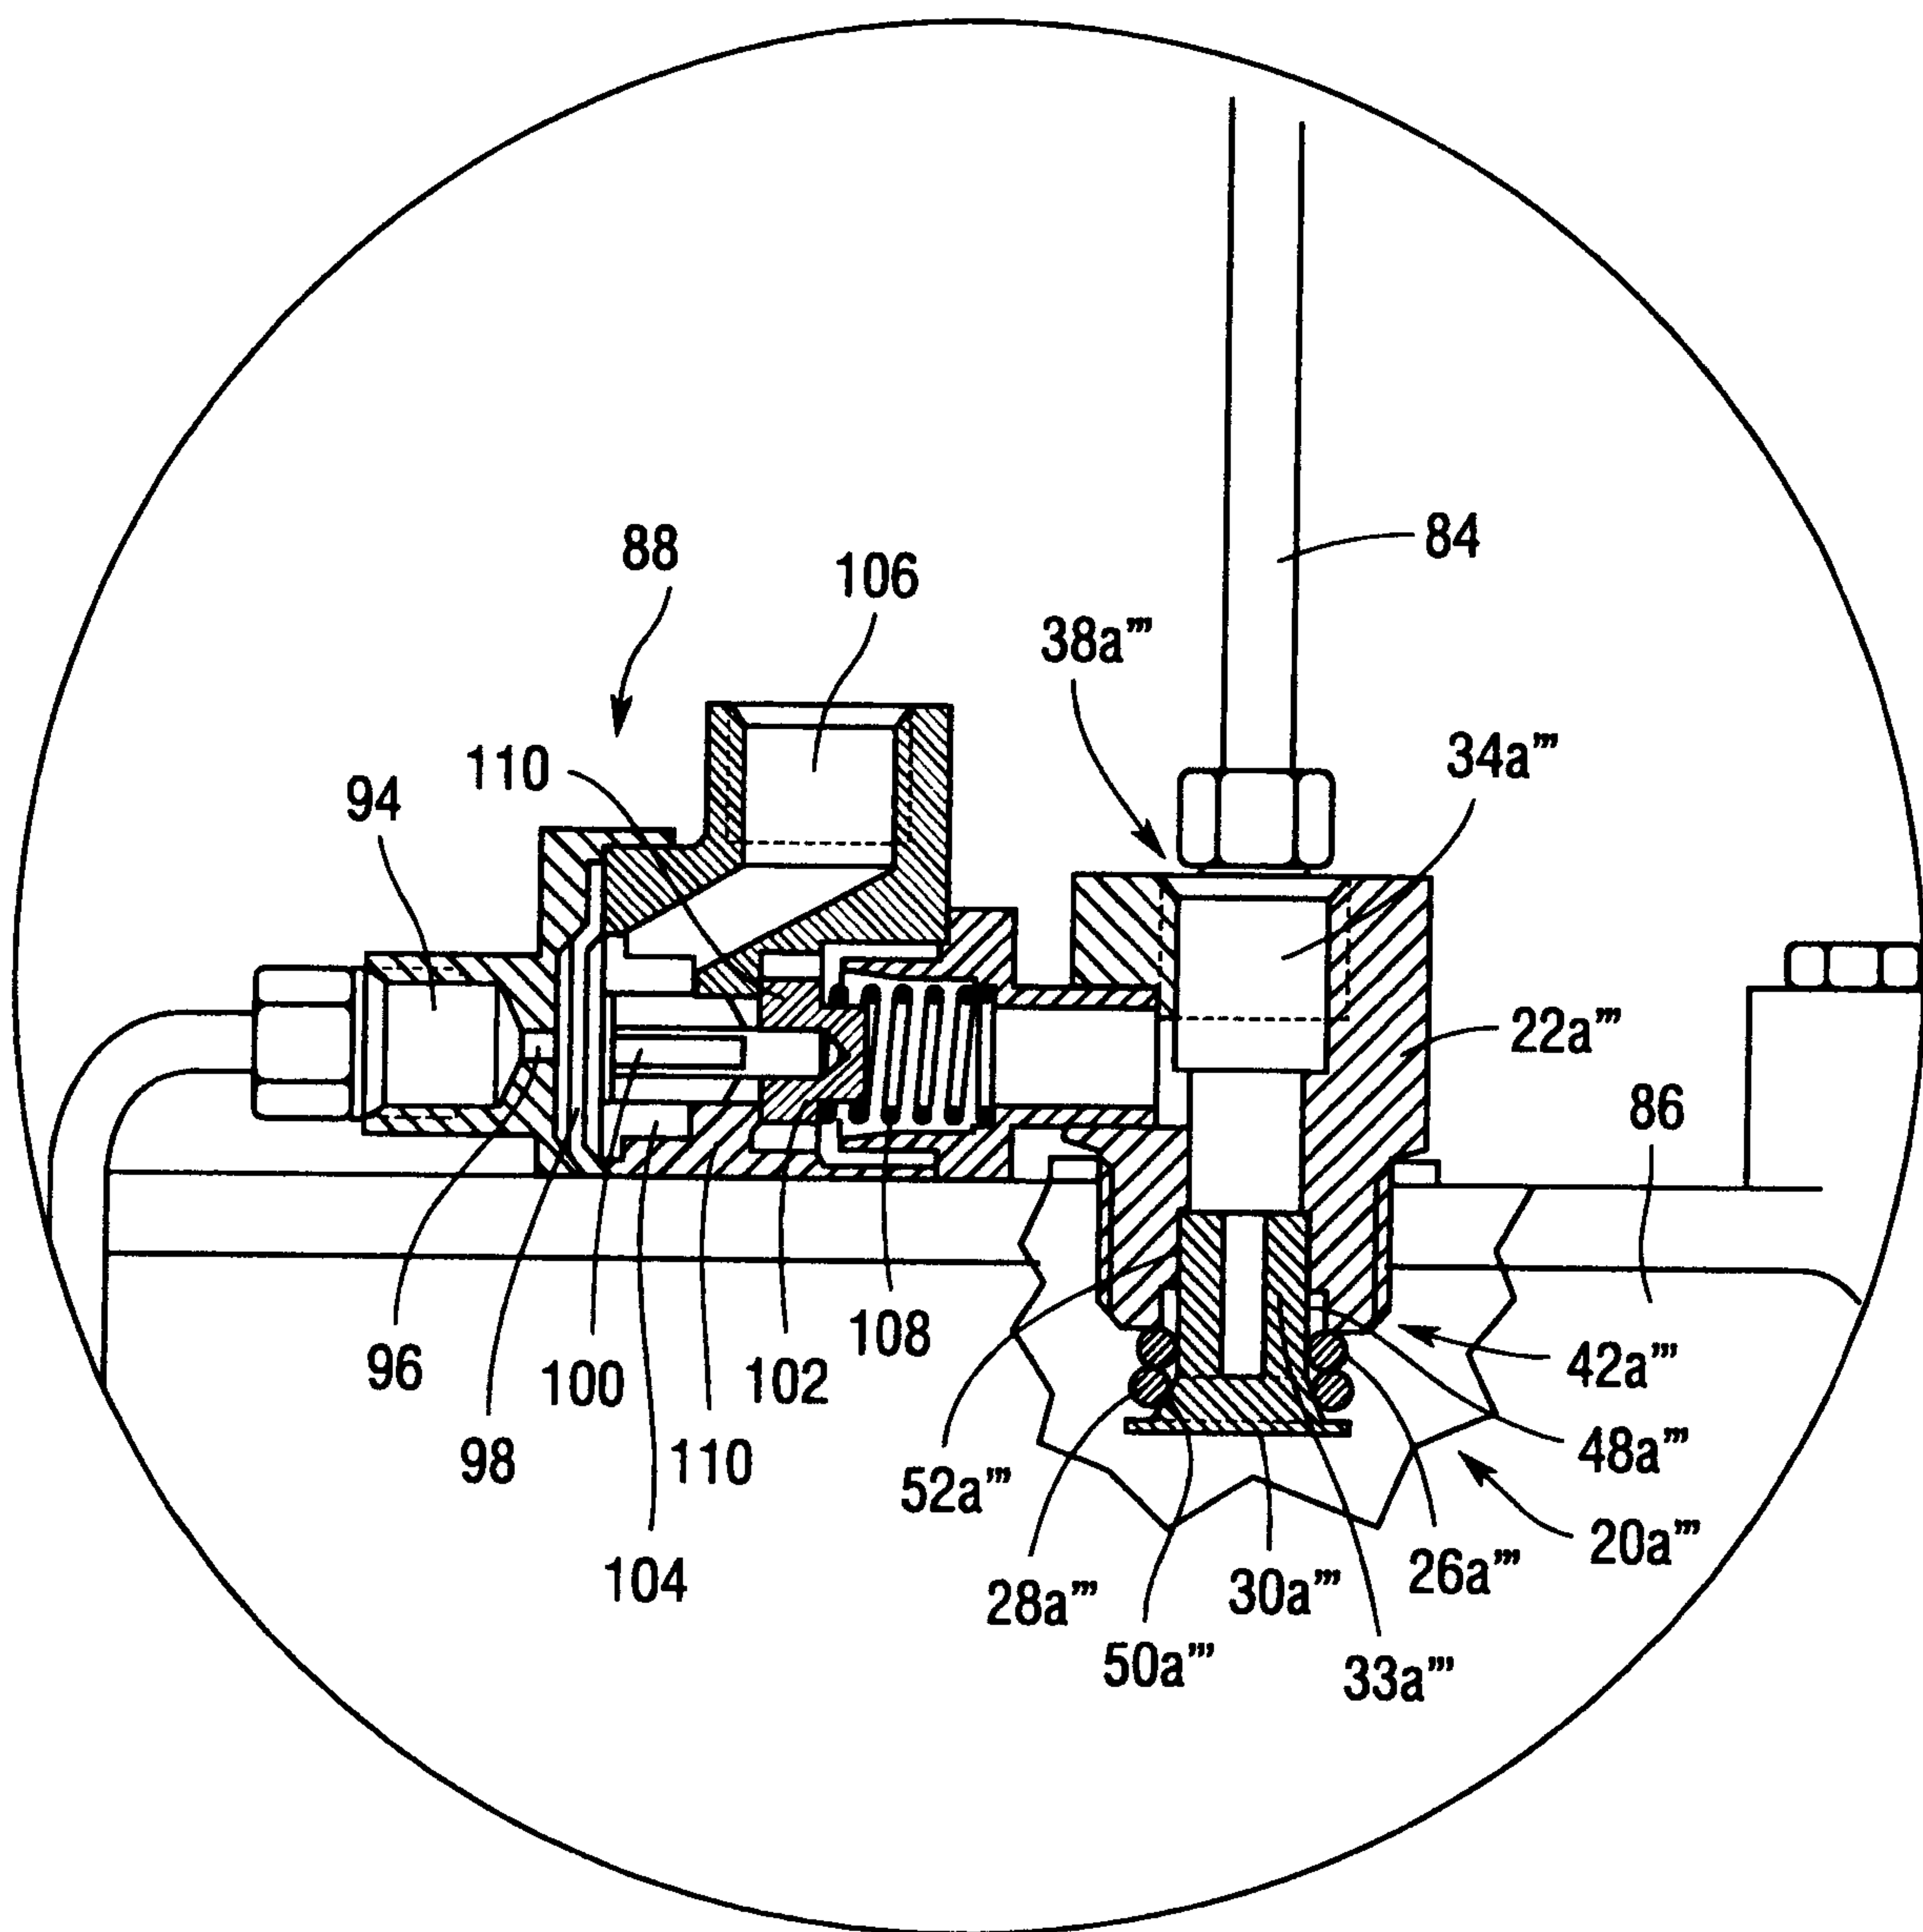


Fig.5

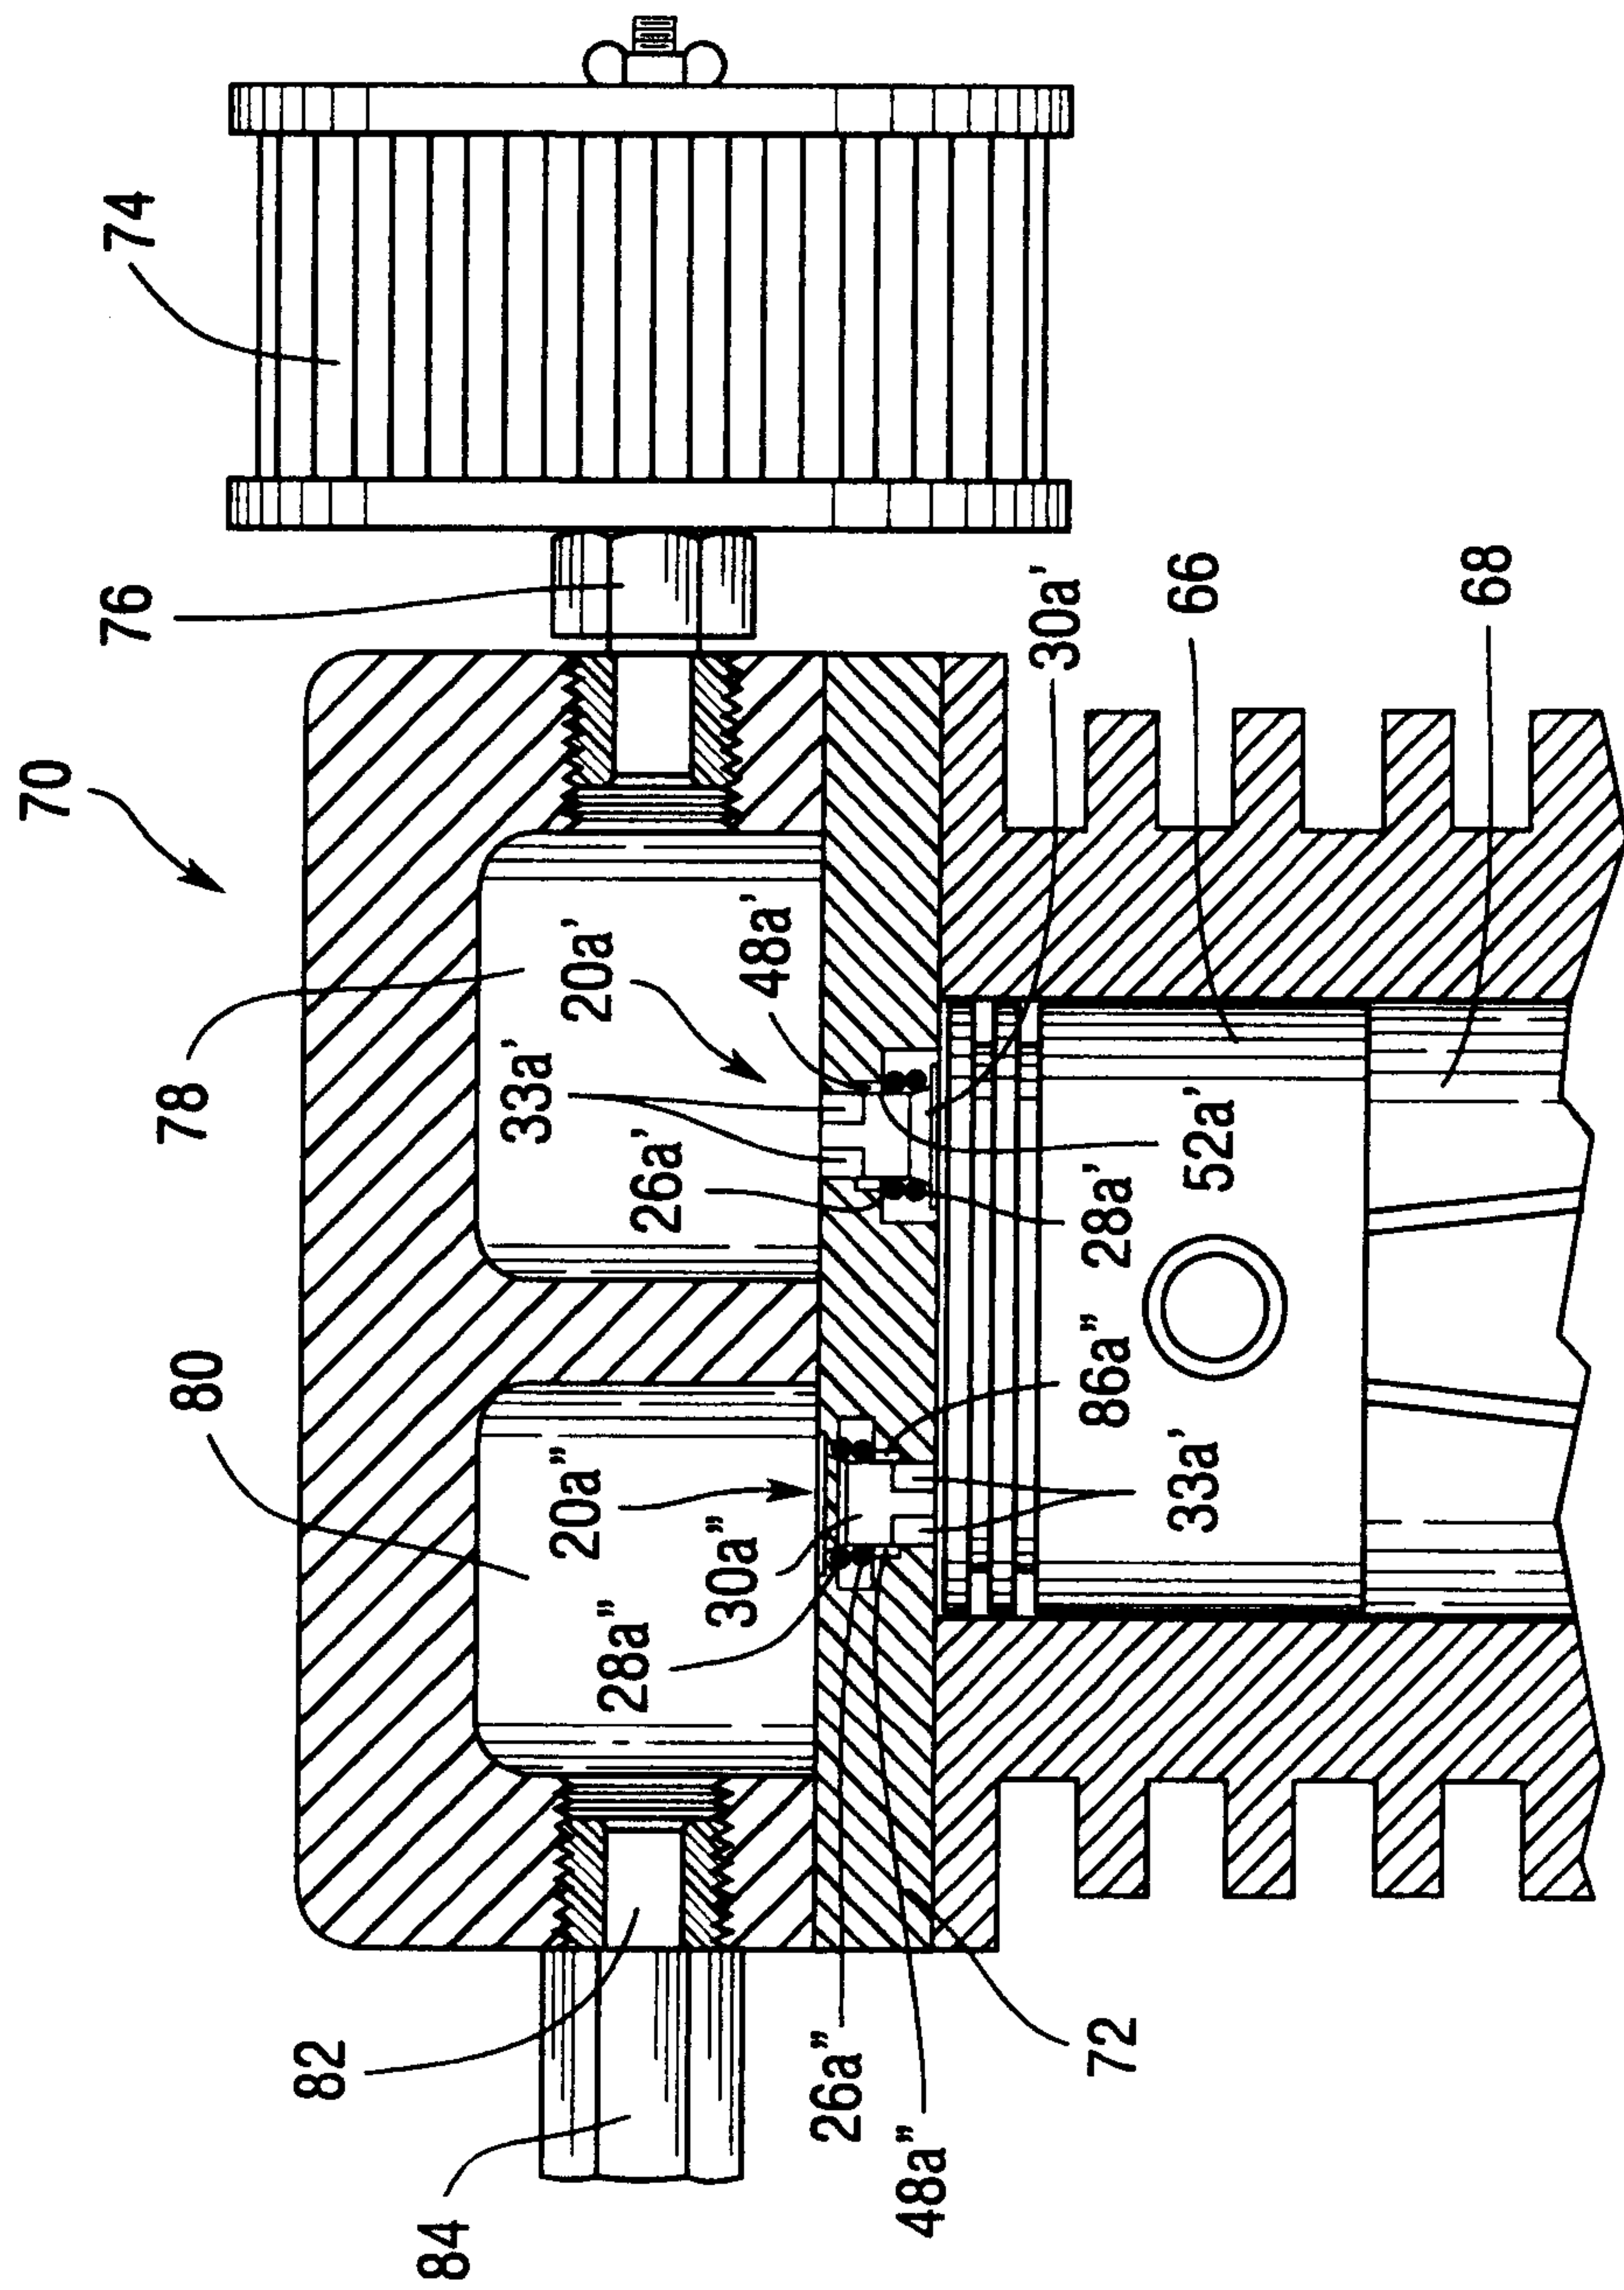


Fig. 6

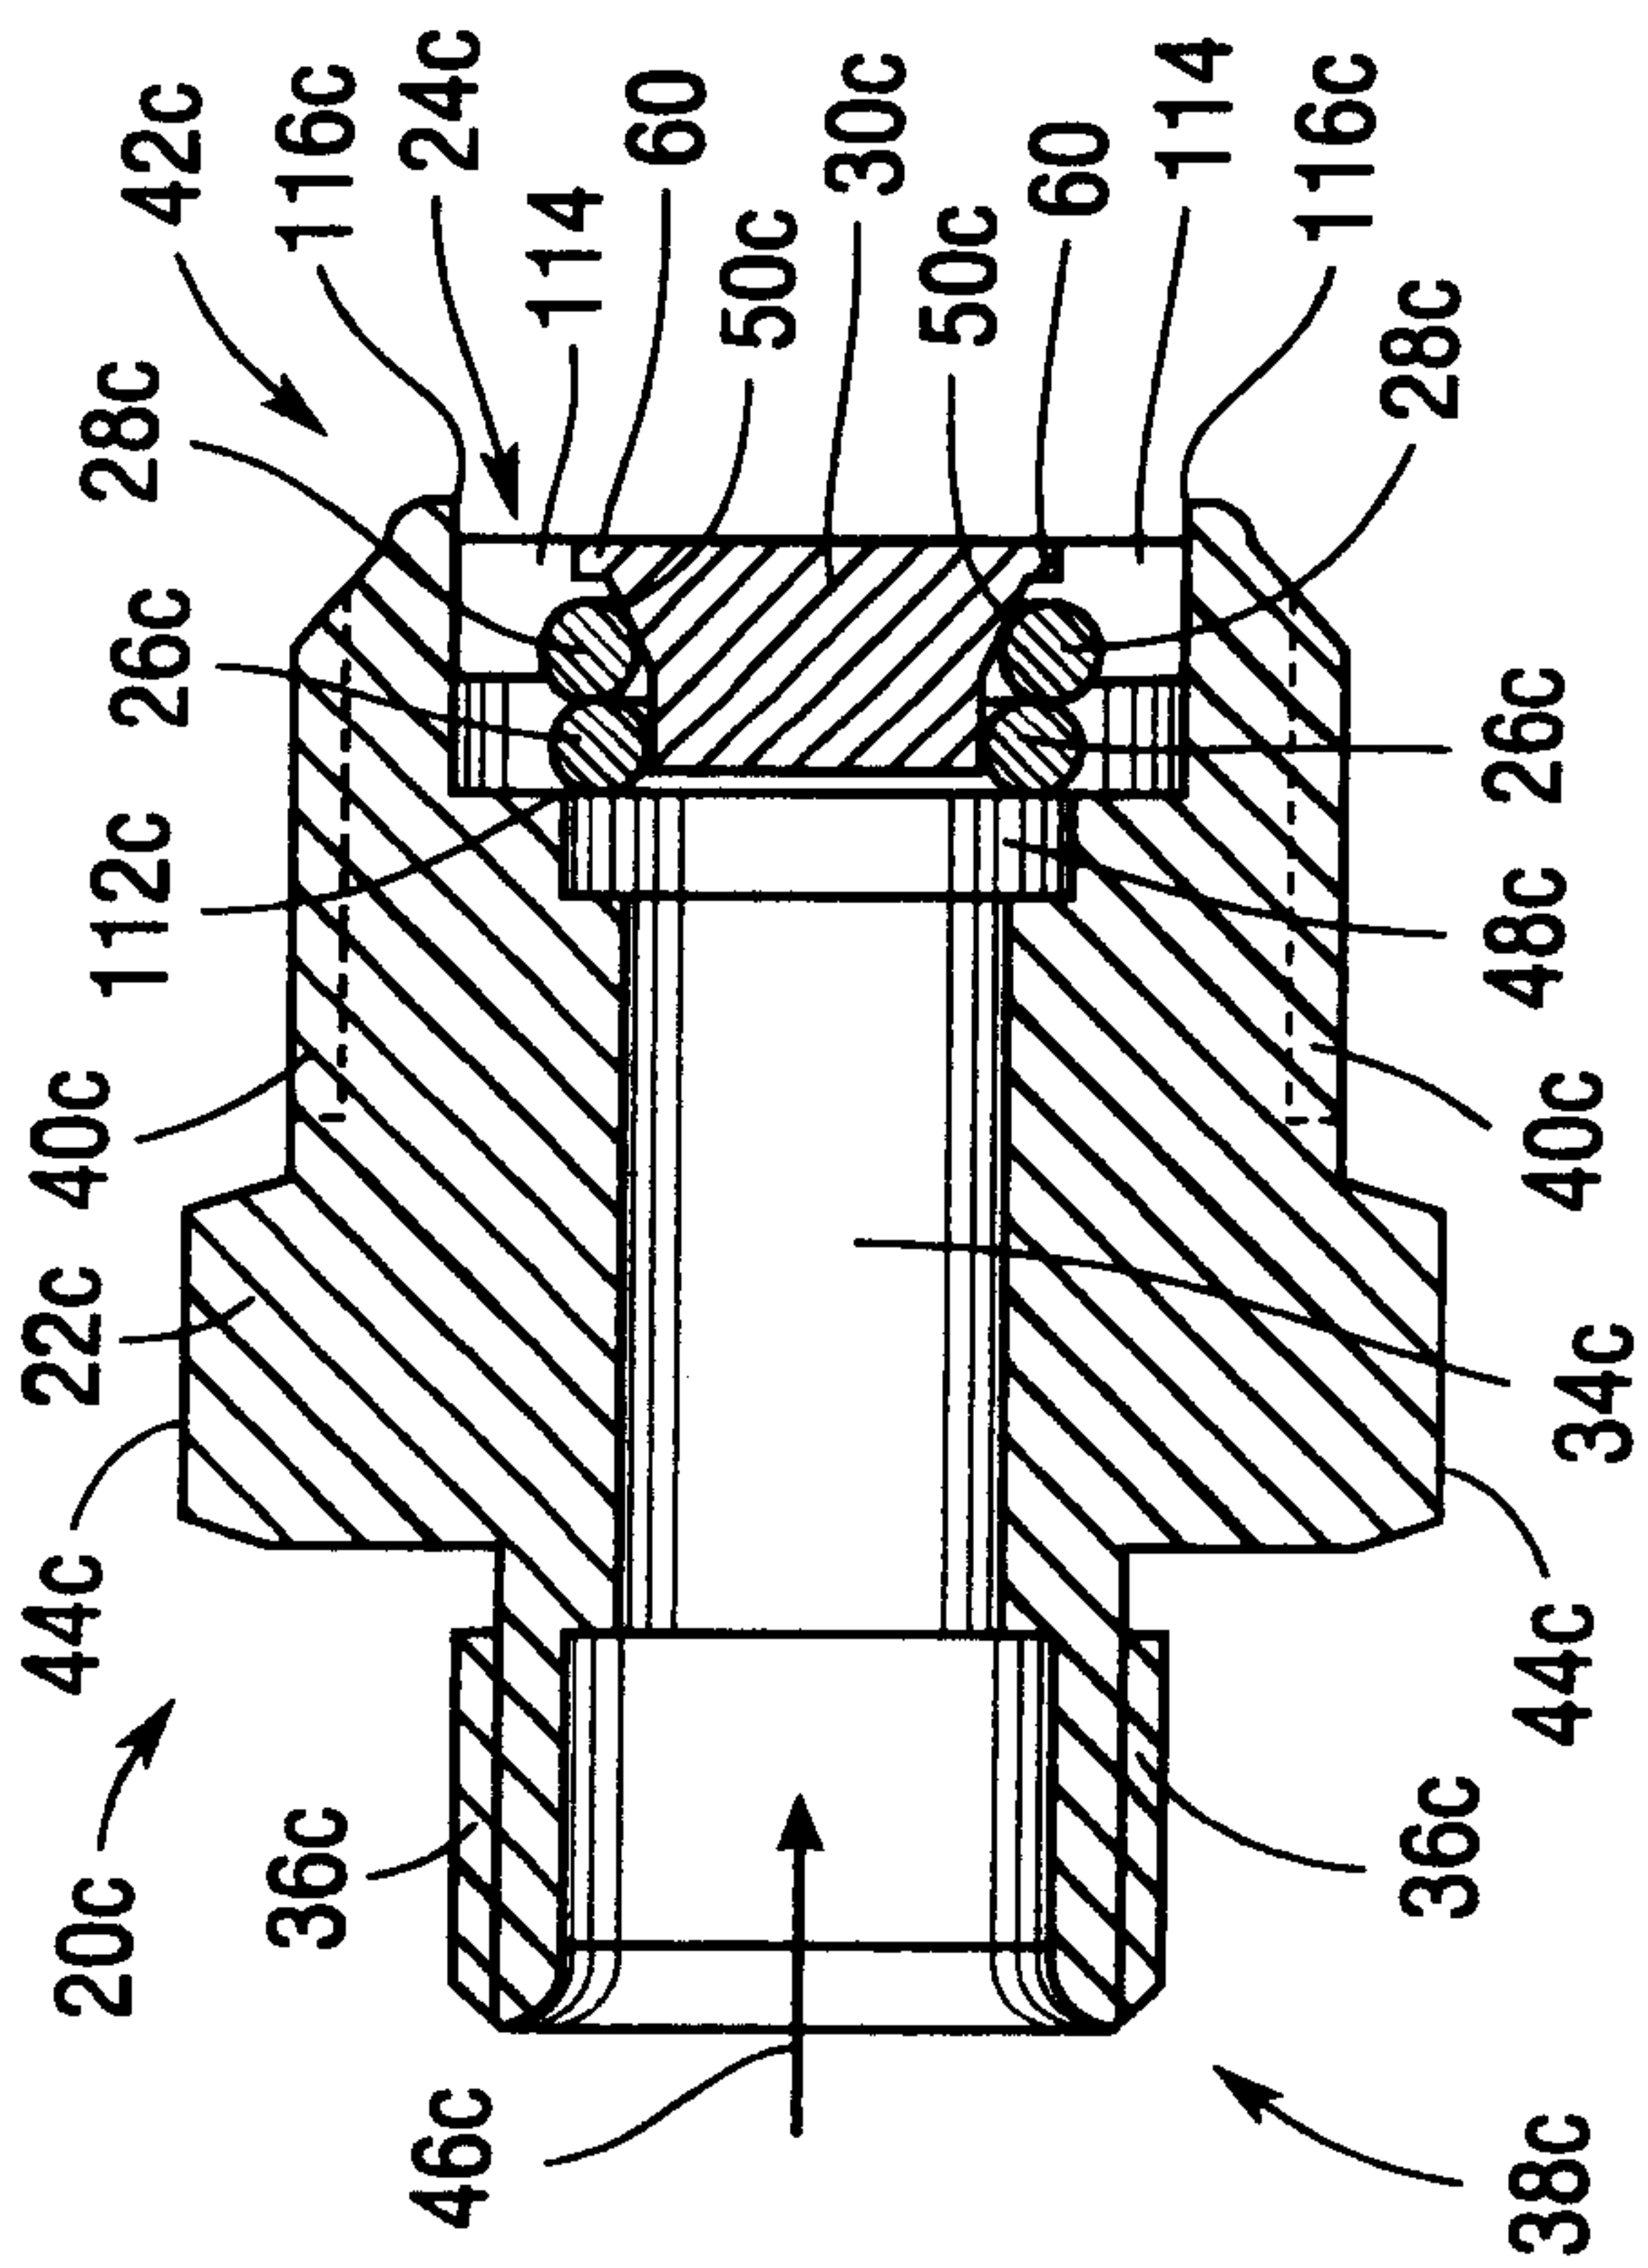


Fig. 7A

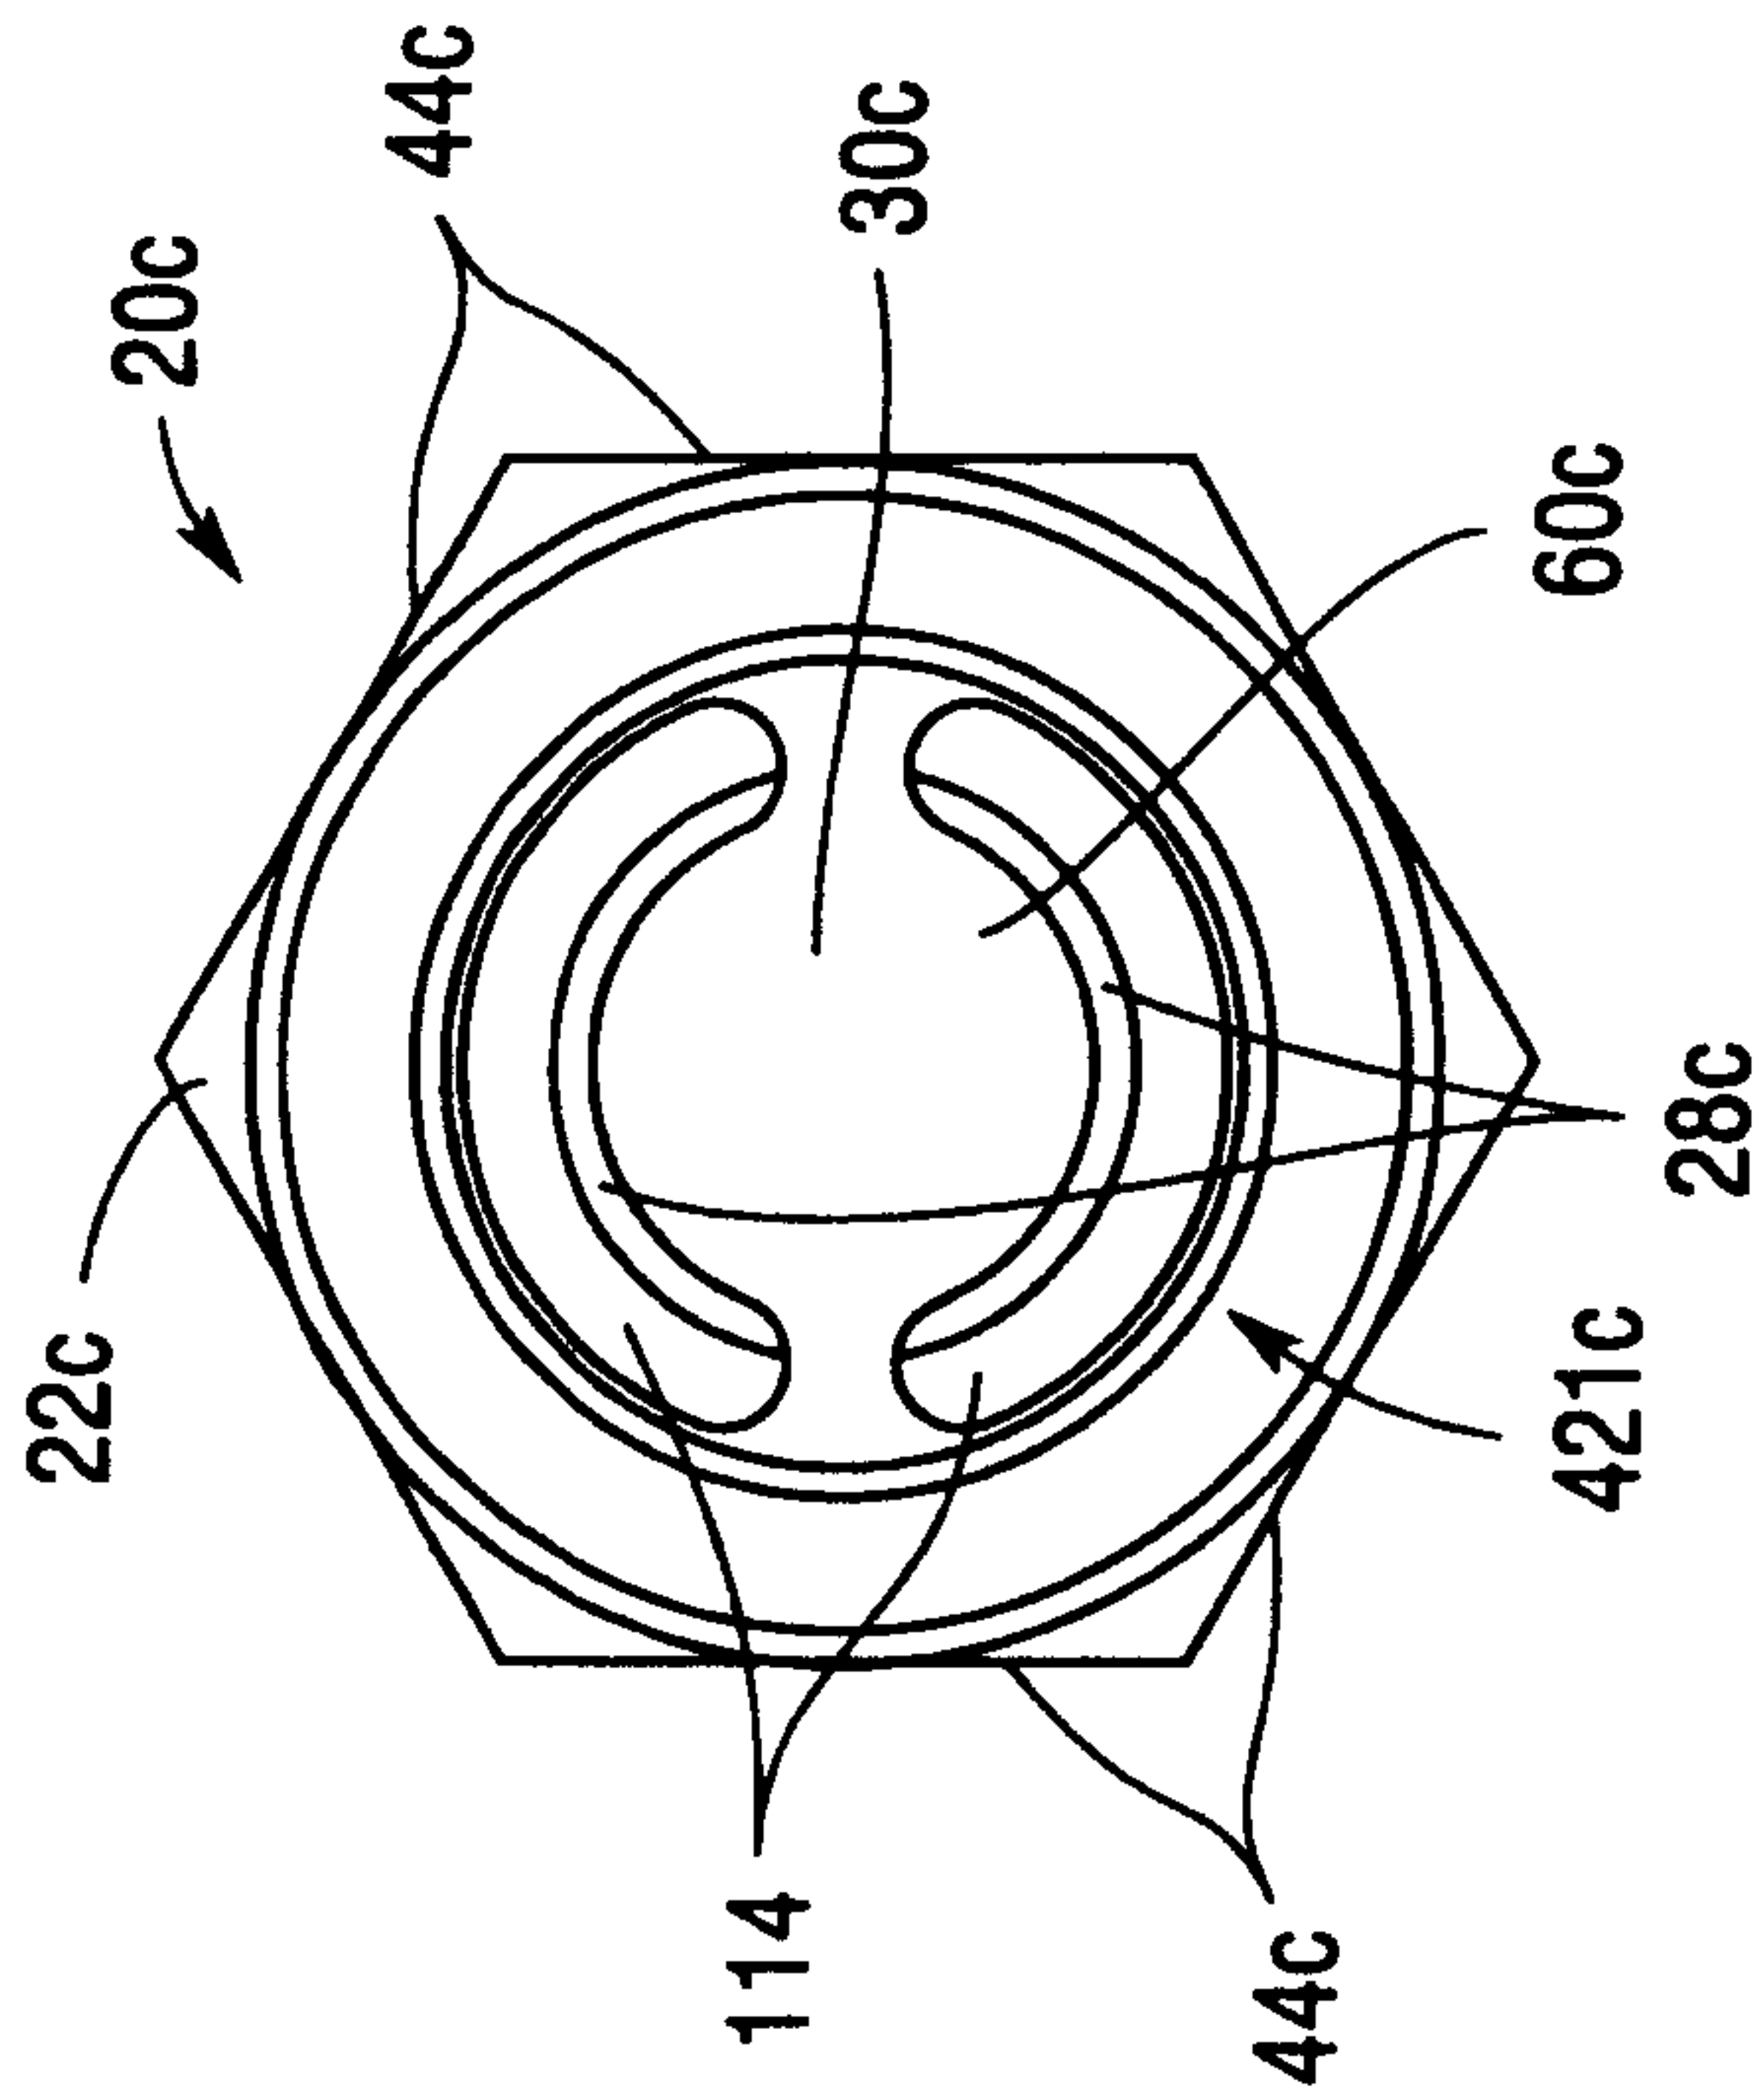


Fig. 7B

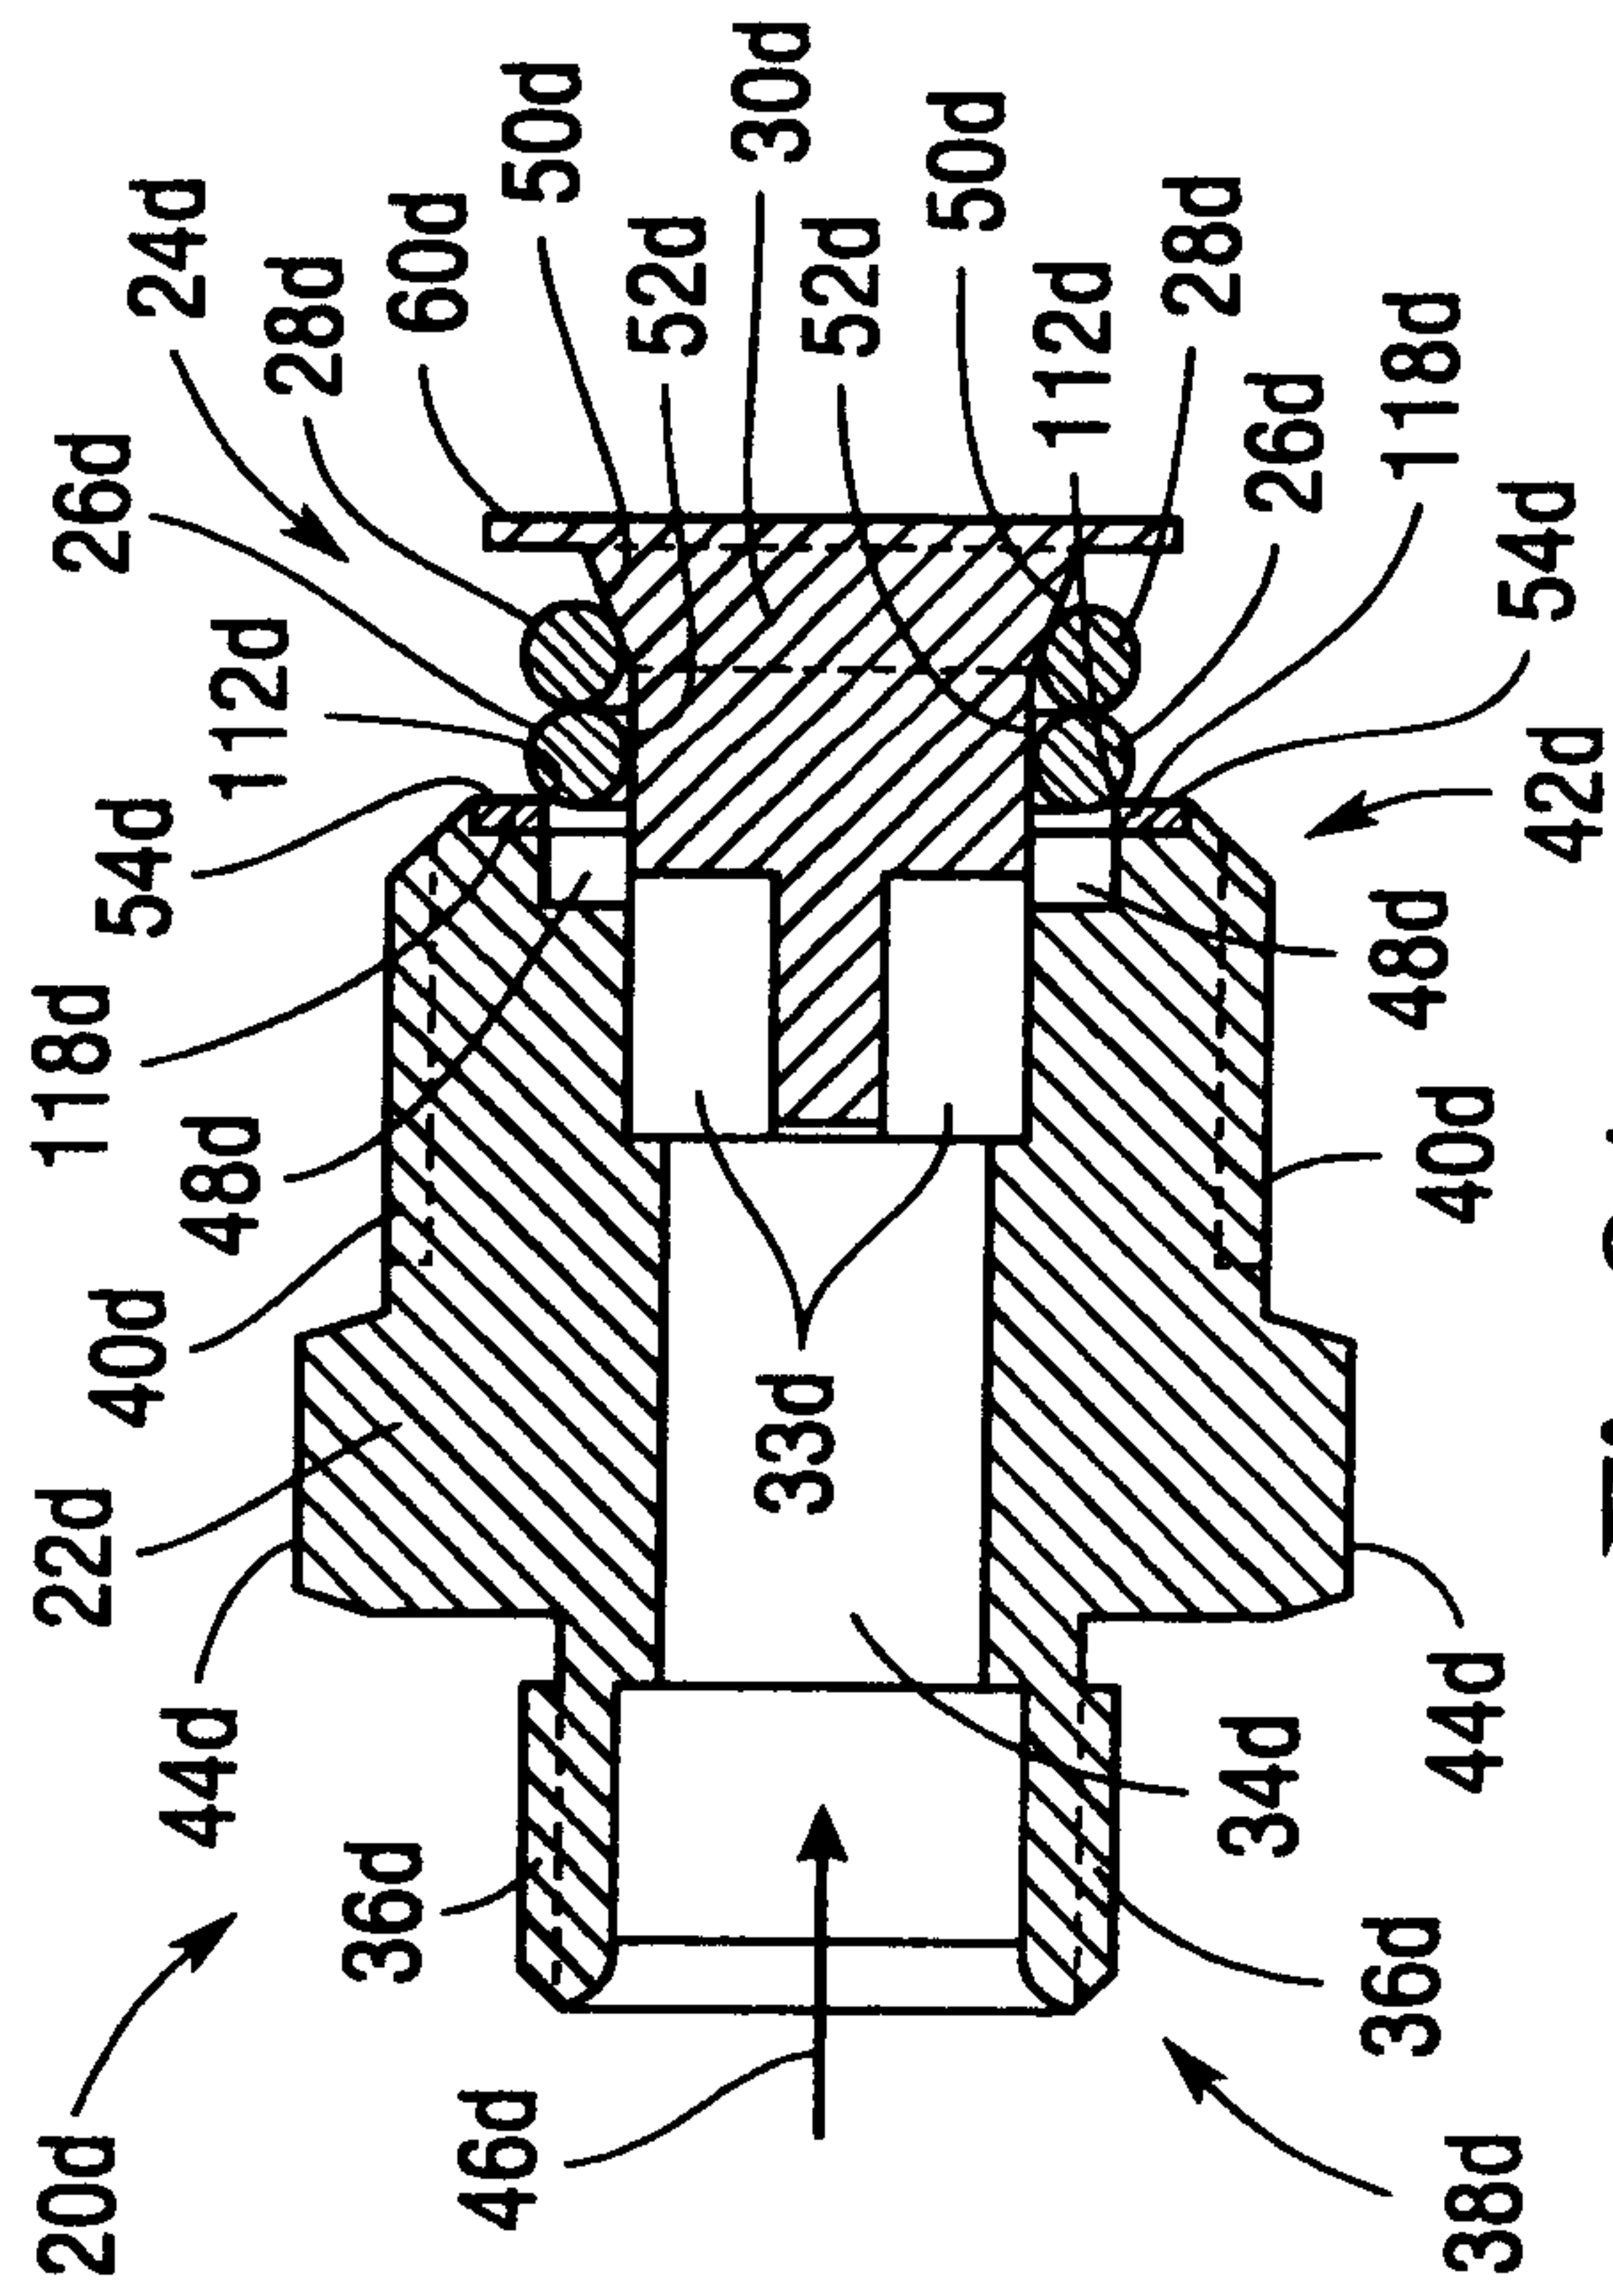


Fig. 8A

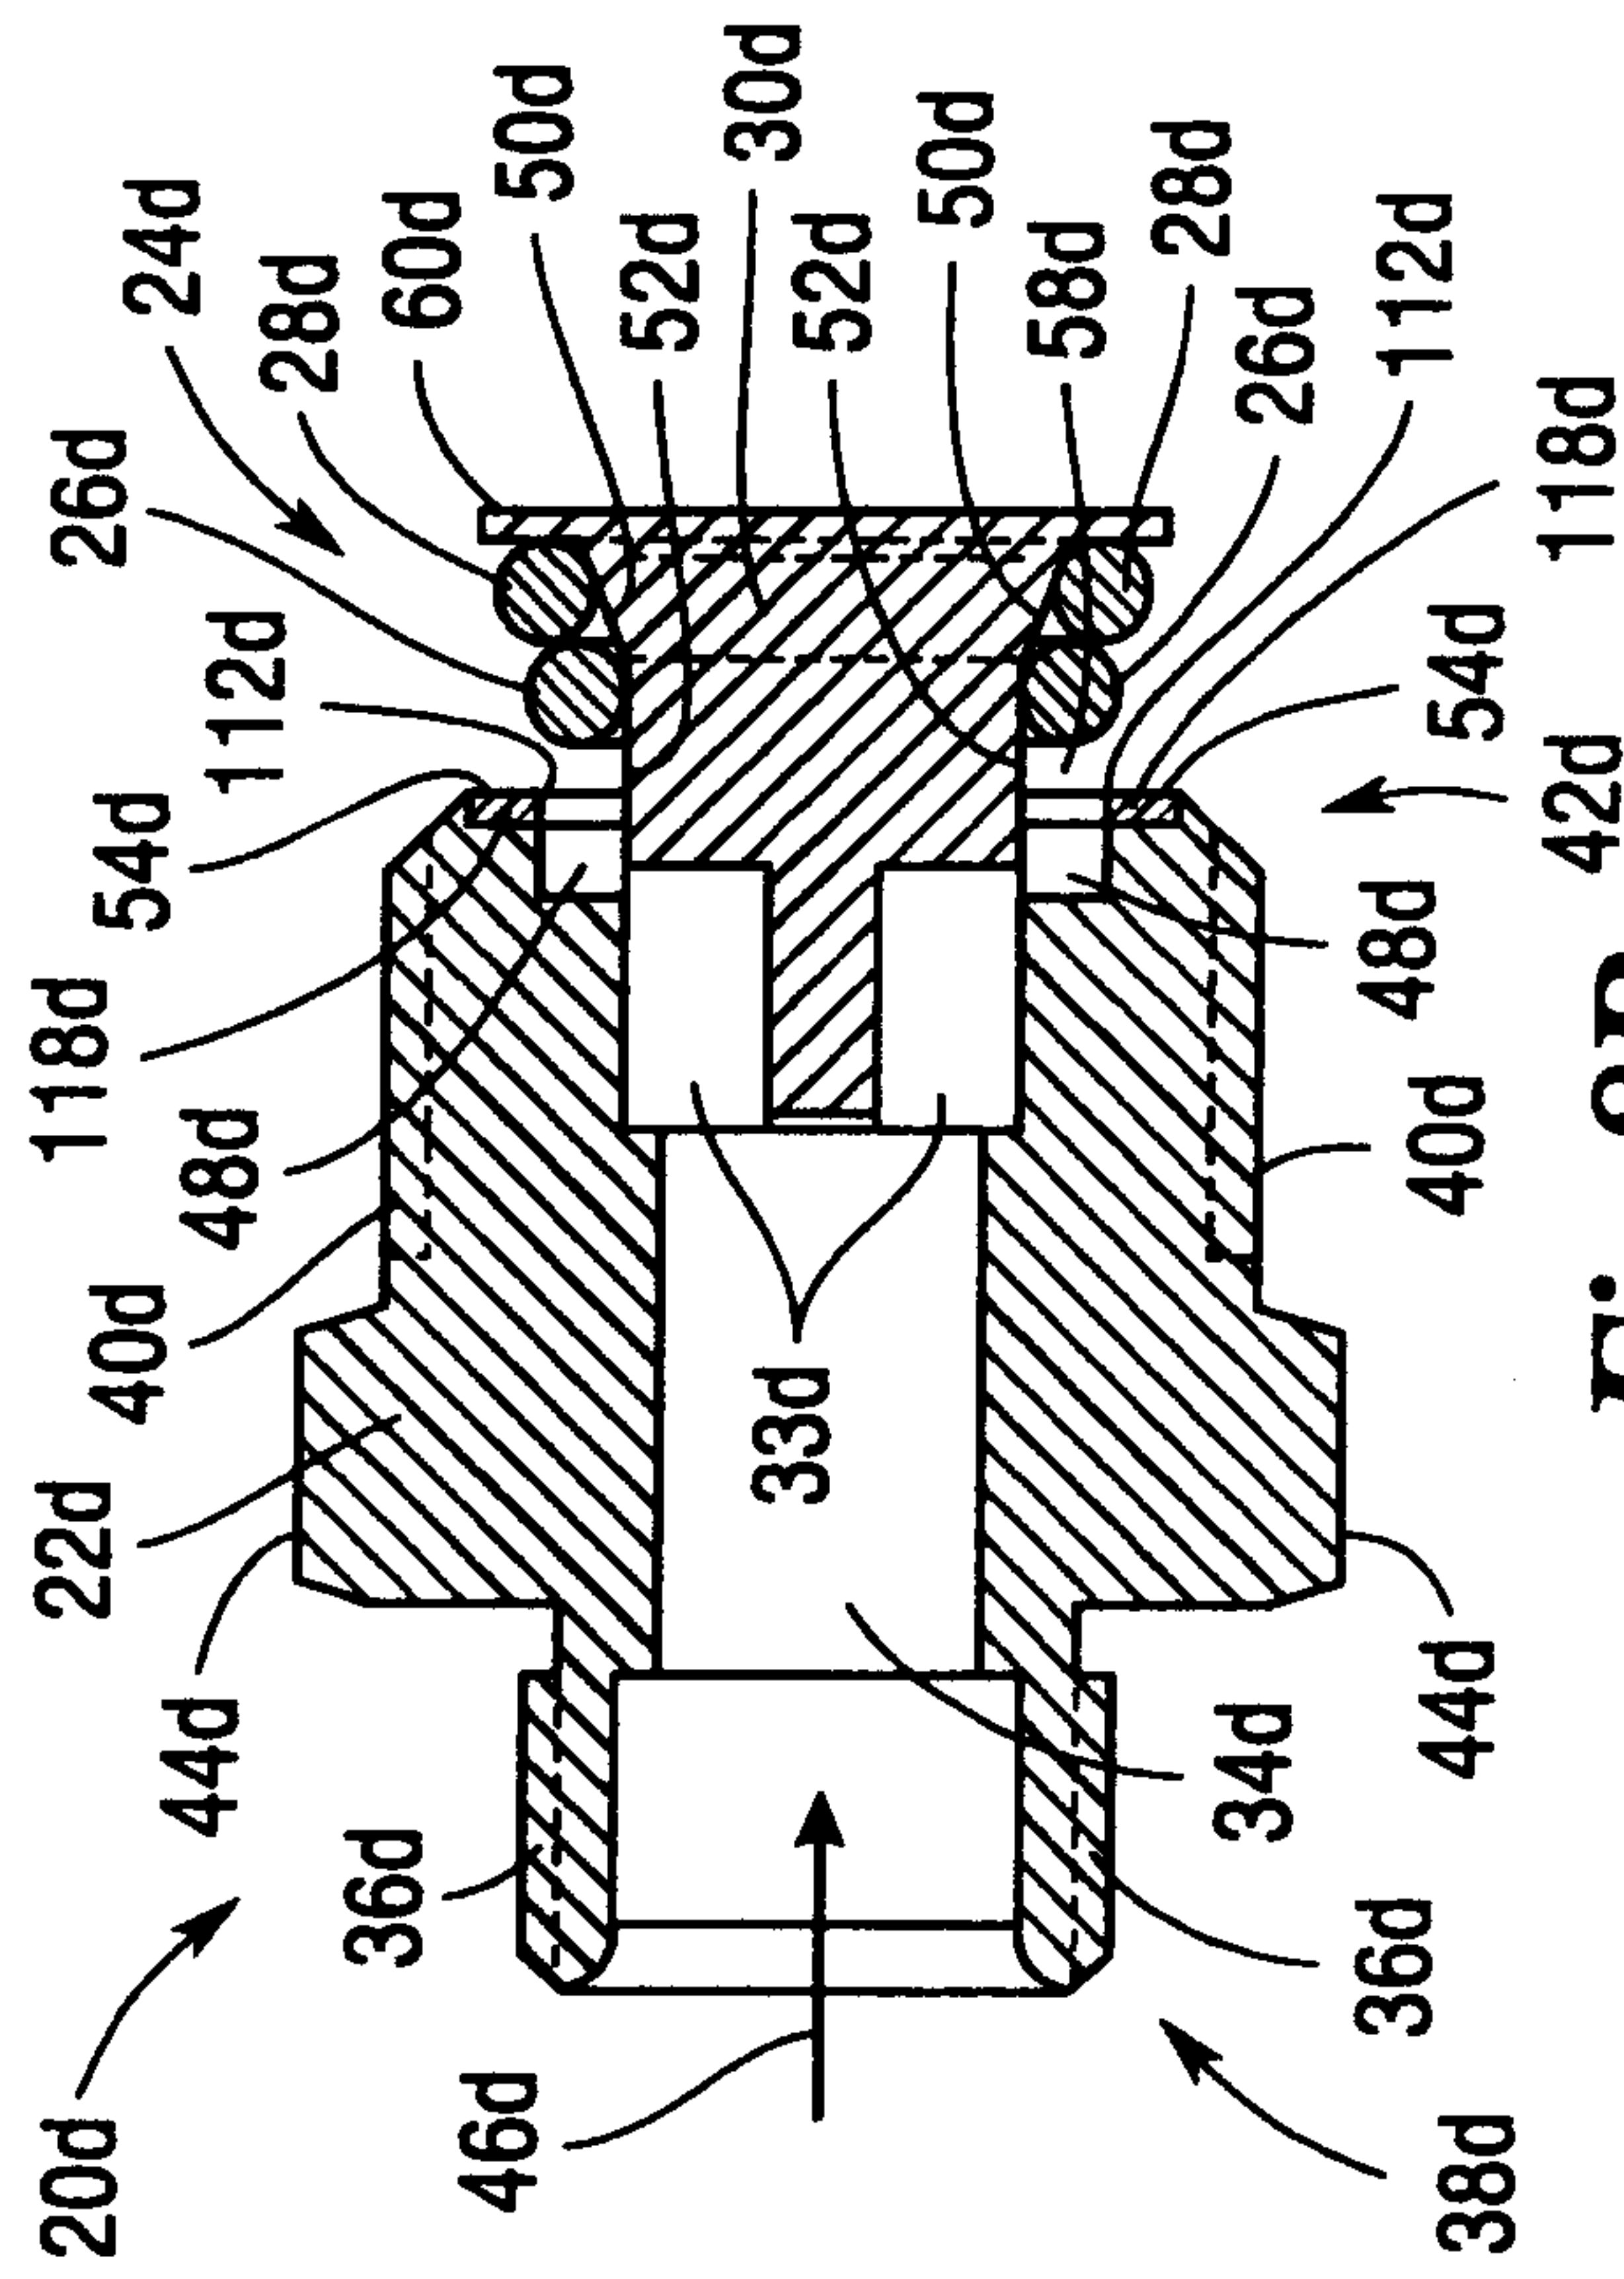


Fig. 8B

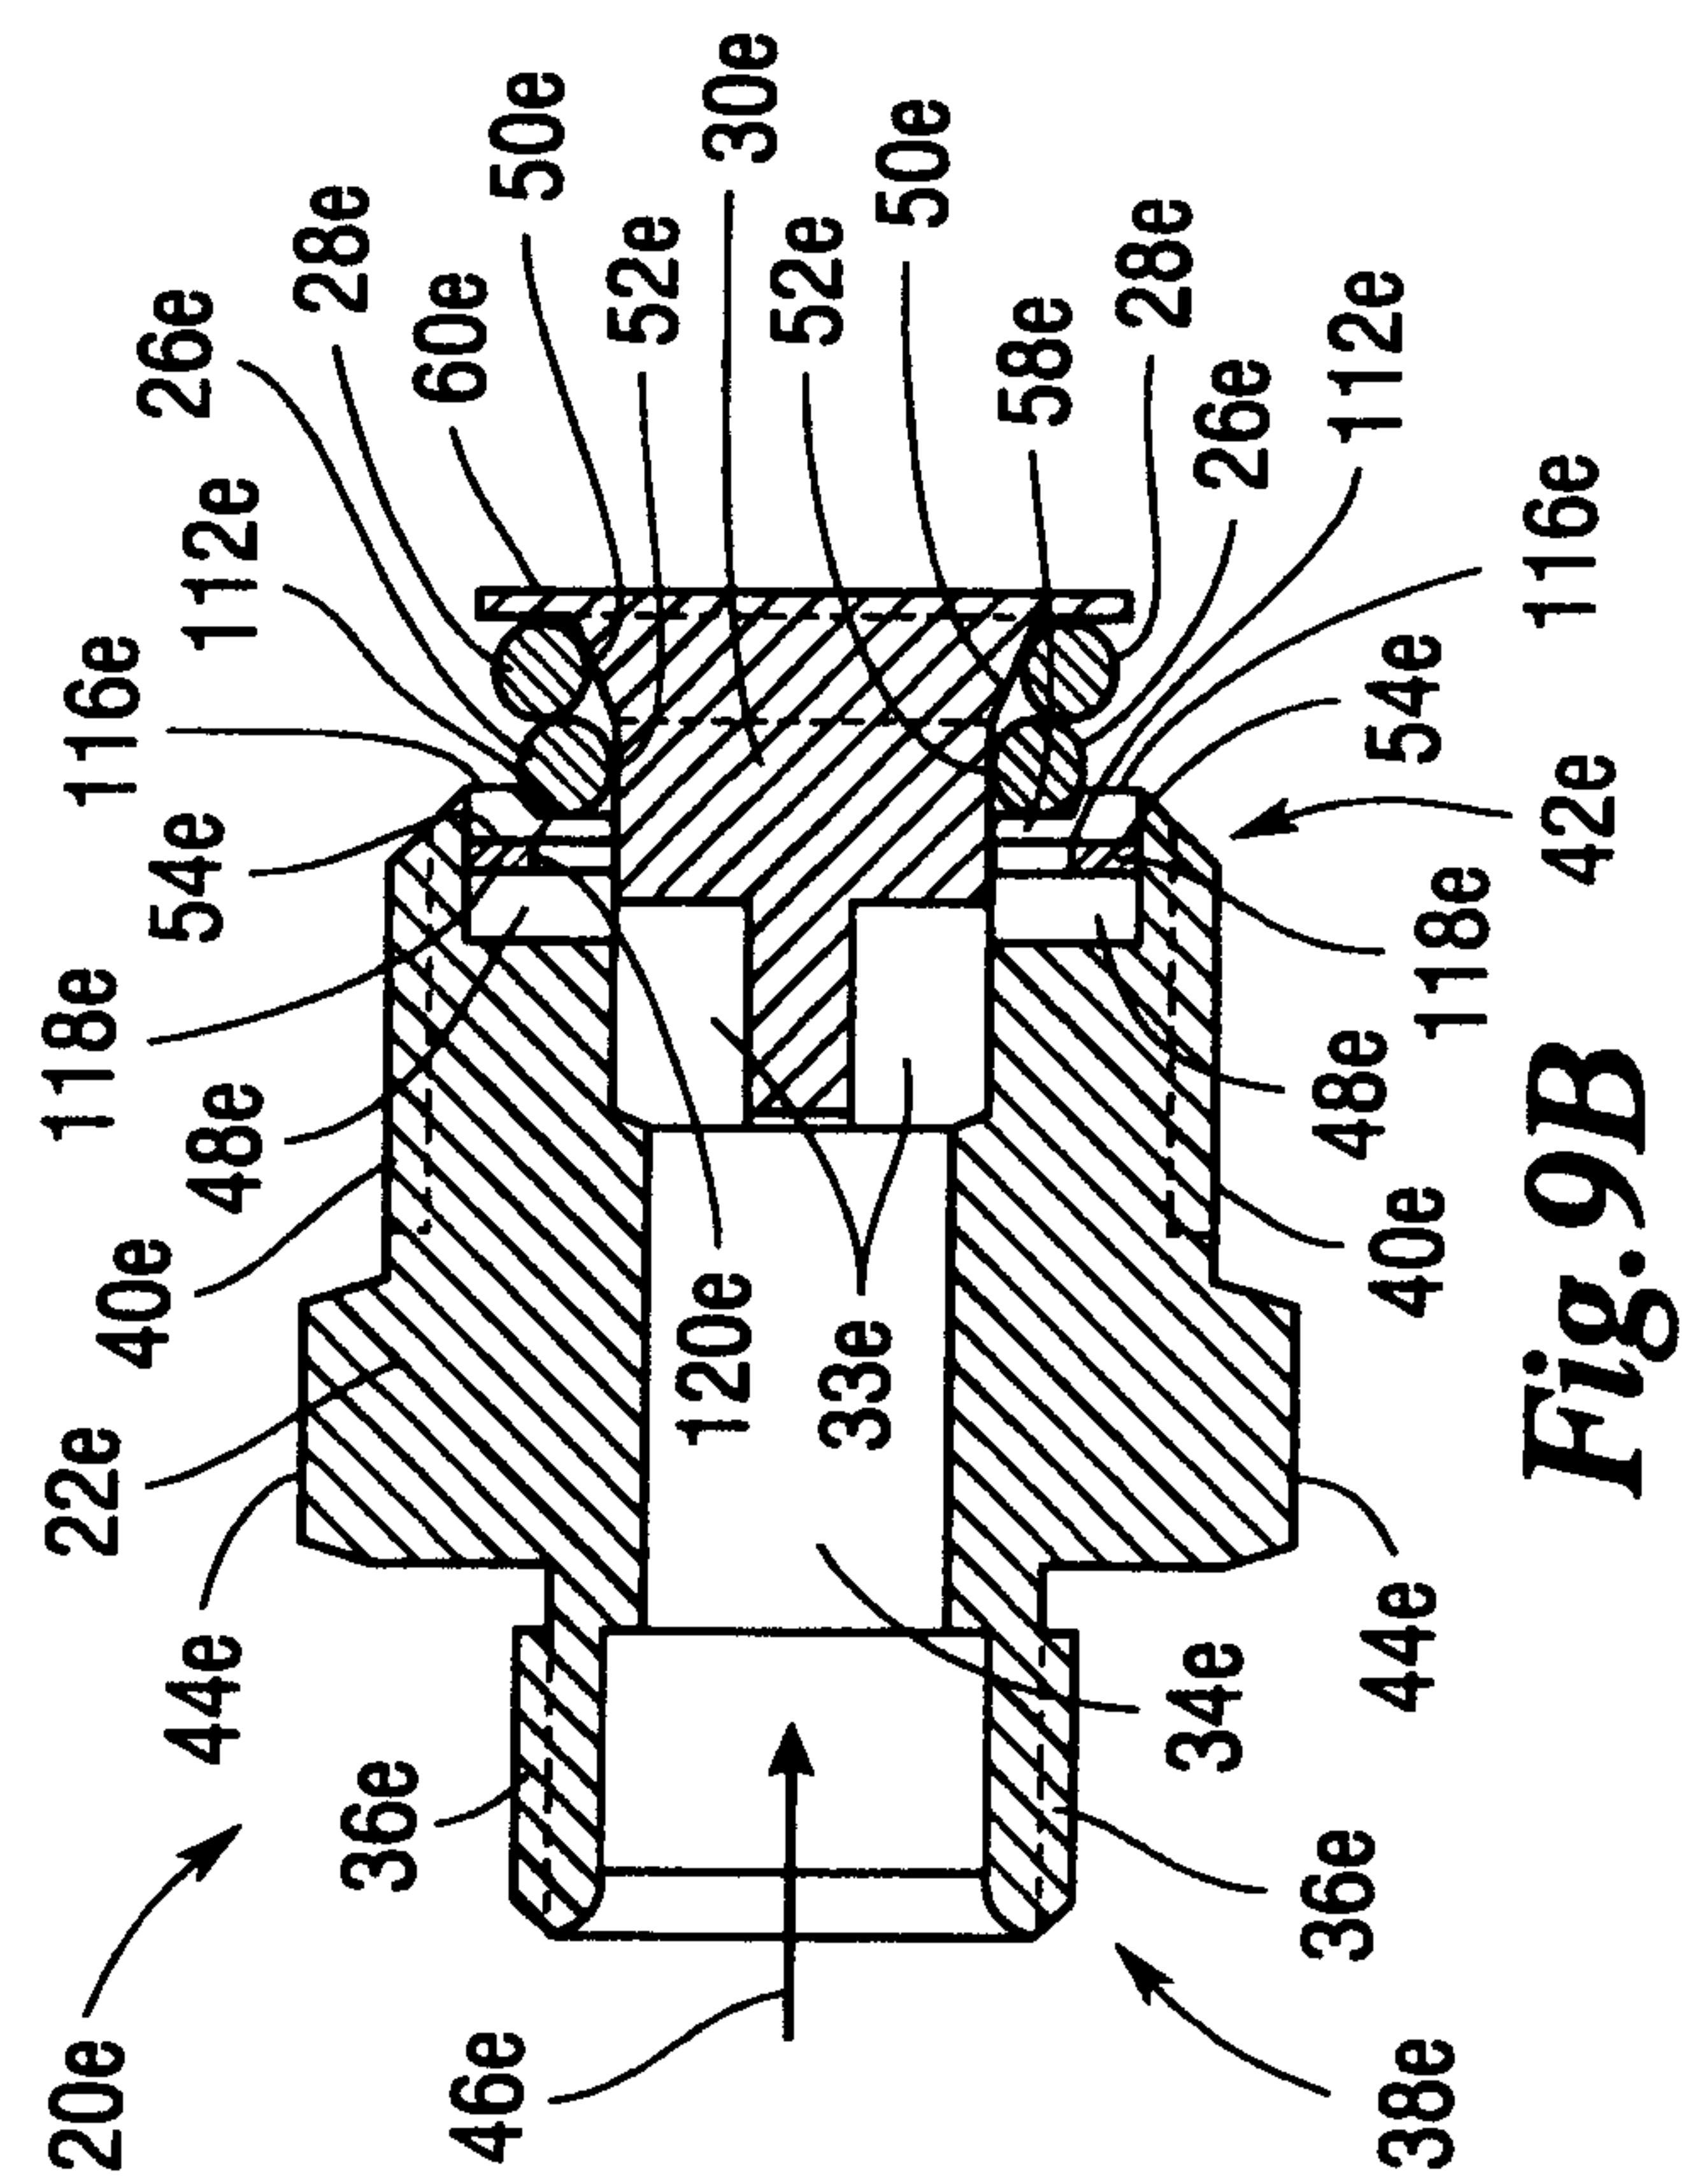


Fig. 9A

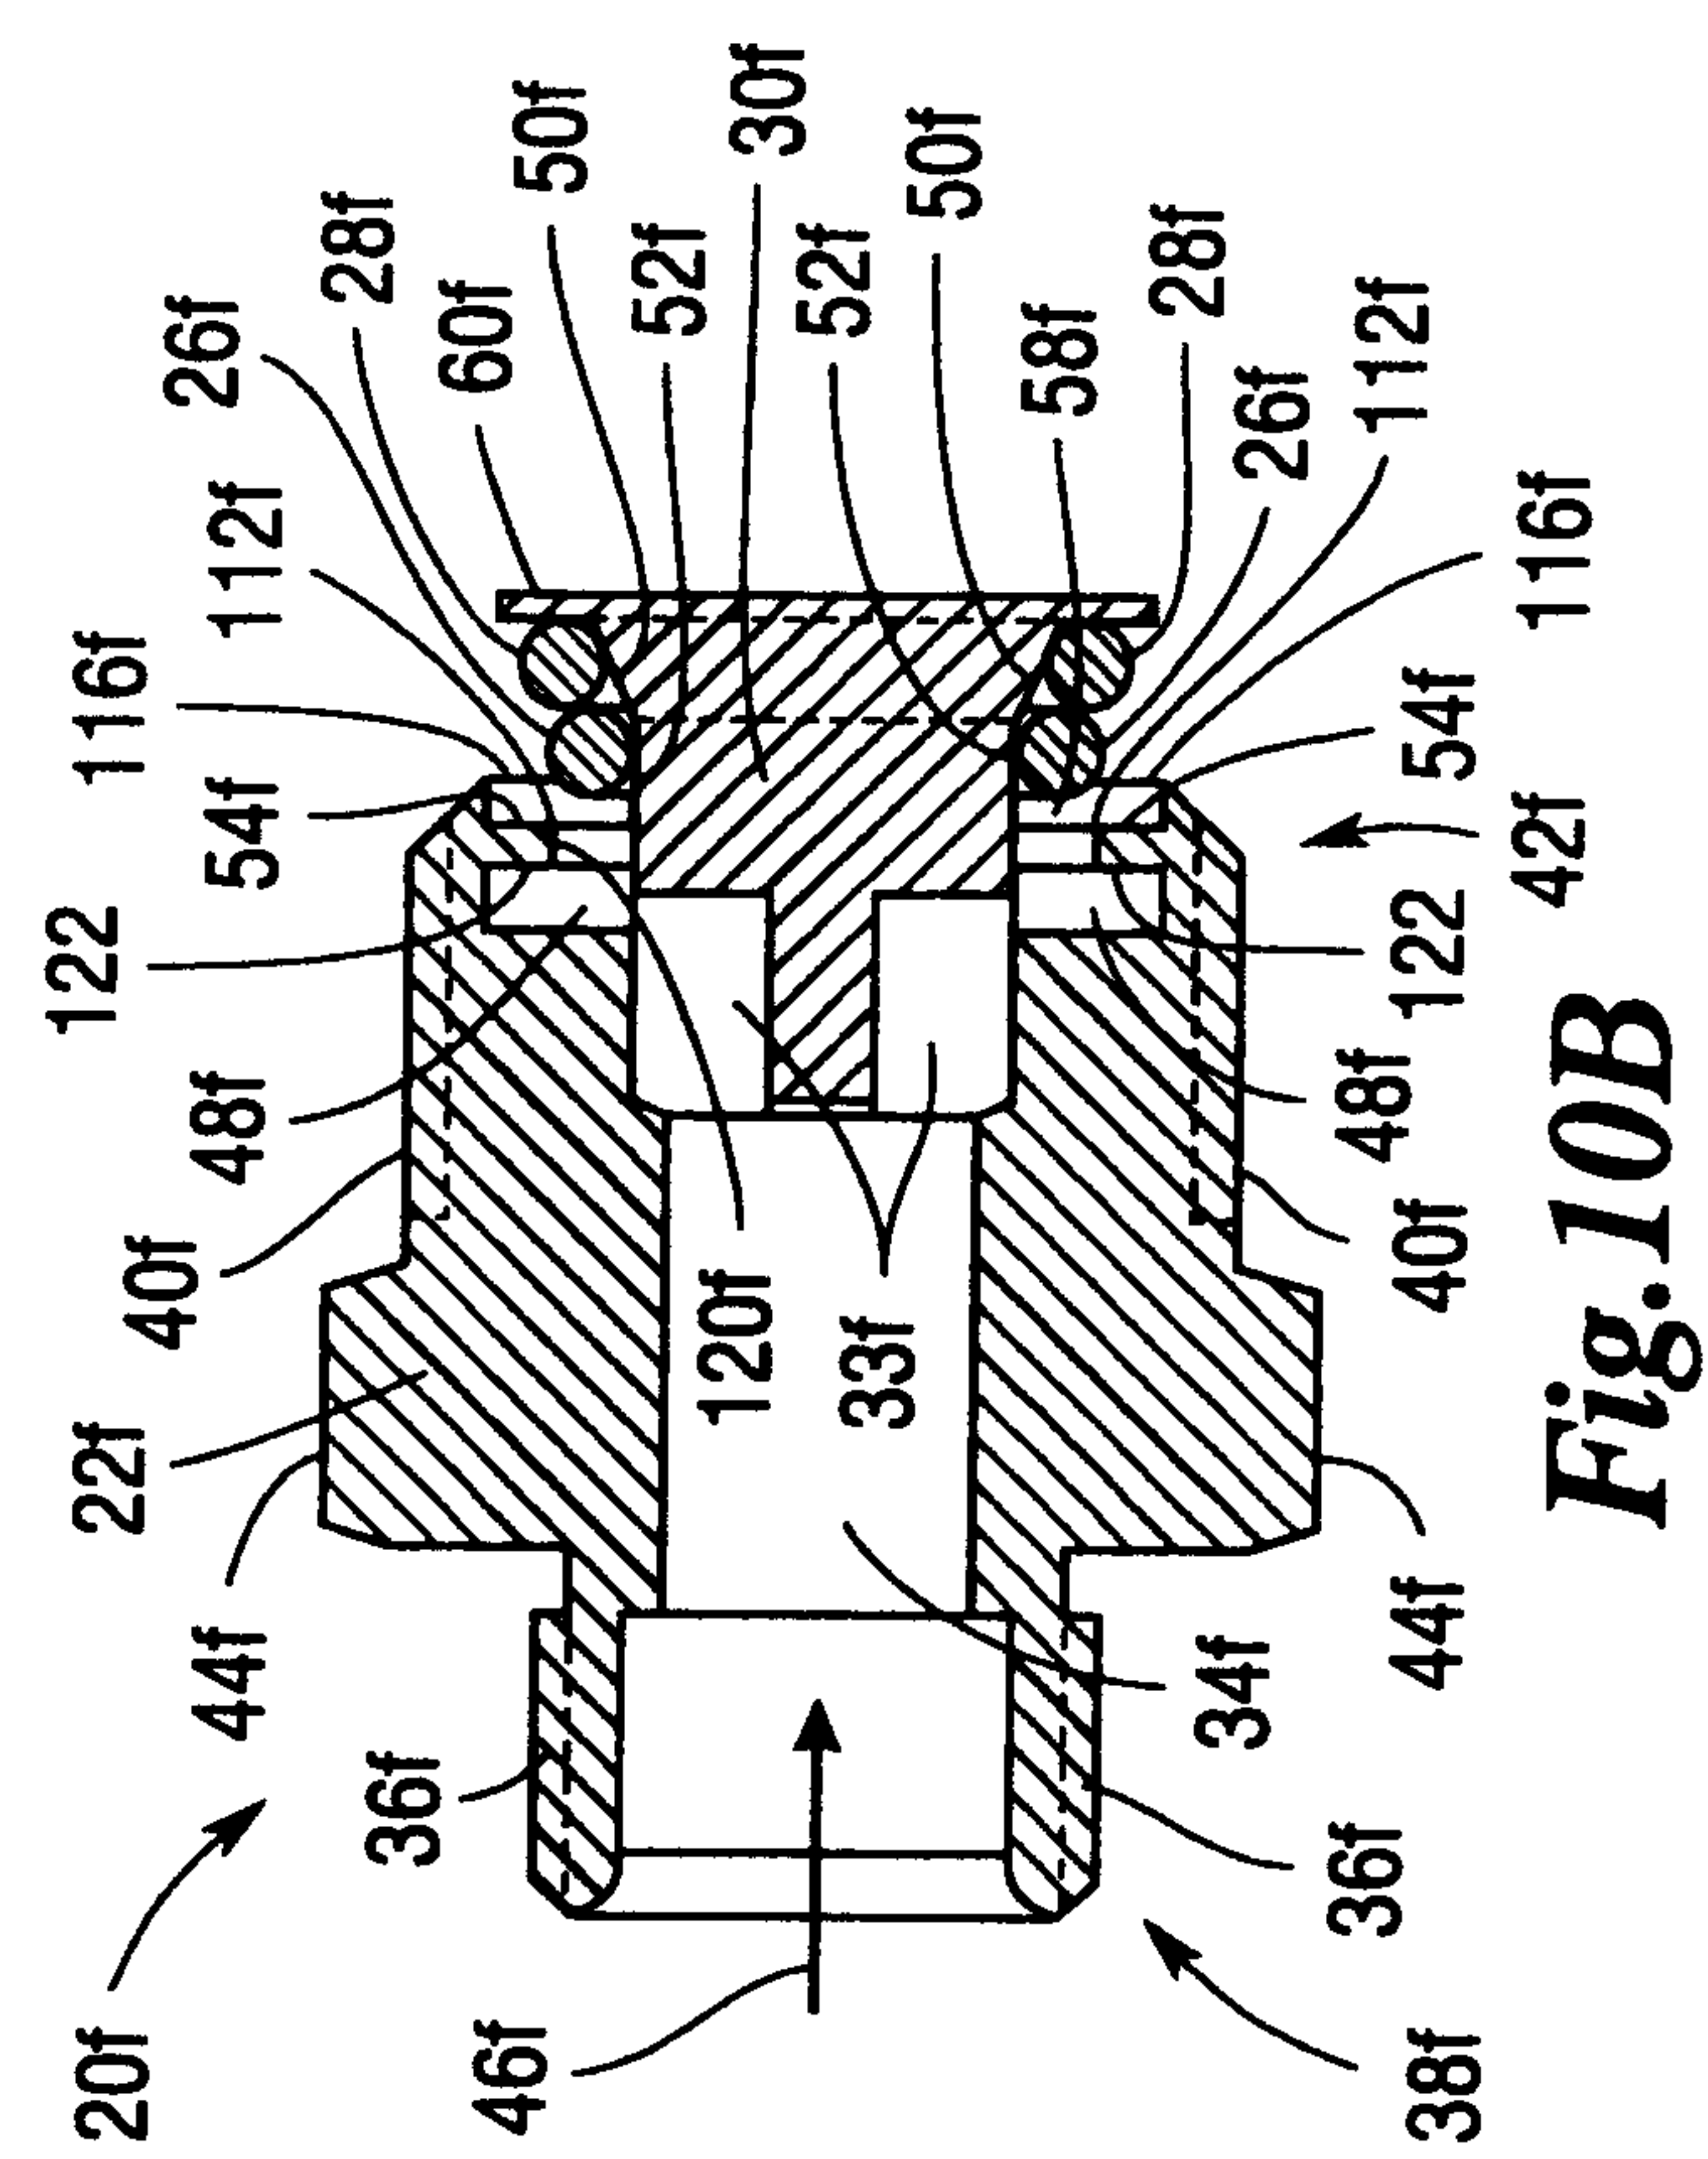


Fig. 10A

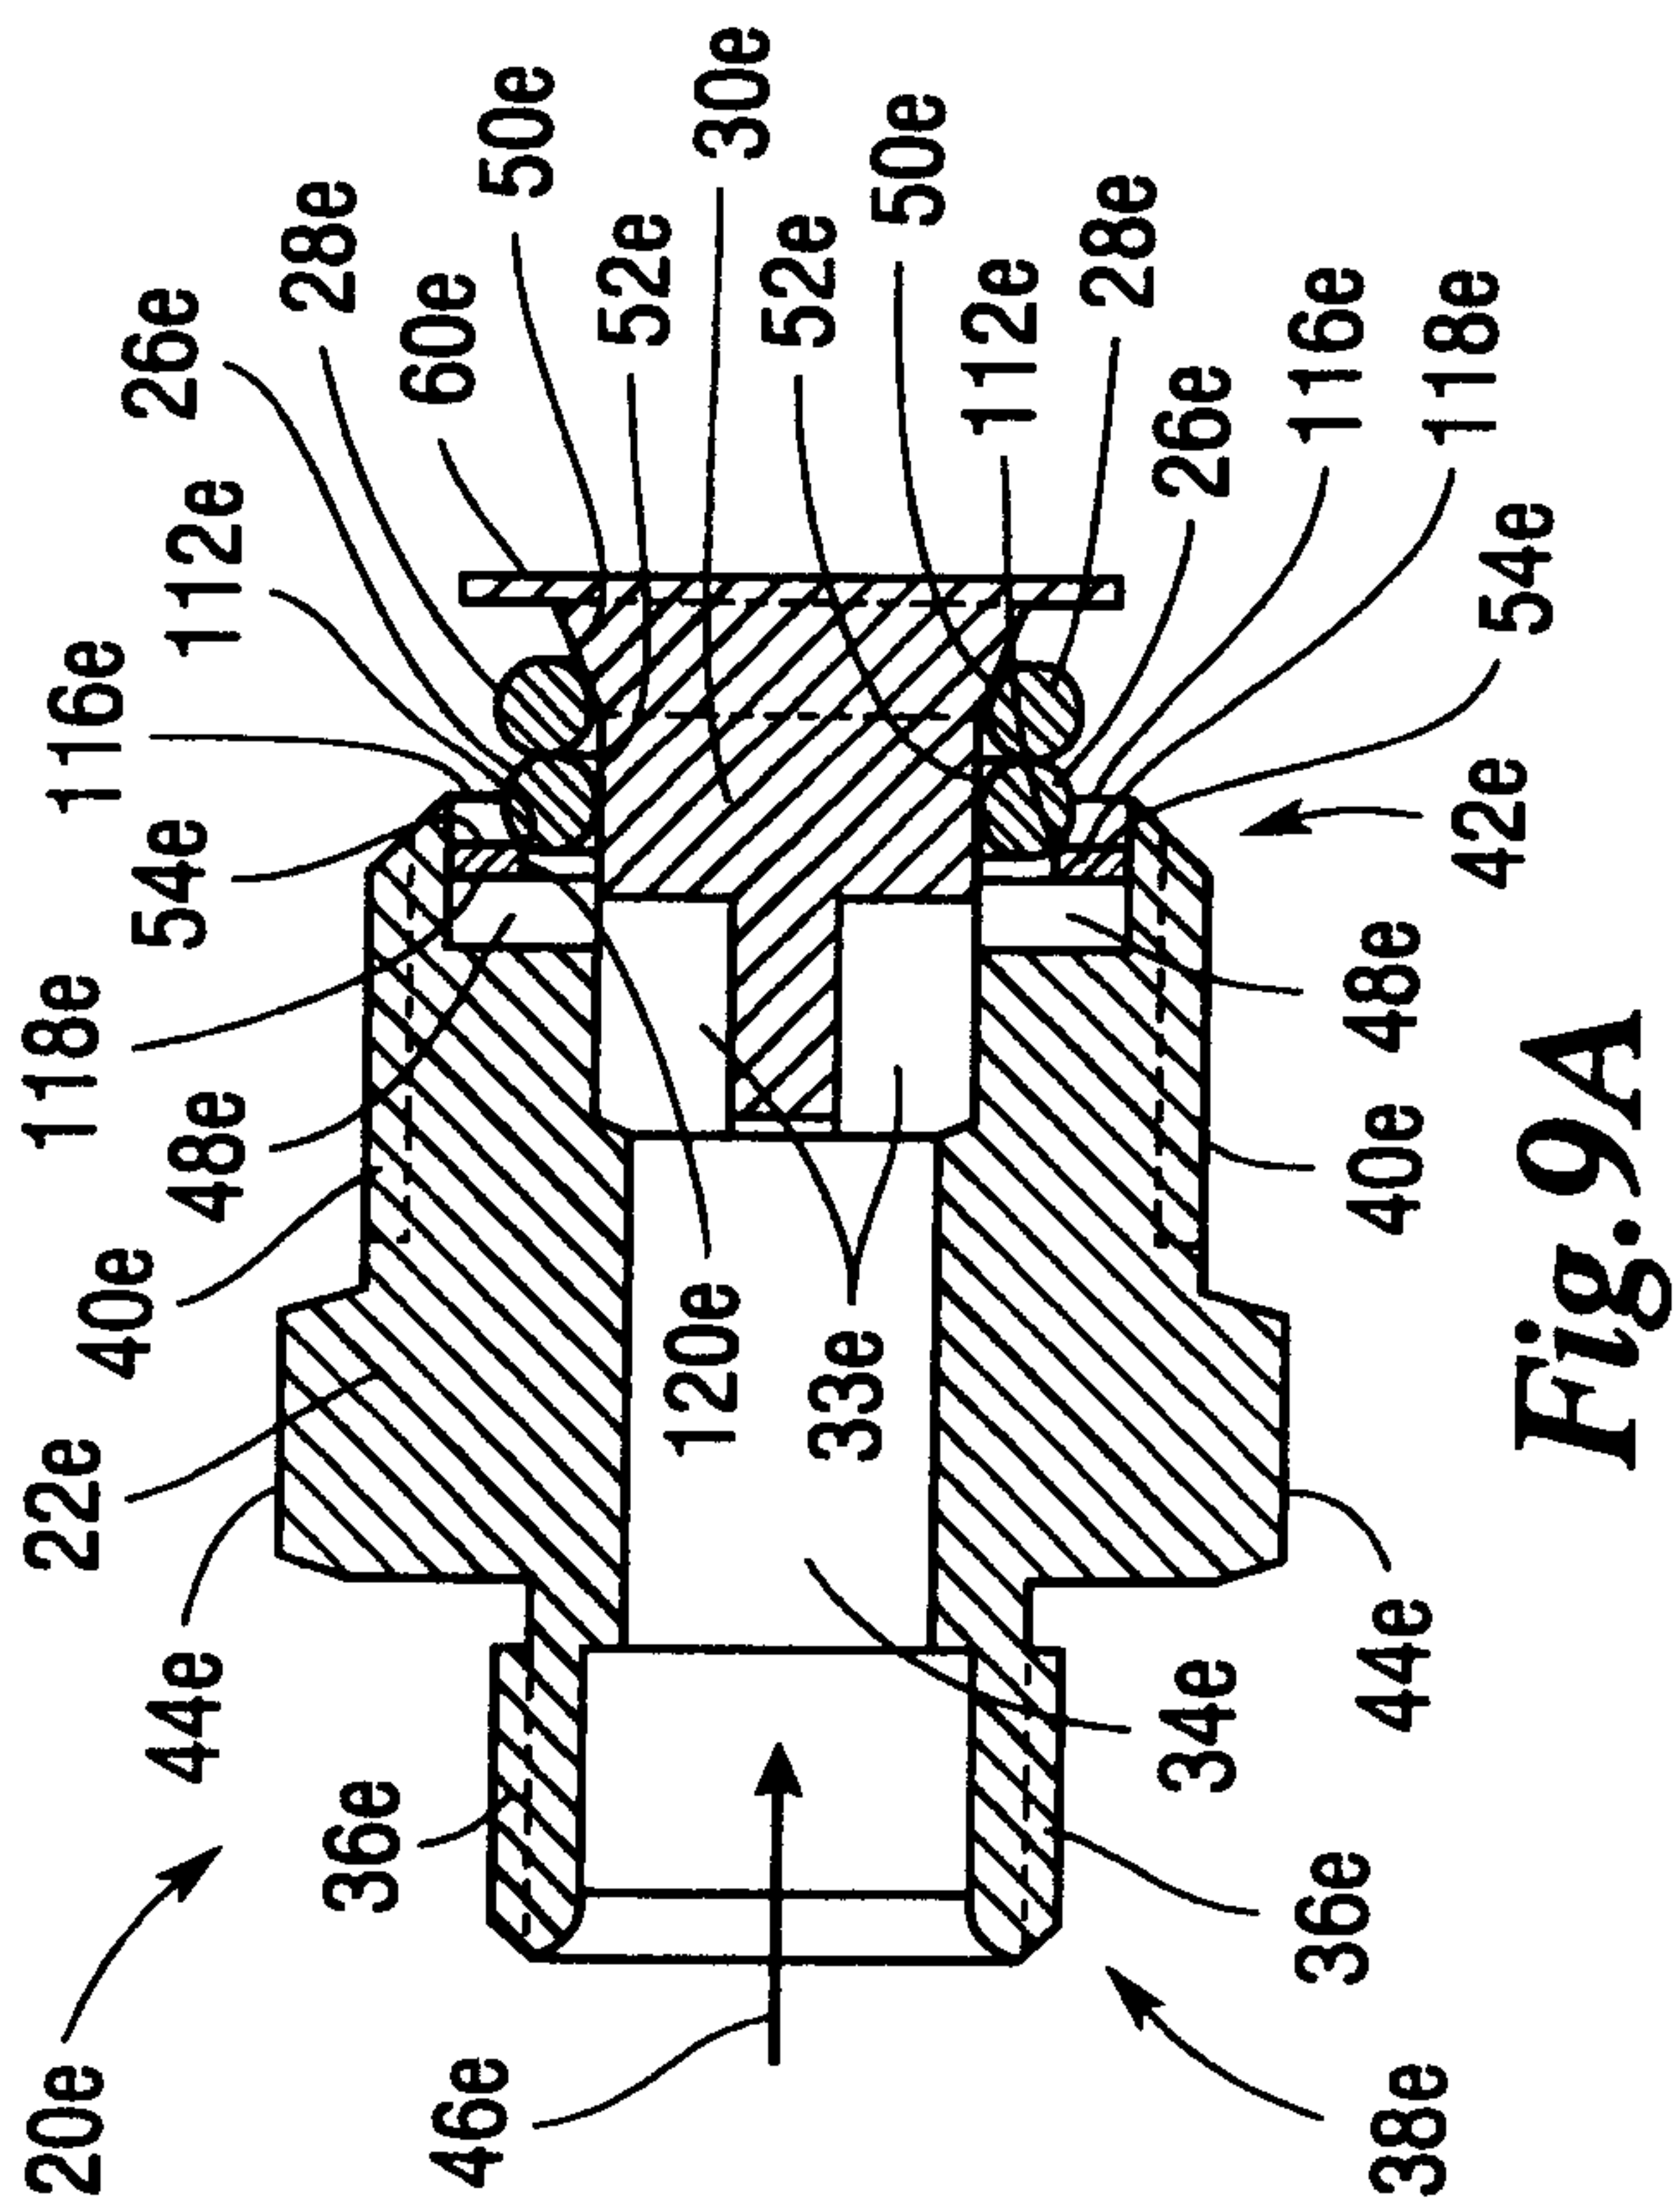


Fig. 9B

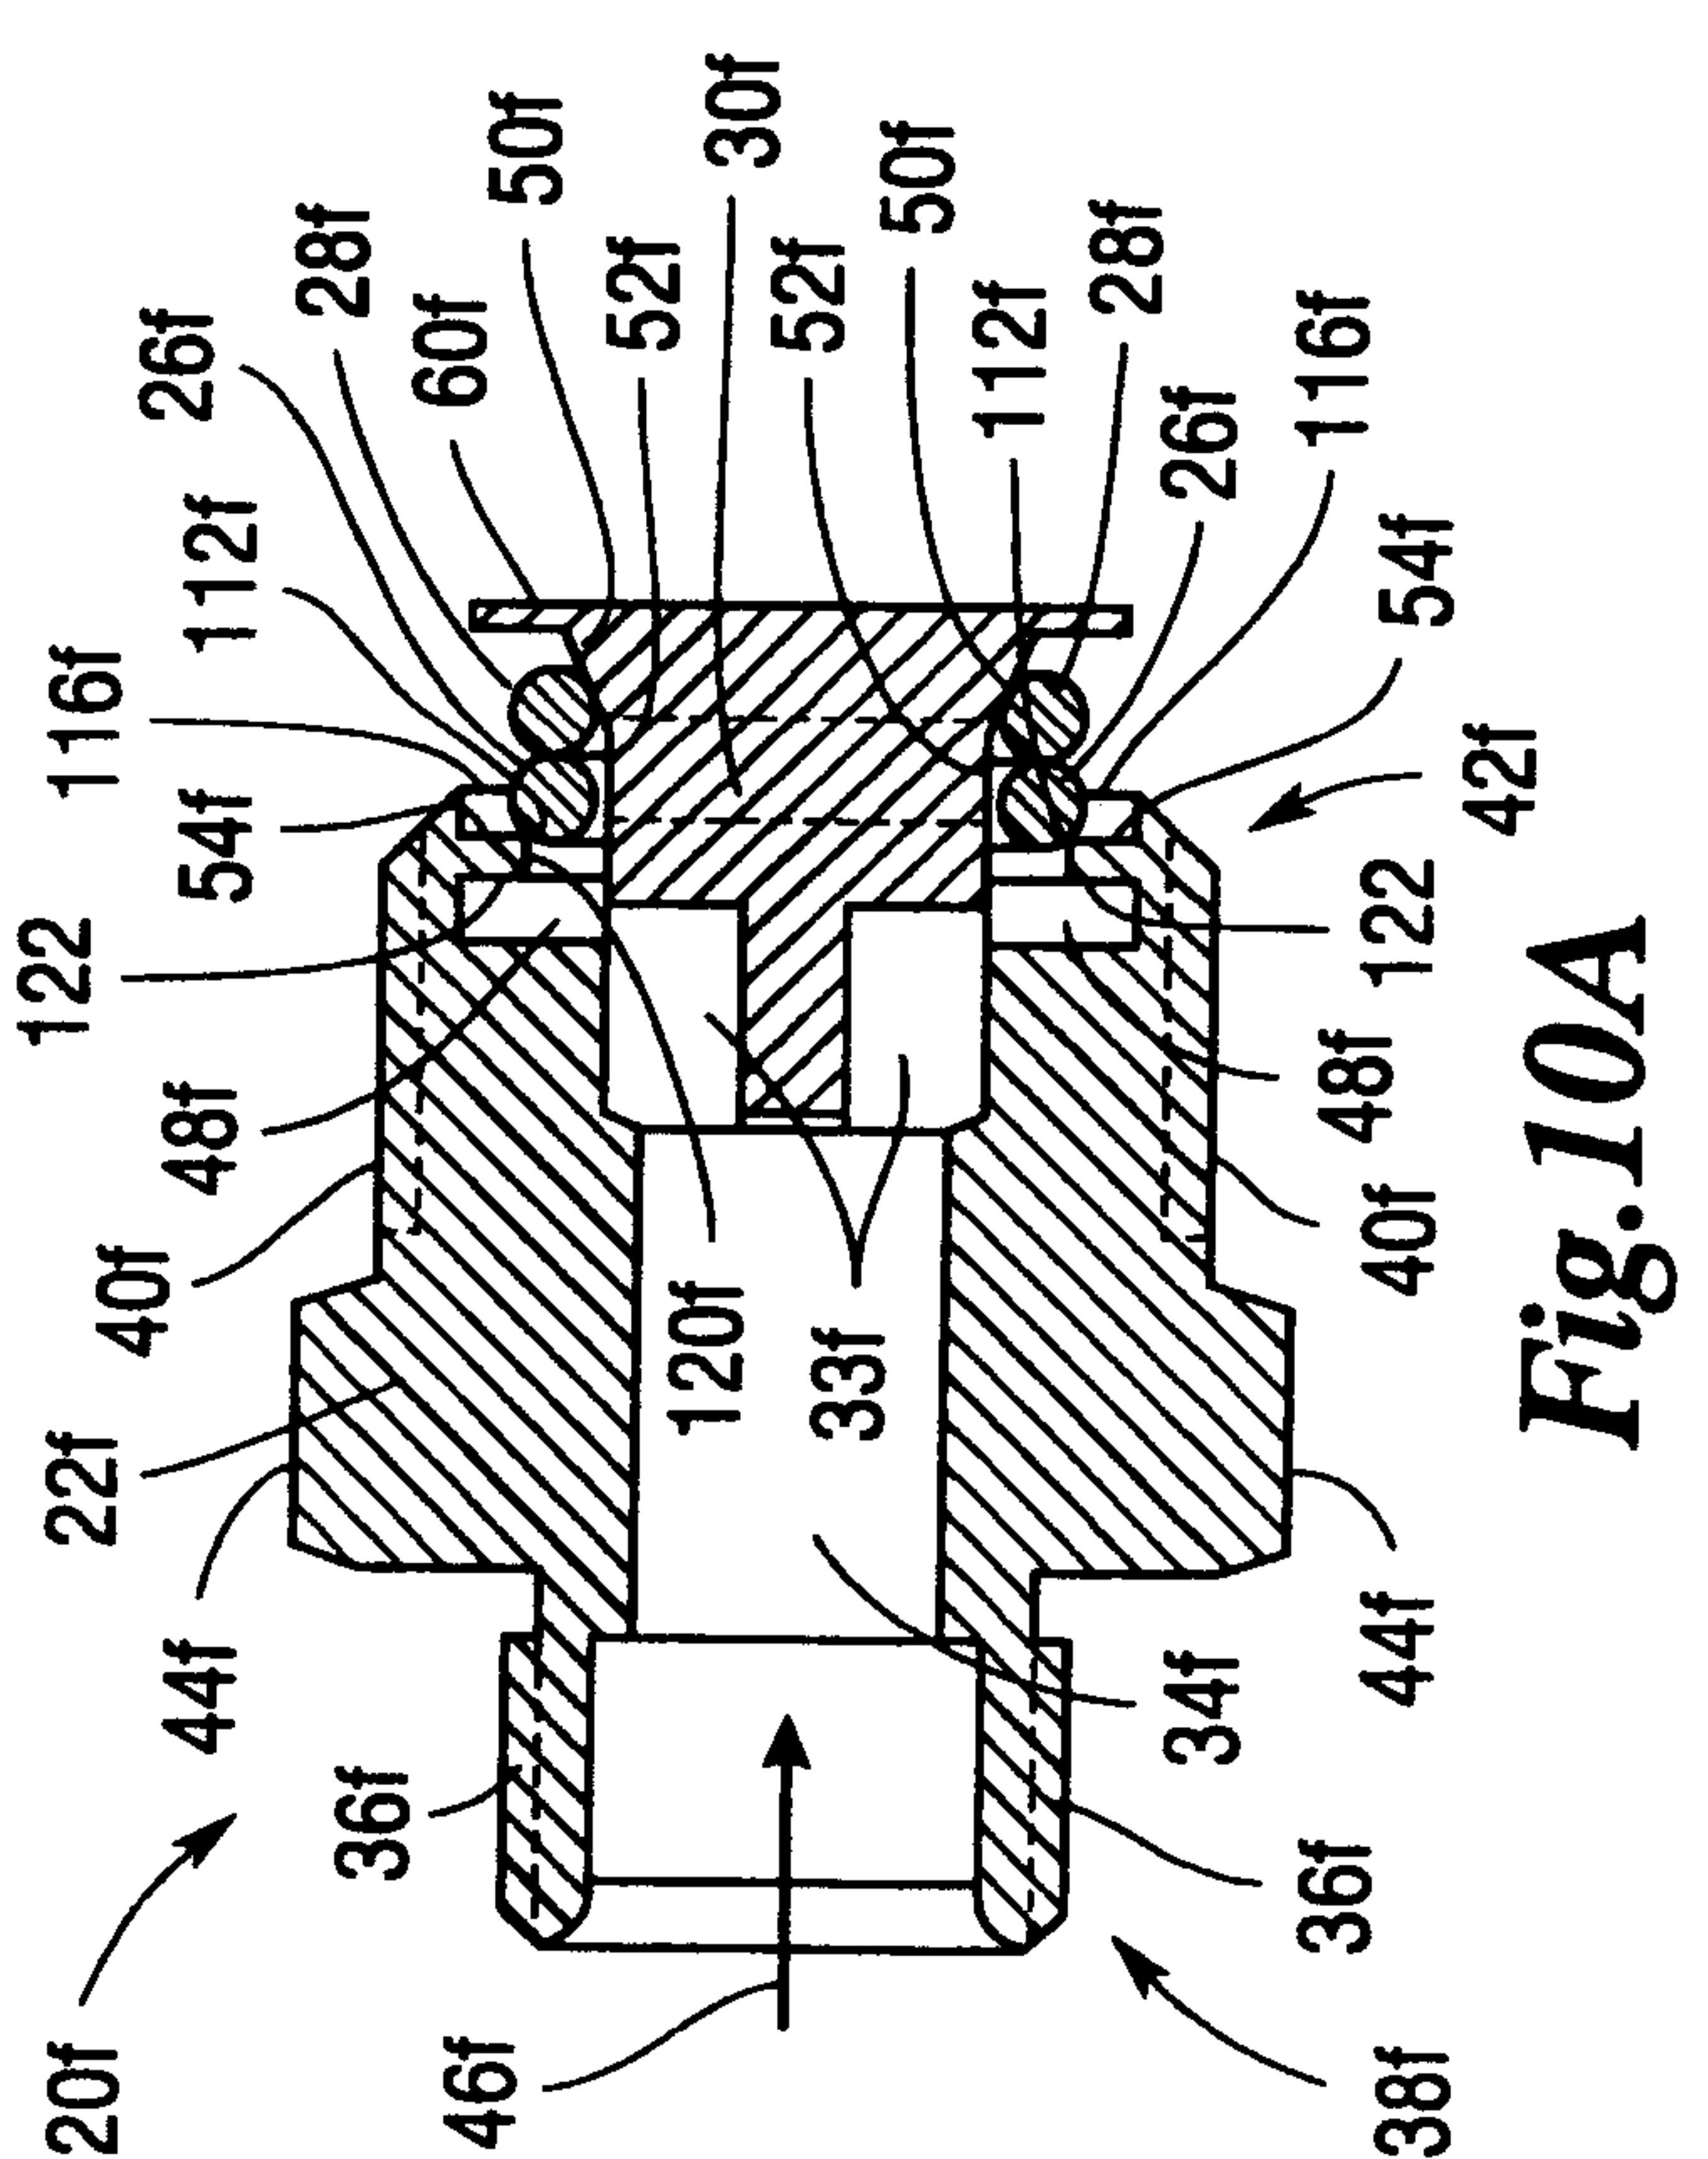


Fig. 10B

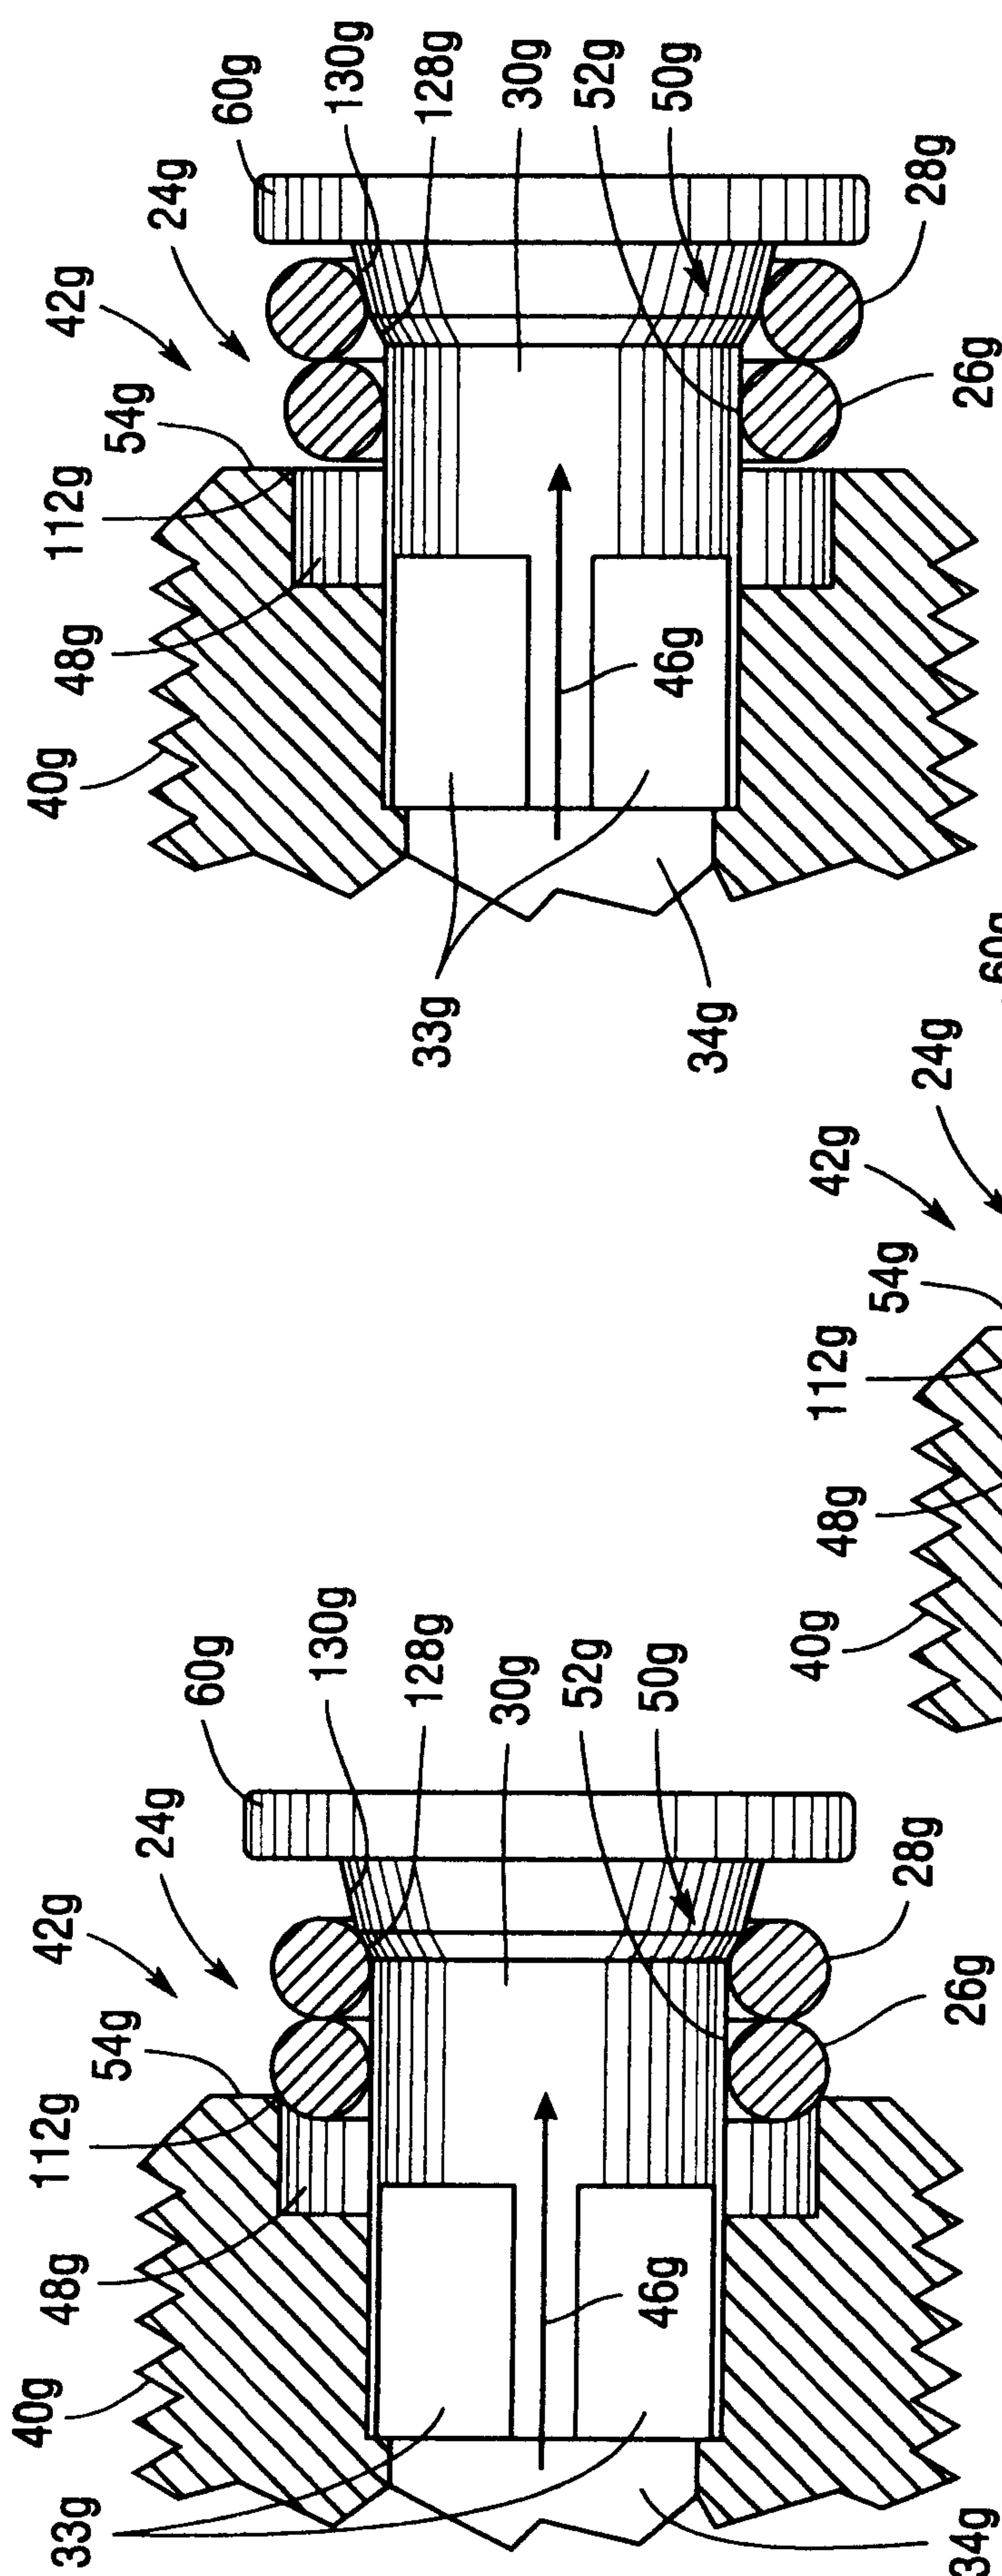


Fig. 11A

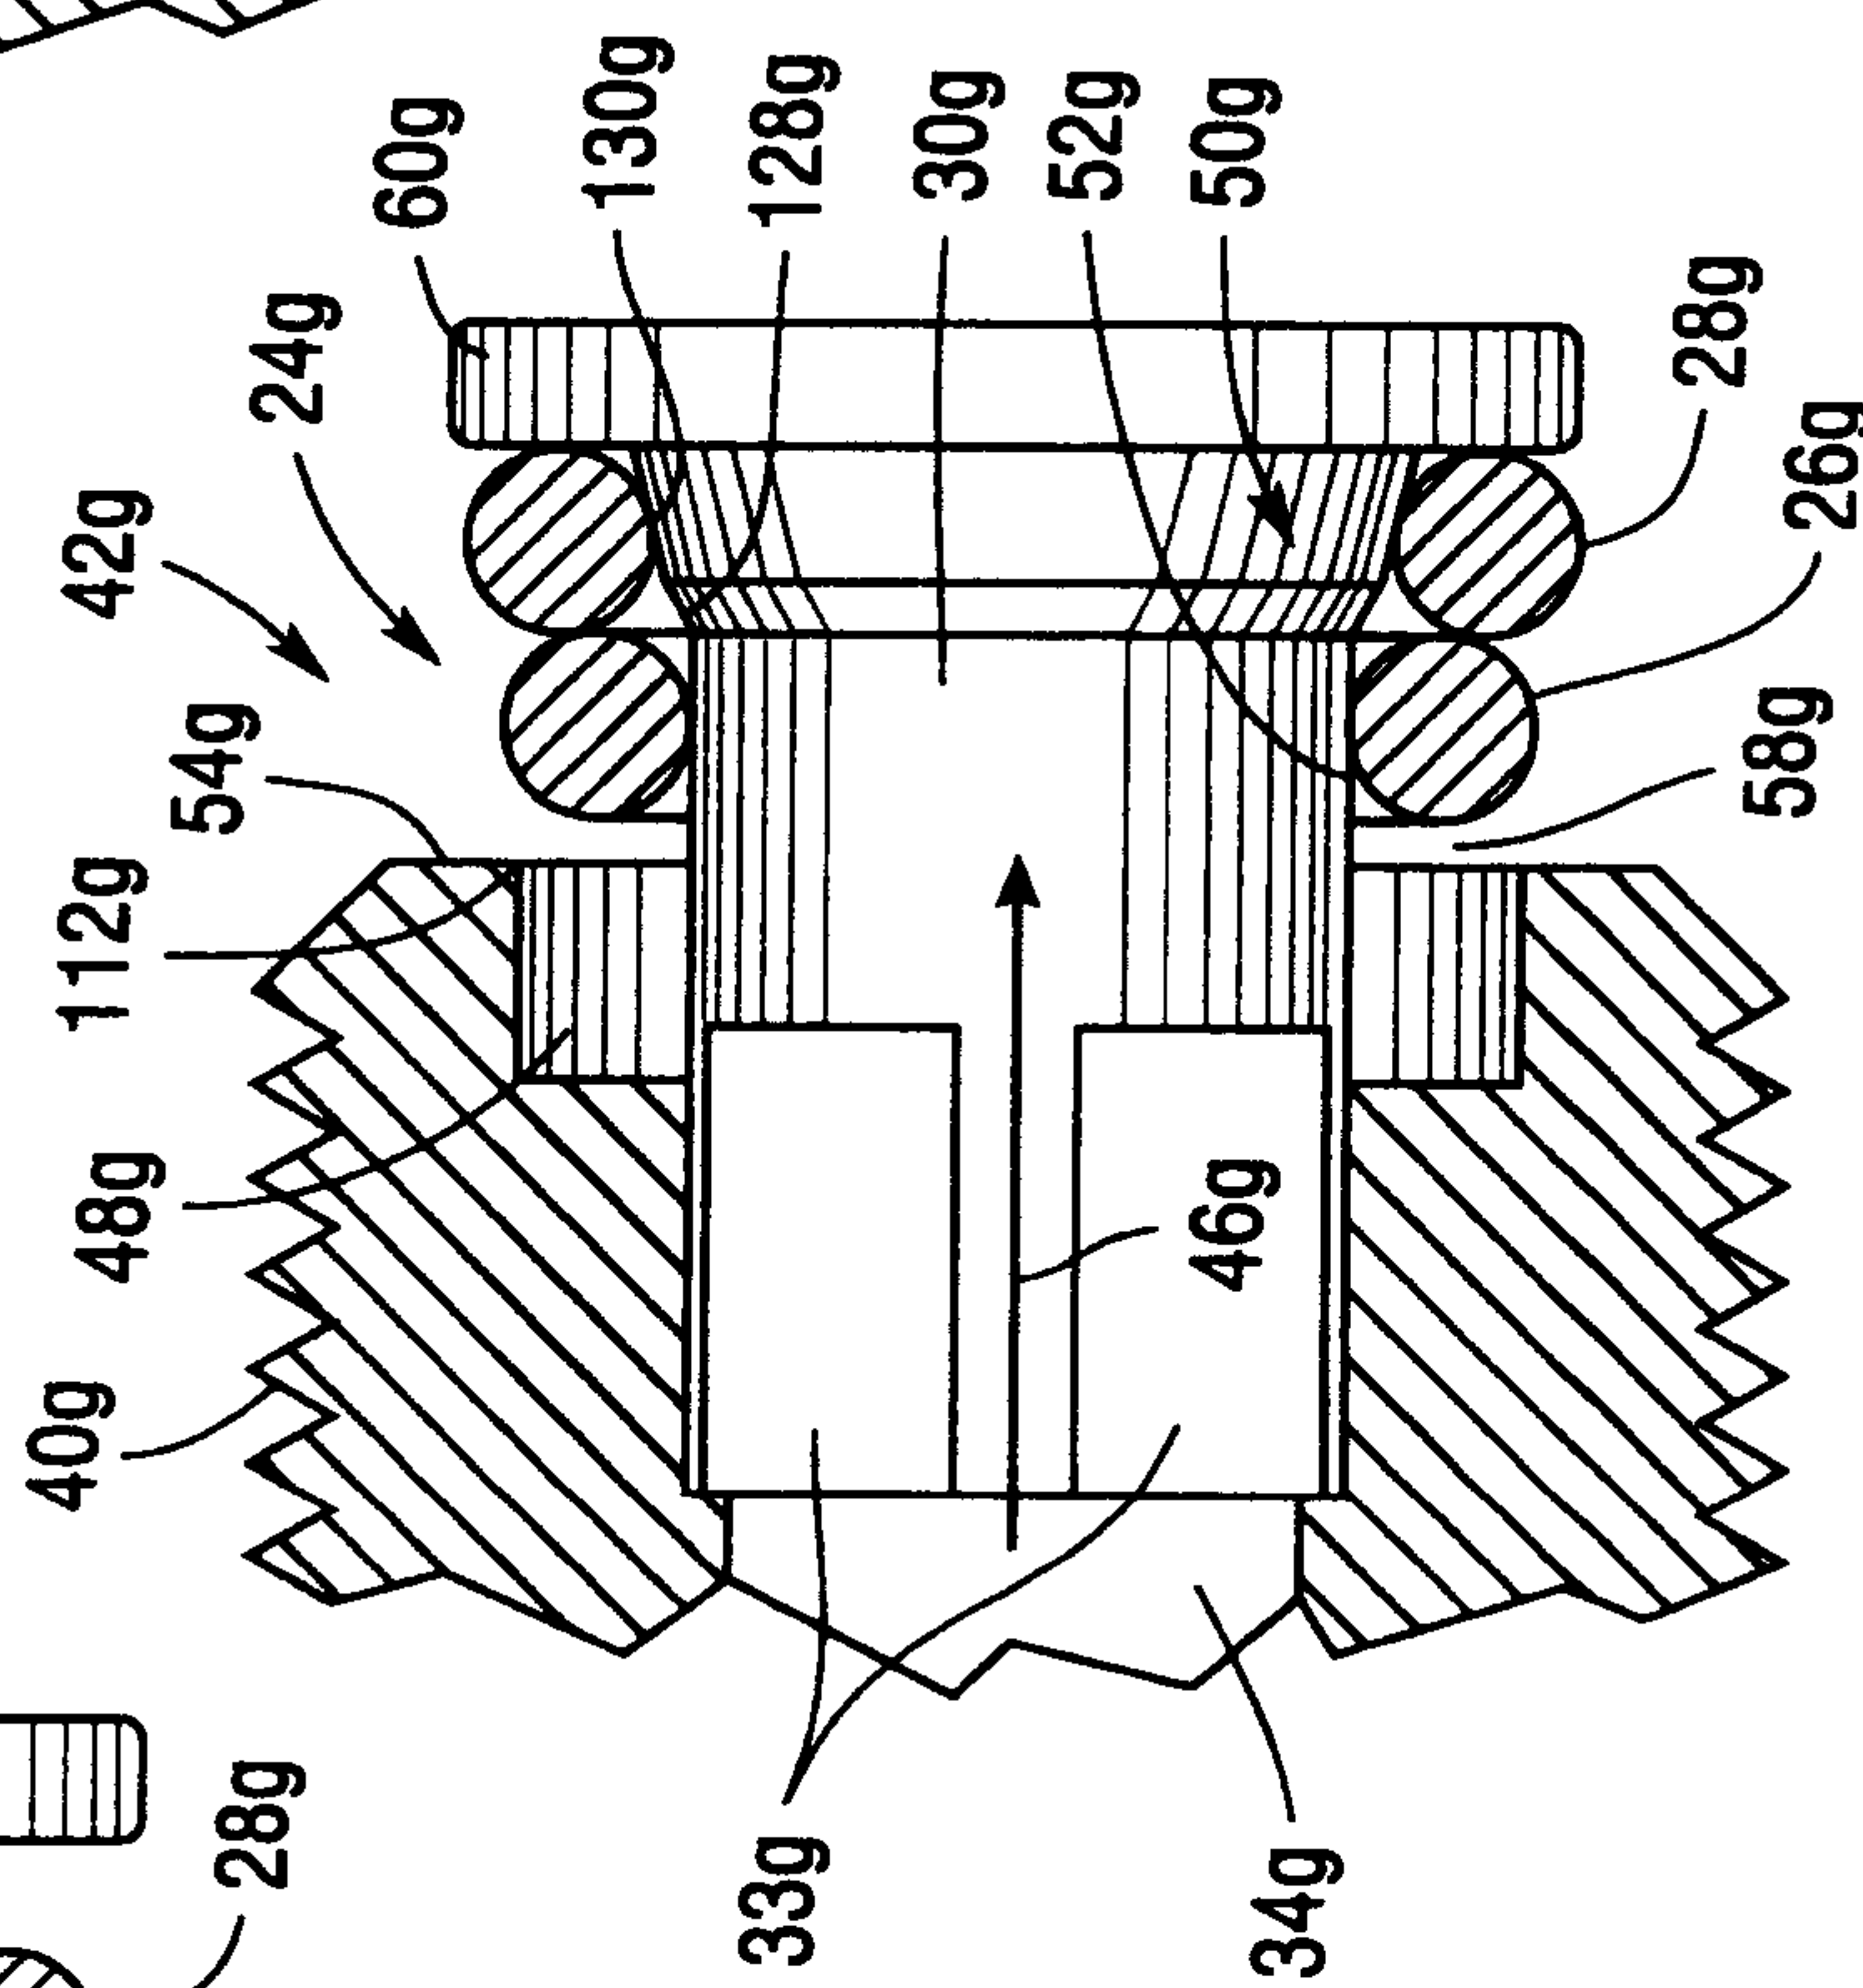


Fig. 11B

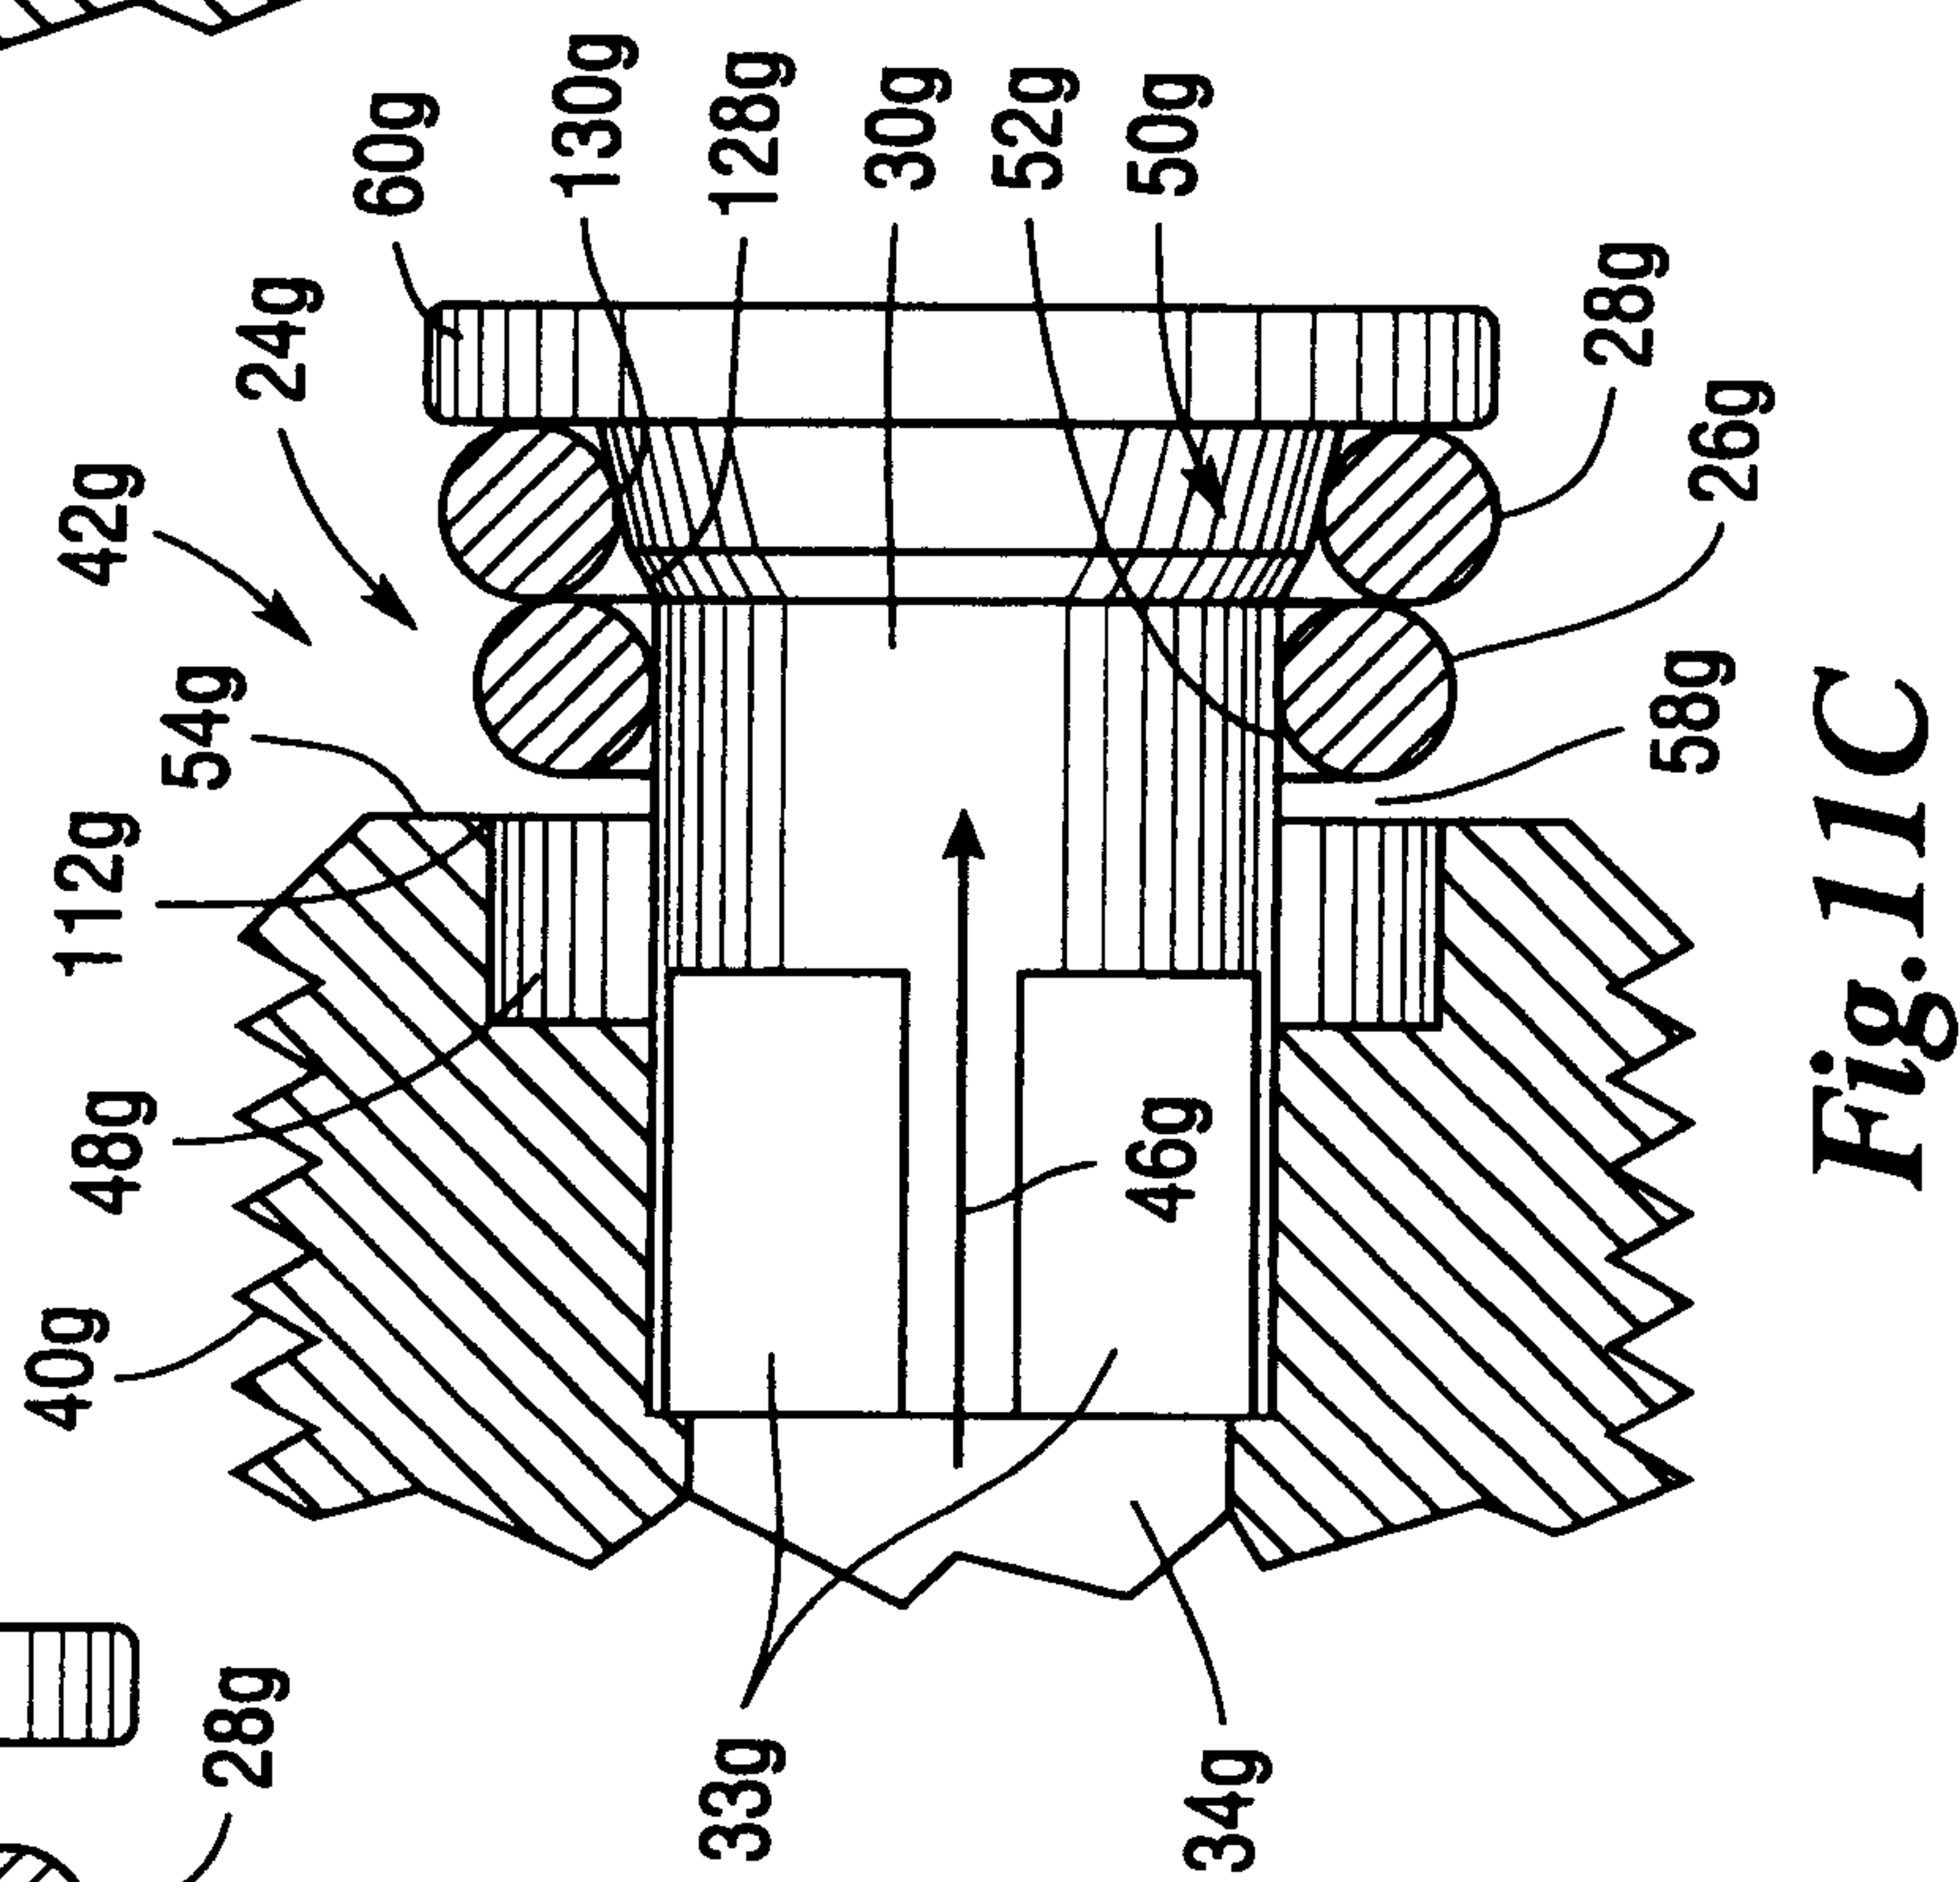


Fig. 11C

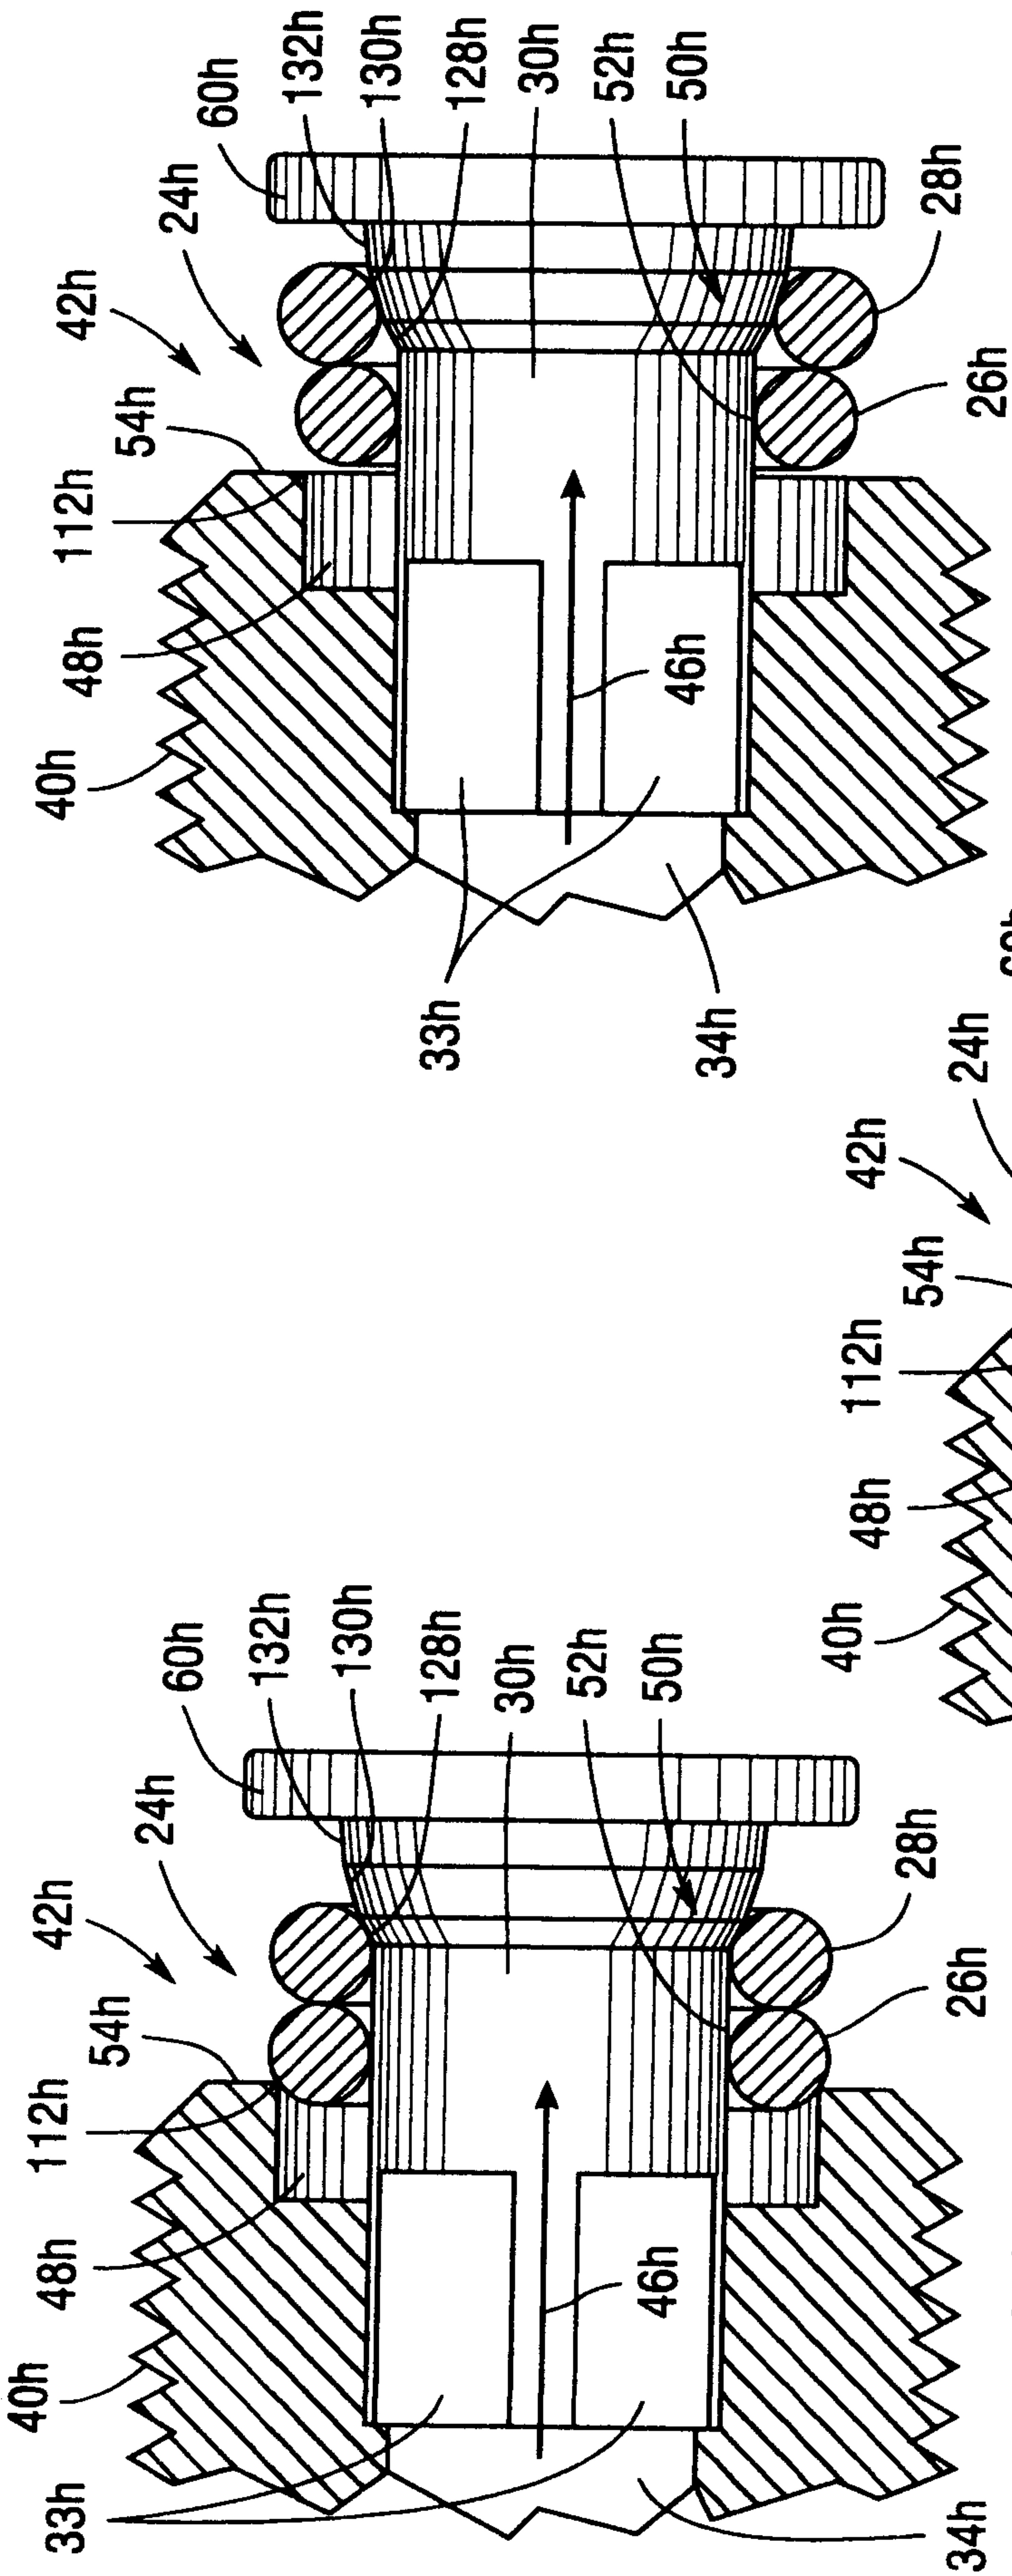


Fig. 12A

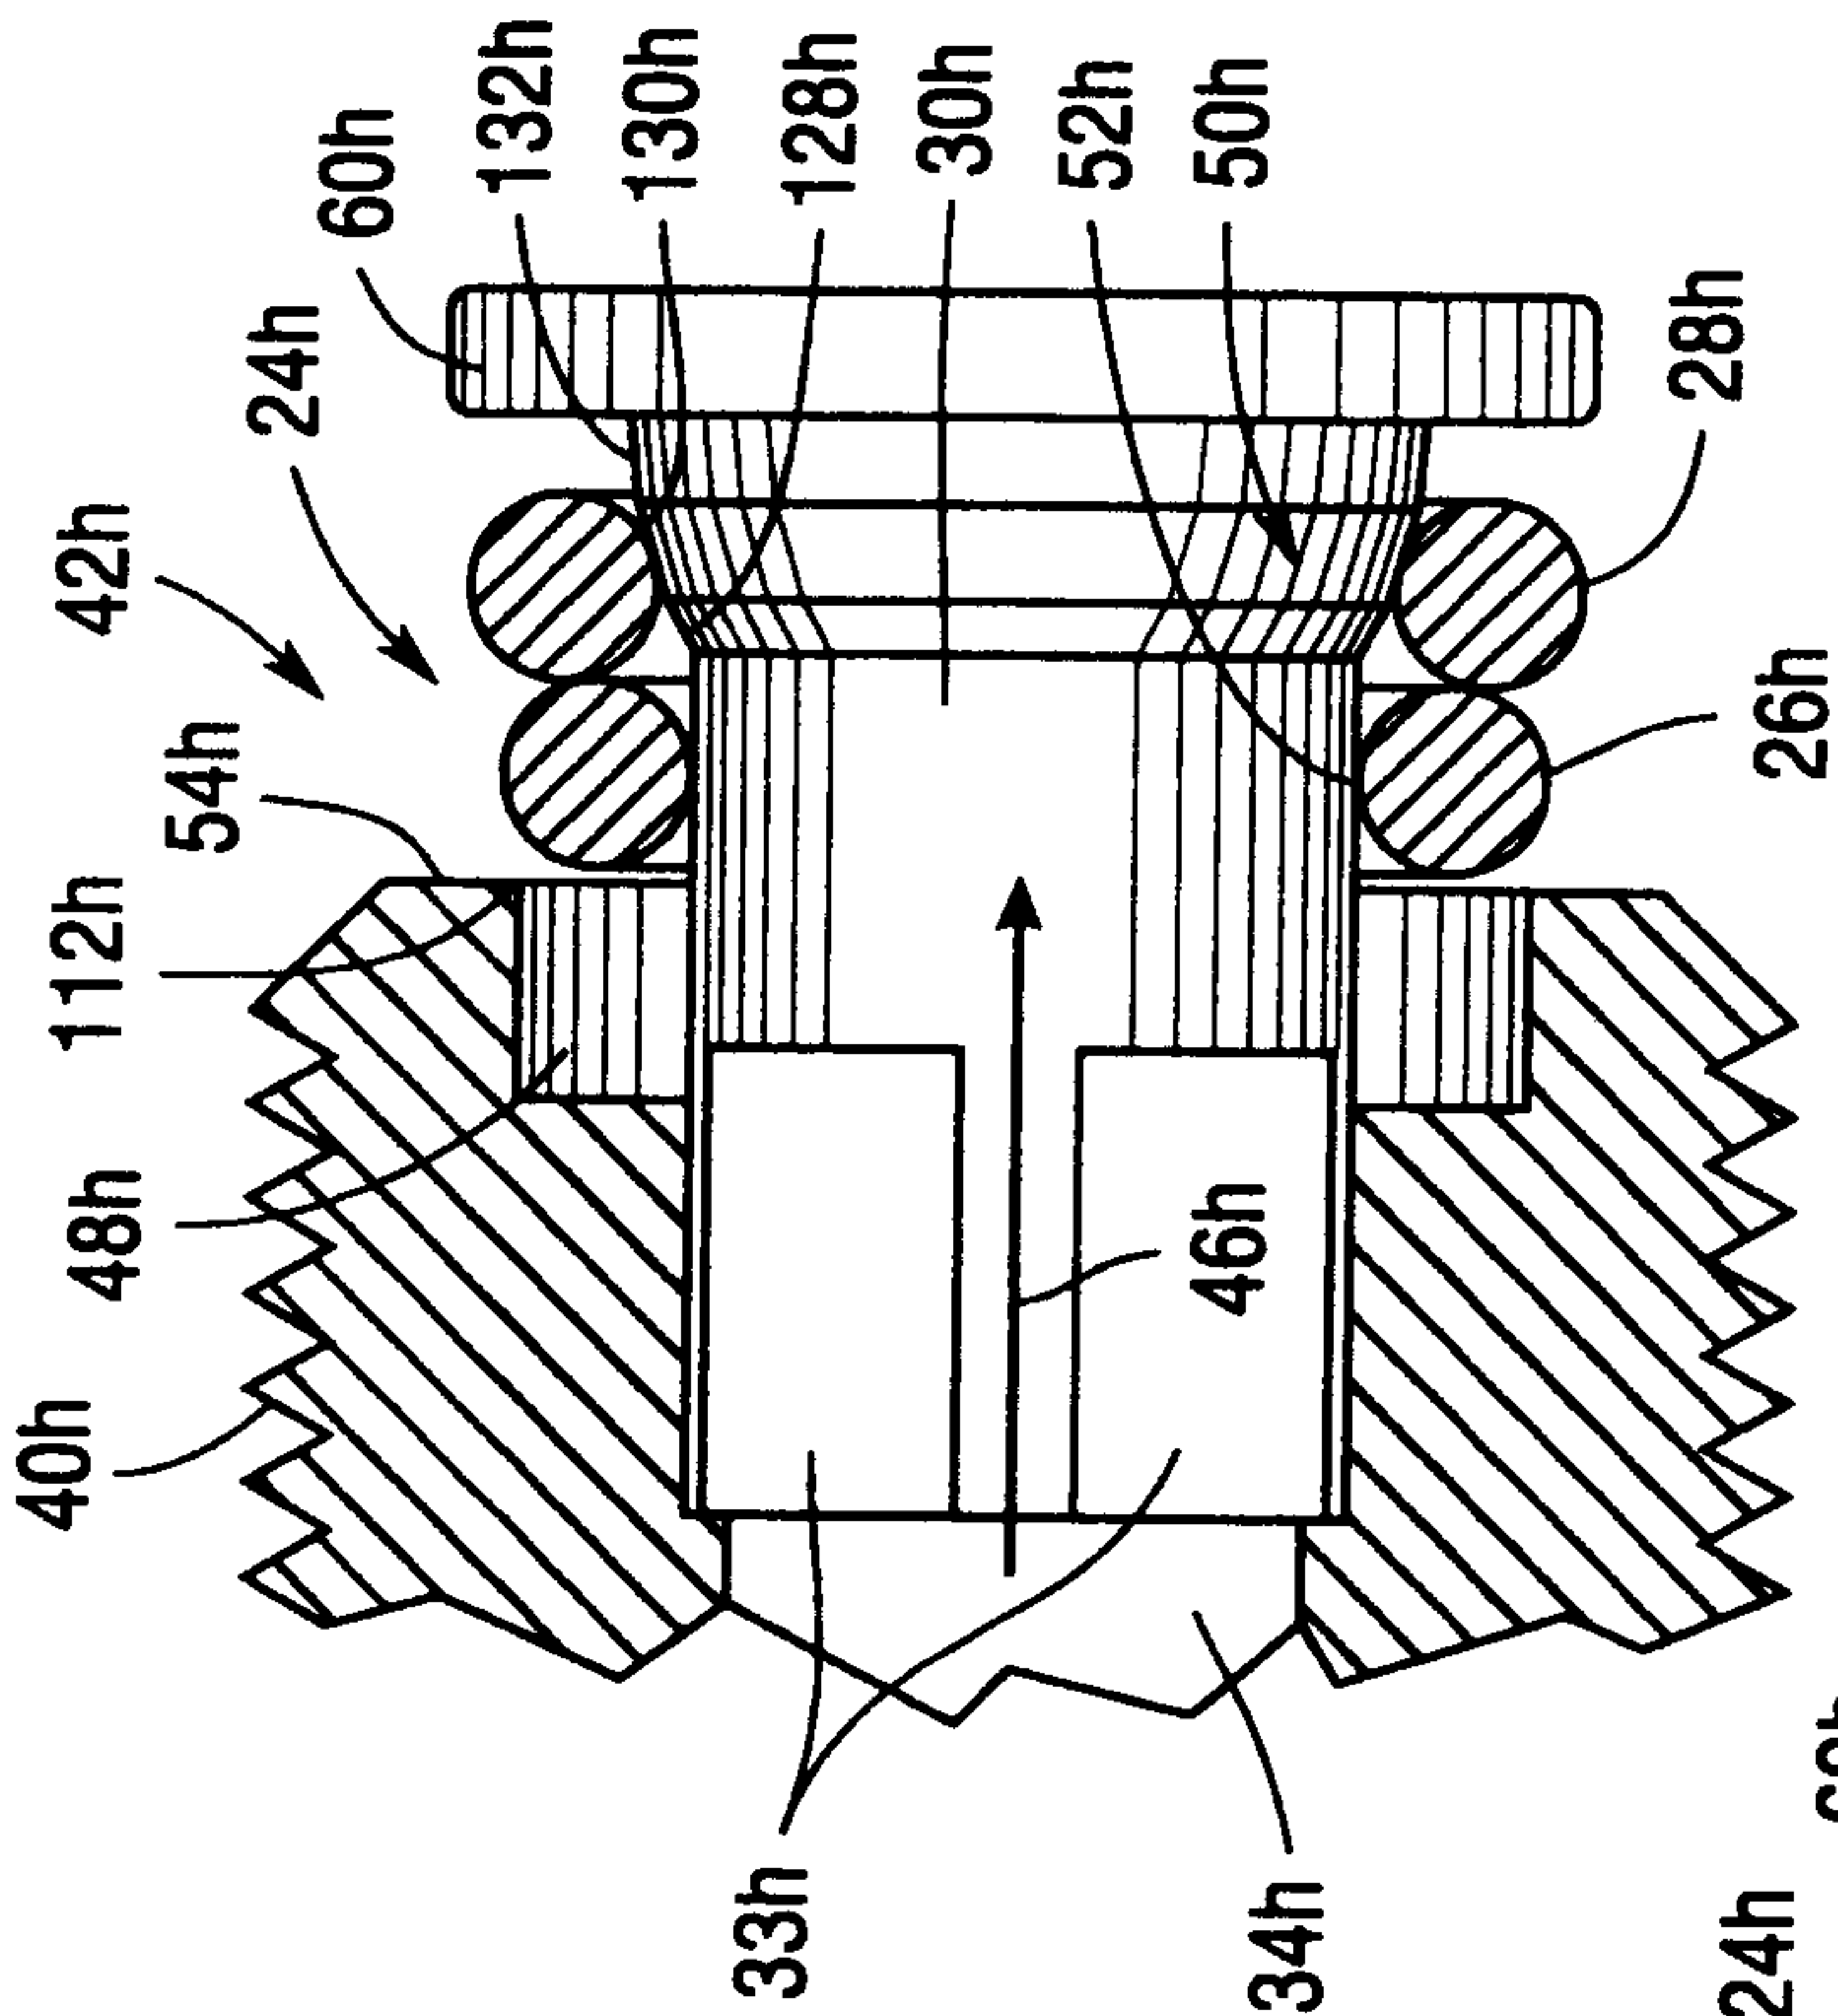


Fig. 12B

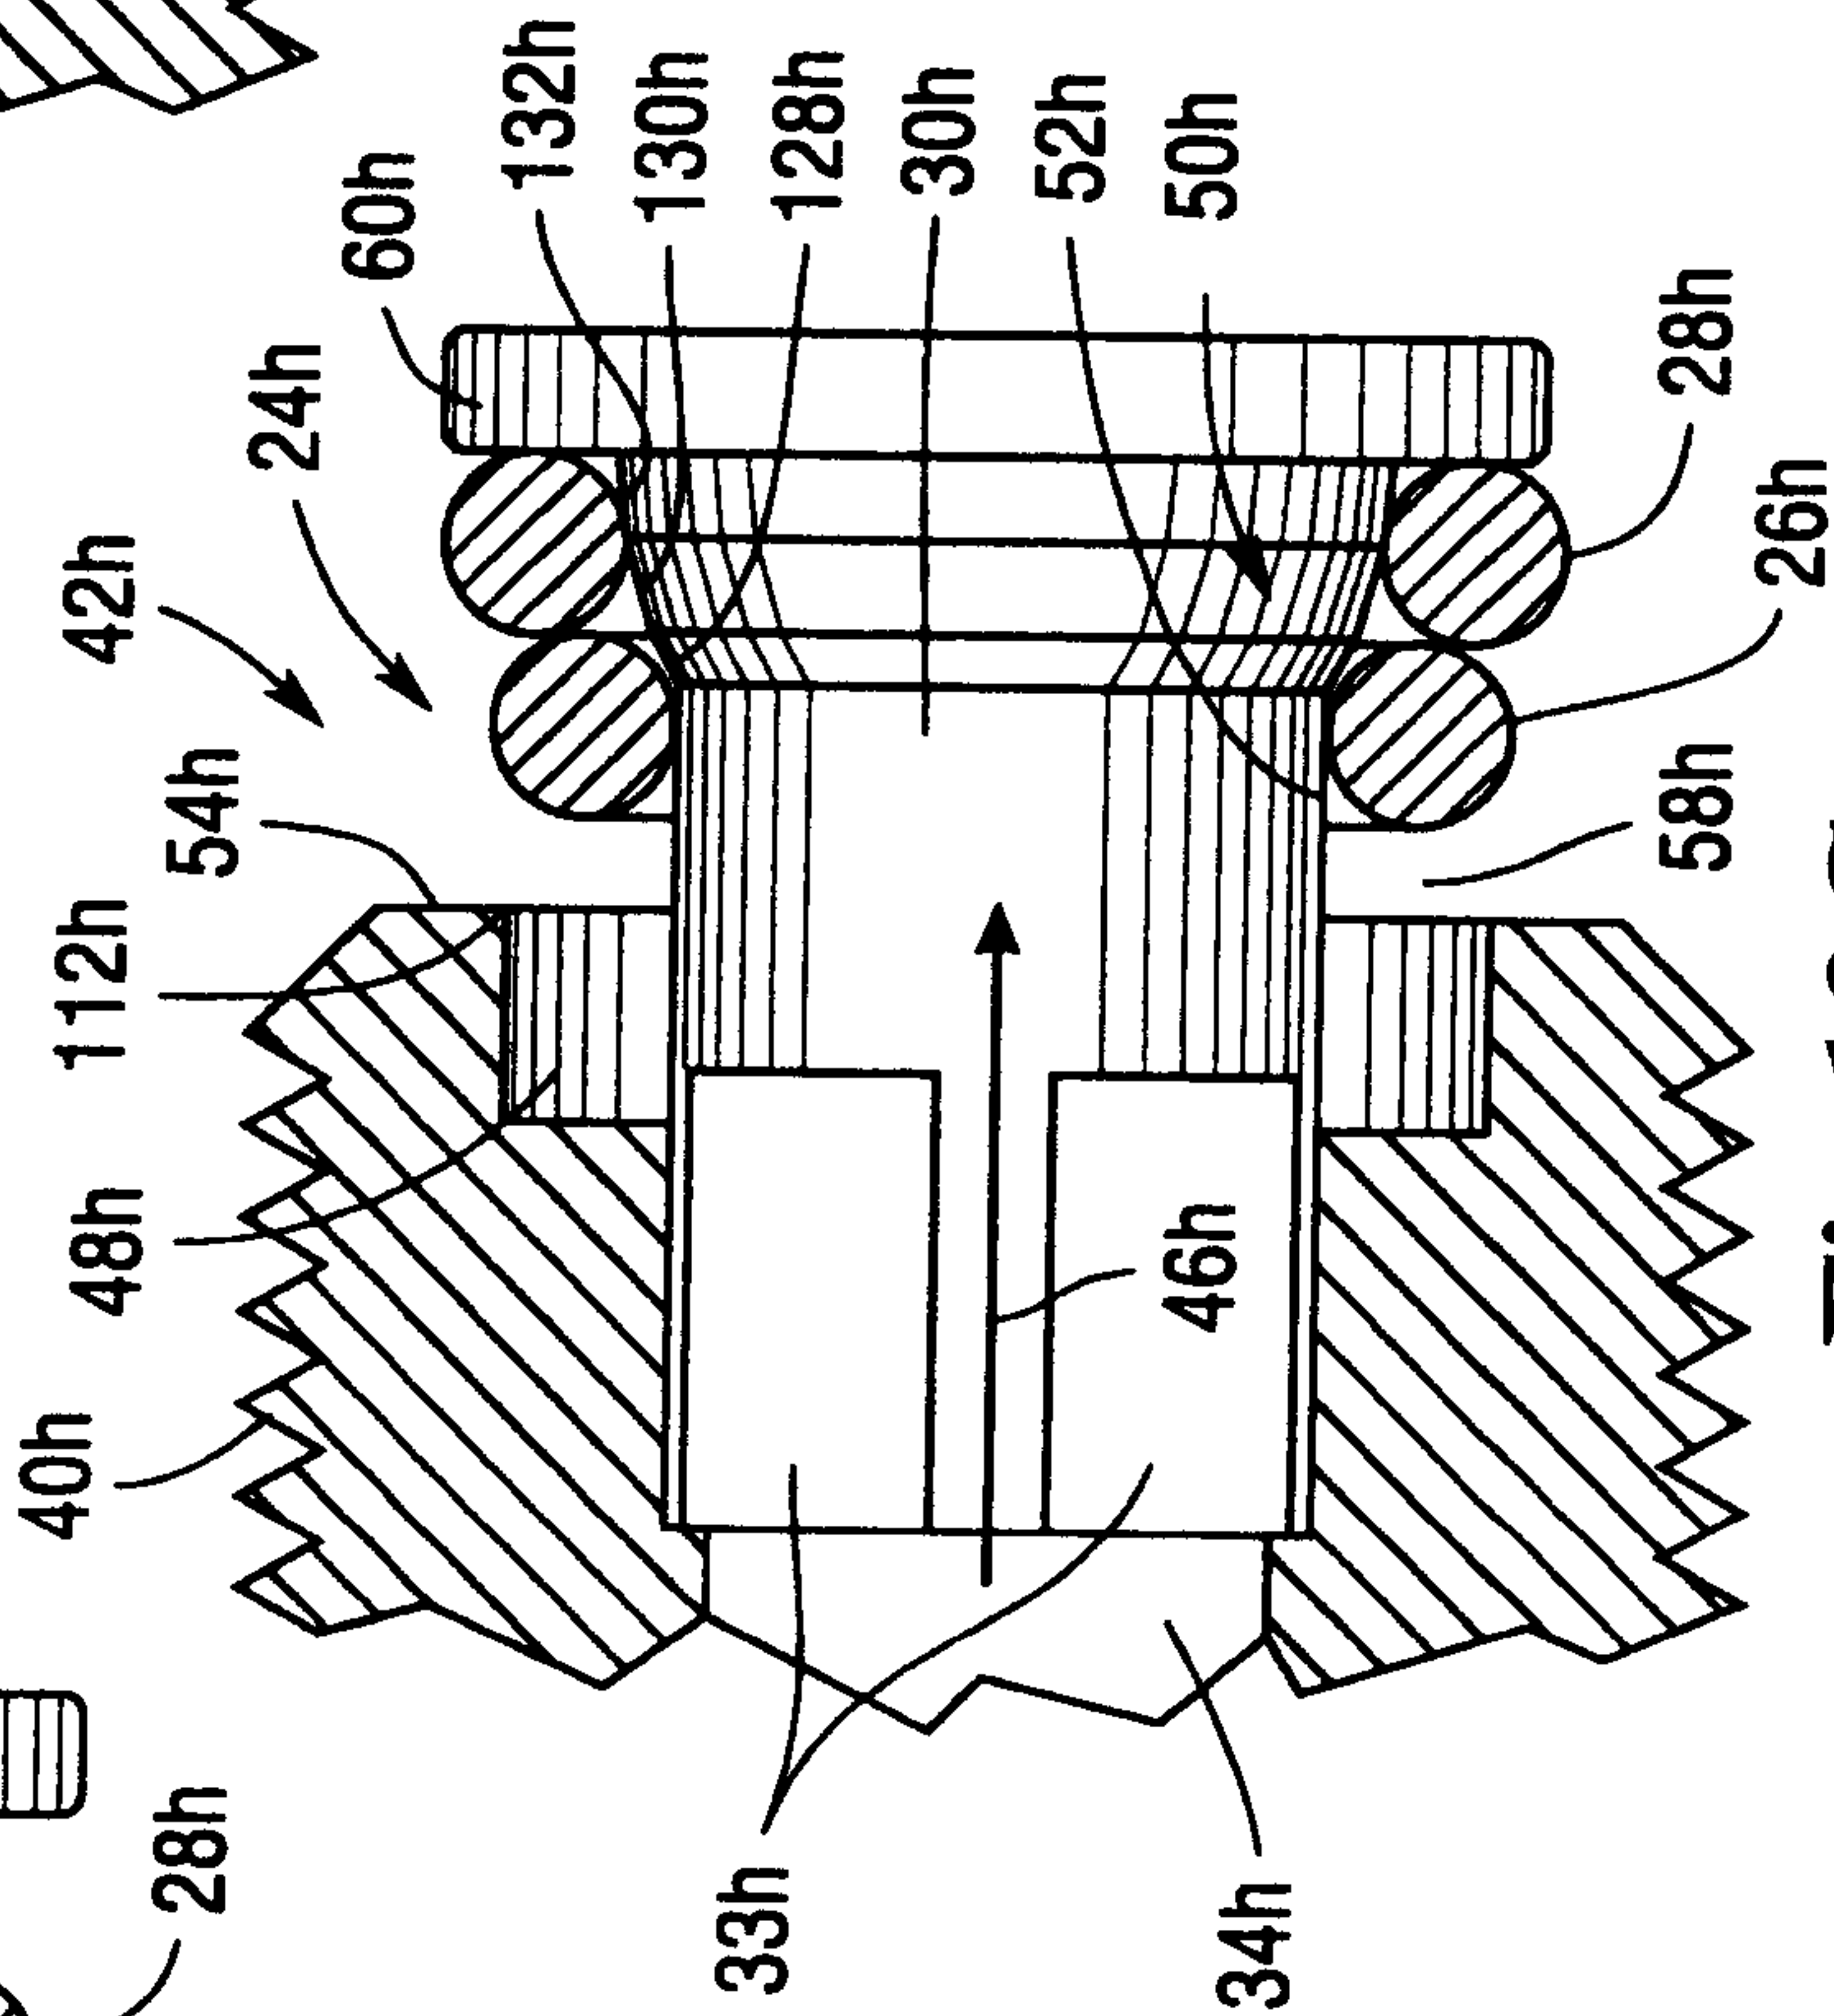


Fig. 12C

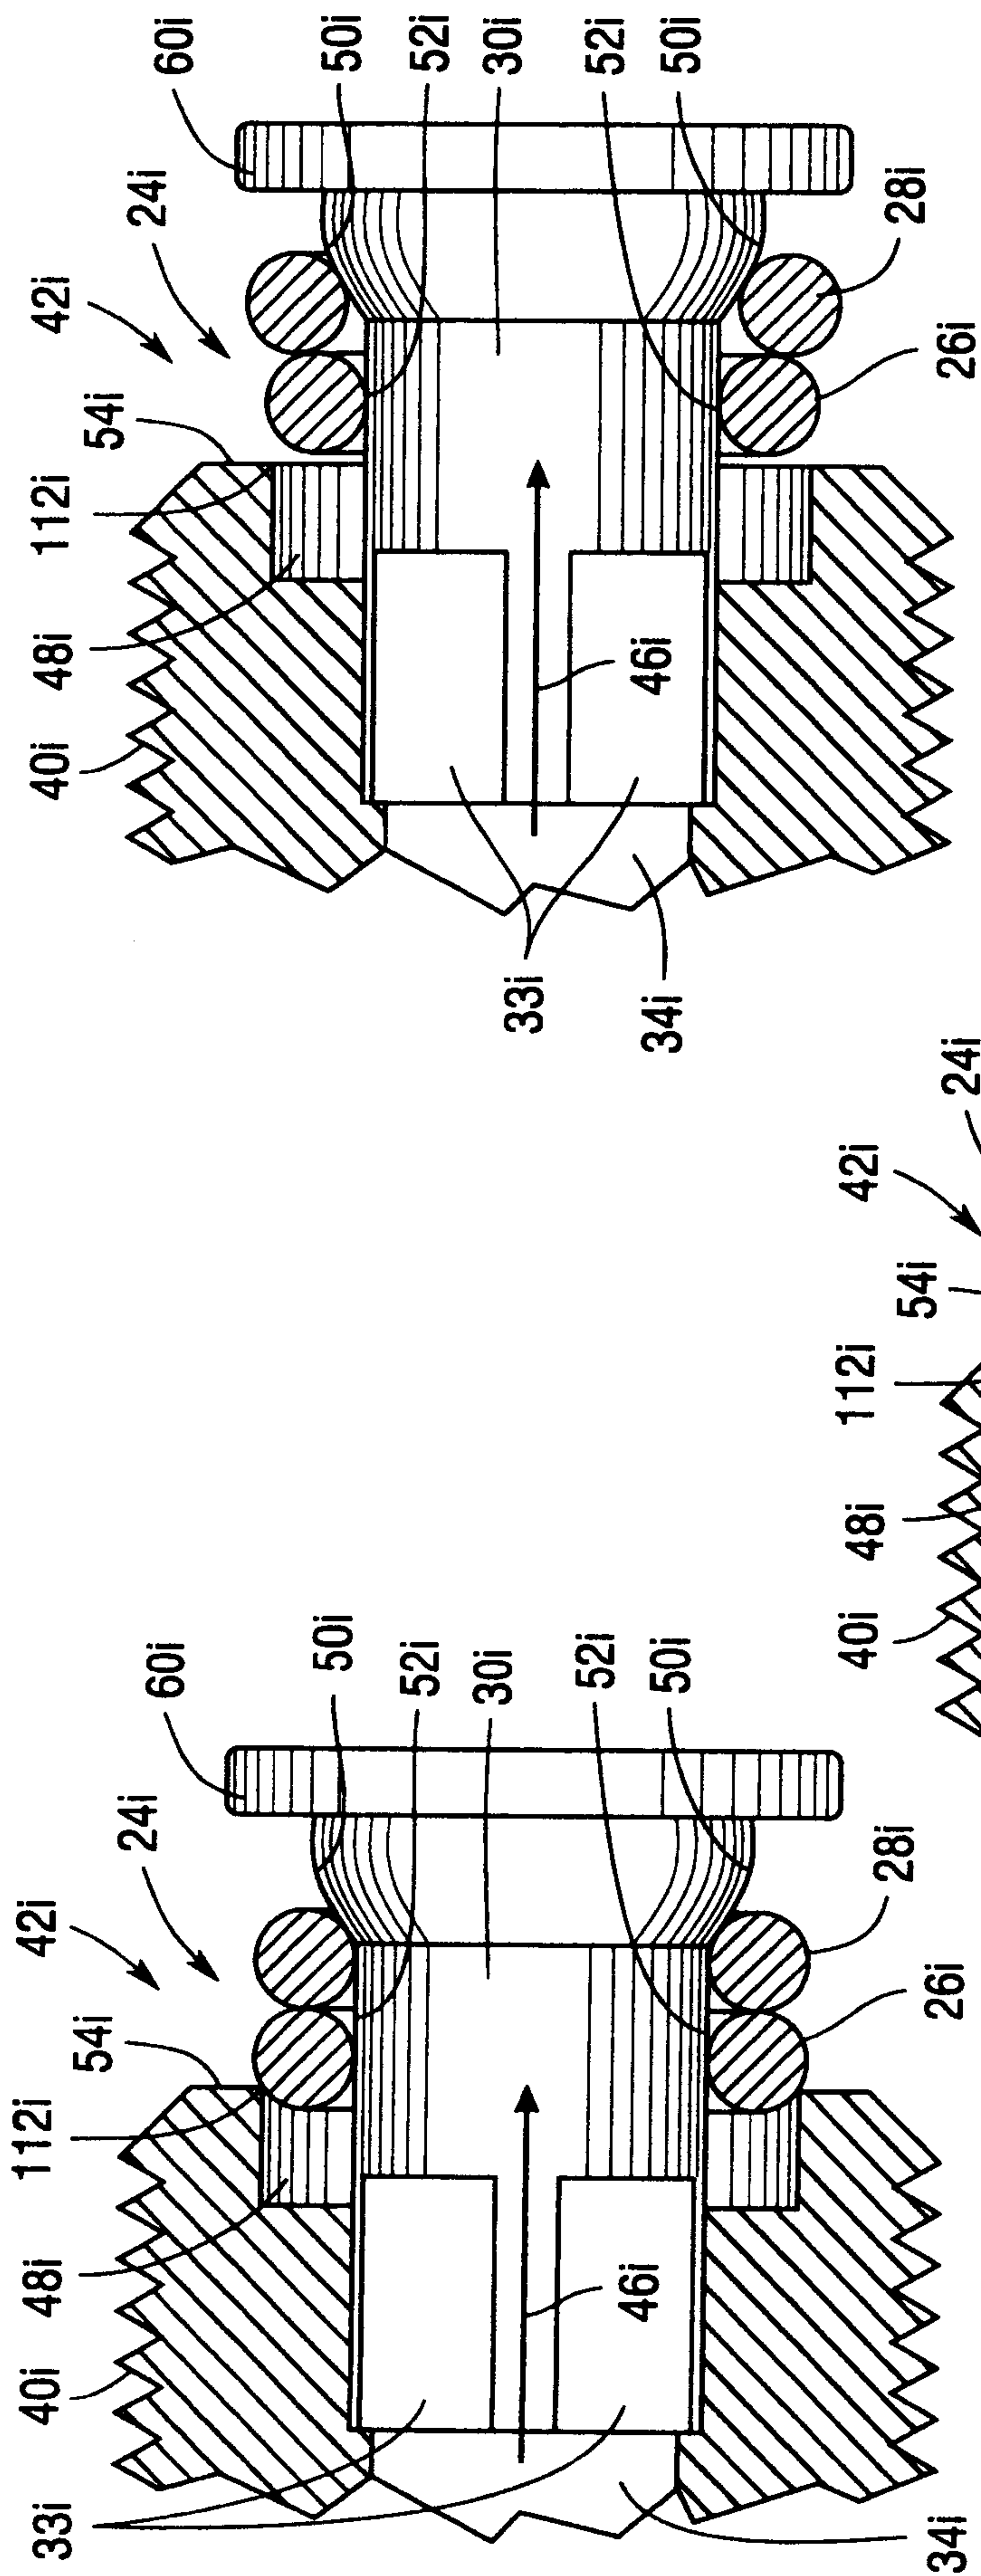


Fig. 13A

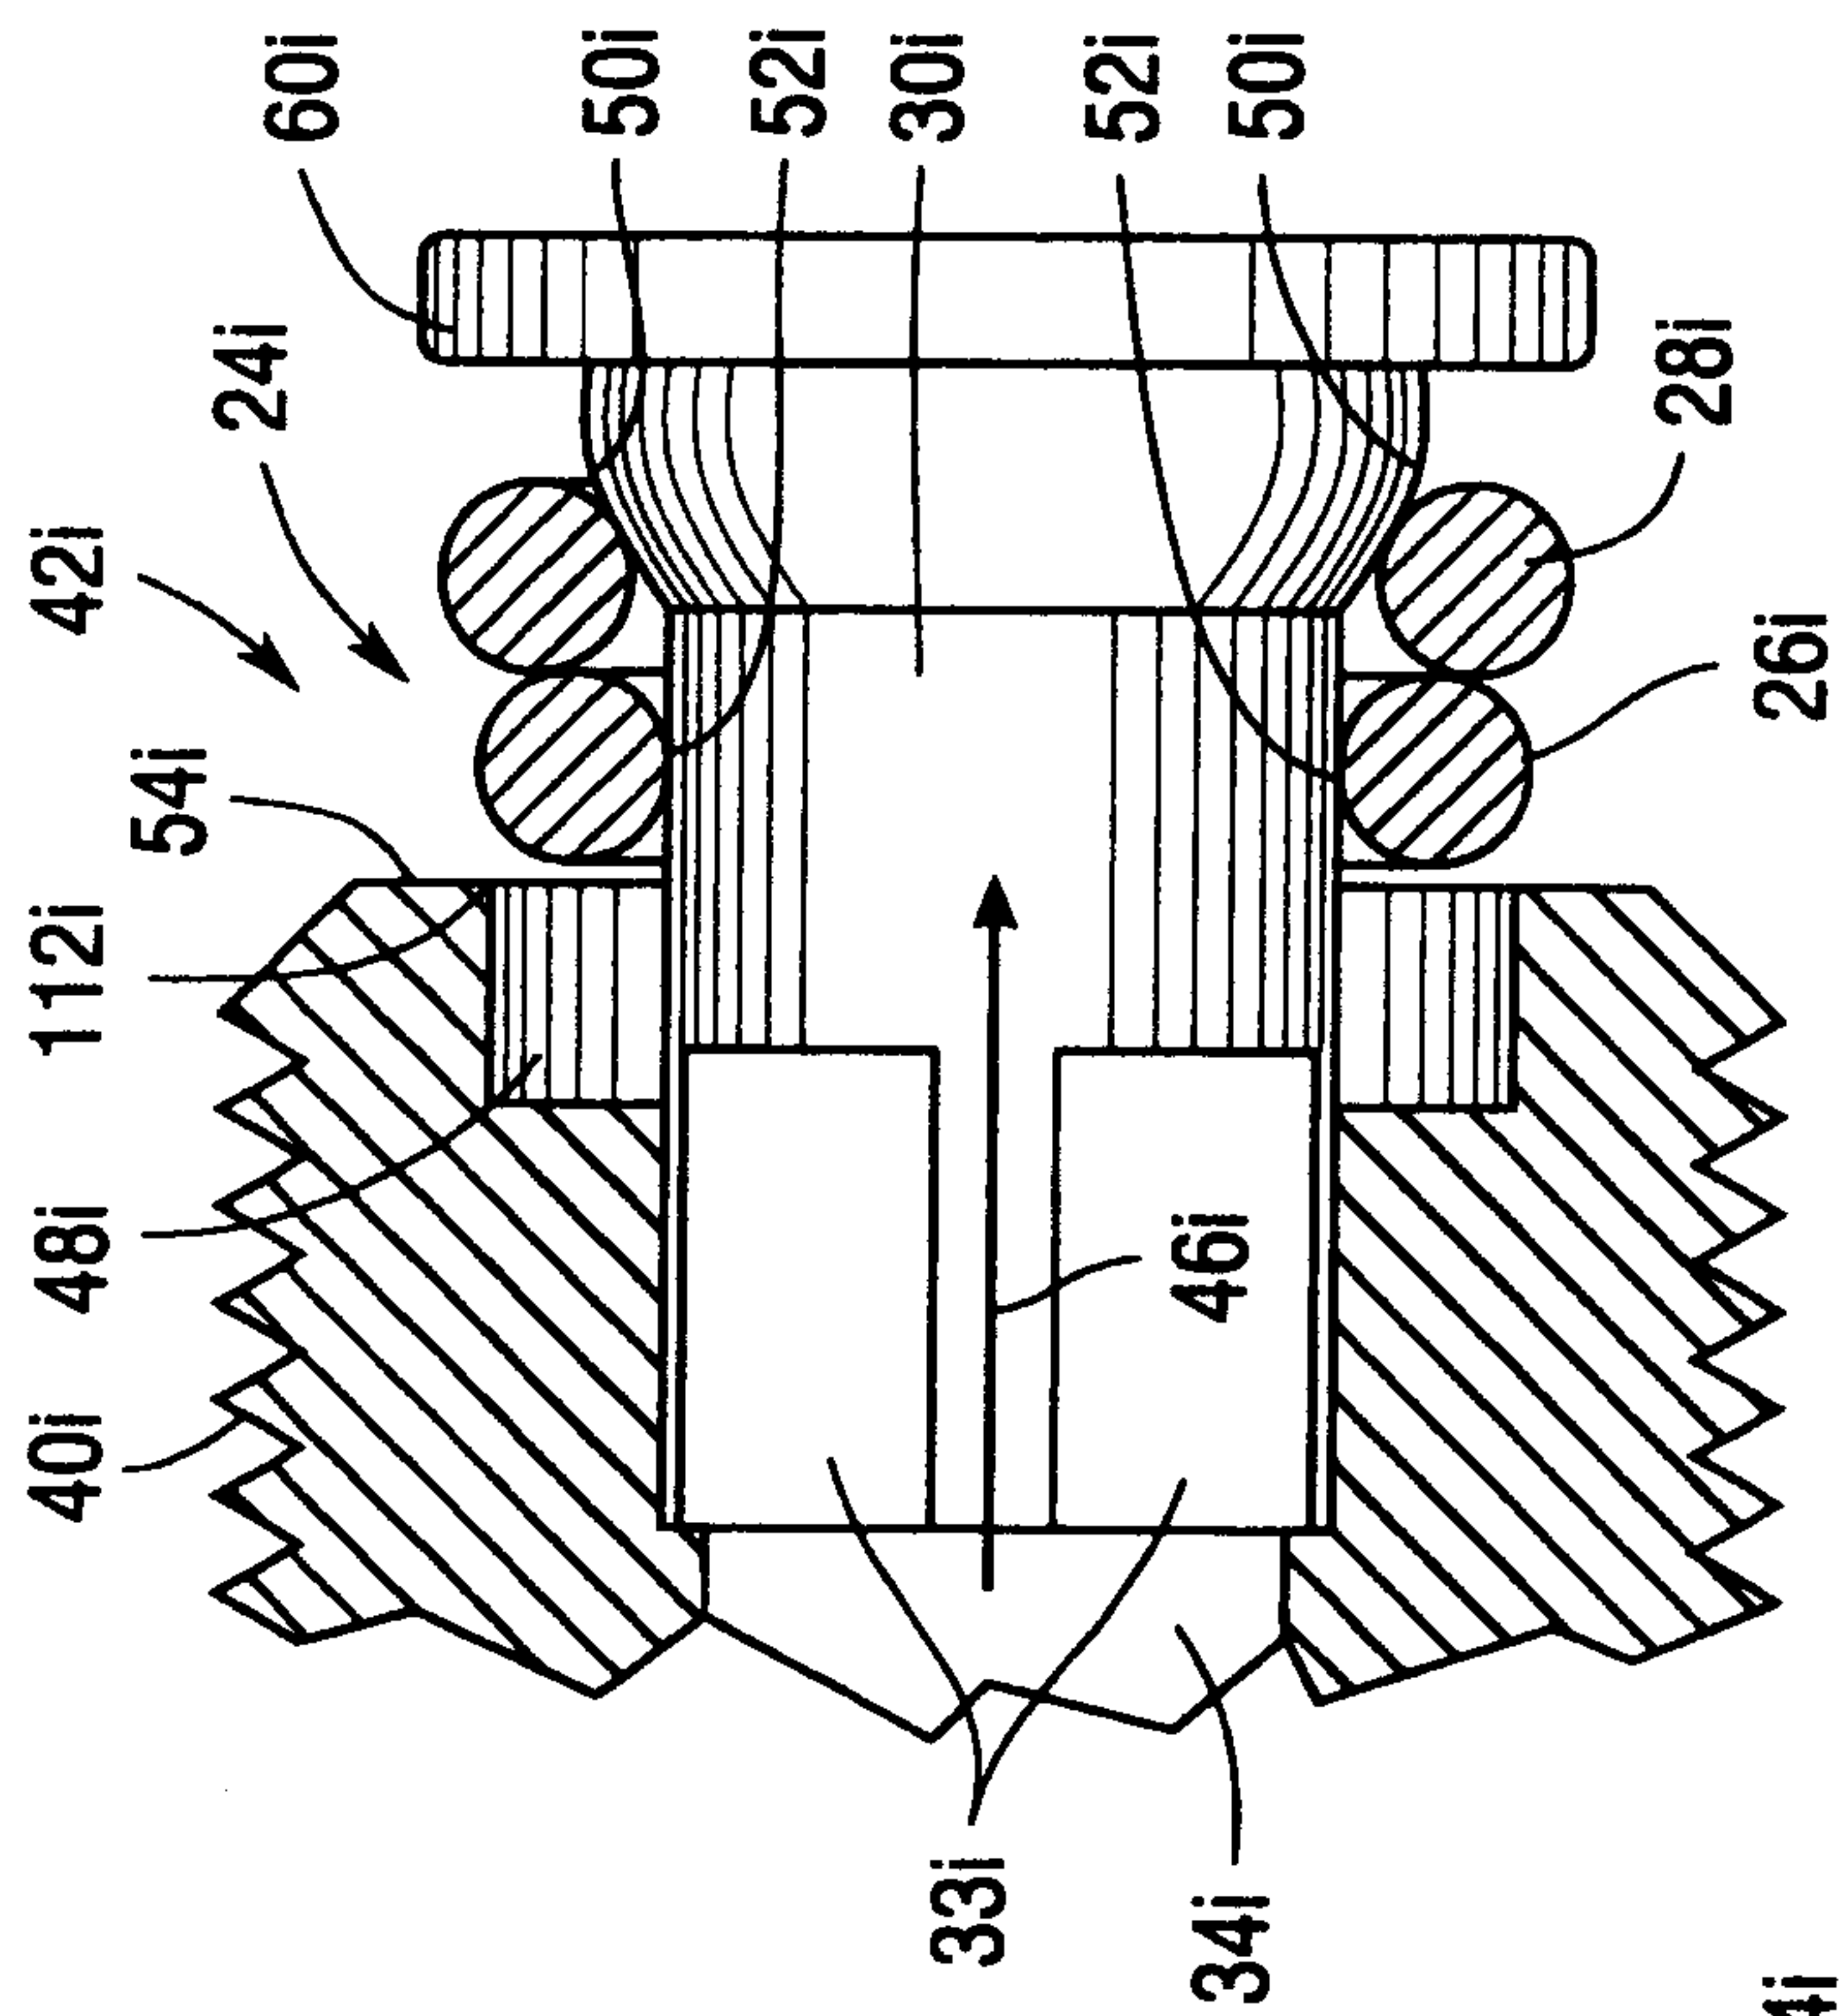


Fig. 13B

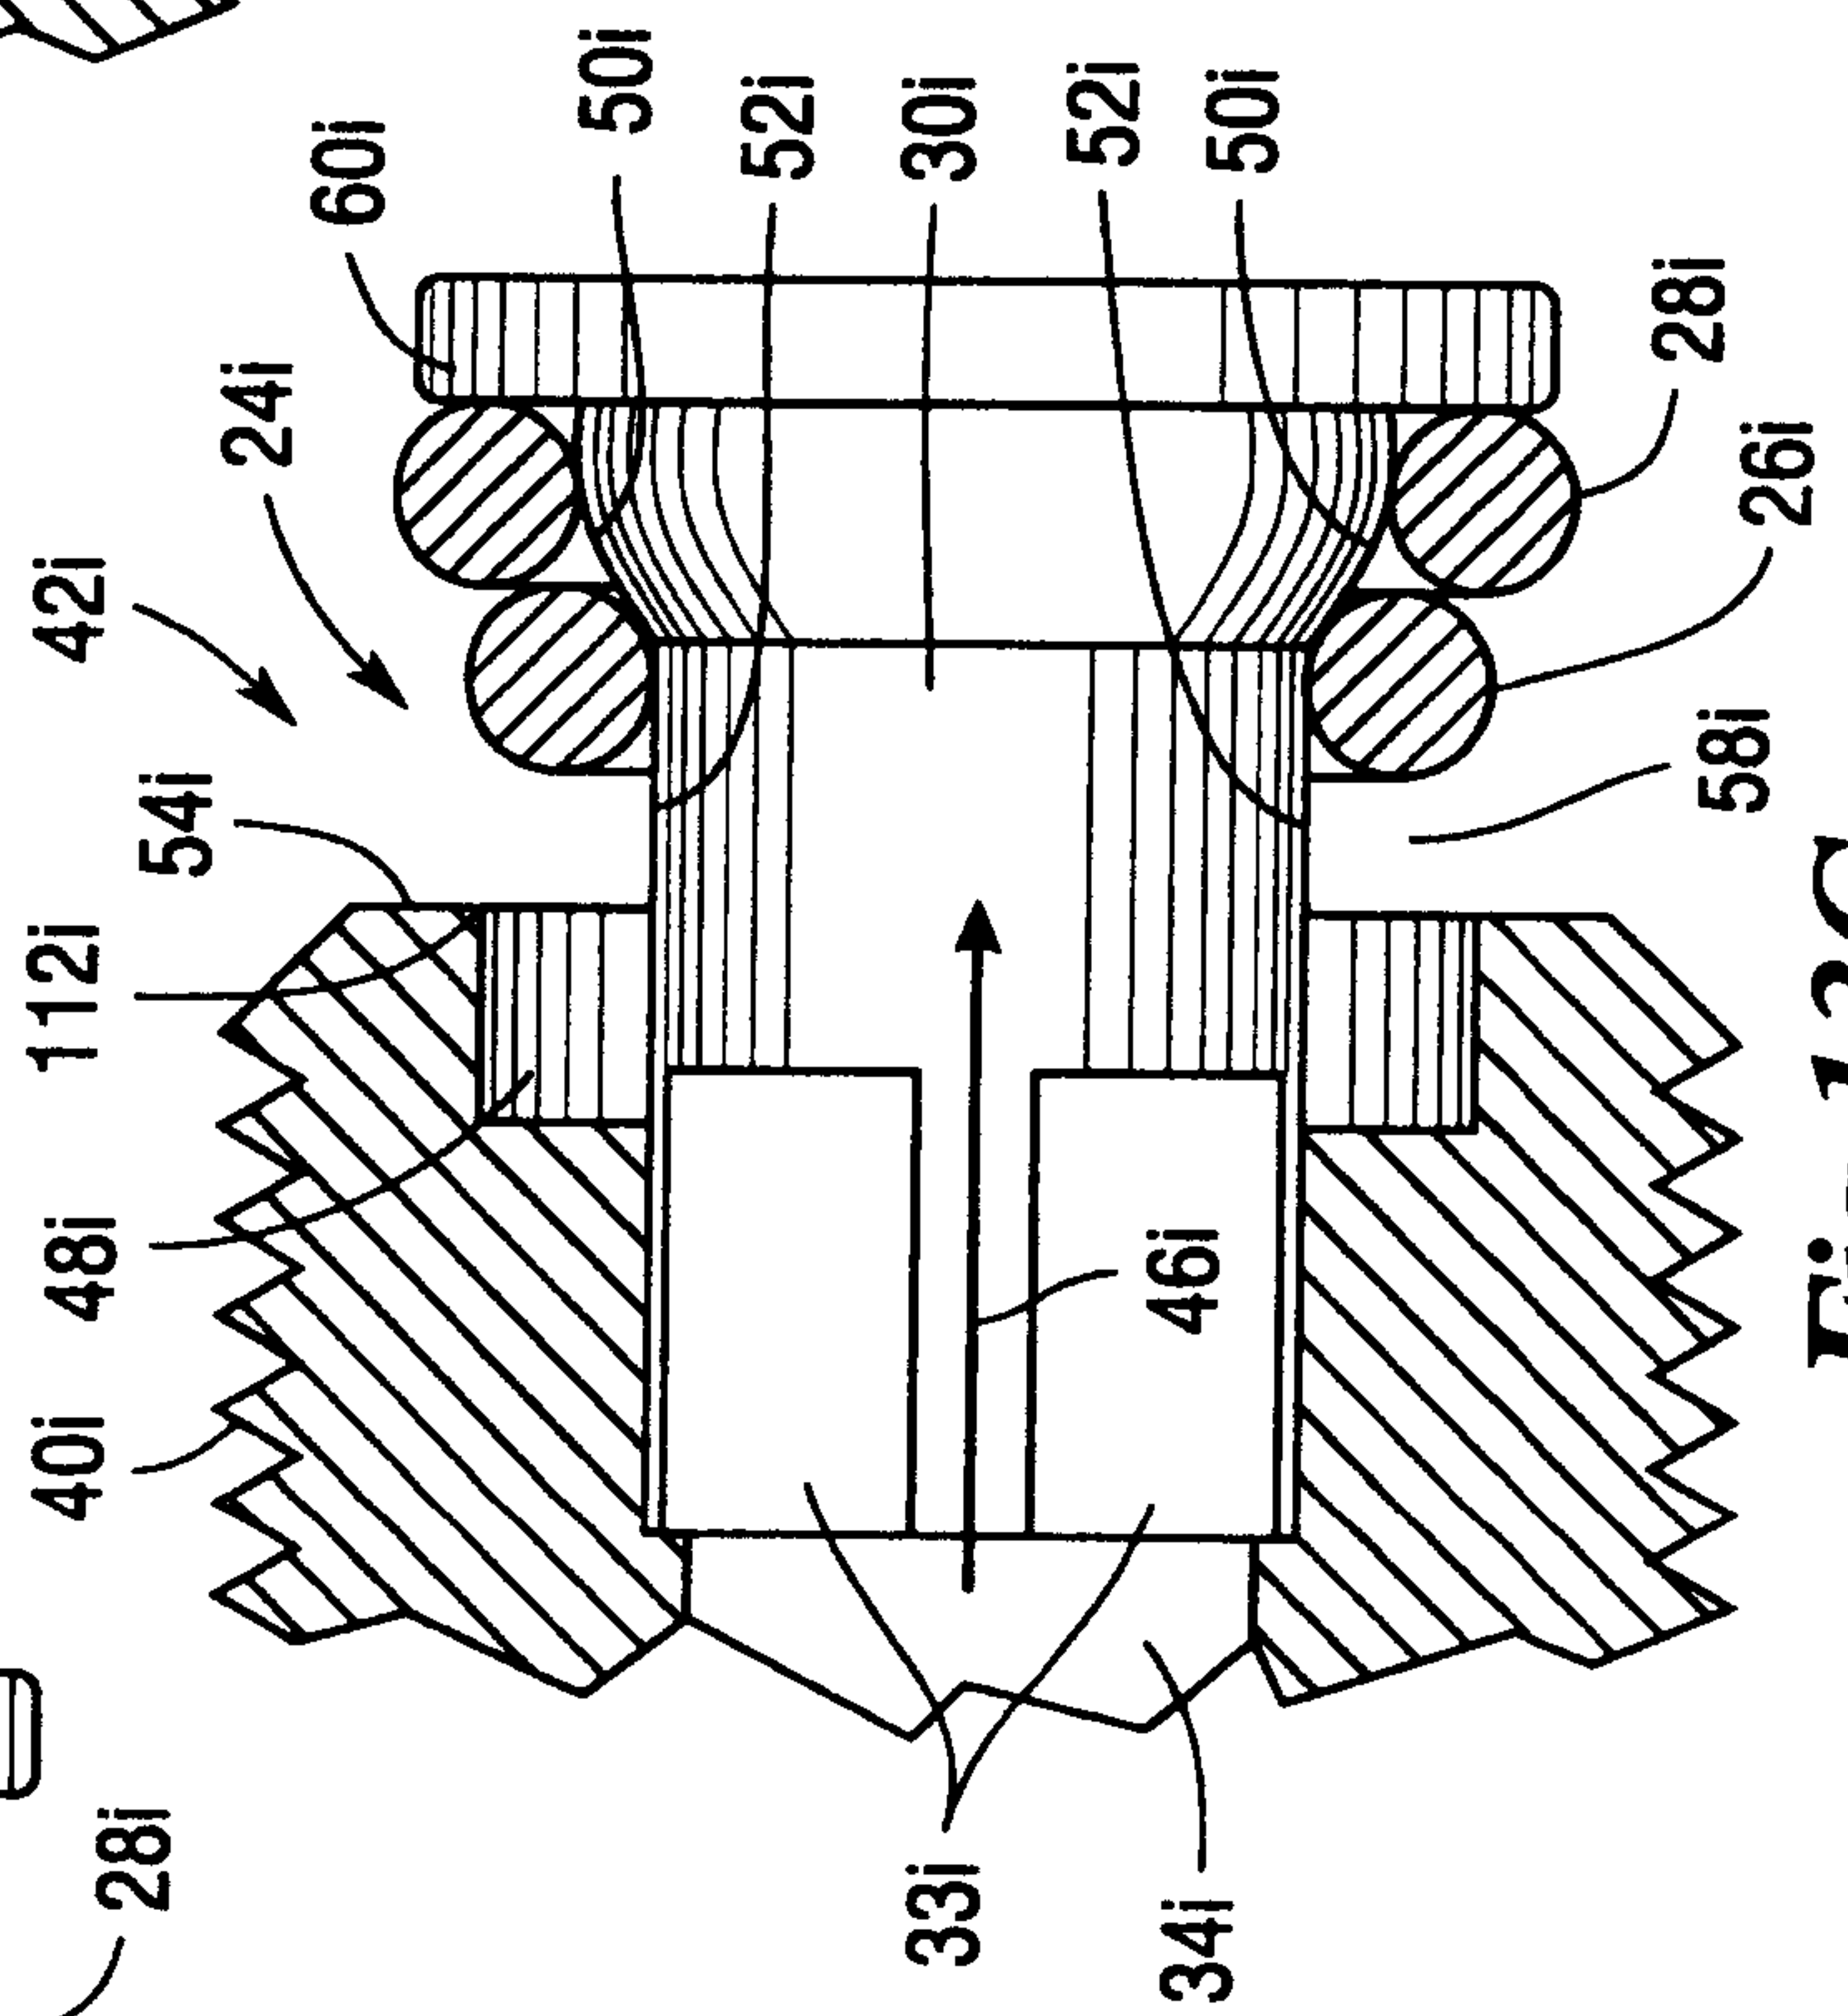


Fig. 13C

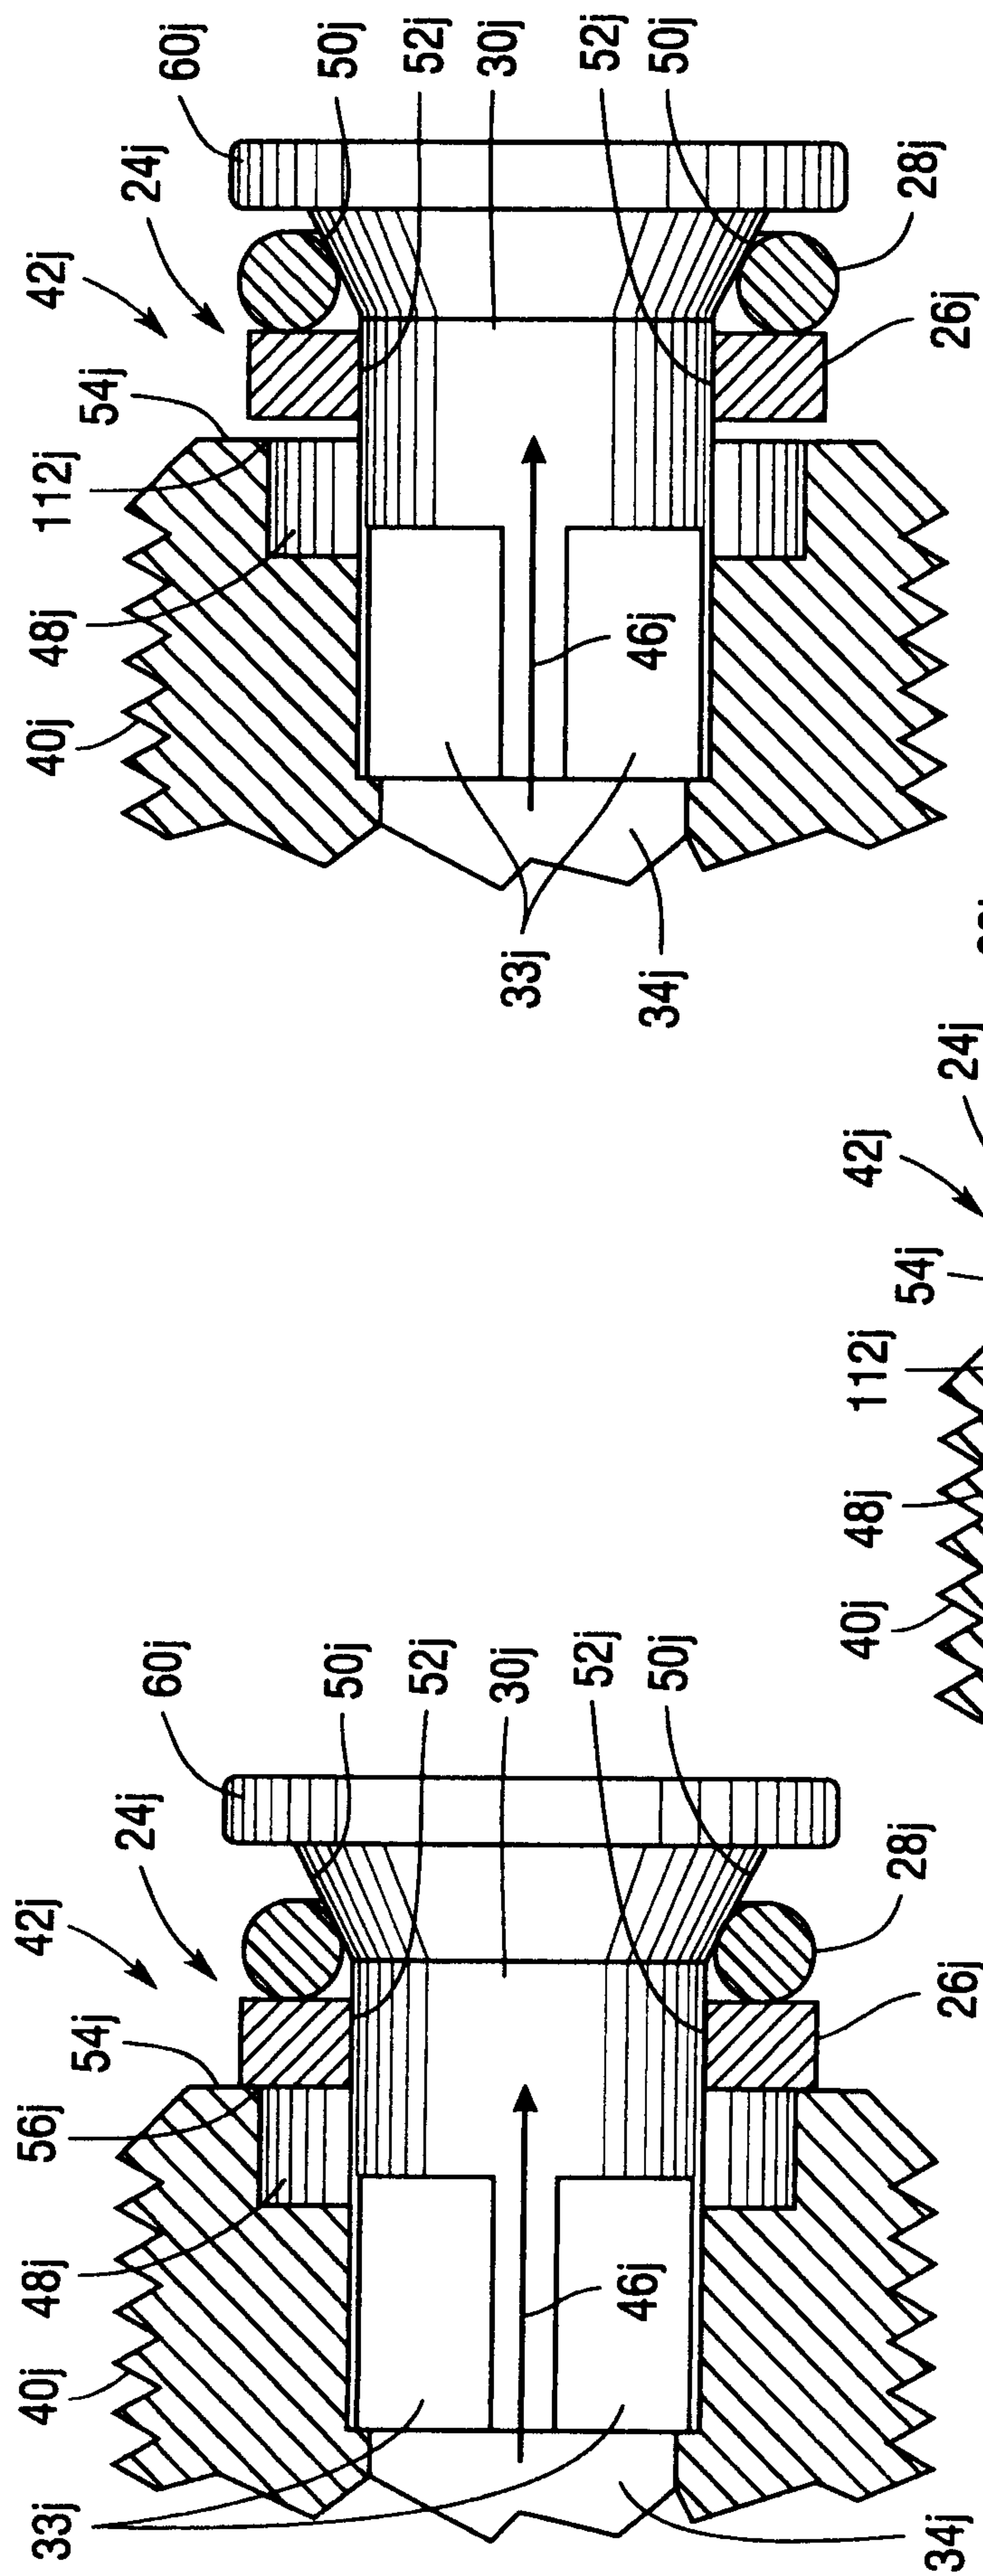


Fig. 14A

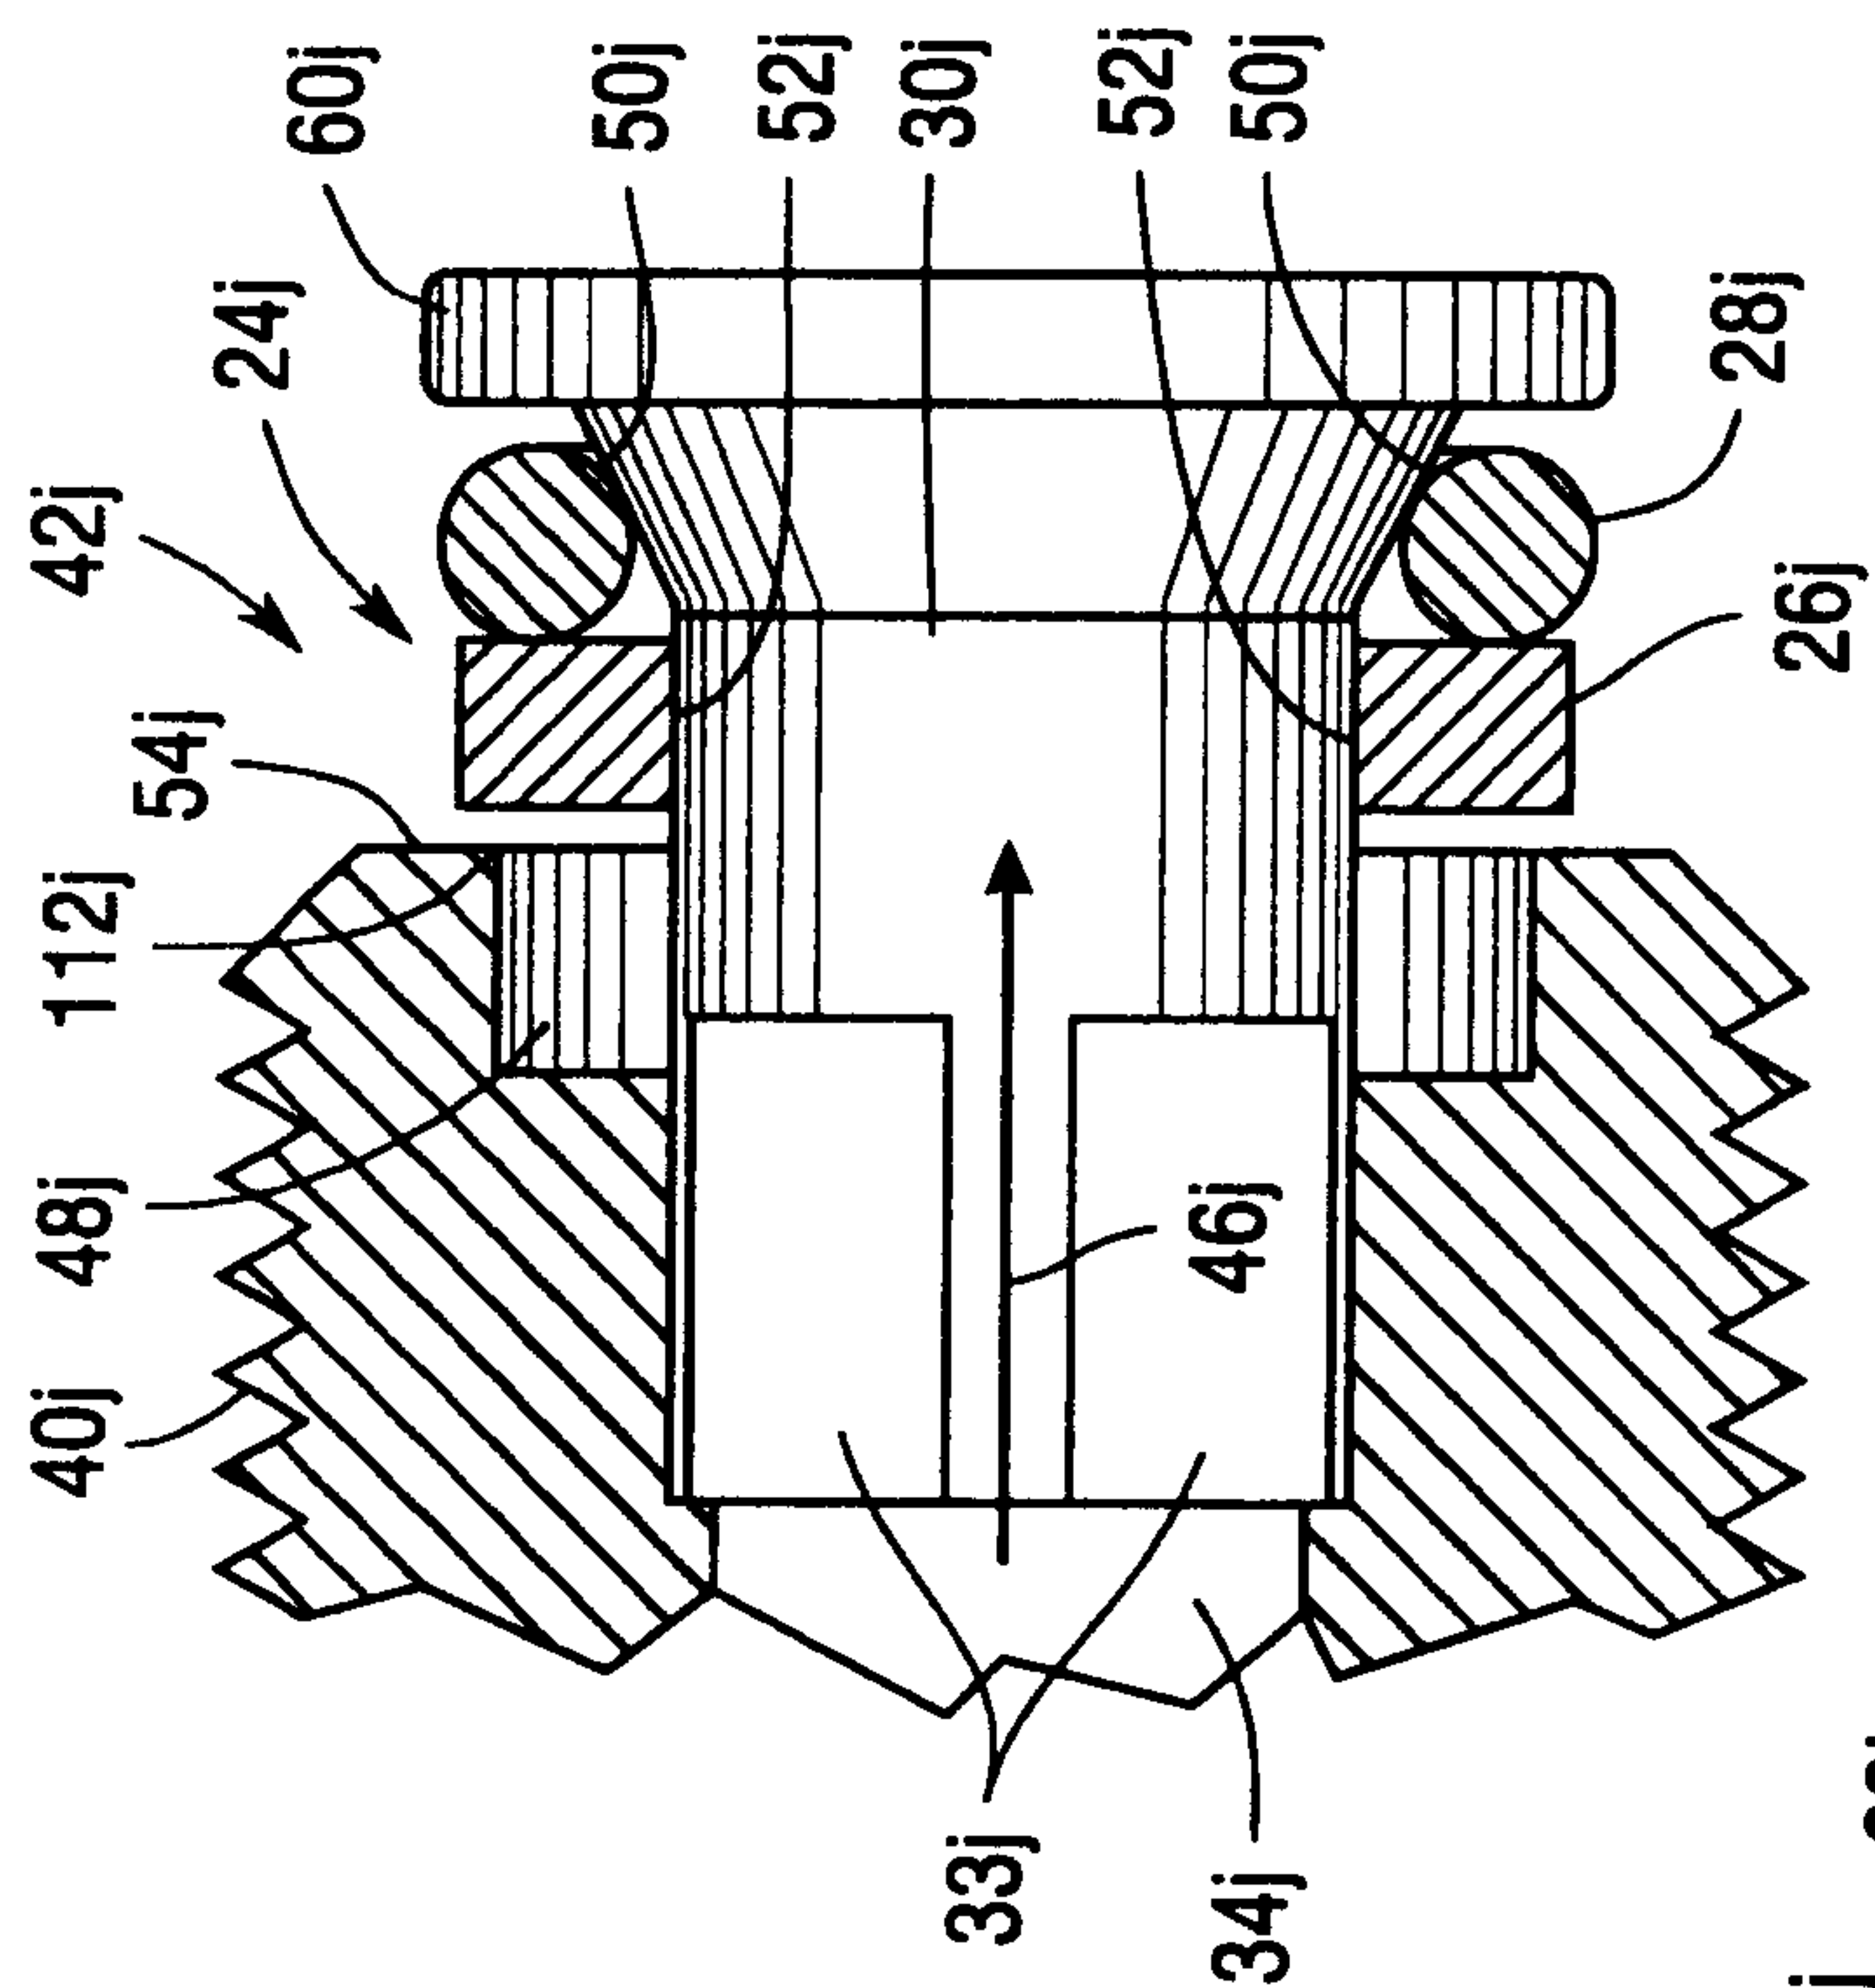


Fig. 14B

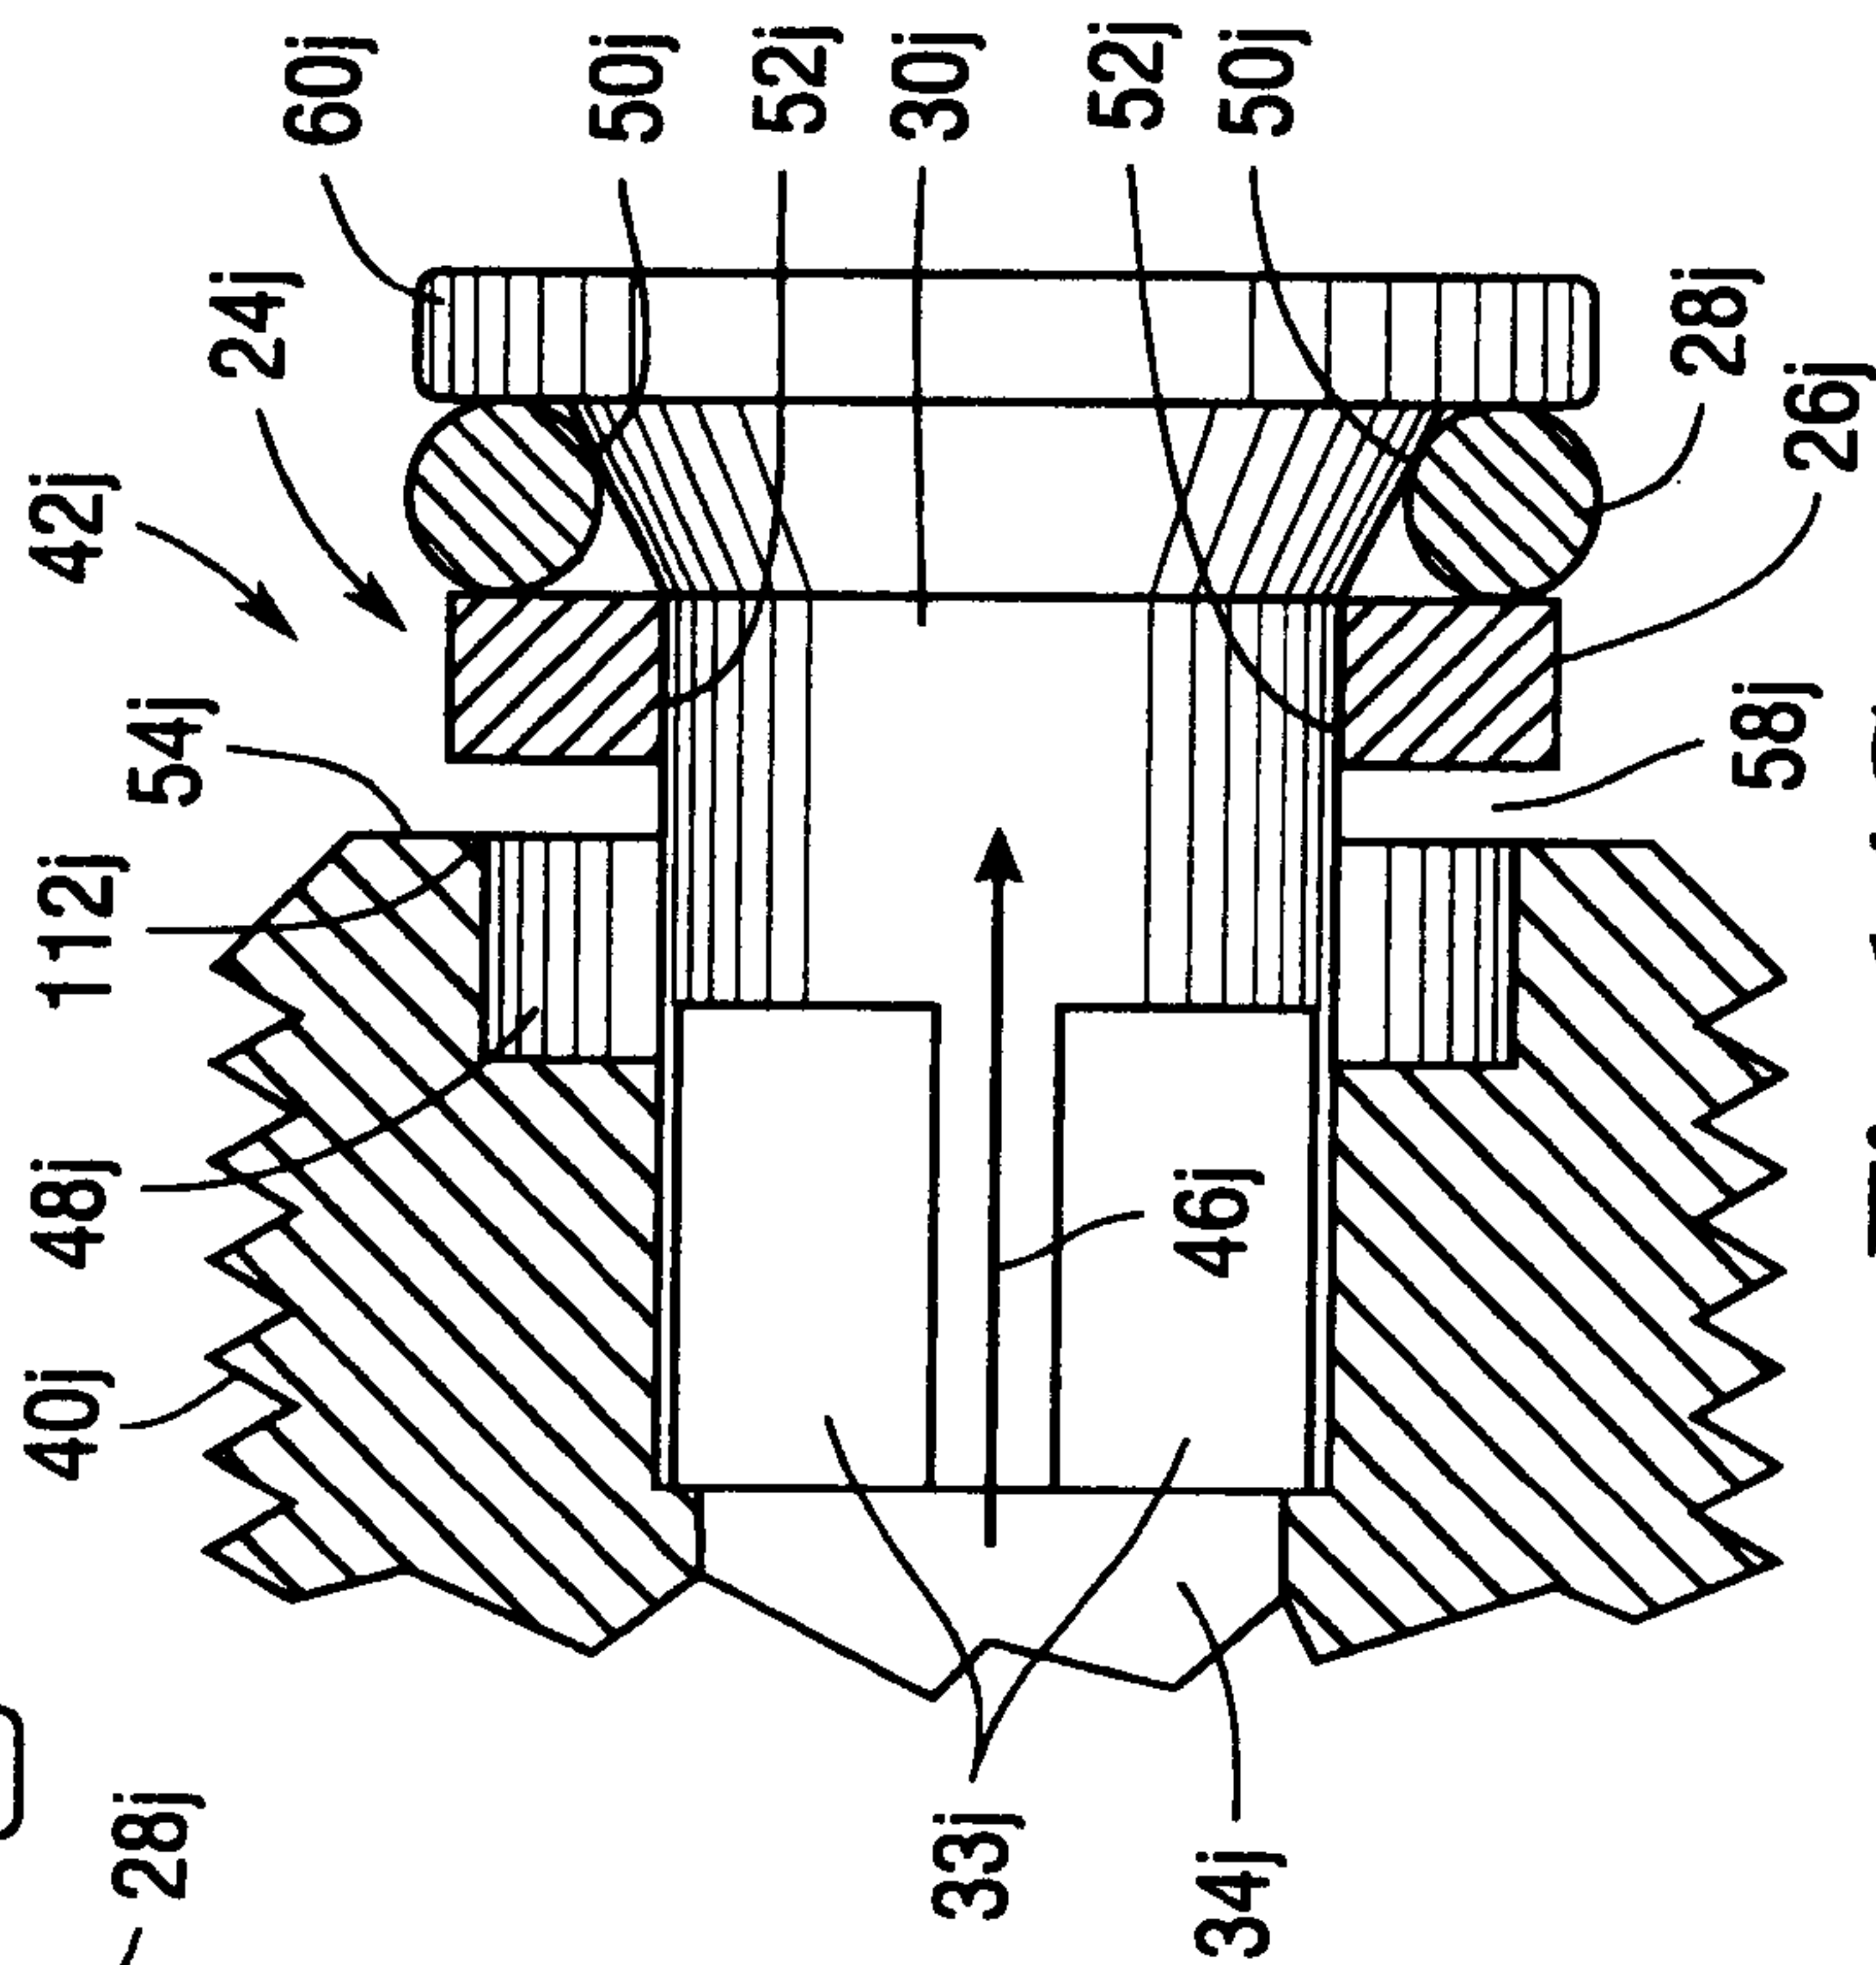


Fig. 14C

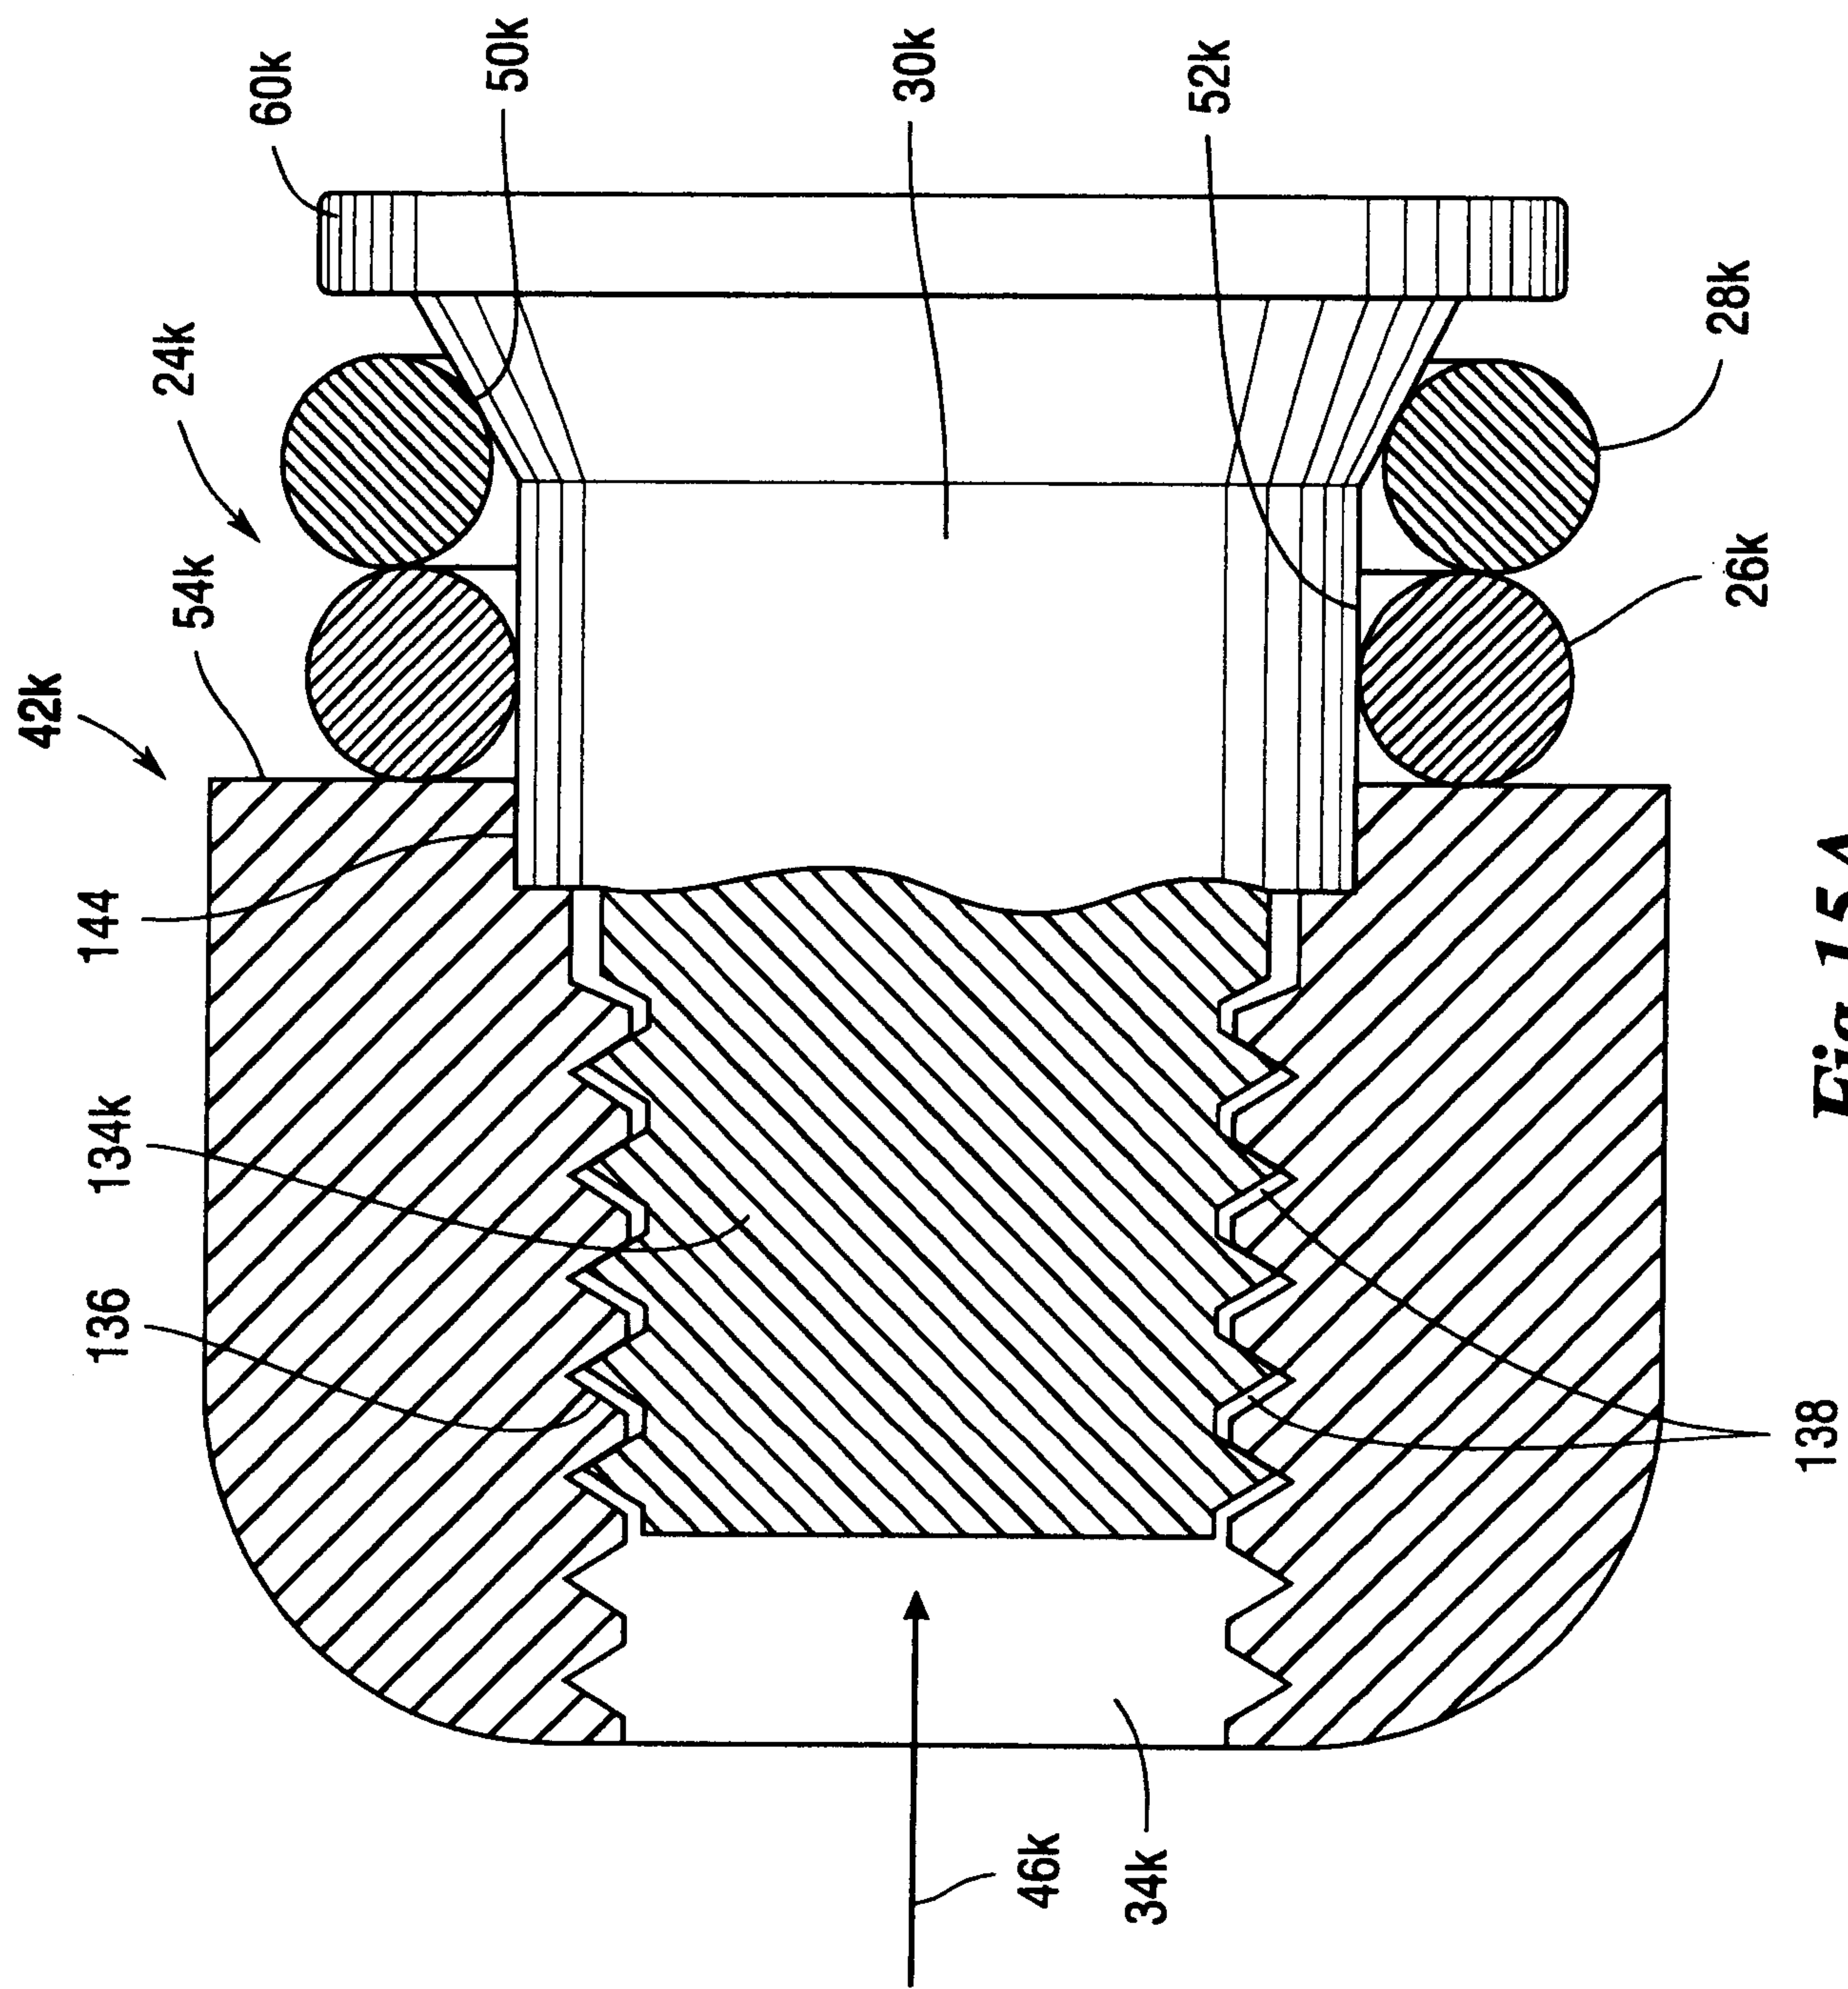


Fig. 15A

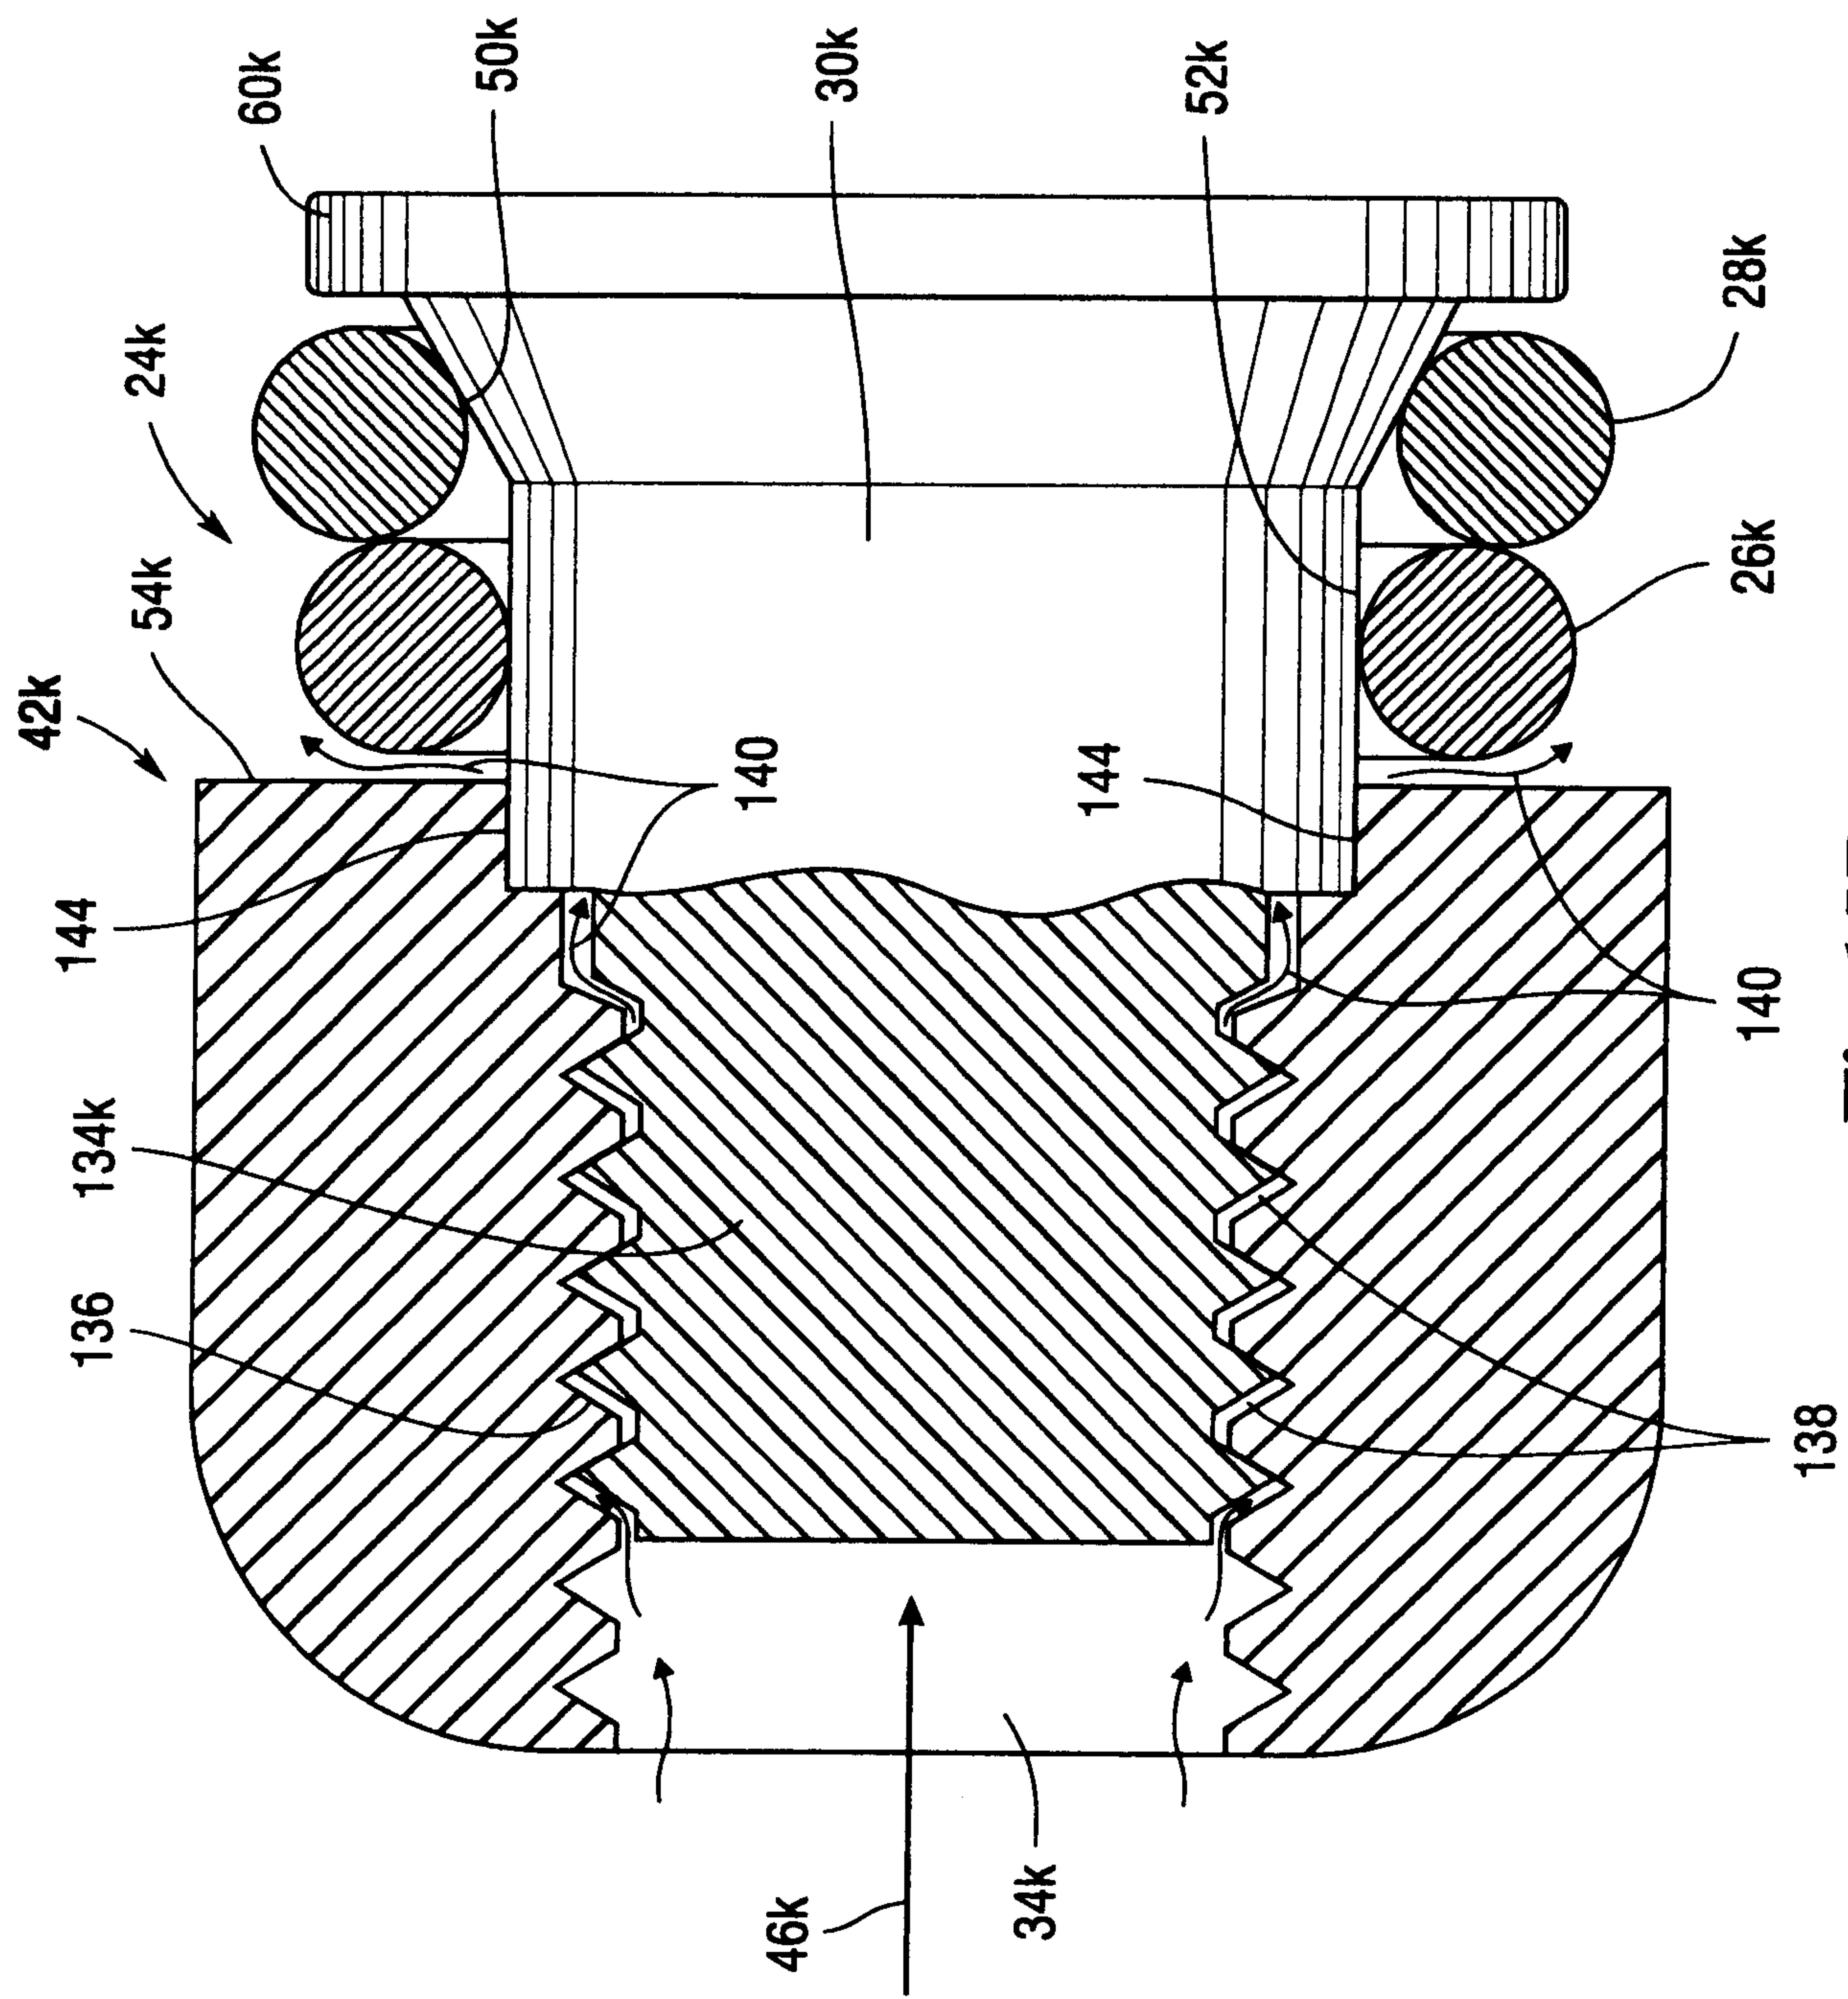


Fig. 15B

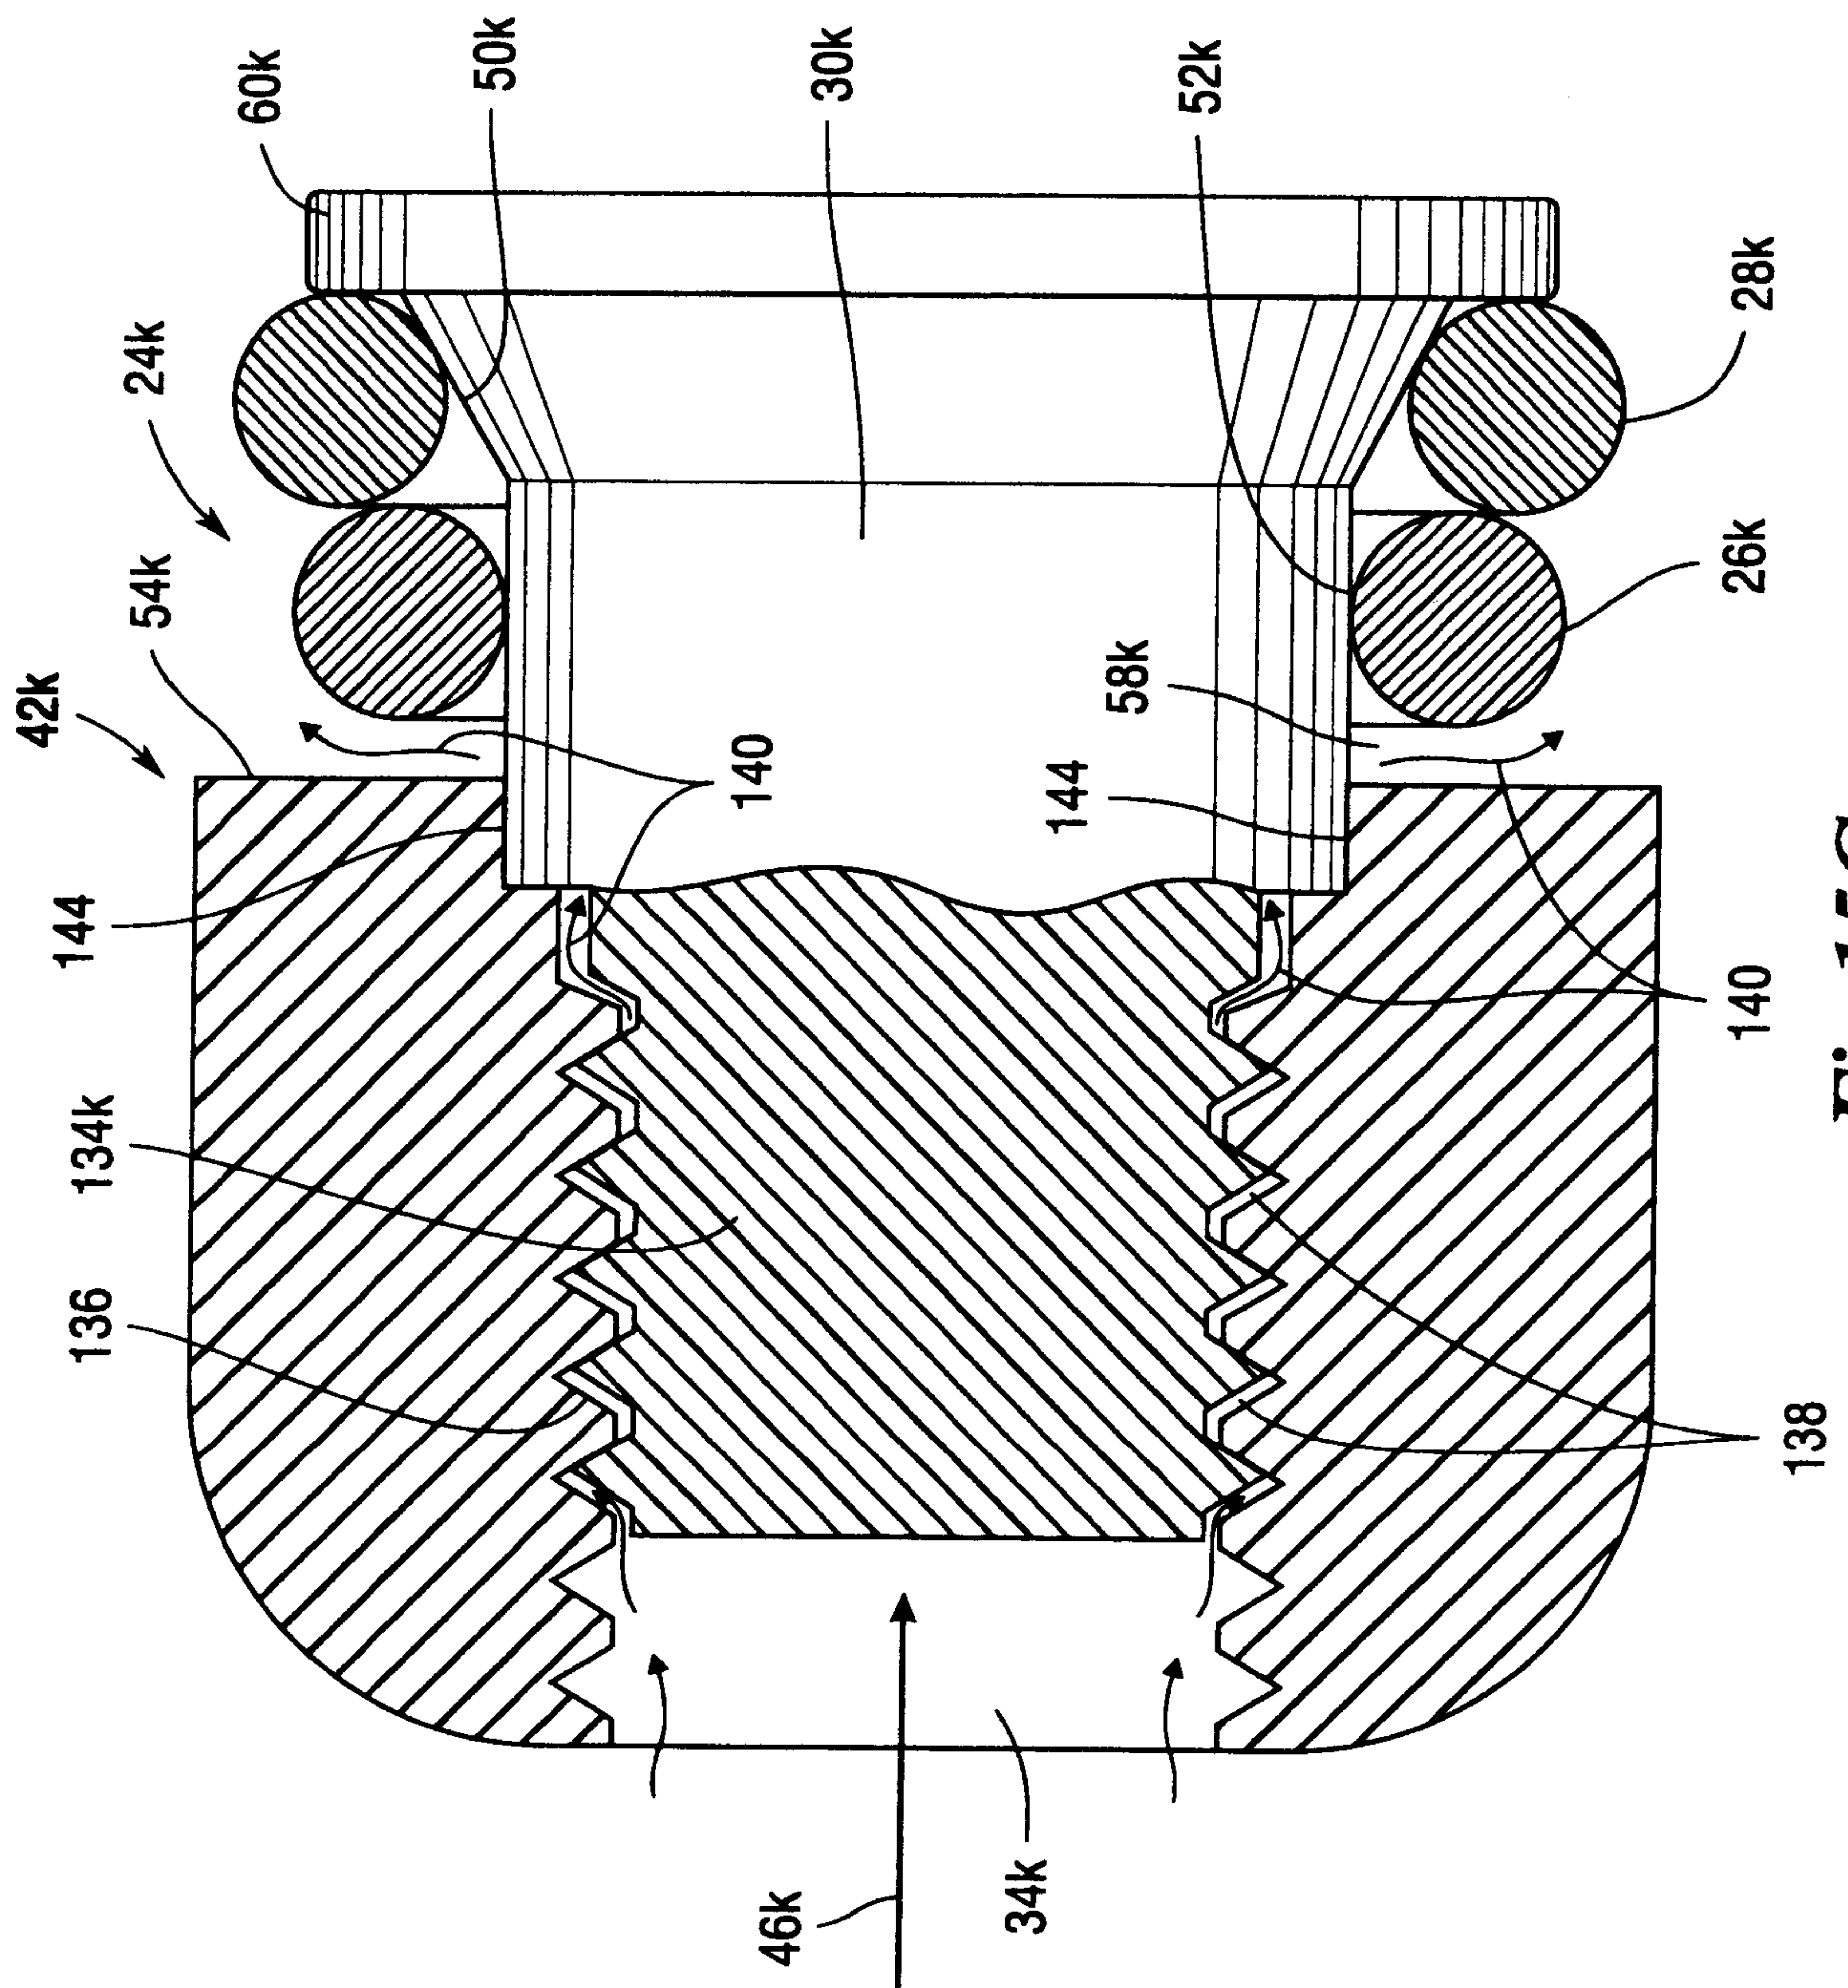


Fig. 15C

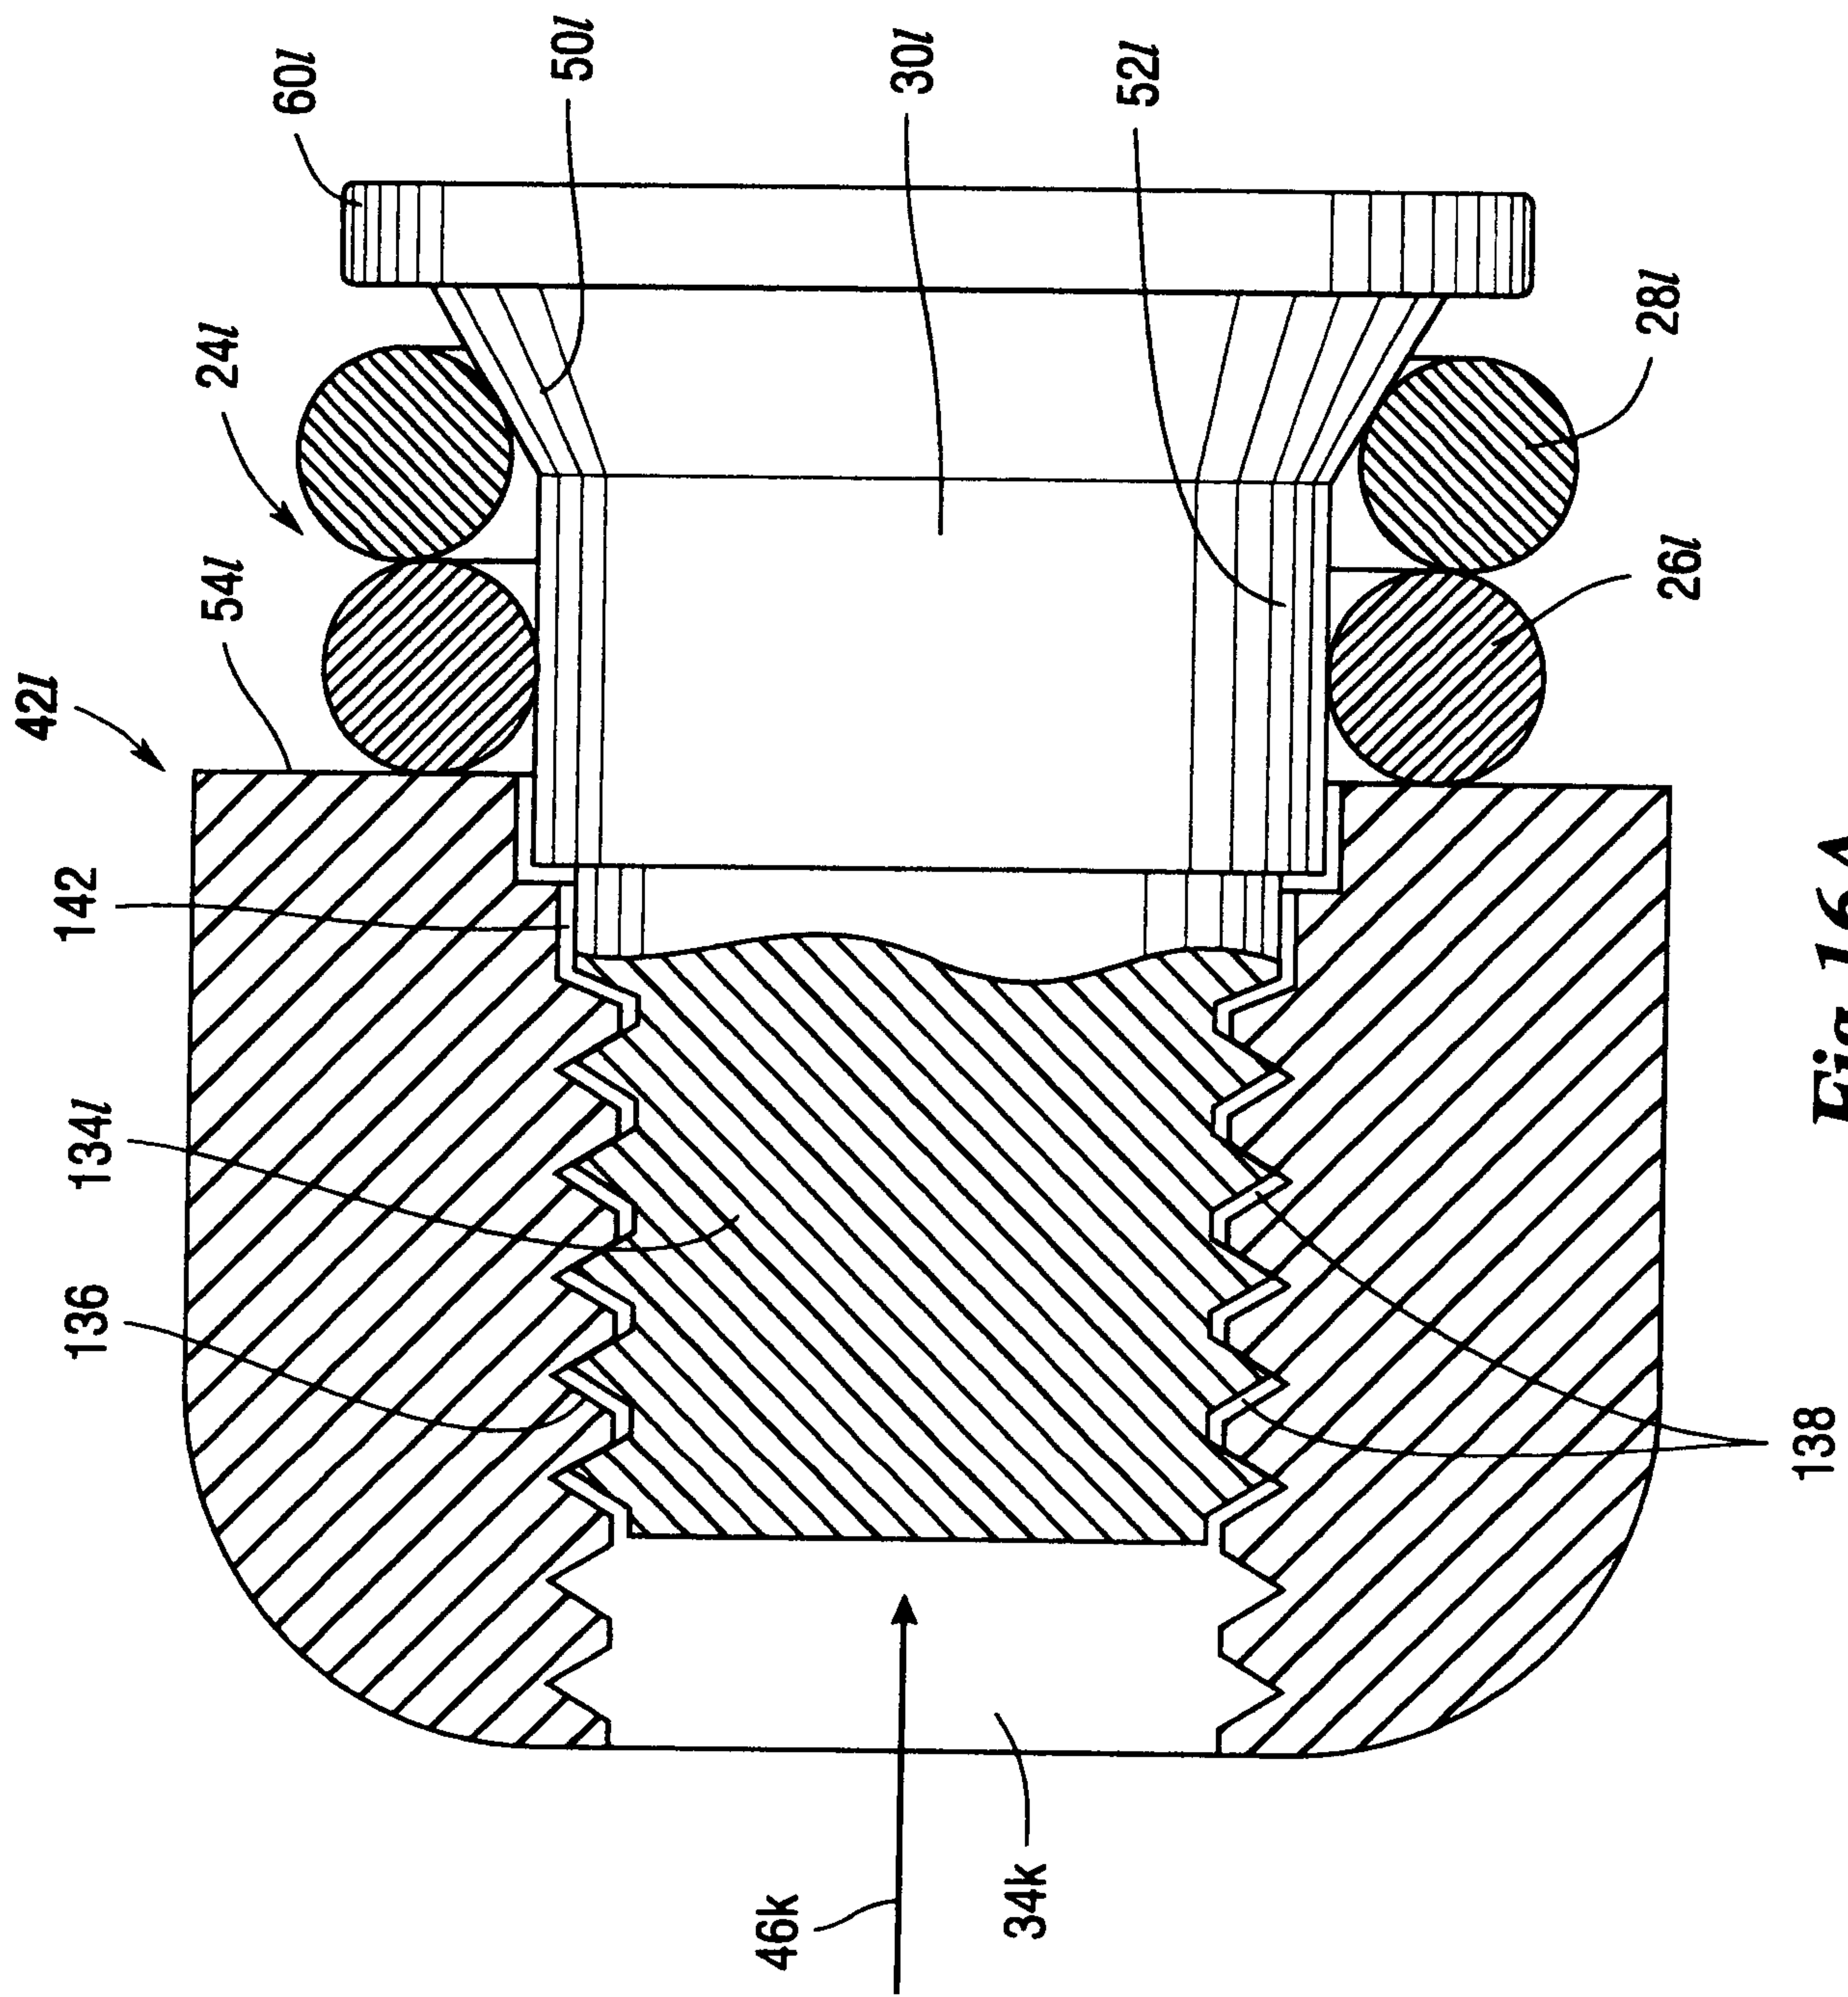


Fig. 16A

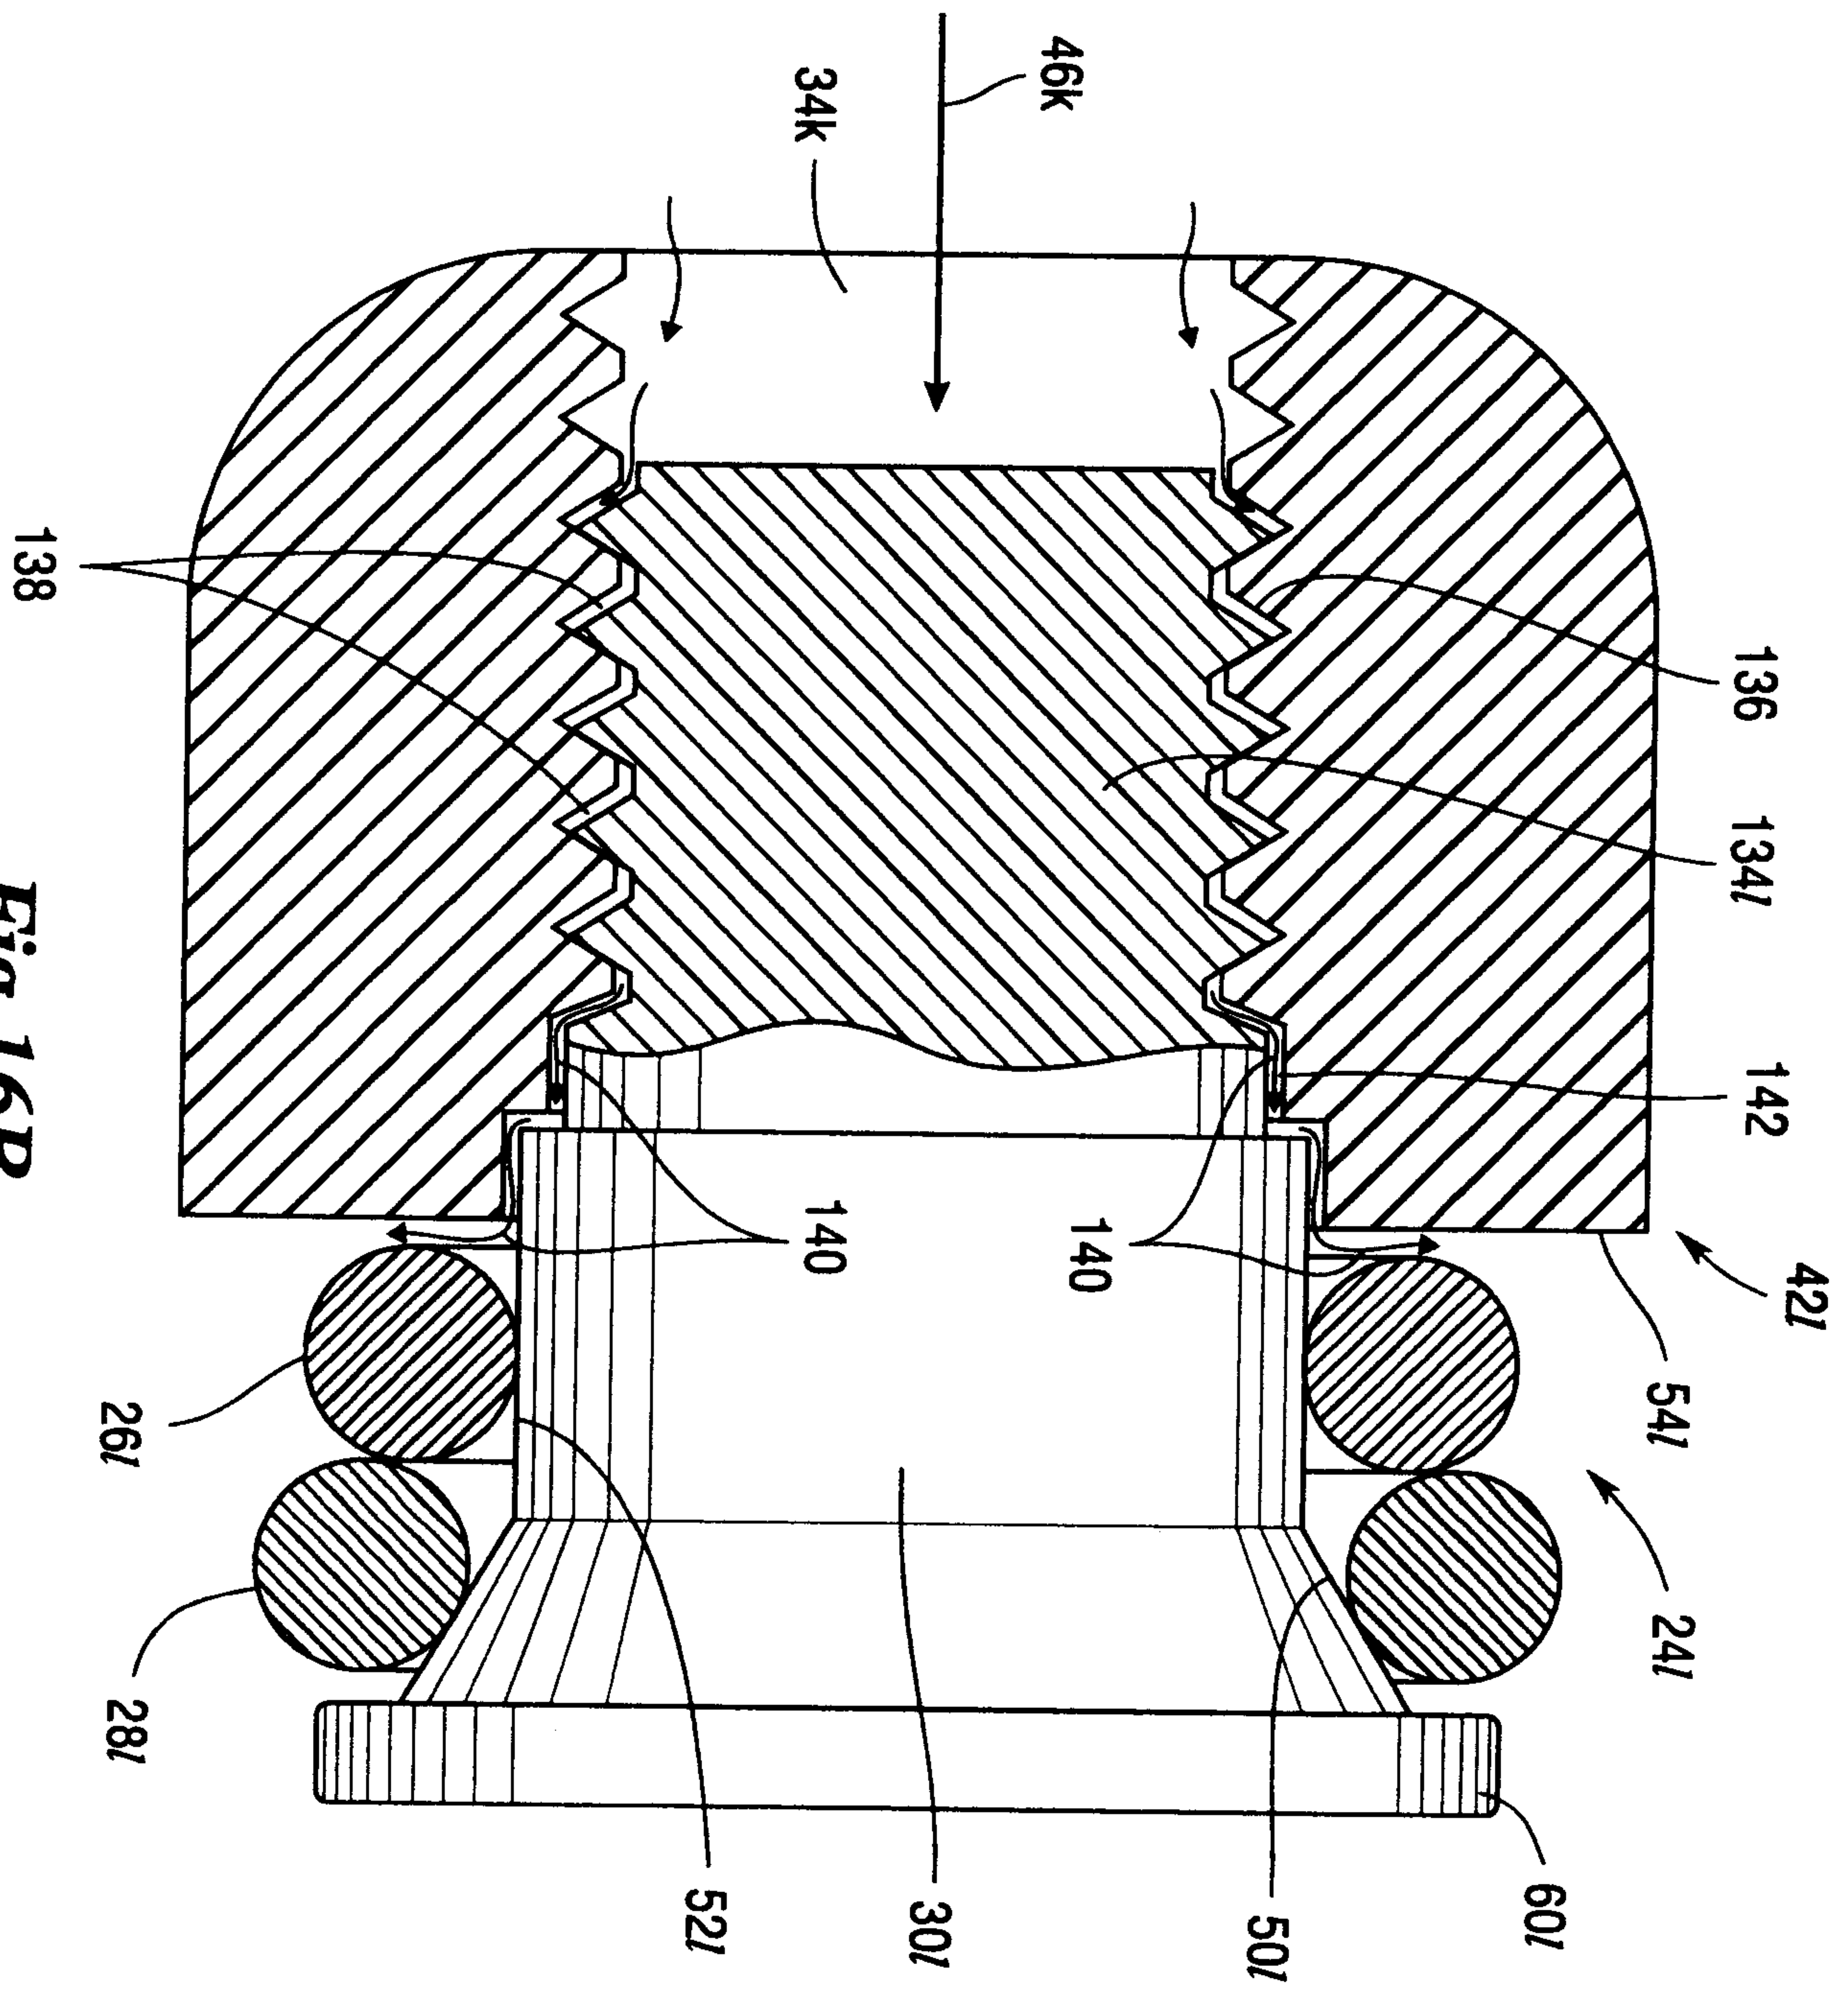


Fig. 16B

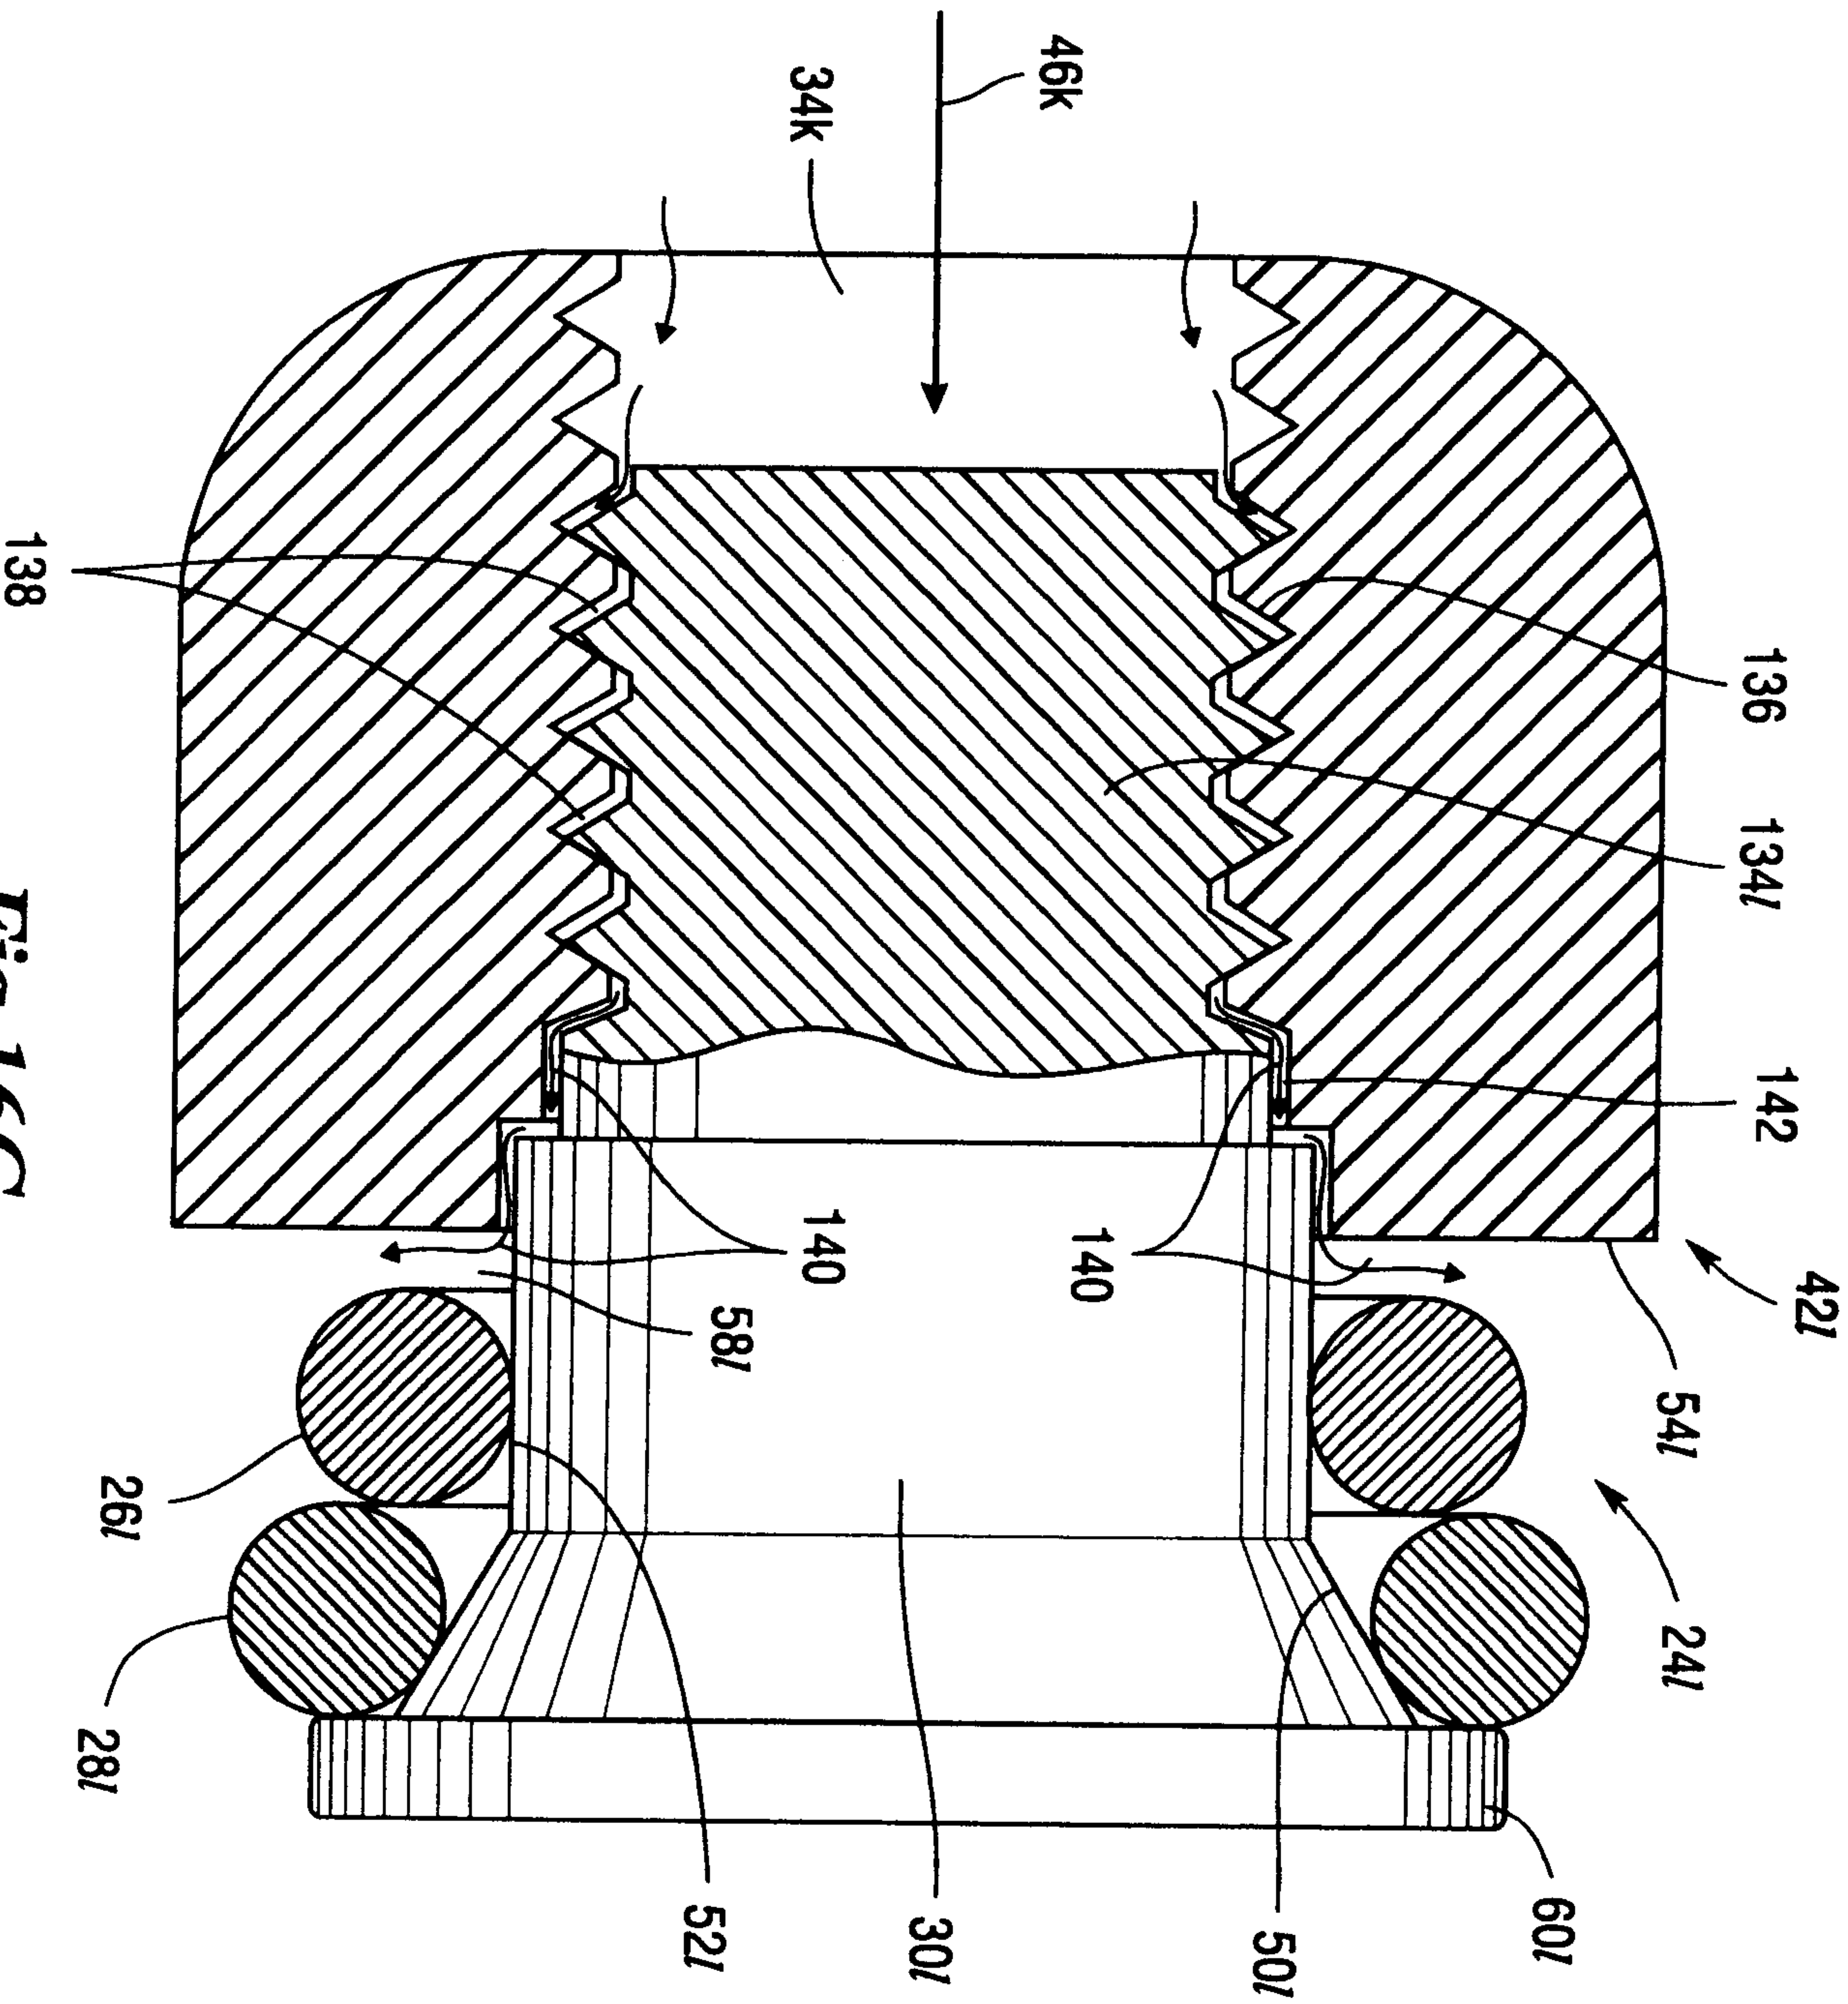


Fig. 16C

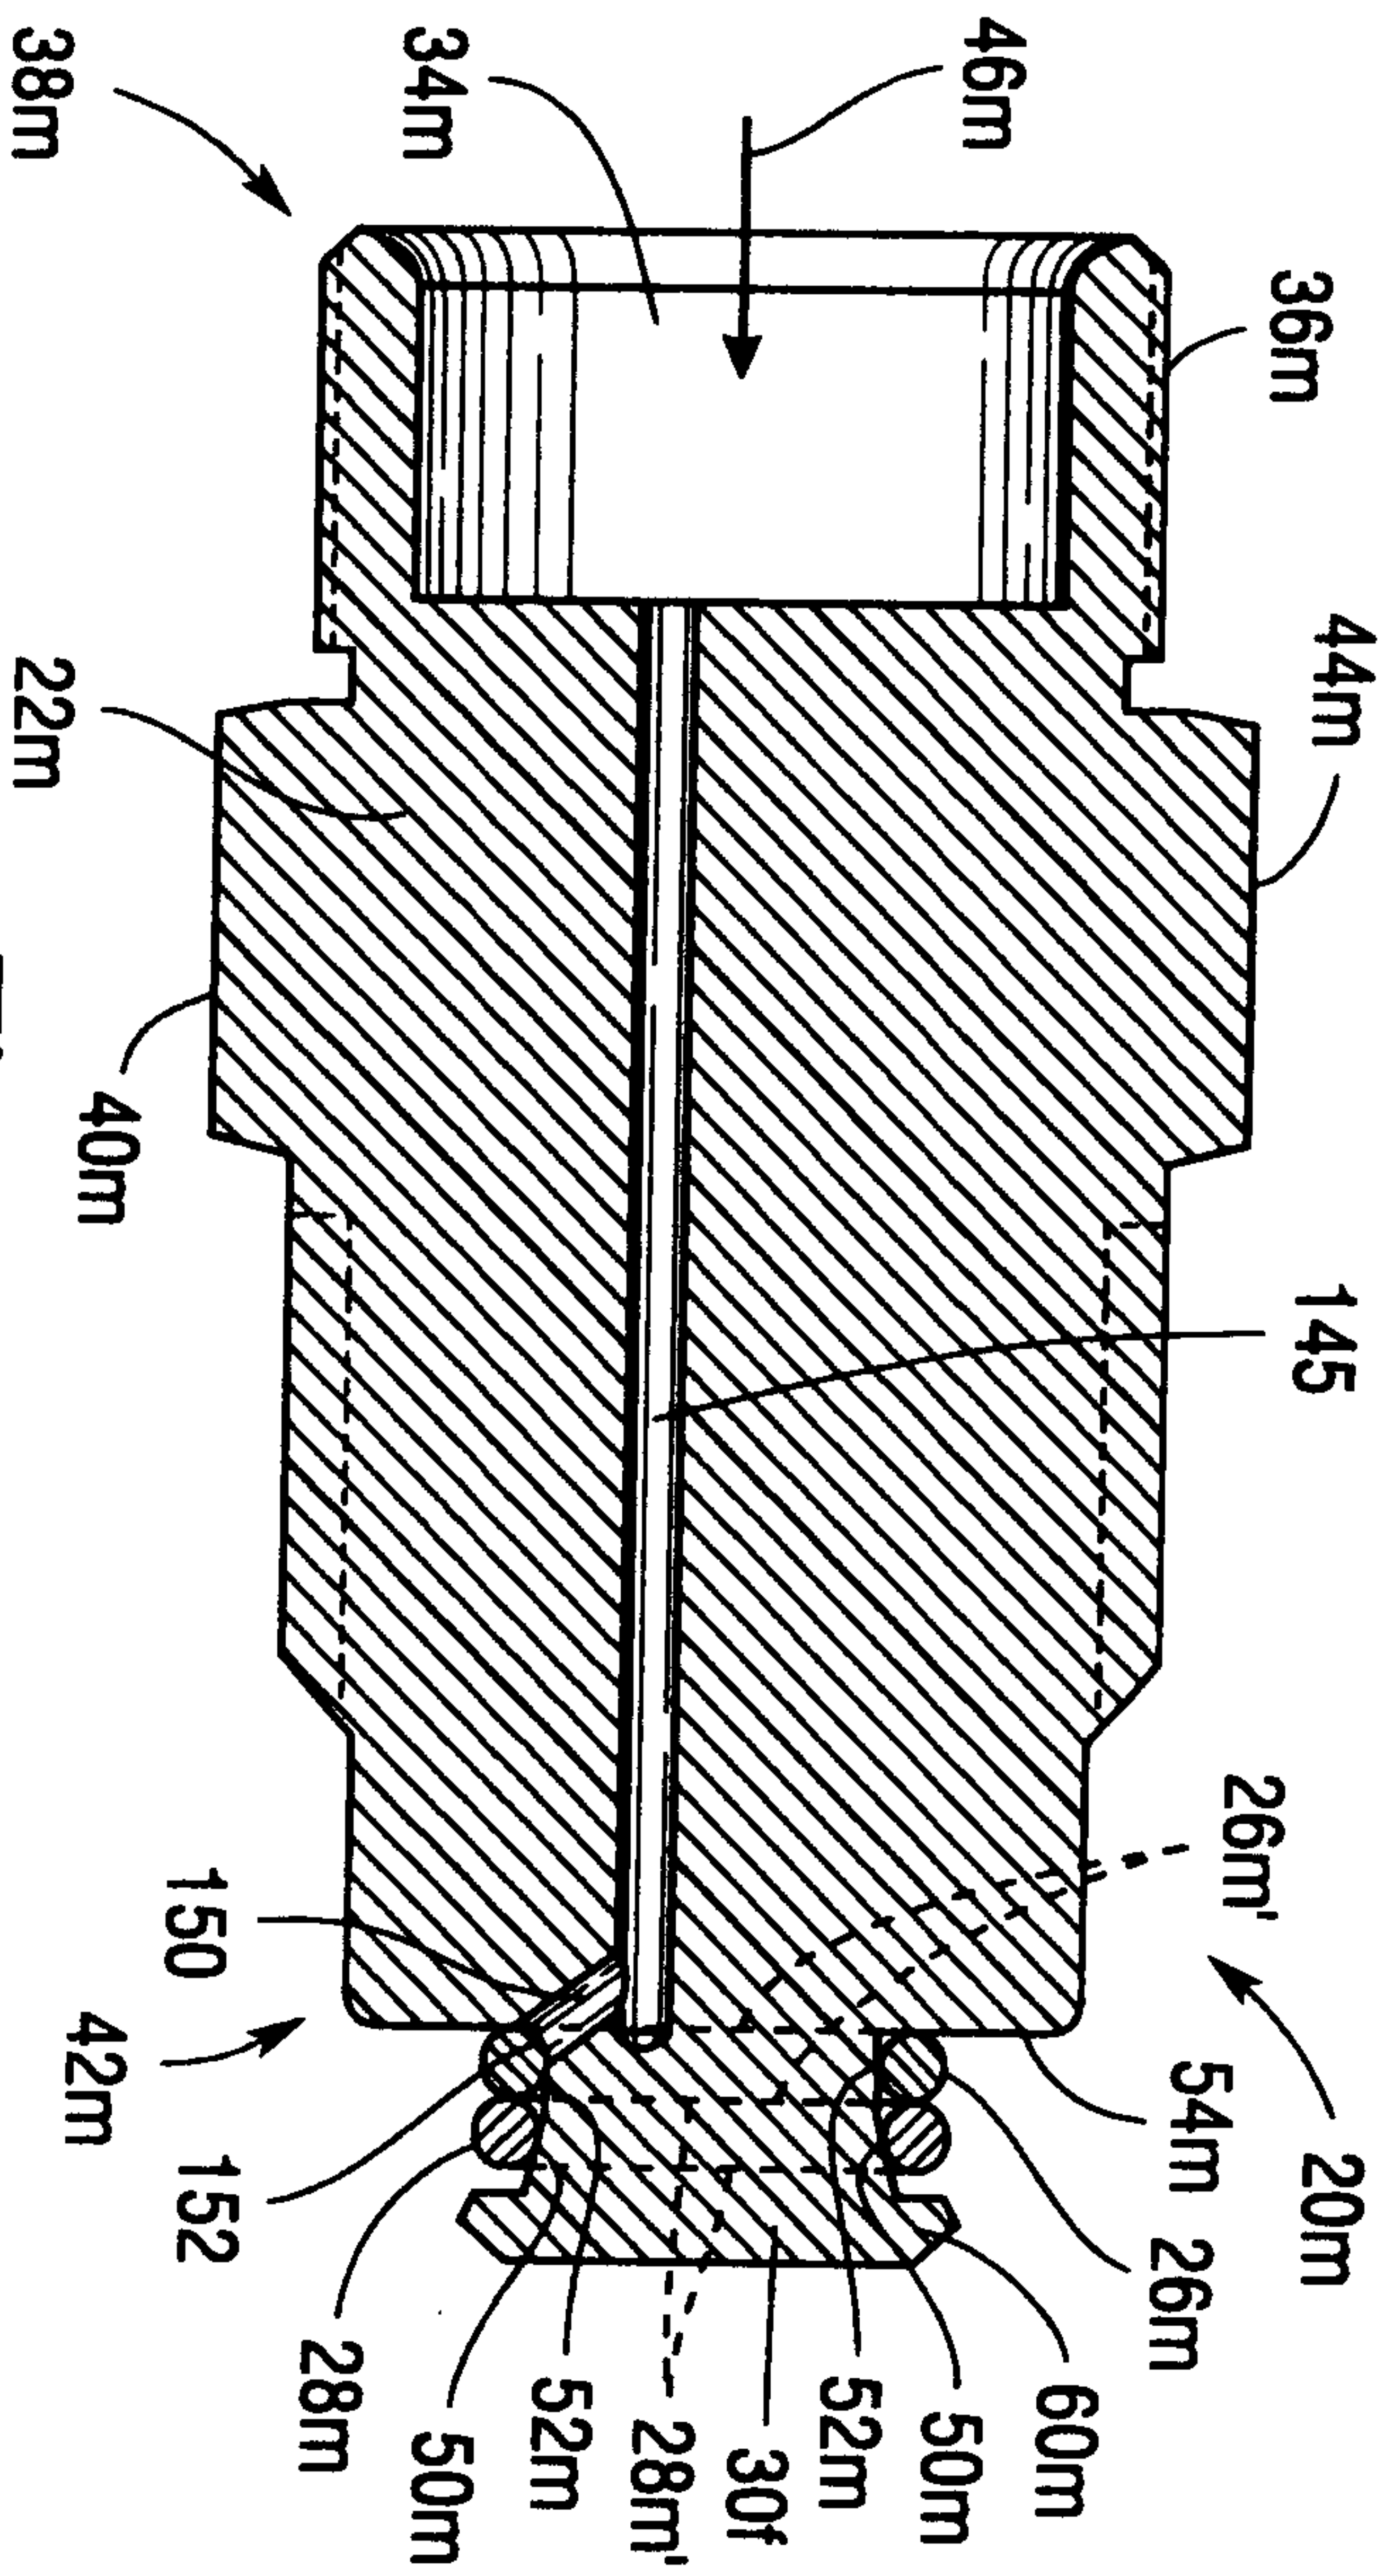


Fig. 17A

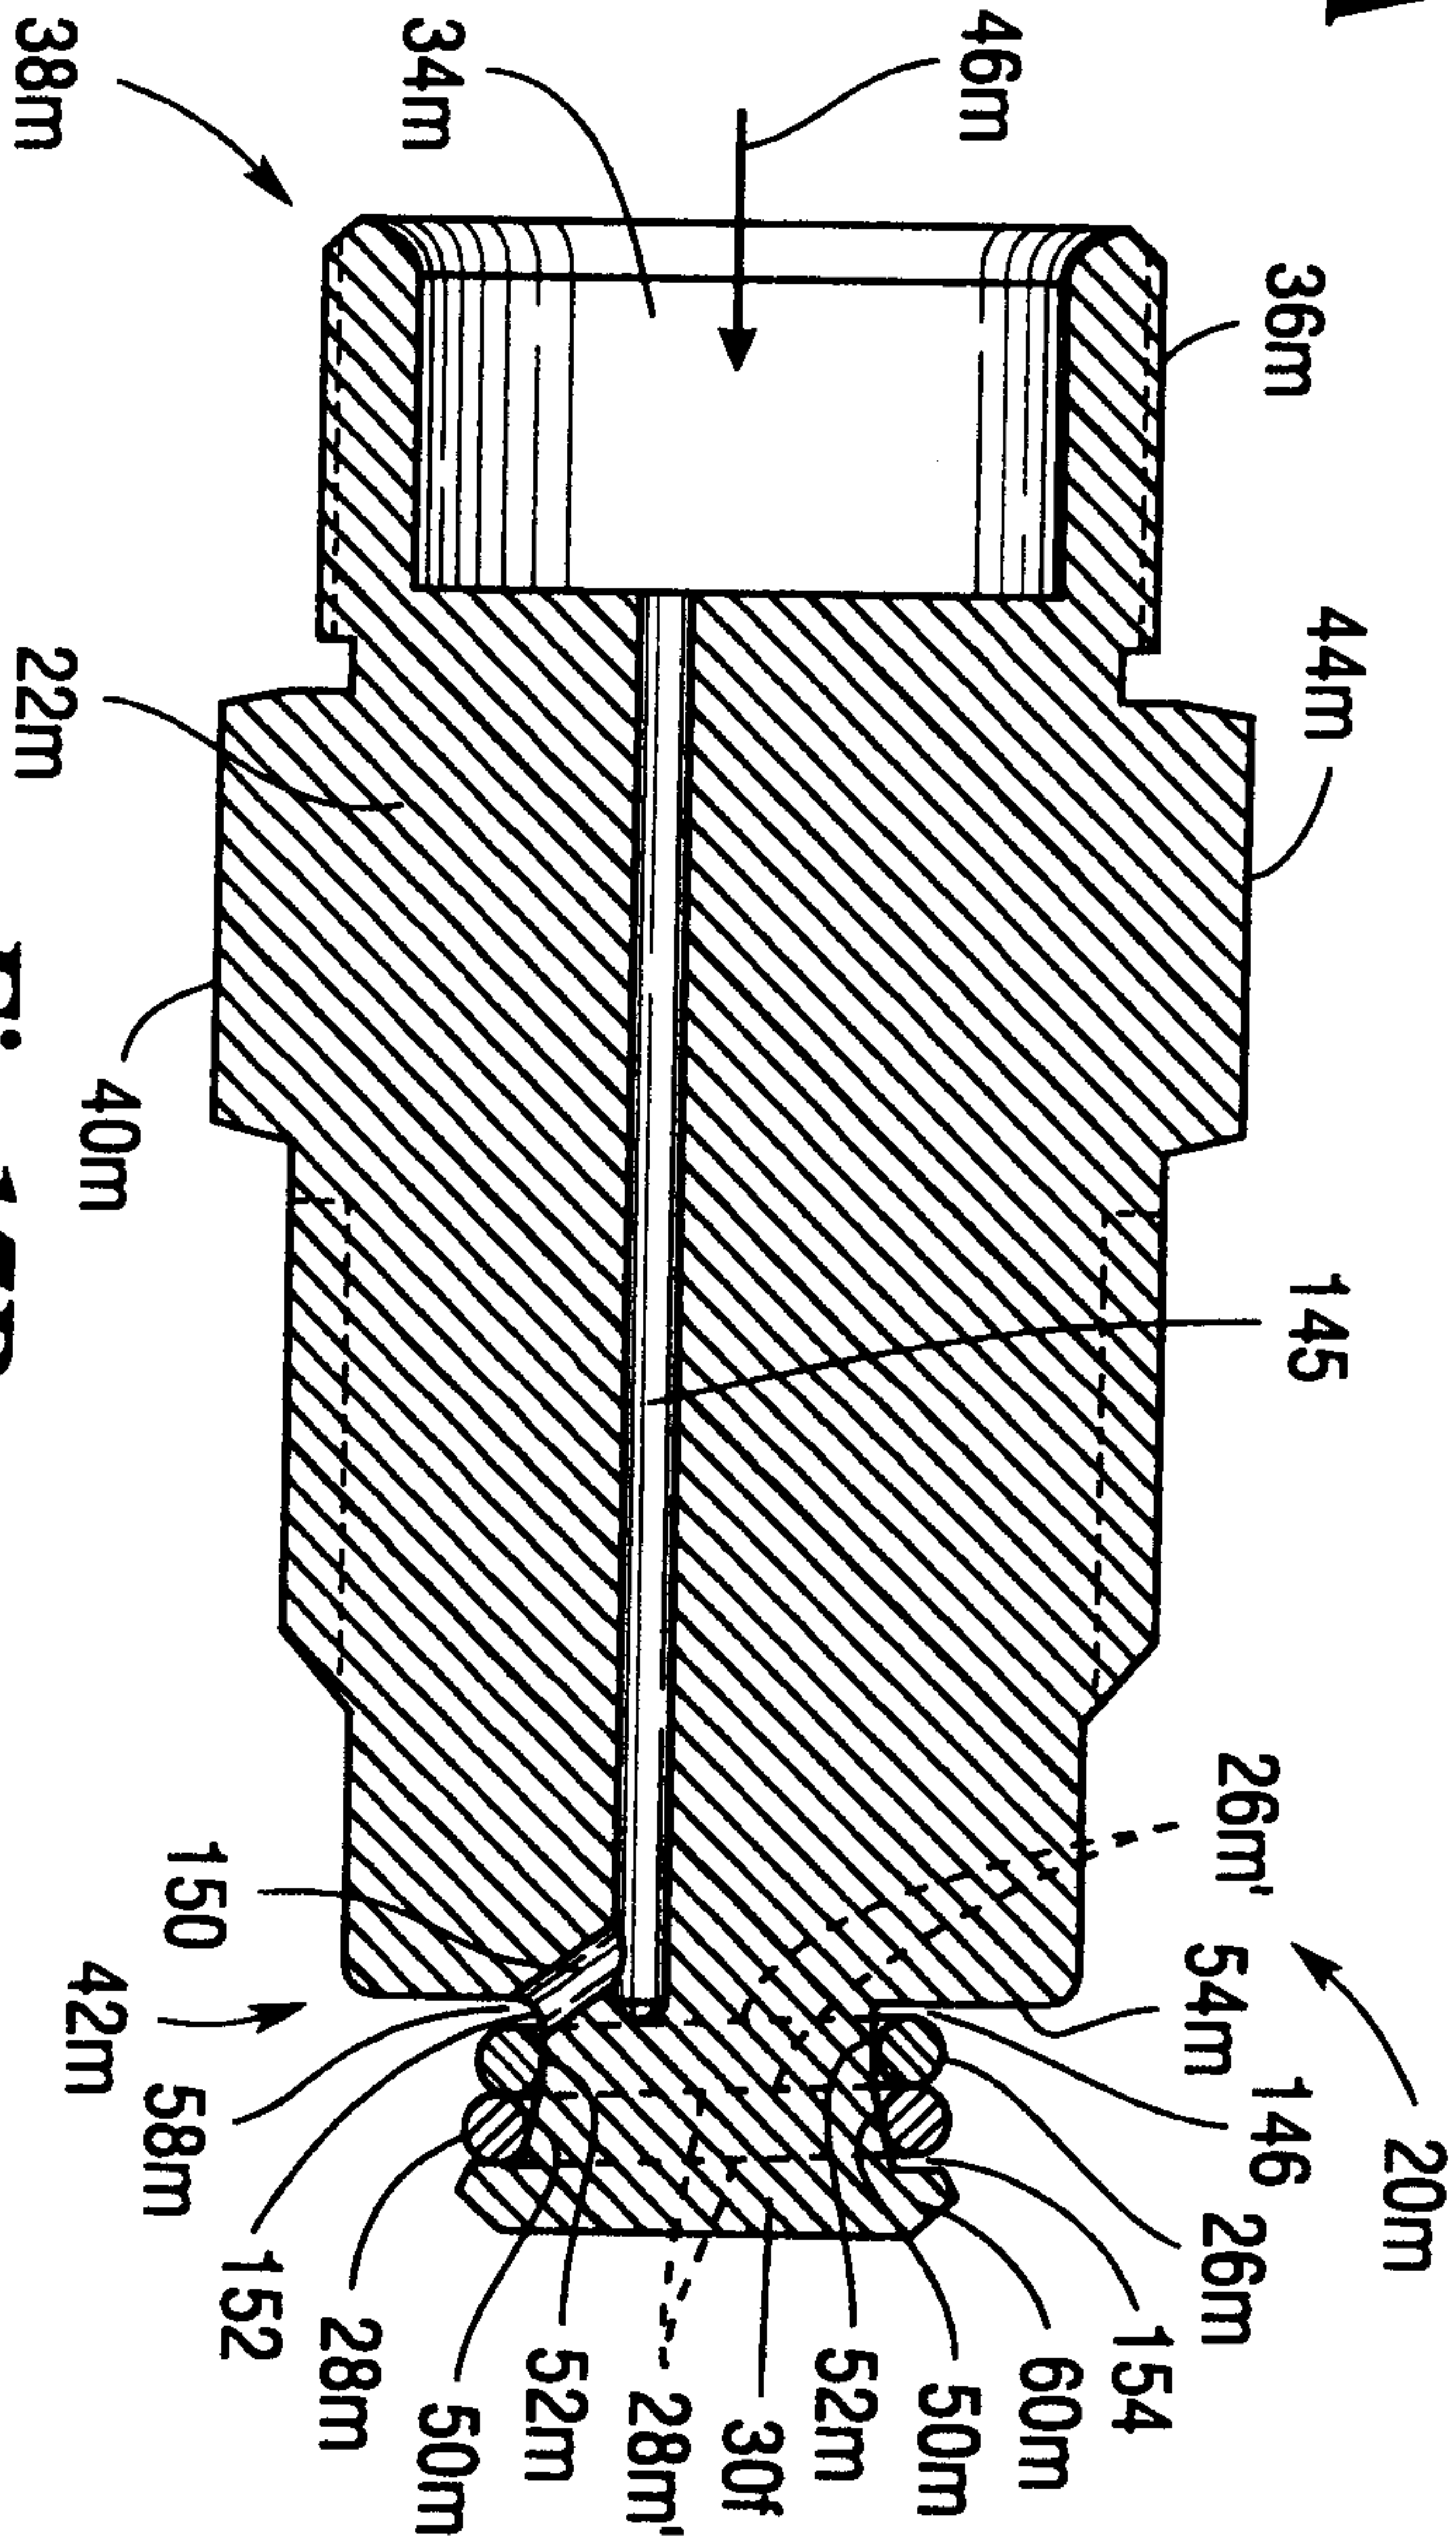


Fig. 17B

