



(51) International Patent Classification:
F02N 11/08 (2006.01)

(21) International Application Number:
PCT/US2018/037985

(22) International Filing Date:
18 June 2018 (18.06.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/523,418 22 June 2017 (22.06.2017) US
16/006,328 12 June 2018 (12.06.2018) US

(71) Applicant: **BORGWARNER INC.** [US/US]; 3850 Ham-
lin Road, Auburn Hills, MI 48326 (US).

(72) Inventors: **DRAGON, Andrew**; 11271 Duncan Drive,
Fishers, IN 46038 (US). **FULTON, David**; 4517 Golfview
Drive, Anderson, IN 46011 (US).

(74) Agent: **KERNUS, Victor**; Cantor Colburn LLP, 20 Church
Street, 22nd Floor, Hartford, Connecticut 06103 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: STARTER CONTROLLER FOR STARTER MOTOR

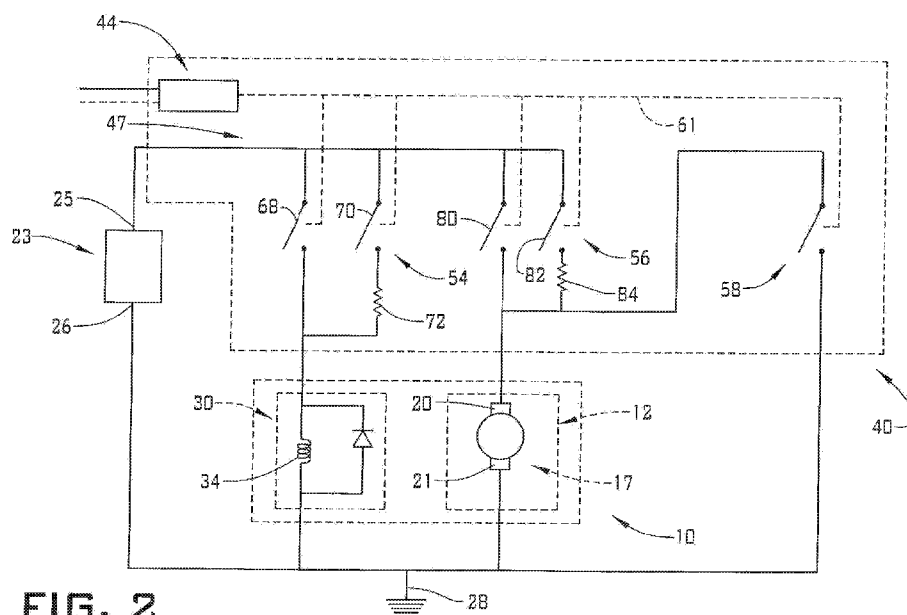


FIG. 2

(57) Abstract: A starter motor controller for a starter motor operatively connected to a single coil solenoid includes a first pair of switches including a first solenoid switch and a second solenoid switch. The first solenoid switch selectively completes a first electrical circuit for delivering a first electrical current to the single coil solenoid and the second solenoid switch selectively completes a second electrical circuit for delivering a second electrical current to the single coil solenoid that is less than the first electrical current. A second pair of switches includes a first starter motor switch and a second starter motor switch. The first starter motor switch selectively completes a first electrical circuit for delivering a first electrical power to the starter motor and the second starter motor switch selectively completes a second electrical circuit for delivering a second electrical power to the starter motor that is greater than the first electrical power.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

STARTER CONTROLLER FOR STARTER MOTOR

BACKGROUND OF THE INVENTION

[0001] Exemplary embodiments pertain to the art of motor vehicle starter motors and, more particularly, to a starter controller for a starter motor.

[0002] Starter motors are typically employed to initiate operation of an internal combustion engine. The starter motor includes an armature operatively connected to a pinion that is selectively extended into meshing engagement with a ring gear of the internal combustion engine. The armature is activated causing the pinion to rotate. Rotation of the pinion is transferred to the ring gear which, when other factors are present, causes the internal combustion engine to begin operation. Also typically, a solenoid is utilized to activate the starter motor.

[0003] The solenoid is operatively connected to a switch, such as a key switch, push button, or the like, that may be engaged when it is desired for the internal combustion engine to start. The solenoid includes a first or pull-in coil and a second or hold-in coil. Energizing both coils causes a plunger to move inwardly driving the pinion towards the ring gear and closes a set of contacts to enable motor operation. The pull-in coil is shorted when the set of contacts close and the hold-in coil holds the plunger in with a lower current while the pinion rotates. When the internal combustion engine starts, the pinion is drawn back in and the armature coasts to a stop. Currents associated with operating the solenoid are parasitic to motor operation and therefore should be reduced. During motor operation, a number of revolutions are accumulated for each engine starting event. Reducing the number of revolutions directly improves operational life of the motor.

BRIEF DESCRIPTION OF THE INVENTION

[0004] Disclosed is a starter motor controller for a starter motor operatively connected to a single coil solenoid. The starter motor controller includes a first pair of switches including a first solenoid switch and a second solenoid switch. The first solenoid switch selectively completes a first electrical circuit for delivering a first electrical current to the single coil solenoid and the second solenoid switch selectively completes a second electrical circuit for delivering a second electrical current to the single coil solenoid that is less than the first electrical current. A second pair of switches includes a first starter motor switch and a second starter motor switch. The first starter motor switch selectively completes a first electrical circuit for delivering a first electrical power to the starter motor and the

second starter motor switch selectively completes a second electrical circuit for delivering a second electrical power to the starter motor that is greater than the first electrical power.

[0005] Also disclosed is a method of controlling a starter motor operatively connected to a single coil solenoid including closing a first solenoid switch and a second solenoid switch of a first pair of switches to activate a solenoid and draw in a solenoid plunger with a first electrical current engaging a pinion with a ring gear of an internal combustion engine, opening one of the first and second solenoid switches of the first switch pair to hold in the solenoid plunger with a second electrical current that is less than the first electrical current, and closing at least one of a first starter motor switch and a second starter motor switch of a second switch pair to activate the starter motor at one of a first power and a second power that is greater than the first power.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The following descriptions should not be considered limiting in any way. With reference to the accompanying drawings, like elements are numbered alike:

[0007] FIG. 1 depicts a starter motor and single coil solenoid including a starter motor controller, in accordance with an exemplary embodiment;

[0008] FIG. 2 depicts a schematic diagram of the starter motor controller, in accordance with an aspect of an exemplary embodiment;

[0009] FIG. 3 depicts a schematic diagram of the starter motor controller showing solenoid plunger activation, in accordance with an aspect of an exemplary embodiment;

[0010] FIG. 4 depicts a schematic diagram of the starter motor controller showing solenoid plunger hold in, in accordance with an aspect of an exemplary embodiment;

[0011] FIG. 5 depicts a schematic diagram of the starter motor controller showing starter motor activation at a first power, in accordance with an aspect of an exemplary embodiment;

[0012] FIG. 6 depicts a schematic diagram of the starter motor controller showing starter motor activation at a second, higher power, in accordance with an aspect of an exemplary embodiment; and

[0013] FIG. 7 depicts a schematic diagram of the starter motor controller showing a back EMF discharge circuit completion, in accordance with an aspect of an exemplary embodiment.

DETAILED DESCRIPTION OF THE INVENTION

[0014] A detailed description of one or more embodiments of the disclosed apparatus and method are presented herein by way of exemplification and not limitation with reference to the Figures.

[0015] A starter motor, in accordance with an exemplary embodiment, is indicated generally at 10 in FIG. 1. Starter motor 10 includes a starter motor housing 12 that supports a pinion gear 14 and a starter motor armature 17 as shown in FIG. 2. Starter motor armature 17 includes a first terminal 20 and a second terminal 21 connected to a battery 23. More specifically, first terminal 20 may be electrically connected to a positive terminal 25 of battery 23 and second terminal 21 may be electrically connected to a negative terminal 26 of battery 23 and a ground 28. First terminal 20 may take the form of a first brush (not separately labeled) and second terminal 21 may take the form of a second brush (also not separately labeled). Starter motor housing 12 may also support a solenoid 30 having a plunger (not shown) that selectively shifts pinion gear 14 into contact with a ring gear 33 of an internal combustion engine (also not shown). Solenoid 30, in accordance with an exemplary embodiment, includes a single coil solenoid 34. Therefore, solenoid 30 takes the form of a single coil solenoid 34.

[0016] In accordance with an exemplary aspect, starter motor 10 is operatively connected to a starter motor controller 40 including a microcontroller 44 and a plurality of switches 47 as shown in FIG. 2. Plurality of switches 47 includes a first switch pair 54, a second switch pair 56, and a back electromotive force (EMF) discharge switch 58 operatively connected to microcontroller 44 through a control circuit 61. Plurality of switches 47 may take the form of metal oxide semiconductor field effect transistor (MOSFET) switches, magnetic switches, or other controllable members that may selectively interrupt and connect an electrical circuit. It should be understood that plurality of switches 47 may also take the form of a combination of the above.

[0017] In accordance with an exemplary aspect, when an engine initiation signal is received by starter motor controller 40, microcontroller 44 closes first solenoid switch 68 and second solenoid switch 70 as shown in FIG. 3 causing single coil solenoid 34 to be energized and the solenoid plunger (not shown) to be drawn inwardly and pinion gear 14 shifted into engagement with ring gear 33. After a first period of time from initial activation, about 25 milliseconds (ms), first solenoid switch 68 is opened as shown in FIG. 4 causing activation current to flow through first resistor 72. It is to be understood that the first period of time

may vary. Activation current may drop from about 40 amps (A) when first and second solenoid switches (68 and 70) are closed to about 10 A with first solenoid switch 68 open.

[0018] At about the same time first solenoid switch 68 is opened, second starter motor switch 82 is closed causing motor activation current to pass through second resistor 84 as shown in FIG. 5. In this configuration, starter motor 10 may be operating at a first electrical power. In accordance with an exemplary aspect, the first power may be half power with motor activation current being about 400 amps to about 600 amps. After a second period of time from initial activation, first starter motor switch 80 may be closed causing starter motor 10 to operate at a second electrical power that is greater than the first power. Of course, it should be understood that starter motor 10 may simply be activated at the first power in order to start a warm internal combustion engine. Additionally, starter motor 10 may be activated at the second power only in order to start a cold internal combustion engine. In accordance with an exemplary aspect, motor activation current may be about 40 A. In further accordance with an exemplary aspect, the second period of time may be between about 75 ms and about 175 ms. Of course, it is to be understood that the period of time may vary.

[0019] Once the internal combustion engine has started, first switch pair 54 and second switch pair 56 are opened disconnecting solenoid 30 and starter motor armature 17 from battery 23 as shown in FIG. 2. At this point, the solenoid plunger begins to retract and starter motor armature 17 coasts toward a stop. Typically, the internal combustion engine is started after a third period of time from initial activation, between about 500 ms and about 1000 ms, from initial activation.

[0020] After first switch pair 54 and second switch pair 56 are opened back EMF discharge switch 58 is closed causing current in starter motor armature 17 to flow to ground. Current flows due to voltage generated by motor armature 17 which is still rotating when switch 58 is closed. Peak current flowing through back EMF discharge switch 58 may be as high as about 1000 A or more. By forming a circuit with ground, a generating torque is applied to motor armature 17 reducing coast down revolutions and subsequently reducing wear on starter motor armature 17 and the first and second brushes. After a fourth period of time from initial activation, between about 700 ms and about 1400 ms, starter motor 10 coast down is finished and back EMF discharge switch 58 is opened.

[0021] The term “about” is intended to include the degree of error associated with measurement of the particular quantity based upon the equipment available at the time of filing the application. For example, “about” can include a range of $\pm 8\%$ or 5% , or 2% of a given value.

[0022] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, element components, and/or groups thereof.

[0023] While the invention has been described with reference to an exemplary embodiment or embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the claims.

CLAIMS

What is claimed is:

1. A starter motor controller for a starter motor operatively connected to a single coil solenoid, the starter motor controller comprising:

a first pair of switches including a first solenoid switch and a second solenoid switch, the first solenoid switch selectively completing a first electrical circuit for delivering a first electrical current to the single coil solenoid and the second solenoid switch selectively completing a second electrical circuit for delivering a second electrical current to the single coil solenoid that is less than the first electrical current; and

a second pair of switches including a first starter motor switch and a second starter motor switch, the first starter motor switch selectively completing a first electrical circuit for delivering a first electrical power to the starter motor and the second starter motor switch selectively completing a second electrical circuit for delivering a second electrical power to the starter motor that is greater than the first electrical power.

2. The starter motor controller according to claim 1, further comprising: a back EMF discharge switch selectively electrically connecting the starter motor to ground.

3. The starter motor controller according to claim 1, further comprising: a microcontroller, each of the first pair of switches and the second pair of switches being operatively coupled to the microcontroller.

4. The starter motor controller according to claim 3, wherein at least one of the first pair of switches and at least one of the second pair of switches comprises a metal oxide semiconductor field effect transistor (MOSFET) switch.

5. The starter motor controller according to claim 3, wherein each of the first pair of switches and the second pair of switches comprises MOSFET switch.

6. The starter motor controller according to claim 3, wherein at least one of the first pair of switches and at least one of the second pair of switches comprises a magnetic switch.

7. The starter motor controller according to claim 3, wherein each of the first pair of switches and the second pair of switches comprises a magnetic switch.

8. A method of controlling a starter motor operatively connected to a single coil solenoid comprising:

closing a first solenoid switch and a second solenoid switch of a first pair of switches to activate a solenoid and draw in a solenoid plunger with a first electrical current engaging a pinion with a ring gear of an internal combustion engine;

opening one of the first and second solenoid switches of the first switch pair to hold in the solenoid plunger with a second electrical current that is less than the first electrical current; and

closing at least one of a first starter motor switch and a second starter motor switch of a second switch pair to activate the starter motor at one of a first power and a second power that is greater than the first power.

9. The method of claim 8, wherein the one of the first and second solenoid switches is opened about 25 milliseconds after the first and second solenoid switches are closed.

10. The method of claim 8, wherein closing the at least one of the first starter motor switch and the second starter motor switch includes closing the first starter motor switch to activate the starter motor at half power.

11. The method of claim 10, further comprising: closing both of the first starter motor switch and the second starter motor switch to activate the starter motor at full power.

12. The method claim 8, further comprising: initially closing the first starter motor switch to activate the starter motor at the first power and closing the second starter motor switch to activate the starter motor at the second power.

13. The method of claim 12, wherein closing the second starter motor switch includes closing the second starter motor switch between about 75 and about 175 milliseconds after closing the first starter motor switch.

14. The method of claim 8, further comprising: operating the first switch pair and the second switch pair to interrupt a flow of electrical energy to each of the solenoid and the starter motor.

15. The method of claim 14, further comprising: closing a back EMF electrically connecting the each of a first starter motor terminal and a second starter motor terminal to ground.

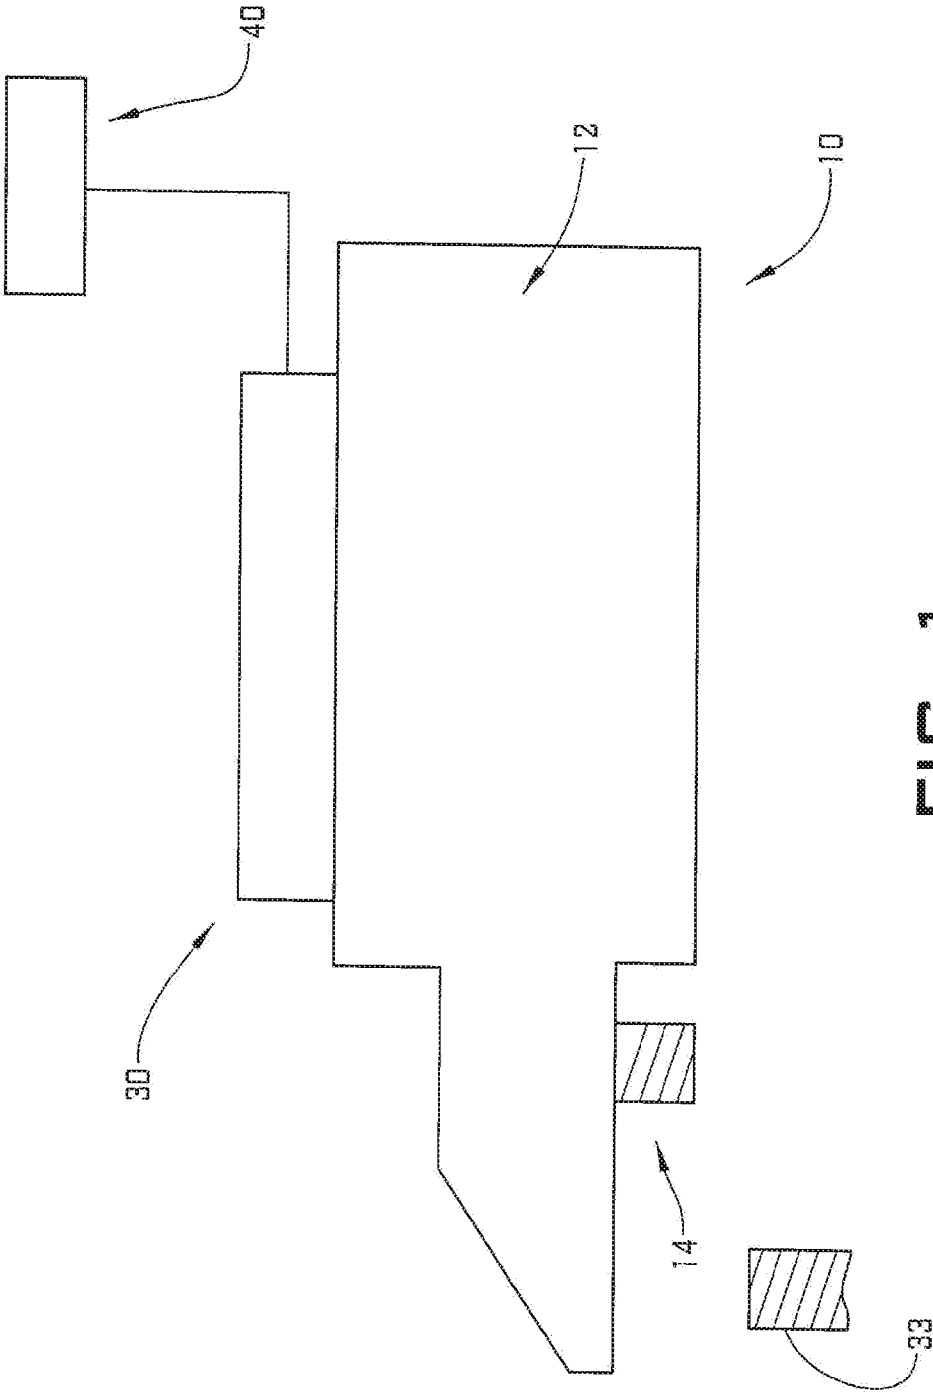


FIG. 1

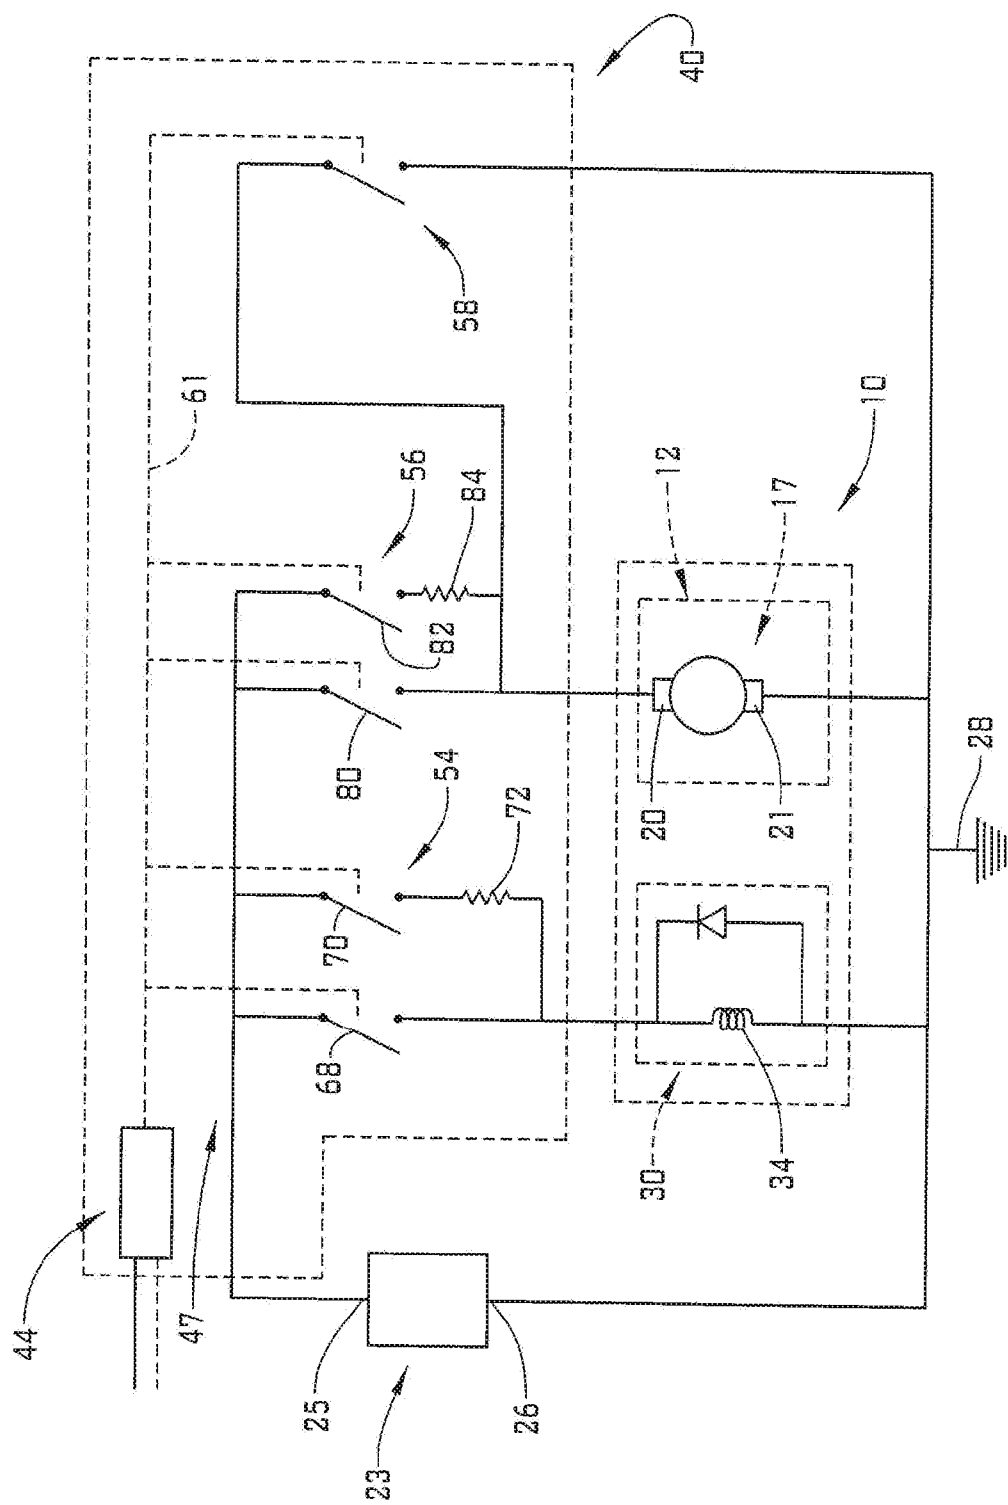


FIG. 2


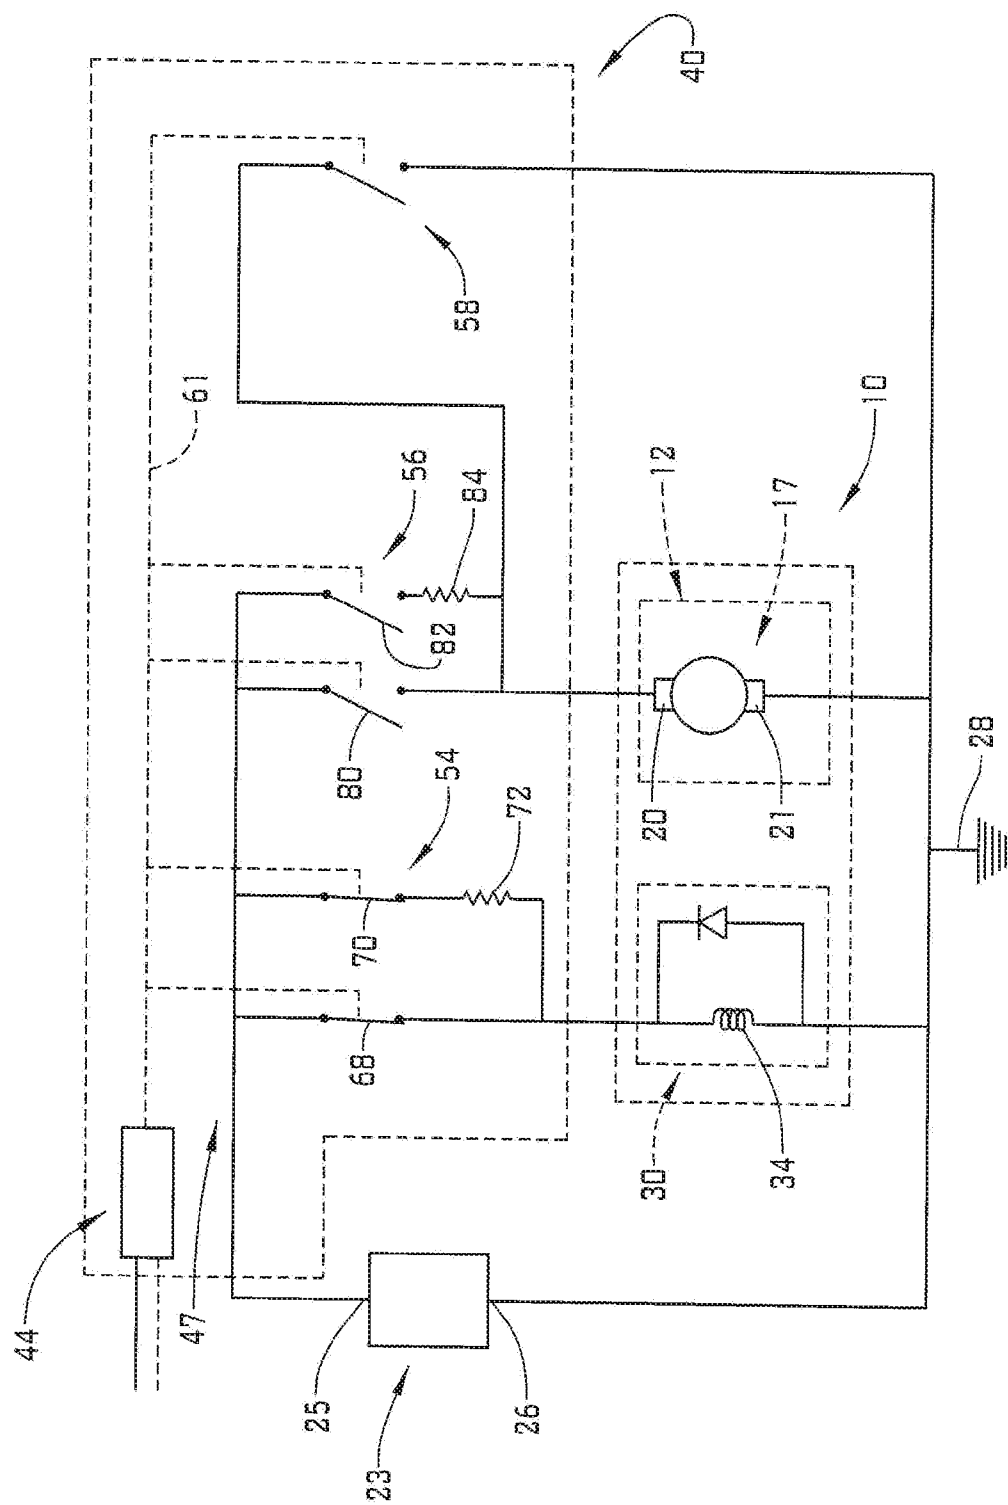


FIG. 3

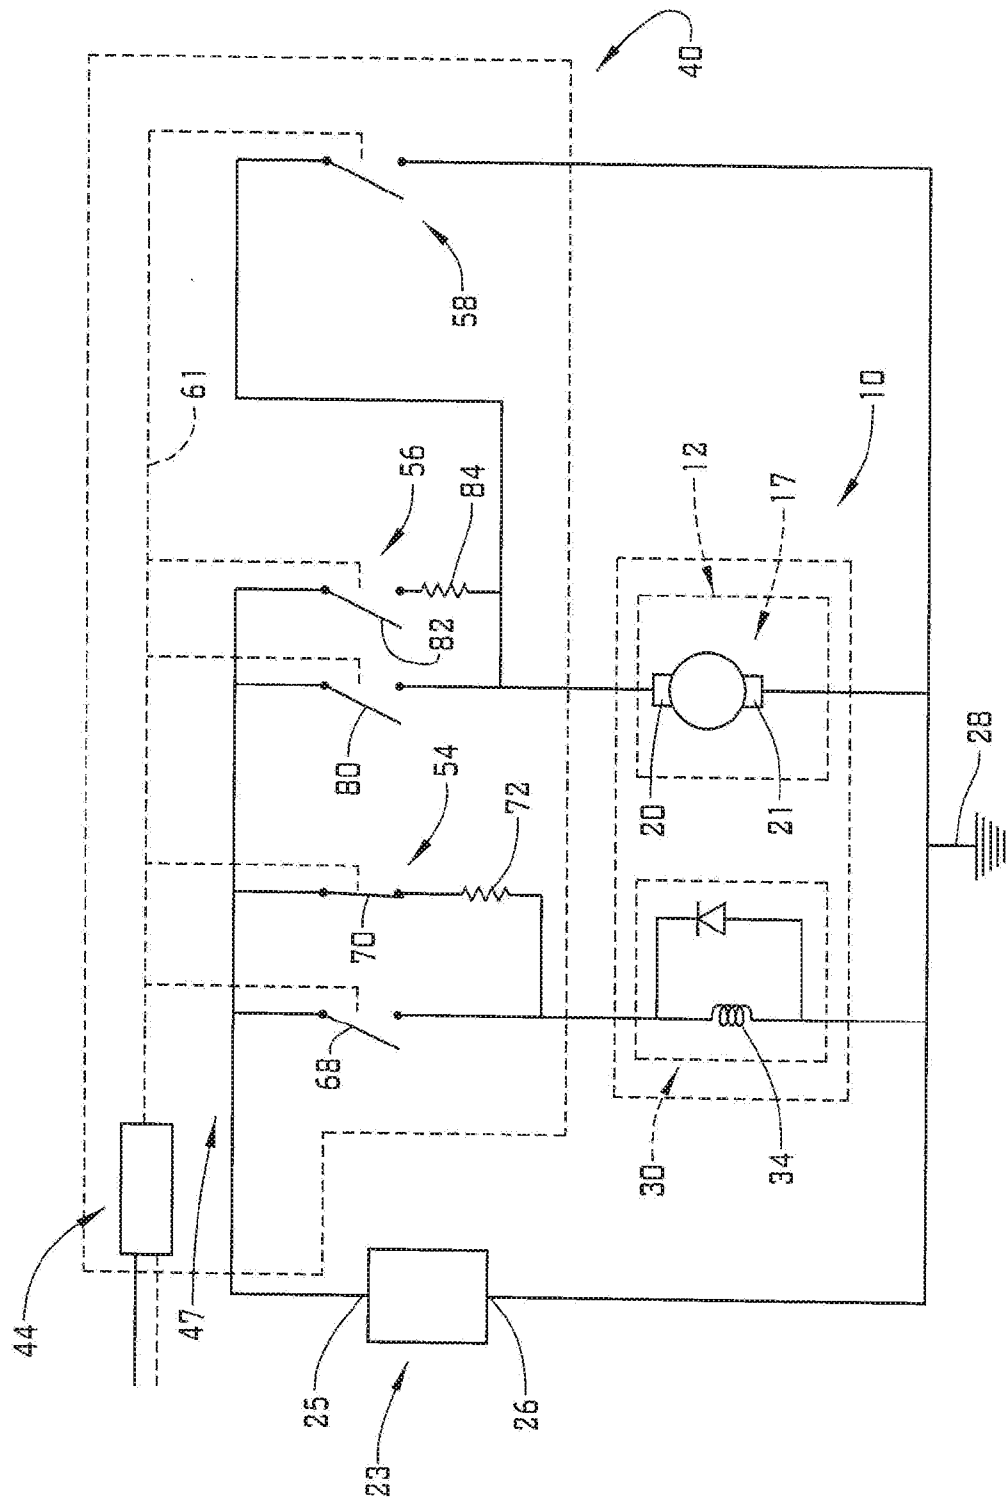

৭৬


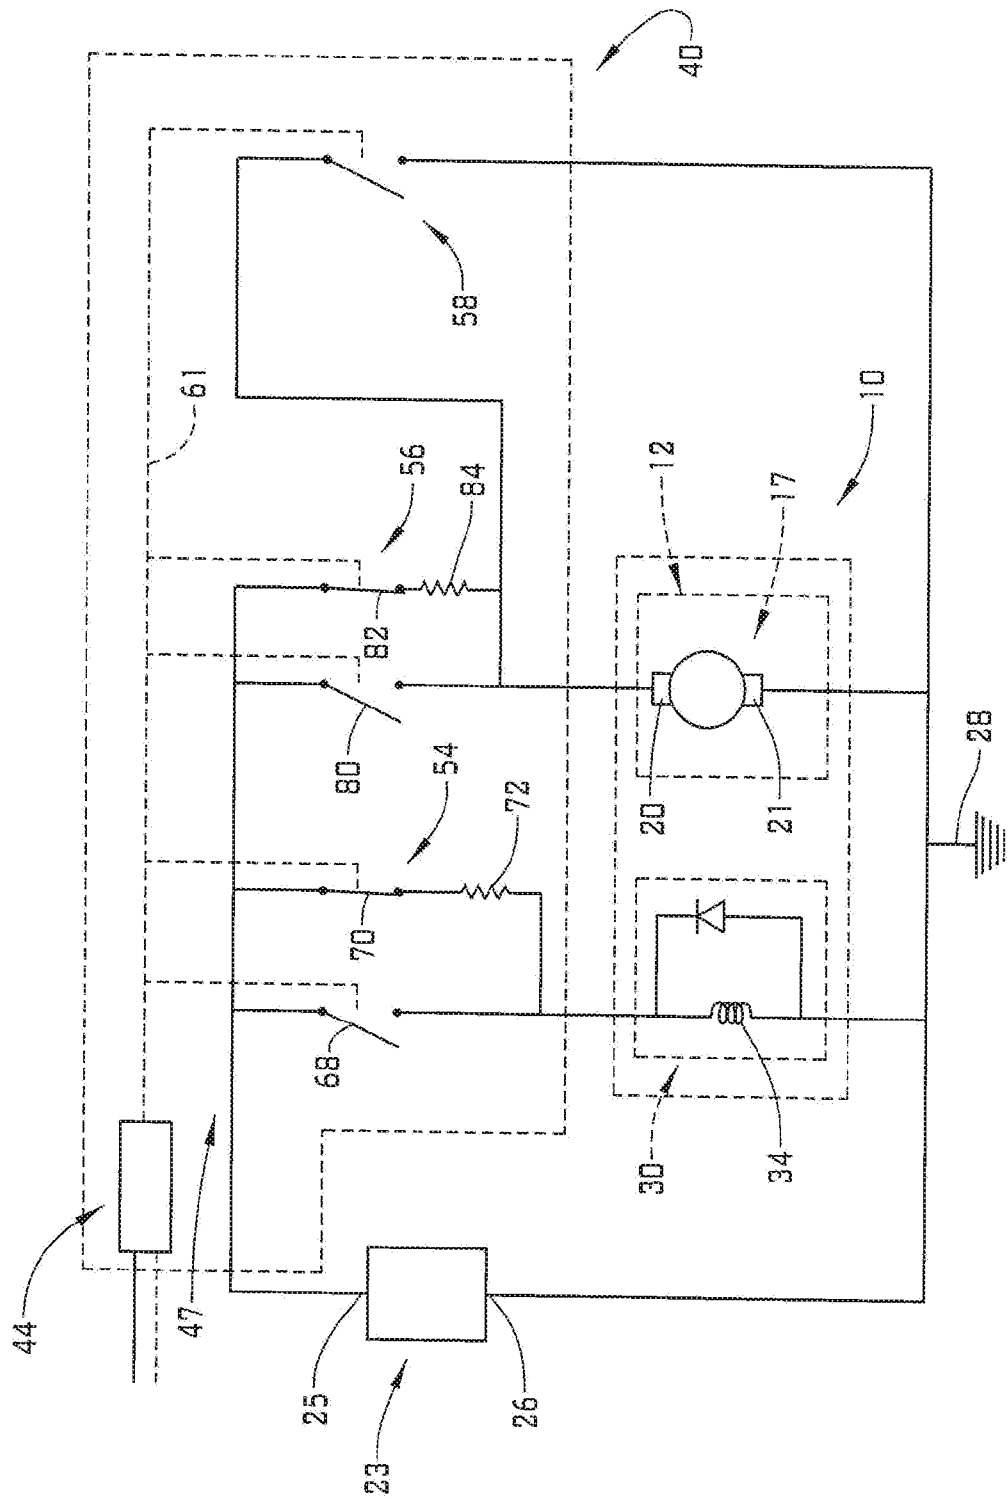


FIG. 5

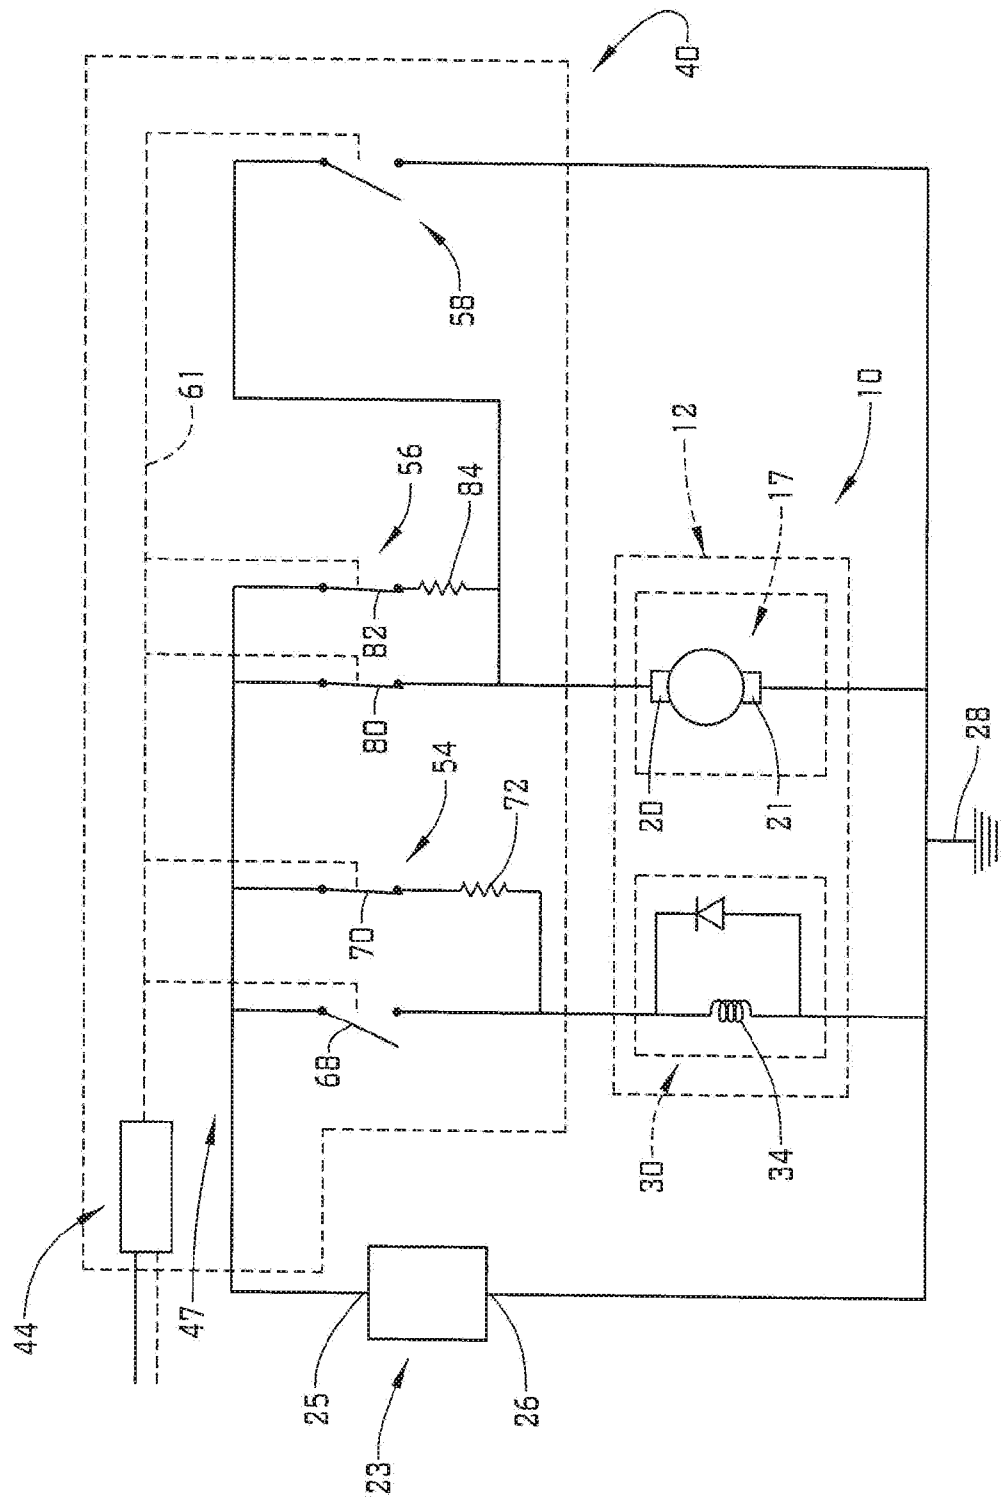

5. የግንባታ ሥራ

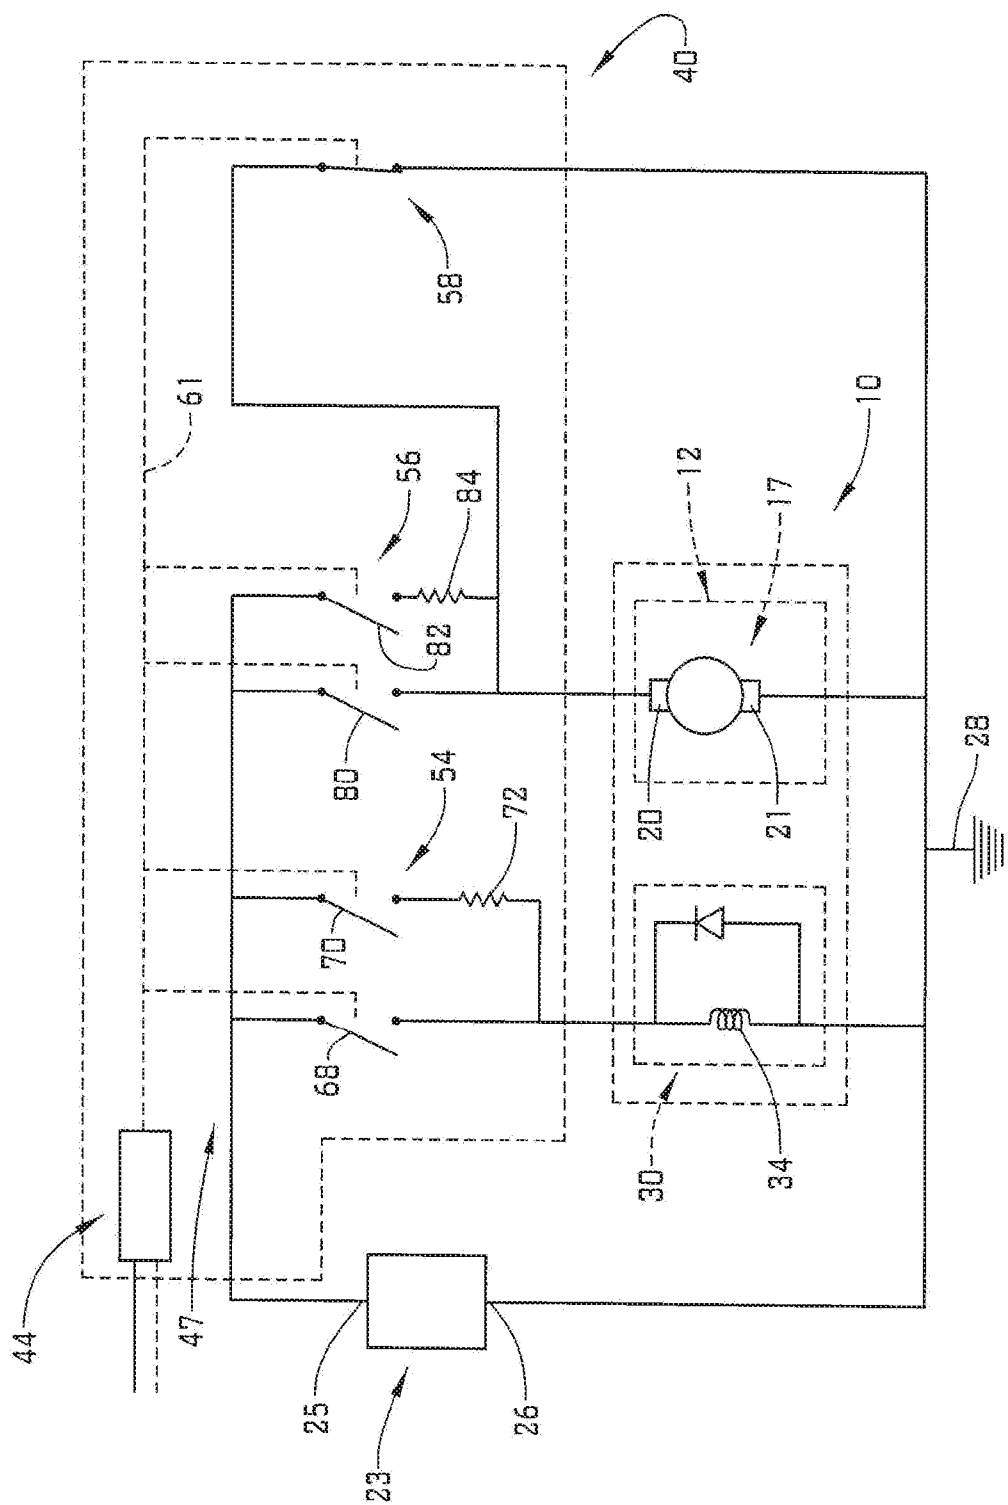


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/037985**A. CLASSIFICATION OF SUBJECT MATTER****F02N 11/08(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
F02N 11/08; B60L 1/00; B62D 45/00; F02N 11/00; F02N 15/00; H02G 3/00; H02K 11/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords:
starter motor, single coil solenoid, solenoid switch, starter motor switch, starter motor controller**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4412137 A (HANSEN et al.) 25 October 1983 See column 2, line 65 - column 11, line 26; claim 1; and figure 1.	1-15
A	US 2011-0187127 A1 (MURATA et al.) 04 August 2011 See paragraphs [0036]-[0112]; and figures 4, 8.	1-15
A	JP 2012-202309 A (DENSO CORP.) 22 October 2012 See paragraphs [0047]-[0224]; and figures 1-11.	1-15
A	US 2011-0213525 A1 (KANEMOTO et al.) 01 September 2011 See paragraphs [0030]-[0045]; and figure 1.	1-15
A	US 2010-0244459 A1 (GIBSON et al.) 30 September 2010 See paragraph [0029]; and figures 1-4.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 September 2018 (27.09.2018)

Date of mailing of the international search report

28 September 2018 (28.09.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Chang Ho

Telephone No. +82-42-481-8288



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/037985

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4412137 A	25/10/1983	None	
US 2011-0187127 A1	04/08/2011	CN 102148111 A CN 102148111 B EP 2354533 A2 EP 2354533 A3 JP 2011-163122 A JP 5471532 B2 KR 10-1267370 B1 KR 10-2011-0090837 A US 8492916 B2	10/08/2011 12/08/2015 10/08/2011 11/04/2012 25/08/2011 16/04/2014 24/05/2013 10/08/2011 23/07/2013
JP 2012-202309 A	22/10/2012	DE 102012204787 A1 JP 5464163 B2	27/09/2012 09/04/2014
US 2011-0213525 A1	01/09/2011	DE 102011004708 A1 JP 2011-179398 A JP 5573227 B2 US 8498772 B2	26/04/2012 15/09/2011 20/08/2014 30/07/2013
US 2010-0244459 A1	30/09/2010	US 2012-0200262 A1 US 8164206 B2 US 8314504 B2	09/08/2012 24/04/2012 20/11/2012