

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)


PCT

(10) International Publication Number
WO 03/100712 A1

- (51) International Patent Classification⁷: **G06K 9/20**
- (21) International Application Number: PCT/US03/11982
- (22) International Filing Date: 17 April 2003 (17.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/155,592 22 May 2002 (22.05.2002) US
- (71) Applicant: **SONY COMPUTER ENTERTAINMENT AMERICA INC.** [US/US]; 919 E. Hillsdale Blvd., 2nd Floor, Foster City, CA 94404 (US).
- (72) Inventors: **CHATANI, Masayuki**; 919 East Hillsdale Boulevard, 2nd Floor, Foster City, CA 94404 (US).
DIXIT, Rajesh; 1-1 Akasaka 7-chome, Minato-ku, Tokyo 107-0052 (JP).
- (74) Agents: **BROCK, Joe, A., II** et al.; Martine & Penilla, LLP, 710 Lakeway Drive, Suite 170, Sunnyvale, CA 94085 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR DIGITAL IMAGE SELECTION

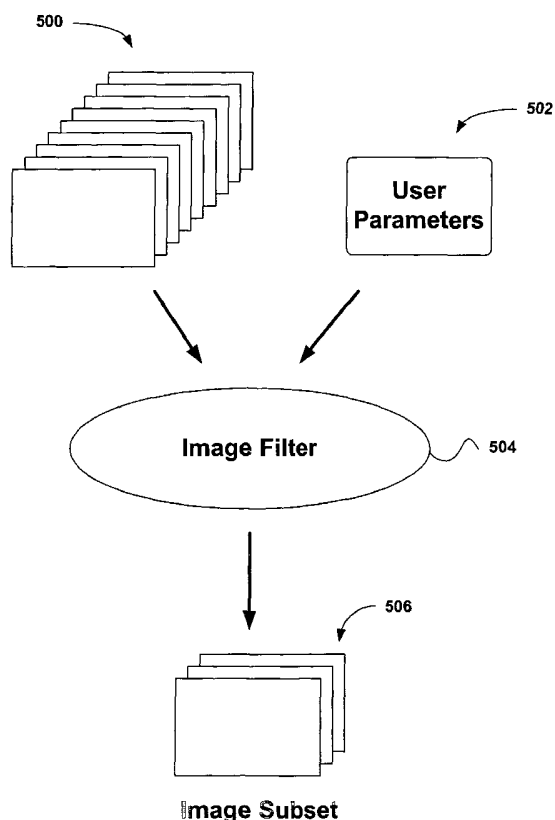

(57) Abstract: An invention is provided for digital image selection and previewing in a digital camera environment. Image selection parameters (502) are obtained, where the image selection parameters define specific properties of a digital image (500). A plurality of digital images is filtered based on the image selection parameters to generate a subset (506) of the plurality of digital images. The subset includes digital images having the specific properties defined by the image selection parameters. Optionally, the digital images included in the subset can be prioritized and/or categorized based on the selection parameters. In addition, in one aspect, image view commands can be received and a plurality of views of a particular digital image generated based on the image view commands. These views can then be displayed to a user.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM AND METHOD FOR DIGITAL IMAGE SELECTION

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to digital camera technology, and more particularly to digital image selection and searching techniques.

10 2. Description of the Related Art

Currently, image capturing technology is progressing toward digital image technology. This shift in technology is particularly evident in the area of personal camera photography. Traditional cameras using conventional film are increasingly giving way to modern digital cameras, which electronically store digital images using computer memory. In addition to the differences in image storage, traditional and digital cameras also differ in usage.

For example, Figure 1A illustrates a traditional camera 100. In use, the traditional camera 100 records photographs on film, which allows a limited number of exposures before needing replacement. For example, in Figure 1A, the traditional camera 100 includes film for 30 exposures. Once all the exposures are used for a given roll of film, the user generally develops the film, and generates photographs 102. At this point, the user can select the desired images and disregard undesired images. Since the number of photographs 102 is limited, for example to about 20-30 photographs 102, the task of selecting particular photographs is relatively easy. For example, the user may want to use only photographs that are in focus. In this case, the task of selecting only in focus photographs 102 from 20-30 photographs is relatively simply. However, when using a digital camera, this selection process can be more difficult.

Figure 1B illustrates a digital camera 150. Unlike the traditional camera 100, the digital camera 150 records digital images 156 in memory. Moreover, the digital photographs 156 can be downloaded from the digital camera memory to additional memory. For example, the digital photographs 156 can be downloaded from the digital camera memory to a personal computer 152, or other computer system, such as a SONY PLAYSTATION 2 154, which is capable of storing digital images.

- 2 -

Generally, the digital camera memory can store far more images than a single roll of film. For example, a digital camera having 1 gigabyte of flash memory, or a microdrive, can store about one thousand photographs 156. Although some low end digital cameras allow only one shot per second, many high end digital cameras allow about eight shots per second. For example, a photographer can hold the shutter button down for three seconds and obtain about twenty-four photographs. At such a high rate of photography, it is relatively easy for a photographer to fill the digital camera memory with digital images 156. Unfortunately, selecting preferred images from one thousand photographs 156 is a laborious task.

For example, when the user desires to use only photographs that are in focus, the user is required to search through about one thousand digital photographs 156 to find the "in focus" photographs. In addition, once the desired digital photographs are selected, users often edit the digital photographs 156 using image editors. For example, color filters may be applied to the photographs, or the image contrast may be altered. Again, since digital cameras can store such a vast number of photographs, editing the large number of photographs can require a large amount of time and effort on the part of the photographer.

In view of the foregoing, there is a need for systems and methods for automatic selection of digital photographs based on user provided criteria. The methods should allow a user to provide parameters by which digital images can be sorted and selected. In addition, the methods should allow users to preview images under various conditions. For example, the user should be able to preview a particular image rotated, to provide the optimal orientation of the photograph, or the user should be able to preview a photograph with a particular filter applied, such as a "black and white" filter.

SUMMARY OF THE INVENTION

Broadly speaking, the present invention fills these needs by allowing a user to select and preview digital images by providing a plurality of parameters indicating desired image properties. The parameters are utilized to filter the digital images, resulting in a smaller selection of images that share the given properties. In one embodiment, a method is disclosed for digital image selection. Image selection parameters are obtained, where the image selection parameters define specific properties of a digital image. A plurality of digital images is filtered based on the image selection parameters to generate a subset of the plurality of digital images, where the subset includes digital images having the specific properties defined by the image selection parameters. Optionally, the digital images included in the subset can be prioritized and/or categorized based on the image selection parameters. Also optionally, digital images that do not have the specific properties defined by the image selection parameters can be excluded. In addition, in one aspect, image view commands can be received and a plurality of views of a particular digital image generated based on the image view commands. These views can then be displayed to a user.

A digital camera having image selection capabilities is disclosed in an additional embodiment of the present invention. The digital camera includes an imaging device in communication with a system bus. The imaging device is capable of capturing image data for a plurality of digital images. Also included is an input/output (I/O) device in communication with the system bus. The I/O device is capable of receiving image selection parameters defining specific properties of a digital image. The digital camera further includes a computer that is in communication with both the imaging device and the I/O device via the system bus. The computer includes logic that filters the plurality of digital images based on the image selection parameters to generate a subset of the plurality of digital images, which includes digital images having the specific properties defined by the image selection parameters. Optionally, the computer can include logic that prioritizes and/or categorizes the digital images included in the subset based on the image selection parameters. Also optionally, the computer can include logic that excludes digital images that do not have the specific properties defined by the image selection parameters. In addition, in one aspect, the I/O device can be further capable of receiving image view commands. In this aspect, the computer can optionally include logic that generates a plurality of views of a particular digital

image based on the image view commands. Further, a display device that is capable of displaying the plurality of views to a user can optionally be coupled to the I/O device.

In a further embodiment, a computer program embodied on a computer readable medium for digital image selection is disclosed. The computer program includes a code segment that obtains image selection parameters that define specific properties of a digital image. In addition, a code segment is included that filters a plurality of digital images based on the image selection parameters to generate a subset of the plurality of digital images. As above, the subset includes digital images having the specific properties defined by the image selection parameters.

A further method for digital image selection is disclosed in an additional embodiment of the present invention. As above, image selection parameters are obtained, which define specific properties of a digital image. In addition, object recognition data is obtained from an object recognition database. Using the object recognition data, each digital image of a plurality of digital images is parsed to identify properties of the digital image that correspond to the image selection parameters. Then, a subset of the plurality of digital images is presented. As above, the subset includes digital images having the specific properties corresponding to the image selection parameters.

In this manner, embodiments of the present invention advantageously allow a user to automatically select particular images that satisfy particular requirements without needing to personally review each image stored in memory. In addition, the multiple views advantageously allow the user to manipulate and view particular digital images under various conditions without the effort of purposefully using an image editor. Other aspects and advantages of the invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

5 Figure 1A illustrates a traditional camera;

Figure 1B illustrates a digital camera;

Figure 2A is a diagram showing an exemplary digital image selection system 200, in accordance with an embodiment of the present invention;

10 Figure 2B shows an exemplary digital image selection screen 220, in accordance with an embodiment of the present invention;

Figure 3 is a block diagram showing a digital camera 300 having a computer with digital image selection capabilities, in accordance with an embodiment of the present invention;

15 Figure 4 is a block diagram showing an exemplary computer, in accordance with an embodiment of the present invention;

Figure 5 is a diagram showing image subset generation based on user parameters, in accordance with an embodiment of the present invention;

Figure 6 is a block diagram showing exemplary user parameters, in accordance with an embodiment of the present invention;

20 Figure 7 illustrates image categorization using an image filter, in accordance with an embodiment of the present invention;

Figure 8 is a flowchart showing a method for performing digital image selection, in accordance with an embodiment of the present invention;

Figure 9A shows an exemplary computer model for a human face;

25 Figure 9B is an illustration of a digital image of a human face; and

Figure 10 illustrates object recognition data access, in accordance with an embodiment of the present invention; and

Figure 11 illustrates multiple view image processing, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An invention is disclosed for digital image selection and previewing in a digital camera environment. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that the present invention may be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order not to unnecessarily obscure the present invention.

Broadly speaking, embodiments of the present invention take advantage of computer image processing technology to parse digital photographs based on user provided parameters. That is, embodiments of the present invention allow a user to select digital images by providing a plurality of parameters indicating desired image properties. The parameters are utilized to filter the digital images, resulting in a smaller selection of images that share the given properties.

For example, a user can provide an "images in focus" parameter to the system. Embodiments of the present invention then search through the stored digital images to find only those images that are in focus. This set of "in focus" images is presented to the user. In another example, a user can select only images wherein the subject does not have "red eye." Again, the digital images are searched for only those images wherein the subject does not have "red eye," and these images are presented to the user. In addition, multiple parameters can be provided. For example, the images can be searched for images that are both "in focus" with no "red eye."

Figure 2A is a diagram showing an exemplary digital image selection system 200, in accordance with an embodiment of the present invention. The digital image selection system 200 includes a computer 202 having process logic 204 for digital image selection. Coupled to the computer 202 via universal serial bus (USB) cable 208 is a flash memory 206 from a digital camera 210. Of course, any type of interconnect/data transfer technology can be used, such as IDE, SCSI, FireWire (IEEE 1394), etc. The flash memory 206 stores digital images obtained using the digital camera 210. As mentioned previously, the flash memory 206 can store any number of images, and depending on capacity, can store over one thousand digital images.

In operation, the digital images stored on the flash memory 206 are downloaded to the computer 202 and optionally stored locally using a persistent storage device, such as a hard

drive. In addition to obtaining digital images from the flash memory 206, digital images can be downloaded from a remote storage 214 via network 212, such as a local area network (LAN) or wide area network (WAN), such as the Internet. Once the digital images are obtained, either locally (e.g., local hard drive or removable media) or remotely, a user can
5 interact with the process logic 204 using a digital image selection screen 220. In this manner, the process logic 204 can be utilized to filter and preview the downloaded digital images, as described next with reference to Figure 2B.

Figure 2B shows an exemplary digital image selection screen 220, in accordance with an embodiment of the present invention. In one embodiment, the digital image selection
10 screen 220 includes a main window 221 and one or more sub-windows 226 based on actions taken by the user. The main window 221 generally includes a user parameters menu 222 providing a plurality of parameter categories 224, each providing access to a sub-parameter menu 226. Each sub-parameter menu can provide access to specific image parameters choices 228 selectable by the user, or access to further sub-parameter menus.

15 Each specific image parameter choice 228 allows the user to configure specific requirements for the particular user parameter. For example, selecting the "red eye" image parameter choice 228 can launch a "red eye" sub-window 230. The "red eye" sub-window 230 can allow the user to enter a specific threshold number 232 indicating, for example, the percentage of red in "red eye" pixels.

20 Once the user has defined user parameters for each desired image property, the digital images can be filtered by selecting the filter button 234. The filter button 234 indicates to the computer system that the process logic 204 should filter the digital images using the defined user parameters. Images having properties matching the user defined parameters are then presented to the user in an image subset menu 236. In this manner, embodiments of the
25 present invention allow a user to select digital images by providing a plurality of parameters indicating desired image properties. In addition, embodiments of the present invention allow the user to preview images under various conditions, which is described in greater detail with reference to Figure 11 below.

In addition, to using an external computer system to perform digital image selection,
30 embodiments of the present invention can perform image digital image selection within a digital camera. Figure 3 is a block diagram showing a digital camera 300 having a computer with digital image selection capabilities, in accordance with an embodiment of the present

invention. The digital camera 300 includes an imaging device 302, a system bus 304 and a computer 306. Imaging device 302 is in optical communication with an object 308 and electrically coupled via system bus 304 to the computer 306. Once a photographer has focused the imaging device 302 on the object 308 and instructed camera 300 to capture an image of object 308, using a capture button for example, the computer 306 commands imaging device 302 via the system bus 304 to capture raw image data that represents the object 308.

The captured raw image data is transferred over the system bus 304 to the computer 306, which stores the captured image data in memory. As will be described in greater detail subsequently, the computer 306 also performs digital image selection and preview based on user provided parameters. The system bus 304 also passes various status and control signals between imaging device 302 and computer 306.

Figure 4 is a block diagram showing an exemplary computer 306, in accordance with an embodiment of the present invention. As shown in Figure 4, the system bus 304 provides connection paths between the imaging device 302, power manager 400, central processing unit (CPU) 402, dynamic random-access memory (DRAM) 404, input/output interface (I/O) 406, read-only memory (ROM) 408, and buffers/connector 410. Generally, removable memory 412 is connected to the system bus 304 via the buffers/connector 410.

The power manager 400 communicates via line 424 with a power supply 414 to coordinate power management operations for camera. The CPU 402 typically includes a processor device for controlling the operation of camera, and is generally capable of concurrently running multiple software routines to control the various processes of camera within a multi-threading environment. The DRAM 404 is a contiguous block of dynamic memory that can be selectively allocated to various storage functions.

The I/O 406 provides an interface device allowing communications to and from computer 306. For example, the I/O 406 can permit an external host computer (not shown) to connect to, and communicate with, the computer 306. The I/O 406 also permits a user to communicate with camera via an external user interface and an external display panel, typically referred to as a view finder. For example, the external user interface can be used to obtain user image selection parameters from the user.

The ROM 408 generally includes a nonvolatile read-only memory that stores a set of computer-readable program instructions to control the operation of camera. The removable memory 412 serves as an additional image data storage area and preferably is a non-volatile

device, readily removable and replaceable by a user via the buffers/connector 410. Thus, a user who possesses several removable memories 412 can replace a full removable memory 412 with an empty removable memory 412 to effectively expand the picture-taking capacity of camera. In one embodiment, the removable memory 412 is implemented as flash memory, EEPROM, or the like.

The power supply 414 supplies operating power to the various components of camera. In one embodiment, the power supply 414 provides operating power to a main power bus 420 and to a secondary power bus 422. The main power bus 420 provides power to the imaging device 302, I/O 406, ROM 408 and the removable memory 412. The secondary power bus 422 provides power to the power manager 400, CPU 402 and the DRAM 404.

The power supply 414 is further connected to main batteries 416 and to backup batteries 418. In one embodiment, the power supply 414 can also be connected to an external power source. During normal operation, the main batteries 416 provide operating power to the power supply 416, which then provides the operating power to camera via both main power bus 420 and secondary power bus 422.

During a power failure mode in which the main batteries 416 have failed (when their output voltage has fallen below a minimum operational voltage level) the backup batteries 418 provide operating power to power supply 414, which then provides the operating power only to the secondary power bus 422 of camera. In this manner, selected components of camera (including DRAM 404) are protected against a power failure in main batteries 416.

In one embodiment, the power supply 414 can also include a flywheel capacitor connected to the power line coming from the main batteries 416. If the main batteries 416 suddenly fail, the flywheel capacitor temporarily maintains the voltage from the main batteries 416 at a sufficient level, such that the computer 306 can protect any image data currently being processed by the camera before shutdown occurs.

According to the embodiments of the present invention, the flexible architecture of the digital camera provides an improved method for manipulating images in a digital camera. More specifically, embodiments of the present invention take advantage of the computer image processing to parse digital photographs based on user provided parameters. That is, embodiments of the present invention allow a user to select digital images by providing a plurality of parameters indicating desired image properties. The parameters are utilized to filter the digital images, resulting in a smaller selection of images that share the given

properties. In addition, embodiments of the present invention can provide multiple views of a particular image, allowing a user to know beforehand what an image will look like under various conditions. In addition, the multiple views allow the user to manipulate the image without the effort of purposefully using an external image editor.

5 Figure 5 is a diagram showing image subset generation based on user parameters, in accordance with an embodiment of the present invention. As mentioned above, it should be noted that embodiments of the present invention can be used both externally and internally to the digital camera. For example, stored images can be downloaded to an external computer, such as a personal computer, and the embodiments of the present invention can be used to
10 select images using the external computer.

As mentioned above, embodiments of the present invention allow a user to select digital images by providing a plurality of parameters to the camera that indicate desired image properties. As shown in Figure 5, a digital camera of the embodiments of the present invention generally stores a plurality of digital images 500. For example, the digital camera
15 can store about one thousand digital images 500 before needing to replace the removable memory. Using the embodiments of the present invention, an image subset 506 of the plurality of digital images 500 can be generated based on user parameters 502.

More specifically, in operation, a user provides user parameters 502 to the camera computer that specify the image properties of digital images to be included in the image subset
20 506. The user parameters 502 include parameters of various levels of detail. Figure 6 is a block diagram showing exemplary user parameters 502, in accordance with an embodiment of the present invention. As shown in Figure 6, user parameters 502 can include physical parameters 600, semantic parameters 602, and high level parameters 604.

Physical parameters 600 define physical properties of the digital images that will be
25 included in the image subset 506. For example, the user can use physical parameters 600 to limit the image subset 506 to include only digital images that have a particular resolution, or that have a specific brightness level. Exemplary physical parameters 600 can include the level of focus, resolution, contrast, brightness, and color spectrum.

Semantic parameters 602 define semantic properties of the digital images that will be
30 included in the image subset 506. That is, semantic parameters 602 allow the user to define salient visual features of the digital images that will be included in the image subset 506. For example, the user can use the semantic parameters 602 to limit the image subset to only

images wherein the subject does not have “red eye,” which generally results from flash photography when the subject has dilated pupils. Other exemplary semantic parameters 602 can include closed eyes, cross-eyed, etc.

High level parameters 604 define high level properties of the digital images that will be included in the image subset 506. For example, the user can use high level parameters 604 to limit the image subset 506 to include only digital images wherein the subject is smiling. High level parameters 604 can also include particular types of images, for example mountain images, or ocean images. In this case, the user can for example define a particular percentage of the image that should include mountains or ocean.

Referring back to Figure 5, once the user parameters 502 are received, an image filter function 504 is applied to the plurality of digital images 500. The image filter function 504 filters the plurality of digital images 500 based on the received user parameters 502. As a result, the user is presented with an image subset 506 that includes the digital images that satisfy the requirements set forth in the user parameters 502. Moreover, the digital images can be further prioritized within the image subset 506. For example, images that more closely reflect the user parameter data can be listed before images that include less of the user parameter data. In this case, the remainder of the digital images can be either excluded from the image subset 506, or simply placed at the end of the image subset 506.

For example, a user can generate a plurality of digital images 500 using the camera, which include mountain images, coastal images, portraits, and group pictures. The user can then filter the digital images 500 by providing a plurality of user parameters 502, which define the properties of the desired digital images. For example, the user can use physical parameters 600 to include only images that are “in focus.” In addition, the user can use the semantic parameters 602 to include only images wherein the subject does not have “red eye.” Further, the user can use high level parameters 604 to include only images that include 30% ocean scenery. Once these user parameters 502 are defined, the computer can apply the image filter function 504, which filters the plurality of digital images 500 into the image subset 506. In the above example, the image subset 506 would include only images that are in focus, have no “red eye” effect, and have at least 30% ocean scenery in the background. In addition to generating a single image subset 506, embodiments of the present invention can be used to categorize digital images, as discussed next with reference to Figure 7.

Figure 7 illustrates image categorization using an image filter, in accordance with an embodiment of the present invention. As mentioned previously, although embodiments of the present invention will be described in terms of in camera image selection, it should be noted that embodiments of the present invention can also be used external to the digital camera. For example, stored images can be downloaded to an external computer, such as a personal computer, and the embodiments of the present invention can be used to select images using the external computer.

As mentioned above, embodiments of the present invention allow a user to select digital images by providing a plurality of parameters indicating desired image properties. As shown in Figure 7, a digital camera of the embodiments of the present invention generally stores a plurality of digital images 500. Similar to generating an image subset, embodiments of the present invention can also categorize the plurality of digital images 500 based on user parameters 502.

As above, a user provides user parameters 502 to the camera computer that specify the image properties of digital images to be included in the image subset 506. Once the user parameters 502 are received, the image filter function 504 is applied to the plurality of digital images 500. In this aspect, the image filter function 504 filters the plurality of digital images 500 based on the received user parameters 502. As a result, the user is presented with a plurality of subcategories 700a-700c. Each subcategory includes the digital images that satisfy the requirements set forth in the user parameters 502 for that particular category. As above, the digital images can be prioritized within each subcategory 700a-700c.

Figure 8 is a flowchart showing a method 800 for performing digital image selection, in accordance with an embodiment of the present invention. In an initial operation 802, preprocess operations are performed. Preprocess operations can include loading the camera with an appropriate removable memory, photographing a plurality of subjects to produce digital images, and other preprocess operations that will be apparent to those skilled in the art after a careful reading of the present disclosure.

In operation 804, digital image data is obtained from the camera's removable memory. As mentioned previously, the camera generally include removable memory coupled to a system bus via the buffers. The removable memory serves as an additional image data storage area and preferably is a non-volatile device, readily removable and replaceable by a user via the buffers. Thus, a user who possesses several removable memories can replace a full

removable memory with an empty removable memory to effectively expand the picture-taking capacity of camera. As mentioned previously, the removable memory can be implemented using as flash memory, EEPROM, and other removable media. Thus, in operation 804, the computer reads the image data from the removable memory of the camera. It should be noted, however, that embodiments of the present invention are not limited to processing image data from the camera's removable memory. That is, embodiments of the present invention can obtain the digital image data from any source, such as for example, a computer hard drive, a network connection, or other source that will be apparent to those skilled in the art after a careful reading of the present disclosure.

The user parameters are obtained, in operation 806. As discussed above, the user parameters can include physical parameters, semantic parameters, and high level parameters. Physical parameters define physical properties of the digital images that will be included in the image subset. For example, the user can use physical parameters to limit the image subset to include only digital images that have a particular resolution, or have a specific brightness level. Exemplary physical parameters can include the level of focus, resolution, contrast, brightness, and color spectrum.

Semantic parameters define semantic properties of the digital images that will be included in the image subset. That is, semantic parameters allow the user to define salient visual features of the digital images that will be included in the image subset. For example, the user can use the semantic parameters to limit the image subset to only images wherein the subject does not have "red eye," which generally results from flash photography when the subject has dilated pupils. Other exemplary semantic parameters can include closed eyes, cross-eyed, etc.

High level parameters define high level properties of the digital images that will be included in the image subset. For example, the user can use high level parameters to limit the image subset to include only digital images wherein the subject is smiling. High level parameters can also include particular types of images, for example mountain images, or ocean images. In this case, the user can for example define a particular percentage of the image that should include mountains or ocean.

In operation 808, the digital images are filtered based on the user parameters. Once the user parameters are obtained, an image filter function is applied to the plurality of digital images, which filters the plurality of digital images based on the user parameters obtained in

operation 806. More particularly, the image filter function filters out digital images that do not satisfy the requirements defined in the user parameters. For example, the user can use physical parameters to include only images that are “in focus.” In addition, the user can use the semantic parameters to include only images wherein the subject does not have “red eye.”

5 Further, the user can use high level parameters to include only images that include 30% ocean scenery. Once these user parameters are defined, the computer can apply the image filter function, which filters the plurality of digital images into an image subset, described next in operation 810.

An image subset is generated based on the user parameters, in operation 810. As

10 discussed above, the computer applies an image filter function to filter the digital images into an image subset. The image subset includes the images that satisfy the requirements set forth in the user parameters. The remainder of the digital images obtained in operation 804 can be excluded from the image subset. Moreover, the digital images can be further prioritized within the image subset. For example, images that more closely reflect the user parameter

15 data can be listed before images that include less of the user parameter data. In this case, the remainder of the digital images obtained in operation 804 can be either excluded from the image subset, or simply placed at the end of the image subset. Continuing with the above example, the image subset would include only images that are in focus, have no “red eye” effect, and have at least 30% ocean scenery in the background.

20 Post process operations are performed in operation 812. Post process operations can include further image selection, multiple view image processing (discussed subsequently), and other post process operations that will be apparent to those skilled in the art after a careful reading of the present disclosure. In this manner, embodiments of the present invention advantageously allow a user to automatically select particular images that satisfy particular

25 requirements without needing to personally review each image stored in memory.

Figures 9A and 9B illustrate an exemplary image filter method based on model comparison, in accordance with an embodiment of the present invention. As mentioned above, embodiments of the present invention apply an image filter to digital images to filter the images based on user parameters. In one embodiment, the image filter uses computer

30 models to facilitate analysis of images. For example, Figure 9A shows an exemplary computer model 900 for a human face. The computer can utilize the computer model 900 to detect human faces in digital images, and to detect facial features within the digital images.

For example, the computer model 900 includes approximate relative locations for eyes 902 and a mouth 904. Thus, when the computer detects a human face in a digital image during an image filter function, the computer can use the relative eye 902 and a mouth 904 locations of the computer model 900 to detect the eyes and mouth of the subject within the digital image.

Figure 9B is an illustration of a digital image of a human face 900'. The human face 900' includes eyes 902' and a mouth 904', which can be located using the relative eye 902 and mouth 904 locations of the computer model 900. For example, the computer can detect the human face 900' by its relative shape as compared to the shape of the computer model head 900. Once detected, the computer can locate the eyes 902' and mouth 904' in the digital image using the relative eye 902 and a mouth 904 locations of the computer model 900. Having detected these locations, the computer can compare the user parameters to the state of the face 900', eyes 902', and mouth 904' of the digital image. For example, when a user parameter is a "red eye" parameter, the computer can determine the color values of the pixels that comprise the eye 902' locations. If the color values include a predetermined amount of red, the computer can determine that the digital image has "red eye." In another example, the pixels of the mouth 904' can be analyzed to determine whether the subject is smiling by comparing the shape of the mouth 904' with the shape of the model mouth 904. In addition to the human face model described above, a plurality of recognition objects can be stored in a database for use in digital image selection.

Figure 10 illustrates object recognition data access, in accordance with an embodiment of the present invention. In one embodiment, the process logic 204 obtains recognition data using an object recognition database 1000. The object recognition database 1000 includes a plurality of computer model objects 1002, which can be used by the process logic to recognize objects within digital images to facilitate filtering. For example, as mentioned above, one computer model object can be the human face computer model 900. Other computer model objects can include various animals and various body parts, such as arms and legs. Further, computer model objects can be created for different positions of a particular computer model. For example, a computer model object 1000 can be generated for legs when standing, and another for legs when sitting. In addition, computer model objects 1000 can include background models, such as mountain scenery and ocean scenery. In this manner, the process logic 204 can detect the amount of a particular background that is present in a digital image.

For example, a model of a mountain background can be compared to the background of a digital image to determine the amount of mountain background present in the image. Similarly, the edges of elements of the image can be examined to detect the amount of contrast between pixels of the picture elements and that of the background. If the contrast is below a particular threshold, the edges can be determined to be “blurry,” and thus, the digital image can be determined to be out of focus.

In addition to providing image selection, embodiments of the present invention further allow users to preview images under various conditions. For example, the user can preview a particular image rotated, to provide the optimal orientation of the photograph, or the user can preview a photograph with a particular filter applied, such as an “inverse” filter. The multiple views advantageously allow the user to manipulate the image without the effort of purposefully using an external image editor.

Figure 11 illustrates multiple view image processing, in accordance with an embodiment of the present invention. As shown in Figure 11, embodiments of the present invention can present multiple views of a particular digital image 1100 to the user. The multiple views can for example include an inverse view 1102a wherein the digital image 1100 is “flipped” 180 degrees, or a rotated view 1102b wherein the digital image 1100 is rotated a predefined number of degrees. As mentioned above, the rotational views can help the user to determine the optimal orientation of the digital image 1100. Other views can include an inverse filter view 1102c wherein the pixels of the digital image 1100 are inverted. Each of these views advantageously allows the user to manipulate and view the digital image 1100 under various conditions without the effort of purposefully using an image editor.

Although the foregoing invention has been described in some detail for purposes of clarity of understanding, it will be apparent that certain changes and modifications may be practiced within the scope of the appended claims. Accordingly, the present embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein, but may be modified within the scope and equivalents of the appended claims.

What is claimed is:

CLAIMS

1. A method for digital image selection, comprising the operations of:
obtaining image selection parameters, the image selection parameters defining specific
properties of a digital image; and
5 filtering a plurality of digital images based on the image selection parameters to
generate a subset of the plurality of digital images, the subset including digital images having
the specific properties defined by the image selection parameters.
2. A method as recited in claim 1, further comprising the operation of prioritizing
10 the digital images included in the subset based on the image selection parameters.
3. A method as recited in claim 1, further comprising the operation of excluding
digital images of the plurality of digital images that do not have the specific properties defined
by the image selection parameters.
15
4. A method as recited in claim 1, further comprising the operation of
categorizing the plurality of digital images based on the image selection parameters.
5. A method as recited in claim 1, further comprising the operation of receiving
20 image view commands.
6. A method as recited in claim 5, further comprising the operation of generating
a plurality of views of a particular digital image based on the image view commands.
- 25 7. A method as recited in claim 6, further comprising the operation of displaying
the plurality of views to a user.
8. A digital camera having image selection capabilities, comprising:
an imaging device in communication with a system bus, the imaging device capable of
30 capturing image data for a plurality of digital images;

an input/output (I/O) device in communication with the system bus, the I/O device capable of receiving image selection parameters defining specific properties of a digital image; and

a computer in communication with the imaging device and the I/O device via the system bus, the computer having logic that filters the plurality of digital images based on the image selection parameters to generate a subset of the plurality of digital images, the subset including digital images having the specific properties defined by the image selection parameters.

10 9. A digital camera as recited in claim 8, wherein the computer further includes logic that prioritizes the digital images included in the subset based on the image selection parameters.

15 10. A digital camera as recited in claim 8, wherein the computer further includes logic that excludes digital images of the plurality of digital images that do not have the specific properties defined by the image selection parameters.

20 11. A digital camera as recited in claim 8, wherein the computer further comprises logic that categorizes the plurality of digital images based on the image selection parameters.

 12. A digital camera as recited in claim 8, wherein the I/O device is further capable of receiving image view commands.

25 13. A digital camera as recited in claim 8, wherein the computer further includes logic that generates a plurality of views of a particular digital image based on the image view commands.

30 14. A digital camera as recited in claim 8, further comprising display device coupled to the I/O device, the display device capable of displaying the plurality of views to a user.

15. A computer program embodied on a computer readable medium for digital image selection, comprising:

a code segment that obtains image selection parameters, the image selection parameters defining specific properties of a digital image; and

5 a code segment that filters a plurality of digital images based on the image selection parameters to generate a subset of the plurality of digital images, the subset including digital images having the specific properties defined by the image selection parameters.

16. A computer program as recited in claim 15, further comprising a code segment
10 that prioritizes the digital images included in the subset based on the image selection parameters.

17. A computer program as recited in claim 15, further comprising a code segment that excludes digital images of the plurality of digital images that do not have the specific
15 properties defined by the image selection parameters.

18. A computer program as recited in claim 15, further comprising a code segment that categorizes the plurality of digital images based on the image selection parameters.

20 19. A computer program as recited in claim 15, further comprising a code segment that receives image view commands.

20. A computer program as recited in claim 5, further comprising a code segment that generates a plurality of views of a particular digital image based on the image view
25 commands.

21. A method for digital image selection, comprising the operations of:
obtaining image selection parameters, the image selection parameters defining specific properties of a digital image;
30 obtaining object recognition data from an object recognition database;

parsing each digital image of a plurality of digital images using the object recognition data to identify properties of the digital image that correspond to the image selection parameters; and

presenting a subset of the plurality of digital images, the subset including digital
5 images having the specific properties corresponding to the image selection parameters.

22. A method as recited in claim 21, further comprising the operation of prioritizing the digital images included in the subset based on the image selection parameters.

10 23. A method as recited in claim 21, further comprising the operation of excluding digital images of the plurality of digital images that do not have the specific properties defined by the image selection parameters.

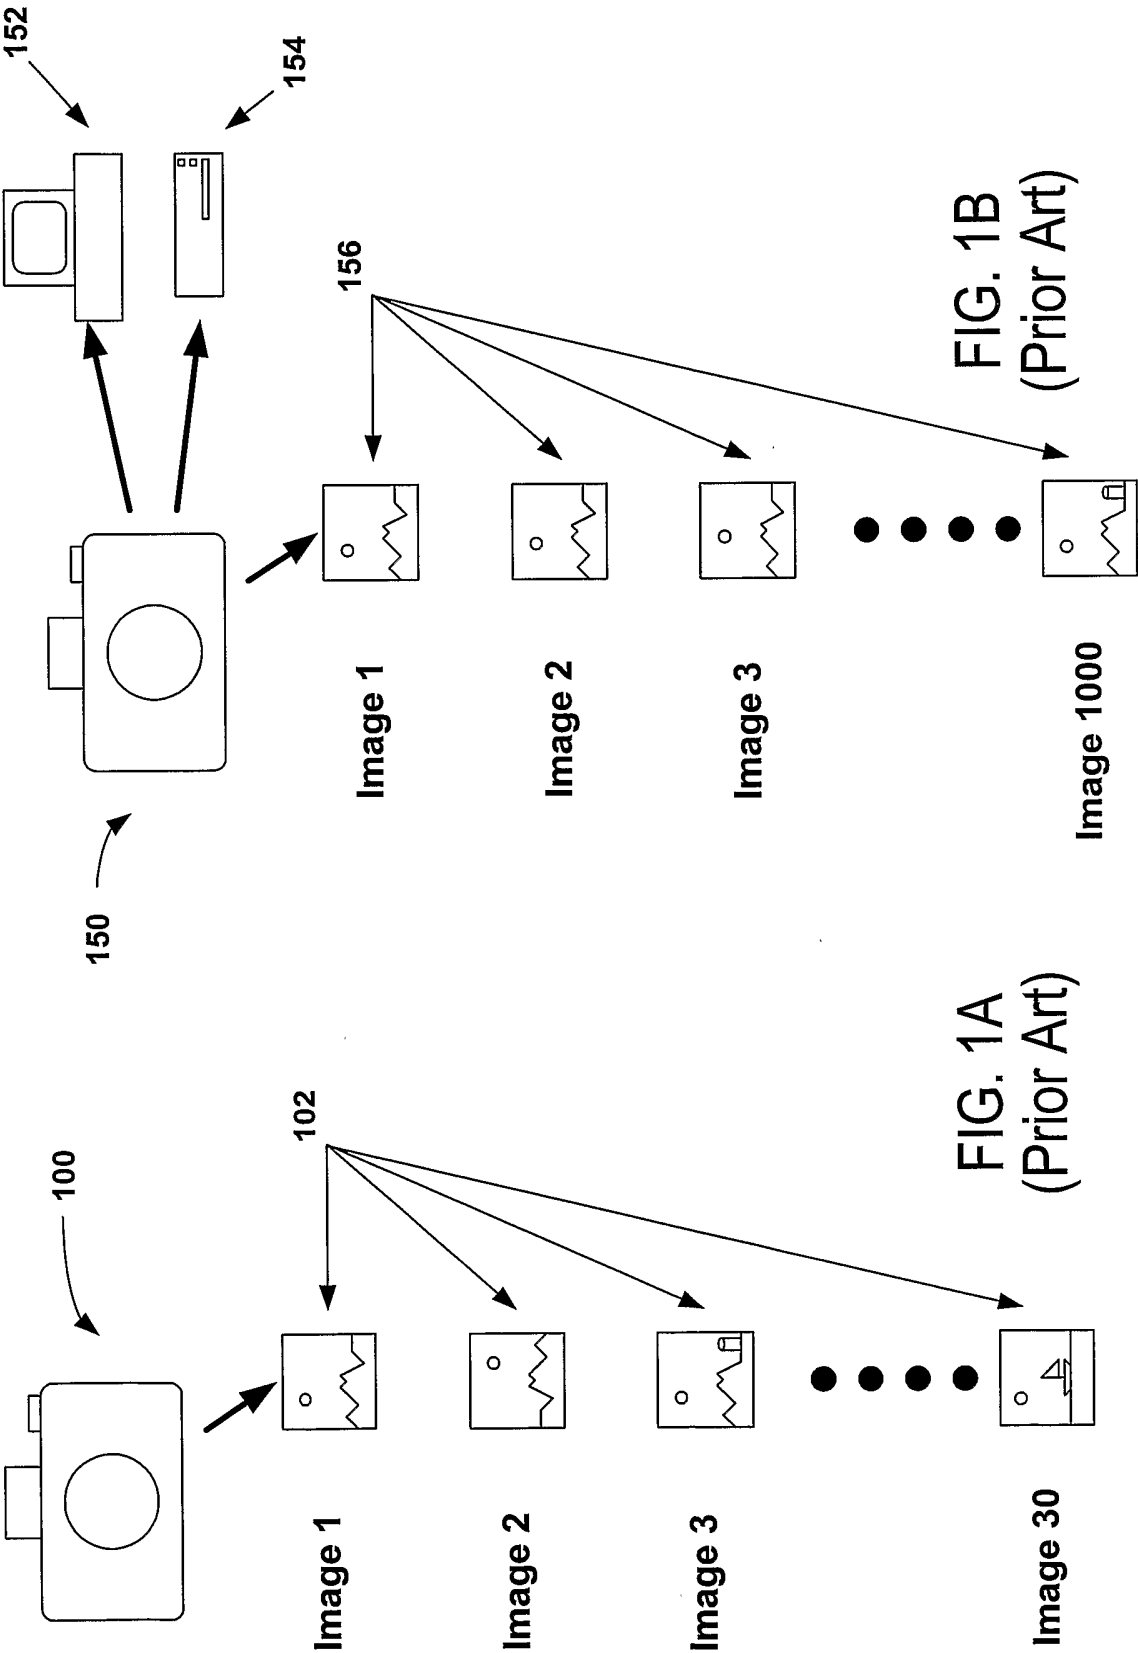
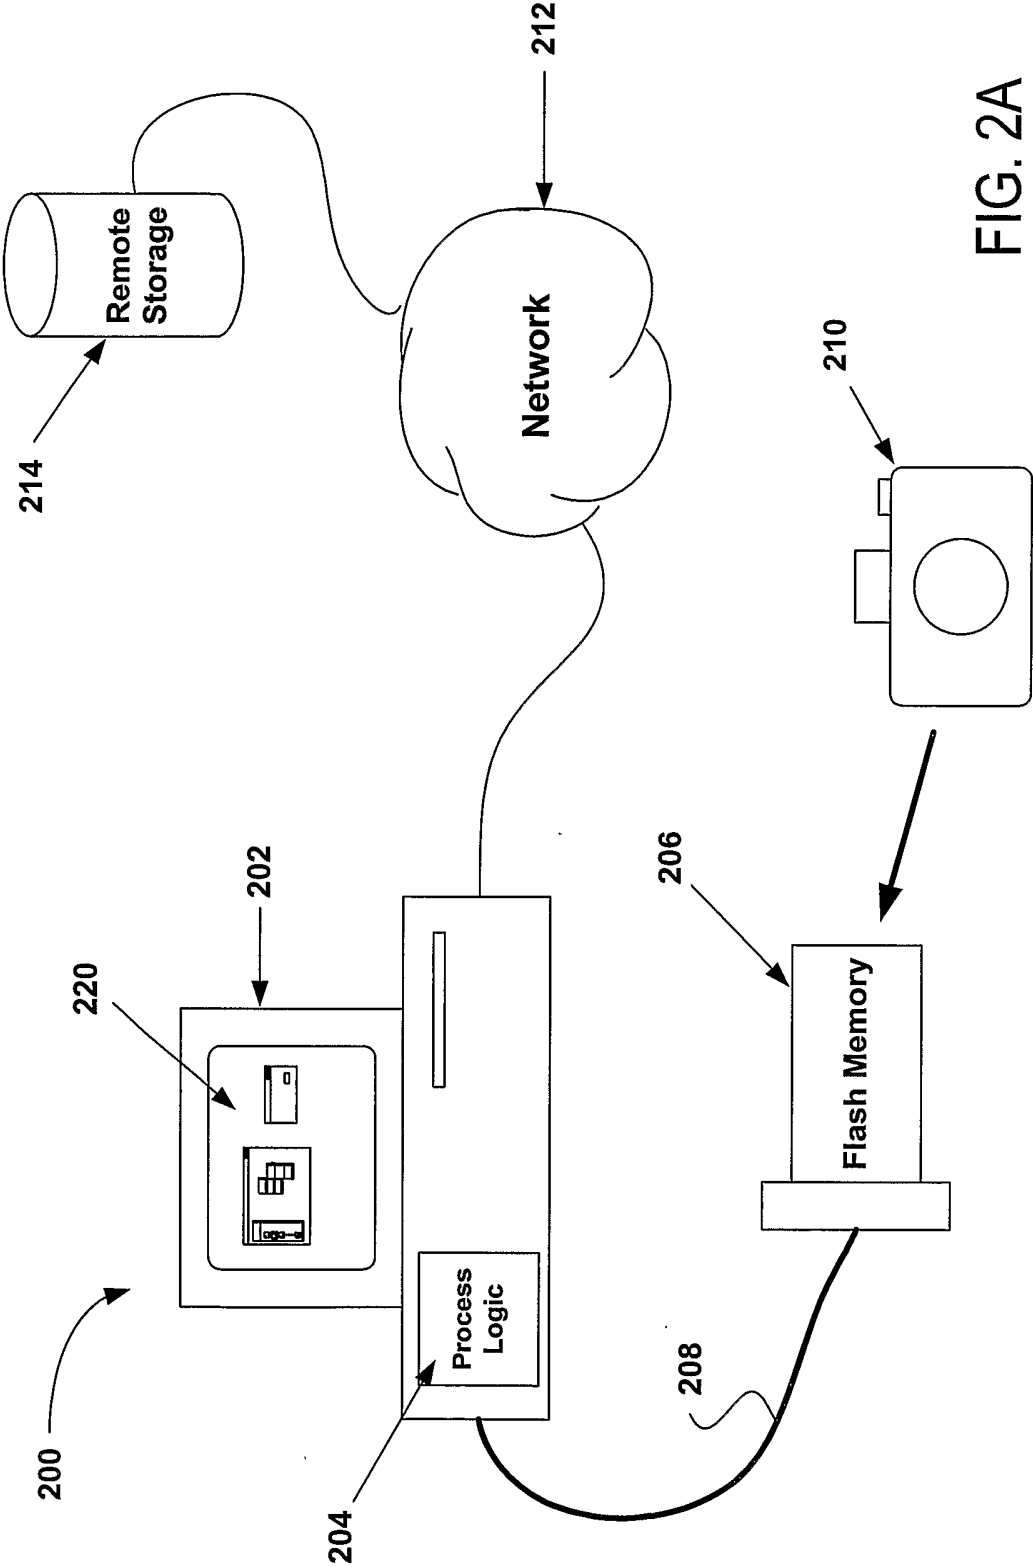


FIG. 1A
(Prior Art)

2/12



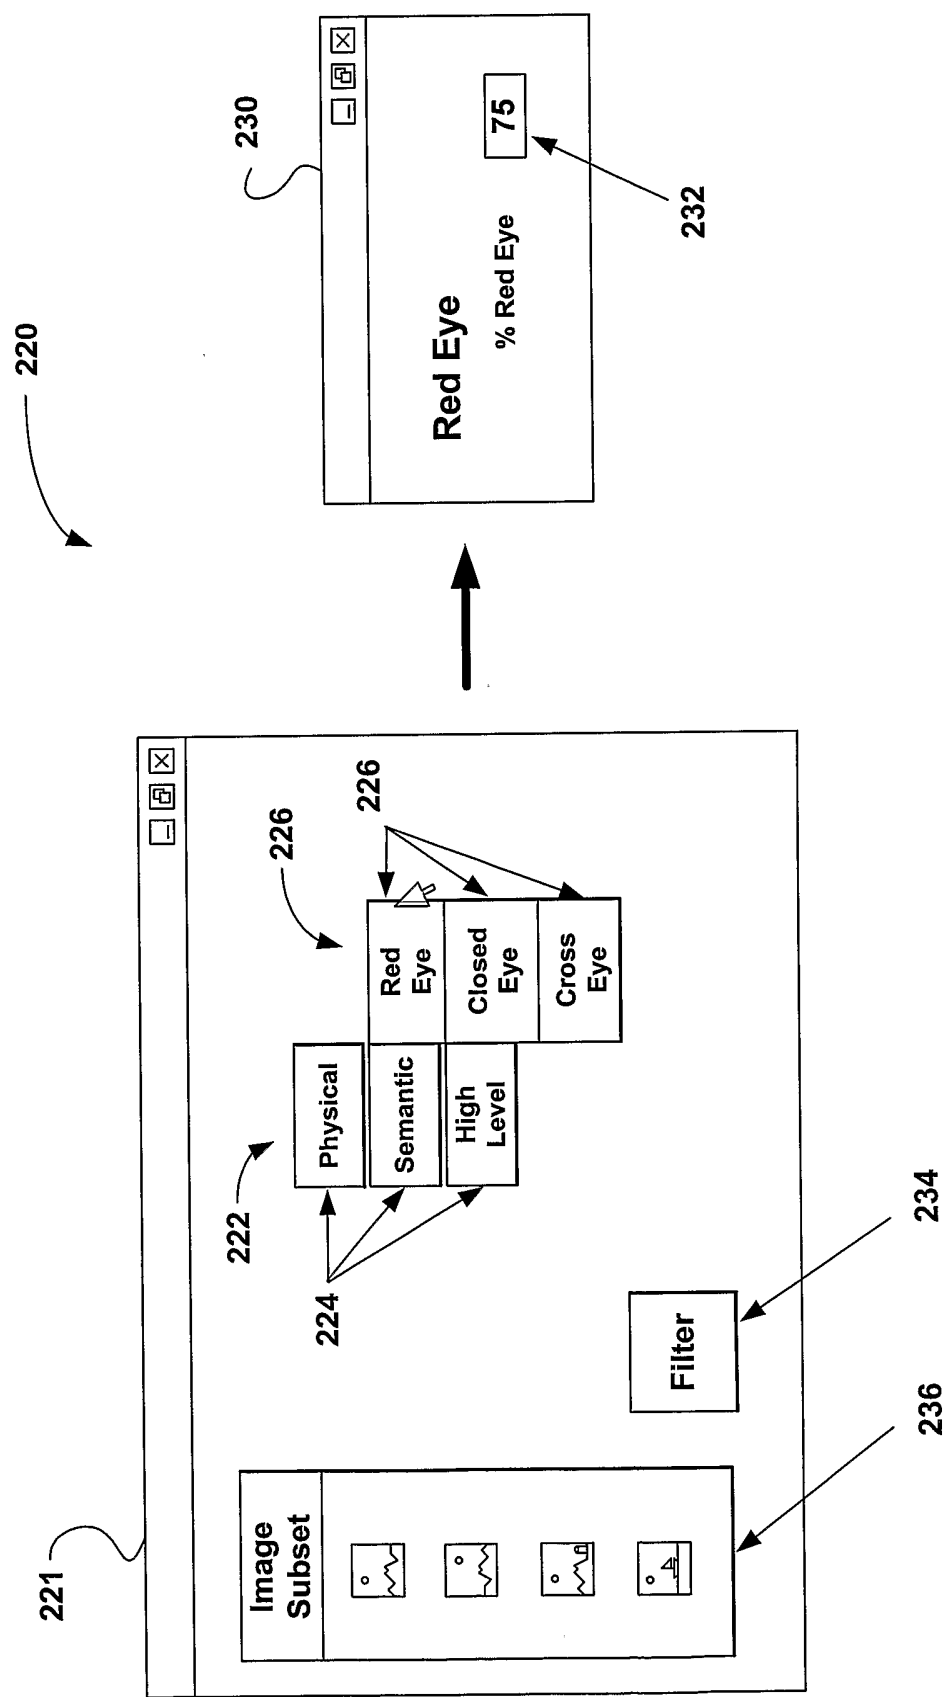


FIG. 2B

4/12


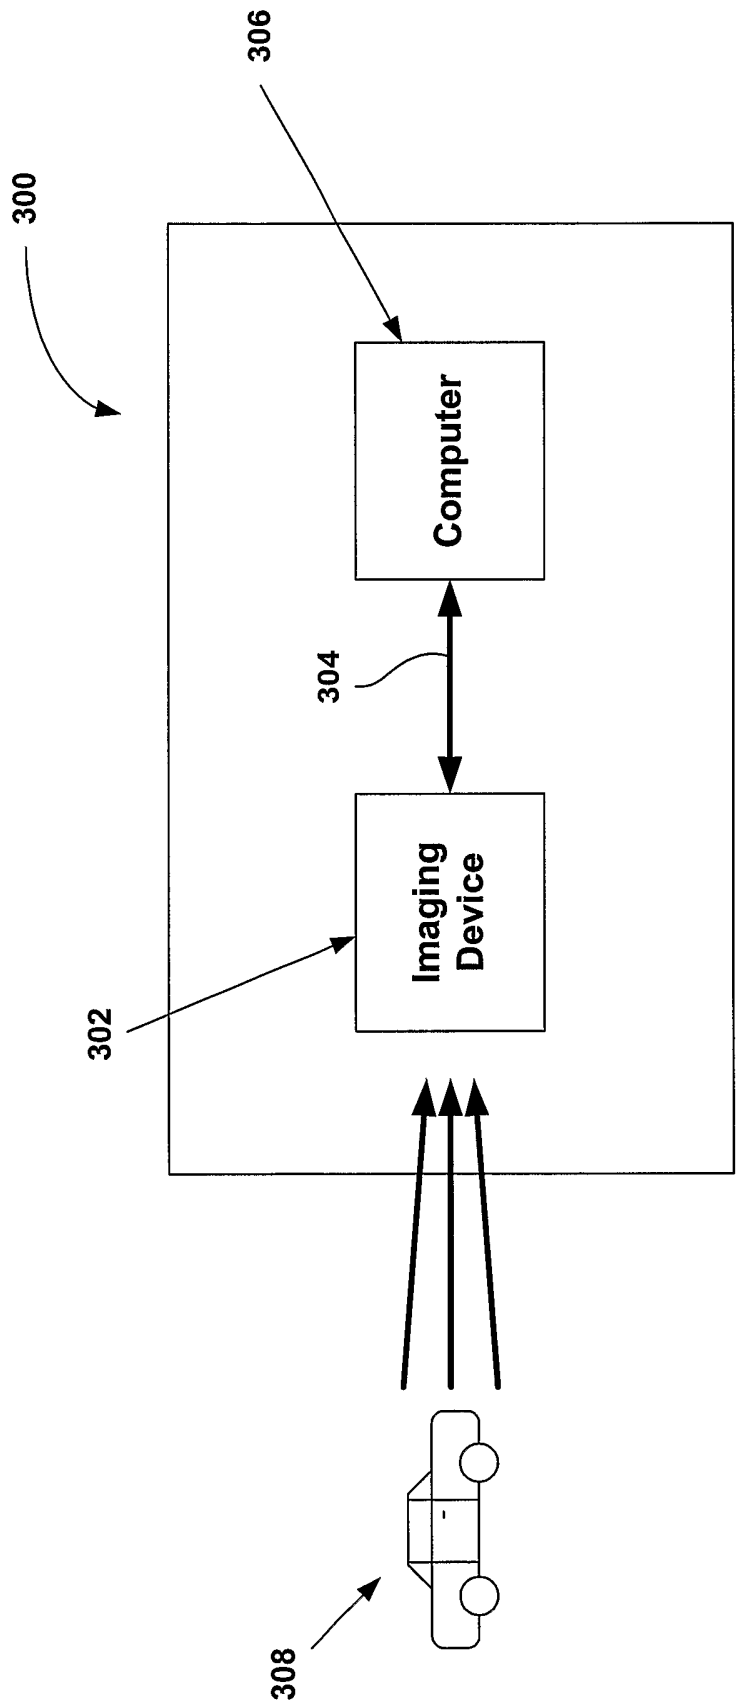


FIG. 3

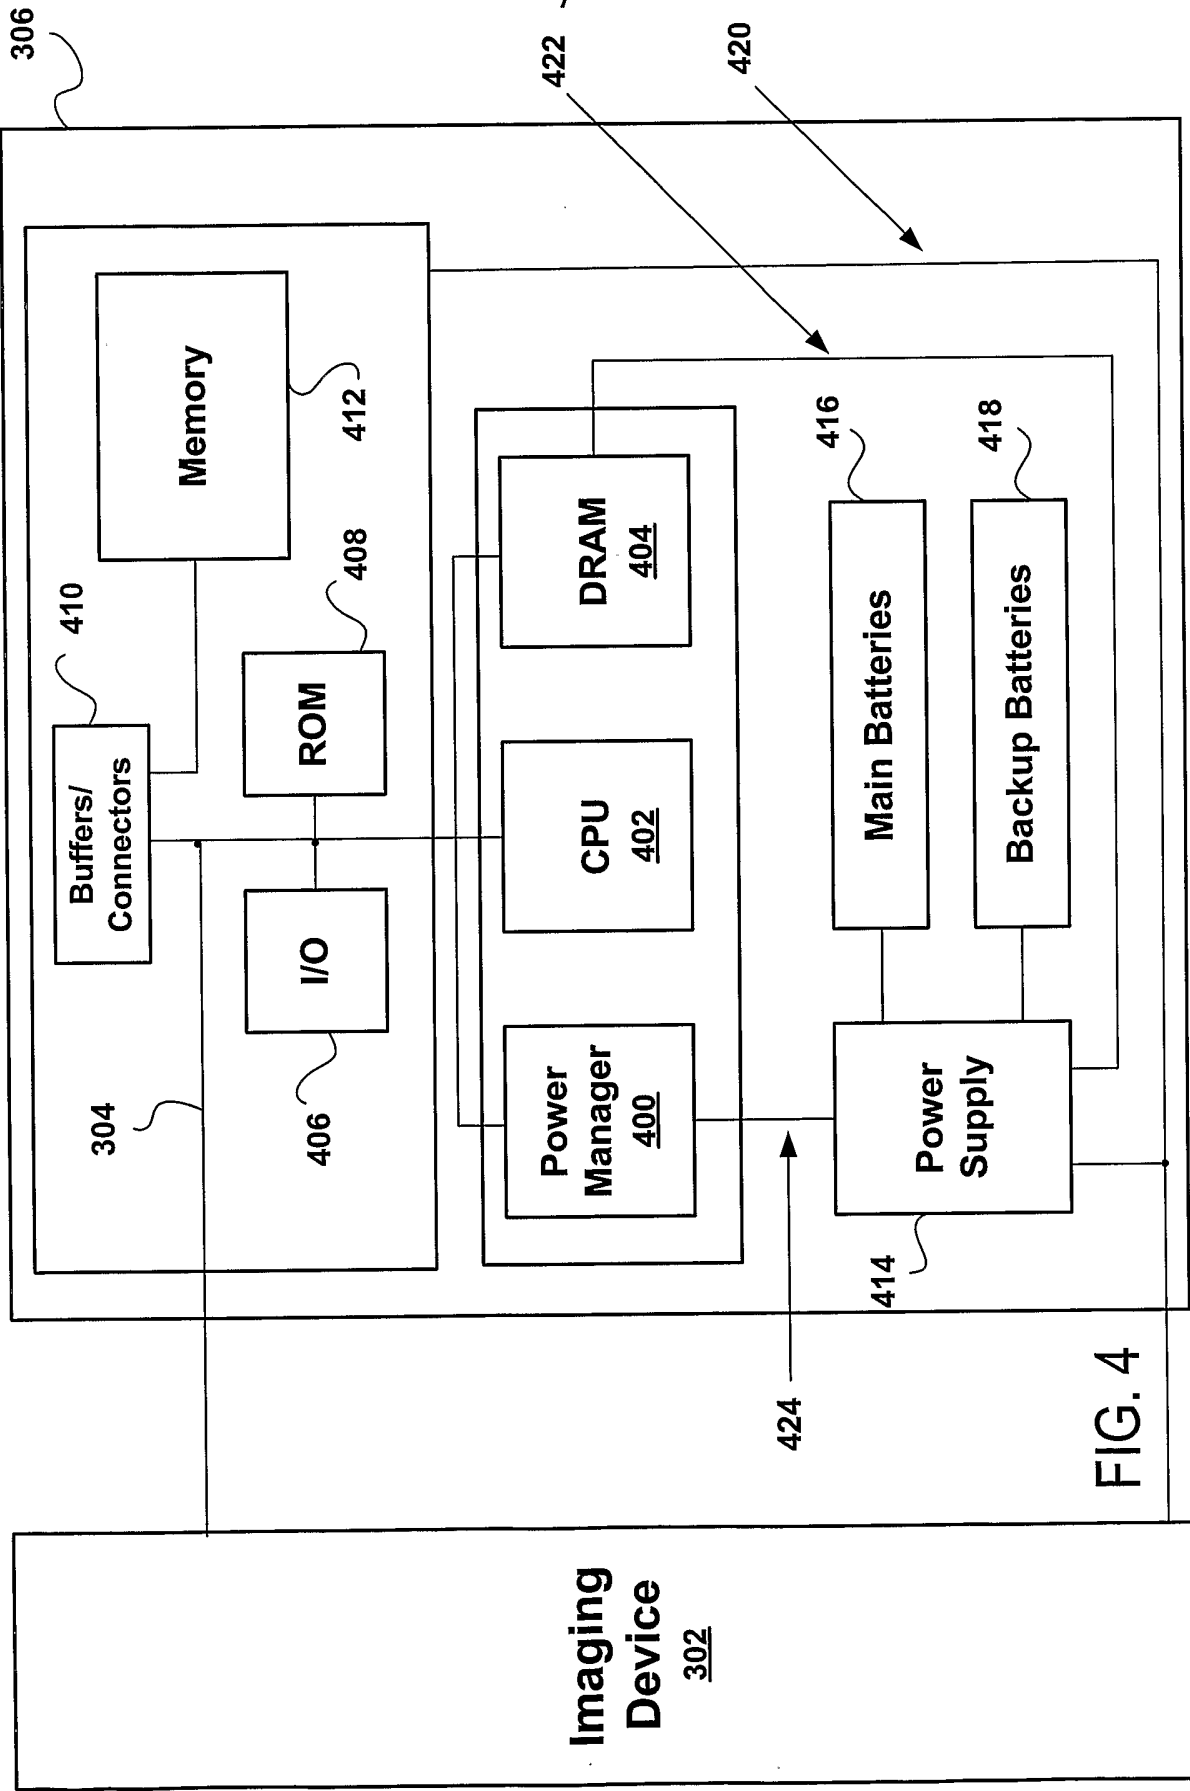

6/12

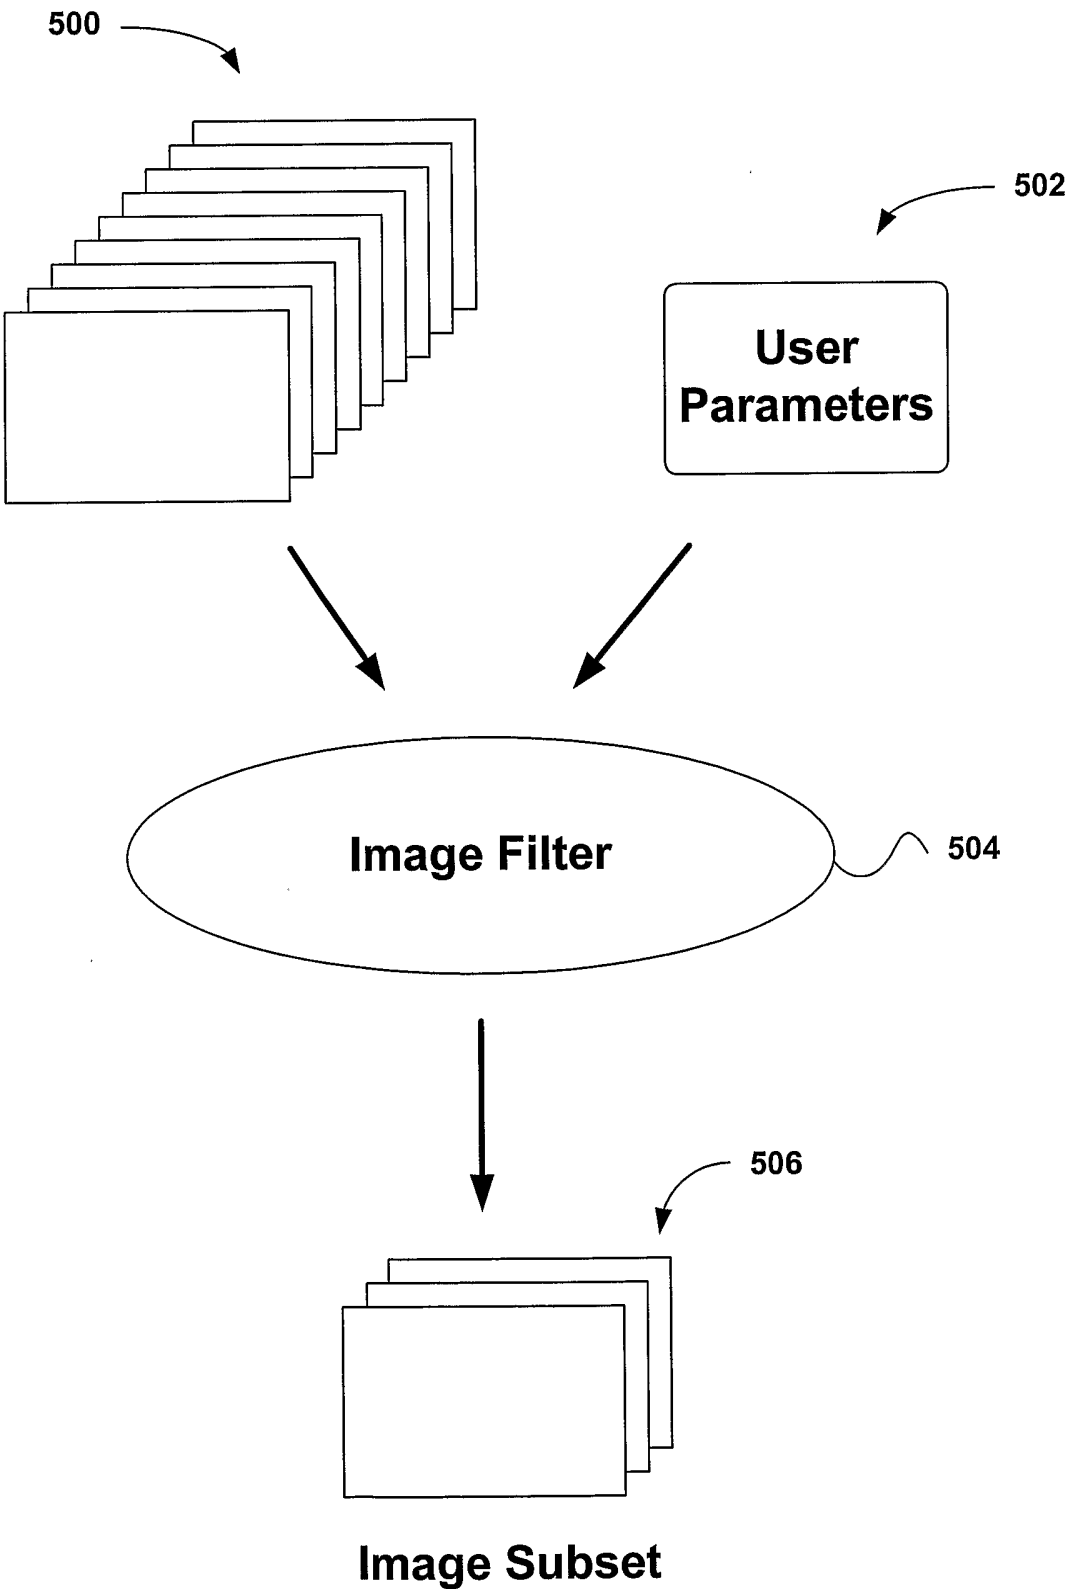


FIG. 5

7/12

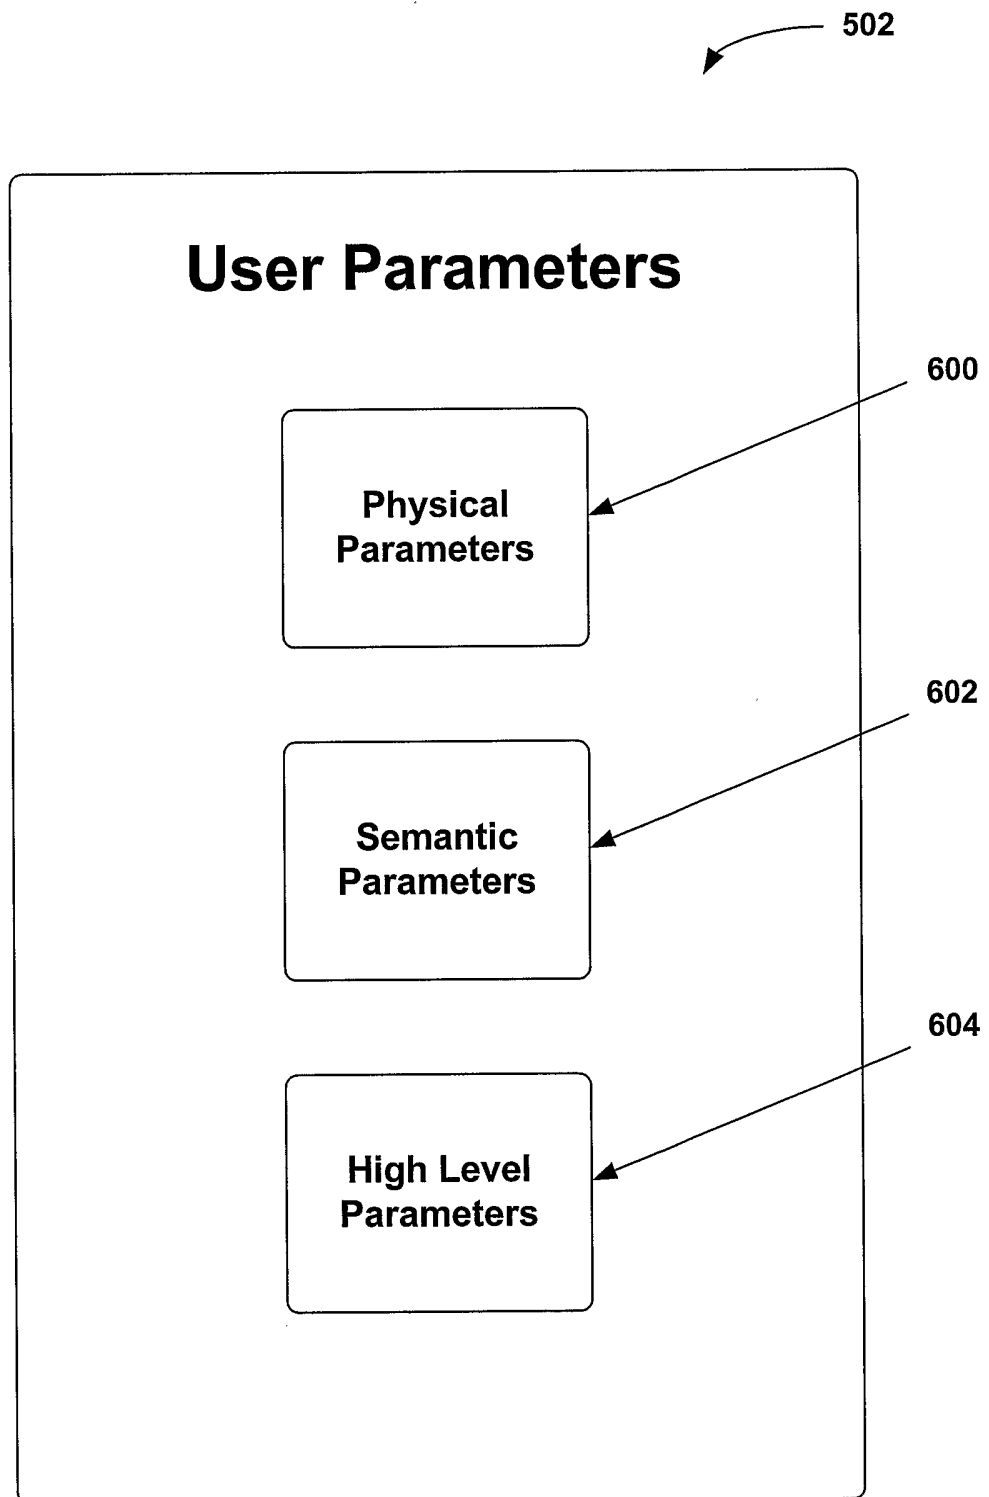


FIG. 6

8/12

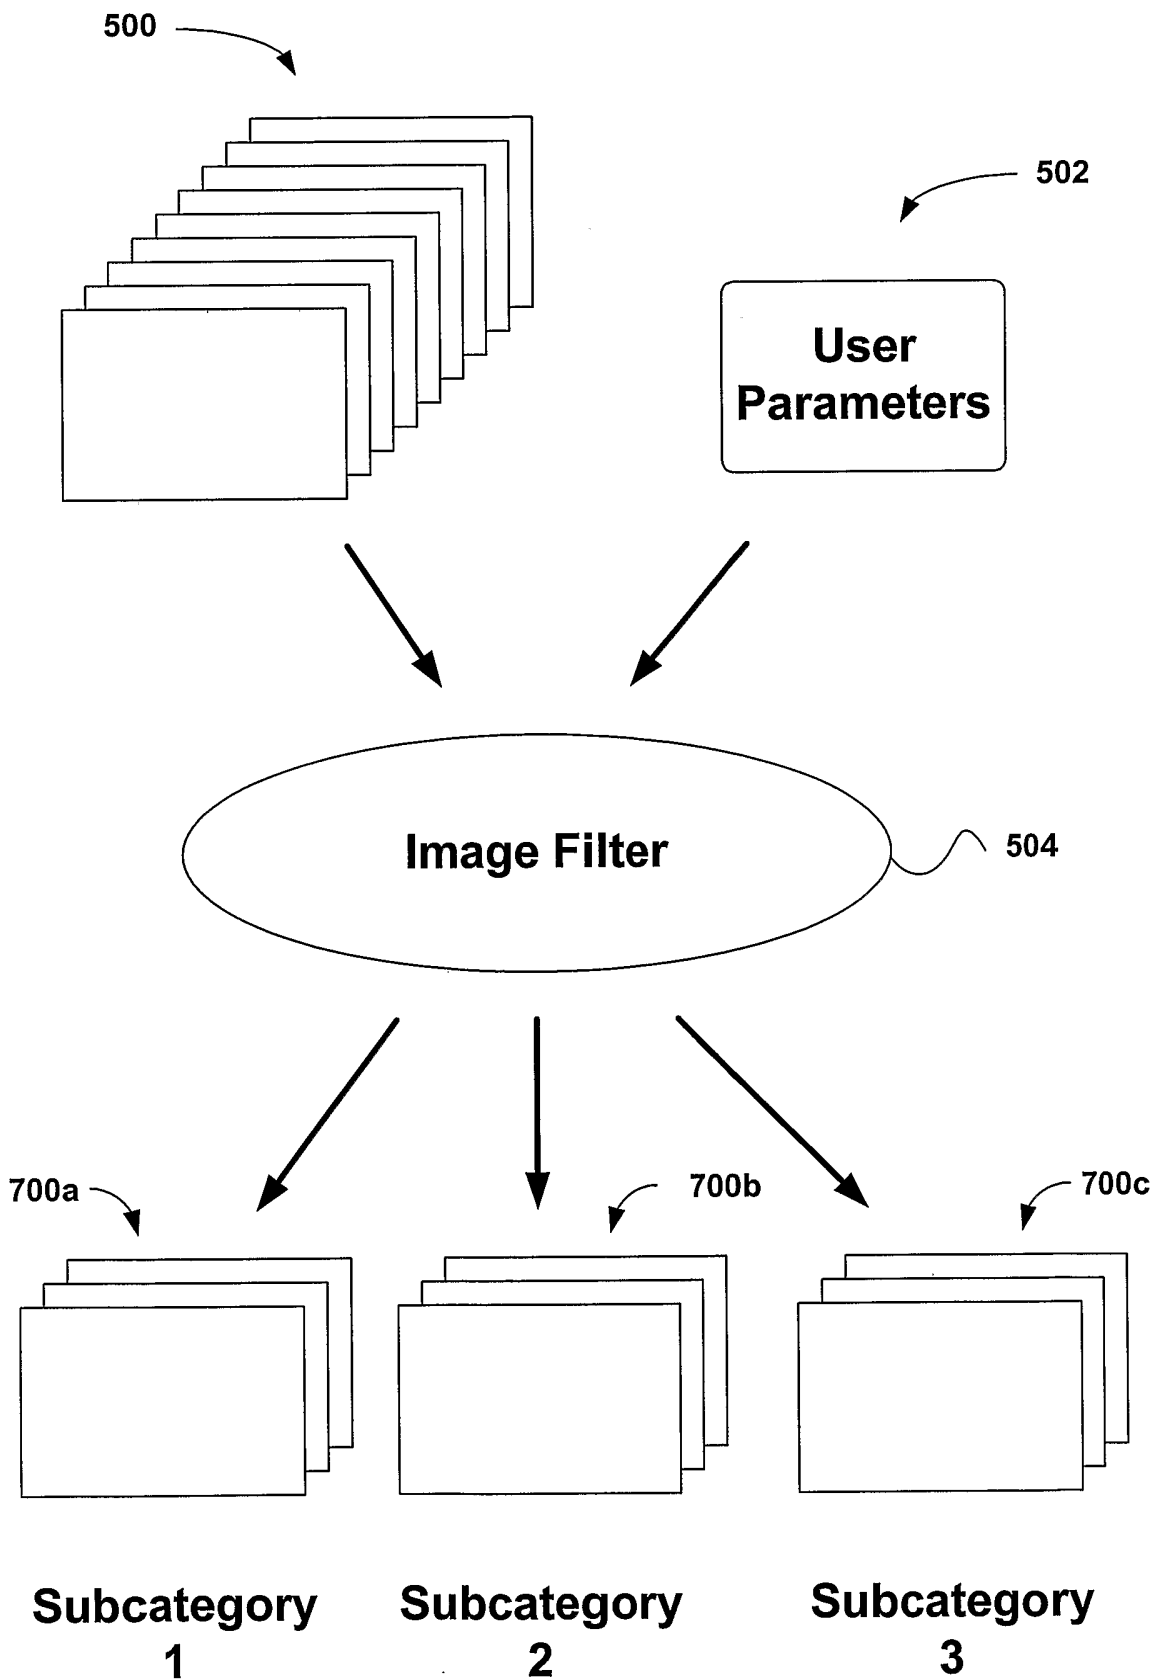


FIG. 7

9/12

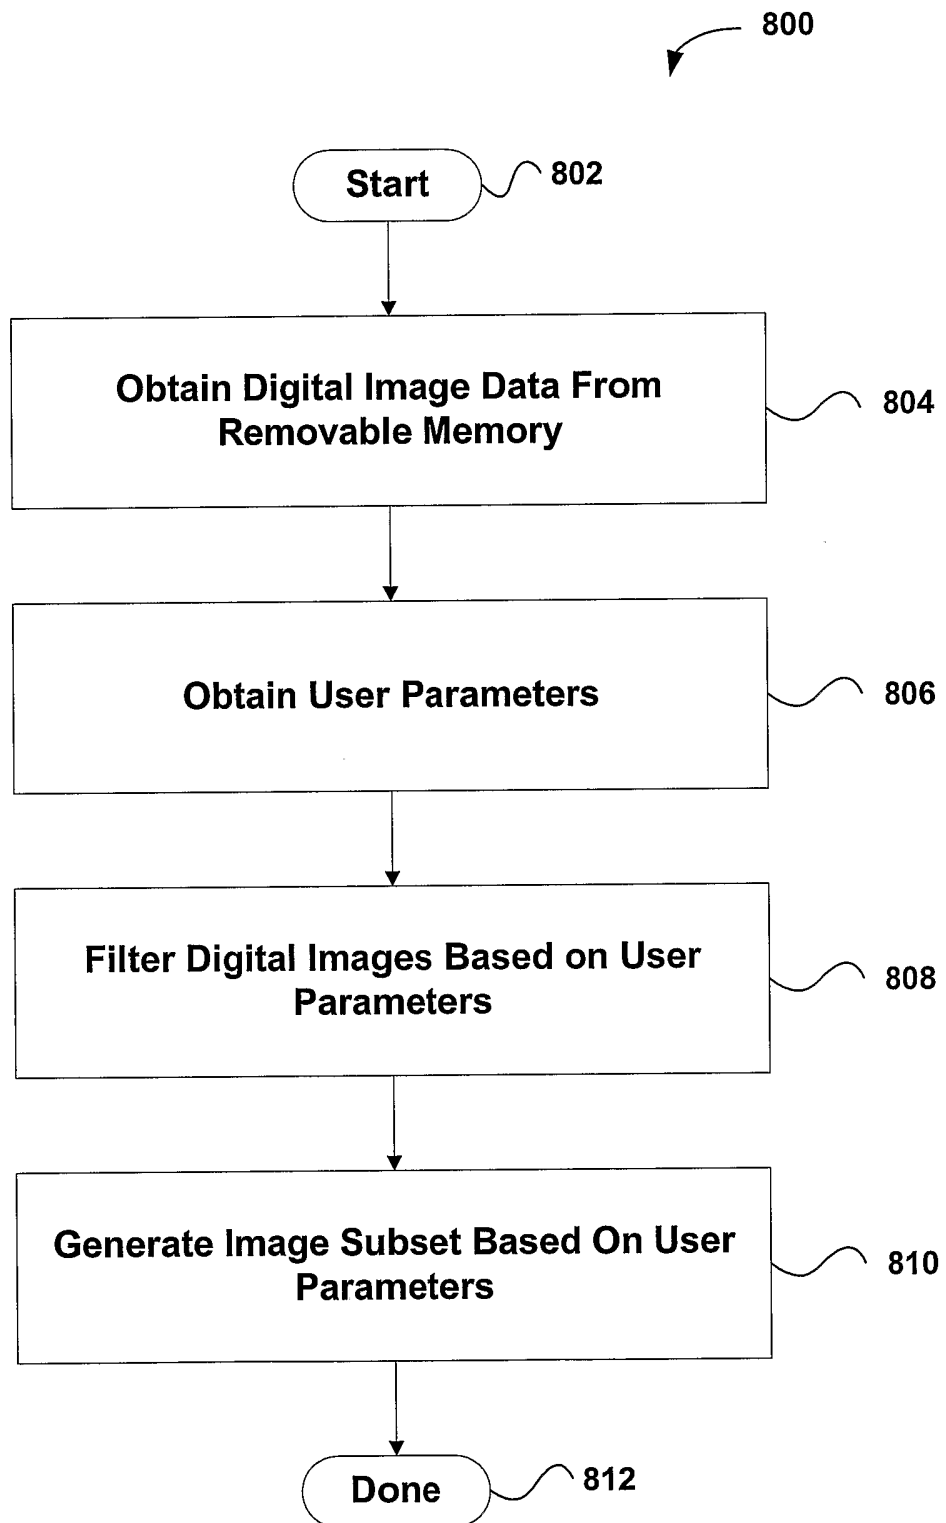


FIG. 8

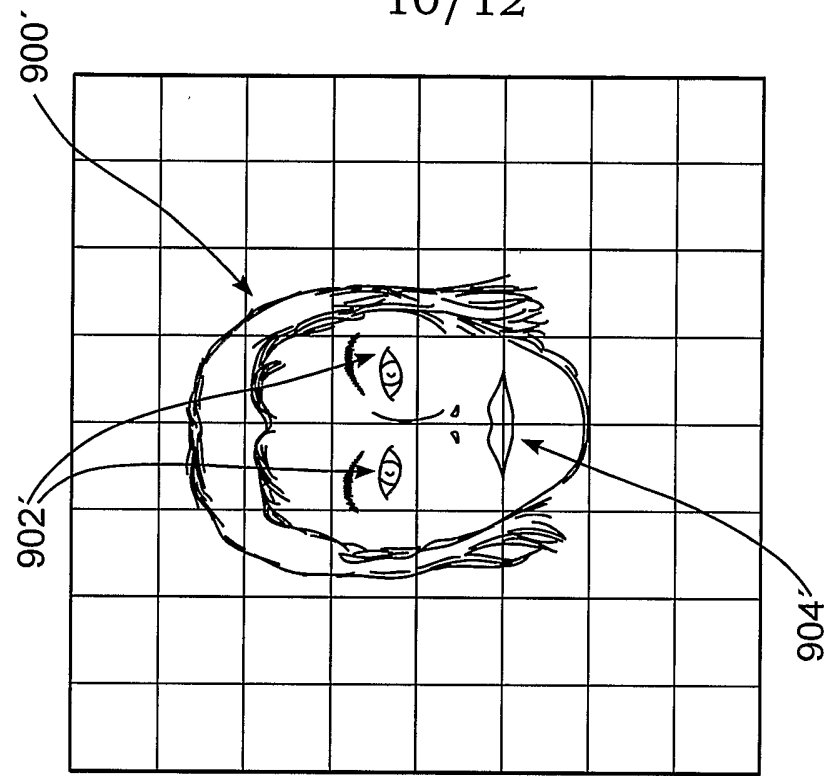


FIG. 9B

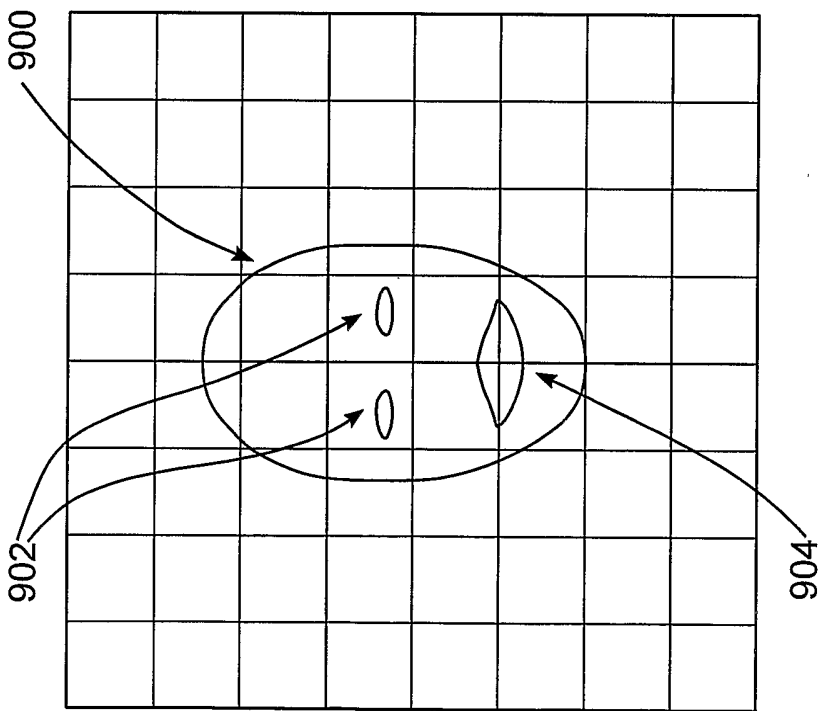


FIG. 9A

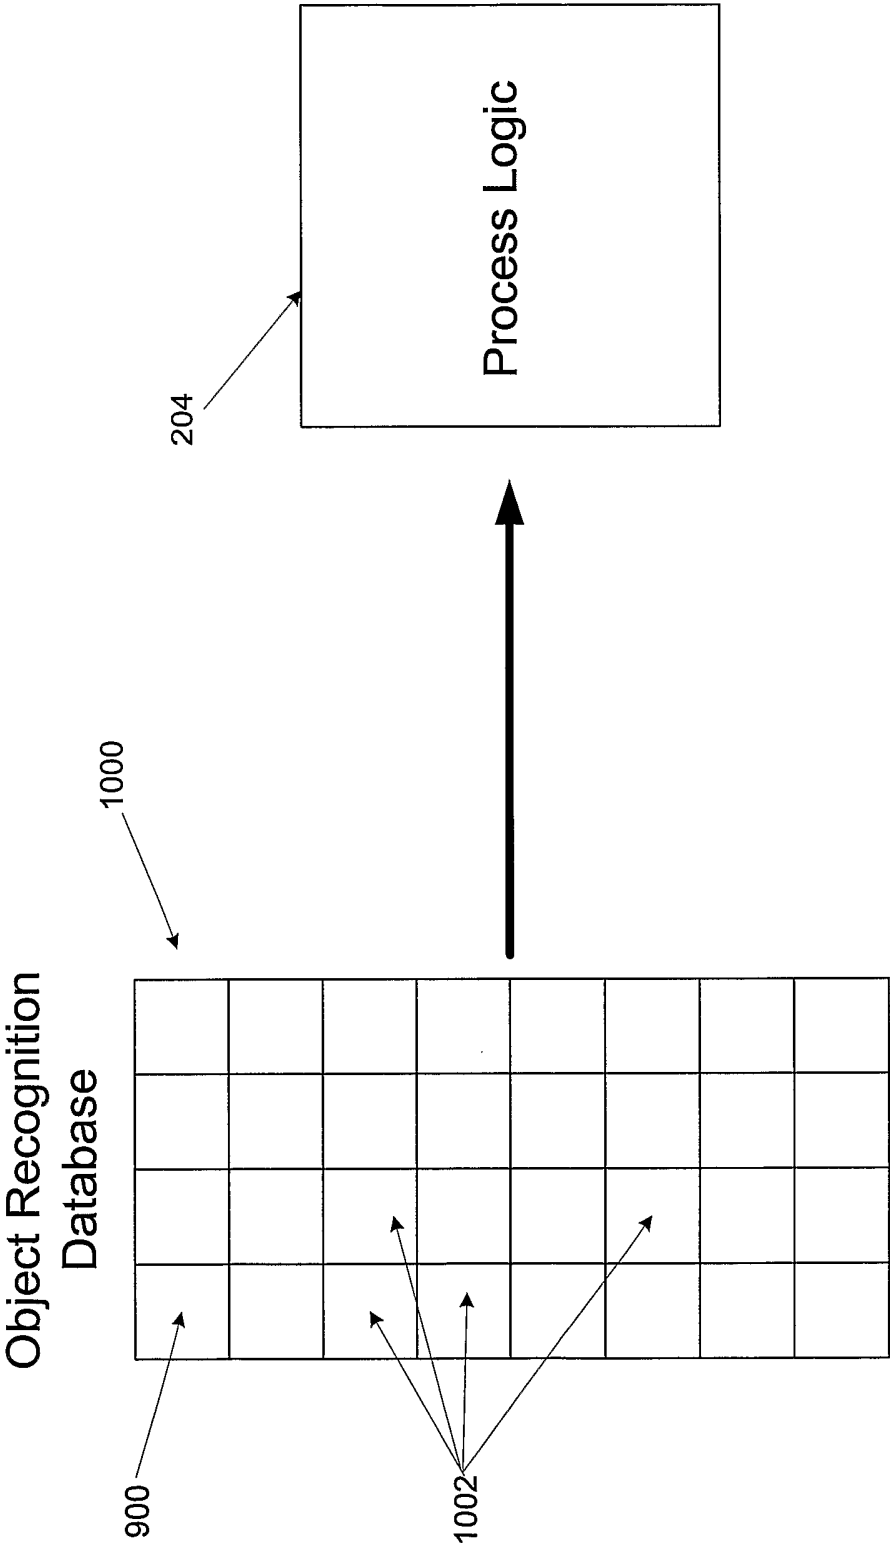


FIG. 10

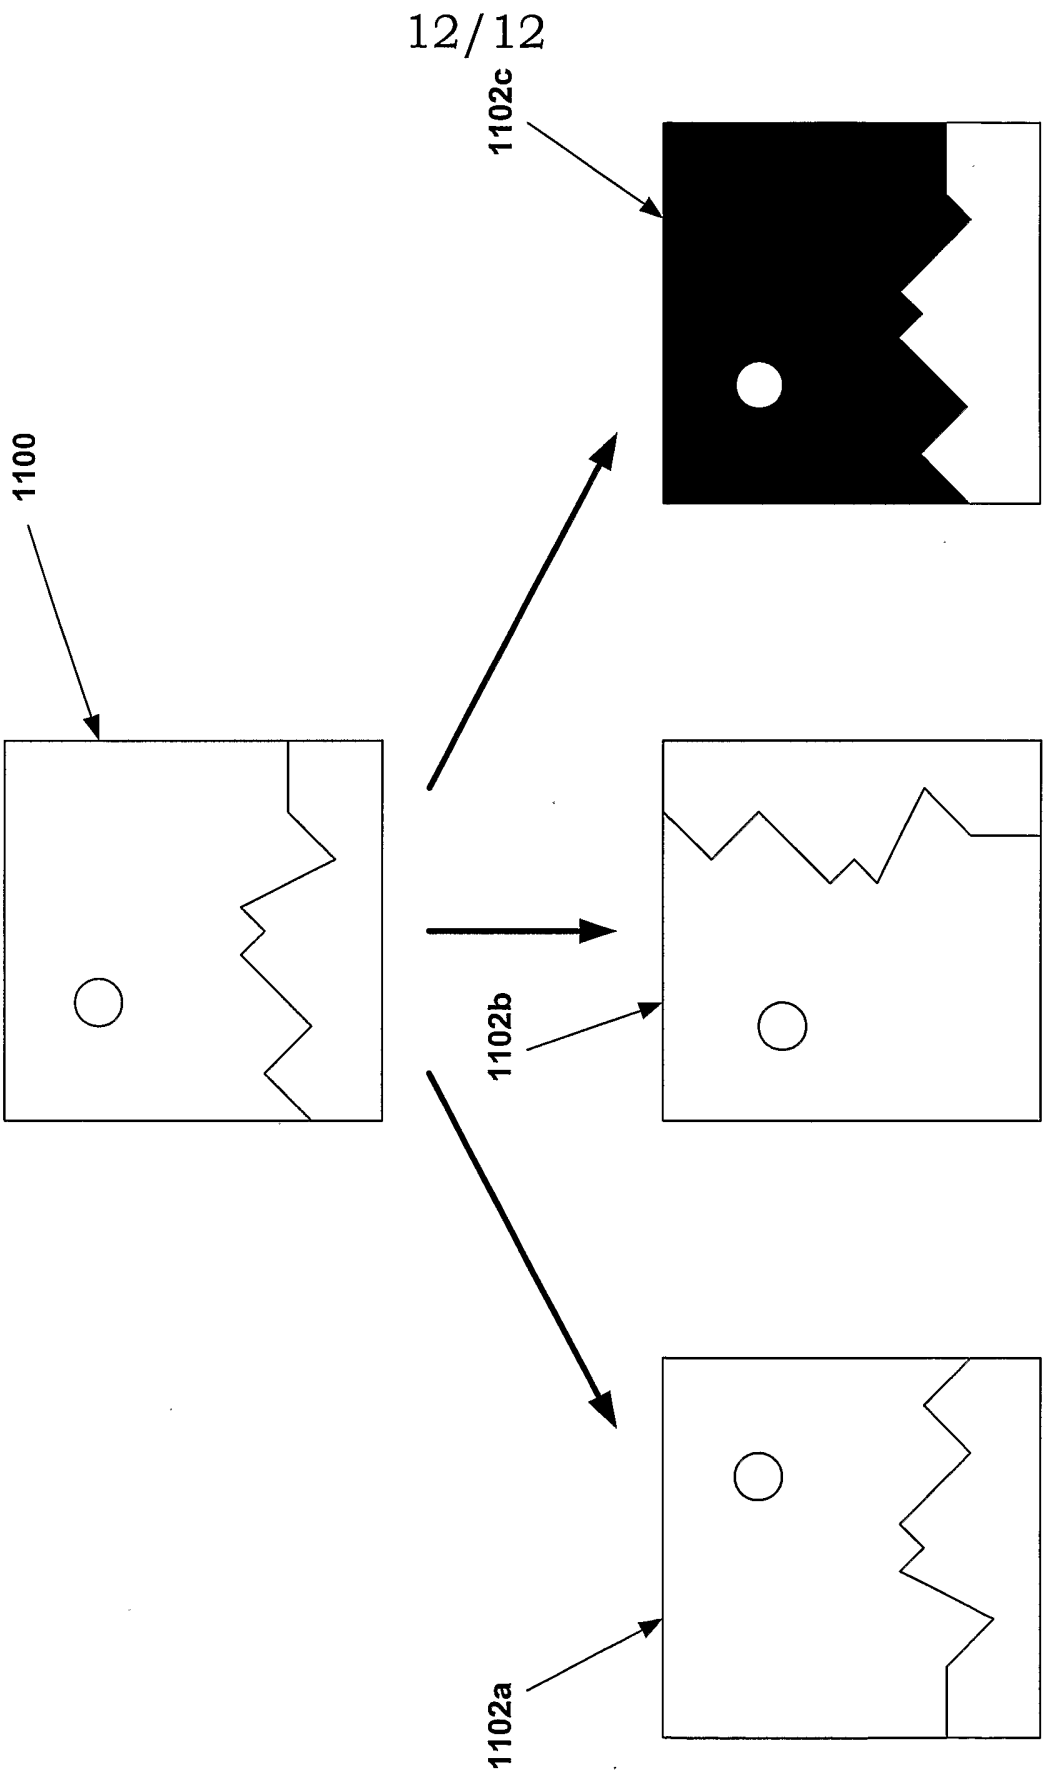


FIG. 11

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/11982

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K9/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K G06T H04N G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 05875 A (FLASHPOINT TECHNOLOGY INC) 3 February 2000 (2000-02-03) page 1, line 8 -page 2, line 10 page 8, line 13 -page 10, line 20 page 11, line 22 -page 11, line 26 claims 1-7,16 abstract	1-23
A	US 6 167 469 A (WANG EUGENE ET AL) 26 December 2000 (2000-12-26) column 7, line 37 - line 41 column 10, line 24 - line 67 figures 1,4C abstract	1-23

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

8 July 2003

Date of mailing of the international search report

29. 07. 2003 29. 08. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

ALEXANDER LAKIC/MN

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/11982

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	EP 1 209 589 A (EASTMAN KODAK CO) 29 May 2002 (2002-05-29) figures 3-7 abstract	1-23
A	--- EP 1 202 187 A (MICROSOFT CORP) 2 May 2002 (2002-05-02) abstract	1-23
A	--- DATABASE WPI Section EI, Week 200173 Derwent Publications Ltd., London, GB; Class T01, AN 2001-631762 XP002246988 & JP 2001 230992 A (COPAL CO LTD), 24 August 2001 (2001-08-24) abstract	1-23
A	--- DATABASE WPI Section EI, Week 200267 Derwent Publications Ltd., London, GB; Class W04, AN 2002-621863 XP002246989 & JP 2002 125143 A (CANON KK), 26 April 2002 (2002-04-26) abstract	1-23
A	--- DATABASE WPI Section EI, Week 199937 Derwent Publications Ltd., London, GB; Class T01, AN 1999-434613 XP002246990 & JP 11 175533 A (FUJI PHOTO FILM CO LTD), 2 July 1999 (1999-07-02) abstract	1-23

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/11982

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0005875	A	03-02-2000	US 2001012062 A1 AU 5103699 A WO 0005875 A1	09-08-2001 14-02-2000 03-02-2000
US 6167469	A	26-12-2000	NONE	
EP 1209589	A	29-05-2002	EP 1209589 A2 JP 2002202986 A	29-05-2002 19-07-2002
EP 1202187	A	02-05-2002	EP 1202187 A2 JP 2002197117 A	02-05-2002 12-07-2002
JP 2001230992	A	24-08-2001	NONE	
JP 2002125143	A	26-04-2002	NONE	
JP 11175533	A	02-07-1999	NONE	