




(86) Date de dépôt PCT/PCT Filing Date: 2009/02/17  
(87) Date publication PCT/PCT Publication Date: 2009/09/03  
(45) Date de délivrance/Issue Date: 2016/04/05  
(85) Entrée phase nationale/National Entry: 2010/07/26  
(86) N° demande PCT/PCT Application No.: GB 2009/050151  
(87) N° publication PCT/PCT Publication No.: 2009/106870  
(30) Priorité/Priority: 2008/02/29 (GB0803722.8)

(51) Cl.Int./Int.Cl. *B64C 23/04* (2006.01),  
*B64C 7/00* (2006.01)  
(72) Inventeur/Inventor:  
WOOD, NORMAN, GB  
(73) Propriétaire/Owner:  
AIRBUS OPERATIONS LIMITED, GB  
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : BOSSE ANTICHOC  
(54) Title: SHOCK BUMP

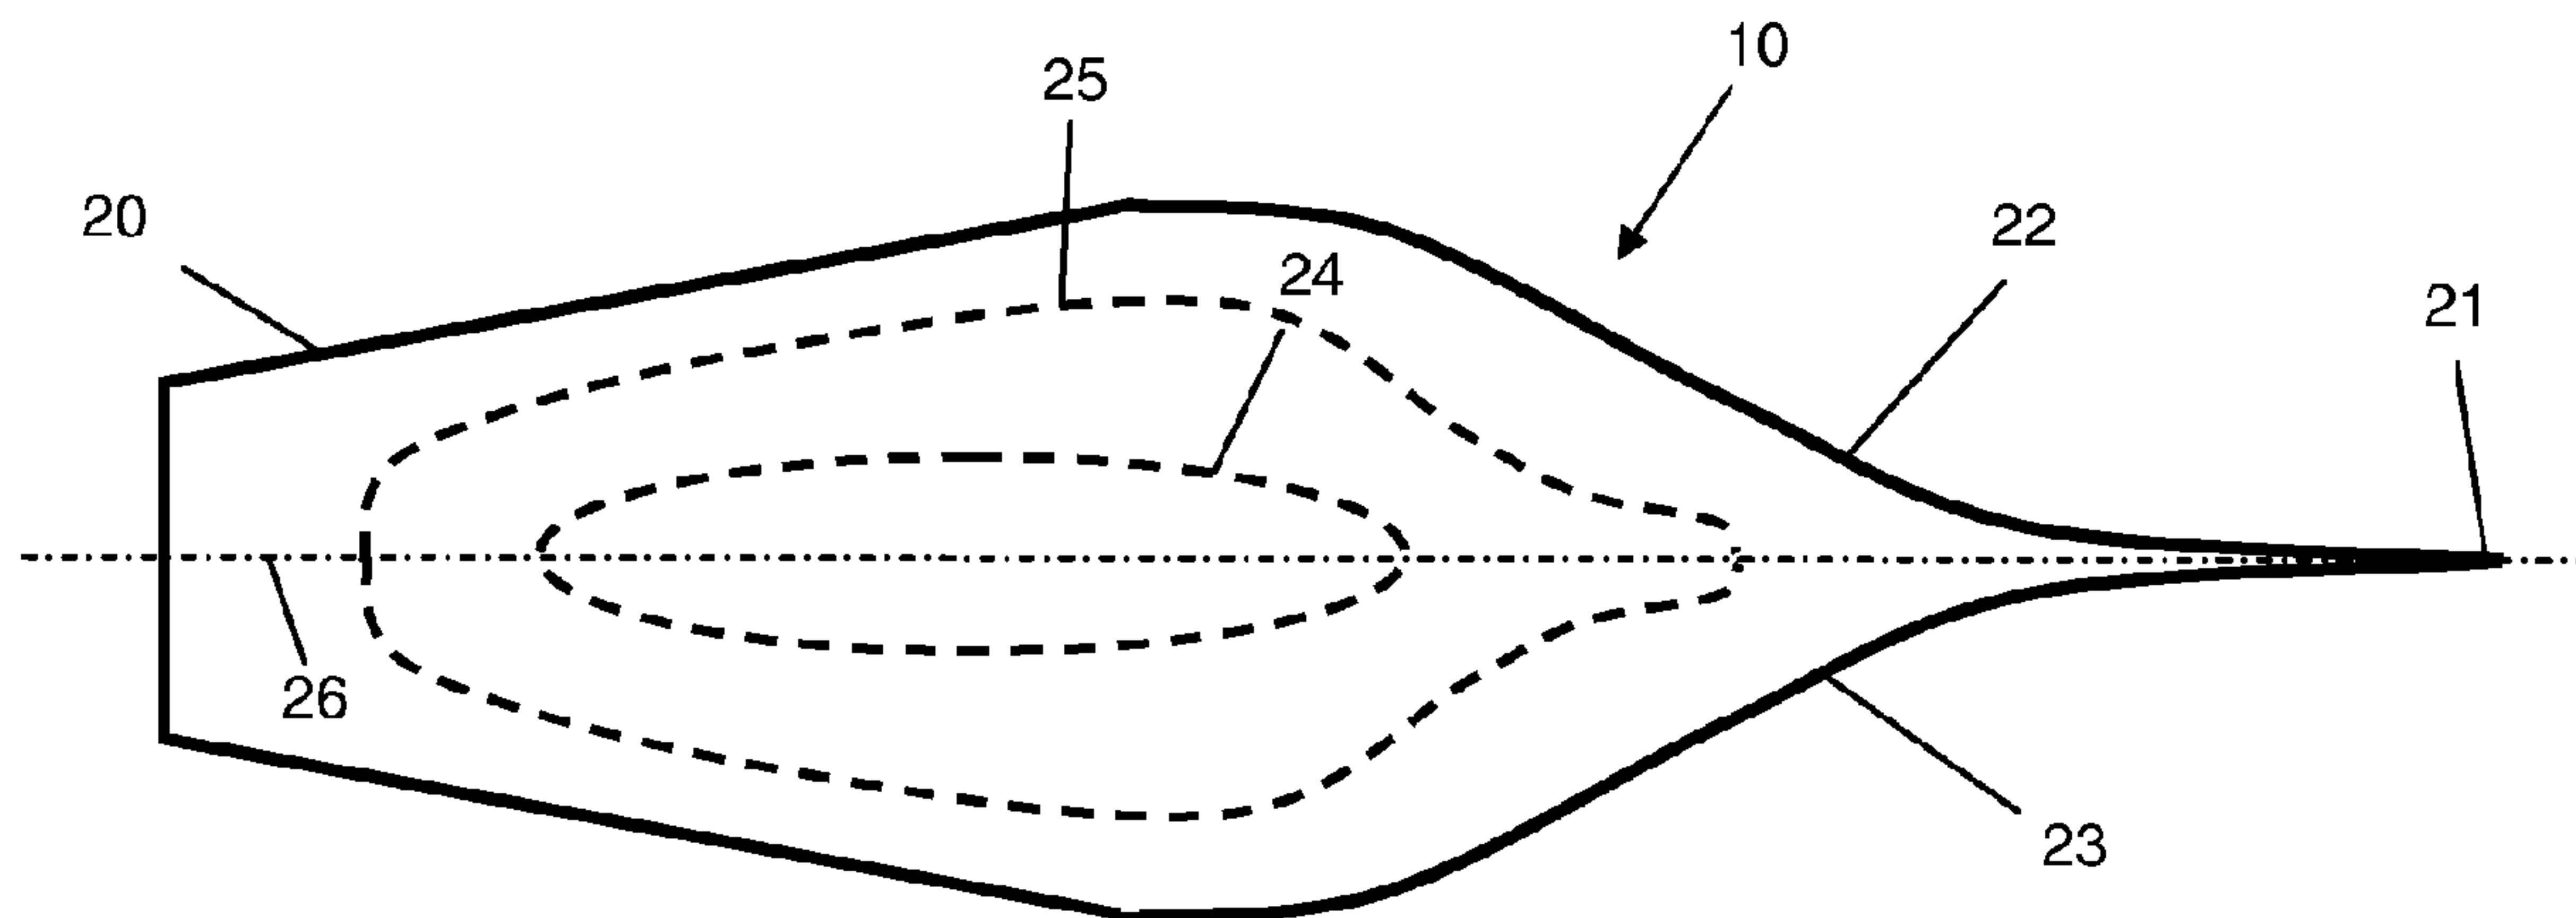

(57) Abrégé/Abstract:

A shock bump (10) comprising a diverging nose (20) and a converging tail. The tail has at least one plan-form con-tour line with a pair of concave opposite sides (22, 23). The shock bump provides an improved shape with relatively low drag. Furthermore, the concave shape of the tail tends to promote the development of longitudinal vortices which can reduce shock in-duced buffet at certain operating conditions.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 September 2009 (03.09.2009)

(10) International Publication Number  
**WO 2009/106870 A3**

(51) International Patent Classification:  
*B64C 23/04* (2006.01) *B64C 7/00* (2006.01)

(21) International Application Number:  
PCT/GB2009/050151

(22) International Filing Date:  
17 February 2009 (17.02.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0803722.8 29 February 2008 (29.02.2008) GB

(71) Applicant (for all designated States except US): **AIRBUS UK LIMITED** [GB/GB]; New Filton House, Bristol BS99 7AR (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WOOD, Norman** [GB/GB]; Airbus UK Limited, Filton, Bristol BS99 7AR (GB).

(74) Agent: **SCOTT, Alistair**; IP Dept, Building 09A, New Filton House, Filton, Bristol BS99 7AR (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:  
22 October 2009

(54) Title: SHOCK BUMP

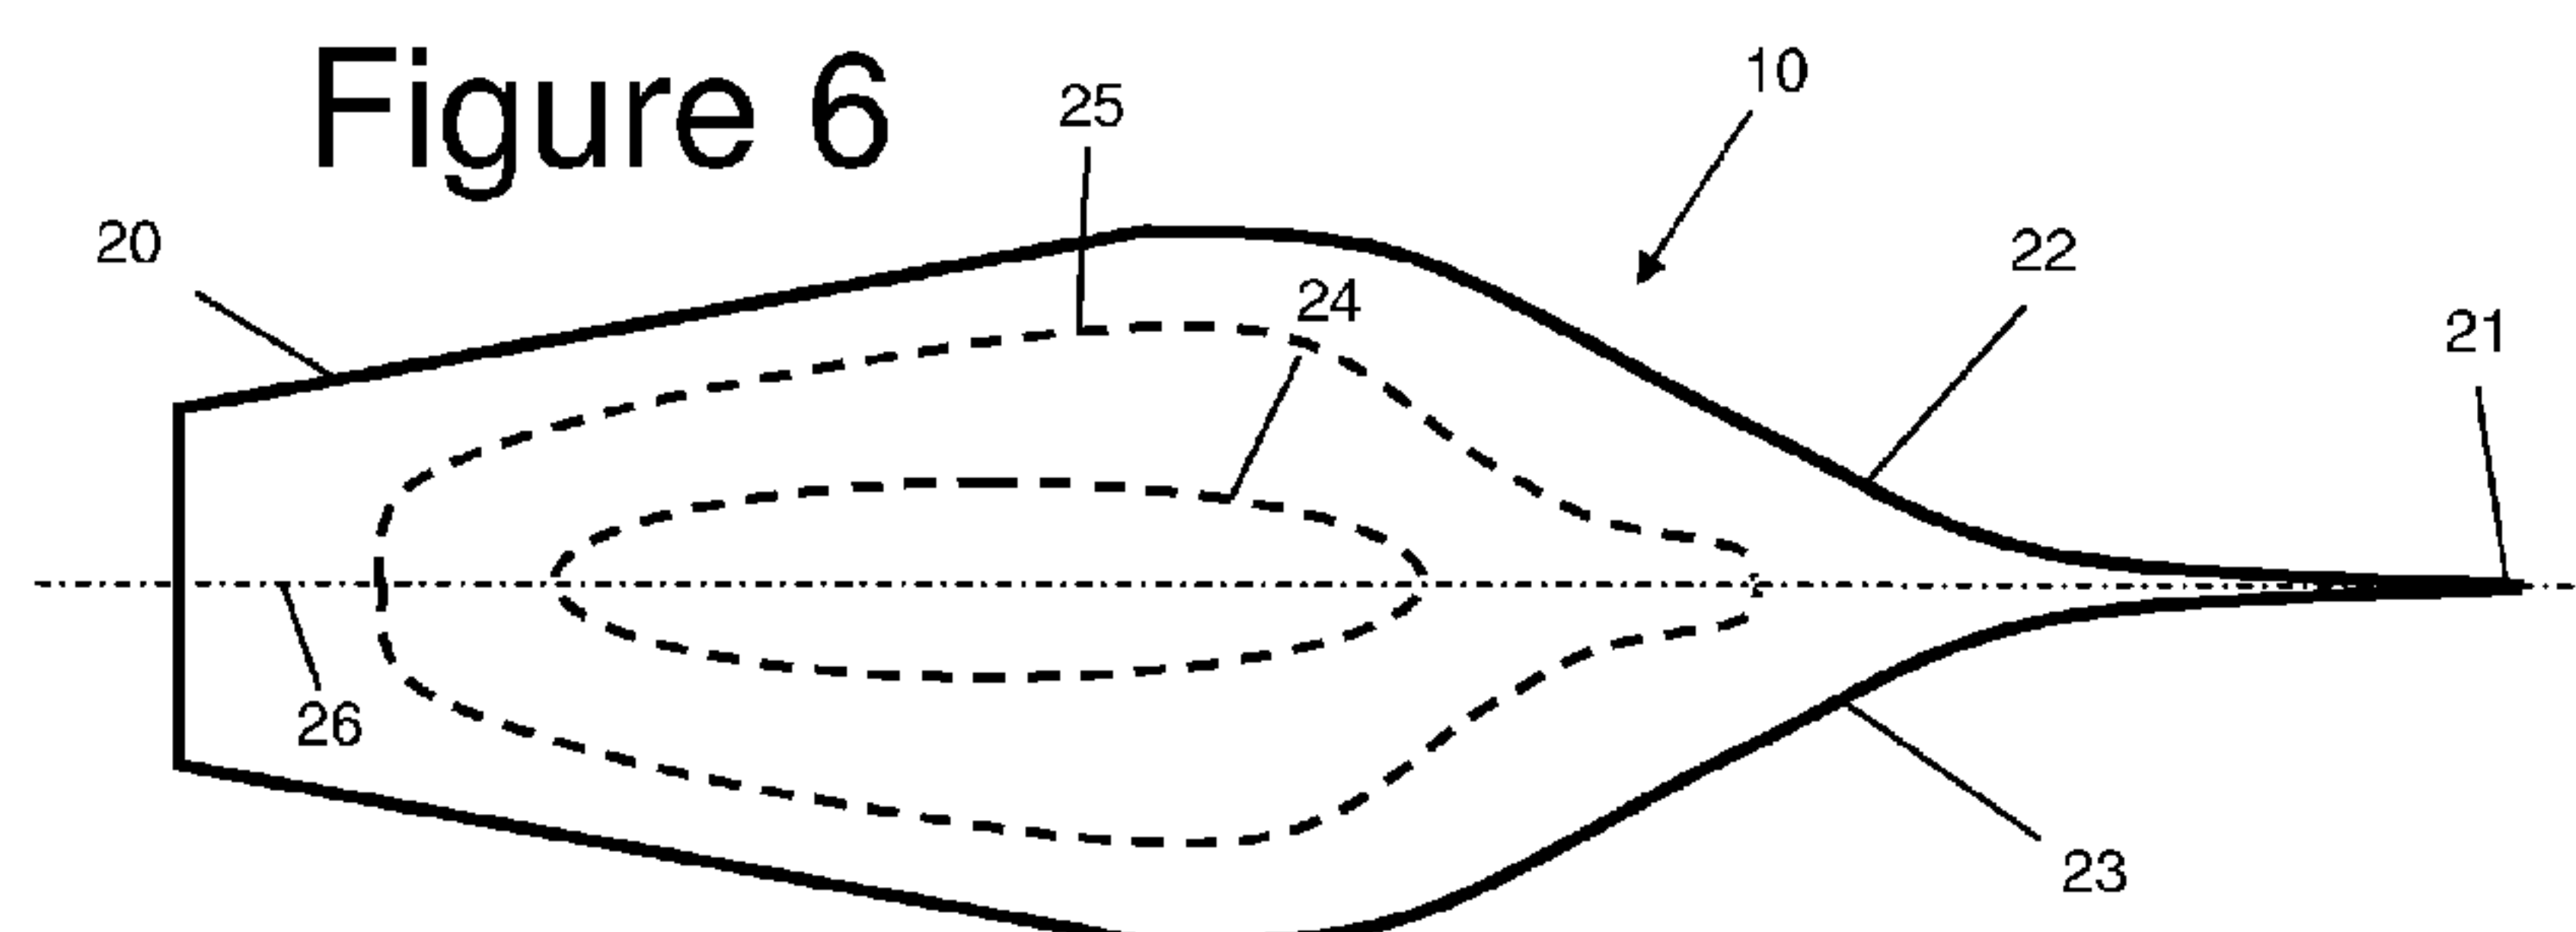

(57) Abstract: A shock bump (10) comprising a diverging nose (20) and a converging tail. The tail has at least one plan-form contour line with a pair of concave opposite sides (22, 23). The shock bump provides an improved shape with relatively low drag. Furthermore, the concave shape of the tail tends to promote the development of longitudinal vortices which can reduce shock induced buffet at certain operating conditions.

## SHOCK BUMP

### FIELD OF THE INVENTION

- 5 The present invention relates to a shock bump; and a method of operating an aerodynamic structure comprising a shock bump extending from its surface.

### BACKGROUND OF THE INVENTION

When an aircraft operates at a transonic flight speed above its design Mach number there is a tendency for the shock on the wing to strengthen and increase drag. At some  
10 point the shock may become sufficiently strong to also generate a flow separation downstream of the shock and this in turn may induce buffet on the wing or control surface. This buffet may range from light to severe and can result in high local dynamic loads, structure-borne noise or degradation of the handling qualities of the aircraft.

- 15 This phenomenon of shock induced buffet has been recognised and resolved previously by the application of vane vortex generators (VVGs) ahead of the shock. Such treatment is usually effective but carries with it an associated parasitic drag penalty that is present for operating conditions throughout the flight envelope.

As described in Holden, H.A. and Babinsky, H. (2003) *Shock/boundary layer  
20 interaction control using 3D devices* In: 41st Aerospace Sciences Meeting and Exhibit, January 6-9, 2003, Reno, Nevada, USA, Paper no. AIAA 2003-447, as a transonic flow passes over a 3-D shock bump the supersonic local conditions induce a smeared shock foot with a lambda-like wave pattern.

- US 2006/0060720 uses a shock control protrusion to generate a shock extending away  
25 from the lower surface of a wing.



## SUMMARY OF THE INVENTION

A first aspect of the invention provides a shock bump comprising a diverging nose and a converging tail, wherein the tail has at least one plan-form contour line with a pair of concave opposite sides.

- 5 The shock bump of the first aspect of the invention provides an improved shape with relatively low drag. Furthermore, the concave shape of the tail tends to promote the development of longitudinal vortices which can reduce shock induced buffet in certain operating conditions.

10 The opposite sides of the plan-form contour line may become convex and meet each other head-on at the trailing edge of the shock bump, or may meet at a cusp-like point.

Typically the shock bump has a leading edge, a trailing edge, an inboard edge and an outboard edge. The bump may merge gradually into the surface at its edges or there may be an abrupt concave discontinuity at one or more of its edges.

Typically the shock bump has substantially no sharp convex edges or points.

- 15 A second aspect of the invention provides an aerodynamic structure comprising one or more shock bumps of the type described above extending from its surface. Typically each shock bump is shaped and positioned so as to modify the structure of a shock which would form adjacent to the surface of the structure in the absence of the shock bump(s) when the structure is moved at transonic speeds. This can be contrasted with  
20 US 2006/0060720 which uses a shock control protrusion to generate a shock which would not otherwise exist in the absence of the shock control protrusion.

A third aspect of the invention provides a method of operating an aerodynamic structure, the structure comprising a shock bump extending from its surface, the method comprising:

- 25 operating the structure at a first condition in which the flow over the shock bump is substantially fully attached; and

operating the structure at a second condition in which a shock forms adjacent to the surface of the aerofoil, the shock bump modifies the structure of the shock, and the flow over the shock bump detaches and forms a pair of longitudinal vortices.

- 5 Typically the second condition is one involving a higher flow speed and/or a higher lift coefficient than the first condition.

The structure may comprise an aerofoil such as an aircraft wing, horizontal tail plane or control surface; an aircraft structure such as a nacelle, pylon or fin; or any other kind of aerodynamic structure such as a turbine blade.

- 10 In the case of an aerofoil the shock bump may be located on a high pressure surface of the aerofoil (that is, the lower surface in the case of an aircraft wing) but more preferably the surface is a low pressure surface of the aerofoil (that is, the upper surface in the case of an aircraft wing). Also the shock bump typically has an apex which is positioned towards the trailing edge of the aerofoil, in other words it is  
15 positioned aft of 50% chord. The apex of the bump may be a single point, or a plateau. In the case of a plateau then the leading edge of the plateau is positioned towards the trailing edge of the aerofoil.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- Embodiments of the invention will now be described with reference to the  
20 accompanying drawings, in which:

Figure 1 is a plan view of the top of an aircraft wing carrying an array of shock bumps according to a first embodiment of the invention, operating at its “design” operating condition;

- Figures 2 is a longitudinal cross-sectional view through the centre of one of the bumps  
25 taken along a line A-A, with the wing in its “design” operating condition;

Figure 3 is a plan view of the top of the aircraft wing of Figure 1, with the wing in an “off-design” operating condition;



Figure 4 is a longitudinal cross-sectional view through the centre of one of the bumps taken along a line B-B, with the wing in an “off-design” operating condition;

Figure 5 is a transverse cross-sectional view through the centre of one of the bumps taken along a line C-C;

5 Figure 6 is a plan view of one of the bumps showing a series of contour lines; and

Figure 7 is a plan view of the top of an aircraft wing carrying an array of shock bumps according to a second embodiment of the invention.

#### DETAILED DESCRIPTION OF EMBODIMENT(S)

10 Figure 1 is a plan view of the upper surface of an aircraft wing. The wing has a leading edge 1 and a trailing edge 2, each swept to the rear relative to the free stream direction.

The upper surface of the wing carries an array of shock bumps extending from its surface. The array comprises a first series of shock bumps 3; and a second series of shock bumps 10 positioned aft of the first series.

15 Each bump 3, 10 protrudes from a nominal surface 8 of the wing, and meets the nominal surface 8 at a leading edge 3a, 10a; a trailing edge 3b, 10b; an inboard edge 3c, 10c; and an outboard edge 3d, 10d. The lower portions of the sides of bump are concave and merge gradually into the nominal surface 8. For example in Figure 2 the lower portion 9 of the front side of the bump merges gradually into the nominal  
20 surface 8 at leading edge 3a. Alternatively there may be an abrupt discontinuity at one or more of the edges of the bump. For instance the lower portion of the front side of the bump may be planar as illustrated by dashed line 9a. In this case the front side 9a of the shock bump meets the nominal surface 8 with an abrupt discontinuity at the leading edge 3a.

25 Figure 2 is a cross-sectional view through the centre of one of the bumps 3 taken along a line A-A parallel with the free stream direction. The apex point 7 of the fore/aft cross-section A-A is offset aft of the centre 6 of the bump.

The apex 7 of each bump 3 is positioned aft of 50% chord, typically between 60% and 65% chord.

At transonic speeds a shock forms normal to the upper surface of the wing. Figures 1 and 2 show the position 4 of the shock when the aircraft is operated with a Mach number and lift coefficient which together define a “design” operating condition (generally associated with the cruise phase of a flight envelope). At this “design” operating condition the shock bumps 3 are positioned so as to induce a smeared foot 5 in the shock 4 with a lambda like wave pattern as shown in Figure 2, and the flow over the second series of shock bumps 10 is fully attached.

When the shock bumps 3 are operated at their optimum with the shock 4 just ahead of the apex 7 of the bump as shown in Figure 2, the smeared foot 5 has a lambda-like wave pattern with a single forward shock 5a towards the leading edge of the bump and a single rear shock 5b positioned slightly forward of the apex 7. Alternatively, instead of having only a single forward shock 5a, the smeared foot may have a lambda-like wave pattern with a fan-like series of forward shocks.

The second series of shock bumps 10 is positioned to modify the structure of a shock 11 which forms adjacent to the surface of the wing when the aerofoil is operated at a higher Mach number or lift coefficient associated with an “off-design” operating condition as shown in Figures 3 and 4. When the lift coefficient or Mach number increases, the shock moves aft to a position 11 shown in Figure 3, and the shock bumps 10 are positioned so as to induce a smeared shock foot 15 with a lambda like wave pattern as shown in Figure 4.

Note that, unlike vortex generators, the bumps have no sharp convex edges or points so the flow remains attached over the bumps when they are operated at their optimum (i.e. when the shock is positioned on the bump just ahead of its apex). A characteristic of three-dimensional shock bumps is that when operated away from their optimum i.e. when the shock is positioned on the bump but not just ahead of the apex of the bump, the flow at the rear of the bump tends to detach. This rear bump separation is exploited to form a pair of counter rotating longitudinal vortices 12,13 aligned with the flow direction that will have a similar positive impact on high speed buffet as



VVGs. These vortices are embedded in or just above the boundary layer. When operated at normal cruise conditions as shown in Figure 1 the flow is fully attached and the usual parasitic drag of VVGs is avoided. Hence the shock bumps 10 provide an improved flight envelope and speed range or reduced loads at high speed.

- 5 The second series of shock bumps is offset slightly relative to the first series, so that none of the shock bumps 10 in the second series are positioned directly aft of any of the shock bumps 3 in the first series.

Figure 5 is a lateral cross-section through the centre of one of the bumps 10, and Figure 6 shows a series of plan-form contour lines (equivalent to contour lines in a map) including a footprint contour line in solid line where the shock bump merges  
10 into the upper surface of the wing; an intermediate contour line 25; and an upper contour line 24. The footprint contour line comprises a diverging nose 20 and a converging tail with concave opposite sides 22,23 which meet at a cusp-like point 21 at the trailing edge of the bump. The tail of the intermediate contour line 25 has a pair  
15 of concave sides which become convex and meet head-on at the trailing edge of the contour line 25. The shock bump 10 is laterally symmetric about its fore-and-aft centre line 26.

The detailed shape of each individual shock bump 10 can be adjusted from the shape illustrated such that at the “design” operating condition the flow over the bump is fully  
20 attached as shown in Figure 1. When operated at higher Mach number or lift coefficient as shown in Figure 3, some beneficial modification of the shock foot will take place in addition to the formation of a pair of longitudinal vortices.

Similar levels of buffet alleviation as achieved by VVG devices is anticipated and the concept could be applied to other aerodynamic structures such as turbine blades,  
25 nacelles, pylons, fins and tails.

In the embodiment of Figure 1, the upper surface of the wing carries an array of shock bumps comprising a first series of shock bumps 3 with an elliptical footprint, and a second series of cusp-shaped shock bumps 10 positioned aft of the first series. However, various other embodiments fall within the scope of the invention, including:



- a single cusp-shaped shock bump
  - a single series of cusp-shaped shock bumps (that is, with the elliptical shock bumps 3 omitted) in the same “on-design” position as the first series of shock bumps 3 in Figure 1
- 5
- a single series of cusp-shaped shock bumps (that is, with the elliptical shock bumps 3 omitted) in the same “off-design” position as the second series of shock bumps 10 in Figure 1
  - an array of shock bumps comprising two series of cusp-shaped shock bumps in the same positions as the bumps 3, 10 in Figure 1.
- 10
- Figure 7 is a plan view of the upper surface of an aircraft wing according to a second embodiment of the present invention. The embodiment of Figure 7 is identical to the embodiment of Figure 1, except in this case the forward series has ten shock bumps 3, whereas there is only a single rear shock bump 10. Figure 10 shows the span-wise extent of the shocks 4, 11. It can be seen that the shock 4 extends over a significant
- 15
- span-wise portion of the wing, whereas the shock 11 is relatively short so only a small number of rear shock bumps 10 (in this case only one) is needed.

Although the invention has been described above with reference to one or more preferred embodiments, it will be appreciated that various changes or modifications may be made without departing from the scope of the invention as defined in the

20

appended claims.

The invention claimed is:

1. A transonic airflow shock bump, said bump comprising a diverging nose and a converging tail, wherein the tail has at least one plan-form contour line with a pair of concave opposite sides, said shock bump is configured to cause detached air flow over said shock bump, said detached flow comprising a pair of longitudinal vortices.
2. The shock bump of claim 1 wherein the concave opposite sides of the plan-form contour line meet at a cusp.
3. The shock bump of claim 1 further comprising a leading edge, a trailing edge, an inboard edge and an outboard edge.
4. The shock bump of claim 1 wherein the shock bump has substantially no sharp convex edges or points.
5. An aerodynamic structure having a surface, said structure comprising at least one shock bump according to claim 1 extending from said surface.
6. The structure of claim 5, wherein said bump meets the surface at a leading edge of the bump, a trailing edge of the bump, an inboard edge of the bump and an outboard edge of the bump.
7. The structure according to claim 5 wherein the shock bump is configured to modify the structure of a transonic shock forming adjacent to the surface of the structure when the structure is moved through air at transonic speeds.
8. The structure of claim 7 wherein the shock bump is shaped and positioned so as to induce a smeared foot in the shock with a lambda wave pattern.



9. The structure of claim 5 wherein the aerodynamic structure is an aerofoil and the surface is a low pressure surface of the aerofoil.
10. The structure of claim 5 wherein the aerodynamic structure is an aerofoil having a leading edge and a trailing edge, and wherein said bump has an apex which is positioned towards the trailing edge of the aerofoil.
11. A method of operating a transonic aerodynamic structure having a surface, the structure comprising a shock bump extending from said surface, the shock bump having a diverging nose and a converging tail, the tail having at least one plan-form contour line with a pair of concave opposite sides, the method comprising operating the structure at a condition in which airflow over the surface forms a shock adjacent to the surface of the aerofoil, the shock bump modifies the structure of the shock, and airflow over the shock bump detaches and forms a pair of longitudinal vortices.

Figure 1



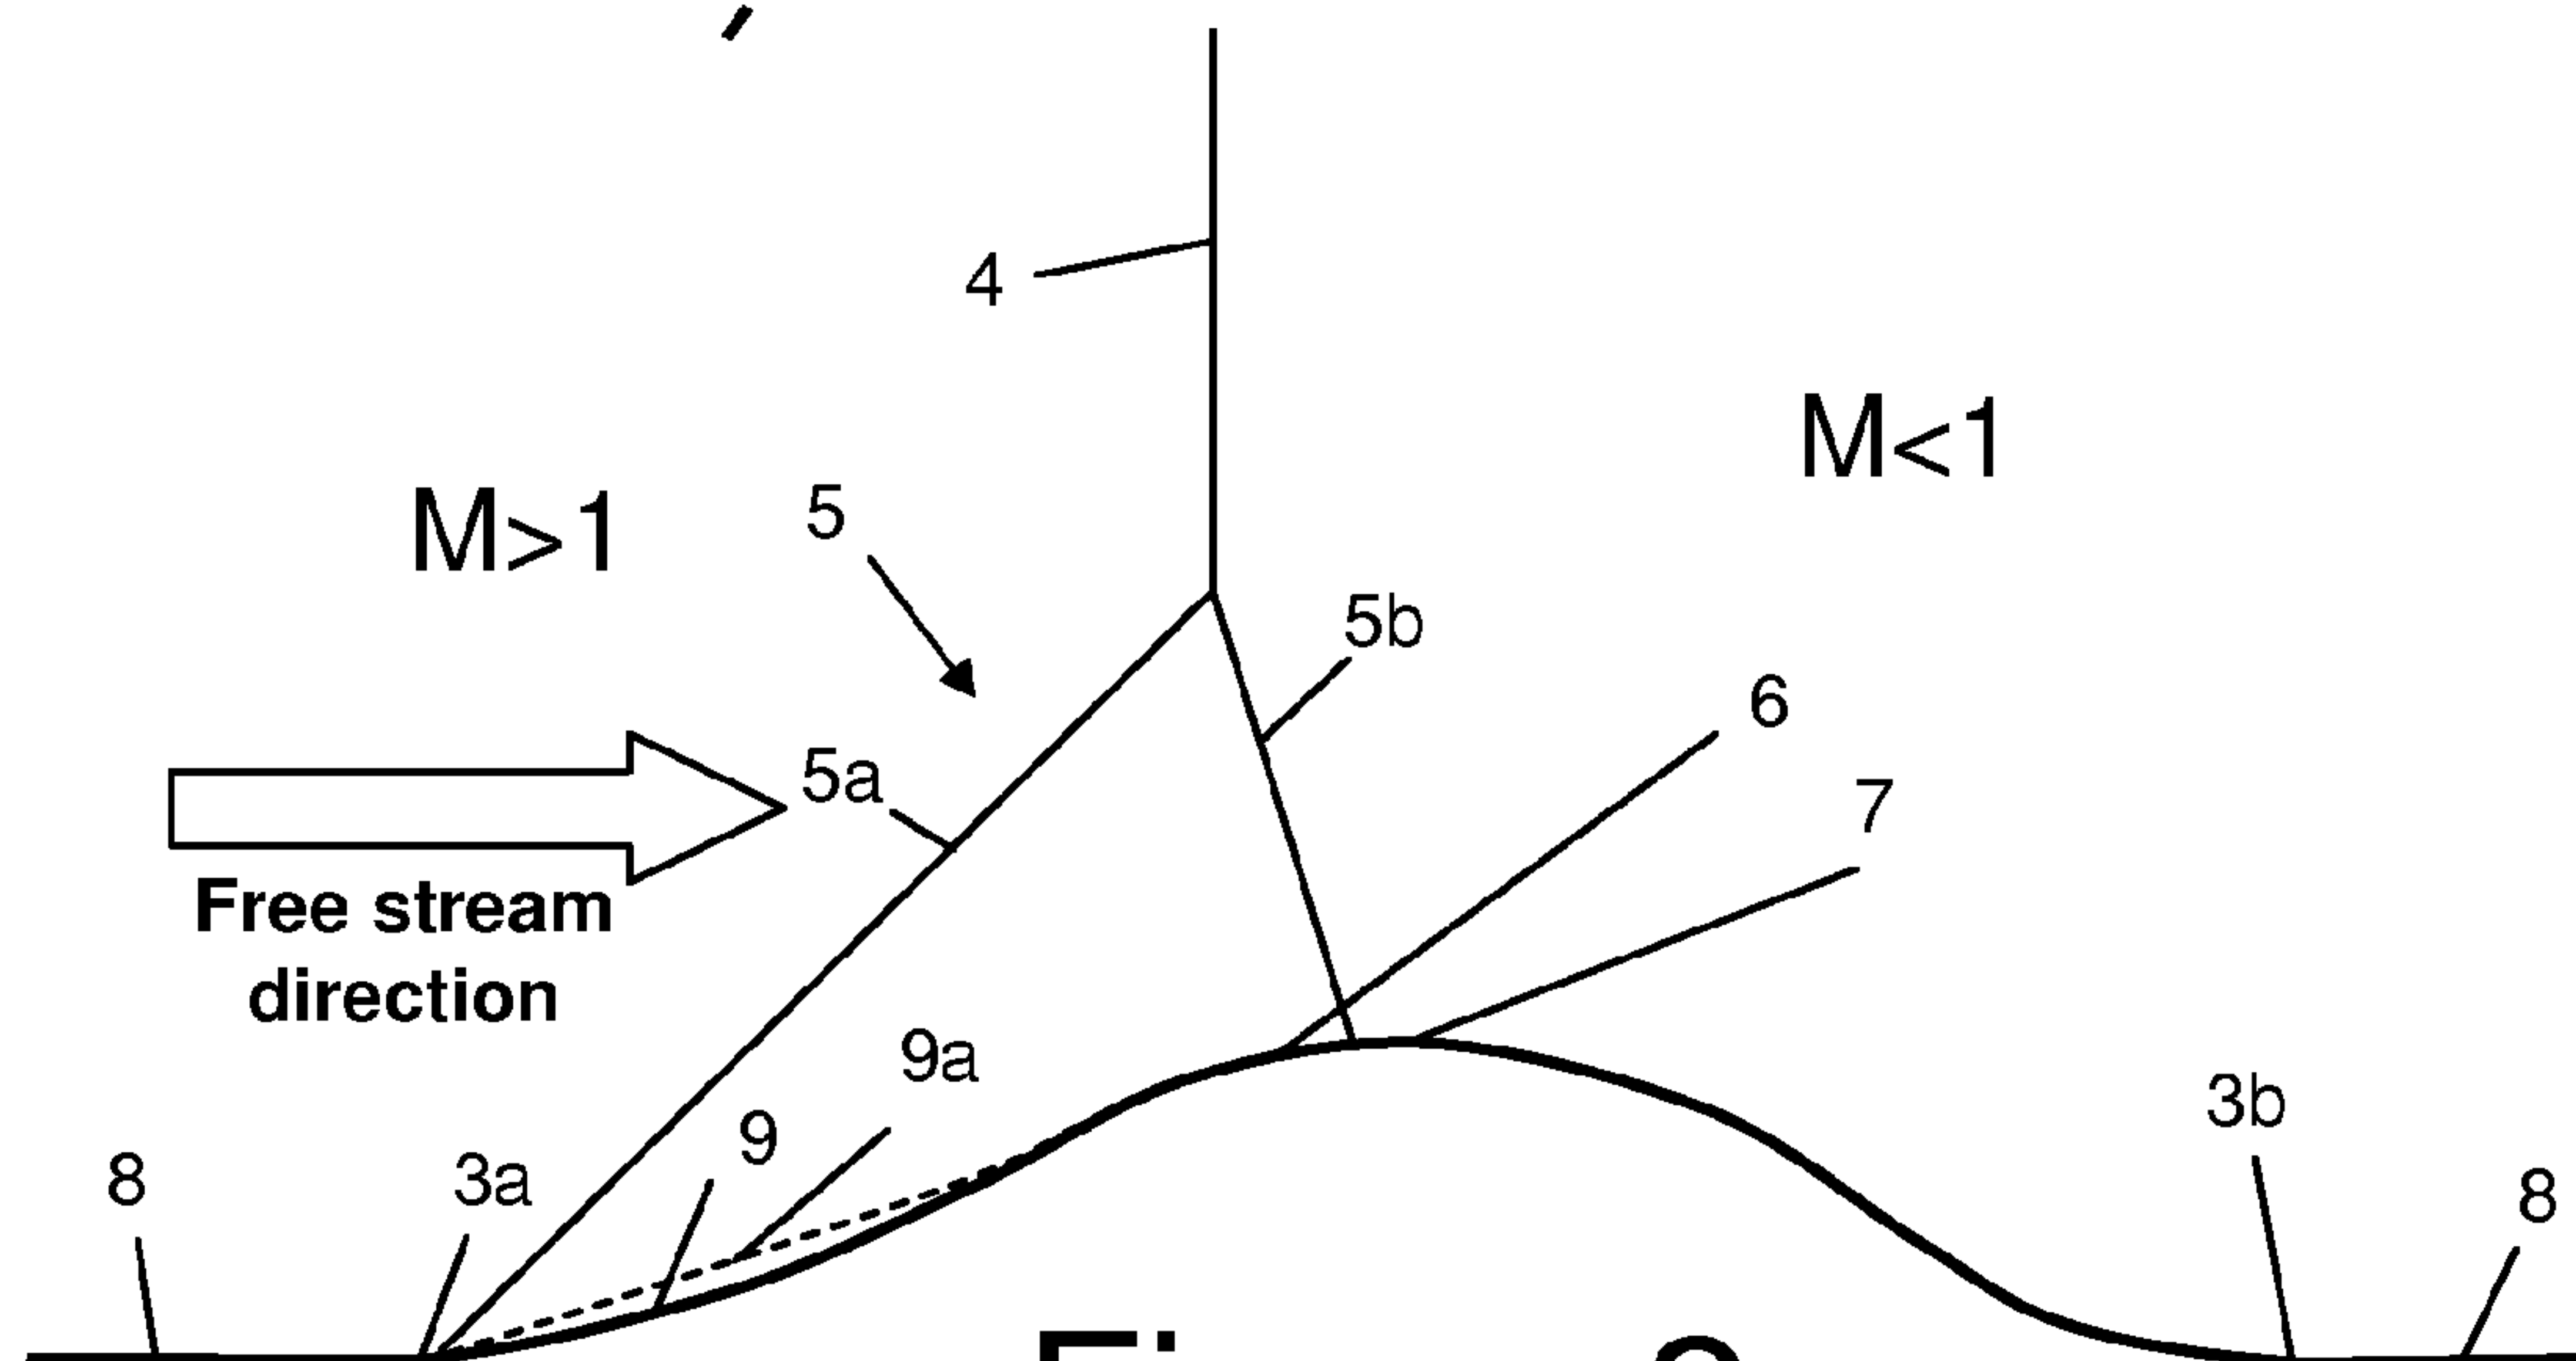



Figure 2

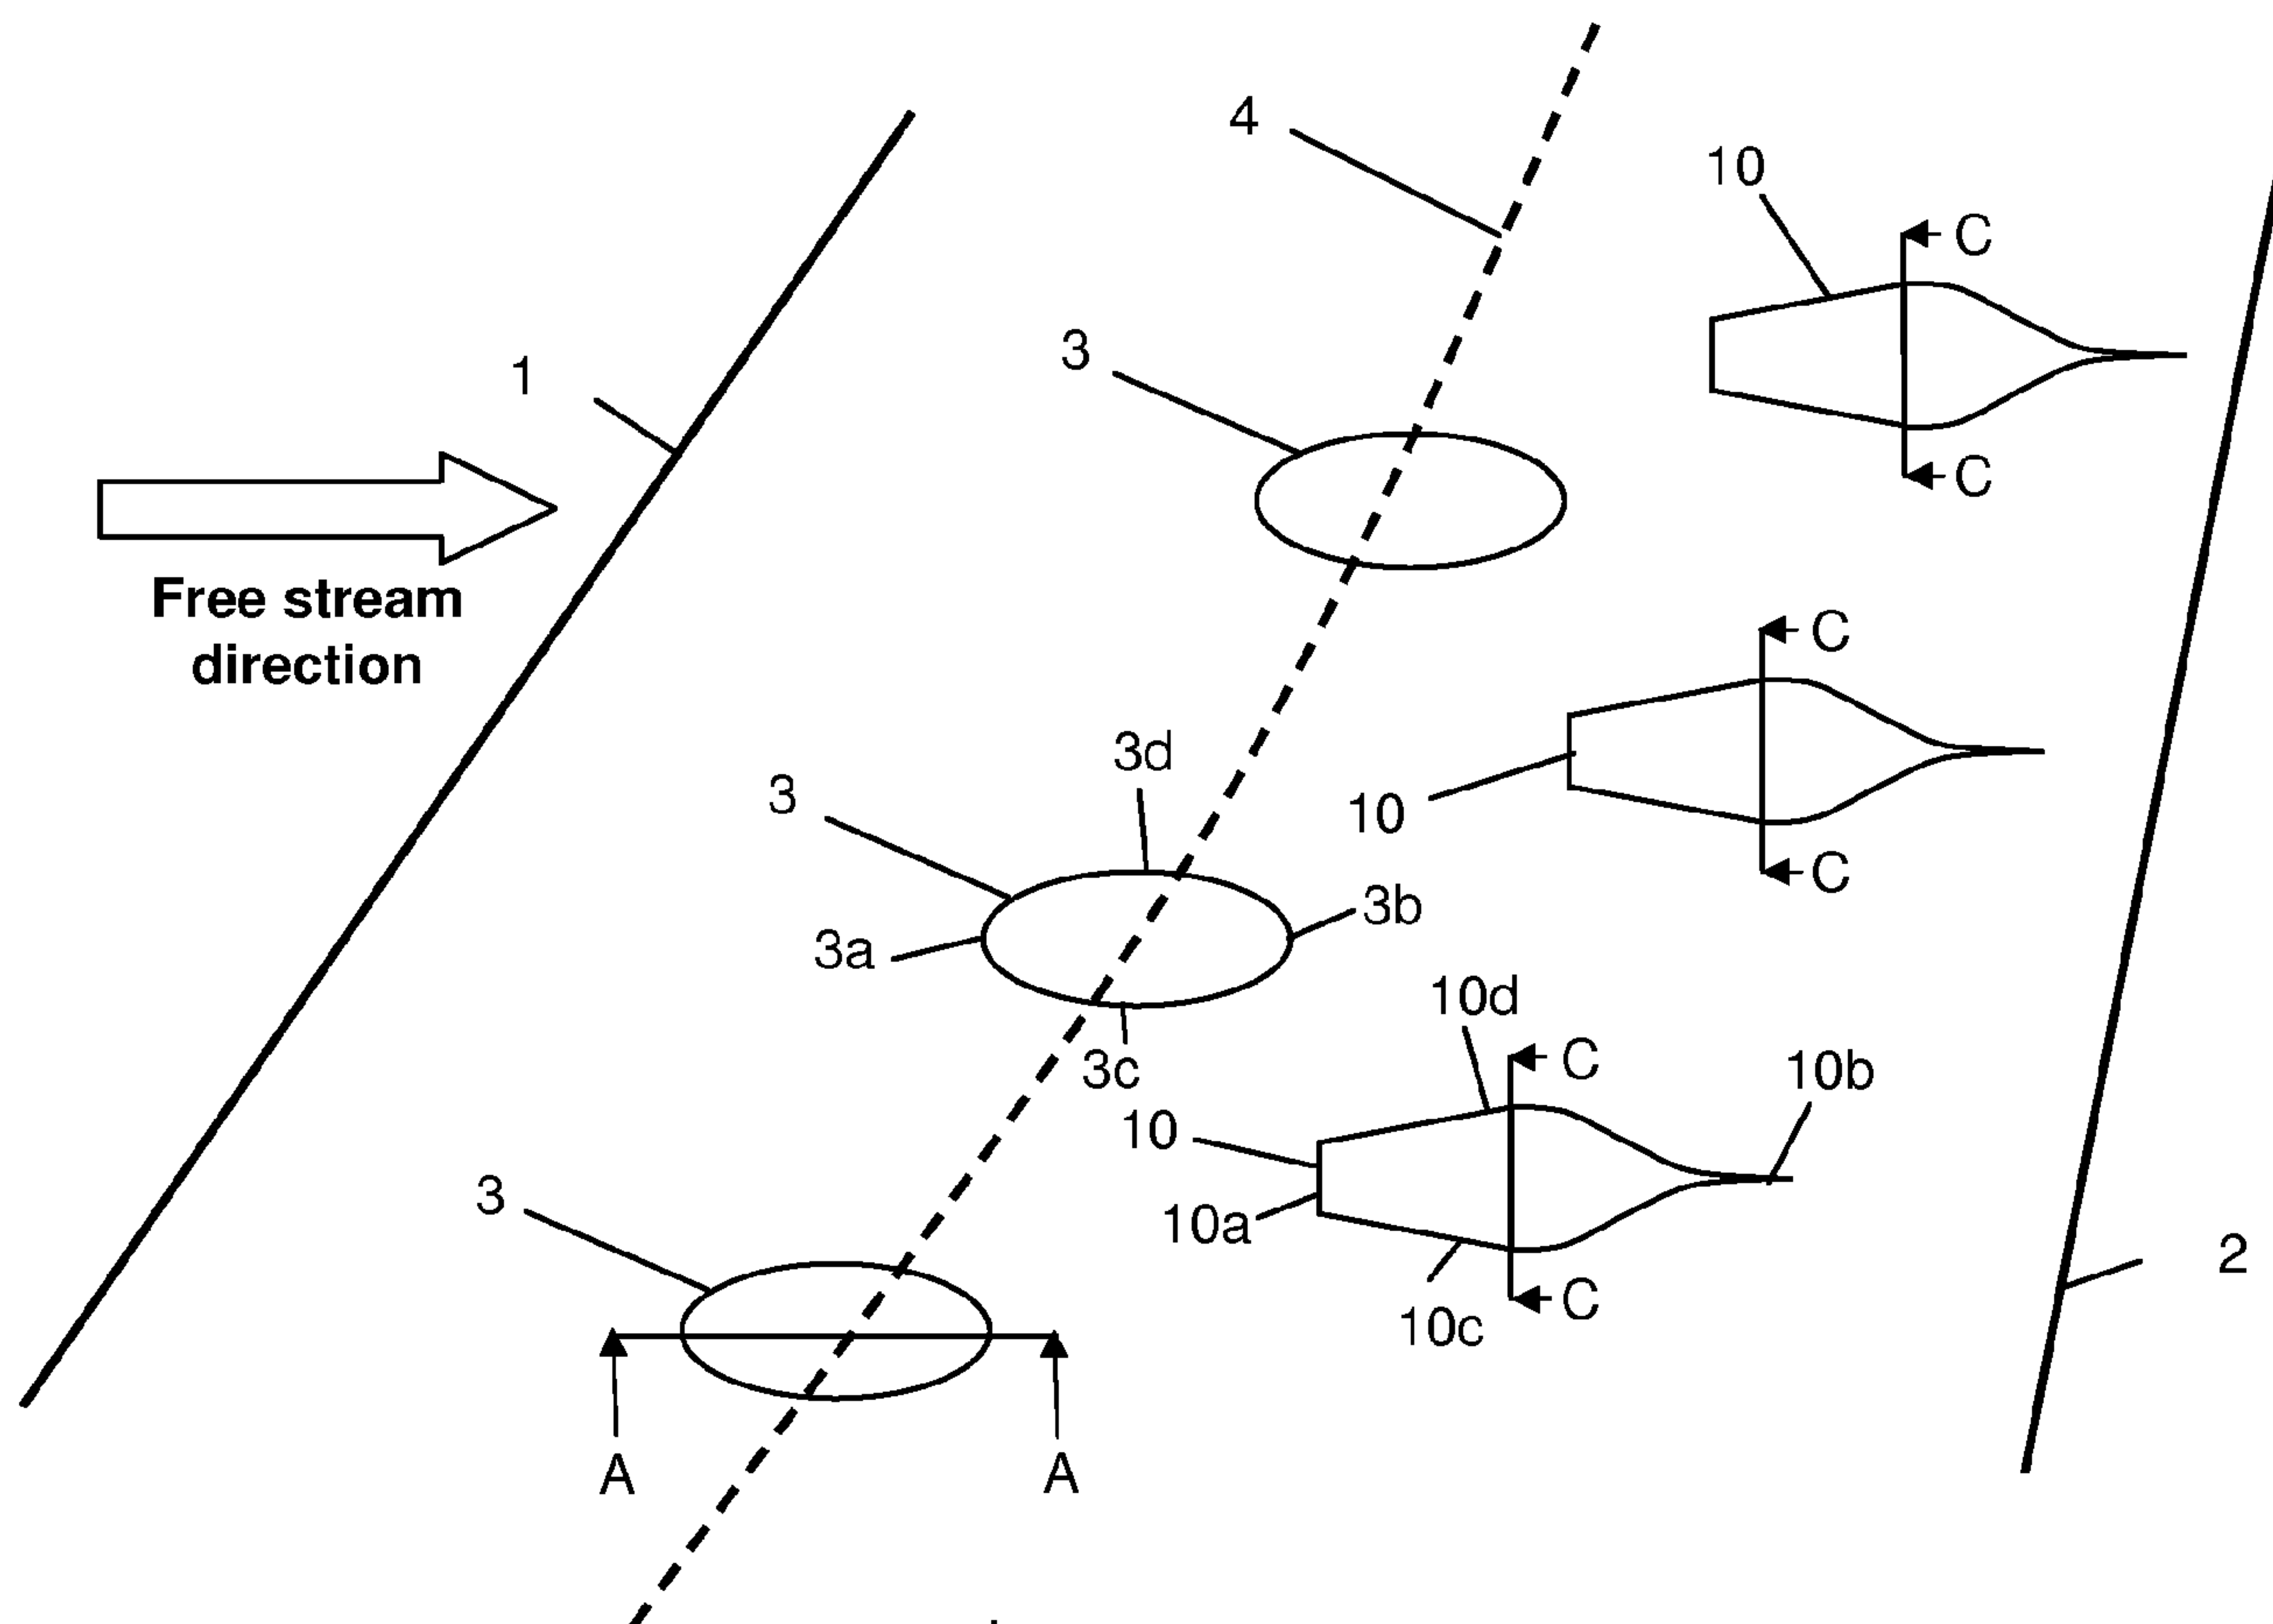

### Figure 3

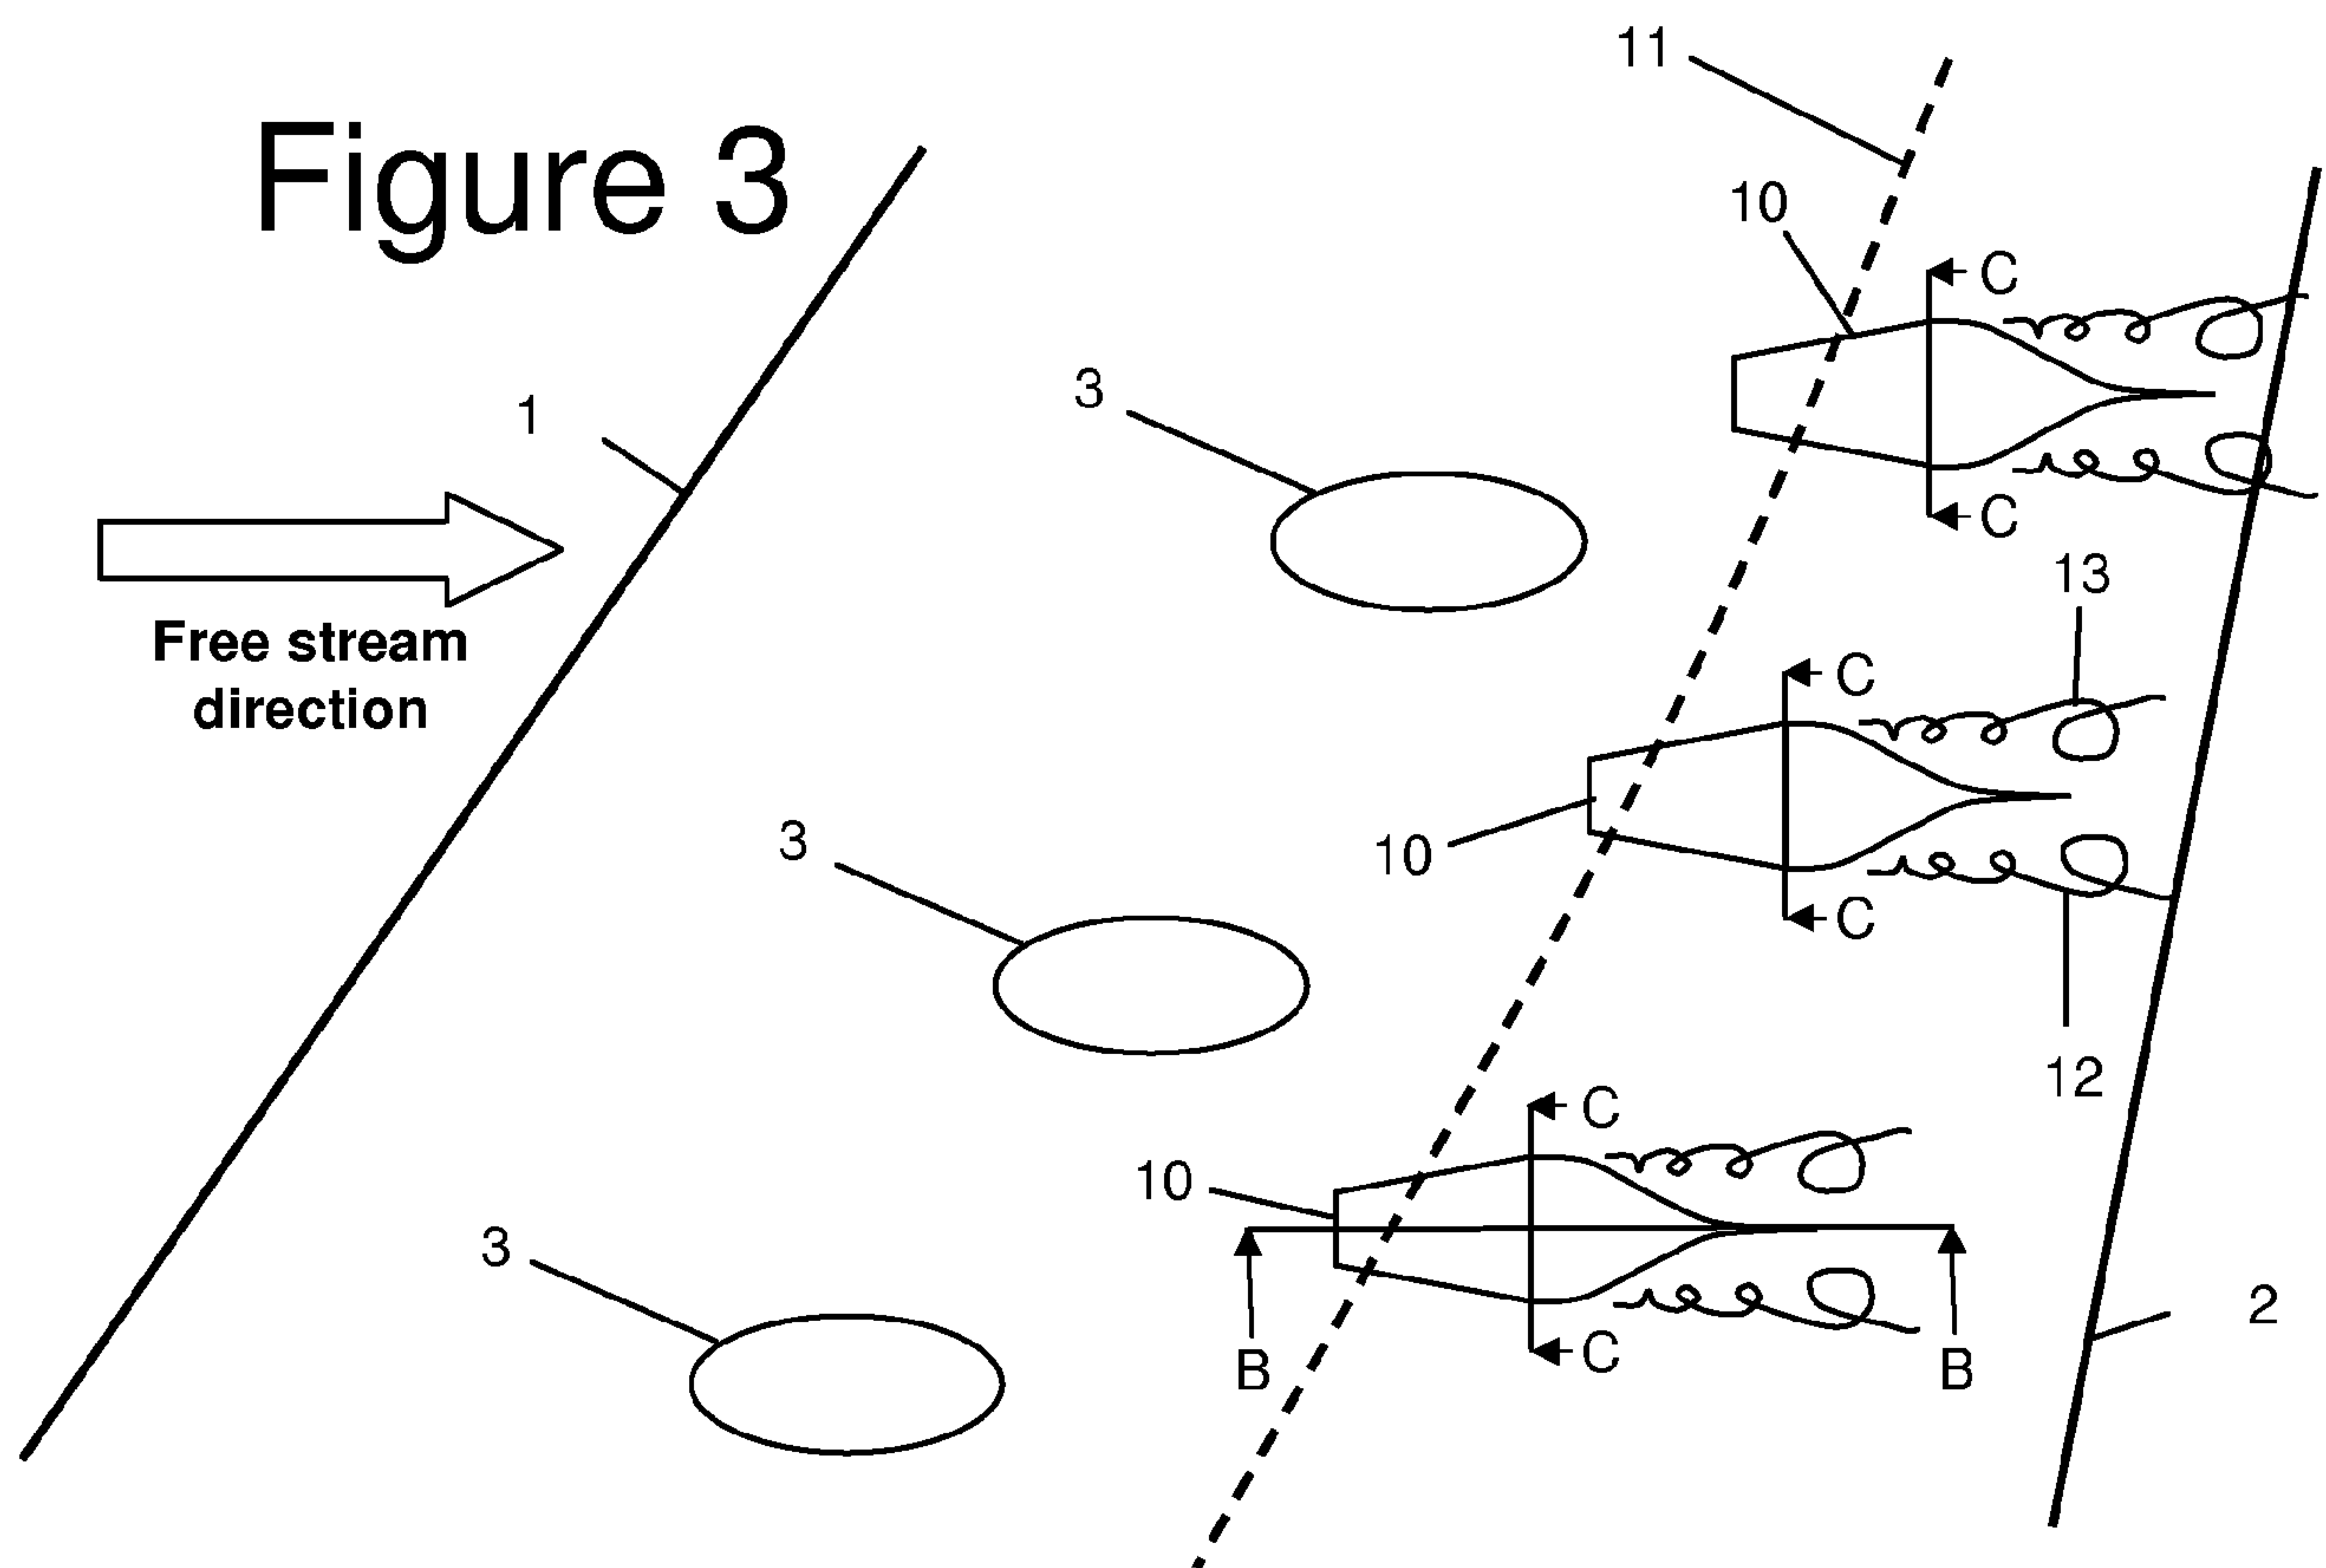

## Figure 4

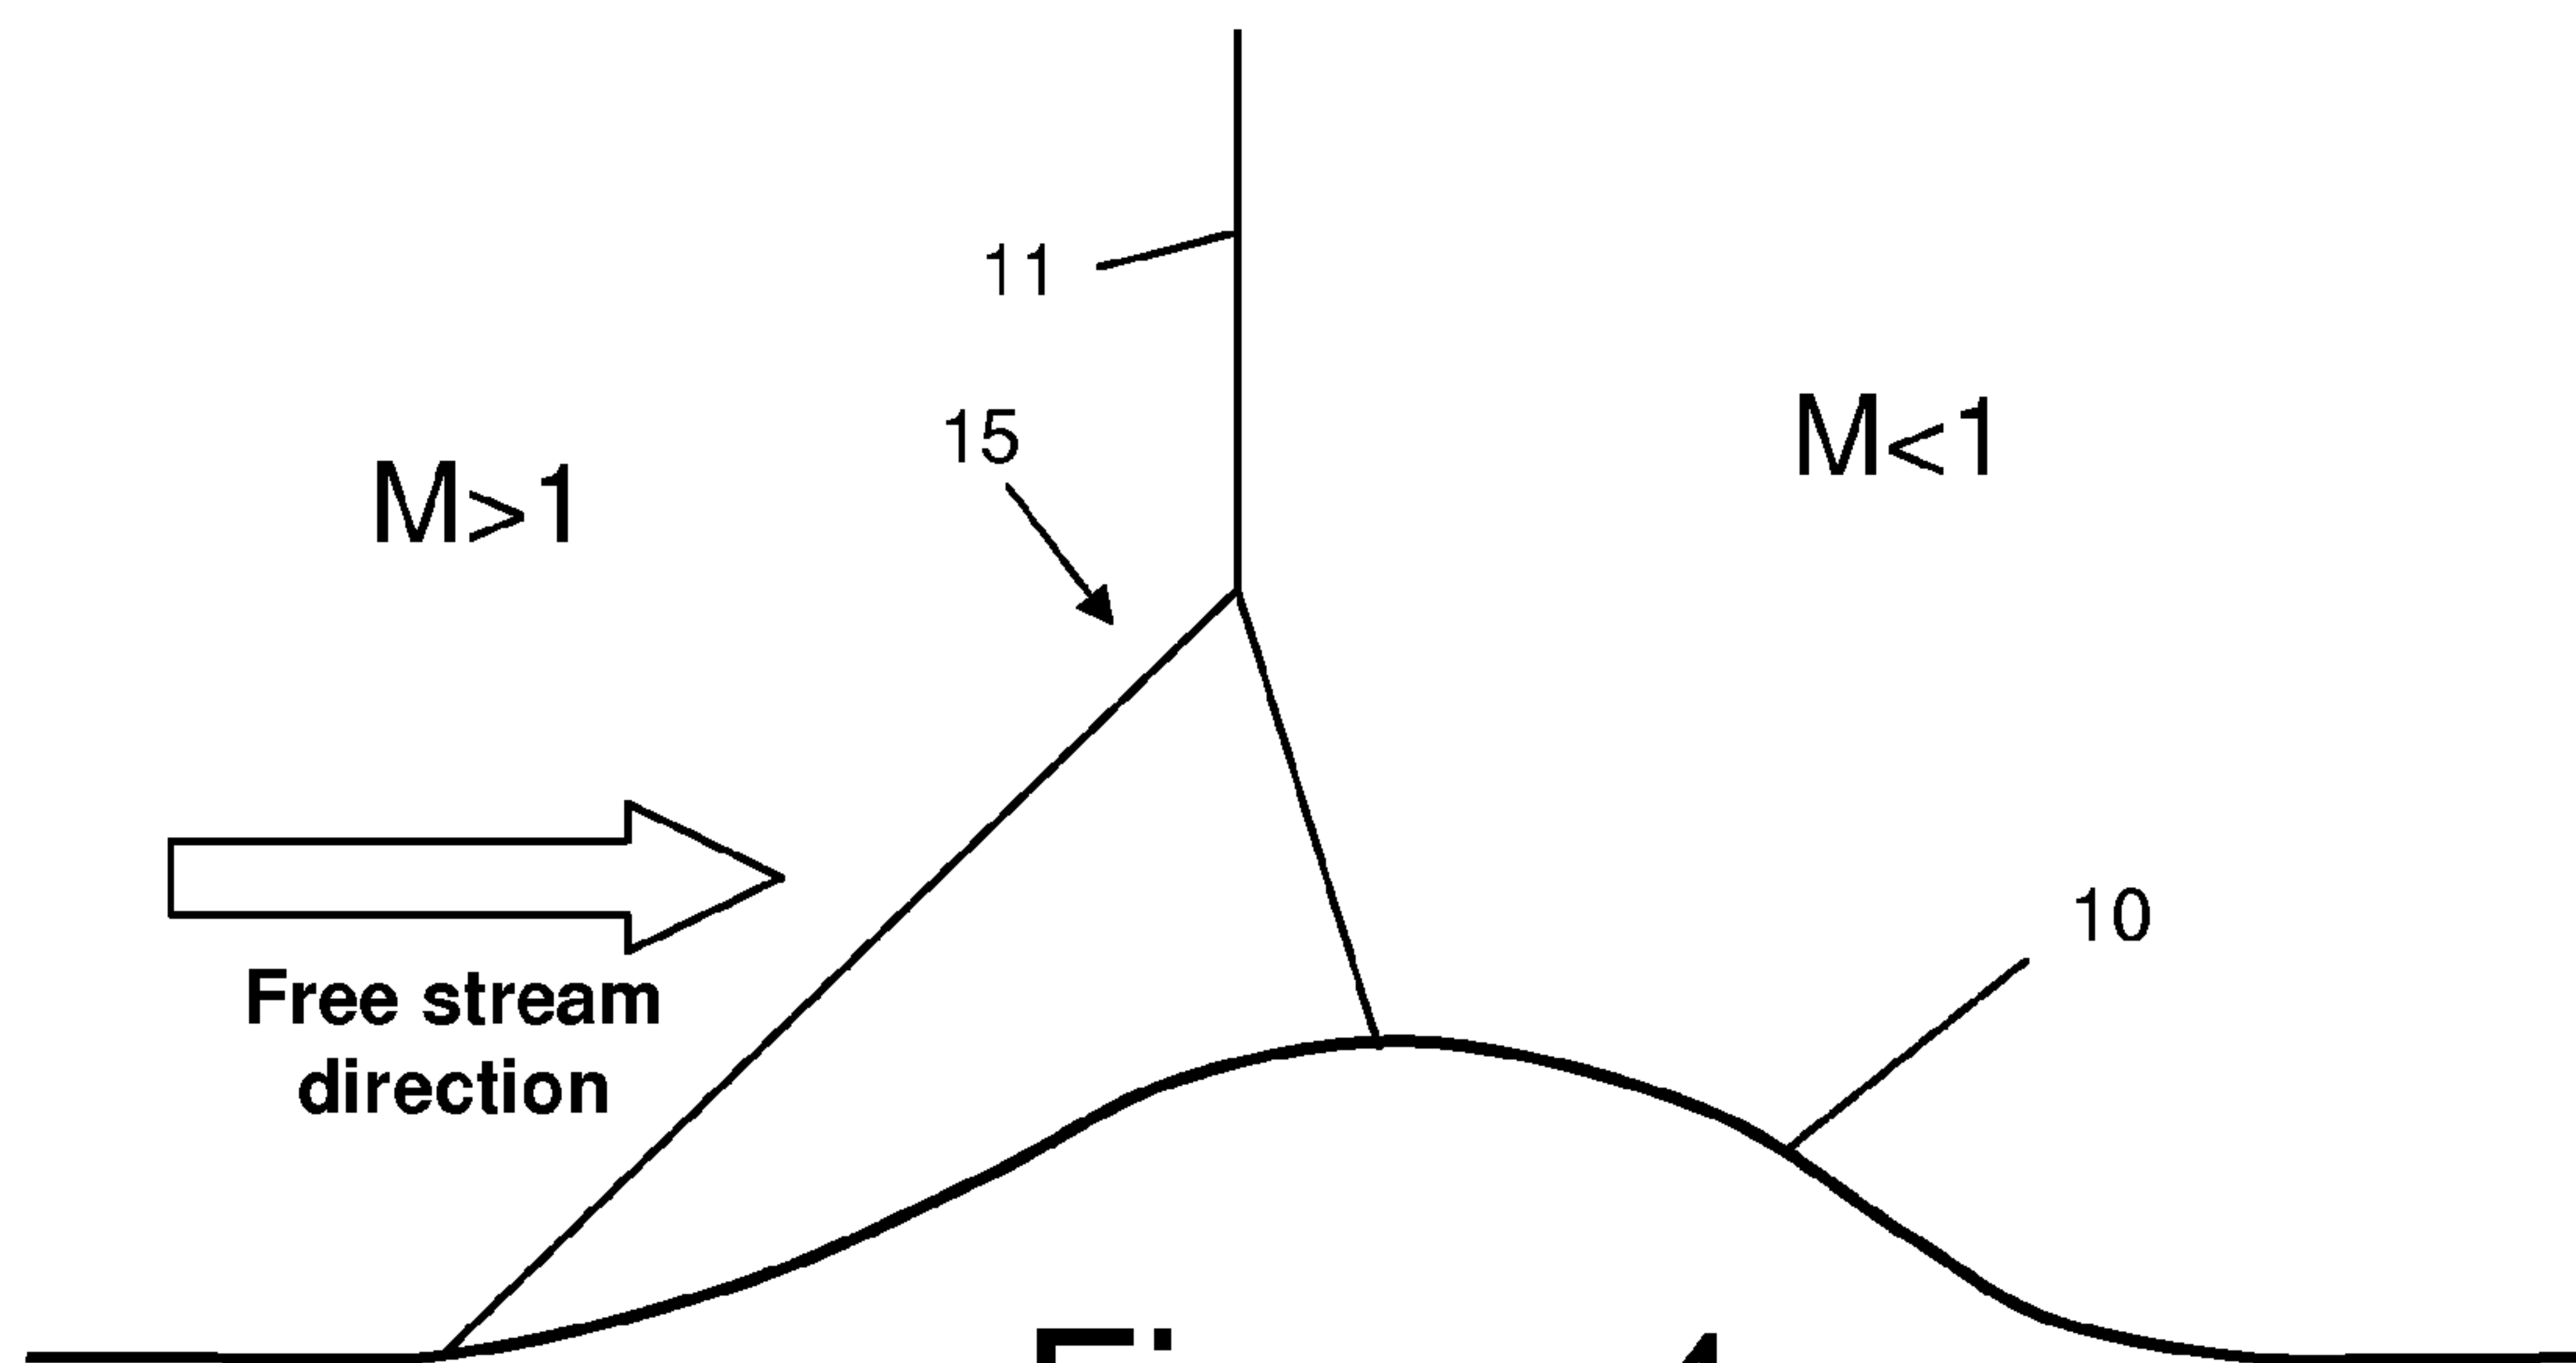

3/4

Figure 5

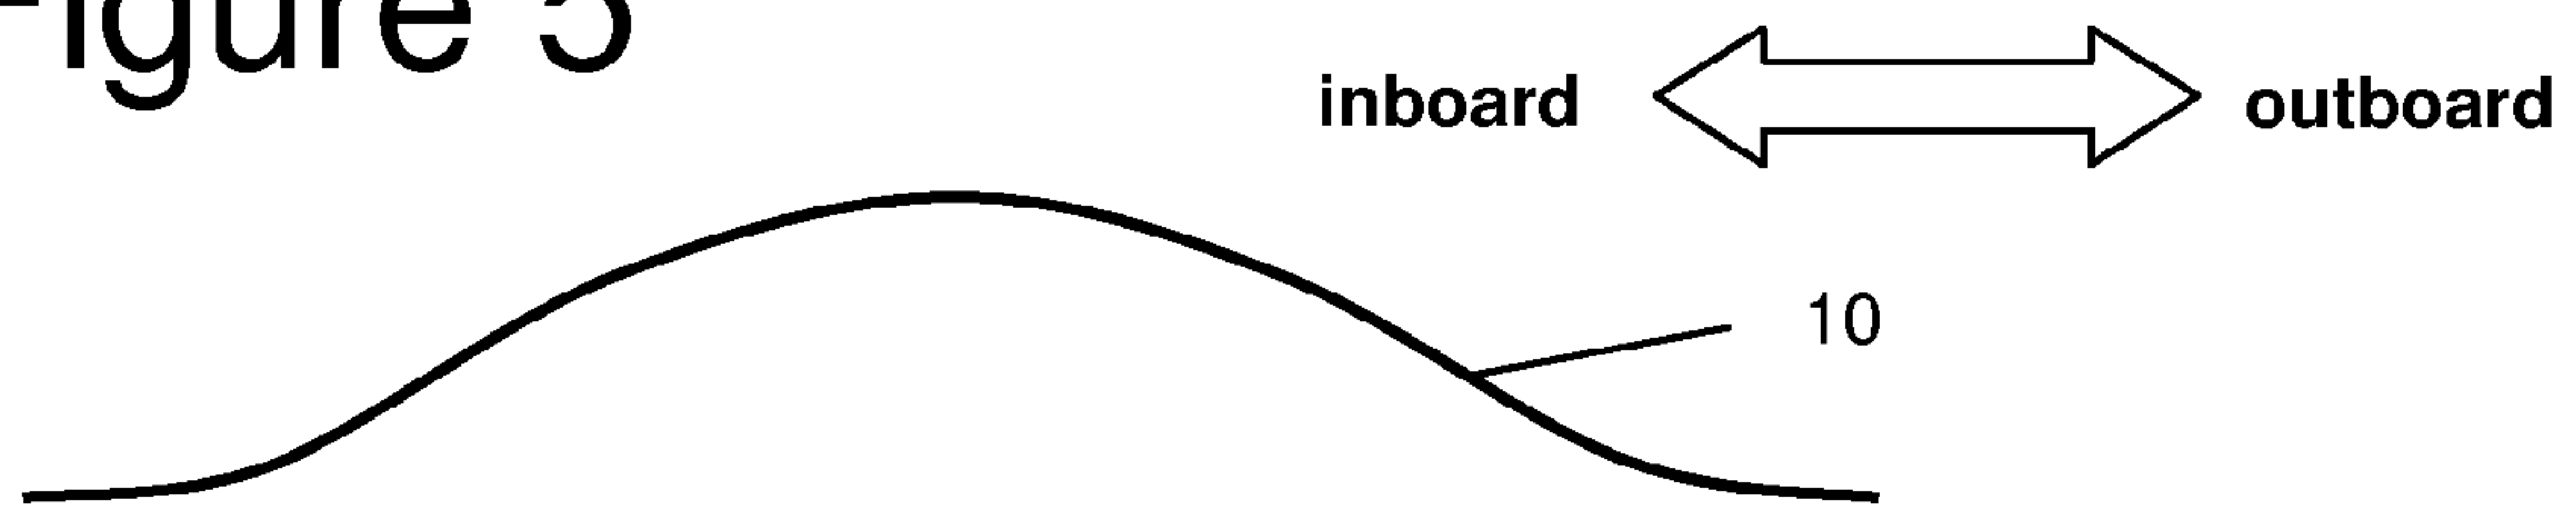


Figure 6

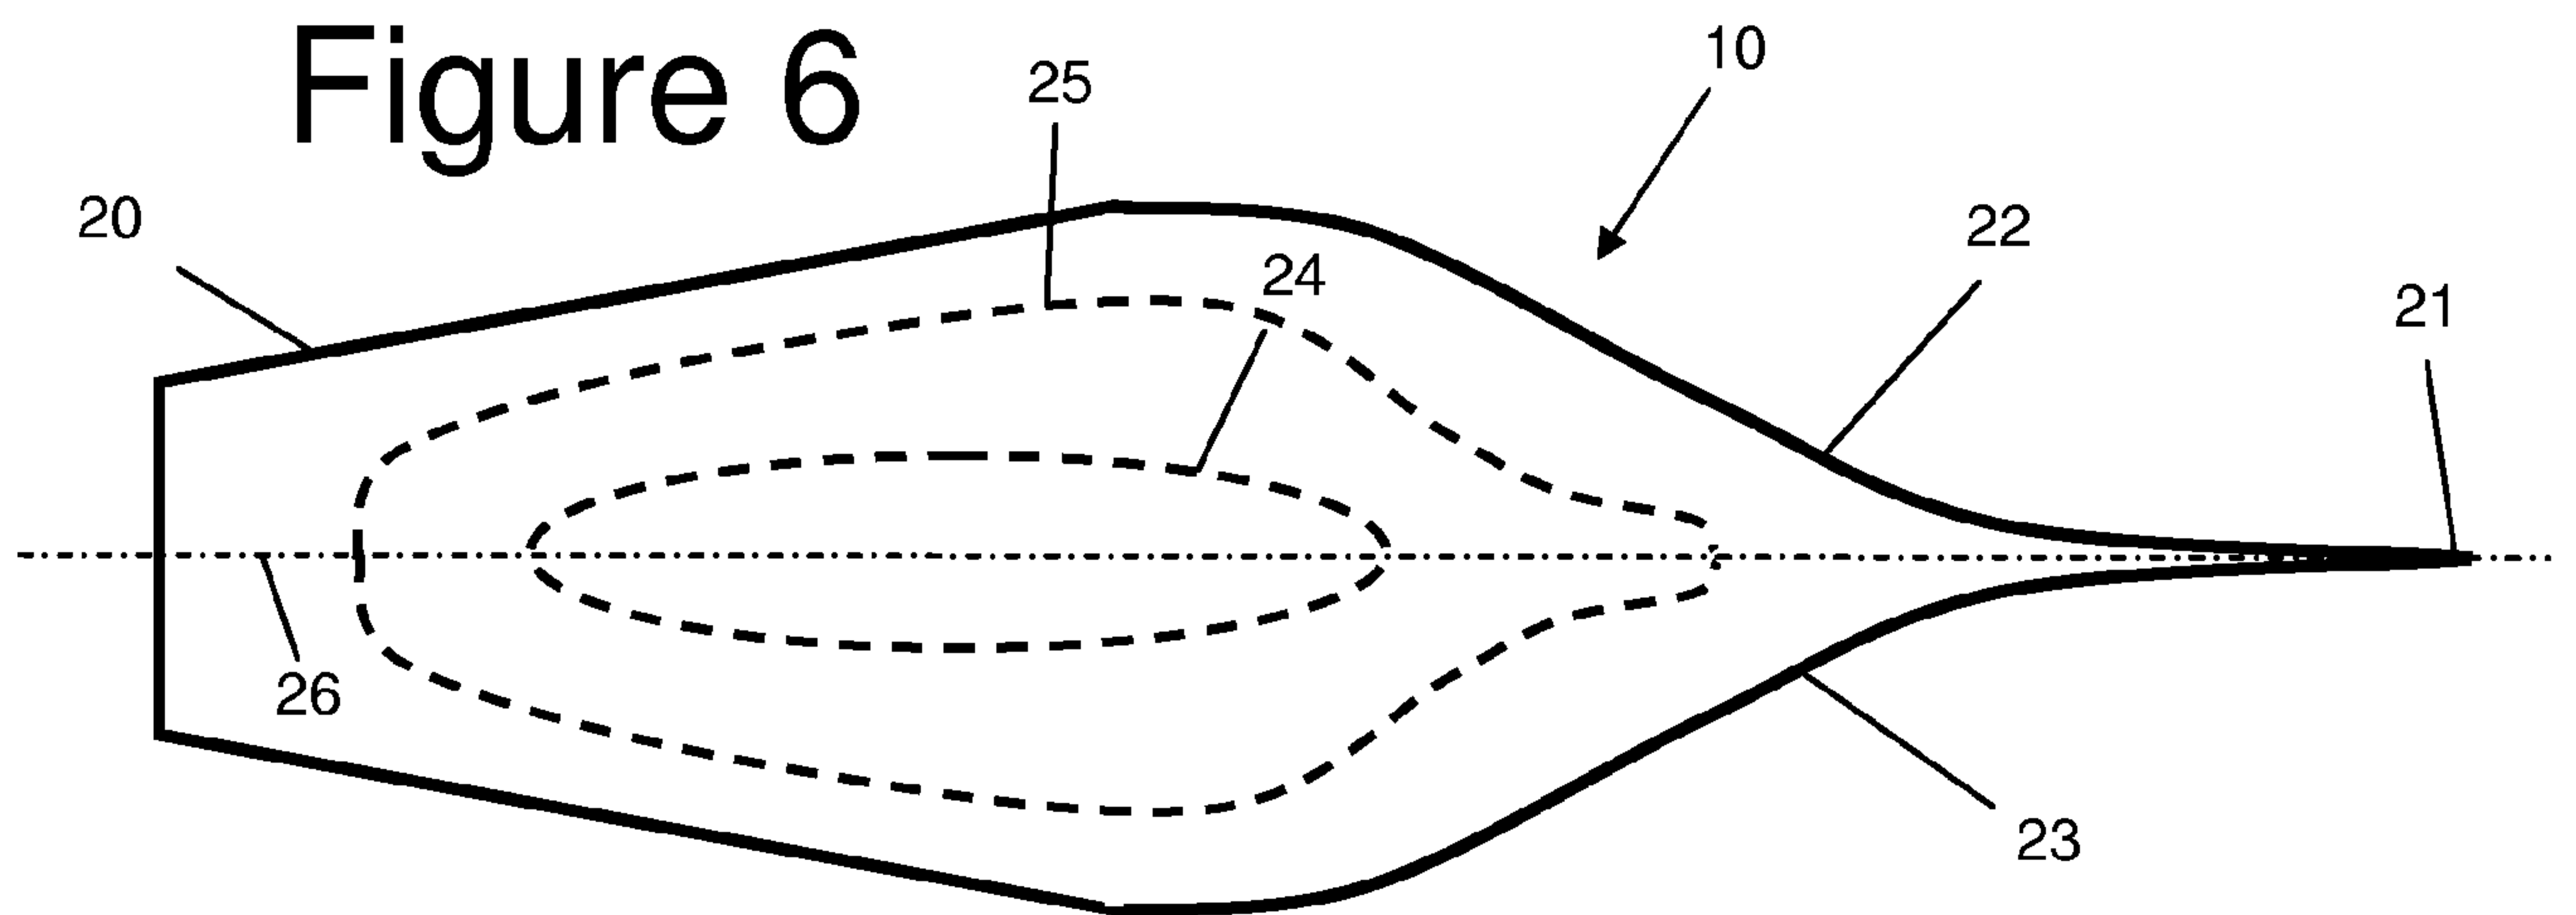




Figure 7

