



US 20100067214A1

(19) **United States**

(12) **Patent Application Publication**
Hoelen et al.

(10) **Pub. No.: US 2010/0067214 A1**
(43) **Pub. Date: Mar. 18, 2010**

(54) **ILLUMINATION SYSTEM AND DISPLAY DEVICE**

(30) **Foreign Application Priority Data**

Oct. 18, 2006 (EP) 06122482.0

(75) Inventors: **Christoph Gerard August Hoelen**,
Eindhoven (NL); **Rene Theodorus Wegh**,
Eindhoven (NL); **Jan Broere**, Eindhoven (NL); **Ludo Haenen**,
Eindhoven (NL)

Publication Classification

(51) **Int. Cl.**
F21V 9/16 (2006.01)
(52) **U.S. Cl.** **362/84**
(57) **ABSTRACT**

Correspondence Address:
PHILIPS INTELLECTUAL PROPERTY & STANDARDS
P.O. BOX 3001
BRIARCLIFF MANOR, NY 10510 (US)

The invention relates to an illumination system, a luminaire and a display-device (200) comprising the illumination system. The illumination system (100, 101) comprises a light emitting diode (D1, D2), a light exit window (105) and a luminescent layer (120) arranged between the light emitting diode and the light exit window. The light emitting diode emits light of a first primary color (72, 75). The luminescent layer is arranged between the light emitting diode and the light exit window for converting part of the light emitted by the light emitting diode into light of a second primary color. The luminescent layer comprises a garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen (73), or it comprises a combination of a garnet luminescent material comprising at least Lutetium and Cerium (70) and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium (71, 74). The light exit window emits light generated by the illumination system towards the display device.


(73) Assignee: **KONINKLIJKE PHILIPS ELECTRONICS N.V.**,
EINDHOVEN (NL)

(21) Appl. No.: **12/445,467**

(22) PCT Filed: **Oct. 15, 2007**

(86) PCT No.: **PCT/IB2007/054177**

§ 371 (c)(1),
(2), (4) Date: **Apr. 14, 2009**

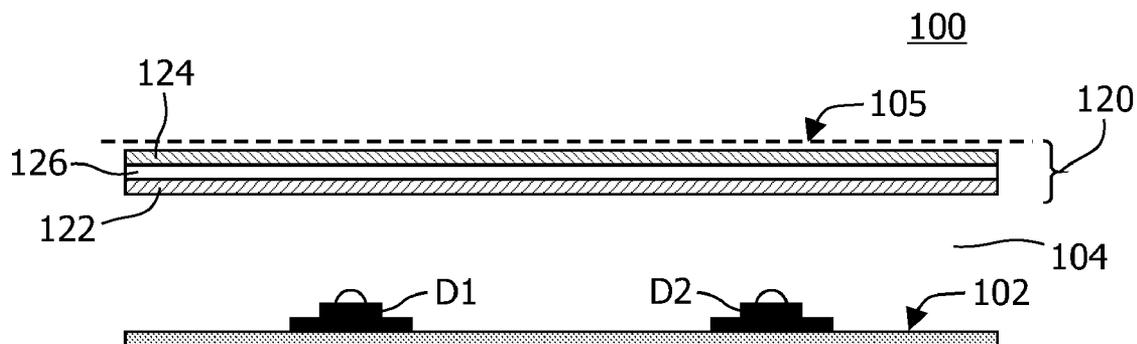

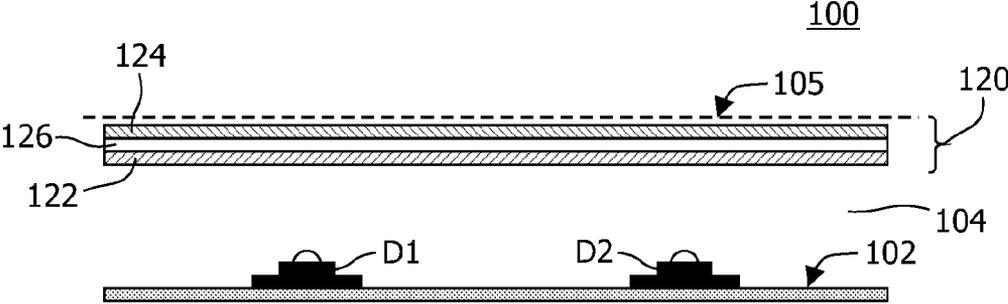


FIG. 1A

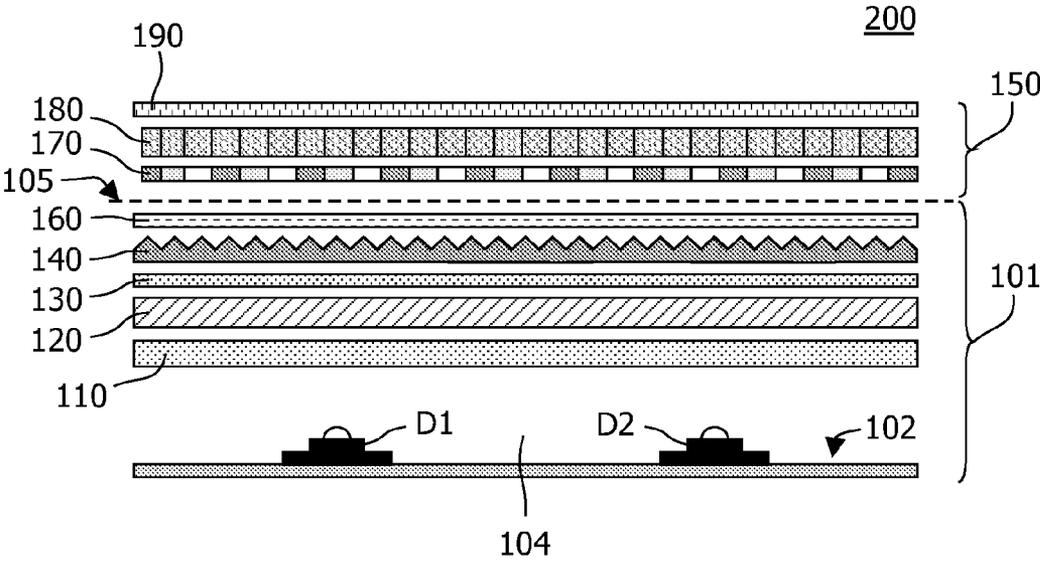


FIG. 1B

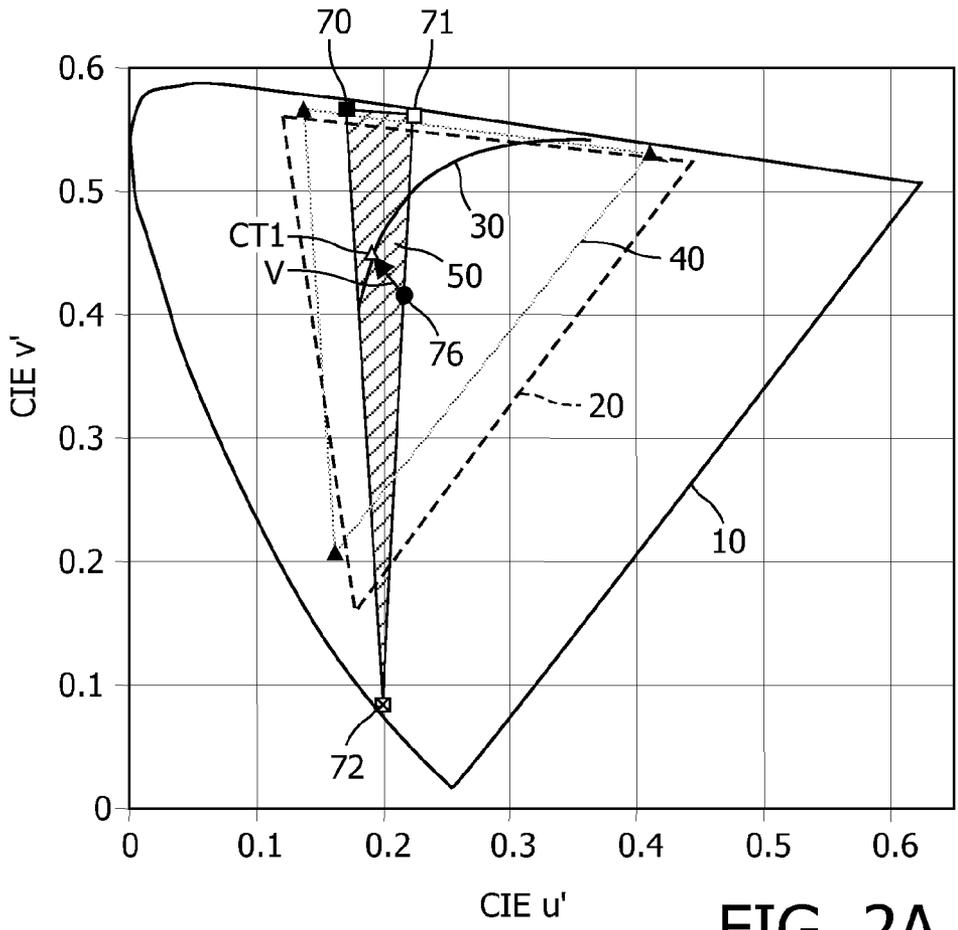


FIG. 2A

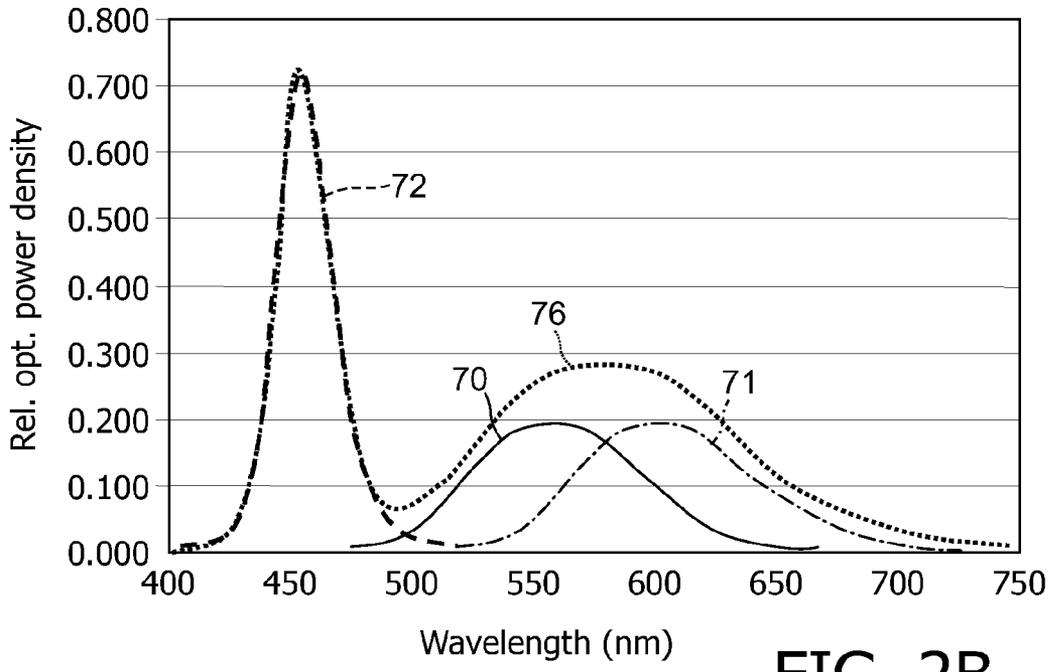


FIG. 2B

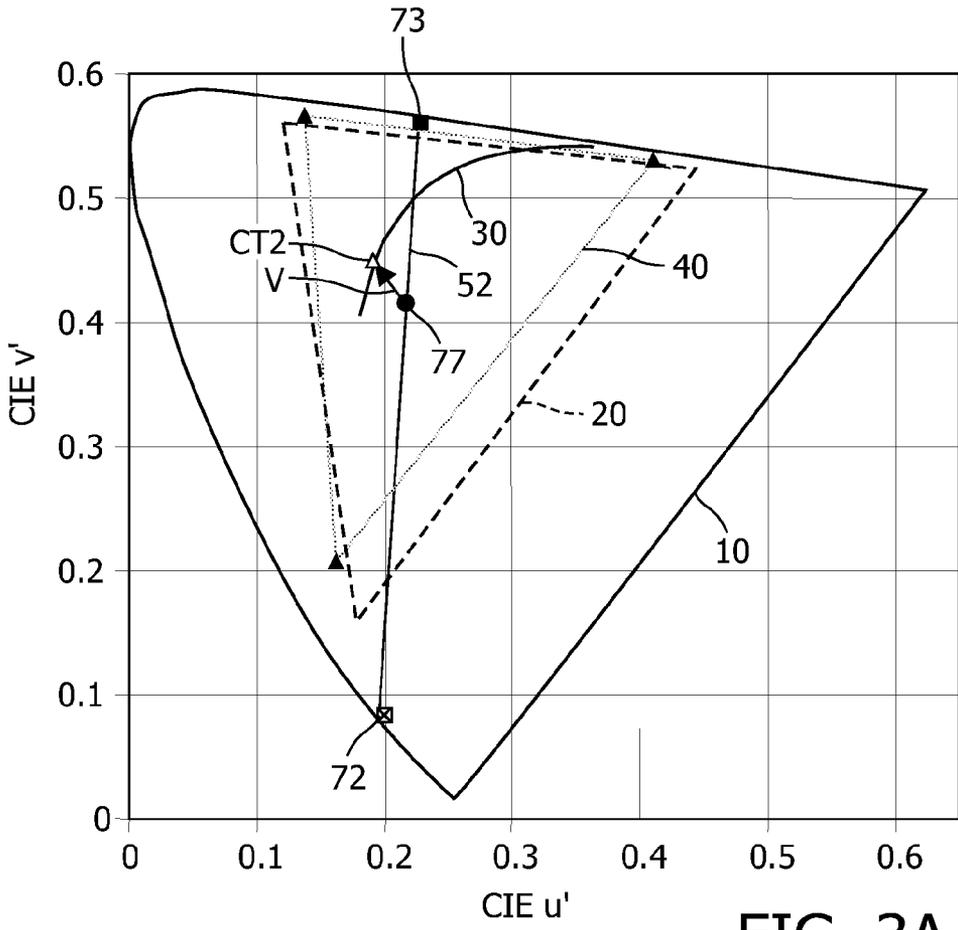


FIG. 3A

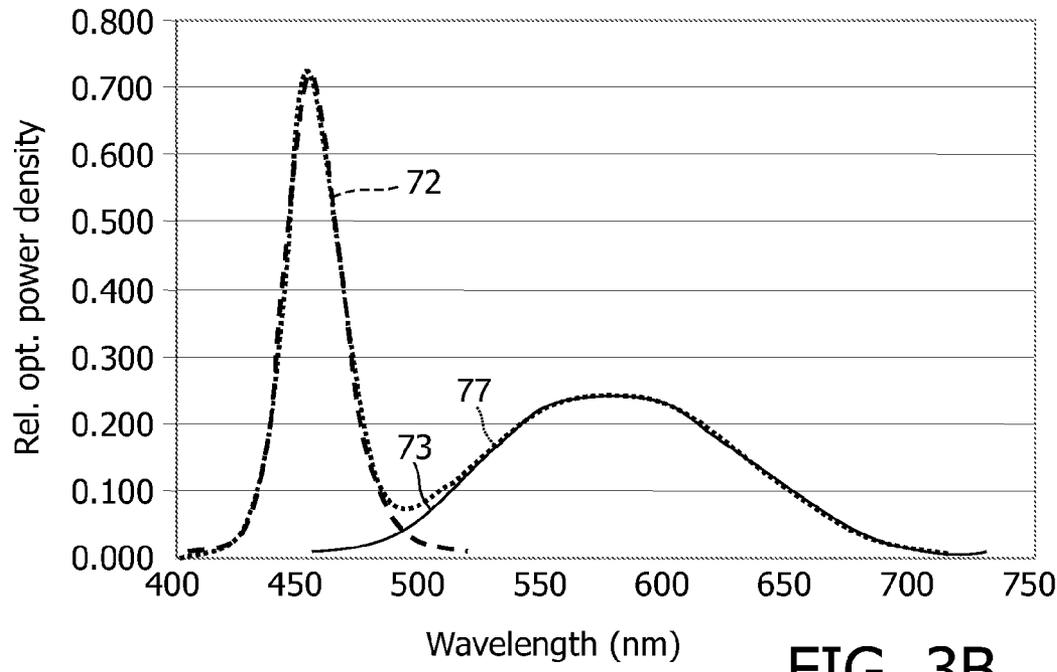


FIG. 3B

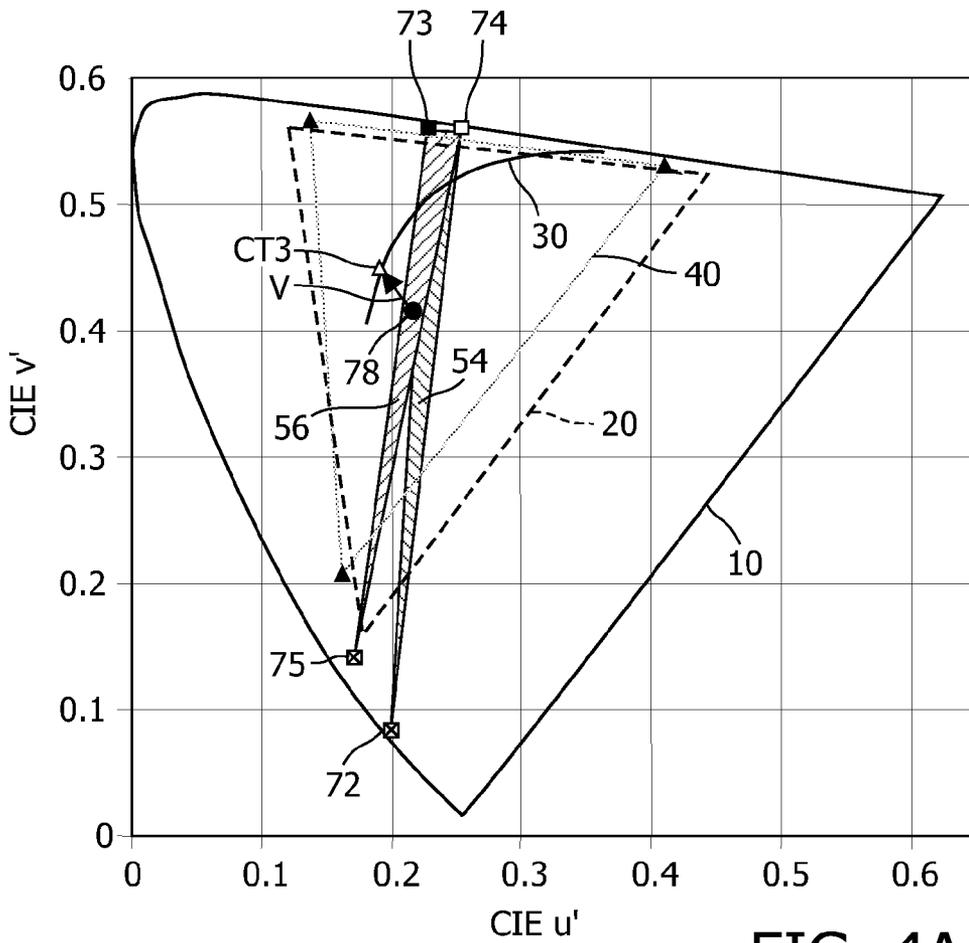


FIG. 4A

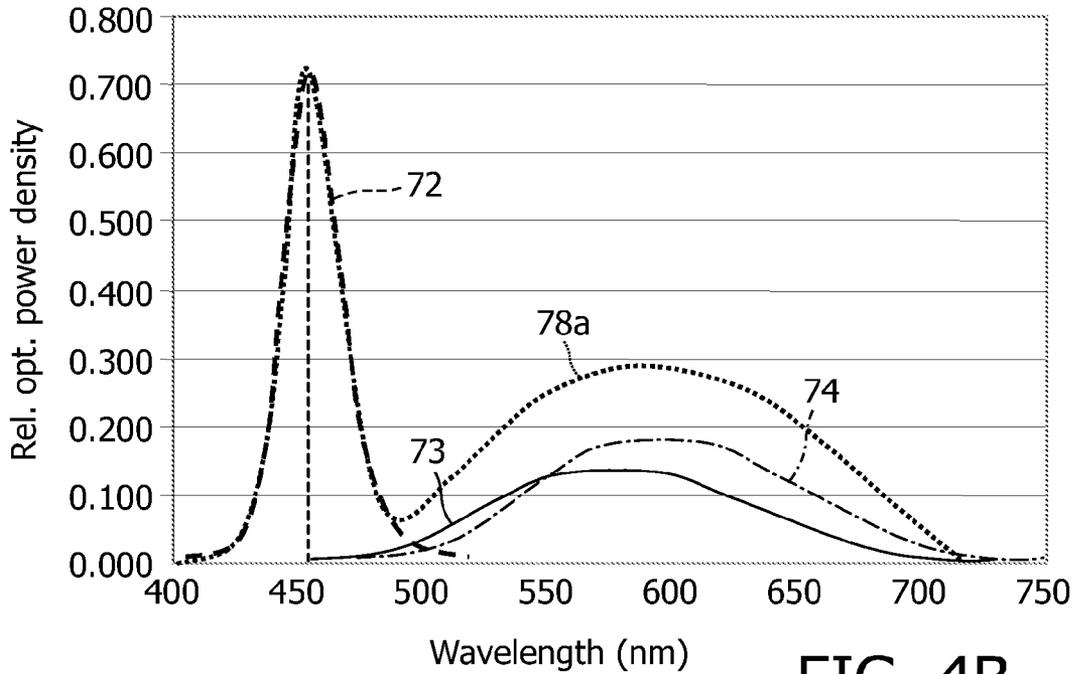


FIG. 4B

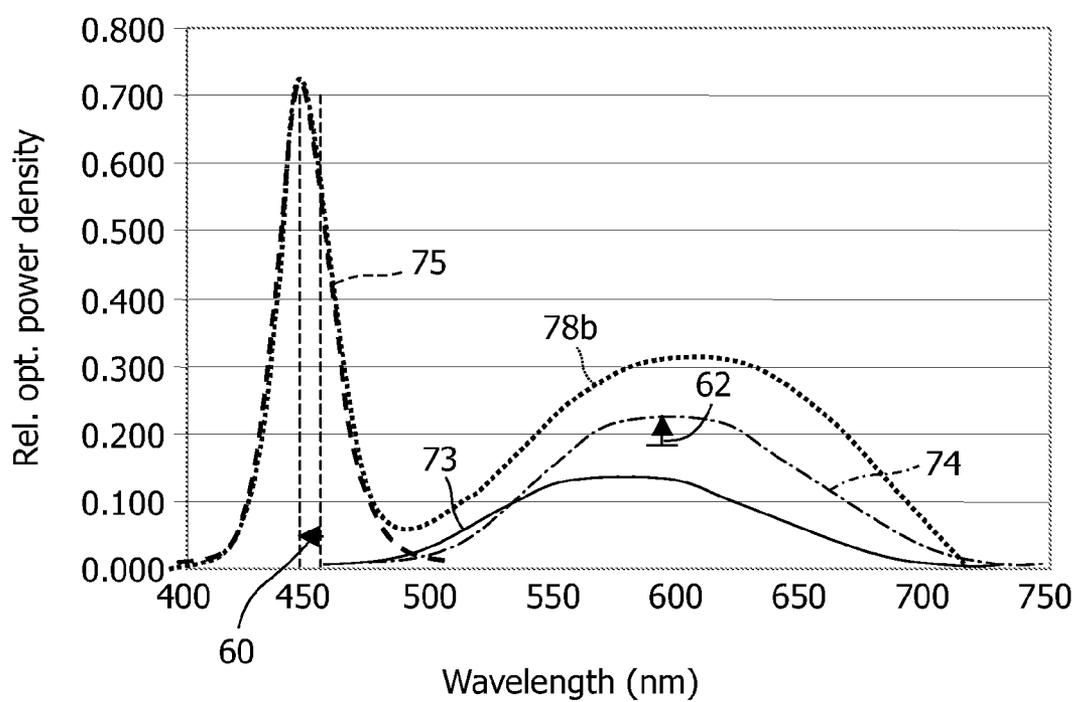


FIG. 4C

ILLUMINATION SYSTEM AND DISPLAY DEVICE

FIELD OF THE INVENTION

[0001] The invention relates to an illumination system comprising a light emitting diode, a light exit window and a luminescent layer.

[0002] The invention also relates to a luminair and a display device.

BACKGROUND OF THE INVENTION

[0003] Such illumination systems are known per se. They are used, inter alia, as luminair for general lighting purposes, for example, for office lighting or shop lighting, for example, shop window lighting or lighting of (transparent or semi-transparent) plates of glass or (transparent) plates of glass or (transparent) synthetic resin on which items, for example jewelry, are displayed. In addition, such illumination systems are used for general lighting purposes, such as for large-area direct-view light emitting panels such as applied, for instance, in signage, contour lighting, and billboards.

[0004] Such known illumination systems are also used as backlight-emitting panels in (image) display devices. Such illumination systems can particularly suitably be used as an illumination source in non-emissive displays, such as liquid crystal display devices, also referred to as LCD panels, which are used in, for example, television receivers, (computer) monitors, (cordless) telephones and portable digital assistance. The illumination systems can also be used in, for example, projection systems such as a digital projector, or so-called beamer, for projecting images or displaying a television program, a film, a video program or a DVD, or the like.

[0005] Such an illumination system is, for example, disclosed in EP 1 521 235 A2. The illumination system comprises a two-dimensional array of light emitting diodes (further also referred to as LEDs) placed on a rear panel of the illumination system. In an embodiment of the illumination system in the cited document, the LEDs all emit light of substantially the same color, for example, a primary color blue. The illumination system further comprises a layer of color-converting phosphor which is arranged on a cover plate of the illumination system, resulting in a so-called remote phosphor configuration. The phosphor layer is a uniform layer, for example, comprising a phosphor Yttrium Aluminum Garnet (further also indicated as YAG:Ce), converting light of the primary color blue into light of a primary color yellow. The layer may be a film with uniform density of particles or a luminescent dye distributed throughout the film. Some of the light of the primary color blue emitted by the LED is transmitted by the phosphor layer so that yellow and blue light components both are transmitted to the display device for illuminating the display device. The illumination system comprising blue LEDs can be used for a large range of different displays, with different types of color filters. By changing the thickness of the phosphor layer and/or the concentration of the phosphor in the phosphor layer, the light emitted by the illumination system can be optimized to fit a particular LCD.

[0006] A drawback of the known illumination system is that a color temperature of the light emitted from the display device is too low.

SUMMARY OF THE INVENTION

[0007] It is an object of the invention to provide an illumination system having an improved color temperature.

[0008] According to a first aspect of the invention the object is achieved with an illumination system comprising:

[0009] a light emitting diode emitting light of a first primary color,

[0010] a light exit window for emitting light from the illumination system, and

[0011] a luminescent layer arranged between the light emitting diode and the light exit window for converting at least part of the light emitted by the light emitting diode into light of a second primary color, the luminescent layer comprising a garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen, or comprising a combination of a garnet luminescent material comprising at least Lutetium and Cerium and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium.

[0012] The effect of the measures according to the invention is that by replacing the Yttrium Aluminum Garnet luminescent material by the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen, or comprising a combination of a garnet luminescent material comprising at least Lutetium and Cerium and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium, a central wavelength of the primary color yellow emitted by the luminescent layer is shifted towards a shorter wavelength compared to the primary color yellow emitted by a luminescent layer comprising only Cerium-activated Yttrium Aluminum Garnet, also referred to as YAG:Ce. Due to this shift of the central wavelength of the primary color yellow, a color point resulting from a contribution of the primary color yellow and the primary color blue of the light emitted by the illumination system is also shifted to a shorter wavelength, resulting in an increase of the color temperature of light emitted by the illumination system.

[0013] A further benefit when using the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen, or comprising a combination of a garnet luminescent material comprising at least Lutetium and Cerium and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium, is that a spectral content of the primary color yellow emitted by the luminescent layer is increased, which results in a relatively large color gamut of a display device comprising the illumination system. The spectral content of the illumination system defines a range of colors of the light emitted by the illumination system. When using these luminescent materials, the emission spectrum of the primary color yellow broadens with respect to the known luminescent material YAG:Ce, which results in an increase of the range of colors of the light emitted by the illumination system, resulting in an improvement of the spectral content of the illumination system. In the embodiment in which the illumination system comprises a luminescent material comprising Silicon Nitride, the addition of said Silicon Nitride broadens the emission spectrum compared to the emission spectrum without Silicon Nitride. An example of the garnet luminescent material comprising at least Lutetium and Cerium is, for example, Cerium-activated Lutetium Aluminum Garnet, also indicated as LuAG:Ce. An example of the garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium is, for example, Cerium-activated Yttrium Aluminum Garnet, also indicated as YAG:Ce. In the embodiment in which the illumi-

nation system comprises a combination of LuAG:Ce and YAG:Ce, the emission spectrum of the primary color yellow is broadened by the combination of the emission spectrum of LuAG:Ce and the emission spectrum of YAG:Ce. Both luminescent materials LuAG:Ce and YAG:Ce emit light which is perceived as yellow or green-yellow, further referred to as yellow. The center wavelength, being the spectrally weighted center wavelength of the emission spectrum, of the light emitted by the luminescent material LuAG:Ce (typically approximately 560 nanometer) is shifted towards a shorter wavelength compared to the center wavelength of the light emitted by the luminescent material YAG:Ce (typically approximately 590 nanometer). A combination of the two emission spectra results in the emitted primary color yellow of which the emission spectrum of the light is broadened, with a resulting center wavelength of e.g. about 580 nm. A broader emission spectrum of the primary color yellow emitted by the illumination system also typically results in an increased color gamut of the display device comprising the illumination system, because the broader emission spectrum of the primary color yellow increases an overlap of the light emitted by the illumination system and the color filters of the display device.

[0014] The color gamut of the illumination system according to the invention is partially determined by the choice of the primary color blue emitted by the LED. The color temperature of the illumination system may be increased by shifting the center wavelength of the primary color blue emitted by the LED towards a longer wavelength blue. However, the shift of the center wavelength of the light emitted by the LED also results in a decrease of the color gamut area which overlaps the standardized EBU (European Broadcasting Union) color gamut area or which overlaps an NTSC (National Television System Committee) color gamut area, especially in the purple region. Alternatively, by replacing YAG:Ce by Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride, also referred to as LuAGSN:Ce, or, for example, by adding LuAG:Ce to YAG:Ce, the center wavelength of the light emitted by the luminescent layer shifts towards the green, increasing the color temperature of the illumination system while maintaining the relatively broad color gamut of the display device.

[0015] An additional benefit when using the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen is that a single luminescent material enables the shift of the center wavelength of the primary color yellow emitted by the luminescent layer to increase the color temperature of the illumination system, which simplifies the manufacturing of the luminescent layer.

[0016] An additional benefit when using the combination of the garnet luminescent material comprising at least Lutetium and Cerium and the garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium, is that a concentration or a total of the individual luminescent materials of the combination can be tuned, enabling a tuning of the color point of the light emitted by the illumination system. This tuning may, for example, be used to correct for variations in the primary color blue emitted by the LED. By adapting the concentration of the individual luminescent materials, the color point of the light emitted by the illumination system can be tuned to ensure that the light emitted by the illumination system substantially always corresponds to a predefined color point of the illumination system. This tuning may also, for example,

be used to correct for variations in the color filter of the display device when combining the illumination system with the display device. Additionally, the tuning of the concentration of the individual luminescent materials in the illumination system can, for example, be used to tune the color temperature of the display device so as to be at a required level. As the color filters used in a specific display device are known, the concentration can be chosen such that the color temperature of the light emitted by the display device corresponds to a predefined display color temperature.

[0017] In an embodiment of the illumination system, the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen or the garnet luminescent material comprising at least Lutetium and Cerium further comprises Gadolinium. A benefit of this embodiment is that the addition of Gadolinium results in a luminescent material having a light emission peak of which the central wavelength is shifted towards a longer wavelength compared to the luminescent materials without Gadolinium. The addition of Gadolinium increases the range over which the color point of the illumination system can be tuned, and thus increases the range over which the color temperature of the display device can be tuned.

[0018] In an embodiment of the illumination system, the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 < x \leq 3$, $0 \leq y \leq 2.7$, $0 < x+y \leq 3$ and $0 < z \leq 2$, the garnet luminescent material comprising at least Lutetium and Cerium is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 < x \leq 3$, $0 \leq y \leq 2.7$, $0 < x+y \leq 3$ and $0 \leq z \leq 2$, and the garnet luminescent material comprising at least Cerium and comprising at least one element of the group comprising Yttrium and Gadolinium is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 \leq x < 3$, $0 \leq y \leq 2.7$, $0 \leq x+y \leq 3$ and $0 \leq z \leq 2$. In this embodiment, each one of the different luminescent materials can be represented by a single formula in which the requirements to the suffixes x, y and z are different.

[0019] In an embodiment of the illumination system comprising a combination of two luminescent materials, a molar concentration of a first of the two luminescent materials in the luminescent layer (120) is 1 to 3 times larger than a molar concentration of the second of the two luminescent materials. Here, molar concentration refers to molar concentration per unit area of the luminescent layer. For example, in an embodiment comprising LuAG:Ce and YAG:Ce or LuAG:Ce and Cerium-activated Yttrium Gadolinium Aluminum Garnet, also referred to as YGdAG:Ce, a concentration of YAG:Ce or YGdAG:Ce in the luminescent layer is 1 to 3 times larger than a concentration of LuAG:Ce. A benefit of this embodiment is that this combination of luminescent materials and the light emitted by the LEDs enables the color temperature of the display device, which combines the illumination system with known color filters, to be tunable from approximately 6000 Kelvin up to approximately 12000 Kelvin.

[0020] In an embodiment of the illumination system comprising a combination of two luminescent materials, a variation of a central wavelength emitted by the light emitting diode is compensated by altering a molar concentration of any of the two luminescent materials in the luminescent layer. When the luminescent layer, for example, comprises LuAG:Ce and YAG:Ce, a shift of a central wavelength emitted by the light emitting diode is compensated by altering a molar concentration of the LuAG:Ce in the luminescent layer, or by

altering a molar concentration of the YAG:Ce in the luminescent layer, or both. A benefit of this embodiment is that the altering of the concentration of LuAG:Ce or YAG:Ce can be used to ensure that the light emitted by the illumination system substantially corresponds to the predefined backlight color point even when the central wavelength emitted by the light emitting diode, or the average central wavelength of the various light emitting diodes in the illumination system, is altered.

[0021] In an embodiment of the illumination system comprising a combination of two luminescent materials, the luminescent layer includes a layer comprising a first of the two luminescent materials and includes a further layer comprising a second of the two luminescent materials. When, for example, the illumination system comprises LuAG:Ce and YAG:Ce, the luminescent layer comprises a layer comprising LuAG:Ce and a layer comprising YAG:Ce. A benefit of this embodiment is that the individually applied layers comprising LuAG:Ce and YAG:Ce, respectively, enable a relatively easy change of the molar concentration of the individual luminescent materials in the luminescent layer by changing, for example, a thickness of the individual layers applied for each of the luminescent materials, or, for example, by changing a molar concentration of the individual luminescent materials in their individually applied layers. The individual layers comprising LuAG:Ce and comprising YAG:Ce may be applied on top of each other, or, alternatively, may be applied on different surfaces of, for example, a diffusing element, or may be applied on different substrates, for example, a bulk diffuser plate and a sheet diffuser, or a diffuser element and a brightness enhancement element.

[0022] In an embodiment of the illumination system comprising the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen, the luminescent layer further comprises a garnet luminescent material comprising at least Cerium, Silicon and Nitrogen and at least one element of the group comprising Yttrium and Gadolinium. The garnet luminescent material comprising at least Cerium, Silicon and Nitrogen and at least one element of the group comprising Yttrium and Gadolinium, for example, comprises Cerium-activated Yttrium Aluminum Garnet comprising Silicon Nitride (further also referred to as YAGSN:Ce) and, for example, Cerium-activated Yttrium Gadolinium Aluminum Garnet comprising Silicon Nitride (further also referred to as YGDAGSN:Ce). A benefit of this embodiment is that the addition of YAGSN:Ce or YGDAGSN:Ce enables the central wavelength of the primary color yellow emitted by the luminescent layer to be tunable by altering a concentration of the individual luminescent materials LuAGSN:Ce and YAGSN:Ce in the luminescent layer. Moreover, the addition of Silicon Nitride to YAG:Ce broadens the emission spectrum compared to the emission spectrum of YAG:Ce, which again results in an increased color gamut of the illumination system according to the invention and of the display device comprising the illumination system according to the invention.

[0023] In an embodiment of the illumination system, the luminescent layer is arranged as a remote phosphor layer being a luminescent layer arranged at a distance from the light emitting diode. A benefit of applying the luminescent layer as a remote phosphor layer is that it allows a relatively broad range of luminescent materials to be used in the illumination system according to the invention. Generally, luminescent materials are directly applied to the light emitting diode. However, the choice of luminescent material that can be

directly applied to the light emitting diode is limited, because this luminescent material must be able to withstand, in operation, a relatively high temperature of the light emitting diode, and at the same time must be able to withstand, in operation, a relatively high light-energy flux emitted by the light emitting diode. The high temperature and high light-energy flux generally result in a gradual degradation of the luminescent material, and hence in a gradual reduction of the efficiency of the illumination system. In the illumination system according to the invention, the luminescent material is applied facing away from the light emitting diode. The distance away from the light emitting diode results in a reduction of the temperature of the luminescent material, when expressed in degrees centigrade, by at least 20% compared to the temperature of the luminescent material when applied directly on the light emitting diode, and in a reduction of the light energy flux density of the first primary color incident on the luminescent material by at least 90%. This arrangement of the luminescent material reduces the requirements on the luminescent material as regards their ability to withstand the high temperature and the high light-energy flux, and, in addition, reduces the gradual degradation of the luminescent material.

[0024] In an embodiment of the illumination system, the illumination system comprises a light-mixing element arranged between the light emitting diode and the luminescent layer. The light-mixing element may, for example, be a housing having specularly or diffusively reflective surfaces for mixing and recycling the light. Alternatively the light-mixing element may be a light guide in which the light emitted by the LED is mixed using, for example, total internal reflection. The light-mixing element may also be a diffuser element.

[0025] In an embodiment of the illumination system, the illumination system comprises a reflective polarizer film and/or a collimator film between the luminescent layer and the light exit window. An example of a reflective polarizer film is, for example, a DBEF film. The DBEF (Dual Brightness Enhancement Film) substantially only transmits light having a predefined polarization direction, and reflects the remainder of the light back into the illumination system for recycling, thus acting as a polarizer film. An example of a collimator film is, for example, a BEF film. The BEF (Brightness Enhancement Film) only transmits light which impinges on the BEF at an angle of incidence which is within a predefined range, while the BEF reflects the remainder of the light back into the illumination system for recycling, thus collimating the light. The use of the BEF and/or DBEF results in an increase of the efficiency of the illumination system, because light which does not comply with the predefined range of angles of incidence or does not substantially comply with the predefined polarization direction is recycled and, at least partially, reused. An additional benefit when using the BEF and/or DBEF is that the thickness of the luminescent layer may be reduced due to the recycling of light, as the recycling enhances the mixing of light. When light of the primary color blue emitted by the LED is recycled and impinges on the luminescent layer, part of the recycled light will be converted into light of the primary color yellow, increasing the contribution of the primary color yellow to the light emitted by the illumination system and reducing the contribution of the primary color blue to the light emitted by the illumination system. To compensate the increase of the contribution of the primary color yellow due to recycling, the thickness of the luminescent layer in the illumination system according to the

invention may be reduced to ensure that the light emitted by the illumination system corresponds to the predefined color point.

[0026] In an embodiment of the illumination system, the illumination system comprises at least two light emitting diodes, an emission spectrum of each of the two light emitting diodes having a center wavelength such that the center wavelength of one of the two light emitting diodes is shifted at least 5 nanometers from the center wavelength of the other of the two light emitting diodes. A benefit of this embodiment is that by choosing a specific concentration of the luminescent materials in the luminescent layer a broader variation in the primary color can be accepted while the color point of the light emitted by the illumination system is substantially equal to the predefined color point. Due to this acceptable broader variation, the illumination system according to the invention may comprise LEDs from different bins, which reduces the cost of manufacturing of the illumination system.

[0027] In an embodiment of the illumination system, the illumination system comprises at least two light emitting diodes, and the light emitting diodes are individually dimmable. Besides wavelength binning, the LEDs used in an illumination system are also binned according to the light flux emitted from the LEDs. By ensuring that the LEDs of a plurality of LEDs are individually dimmable, a contribution of each of the LEDs can be tuned. Adapting the dimming individually may increase the uniformity of the light emitted from the illumination system. Alternatively, when the center wavelength of the light of the individual LEDs is different, individual dimming may be used to fine-tune the color point of the light emitted from the illumination system.

[0028] In an embodiment of the illumination system, the illumination system comprises a plurality of light emitting diodes, and the plurality of light emitting diodes, in operation, operate in a scanning mode of operation. This is possible due to the relatively short decay times of the Garnet luminescent materials. The illumination system comprises the luminescent layer in which the LEDs, for example, are arranged in one-dimensional clusters that can be driven sequentially with substantially equal amplitudes to reduce motion artifacts or that can be driven simultaneously or sequentially (possibly with temporal overlap) with drive currents that depend on, for example, a video content in order to achieve one-dimensional dimming. A benefit is that this mode of operation reduces power dissipation and increases the dynamic range and contrast ratio in a display device. The LCD pixel transmission values are adapted accordingly to generate the intended image. Because only a single primary color is used for illuminating the luminescent material, the illumination system is more uniform with respect to color than e.g. an illumination system comprising LED emitting light of different primary colors. The blue light should be sufficiently well mixed or homogenized when all the LEDs operate at nominal power. To prevent visible artifacts in the image, the clusters should have smooth profiles with sufficient spatial overlap in their light distributions, which is a natural characteristic of clusters in this type of system employing a remote phosphor layer.

[0029] The invention also relates to a luminair and a display device comprising the illumination system according to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

[0031] In the drawings:

[0032] FIG. 1A shows a simplified cross-sectional view of an illumination system according to the invention, and FIG. 1B shows a simplified cross-sectional view of a display device according to the invention,

[0033] FIGS. 2A and 2B show a CIE 1976 u'v' diagram and an optical power density spectrum, respectively, of a combination of Cerium-activated Lutetium Aluminum Garnet and Cerium-activated Yttrium Aluminum Garnet,

[0034] FIGS. 3A and 3B show a CIE 1976 u'v' diagram and an optical power density spectrum of Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride, respectively, and

[0035] FIGS. 4A, 4B and 4C show a CIE 1976 u'v' diagram and a first and second optical power density spectrum, respectively, of a combination of Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride and Cerium-activated Yttrium Aluminum Garnet comprising Silicon Nitride.

[0036] The Figures are purely diagrammatic and not drawn to scale. Particularly for clarity, some dimensions are exaggerated strongly. Similar components in the Figures are denoted by the same reference numerals as much as possible.

DETAILED DESCRIPTION OF EMBODIMENTS

[0037] FIG. 1A shows a simplified cross-sectional view of an illumination system **100** according to the invention. The illumination system **100** according to the invention comprises LEDs **D1**, **D2** arranged on a reflective surface **102** of a light-mixing chamber **104** of the illumination system **100**. The LEDs **D1**, **D2** emit a first primary color, for example, a primary color blue **72**, **75** (see FIGS. 2A, 3A, 4A) which impinges on the luminescent layer **120**. The luminescent layer **120** comprises a garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen **73**, or comprises a combination of a garnet luminescent material comprising at least Lutetium and Cerium **70** and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium. Examples of these different luminescent materials are represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$ and comprise, for example, LuAG:Ce **70**, LuAGSN:Ce **73**, YAG:Ce **71**, YGdAG:Ce, YAGSN:Ce **74**, YGdAGSN:Ce. In the embodiment shown in FIG. 1A, the luminescent layer **120** is constituted of a first luminescent layer **122** and a second luminescent layer **124**, each of the first and second luminescent layers **122**, **124** being arranged on opposite sides of, for example, a carrier plate **126**. The first and second luminescent layers **122**, **124**, for example, comprise different luminescent materials. Alternatively, the first and second luminescent layers **122**, **124** may be applied at the same side (not shown) of the carrier plate **126**; the carrier plate **126** may, for example, be transparent or diffuse. The luminescent layer **120** may alternatively be applied as one layer (see FIG. 1B), or may alternatively be applied directly on the LEDs **D1**, **D2**. A concentration of the different luminescent materials **70**, **73**, **71**, **74** in the luminescent layer **120** or a thickness of the first and second luminescent layers **122**, **124** determines how much of the light of the primary color blue **72**, **75** emitted by the LEDs **D1**, **D2** is converted into light having the primary color yellow and thus determines the color point **76**, **77**, **78** (see FIGS. 2A, 3A, 4A) of the light emitted by the illumination system **100** according to the invention. The light generated by the illumination system **100** is emitted via a light exit window **105**.

[0038] FIG. 1B shows a simplified cross-sectional view of a display device **200** comprising the illumination system **101** according to the invention. The embodiment of the illumination system **101** according to the invention shown in FIG. 1B again comprises LEDs **D1**, **D2** arranged on a reflective surface **102** of a light-mixing chamber **104** of the illumination system **101**. In the embodiment of the illumination system **101** shown in FIG. 1B, the light emitted by the LEDs **D1**, **D2** is mixed using a first light-mixing element **110**, for example, a Lambertian diffuser element **110**. After the light emitted by the LEDs **D1**, **D2** has been diffused, it impinges on the luminescent layer **120**. The luminescent layer **120** shown in FIG. 1B, for example, comprises a mix of different luminescent materials, for example, selected from the group comprising LuAG:Ce, LuAGSN:Ce, YAG:Ce, YGdAG:Ce and YAGSN:Ce. Alternatively, the luminescent layer **120** may be constituted of a single luminescent material, for example, LuAGSN:Ce. A molar concentration of the luminescent material or of the different luminescent materials in the luminescent layer **120** determines how much of the light emitted by the LEDs **D1**, **D2** is converted into light having the primary color yellow and thus determines the color point **76**, **77**, **78** (see FIGS. 2A, 3A, 4A) of the light emitted by the illumination system **101** according to the invention. The illumination system **101** shown in FIG. 1B further comprises a second light-mixing element **130**, for example, a further Lambertian diffuser element **130**. Subsequently, the illumination system **101** comprises a BEF **140** which substantially only transmits light impinging on the BEF **140** at an angle of incidence which is within a predefined range, while the BEF **140** reflects the remainder of the light back into the illumination system **101** for recycling. In addition, the illumination system **101**, for example, comprises a DBEF **160** which substantially only transmits light having a predefined polarization direction, and reflects the remainder of the light back into the illumination system **101** for recycling. The DBEF **160** may be used as a polarizer for an image-creation layer **150**. The image creation layer **150**, for example, comprises a set of color filters **170**, an array of liquid crystal cells **180** and an analyzer **190** for creating an image on the display device **200**. Alternatively, the image creation layer **150** comprises both a polarizer and an analyzer (both absorbing), and the DBEF acts as a pre-polarizer.

[0039] FIG. 2A shows a CIE 1976 $u'v'$ -diagram of a combination of Cerium-activated Lutetium Aluminum Garnet **70** and Cerium-activated Yttrium Aluminum Garnet **71** together with a light emitting diode **D1**, **D2** (see FIG. 1A) emitting a primary color blue **72**. The CIE 1976 $u'v'$ diagram (further also indicated as $u'v'$ -diagram) is a chromaticity diagram in a $u'v'$ color space. The $u'v'$ -diagram shown in FIG. 2A shows a spectral color perception line **10** indicating the spectral colors which can be perceived by the human eye. Also in the $u'v'$ -diagram shown in FIG. 2A, an EBU color standard **20** is indicated with a dashed line forming a triangle. The EBU color standard **20** is a color gamut defined by the European Broadcasting Union related to phosphors typically used in television systems. In the $u'v'$ -diagram, the upper left corner of the EBU-standard **20** represents green, the upper right corner of the EBU-standard **20** represents red and the lower corner of the EBU-standard represents blue. Further indicated in FIG. 2A is a line called the black body locus **30** (also known as Planckian locus) which is a path in a color space (in this

case the $u'v'$ color space) representing chromaticity points of a black body which correspond to different temperatures of a black body.

[0040] The $u'v'$ -diagram shown in FIG. 2A comprises a color point of LuAG:Ce **70** having coordinates $u'_{70}=0.169$ and $v'_{70}=0.563$, a color point of YAG:Ce **71** having coordinates $u'_{71}=0.216$ and $v'_{71}=0.564$, and a color point **72** of the light emitted by the light emitting diode **D1**, **D2** having coordinates $u'_{72}=0.200$ and $v'_{72}=0.086$. The hatched triangle **50** defined by the color points of LuAG:Ce **70** and of YAG:Ce **71** and the color point **72** of the light emitting diode **D1**, **D2** represents a range within which a color of the light emitted by the illumination system **100**, **101** (see FIGS. 1A and 1B) can be altered by altering a concentration of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71**. A specific concentration ratio of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71** together with a remainder of the light emitted by the light emitting diode **D1**, **D2** which is not converted by the luminescent materials LuAG:Ce **70** and YAG:Ce **71** and which is determined by the total amount of luminescent materials LuAG:Ce **70** and YAG:Ce **71** results in a color point **76** representing the color of the light emitted by the illumination system **100**, **101** (see FIGS. 1A and 1B). Combining the illumination system **100**, **101** having a color point **76** with a transmission spectrum of a typical set of color filters **170**, for example, used in a display device **200** (see FIG. 1B), results in a color gamut **40** of the display device **200**. Due to the combination of the illumination system **100**, **101** with the typical set of color filters **170**, the color point **76** representing the color emitted by the illumination system **100**, **101** is changed to a color point with color temperature CT1 of the light emitted by the display device **100**.

[0041] By adding LuAG:Ce **70** to YAG:Ce **71** the color point of the illumination system **100**, **101** shifts towards shorter wavelengths compared to a luminescent layer comprising only YAG:Ce, which results in an increased color temperature **76** of the illumination system **100**, **101**. Adding the typical set of color filters **170** to the illumination system **100**, **101** according to the invention, the color point **76** of the illumination system **100**, **101** generally shifts along a vector **V** having a filter-specific length and having a filter-specific orientation that also depends on the actual spectrum of the light emitted by the backlight system. The shift of the color point of the illumination system **100**, **101** to shorter wavelengths, compared to illumination systems comprising only the known luminescent material YAG:Ce, also results in a shift of the color temperature of the display device **200** to shorter wavelengths, resulting in an increase of the color temperature CT1 of the light emitted by the display device **200**.

[0042] Furthermore, by controlling the ratio of a concentration of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71**, and by controlling the amount of light not converted by the luminescent materials LuAG:Ce **70** and YAG:Ce **71** via tuning of the concentration or total amount of luminescent materials LuAG:Ce **70** and YAG:Ce **71**, the color temperature **76** of the light emitted by the illumination system **100**, **101** can be controlled within the range indicated with a hatched triangle **50**. The altering of the color temperature **76** of the light emitted by the illumination system **100**, **101** subsequently leads to a change of the color temperature CT1 of the display device **200** comprising the illumination system **100**, **101**.

[0043] FIG. 2B shows an optical power density spectrum of the light emitted by the illumination system **100**, **101** com-

binning Cerium-activated Lutetium Aluminum Garnet **70** and Cerium-activated Yttrium Aluminum Garnet **71** together with the light emitting diode **D1, D2** emitting a primary color blue **72**. The optical power density spectrum **76** of the light emitted by the illumination system **100, 101** is constituted of a contribution of the spectrum of the light emitted by the LED **D1, D2** emitting the spectrum of the primary color blue **72** and the spectrum of the light emitted by the luminescent materials LuAG:Ce **70** and YAG:Ce **71** together emitting the spectrum of the primary color yellow. Changing the concentration of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71** will result in a difference in the contributions of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71** and of the light emitted by the LED **D1, D2** to the optical power density spectrum **76** of the illumination system **100, 101** according to the invention. This changing of the concentration of the individual luminescent materials LuAG:Ce **70** and YAG:Ce **71** enables the color point **76** indicated in the u'v'-diagram to be moved within the hatched triangle **50** indicated in FIG. 2A.

[0044] FIG. 3A shows a CIE 1976 u'v' diagram of Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride **73** together with a light emitting diode **D1, D2** emitting the primary color blue **72**. A color point of LuAGSN:Ce **73** has coordinates $u'_{73}=0.209$ and $v'_{73}=0.560$. A line **52** connecting the color point of LuAGSN:Ce **73** and color point **72** of the light emitted by the LED **D1, D2** represents a range within which the color of the light emitted by the illumination system **100, 101** (see FIGS. 1A and 1B) can be altered by altering a concentration of the luminescent material LuAGSN:Ce **73**.

[0045] The use of a specific concentration of the luminescent material LuAGSN:Ce in the luminescent layer **120** together with the LED **D1, D2** emitting the primary color blue **72** results in a color point **77** of the illumination system **100, 101** which is shifted toward shorter wavelengths with respect to an illumination system comprising only the luminescent material YAG:Ce. When combining the illumination system **100, 101** comprising LuAGSN:Ce with the typical set of color filters **170** of the display device **200**, the light emitted by the display device **200** comprises a color point CT2 which is shifted along the vector \vec{V} with respect to the color point **77** of the light emitted by the illumination system **100, 101**.

[0046] FIG. 3B shows an optical power density spectrum of the light emitted by the illumination system **100, 101** (see FIGS. 1A and 1B) comprising Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride **73** together with a light emitting diode **D1, D2** emitting the primary color blue **72**. The optical power density spectrum **77** of the light emitted by the illumination system **100, 101** is constituted of a contribution of the spectrum of the light emitted by the LED **D1, D2** emitting the spectrum of the primary color blue **72** and the spectrum of the light emitted by the luminescent material LuAGSN:Ce **73** emitting the primary color yellow. When altering the concentration of the luminescent material LuAGSN:Ce **73** within the luminescent layer **120**, the contribution of the primary color yellow emitted by LuAGSN:Ce **73** alters with respect to the primary color blue **72** emitted by the LED **D1, D2**, which alters the optical power density spectrum **77** of the illumination system **100, 101** according to the invention and thus alters the color point **77** of the light emitted by the illumination system **100, 101**.

[0047] FIG. 4A shows a CIE 1976 u'v' diagram of Cerium-activated Lutetium

[0048] Aluminum Garnet comprising Silicon Nitride **73** and Cerium-activated Yttrium Aluminum Garnet comprising

Silicon Nitride **74** together with a light emitting diode **D1, D2** emitting the primary color blue **72**. Alternatively the u'v'-diagram of FIG. 4A shows a combination of LuAGSN:Ce **73** and YAGSN:Ce **74** together with a light emitting diode **D1, D2** emitting a further primary color blue **75** being shifted with respect to the primary color blue **72**. The shift of the primary color blue may, for example, result from differences in the manufacturing process of the LEDs **D1, D2**. A color point of LuAGSN:Ce **73** has coordinates $u'_{73}=0.209$ and $v'_{73}=0.560$, a color point of YAGSN:Ce **74** has coordinates $u'_{74}=0.230$ and $v'_{74}=0.562$, a color point of the primary color blue **72** is $u'_{72}=0.200$ and $v'_{72}=0.086$, and a color point of the further primary color blue **75** is, for example, $u'_{75}=0.171$ and $v'_{75}=0.130$. A first hatched triangle **54**, defined by the color points of LuAGSN:Ce **73** and of YAGSN:Ce **74** and the color point **72** of the light emitting diode **D1, D2**, represents a range within which a color of the light emitted by the illumination system **100, 101** can be altered by altering a concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74**. A second hatched triangle **56**, defined by the color points of LuAGSN:Ce **73** and of YAGSN:Ce **74** and the further color point **75** of the light emitting diode **D1, D2**, represents a range within which a color of the light emitted by the illumination system **100, 101** can be altered by altering a concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74**. A specific concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** together with a remainder of the light of the primary color blue **72** emitted by the light emitting diode **D1, D2** which is not converted by the luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** results in a color point **78** representing the color of the light emitted by the illumination system **100, 101**. Alternatively, a further concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** together with a remainder of the light of the further primary color blue **75** emitted by the light emitting diode **D1, D2** which is not converted by the luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** also results in the color point **78**. Thus, it can be seen that a change in the central wavelength of the light emitted by the LED **D1, D2** can be compensated by changing the concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce in the luminescent layer **120**. Subsequently, the combination of the illumination system **100, 101** having a color point **78** with a transmission spectrum of a typical set of color filters **170**, for example, used in a display device **200**, results in a color gamut **40** of the display device **200**. Due to the combination of the illumination system **100, 101** with the typical set of color filters **170**, the color point **78** representing the color emitted by the illumination system **100, 101** is changed to the color temperature CT3 of the light emitted by the display device **100**.

[0049] FIG. 4B shows an optical power density spectrum of the light emitted by the illumination system **100, 101** comprising Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride **73** and Cerium-activated Yttrium Aluminum Garnet comprising Silicon Nitride **74** together with a light emitting diode **D1, D2** emitting the primary color blue **72**. The optical power density spectrum **78a** of the light emitted by the illumination system **100, 101** is constituted of a contribution of the spectrum of the light emitted by the LED **D1, D2** emitting the spectrum of the primary color blue **72** and the spectrum of the light emitted by the luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74**, together emitting the primary color yellow. The optical power density spectrum **78a**, when plotted in the u'v'-diagram of FIG. 4A, results in the color point **78**. Altering the concentration of the

individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** within the luminescent layer **120**, the contribution of the primary color yellow emitted by LuAGSN:Ce **73** and YAGSN:Ce **74** alters with respect to the primary color blue **72** emitted by the LED **D1**, **D2**, which alters the optical power density spectrum **78a** of the illumination system **100**, **101** according to the invention and thus alters the color point **78** of the light emitted by the illumination system **100**, **101**.

[0050] FIG. **4C** shows an optical power density spectrum of the light emitted by the illumination system **100**, **101** comprising Cerium-activated Lutetium Aluminum Garnet comprising Silicon Nitride **73** and Cerium-activated Yttrium Aluminum Garnet comprising Silicon Nitride **74** together with a light emitting diode **D1**, **D2** emitting the further primary color blue **75**. The optical power density spectrum **78b** of the light emitted by the illumination system **100**, **101** is constituted of a contribution of the spectrum of the light emitted by the LED **D1**, **D2** emitting the spectrum of the further primary color blue **75** and the spectrum of the light emitted by the luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74**, together emitting the primary color yellow. The shift (indicated with arrow **60**) of the central wavelength of the further primary color blue **75** with respect to the primary color blue **72** is compensated by changing the concentration of the luminescent material YAGSN:Ce **74**, resulting in an increased intensity (indicated with an arrow **62**) of the optical power density spectrum of the luminescent material YAGSN:Ce **74**. Thus, the optical power density spectrum **78b**, when plotted in the u^v -diagram of FIG. **4A**, also results in the color point **78**. Again, when altering the concentration of the individual luminescent materials LuAGSN:Ce **73** and YAGSN:Ce **74** within the luminescent layer **120**, the contribution of the primary color yellow emitted by LuAGSN:Ce **73** and YAGSN:Ce **74** alters with respect to the further primary color blue **75** emitted by the LED **D1**, **D2**, which alters the optical power density spectrum **78b** of the illumination system **100**, **101** according to the invention and thus alters the color point **78** of the light emitted by the illumination system **100**, **101**.

[0051] It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims.

[0052] For example, the layer of luminescent materials need not necessarily be a continuous, flat layer, but may also consist of, for example, patches of luminescent material covering individual LEDs.

[0053] In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. Use of the verb "comprise" and its conjugations does not exclude the presence of elements or steps other than those stated in a claim. The article "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention may be implemented by means of hardware comprising several distinct elements. In the device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

1. Illumination system (**100**) comprising,
 - a light emitting diode (**D1**, **D2**) emitting light of a first primary color (**72**, **75**),
 - a light exit window (**105**) for emitting light from the illumination system (**100**), and
 - a luminescent layer (**120**) arranged between the light emitting diode (**D1**, **D2**) and the light exit window (**105**) for

converting at least a part of the light emitted by the light emitting diode (**D1**, **D2**) into light of a second primary color, the luminescent layer (**120**) comprising a garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen (**73**), or comprising a combination of a garnet luminescent material comprising at least Lutetium and Cerium (**70**) and a garnet luminescent material comprising at least Cerium and at least one element of the group comprising Yttrium and Gadolinium (**71**, **74**).

2. Illumination system (**100**) as claimed in claim **1**, wherein the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen (**73**) or the garnet luminescent material comprising at least Lutetium and Cerium (**70**) further comprises Gadolinium.

3. Illumination system (**100**) as claimed in claim **1**, wherein the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen (**73**) is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 < x \leq 3$, $0 \leq y \leq 0.7$, $0 < x+y \leq 3$ and $0 < z \leq 2$,

the garnet luminescent material comprising at least Lutetium and Cerium (**70**) is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 < x \leq 3$, $0 \leq y \leq 2.7$, $0 < x+y \leq 3$ and $0 \leq z \leq 2$, and

the garnet luminescent material comprising at least Cerium and comprising at least one element of the group comprising Yttrium and Gadolinium (**71**, **74**) is represented by $(Y_{3-x-y}Lu_xGd_y)(Al_{5-z}Si_z)(O_{12-z}N_z):Ce$, where $0 \leq x < 3$, $0 \leq y \leq 2.7$, $0 < x+y \leq 3$ and $0 \leq z \leq 2$.

4. Illumination system (**100**) as claimed in claim **1**, comprising a combination of two luminescent materials, wherein a molar concentration of a first of the two luminescent materials in the luminescent layer (**120**) is 1 to 3 times larger than a molar concentration of the second of the two luminescent materials.

5. Illumination system (**100**) as claimed in claim **1**, comprising a combination of two luminescent materials, wherein a variation of a central wavelength emitted by the light emitting diode (**D1**, **D2**) is compensated by altering a molar concentration of any or both of the two luminescent materials in the luminescent layer (**120**).

6. Illumination system (**100**) as claimed in claim **1**, comprising a combination of two luminescent materials, wherein the luminescent layer (**120**) includes a layer (**122**) comprising a first of the two luminescent materials and a further layer (**124**) comprising a second of the two luminescent materials.

7. Illumination system (**100**) as claimed in claim **1**, comprising the garnet luminescent material comprising at least Lutetium, Cerium, Silicon and Nitrogen (**73**), wherein the luminescent layer (**120**) further comprises a garnet luminescent material comprising at least Cerium, Silicon and Nitrogen and at least one element of the group comprising Yttrium and Gadolinium (**74**).

8. Illumination system (**100**) as claimed in claim **1**, wherein the luminescent layer (**120**) is arranged as a remote phosphor layer (**120**) being a luminescent layer (**120**) arranged at a distance away from the light emitting diode (**D1**, **D2**).

9. Illumination system (**100**) as claimed in claim **1**, wherein the illumination system (**100**) comprises a light-mixing element (**110**, **130**) arranged between the light emitting diode (**D1**, **D2**) and the luminescent layer (**120**).

10. Illumination system (**100**) as claimed in claim **1**, wherein the illumination system (**100**) comprises a reflective polarizer film (**160**) and/or a collimator film (**140**) between the luminescent layer (**120**) and the light exit window (**105**).

11. Illumination system (100) as claimed in claim 1, wherein the illumination system (100) comprises at least two light emitting diodes (D1, D2), an emission spectrum of each of the two light emitting diodes (D1, D2) having a center wavelength such that the center wavelength of one of the two light emitting diodes (D1; D2) is shifted at least 5 nanometers from the center wavelength of the other of the two light emitting diodes (D1; D2).

12. Illumination system (100) as claimed in claim 1, wherein the illumination system (100) comprises at least two

light emitting diodes (D1, D2), and the light emitting diodes (D1, D2) are individually dimmable.

13. Illumination system (100) as claimed in claim 1, wherein the illumination system (100) comprises a plurality of light emitting diodes (D1, D2), and the plurality of light emitting diodes (D1, D2), in operation, operate in a scanning mode of operation.

14-15. (canceled)

* * * * *