



- (51) International Patent Classification:
A47L 15/42 (2006.01)
- (21) International Application Number:
PCT/EP2011/071910
- (22) International Filing Date:
6 December 2011 (06.12.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
a 2010/10883 24 December 2010 (24.12.2010) TR
- (71) Applicant (for all designated States except US): **ARCE-
LIK ANONIM SIRKETI** [TR/TR]; E5 Ankara Asfalti
Uzeri, Tuzla, 34950 Istanbul (TR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ARAS, Nasir Efe**
[TR/TR]; E5 Ankara Asfalti Uzeri, Tuzla, 34950 Istanbul
(TR). **ATABEY, Orhan** [TR/TR]; E5 Ankara Asfalti
Uzeri, Tuzla, 34950 Istanbul (TR).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A DISHWASHER COMPRISING A STORAGE TANK

Figure 1

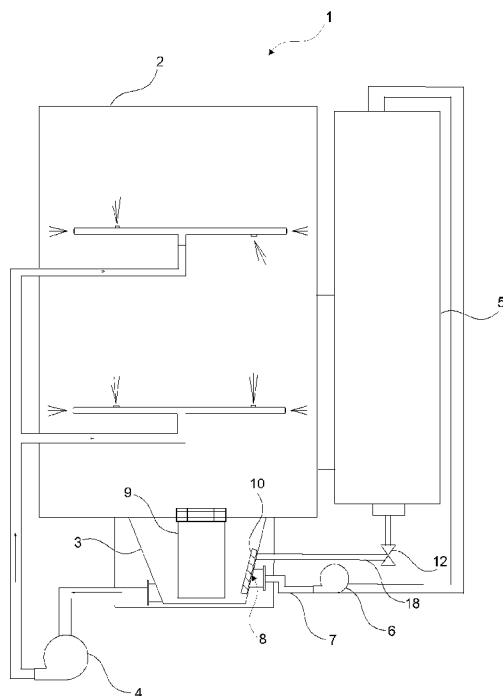

(57) Abstract: The present invention relates to a dishwasher (1) comprising a washing tub (2) wherein the items to be washed are placed, a receptacle (3) disposed at the lower portion of the washing tub (2), wherein the water in the washing tub (2) is collected during the washing process, a pump (4) which returns the water accumulated in the receptacle (3) to the washing tub (2), a storage tank (5) wherein the water used in any one washing step of the washing cycle is stored for using in the next washing step or in the next washing cycle, an additional pump (6) providing the water collected in the receptacle (3) to be pumped into the storage tank (5), an additional conduit (7), one end connected to the receptacle (3), the other end to the additional pump (6), at least one inlet port (8) disposed on the receptacle (3), whereto the additional conduit (7) opens and a microfilter (9) disposed at the center of the receptacle (3), that holds the dirt carried with the water passing from the receptacle (3) to the water circulation conduit, the discharge conduit or the additional conduit.

Description**A DISHWASHER COMPRISING A STORAGE TANK**

- [0001] The present invention relates to a dishwasher comprising a storage tank.
- [0002] In dishwashers, a washing receptacle is disposed at the underside of the washing tub, wherein the water in the washing tub is collected. The water in the washing receptacle is rotated in the washing tub by means of a pump during the washing step and is discharged at the end of the washing step by a discharge pump.
- [0003] In the state of the art, it is known that the water collected in the receptacle is not discharged but collected in a storage tank and used in the following steps of washing. Thus, the water that is used in any one step of the washing is reused and water saving is provided.
- [0004] While water is desired to be stored in order to save water, forming of contamination such as microorganisms, moss etc. is observed in the water waiting in the storage tank in the course of time and bad odors occur. Storing the water in the storage tank hygienically is important in terms of user health.
- [0005] In the state of the art Patent Document No. EP0669097, a dishwasher is defined as in the preamble of Claim 1.
- [0006] The aim of the present invention is the realization of a dishwasher comprising a storage tank wherein water is stored in more hygienic conditions.
- [0007] The dishwasher realized in order to attain the aim of the present invention and explicated in the claims, comprises a storage tank wherein the water collected in the receptacle at the end of any step of the washing cycle is stored by being pumped by means of an additional pump for reusing in the next washing step or in the washing cycle. The dishwasher furthermore comprises an additional conduit providing water to pass from the receptacle to the storage tank, an inlet port disposed on the side wall of the receptacle, through which the additional conduit is connected to the receptacle and a filter that covers the inlet port. The water passed through the microfilter at the center of the receptacle, passes through the filter and flows into the additional conduit and the storage tank. Thus, the water

directed to the storage tank is subjected to filtration process twice both by the microfilter and the filter. Thus, the cleanliness level of the water stored in the storage tank is improved.

- [0008] In an embodiment of the present invention, the filter is of detachable configuration. Thus, the filter can be dismounted by the user and remounted after cleaning when required.
- [0009] In another embodiment of the present invention, the inlet port is positioned on the side wall of the receptacle such that the inlet port is near the suction orifice of the pump. The water in the additional conduit is provided to be also sucked during suction of the pump and water motion from the additional conduit towards the receptacle occurs. Thus the dirt clinging on the face of the filter facing the receptacle fall off and the filter is provided to self clean.
- [0010] In another embodiment of the present invention, the water collected in the storage tank is delivered to the receptacle by means of the return conduit extending between the storage tank and the receptacle.
- [0011] In another embodiment of the present invention, the dishwasher comprises an expansion chamber disposed between the additional conduit, the return conduit and the inlet port and more than one outlet port, disposed over the expansion chamber and connecting the additional conduit and the return conduit with the expansion chamber. Thus, the inlet port connecting the additional conduit to the receptacle is used for connection of the expansion chamber to the receptacle, the need of forming a new opening on the receptacle is not required. Accordingly, labor and cost advantage is provided.
- [0012] In another embodiment of the present invention, the water in the storage tank is provided to be controllably delivered to the washing tub by means of a valve.
- [0013] In another embodiment of the present invention, an ozone generator for decontaminating the water in the storage tank from microorganisms and a diffuser disposed inside the storage tank, providing ozone gas generated by the ozone generator to be diffused inside the storage tank .are present. Accordingly, hygienic conditions inside the storage tank are improved.

- [0014] In another embodiment of the present invention, the storage tank is sterilized by emitting UV radiation into the storage tank with a UV source and a UV lamp disposed inside the storage tank and fed by the UV source.
- [0015] In another embodiment of the present invention, the control unit performs the storage tank cleaning step by providing the additional pump to be operated continuously at the end of a number of cycles determined by the producer. By the additional pump operating continuously, water circulation is provided inside the storage tank and interior of the storage tank is cleaned.
- [0016] In a version of this embodiment, the storage tank washing step is performed by the hot water collected in the receptacle and transferred to the storage tank after the second rinsing. Thus, cleaning effectiveness of the storage tank is increased.
- [0017] In another embodiment of the present invention, the waiting duration of the water stored in the storage tank is measured by the control unit, when the waiting duration exceeds a duration determined by the producer, this water is provided to be discharged. Thus, the water delivered from the storage tank to the washing tub is guaranteed to be always clean.
- [0018] By means of the present invention, the water used in any one step of the washing is provided to be stored under more hygienic conditions in the storage tank for reuse in the following washing steps. Consequently, not only water saving is provided but also hygienic utilization conditions are obtained for the user.
- [0019] A dishwasher realized in order to attain the aim of the present invention is illustrated in the attached figures, where:
- [0020] Figure 1 – is the schematic view of a dishwasher.
- [0021] Figure 2 – is the perspective view of a receptacle.
- [0022] Figure 3 – is the perspective view of the receptacle related to another embodiment of the present invention.
- [0023] Figure 4 – is the schematic view of the dishwasher related to another embodiment of the present invention.
- [0024] Figure 5 – is the schematic view of the dishwasher related to another embodiment of the present invention.

[0025] The elements illustrated in the figures are numbered as follows:

1. Dishwasher
2. Washing tub
3. Receptacle
4. Pump
5. Storage tank
6. Additional pump
7. Additional conduit
8. Inlet port
9. Microfilter
10. Filter
11. Expansion chamber
12. Valve
13. Ozone generator
14. Diffuser
15. UV source
16. UV lamp
17. Outlet port
18. Return conduit

[0026] The dishwasher (1) comprises

- a washing tub (2) wherein the items to be washed are placed,
- a receptacle (3) disposed at the underside of the washing tub (2) wherein the water in the washing tub (2) is collected during the washing process,
- a pump (4) that returns the water collected in the receptacle (3) to the washing tub (2),
- a storage tank (5) wherein the water used in any one washing step of the washing cycle is stored for using in the next washing step or in the next washing cycle,
- an additional pump (6) providing the water collected in the receptacle (3) to be pumped into the storage tank (5),
- an additional conduit (7), one end connected to the receptacle (3), the other end to the additional pump (6),

- at least one inlet port (8) disposed on the receptacle (3), where to the additional conduit (7) opens,
- a microfilter (9) disposed at the center of the receptacle (3), that holds the dirt carried with the water passing from the receptacle (3) to the water circulation conduit, the discharge conduit or the additional conduit (7).

[0027] During washing, the water used for washing the dishes in the washing tub (2) is collected in the receptacle (3), the water collected in the receptacle (3) is sucked by means of the pump (4) and the sucked water after passing through the microfilter (9) is redirected to the washing tub (2) by means of the spray arms. After any one washing step, the additional pump (6) is operated after stopping the pump (4) and the water collected in the receptacle (3) is directed to the storage tank (5). Supplying water from the mains is not required and water saving is provided by using the water passing through the microfilter (9) and stored in the storage tank (5) in the following steps of the washing or in the next washing step.

[0028] The dishwasher (1) of the present invention furthermore comprises a filter (10) disposed on the inlet port (8), providing the water passing through the microfilter (9) and directed to the storage tank (5) to be cleaned a second time by passing therethrough. After each washing step, the water passing through the microfilter (9) and collected in the receptacle (3) by operating the additional pump (6), passes to the additional conduit (7) by passing through the filter (10). The additional pump (6) directs the water passing to the additional conduit (7) towards the storage tank (5). The water collected in the storage tank (5) is subjected to filtration process twice by being passed both through the microfilter (9) and also the filter (10). Thus, cleanliness level of the water stored in the storage tank (5) is increased. Furthermore, by means of the filter (10) the problems that may arise due to the microfilter (9) not being mounted properly in place are eliminated. Thus, more hygienic utilization conditions are provided for the user.

[0029] The filter (10) can be plastic, wire, carbon or a thinner membrane filter.

[0030] In an embodiment of the present invention, the filter (10) is of detachable configuration. Thus, the filter (10) can be dismounted and cleaned by the

user at certain periods and again mounted in place. Thus, problems of the filter (10) being clogged etc. in the course of time are prevented.

[0031] In another embodiment of the present invention, the inlet port (8) is situated near the suction orifice of the pump (4). During the washing step, a water flow occurs from the additional conduit (7) towards the receptacle (3) when the pump (4) operates, since some amount of water is collected in the additional conduit (7). Meanwhile, a water movement occurs from the additional conduit (7) through the filter (10) towards the receptacle (3). This water movement occurring through the filter (10) provides the dirt clinging on the filter (10) to fall inwards into the receptacle (3). The dirt falling into the receptacle (3) settles on the base of the receptacle (3) due to gravity effect and is discharged by the discharge pump being operated. Thus, the filter (10) is provided to self clean and any user intervention is not required for cleaning the filter (10).

[0032] In another embodiment of the present invention, the dishwasher (1) comprises a return conduit (18) with one end connected to the storage tank (5), the other end to the receptacle (3), providing water to pass from the storage tank (5) to the receptacle (3). In the washing steps wherein the water in the storage tank (5) is used, the water in the storage tank (5) reaches the receptacle (3) by passing through the return conduit (18). The water in the receptacle (3) is directed to the washing tub (2) by means of the pump (4).

[0033] In another embodiment of the present invention, the dishwasher (1) comprises an expansion chamber (11), disposed between the additional conduit (7), the return conduit (18) and the inlet port (8), that provides water to pass from the receptacle (3) to the additional pump (6) and from the storage tank (5) to the receptacle (3). The water passes through the expansion chamber (11) both while passing from the receptacle (3) to the storage tank (5) by means of the additional conduit (7) and the additional pump (6) and while passing from the storage tank (5) to the receptacle (3) by means of the return conduit (18). The dishwasher (1) furthermore comprises more than one outlet port (17, 117) disposed on the expansion chamber (11), providing the expansion chamber (11) to be connected to

the additional conduit (7) and the return conduit (18). Thus, the water used in any one step of the washing cycle and collected in the receptacle (3) is directed to the additional conduit (7) and the storage tank (5) through the expansion chamber (11) by passing from the first outlet port (17). The first outlet port (17) provides the water directed to the storage tank (5) to pass from the expansion chamber (11) to the additional conduit (7). Similarly, the water passing from the storage tank (5) to the return conduit (18) passes from the second outlet port (117) and is delivered to the receptacle (3) through the expansion chamber (11). By using the inlet port (8) for connection of the expansion chamber (11) to the receptacle (3), the need for forming a new opening on the receptacle (3) for the expansion chamber (11) is eliminated. The inlet port (8) provides connection of both the additional conduit (7) and the expansion chamber (11) with the receptacle (3). Thus, the connection of the receptacle (3) with the additional conduit (7) is facilitated. Furthermore, the increase in cost that may arise due to forming a new opening on the receptacle (3) is prevented.

- [0034] In another embodiment of the present invention, the dishwasher (1) comprises a valve (12) disposed on the return conduit (18), providing the water in the storage tank (5) to be delivered controllably into the washing tub (2). The amount of water delivered from the storage tank (5) to the washing tub (2) is regulated by means of the valve (12).
- [0035] In another embodiment of the present invention, the dishwasher (1) comprises an ozone generator (13) and a diffuser (14) placed in the storage tank (5), providing the ozone gas leaving the ozone generator (13) to be delivered into the storage tank (5). As ozone gas is delivered into the storage tank (5), the water in the storage tank (5) is decontaminated from the microorganisms therein. Consequently, water is stored in the storage tank (5) in cleaner and more hygienic conditions.
- [0036] In another embodiment of the present invention, the dishwasher (1) comprises a UV source (15) and a UV lamp (16) disposed in the storage tank (5) that is fed by the UV source (15). By means of the UV lamp (16), the hygiene level of the water collected in the storage tank (5) is increased

by emitting UV radiation therein.

- [0037] In another embodiment of the present invention, the dishwasher (1) comprises a control unit that provides the storage tank (5) washing step to be performed by operating the additional pump (6) continuously at the end of a number of cycles determined by the producer. In the storage tank (5) washing step, the additional pump (6) is operated continuously thus providing circulation of water in the storage tank (5). The dirt clinging to inner walls of the storage tank (5) are removed and discharged by means of the water circulation in the storage tank (5). Consequently, interior of the storage tank (5) is cleaned and contamination of the stored water is prevented.
- [0038] In a version of this embodiment, the control unit performs the storage tank (5) washing step after the second rinsing step. Cleaning effectiveness of the interior of the storage tank (5) is increased since the water directed from the receptacle (3) to the storage tank (5) after the second rinsing step is hot.
- [0039] In another embodiment of the present invention, the control unit provides the water collected in the storage tank (5) to be discharged if this water is not used for a time period determined by the producer. The control unit detects the utilization period of the water in the storage tank (5) by means of the time counter disposed thereon. When the water in the storage tank (5) is not used for a time period determined by the producer, the control unit provides the water in the storage tank (5) to pass into the receptacle (3) and to be discharged by means of the discharge pump. Consequently, the moss, microorganisms and dirt that may form due to the water waiting for a long time period in the storage tank (5) is prevented from being delivered to the washing tub (2).
- [0040] By means of the present invention, the water directed from the receptacle (3) to the storage tank (5) by the additional pump (6) to be used in the following washing steps after passing through the microfilter (9), is provided to be filtered again by the filter (10) disposed on the inlet port (8) situated at the receptacle (3) outlet thus maintaining more hygienic utilization conditions. Furthermore, water saving is provided by storing the

water used in any one washing step in the storage tank (5) and reusing in the following washing steps.

[0041] It is to be understood that the present invention is not limited to the embodiments disclosed above and a person skilled in the art can easily introduce different embodiments. These different embodiments should also be considered within the scope of the claims of the present invention.

Claims

1. A dishwasher (1) comprising
 - a washing tub (2) wherein the items to be washed are placed,
 - a receptacle (3) disposed at the underside of the washing tub (2) wherein the water in the washing tub (2) is collected during the washing process,
 - a pump (4) that returns the water collected in the receptacle (3) to the washing tub (2),
 - a storage tank (5) wherein the water used in any one washing step of the washing cycle is stored for using in the next washing step or in the next washing cycle,
 - an additional pump (6) providing the water collected in the receptacle (3) to be pumped into the storage tank (5),
 - an additional conduit (7), one end connected to the receptacle (3), the other end to the additional pump (6),
 - at least one inlet port (8) disposed on the receptacle (3), whereto the additional conduit (7) opens,
 - a microfilter (9) disposed at the center of the receptacle (3), that holds the dirt carried with the water passing from the receptacle (3) to the water circulation conduit, discharge conduit or the additional conduit (7).

characterized by

 - a filter (10) disposed on the inlet port (8), providing the water directed to the storage tank (5) by passing through the microfilter (9) to be cleaned a second time by being passed therethrough.
2. A dishwasher (1) as in Claim 1, **characterized by** the filter (10) that is of detachable configuration.
3. A dishwasher (1) as in any one of the Claims 1 or 2, **characterized by** the inlet port (8) disposed near the pump (4) suction orifice.
4. A dishwasher (1) as in any one of the above Claims, **characterized by** a return conduit (18) with one end connected to the storage tank (5), the other end to the receptacle (3), providing water to pass from the storage tank (5) to the receptacle (5).
5. A dishwasher (1) as in any one of the above Claims, **characterized by** an

expansion chamber (11), disposed between the additional conduit (7), the return conduit (18) and the inlet port (8), that provides water to pass from the receptacle (3) to the additional pump (6) and from the storage tank (5) to the receptacle (3).

6. A dishwasher (1) as in Claim 5, **characterized by** more than one outlet port (17, 117) disposed on the expansion chamber (11), providing the expansion chamber (11) to be connected to the additional conduit (7) and the return conduit (18).
7. A dishwasher (1) as in any one of the above Claims, **characterized by** a valve (12) disposed on the return conduit (18), providing the water in the storage tank (5) to be delivered controllably into the washing tub (2).
8. A dishwasher (1) as in any one of the above Claims, **characterized by** an ozone generator (13) and a diffuser (14) placed in the storage tank (5), providing the ozone gas leaving the ozone generator (13) to be delivered into the storage tank (5).
9. A dishwasher (1) as in any one of the Claims 1 to 7, **characterized by** a UV source (15) and a UV lamp (16) disposed in the storage tank (5) that is fed by the UV source (15).
10. A dishwasher (1) as in any one of the above Claims, **characterized by** a control unit that provides the storage tank (5) washing step to be performed by operating the additional pump (6) continuously at the end of a number of cycles determined by the producer.
11. A dishwasher (1) as in Claim 10, **characterized by** the control unit that provides the storage tank (5) washing step to be performed after the second rinsing step.
12. A dishwasher (1) as in any one of the above Claims, **characterized by** the control unit that provides the water collected in the storage tank (5) to be discharged if this water is not used for a time period determined by the producer

Figure 1

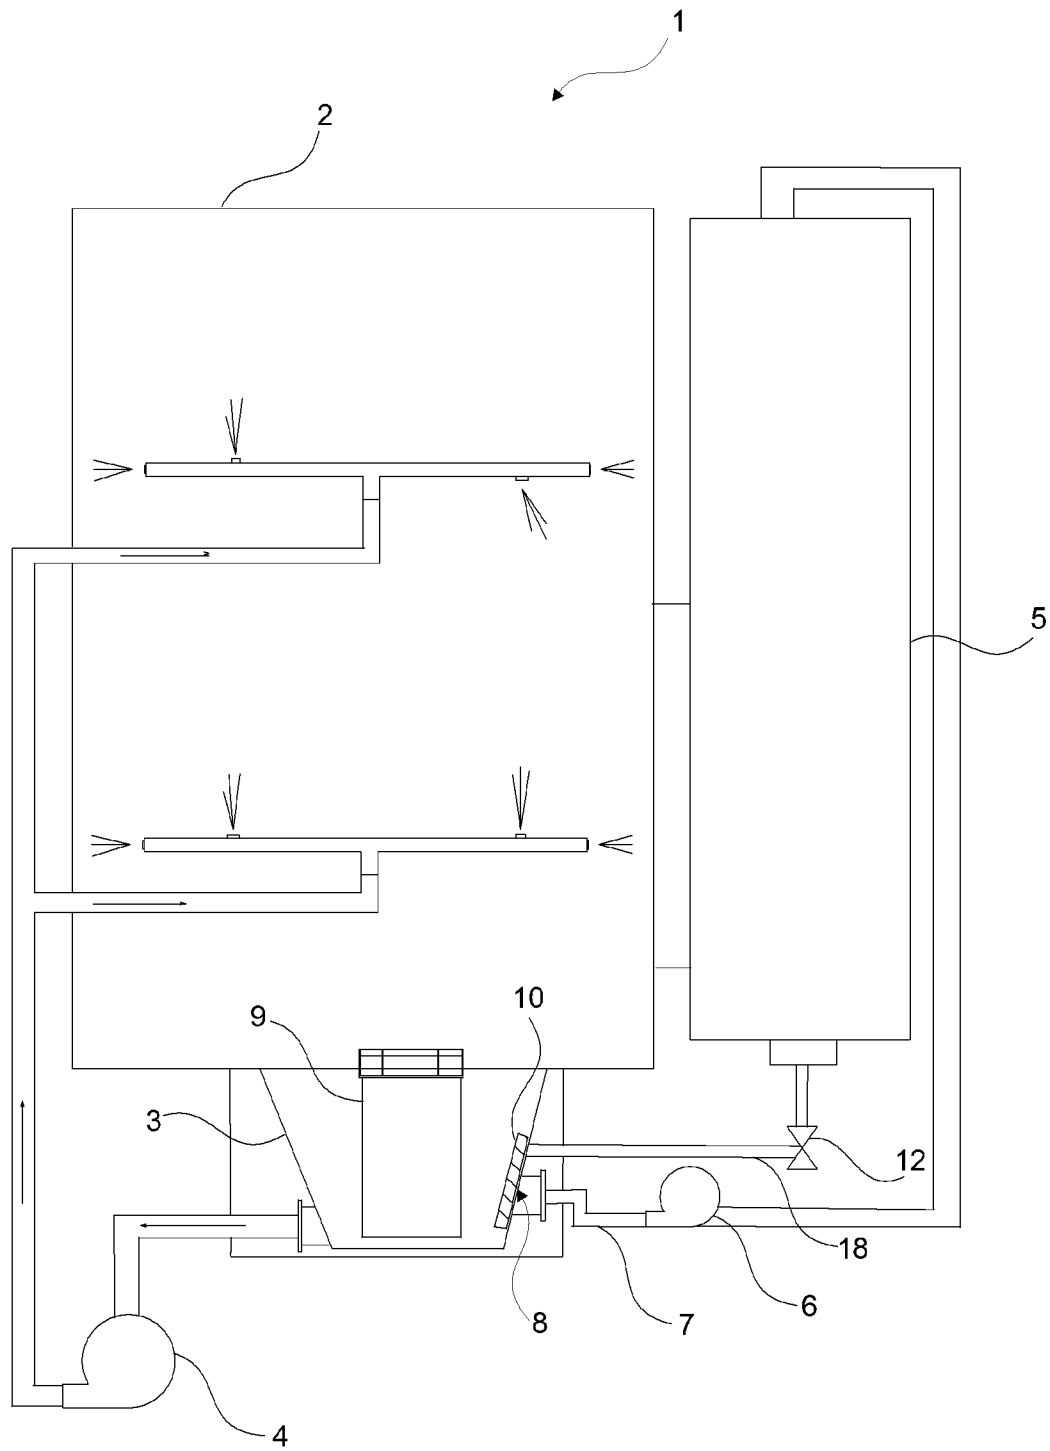


Figure 2

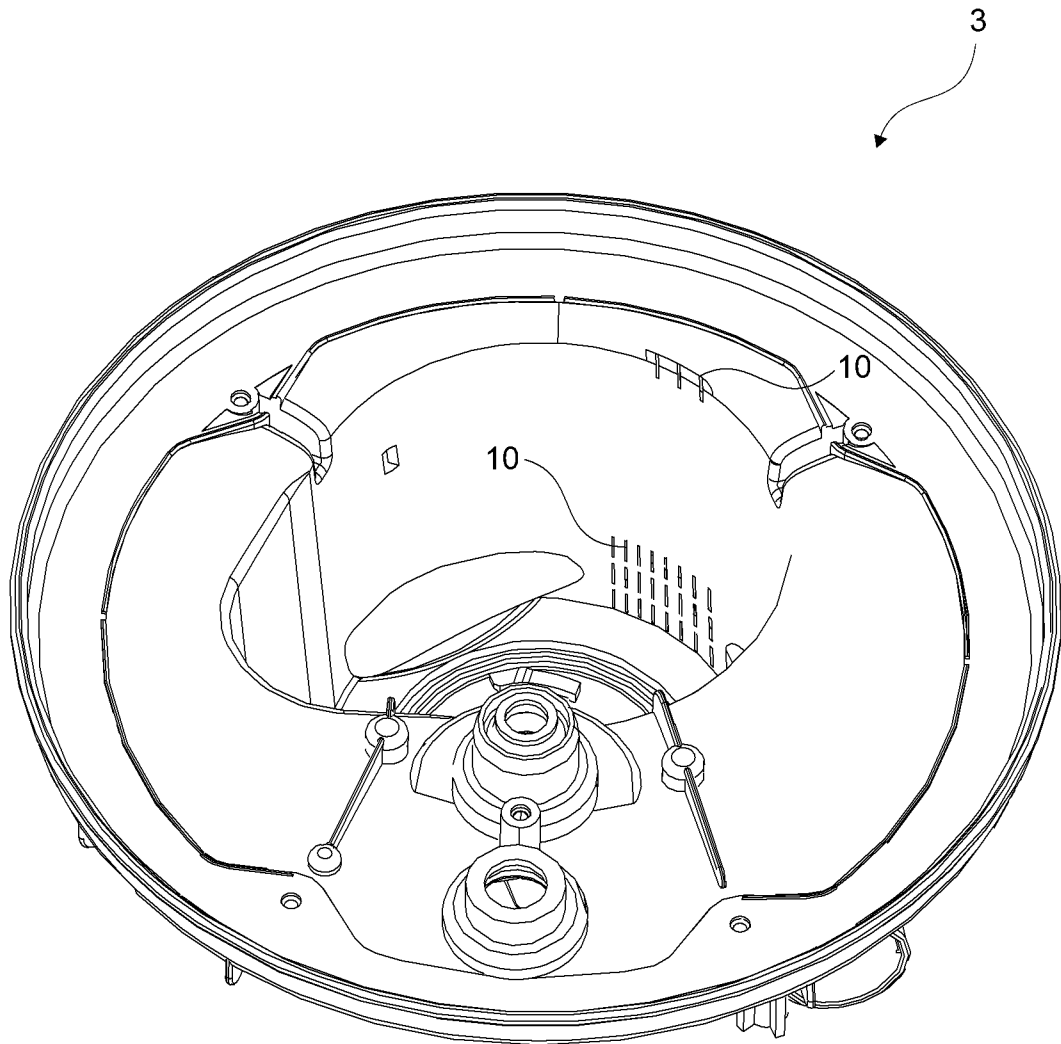


Figure 3

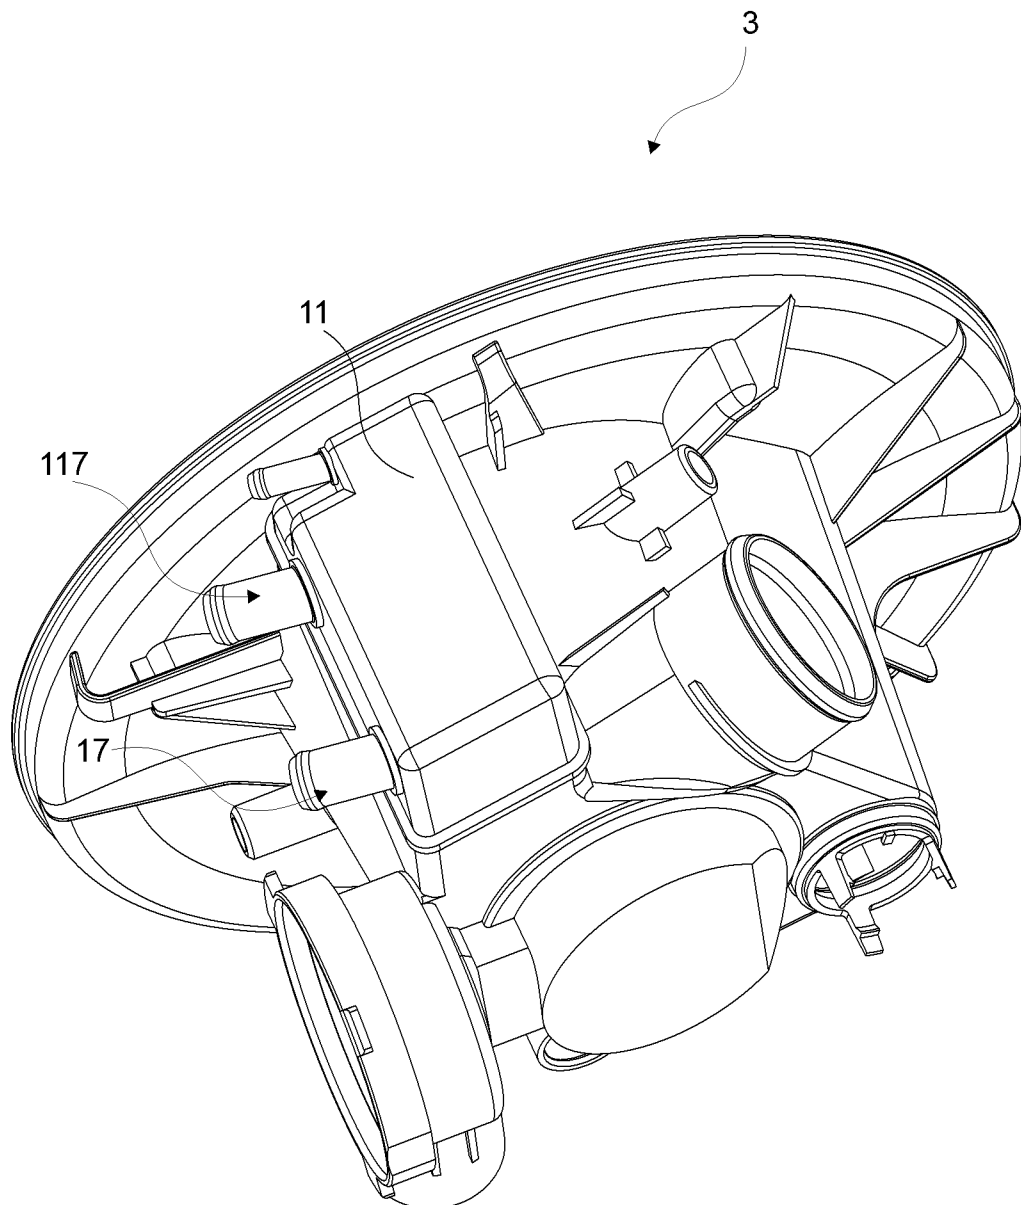


Figure 4


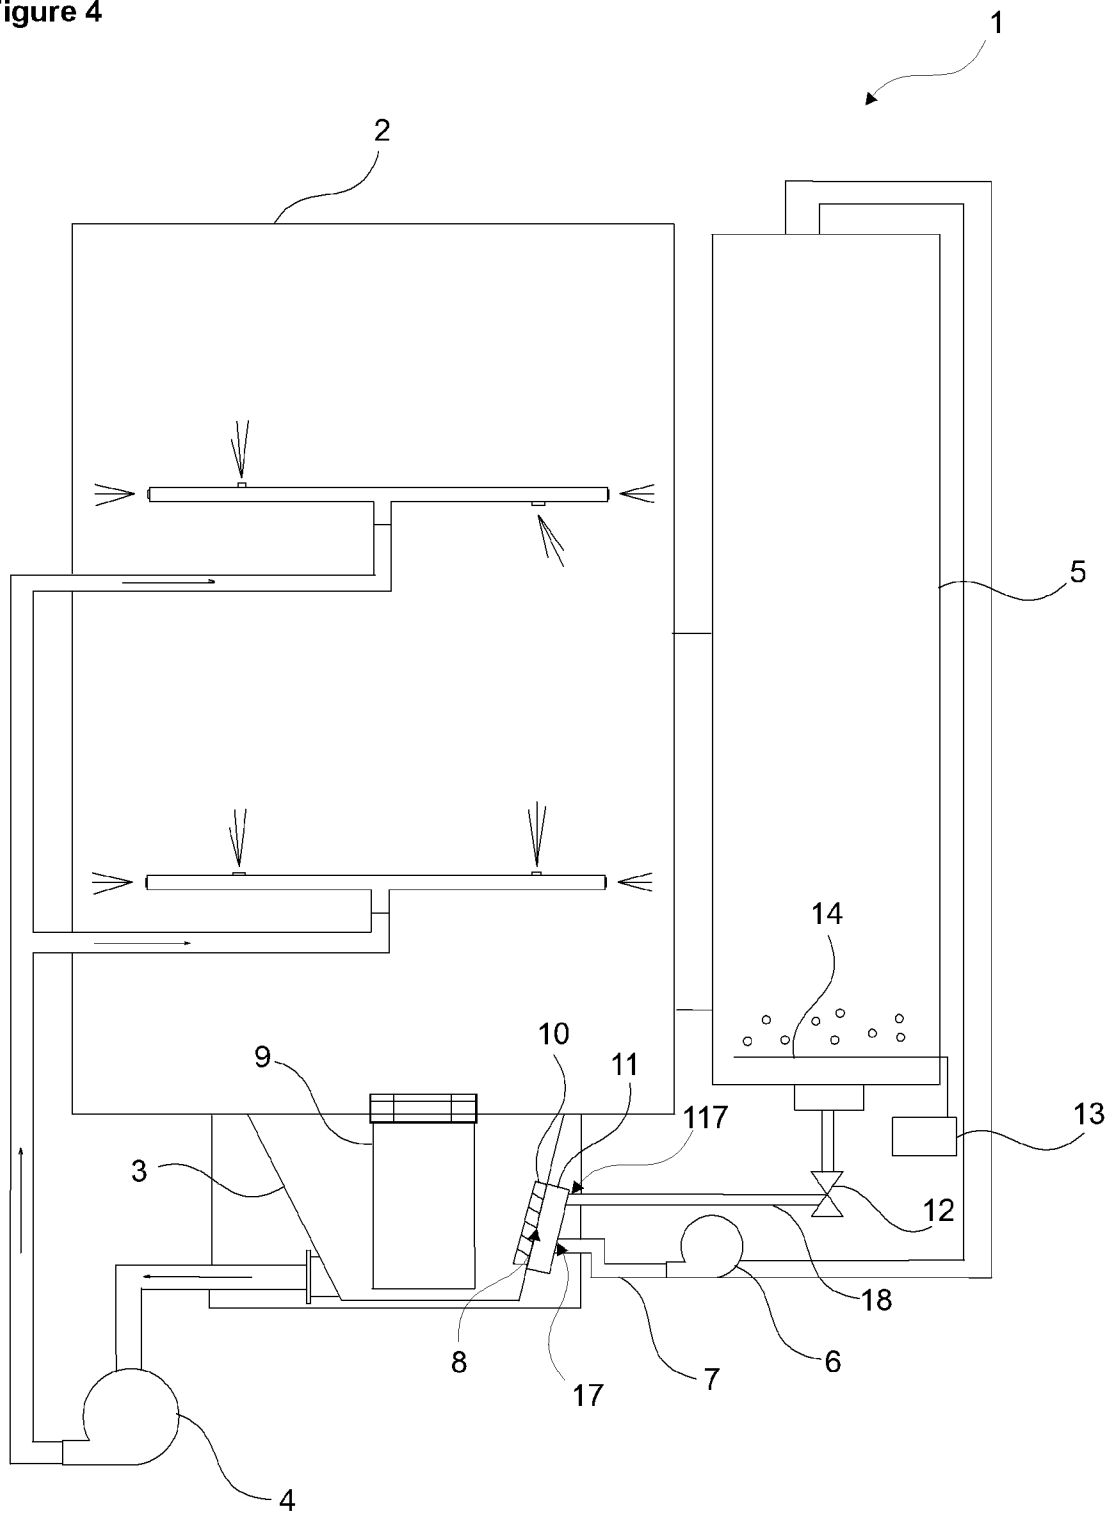


Figure 5

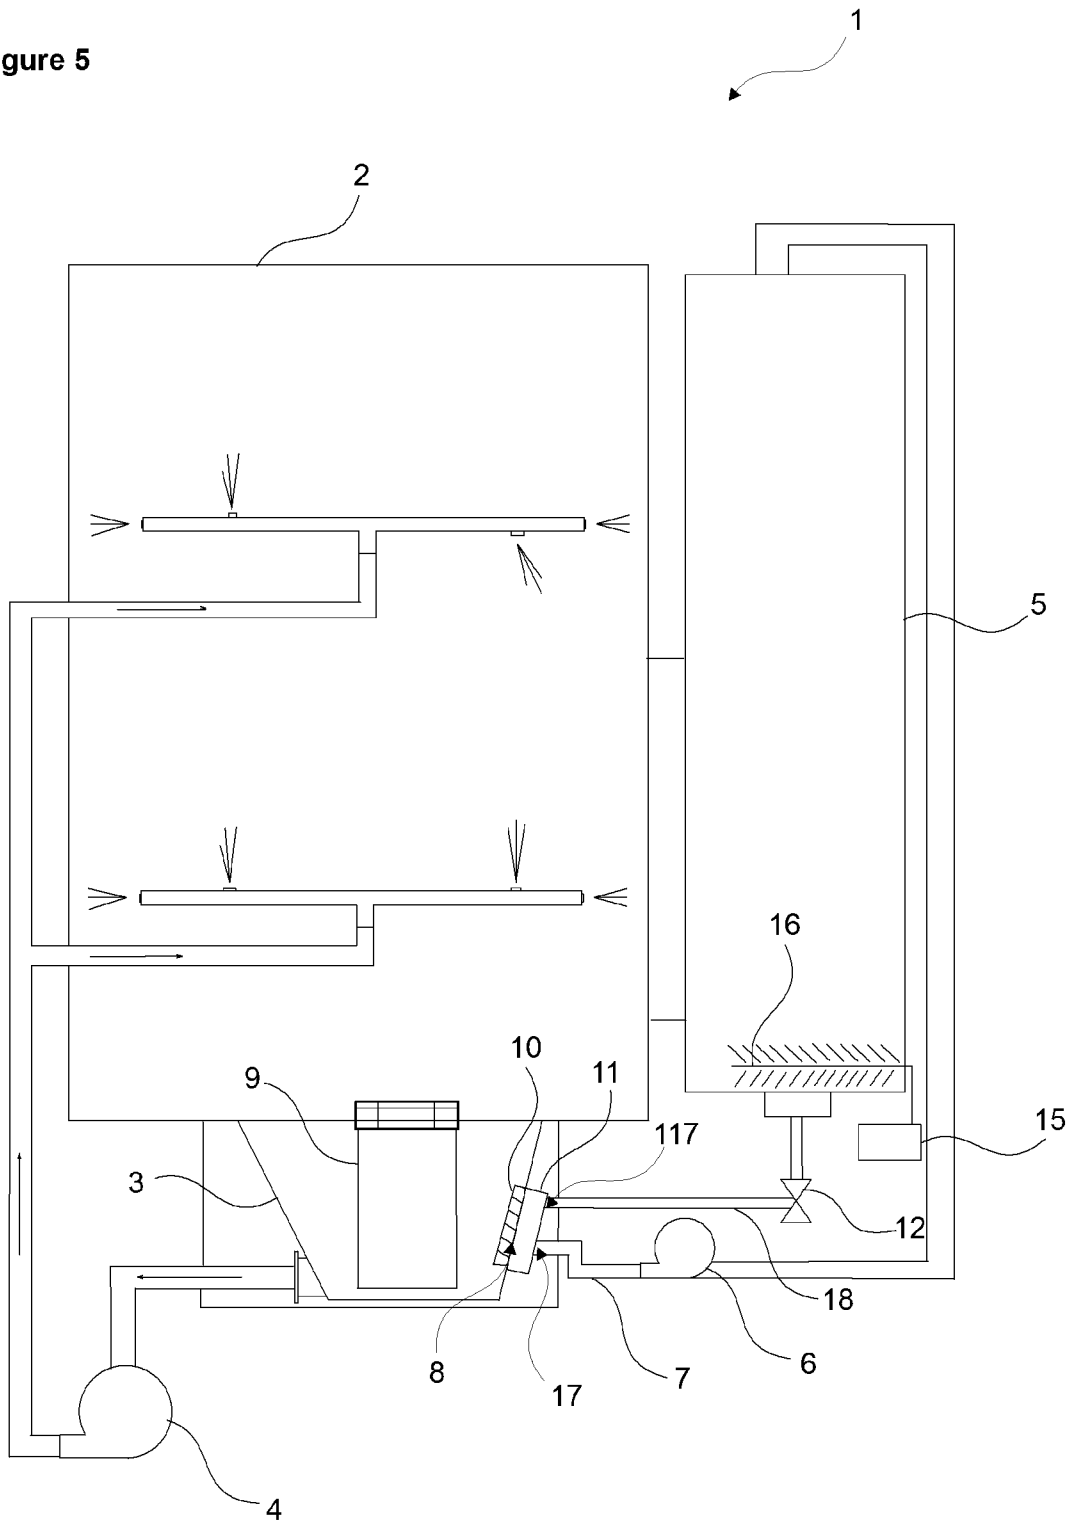

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/071910

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47L15/42
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A47L D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 669 097 A2 (ZANUSSI ELETTRODOMESTICI [IT] ELECTROLUX ZANUSSI ELETTRODOME [IT]) 30 August 1995 (1995-08-30) cited in the application figure 1	1-12
Y	DE 40 04 057 A1 (MIELE & CIE [DE]) 14 August 1991 (1991-08-14) column 3, line 19 - line 60 column 5, line 30 - column 10, line 34; figures 3,6-13	1-7,9-12
Y	WO 03/037801 A1 (KX INDUSTRIES LP [US]) 8 May 2003 (2003-05-08) the whole document	8
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 December 2011

Date of mailing of the international search report

05/01/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lodato, Alessandra

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2011/071910

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	EP 2 390 398 A1 (V ZUG AG [CH]) 30 November 2011 (2011-11-30) the whole document -----	8,9
A	DE 10 2008 040653 A1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 28 January 2010 (2010-01-28) the whole document -----	1-12
Y	WO 2005/063109 A1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]; JERG HELMUT [DE]; HEILIGENMANN CAR) 14 July 2005 (2005-07-14) the whole document -----	8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/071910

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0669097	A2	30-08-1995	DE 69520515 D1 10-05-2001
		DE 69520515 T2 09-08-2001	
		EP 0669097 A2 30-08-1995	
		ES 2156166 T3 16-06-2001	
		IT PN940011 A1 25-08-1995	
		US 5617885 A 08-04-1997	
DE 4004057	A1	14-08-1991	NONE
WO 03037801	A1	08-05-2003	US 2003080068 A1 01-05-2003
		WO 03037801 A1 08-05-2003	
EP 2390398	A1	30-11-2011	NONE
DE 102008040653	A1	28-01-2010	AU 2009273322 A1 28-01-2010
		CN 102098953 A 15-06-2011	
		CN 102131437 A 20-07-2011	
		DE 102008040653 A1 28-01-2010	
		EP 2312987 A1 27-04-2011	
		JP 2011528594 A 24-11-2011	
		US 2011114140 A1 19-05-2011	
		US 2011132407 A1 09-06-2011	
		WO 2010010012 A1 28-01-2010	
WO 2005063109	A1	14-07-2005	AT 447875 T 15-11-2009
		CN 1897861 A 17-01-2007	
		DE 10360906 A1 28-07-2005	
		EP 1701644 A1 20-09-2006	
		US 2007251549 A1 01-11-2007	
		WO 2005063109 A1 14-07-2005	