

(10)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 154 150
B1

(12)

EUROPEAN PATENT SPECIFICATION

(46) Date of publication of patent specification: 13.06.90

(51) Int. Cl.⁵: A 61 K 7/48, A 61 K 7/035

(21) Application number: 85100834.2

(22) Date of filing: 28.01.85

(54) Cosmetics.

(30) Priority: 06.02.84 JP 19769/84

(43) Date of publication of application:
11.09.85 Bulletin 85/37(45) Publication of the grant of the patent:
13.06.90 Bulletin 90/24(34) Designated Contracting States:
DE FR GB IT

(56) References cited:
BE-A- 498 263
DE-A-2 000 199
DE-A-2 708 746
FR-A- 784 404
GB-A-1 126 018
US-A-3 632 744

CHEMICAL ABSTRACTS, vol. 102, 1985, page 36,
abstract no. 63078b, Columbus, Ohio, US; & JP -
A - 59 170 131 (DAIHACHI CHEMICAL INDUSTRY
CO., LTD.) 26-09-1984

(73) Proprietor: Kao Corporation
14-10, Nihonbashi Kayabacho 1-chome
Chuo-Ku Tokyo 103 (JP)

(72) Inventor: Fukasawa, Junichi
4-16, Nobamachi Kounan-ku
Yokohama-shi Kanagawa-ken (JP)
Inventor: Kato, Haruya
1-1-3, Kouyadai
Funabashi-shi Chiba-ken (JP)
Inventor: Iwaya, Katsumasa
3-1-6, Jotou
Oyama-shi Tochigi-ken (JP)
Inventor: Shimizu, Takako
2-16-2, Higashiyotsugi
Katsushika-ku Tokyo (JP)
Inventor: Kawano, Atsushi
1-26-5, Nakashizu
Sakura-shi Chiba-ken (JP)

(74) Representative: Wächtershäuser, Günter, Dr.
Tal 29
D-8000 München 2 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 154 150 B1

Description

This invention relates to the art of cosmetics and more particularly, to cosmetics which comprise alkyl phosphates and cosmetic powders by which the cosmetics are water-repellent in nature, are unlikely to suffer cosmetic breakage and are readily spread on the skin with improved softness.

At present, a number of cosmetics comprising cosmetic powders are commercially sold, including makeup cosmetics such as foundations, face powders, rouges, eye shadows, eye brows and the like, and body cosmetics such as body powders, baby powders and the like. The powders used in these cosmetics can be broadly divided into three groups including loading pigments, coloring pigments and composite pigments thereof. Of these pigments, loading pigments and composite pigments of loading and coloring pigments are used in relatively large amounts. Accordingly, the powder performances of these pigments give great influences on the performances of the respective cosmetics.

The cosmetic performances which are important as cosmetics comprising powders include spreading on the skin, smoothness, adherence and the like. With makeup cosmetics, cosmetic breakage is further added.

In order to improve these cosmetic performances, it is the usual practice to add cosmetic powders after coating thereon higher fatty acids, higher alcohols, fatty acid esters, metallic soaps and the like. In makeup cosmetics, there have been proposed several methods including a method (Japanese Laid-open Patent Application No. 54-14528) in which silicones having high water repellency are applied to powders in order to prevent the powder from being wetted with water and thus prevent cosmetic breakage and also to allow use of these powders in cosmetics of water-containing and water-free types. Another method (Japanese Laid-Open Patent Application No. 55-36213) includes use of powders which are treated, by baking, with silicone oils with or without containing other oils on the surface thereof.

DE—A—27 08 746 discloses a detergent composition comprising monoalkyl or monoalkenyl phosphate in admixture with dialkyl or dialkenyl phosphate. This detergent composition can be used as a powdery cleansing agent, i.e. a dentifrice.

However, these known methods have still drawbacks and are not satisfactory. More particularly, the surface coating method using higher fatty acids, higher alcohols, fatty acids esters and metallic soaps is disadvantageous in that clay minerals which are powder substrates used in cosmetics comprising powders are not imparted with water repellency. For instance, with pressed makeup cosmetics of the water-containing or water-free type, when the cosmetic is used while rubbing with water-containing sponge or puff on the surface thereof, "gloss" takes place, causing a problem of caking. On the other hand, when silicones are added to make, for example, pressed makeup cosmetics, it is difficult to mold even when the compression pressure is raised with an attendant disadvantage that the powder itself is felt very rough.

The present inventors have made intensive studies to obtain powder-containing cosmetics which are free of the above disadvantages and have good cosmetic performances. As a result, it was found that cosmetics to which a specific type of alkyl phosphate and a cosmetic powder were added had higher water repellency and no roughness. Thus, smoothness and softness on the skin were remarkably improved and when press molded, such cosmetics had good shape retentivity. The present invention is accomplished based on the above finding.

According to the present invention, there is provided a make-up cosmetic or a body cosmetic of improved water repellence and improved softness to the skin, which comprises:

a cosmetic powder selected from particles of inorganic loading pigments and composite pigments, said cosmetic powder particles being coated by an amount of from 0.1 to 50 wt% of a dialkyl phosphate of the formula:



wherein R_4 and R_5 independently each represents a linear alkyl group having from 14 to 22 carbon atoms.

Brief description of the drawings

A sole figure is a graph showing the results of organoleptic evaluation of powder foundations using dicetyl phosphate-coated sericite, non-treated sericite and methylhydrogen polysiloxane-coated sericite.

Detailed description of the invention and preferred embodiments

The dialkyl phosphates represented by the formula (I) are known compounds. Specific examples of the alkyl groups represented by R_4 and R_5 include saturated alkyl groups such as myristyl, cetyl, stearyl and behenyl.

The cosmetic powders may be powders ordinarily used for these purposes and include, for example, inorganic loading pigments such as talc, clay minerals such as sericite, mica, kaolin, illite, acidic terra alba and bentonite inorganic pigments such as titanium oxide, zinc oxide, ultramarine blue, chromium oxide,

iron oxide; and composite pigments such as titanium dioxide-coated mica and iron oxide-coated mica. These powders may be used singly or in combination. Of these cosmetic powders, inorganic powders such as talc, clay minerals which contain Al atoms, titanium dioxide coated mica and iron oxide-coated mica are preferred when applied as body cosmetics.

In order to prepare the cosmetics according to the invention, dialkyl phosphates and cosmetic powders may be mixed with other arbitrary ingredients by means of a Henschel mixer, a Nauta mixer, a ribbon blender or mortar. In order to further improve water repellency, it is preferable to first mix cosmetic powders and dialkyl phosphates such as in a mortar sufficiently to render them compatible with each other, followed by mixing with other ingredients.

It is also preferred that the dialkyl phosphates are dissolved in organic solvents such as benzene, toluene and acetone under heating conditions, to which cosmetic powders are added and agitated. Thereafter, the solvent is distilled off to form a dialkyl phosphate coating on the individual particles. The coated particles are mixed with other ingredients.

The mixing temperature is 20 to 90°C, and preferably, 40 to 80°C. The amount of organic solvent is 0.3 to 30 times, and preferably 0.5 to 10 times as large as the amount of inorganic powder based on a weight proportion. The mixing time depends on the treating amount and sort of the inorganic powder, but generally the time is 1 to 15 hours, and preferably 2 to 10 hours.

It will be noted that after the coating, the powder may be heated to a level higher than a melting point of the dialkyl phosphate in order to render the powders compatible with the dialkyl phosphate. Prior to coating with the dialkyl phosphate dissolved in organic solvents, the cosmetic powder may be pretreated as follows; the powder is calcined at 110°C for 30 minutes to 80 hours under reduced pressure to dry the powder whereby water repellency after the coating is much improved. In the coating treatment, two or more types of cosmetic powders may be used at the same time. Within the ranges of amounts not impeding the effects of the present invention, other known coating materials such as silicones, higher fatty acids, higher alcohols, esters and waxes may be used for the coating.

In the practice of the invention, the amount of dialkyl phosphate depends on the type and is generally in the range of 0.1 to 50 % by weight (hereinafter referred to simply as %), preferably 2 to 20%, of the cosmetic powder. If the amount of dialkyl phosphate is too small, water repellency becomes unsatisfactory, whereas too large amounts may result in a loss of spreadability of loading pigments themselves.

The cosmetics of the invention include makeup cosmetics such as foundations, rouges, eye shadows and eye brows; and body cosmetics such as body powders and baby powders. For the preparation of these cosmetics, there may be further used, aside from cosmetic powders, oils such as higher fatty acids, high alcohols, waxes, esters, hydrocarbons and silicones and if necessary, antiseptics, antioxidants, perfumes and astringents. With eye shadows, rouges and similar cosmetics, it is possible to add loading pigments. However, in order to obtain cosmetics having good water repellency, it is preferable to coat not only the loading pigments, but also color pigments such as titanium oxide, zinc oxide, ultramarine blue, chromium oxide, iron oxide and organic tar pigments.

The thus obtained cosmetics of the present invention are imparted with water repellency from the dialkyl phosphates and have not only good spreadability, softness and smoothness on the skin, but also are resistant to sweat and water. When the cosmetics are pressed powdery make up cosmetics such as foundations, eye shadows, rouges and the like, the cosmetic composition of the invention is readily pressed molded as desired without involving breakage of the cosmetic spread on the skin.

The present invention is described in detail by way of examples.

Example 1

Talc (Talc JA 46R; manufactured by Asada Seifun Ltd.) was provided as a cosmetic powder and was mixed or coated with a number of alkyl phosphates to determine water repellency.

Mixing method: 0.1—2 g of alkyl phosphates and 10 g of talc were mixed in an automatic mortar (automatic mortar Model NMW 200W, by Nitto Co., Ltd.) for 30 minutes to 40 hours.

Coating method: 0.1—2 g of alkylphosphates and 100 ml of hexane were placed in a 300 milliter egg plant-type flask and agitated at 50°C for about 20 minutes. Thereafter, 10 g of talc was added and the egg plant-type flask was rotated for about 30 minutes without sucking with a rotary evaporator, followed by distilling off the hexane at 60°C under suction with a tap aspirator. The resulting powder was dried overnight under reduced pressure at 50°C to completely remove the hexane therefrom.

About 0.05 g of the powder thus obtained was floated on 15 ml of water in a 30 ml beaker, which was then shaken to visually observe dispersability of the powder in water. For control, the above procedure was repeated using non-treated talc.

Evaluation was effected as follows.

0: powder was immediately dispersed in water.

1: when the beaker was shaken, almost all powder was dispersed in water within 30 seconds.

2: When the beaker was shaken, water became turbid after 30 seconds but floating powder was also observed.

3: When the beaker was shaken, water became turbid after 1 minute and the powder floated on the water was recognized in relatively large amounts.

EP 0 154 150 B1

4: When the beaker was shaken, the water did not become turbid even after 1 minute, but no powder dispersed in the water was recognized.

5: When the beaker was shaken over 1 minutes, no powder was found to be dispersed in water. The results are shown in Table 1 below.

TABLE 1

Alkyl phosphate	Coating method		Mixing method	
	Treating amount (wt%)	Water repellency	Treating amount (wt%)	Water repellency
Comparison				
Non-treated product	—	1	—	1
Products of invention				
Diocetyl phosphate (Ref.)	2	2	2	1—2
"	5	3	5	1—2
Dilauryl phosphate (Ref.)	2	3	2	2
"	5	3—4	5	2
Dicetyl phosphate	2	3—4	2	2
"	5	4—5	5	2
"	10	5	10	2
"	20	5	20	2
Distearyl phosphate	2	3—4	2	2
"	5	5	5	2
Dibehenyl phosphate	2	4	2	2
"	5	5	5	2
Monostearyl phosphate (Ref.)	5	2	5	1—2
Tristearyl phosphate (Ref.)	5	3	5	1—2

Example 2

Sericite (Sericite SP; manufactured by Horie Kako K.K.) was provided as the cosmetic powder. Sericite was dried at 110°C under reduced pressure overnight, after which it was mixed or coated with various alkyl phosphates in the same manner as in Example 1. The resulting powders were tested to determine water repellency according to the method of Example 1. Moreover, a bonding force of each powder which is an index to shape retentivity of the powder was determined by a procedure in which 2 g of the powder was shaped as tablets having a diameter of 2 cm under a pressure of 200 bar (Kg/cm²) and was compressed by means of a rheometer, made by Fudo Ind. Co., Ltd., to determine a force (Kg) required for breakage of the tablet. A resistance to abrasion (friction factor) which is an index to smoothness of powder was checked by the use of a surface tester HEIDON®-14, by Shinto Science Co., Ltd.

The amount of each alkyl phosphate was 10% of the powder. For control, non-treated sericite was used. The results are shown in Table 2.

EP 0 154 150 B1

TABLE 2

Alkyl phosphate	Coating method			Mixing method		
	Water repellency	Binding force	Friction factor	Water repellency	Binding force	Friction factor
Comparison Non-treated	0	0.62 Kg	1.7×10^{-2}	0	0.62 Kg	1.7×10^{-2}
Products of invention						
(Ref.) Dilauryl Phosphate	4	1.27 Kg	1.2×10^{-2}	1	1.10 Kg	1.2×10^{-2}
Dicetyl phosphate	5	1.44 Kg	1.0×10^{-2}	1	1.37 Kg	1.1×10^{-2}
Distearyl phosphate	5	1.52 Kg	1.1×10^{-2}	1	1.41 Kg	1.2×10^{-2}
(Ref.) Monostearyl phosphate	2	1.20 Kg	1.0×10^{-2}	1	1.15 Kg	1.1×10^{-2}
(Ref.) Tristearyl phosphate	3	1.53 Kg	1.2×10^{-2}	1	1.44 Kg	1.2×10^{-2}

Example 3

Ten grams of sericite (Sericite SL; manufactured by Horie Kako K.K.) were coated with 1 g of a dialkyl phosphate or an oil in the same manner as in Example 1 and water repellency and abrasion resistance of the resulting powders were determined. The results are shown in Table 3 below.

TABLE 3

Products of invention			Comparative products		
Coating material	Water repellency	Friction factor	Coating material	Water repellency	Friction factor
			Lauric acid	2	1.4×10^{-2}
Dicetyl phosphate	5	1.0×10^{-2}	Palmitic acid	2	1.4×10^{-2}
Distearyl phosphate	5	1.1×10^{-2}	Stearic acid	2	1.4×10^{-2}
			Paraffin wax 140°C	1—2	1.8×10^{-2}
			Lanoline fatty acid	3	1.6×10^{-2}
			Candelilla wax	3—4	1.6×10^{-2}

Thus, as different from ordinary oils, dialkyl phosphates can impart very specific water repellency and smoothness to cosmetic powders.

Example 4

Sericite (Sericite FSE; manufactured by Sanshin Koko K.K.) which was coated with 7% of distearyl phosphate in the same manner as in Example 1 (hereinafter referred to as sample (A)) was used to make a pressed face powder having the following formulation. Formulation of Face Powder (Formulation 1):

Magnesium stearate	1.2(%)
Liquid paraffin	3.0
Silicone oil	2.0

EP 0 154 150 B1

	Titanium oxide	1.5
	Red iron oxide	0.15
5	Yellow iron oxide	0.1
	Black iron oxide	0.01
10	Perfume	0.5
	Sample (A)	91.54

15 This face powder was used by 10 female panelers in ordinary manner and was evaluated with respect to spreadability on the skin, smoothness, softness and compatibility with the skin. For comparison, formulation 1 was also prepared using non-treated sericite (Formulation 2). The results are shown in Table 4 below.

TABLE 4

20	Formulation No.	Spreadability	Smoothness	Softness	Compatibility
	1	9	10	9	10
25	2	1	0	1	0

Example 5

30 Sericite (Sericite SL; manufactured by Horie Kako K.K.) which was coated with 10% of dipalmityl phosphate as in Example 3 (hereinafter referred to as sample (B)) was used to prepare a powder foundation according to the following formulation.

Formulation of Powder Foundation (Formulation 3):

35	Liquid paraffin	5.0(%)
	Lanolin	2.0
40	Isopropyl myristate	1.0
	Titanium oxide	7.0
	Red iron oxide	0.8
45	Yellow iron oxide	1.0
	Black iron oxide	0.07
50	Perfume	0.3
	Sample (B)	82.83

55 The powder foundation was organoleptically evaluated by 20 female panelers. For comparison, formulation (3) was prepared using non-treated sericite instead of sample (B) (formulation 4) and, instead of sample (B), sericite coated with 2% methylhydrogen siloxane ordinarily used for these purposes (formulation 5).

The results are shown in Fig. 1, in which o—o indicates formulation 3, Δ—Δ indicates formulation 4 and x—x indicates formulation 5.

Example 6

60 Commercially available titanium dioxide-coated mica (Coloron light blue, by Merck & Inc.) was provided as a cosmetic powder and coated with 10% of dipalmityl phosphate according to the procedure of Example 1 (sample (C)). The sample (C) was used to make an eye shadow on the pressed powder type
65 having the following formulation. The compression pressure used was 30 bar (Kg/cm²).

EP 0 154 150 B1

Formulation of eye shadow (Formulation 6):

Sample (C)	99.7%
Perfume	0.3

For comparison, non-treated titanium dioxide-coated mica was used to make the pressed powder-type eye shadow (formulation 7), but press molding was impossible.

Formulation 7:	Titanium dioxide-coated mica (coloron light blue)	69.7—94.7(%)
	Squalane	5—30
	Perfume	0.3

Example 7

75 g (or 30 g, 150 g) of dicetyl phosphate and 3000 g of n-hexan were placed in a kneader (manufactured by Satake Kagaku Kikai K.K.), and heated to 60°C while kneading, to which 1500 g of sericite SL (manufactured by Horie Kako K.K., acidic point= 2.5×10^{-5} mol/g for H_0 of +1.2 or less, and acidic point= 2.6×10^{-5} mol/g for H_0 of +3.3 or less) was charged and mixed for 4 hours at 60°C. Thereafter, the n-hexan was distilled off at 50 to 60°C under reduced pressure for 2 hours. The resulting powder was dried to obtain 1560 g (or 1520 g, 1630 g) of dried powder.

Example 8

The process of Example 7 was followed using 75 g (or 30 g) of distearyl phosphate, 1500 g of n-hexan and 1500 g of sericite SP (manufactured by Horie Kako K.K., acidic point= 2.5×10^{-5} mol/g for H_0 of +1.2 or less, and acidic point= 2.5×10^{-5} mol/g for H_0 of +3.3 or less), thereby obtained 1565 g (or 1530 g) of a powder.

Example 9

The process of Example 7 was followed using 75 g (or 30 g) of dicetyl phosphate, 3000 g of n-hexan and sericite SL which was previously mixed with water (manufactured by Horie Kako K.K., water content in a dried state=0.7 wt%), thereby obtained 1560 g (or 1520 g) of a powder.

Example 10

Powder obtained in Examples 7, 8 and 9 were tested to determine water repellency and resistance to abrasion which is an index to smoothness of powder, according to the methods of Examples 1 and 2. The results are shown in Table 5.

TABLE 5

Tested material	Dialkyl phosphate* (wt%)	Water repellency	Friction factor
Sericite SL	—	0	1.8×10^{-2}
Talc	—	1	1.7×10^{-2}
Powder of example 7	2	4	1.2×10^{-2}
	5	4—5	1.0×10^{-2}
	10	5	1.1×10^{-2}
Powder of example 8	2	4	1.1×10^{-2}
	5	5—5	1.1×10^{-2}
Powder of example 9	2	4—5	1.2×10^{-2}
	5	5	1.0×10^{-2}

* Treating amount of dialkyl phosphate to amount to clay minerals (wt%)

EP 0 154 150 B1

As will be seen from the data of Example 10, inorganic powders which are surface-treated according to Examples 7 to 9 exhibit excellent water repellency and feel of smoothness, and thus are useful as a cosmetic powder.

Claims

1. A make-up cosmetic or a body cosmetic of improved water repellence and improved softness to the skin, which comprises:

a cosmetic powder selected from particles of inorganic loading pigments and composite pigments, said cosmetic powder particles being coated by an amount of from 0.1 to 50 % by weight of a dialkyl phosphate of the formula:



wherein R_4 and R_5 independently each represent a linear alkyl group having from 14 to 22 carbon atoms.

2. The cosmetic according to Claim 1, wherein said cosmetic powder is an inorganic powder selected from talc, sericite, mica, kaolin, ilite, acidic terra alba, bentonite, titanium, dioxide-coated mica and iron oxide-coated mica.

3. The cosmetic according to Claim 1, wherein said linear alkyl group is myristyl, cetyl, stearyl or behenyl.

4. The cosmetic according to Claim 1, wherein the amount of said dialkyl phosphate employed ranges from 2 to 20 % by weight.

5. A make-up cosmetic or a body cosmetic of improved water repellence and improved softness to the skin, which comprises:

a cosmetic powder selected from particles of inorganic loading pigments and composite pigments, said cosmetic powder particles being coated by an amount of from 0.1 to 50 wt% of a dialkyl phosphate of the formula:



wherein R_4 and R_5 independently each represents a linear alkyl group having from 14 to 22 carbon atoms, wherein coating of said dialkyl phosphate on said cosmetic powder particles is effected by adding said cosmetic powder particles to an organic solvent solution of a dialkyl phosphate and removing said organic solvent by distillation.

6. The cosmetic according to Claim 5, wherein said organic solvent is selected from hexane, benzene, toluene, and acetone.

7. A method of improving water repellence and softness to the skin of a cosmetic powder selected from particles of inorganic loading pigments and composite pigments, which comprises coating said cosmetic powder particles by an amount of from 0.1 to 50 % by weight of a dialkyl phosphate of the formula:



wherein R_4 and R_5 independently each represent a linear alkyl group having from 14 to 22 carbon atoms.

8. The method according to Claim 7, wherein coating of said dialkyl phosphate on said cosmetic powder particles is effected by adding said cosmetic powder particles to an organic solvent solution of a dialkyl phosphate and removing said organic solvent by distillation.

Patentansprüche


1. Make-up-Kosmetikum oder Körperkosmetikum mit verbessertem Wasserabstoßungsvermögen und verbesserter Weichheit gegenüber der Haut umfassend:

ein kosmetisches Pulver, ausgewählt aus Teilchen von anorganischen Füllpigmenten und

EP 0 154 150 B1

Kompositpigmenten, wobei die kosmetischen Pulverteilchen beschichtet sind mit einer Menge von 0,1 bis 50 Gew.-% eines Dialkylphosphats der Formel

5



(I)

10 wobei R_4 und R_5 unabhängig jeweils eine lineare Alkylgruppe mit 14 bis 22 Kohlenstoffatomen darstellen.
2. Kosmetikum gemäß Anspruch 1, wobei das kosmetische Pulver ein anorganisches Pulver ist, ausgewählt aus Talkum, Serizit, Glimmer, Kaolin, Illit, saurer Terra alba, Bentonit, Titandioxid-beschichtetem Glimmer und Eisenoxid-beschichtetem Glimmer.


15 3. Kosmetikum gemäß Anspruch 1, wobei die lineare Alkylgruppe Myristyl, Cetyl, Stearyl oder Behenyl ist.

4. Kosmetikum gemäß Anspruch 1, wobei die Menge des eingesetzten Dialkylphosphats im Bereich von 2 bis 20 Gew.-% liegt.

5. Make-up-Kosmetikum oder Körperkosmetikum mit verbessertem Wasserabstoßungsvermögen und verbesserter Weichheit gegenüber der Haut, umfassend:

20 ein kosmetisches Pulver ausgewählt aus Teilchen von anorganischen Füllpigmenten und Kompositpigmenten, wobei die kosmetischen Pulverteilchen beschichtet sind mit einer Menge von 0,1 bis 50 Gew.-% eines Dialkylphosphats der Formel

25




(I)

30 wobei R_4 und R_5 unabhängig jeweils eine lineare Alkylgruppe mit 14 bis 22 Kohlenstoffatomen darstellen, wobei das Aufbringen des Dialkylphosphats auf die kosmetischen Pulverteilchen durchgeführt wird, indem man die kosmetischen Pulverteilchen zu einer Lösung eines Dialkylphosphats in einem organischen Lösungsmittel gibt und das organische Lösungsmittel durch Destillation entfernt.

35 6. Kosmetikum gemäß Anspruch 5, wobei das organische Lösungsmittel ausgewählt ist aus Hexan, Benzol, Toluol und Aceton.

7. Verfahren zur Verbesserung des Wasserabstoßungsvermögens und der Weichheit gegenüber der Haut eines kosmetischen Pulvers, ausgewählt aus Teilchen von anorganischen Füllpigmenten und Kompositpigmenten, umfassend die Beschichtung der kosmetischen Pulverteilchen mit einer Menge von 0,1 bis 50 Gew.-% eines Dialkylphosphats der Formel

40



(I)

45

wobei R_4 und R_5 unabhängig jeweils eine lineare Alkylgruppe mit 14 bis 22 Kohlenstoffatomen darstellen.


50 8. Verfahren gemäß Anspruch 7, wobei das Aufbringen des Dialkylphosphats auf die kosmetischen Pulverteilchen durchgeführt wird, indem man die kosmetischen Pulverteilchen zu einer Lösung eines Dialkylphosphats in einem organischen Lösungsmittel gibt und das organische Lösungsmittel durch Destillation entfernt.

Revendications

55 1. Produit cosmétique de maquillage ou produit cosmétique pour le corps, présentant une hydrophobicité améliorée et une douceur pour la peau améliorée, qui comprend:

une poudre cosmétique choisie parmi les particules de pigments de charge minéraux et de pigments composites, lesdites particules de poudre cosmétique étant enrobées d'une quantité allant de 0,1 à 50% en poids d'un phosphate de dialkyle de formule:

60



(I)

65

EP 0 154 150 B1

dans laquelle R_4 et R_5 représentent chacun indépendamment un groupe alkyle linéaire ayant de 14 à 22 atomes de carbone.

2. Produit cosmétique selon la revendication 1, dans lequel ladite poudre cosmétique est une poudre minérale choisie parmi le talc, la séricite, le mica, le kaolin, l'illite, l'argile blanche acide, la bentonite, le mica enrobé de dioxyde de titane et le mica enrobé d'oxyde de fer.

3. Produit cosmétique selon la revendication 1, dans lequel ledit groupe alkyle linéaire est le groupe myristyle, cétyle, stéaryle ou béhényle.

4. Produit cosmétique selon la revendication 1, dans lequel la quantité dudit phosphate de dialkyle employé se situe dans la plage de 2 à 20% en poids.

5. Produit cosmétique de maquillage ou produit cosmétique pour le corps, présentant une hydrophobicité améliorée et une douceur pour la peau améliorée, qui comprend:

une poudre cosmétique choisie parmi les particules de pigments de charge minéraux et de pigments composites, lesdites particules de poudre cosmétique étant enrobées d'une quantité allant de 0,1 à 50% en poids d'un phosphate de dialkyle de formule:



dans laquelle R_4 et R_5 représentent chacun indépendamment un groupe alkyle linéaire ayant de 14 à 22 atomes de carbone,

l'enrobage par ledit phosphate de dialkyle desdites particules de poudre cosmétique étant effectué par addition desdites particules de poudre cosmétique à une solution, dans un solvant organique, d'un phosphate de dialkyle et par élimination dudit solvant organique par distillation.

6. Produit cosmétique selon la revendication 5, dans lequel ledit solvant organique est choisi parmi l'hexane, le benzène, le toluène et l'acétone.


7. Procédé d'amélioration de l'hydrophobicité et de la douceur sur la peau d'une poudre cosmétique choisie parmi les particules de pigments de charge minéraux et de pigments composites, qui comprend l'enrobage desdites particules de poudre cosmétique d'une quantité allant de 0,1 à 50% en poids d'un phosphate de dialkyle de formule:



dans laquelle R_4 et R_5 représentent chacun indépendamment un groupe alkyl linéaire ayant de 14 à 22 atomes de carbone.

8. Procédé selon la revendication 7, dans lequel l'enrobage par ledit phosphate de dialkyle desdites particules de poudre cosmétique est effectué par addition desdites particules de poudre cosmétique à une solution, dans un solvant organique, d'un phosphate de dialkyle et par élimination dudit solvant organique par distillation.

FIGURE

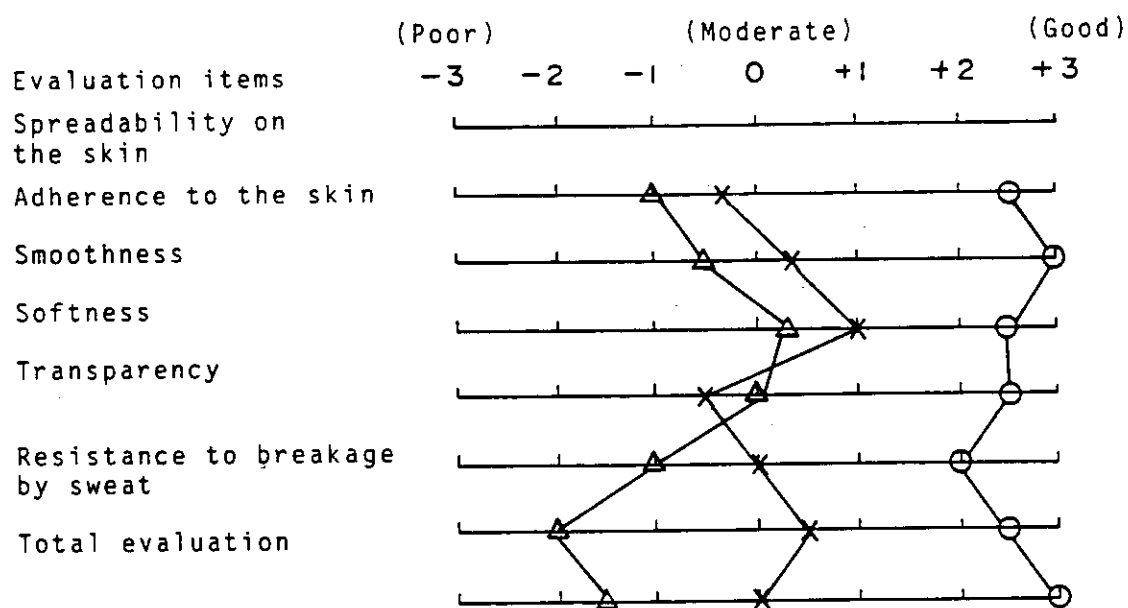

REGISTER ENTRY FOR EP0154150

European Application No EP85100834.2 filing date 28.01.1985

Priority claimed:

06.02.1984 in Japan - doc: 15197698

Designated States DE FR GB IT

Title COSMETICS

Applicant/Proprietor

KAO CORPORATION, 14-10, Nihonbashi Kayabacho 1-chome, Chuo-Ku Tokyo 103,
Japan [ADP No. 504178640011]

Inventors

JUNICHI FUKASAWA, 4-16, Nobamachi Kounan-ku, Yokohama-shi Kanagawa-ken,
Japan [ADP No. 535135780011]

HARUYA KATO, 1-1-3, Kouyadai, Funabashi-shi Chiba-ken, Japan
[ADP No. 535135860011]

KATSUMASA IWAYA, 3-1-6, Jotou, Oyama-shi Tochigi-ken, Japan
[ADP No. 535135940011]

TAKAKO SHIMIZU, 2-16-2, Higashiyotsugi, Katsushika-ku Tokyo, Japan
[ADP No. 535136020011]

ATSUSHI KAWANO, 1-26-5, Nakashizu, Sakura-shi Chiba-ken, Japan
[ADP No. 535136100011]

Classified to

A5B
A61K

Address for Service

F J CLEVELAND & CO, 40-43 Chancery Lane, London, WC2A 1JQ, United Kingdom
[ADP No. 000001410011]

EPO Representative

DR. GÜNTER WACHTERSCHAUER, Tal 29, D-8000 München 2, Federal Republic of
Germany [ADP No. 502058710011]

Publication No EP0154150 dated 11.09.1985

Publication in English

Examination requested 28.01.1985

Patent Granted with effect from 13.06.1990 (Section 25(1)) with title
COSMETICS.

23.07.1986 EPO: Search report published on 23.07.1986

Entry Type 25.11 Staff ID.

Auth ID. EPT

20.02.1990 F J CLEVELAND & CO, 40-43 Chancery Lane, London, WC2H 1JL, United
Kingdom [ADP No. 00000141001] ✓
registered as address for service
Entry Type 8.11 Staff ID. CT1 Auth ID. AA