



(51) International Patent Classification:

H01L 31/18 (2006.01) *H01L 31/0288* (2006.01)
H01L 31/09 (2006.01)

(21) International Application Number:

PCT/US2015/042250

(22) International Filing Date:

27 July 2015 (27.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HEWLETT PACKARD ENTERPRISE DEVELOPMENT LP** [US/US]; 11445 Compaq Center Drive West, Houston, TX 77070 (US).

(72) Inventors: **HUANG, Zhihong**; 1501 Page Mill Rd., Palo Alto, CA 94304-1100 (US). **BEAUSOLEIL, Raymond, G.**; 1501 Page Mill Rd., Palo Alto, CA 94304-1100 (US).

(74) Agent: **WOODWORTH, Jeffrey, C**; Hewlett Packard Enterprise, 3404 E. Harmony Road, Mail Stop 79, Fort Collins, CO 80528 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

[Continued on next page]

(54) Title: DOPED ABSORPTION DEVICES

FIG. 1

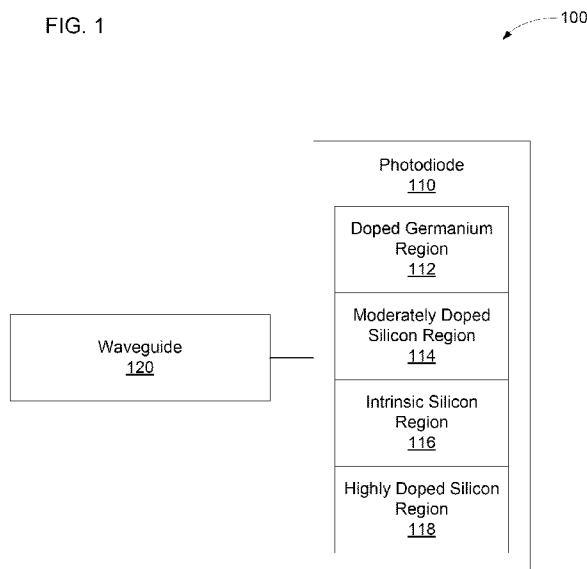

(57) Abstract: An example device includes a doped absorption region to receive optical energy and generate free electrons from the received optical energy. The example device also includes a doped charge region to increase an electric field. The example device also includes an intrinsic multiplication region to generate additional free electrons from impact ionization of the generated free electrons. The example device includes a doped contact region to conduct the free electrons and the additional free electrons.

WO 2017/019013 A1



Published:

— *with international search report (Art. 21(3))*

DOPED ABSORPTION DEVICES

BACKGROUND

[0001] Photonics are increasingly used to communicate information. For example, photonics may be used for telecommunication over long distances or may be used to communicate within circuits, computers, server farms, and the like. Photodiodes may be used in photonic systems to detect optical signals. The photodiodes may convert a received optical signal into an electrical signal that can be further processed to extract the communicated information.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] Figure 1 is a block diagram of an example of a system to detect optical energy.

[0003] Figure 2 is a schematic diagram of a cross-section of another example of a system to detect optical energy.

[0004] Figure 3 is a schematic diagram of a cross-section of another example of a system to detect optical energy.

[0005] Figure 4 is a flow diagram of an example of a method to create a photodiode to detect optical energy.

[0006] Figure 5 is a flow diagram of another example of a method to create a photodiode to detect optical energy.

[0007] Figure 6 is a block diagram of an example of a device to detect optical energy.

[0008] Figure 7 is a schematic diagram of a cross-section of another example of a device to detect optical energy.

[0009] Figure 8 is a schematic diagram of a cross-section of another example of a device to detect optical energy.

DETAILED DESCRIPTION

[0010] A photodiode may convert optical signals into electrical signals by absorbing optical energy (e.g., photons) and moving electrons to a conduction band in response to absorbing the optical energy. The electrons in the conduction band are free electrons able to travel through the photodiode in response to an electric field. The photodiode may internally amplify the electrical signal by

accelerating the electrons until they free additional electrons through impact ionization. The amplified electrical signal may be output by the photodiode.

[0011] The photodiode may include different materials to perform the different functions of the photodiode. For example, germanium is good at absorbing optical energy at the wavelengths typically used for optical communication. However, germanium has an impact ionization ratio (i.e., a k value) near 1, so similar amounts of electrons and holes are generated by impact ionization. As holes are usually slower than electrons, the high impact ionization ratio will reduce a photodiode's speed and gain-bandwidth product. In contrast, silicon has an impact ionization ratio of approximately 0.02, so many more electrons than holes are generated by impact ionization. Accordingly, a silicon photodiode will have a high speed and high gain-bandwidth product. However, silicon is poor at absorbing optical energy at the wavelengths typically used for optical communication.

[0012] In one example, a photodiode may include an absorption region made of germanium to absorb optical energy and generate free electrons from the absorbed optical energy. The photodiode may include a charge region made of silicon. The charge region may include an increasing electric field as the distance from the absorption region increases. The photodiode may also include a multiplication region made of silicon to generate additional free electrons from impact ionization. The increasing electric field in the charge region may allow there to be a large electric field in the multiplication region and small electric field in the absorption region. The absorption region may include germanium to take advantage of the absorption characteristics of germanium, and the multiplication region may include silicon to take advantage of the impact ionization characteristics of silicon. Other examples may include materials other than germanium and silicon in the absorption, charge, and multiplication regions, and the materials for each region may be selected based on which material characteristics are most advantageous for each region.

[0013] The absorption region of the photodiode may be made of intrinsic germanium. The intrinsic germanium may include a constant electric field that moves the free electrons to the charge region. However, the magnitude of the electric field in the germanium may be very sensitive to the thickness and doping

concentration of the charge region. If the charge region is too thin or is underdoped, there will be a strong electric field throughout the absorption region. The strong electric field will cause a significant amount of impact ionization in the germanium. The ratio of hole impact ionization rate to electron impact ionization rate is much higher in germanium than silicon, so more holes will be generated when the impact ionization occurs in the germanium. Because holes travel slower than electrons, the strong electric field will result in the bandwidth of the device being smaller than if the impact ionization occurred in silicon. If the charge region is too thick or is overdoped, there will be a weak electric field in the absorption region. Free electrons will travel to the charge region slowly, so the bandwidth will be smaller than if the charge region had an ideal doping concentration and an ideal thickness. [0014] Similarly, as a bias applied to the photodiode is increased, it will cause the amount of impact ionization occurring in the germanium to increase. As a result, the bandwidth of the photodiode decreases significantly at higher biases. For example, the gain and bandwidth may track a constant gain-bandwidth product until the increasing impact ionization in the germanium causes the gain-bandwidth product to drop significantly for gains above a particular threshold. Above the particular threshold, the electric field in the germanium may be large enough to cause a significant amount of impact ionization in the germanium. Accordingly, there is a need for a photodiode that can maintain a large bandwidth at higher gains and that can deliver a large bandwidth and high gain over a wide range of charge layer doping concentrations and thicknesses.

[0015] Figure 1 is a block diagram of an example of a system 100 to detect optical energy. The system 100 may include a photodiode 110 to convert an optical signal into electrical signal and amplify the electrical signal. The system 100 may also include a waveguide 120 electromagnetically coupled to the photodiode 110. The waveguide 120 may receive an optical signal and transfer it to the photodiode 110 so that the photodiode 110 can convert the optical signal into an electrical signal. The photodiode 110 may include a doped germanium region 112. As used herein, the term "region" refers to a portion of the photodiode 110 or other device occupied by a particular material. For example, the doped germanium region 112 may be an at least moderately doped germanium region (e.g., a moderately or highly doped

germanium region.) As used herein, the term "moderately doped" refers to a semiconductor having a concentration of doped atoms between about 5×10^{16} atoms/cm³ and about 5×10^{18} atoms/cm³. As used herein, the term "highly doped" refers to a semiconductor having a concentration of doped atoms of at least about 1×10^{18} atoms per centimeter³ (atoms/cm³). As used herein, the term "about" a particular value refers to numbers that are equal to the particular value when rounded to the least significant digit of the particular value.

[0016] The photodiode 110 may include a moderately doped silicon region 114 in direct contact with the doped germanium region 112. The photodiode 110 may include an intrinsic silicon region 116 in direct contact with the moderately doped silicon region 114. As used herein, the term "intrinsic" refers to a semiconductor having a concentration of doped atoms of at most about 5×10^{16} atoms/cm³. The photodiode 110 may include a highly doped silicon region 118 in direct contact with the intrinsic silicon region 116.

[0017] An electric field in the doped germanium region 112 may increase slowly as the distance to the moderately doped silicon region 114 decreases (e.g., an electric field resulting when a reverse bias is applied to the photodiode 110). The electric field may increase rapidly in the moderately doped silicon region 114 as the distance to the intrinsic silicon region 116 decreases. The electric field may be approximately constant in the intrinsic silicon region 116. The electric field may decrease rapidly in the highly doped silicon region 118 as the distance from the intrinsic silicon region 116 increases.

[0018] The sloped electric field in the doped germanium region 112 may prevent the entirety of the doped germanium region 112 from experiencing a strong electric field that causes significant impact ionization even if a portion of the doped germanium region 112 is experiencing such an electric field. As a result, the photodiode 110 may be able to operate at higher gains and with greater variation in the doping concentration and thickness of the moderately doped silicon layer 114 without suffering too much impact ionization in the germanium and a corresponding decrease in speed and gain-bandwidth product. In addition, the doped germanium region 112 may have a short lifetime for free holes, so electrons may be the uni-traveling carrier through the photodiode 110. Because electrons

travel more quickly than holes, having electrons as the uni-traveling carriers also improves the speed and gain-bandwidth product of the photodiode 110. In addition, the electron impact ionization coefficient in silicon is much higher than the hole impact ionization coefficient, so having electrons as the uni-traveling carriers makes impact ionization more efficient in the intrinsic silicon region 116. The doping concentration of the doped germanium region 112 may be selected to be low enough to allow for the complete depletion of the doped germanium region 112 while being high enough to limit the amount of impact ionization occurring in the doped germanium region 112 when a portion is experiencing a strong electric field.

[0019] The moderately doped silicon region 114 may be at least moderately doped to prevent a strong electric field from extending into the doped germanium region 112. The slope of the electric field may be proportional to the doping concentration, so the intrinsic silicon region 116 can have a strong electric field while the doped germanium region 112 has a weak electric field by at least moderately doping the moderately doped silicon region 114. Accordingly, impact ionization can be maximized in the intrinsic silicon region 116 and minimized in the doped germanium region 112.

[0020] Figure 2 is a schematic diagram of a cross-section of another example of a system 200 to detect optical energy. The system 200 may include a photodiode 210 (e.g., an avalanche photodiode) coupled to a waveguide 220. The photodiode 210 may include a doped germanium region 212, a moderately doped silicon region 214, an intrinsic silicon region 216, and a highly doped silicon region 218. The waveguide 220 may receive an optical signal, for example from a grating coupler (not shown), and direct the optical signal to the photodiode 210. The waveguide 220 may include intrinsic silicon in an example. The waveguide 220 may be in direct contact with the highly doped silicon region 218 and the intrinsic silicon region 216. The waveguide 220 may have a length between about 4 micrometers (μm) and about 100 μm . The waveguide may have a width between about 500 nanometers (nm) and about 10 μm . In Figure 2, the waveguide length is measured along the horizontal dimension across the page, and the waveguide width is measured along the dimension into and out of the page (i.e., the dimension perpendicular to the page).

[0021] The optical signal may be evanescently coupled to the doped germanium region 212 (i.e., an absorption region) and cause absorption of the optical energy by the doped germanium region 212. The absorbed optical energy may excite electrons to a conduction band (i.e., generate free electrons). In an example, the doped germanium region 212 may have a p-type doping concentration of at least about 5×10^{18} atoms/cm³ (e.g., a p-type doping concentration between about 5×10^{18} atoms/cm³ and about 5×10^{19} atoms/cm³, a p-type doping concentration between about 5×10^{18} atoms/cm³ and about 1×10^{19} atoms/cm³, or the like). The doped germanium region 212 may have a thickness between about 50 nm and about 2 μ m. In Figure 2, the thicknesses of the regions 212, 214, 216, 218 are measured along the vertical dimension between the top and bottom of the page.

[0022] The moderately doped silicon region 214 (i.e., a charge region) may accelerate the free electrons. The electric field may increase with a steep slope between the interface with the doped germanium region 212 and the interface with the intrinsic silicon region 216. The drift velocity of the free electrons may increase until reaching a saturation velocity of the moderately doped silicon region 214. In an example, the moderately doped silicon region 214 may have a p-type doping concentration of at least about 2×10^{17} atoms/cm³ (e.g., a p-type doping concentration between about 2×10^{17} atoms/cm³ and about 2×10^{18} atoms/cm³ or the like). The moderately doped silicon region 214 may have a thickness between about 20 nm and about 100 nm.

[0023] The intrinsic silicon region 216 (i.e., a multiplication region) may amplify the number of free electrons. For example, the intrinsic silicon region 216 may generate additional free electrons from impact ionization of the accelerated free electrons. The additional free electrons may generate still more electrons through impact ionization of the additional free electrons. Thus, the intrinsic silicon region 216 may multiply the number of free electrons. The intrinsic silicon region 216 may accelerate some of the free electrons or the additional free electrons to cause the impact ionization. In addition, some impact ionization may occur in the moderately doped silicon region 214. In an example, the intrinsic silicon region 216 may have a p-type doping concentration no greater than about 2×10^{16} atoms/cm³ (e.g., a p-type doping concentration between about 1×10^{15} atoms/cm³ and about 2×10^{16}

atoms/cm³ or the like). The intrinsic silicon region 216 may have a thickness between about 50 nm and about 1000 nm.

[0024] The highly doped silicon region 218 (i.e., a contacting region) may conduct the free electrons generated by absorption and the free electrons generated by impact ionization. For example, the highly doped silicon region 218 may conduct the electrons to other devices or circuitry, to a metal contact, to an output terminal, or the like. In an example, the highly doped silicon region 218 may have a doping concentration of at least about 1×10^{20} atoms/cm³. The highly doped silicon region may have a thickness between about 200 nm and about 2 μ m.

[0025] Figure 3 is a schematic diagram of a cross-section of another example of a system 300 to detect optical energy. The system 300 may include an optical fiber 320 electromagnetically coupled to a photodiode 310. The photodiode 310 may include a doped germanium region 312, a moderately doped silicon region 314, an intrinsic silicon region 316, and a highly doped silicon region 318. The optical fiber 320 may be in direct contact with the doped germanium region 312 or may direct an optical signal towards the doped germanium region 312. For example, there may be silicon dioxide between the optical fiber 320 and the doped germanium region 312. The silicon dioxide may be transparent at the frequencies of the optical signal, so the optical signal may suffer minimal loss before reaching the doped germanium region 312.

[0026] The doped germanium region 312 may absorb the optical energy and excite electrons to a conduction band (i.e., generate free electrons) from the absorbed optical energy. The free electrons may travel to the moderately doped silicon region 314. The moderately doped silicon region 314 may accelerate the free electrons towards the intrinsic silicon region 316. The intrinsic silicon region 316 may excite additional electrons to the conduction band (i.e., generate additional free electrons) from impact ionization of the accelerated free electrons. The electrons generated from absorption and the electrons generated by impact ionization may be conducted away by the highly doped silicon region 318.

[0027] Figure 4 is a flow diagram of an example of a method 400 to create a photodiode to detect optical energy. Block 402 may include forming an n-type silicon layer on a substrate. The n-type silicon layer may be formed by depositing

silicon and implanting an n-type dopant (e.g., phosphorus, arsenic, antimony, or the like) in the silicon, by providing a wafer including a layer of silicon and implanting an n-type dopant in the layer of silicon, or the like. As used herein, the term "layer" refers to a region covering or being covered by another region. For example, the n-type silicon layer may be the highly doped silicon region 218 of Figure 2.

[0028] Block 404 may include forming an intrinsic silicon layer on the n-type silicon layer. For example, the intrinsic silicon layer may be formed by depositing the intrinsic silicon on the n-type silicon layer or counter doping p-type doped silicon to form intrinsic silicon. The intrinsic silicon layer may include a small amount of doping (e.g., a small amount of p-type doping or n-type doping). In one example, the intrinsic silicon layer may be the intrinsic silicon region 216 of Figure 2. Block 406 may include forming a p-type silicon layer on the intrinsic silicon layer. The p-type silicon layer may be formed by depositing silicon and implanting a p-type dopant (e.g., boron, aluminum, gallium, etc.) in the silicon. In one example, the intrinsic silicon layer and the p-type silicon layer may be formed by a single deposition of silicon followed by implanting of the p-type dopant in a top portion of the deposited silicon. Referring to Figure 2, the p-type silicon layer may be the moderately doped silicon region 214 in an example.

[0029] At block 408, the method 400 may include forming a p-type germanium layer in direct contact with the p-type silicon layer. In some examples, the p-type germanium layer may be moderately or highly doped. The p-type germanium layer may be formed by depositing germanium and implanting a p-type dopant in the germanium. For example, the p-type germanium layer may be the doped germanium region 212 of Figure 2.

[0030] Figure 5 is a flow diagram of another example of a method 500 to create a photodiode to detect optical energy. At block 502, the method 500 may include providing a substrate. For example, the substrate may be a silicon on insulator wafer, a silicon dioxide wafer, a region of silicon dioxide formed on a silicon wafer (e.g., grown on the silicon wafer), or the like. In one example, the substrate may be the silicon dioxide buried oxide shown in Figure 8. Block 504 may include forming an n-type silicon layer on the substrate. The n-type silicon layer may be highly doped (e.g., with a doping concentration of at least about 1×10^{20} atoms/cm³)

and have a thickness between about 200 nm and about 2 μm . For example, the n-type silicon layer may be the doped contact region 818 of Figure 8.

[0031] Block 506 may include forming an intrinsic silicon layer on the n-type silicon layer. The intrinsic silicon layer may have a p-type doping concentration no greater than about 2×10^{16} atoms/cm³ and a thickness between about 50 nm and about 1000 nm. Referring to Figure 8, the intrinsic silicon layer may be, for example, the intrinsic multiplication region 816. Block 508 may include forming a moderately doped p-type silicon layer on the intrinsic silicon layer. The moderately doped p-type silicon layer may be formed by depositing silicon and implanting p-type dopants in the deposited silicon, by implanting p-type dopants in the top portion of intrinsic silicon layer, or the like. The moderately doped p-type silicon layer may have a p-type doping concentration between about 2×10^{17} atoms/cm³ and about 2×10^{18} atoms/cm³ and a thickness between about 20 nm and about 100 nm. In one example, the moderately doped p-type silicon layer may be the doped charge region 814 of Figure 8.

[0032] At block 510, the method 500 may include forming a lightly doped p-type layer on the moderately doped p-type silicon layer. As used herein, the term "lightly doped" refers to a semiconductor with a concentration of doped atoms no greater than about 2×10^{17} atoms/cm³. The lightly doped p-type layer may include at least one of silicon and germanium. For example, the lightly doped p-type layer may include silicon and no germanium, germanium and no silicon, or both silicon and germanium. The lightly doped p-type layer may be formed by depositing silicon or germanium on the moderately doped p-type silicon layer. The lightly doped p-type layer may be intrinsic or may include a small amount of doping. The lightly doped p-type layer may have a p-type doping concentration no greater than about 5×10^{17} atoms/cm³ (e.g., a p-type doping concentration between about 1×10^{15} atoms/cm³ and about 5×10^{17} atoms/cm³ or the like). The lightly doped p-type layer may have a thickness between about 20 nm and about 50 nm. For example, the lightly doped p-type layer may be the buffer region 813 of Figure 8.

[0033] Block 512 may include forming a p-type germanium layer in direct contact with the lightly doped p-type layer. The p-type germanium layer may have a sloped electric field that prevents a strong electric field from causing impact ionization

throughout the p-type doped germanium layer. The lightly doped p-type layer may impede a strong electric field from extending into the p-type germanium layer to further prevent impact ionization from occurring in the p-type doped germanium layer. The p-type germanium layer may have a p-type doping concentration of at least about 5×10^{18} atoms/cm³ and a thickness between about 50 nm and about 2 μ m. In one example, the p-type germanium layer may be the doped absorption region 812 of Figure 8.

[0034] Figure 6 is a block diagram of an example of a device 600 to detect optical energy. The device 600 may include a doped absorption region 612 to receive optical energy and generate free electrons from the received optical energy. For example, the optical energy may be absorbed to excite electrons to a conduction band. The doped absorption region 612 may be at least moderately doped. The doped absorption region 612 may include germanium; a compound semiconductor that includes combination of indium, gallium, or arsenic; a group 13 element; a group 15 element; or the like. The doped absorption region 612 may include p-type or n-type doping.

[0035] A doped charge region 614 may increase an electric field as the distance from the doped absorption region increases. The increasing electric field in the doped charge region 614 may increase a drift velocity of the free electrons until they reach a saturation velocity. The doped charge region 614 may also prevent a strong electric field from extending into the doped absorption region 612. The doped charge region 614 may be at least moderately doped. The doped charge region 614 may include silicon; a combination of indium, gallium, arsenic, aluminum, or phosphorous; a group 13 element; a group 15 element; or the like. The doped charge region 614 may include p-type or n-type doping. The doped charge region 614 may have the same doping as the doped absorption region 612.

[0036] The device 600 may also include an intrinsic multiplication region 616 to generate additional free electrons from impact ionization of the generated free electrons. The intrinsic multiplication region may include a strong electric field that accelerates the free electrons generated from the impact ionization to cause additional impact ionization and free still more electrons. The intrinsic multiplication

region 616 may include silicon; a combination of indium, gallium, arsenic, or phosphorous; a group 13 element; a group 15 element; or the like.

[0037] The device 600 may include a doped contact region 618 to conduct away the free electrons generated from absorption and the additional free electrons generated from impact ionization. The doped contact region 618 may also provide electrons for depleting the doped absorption region 612, the doped charge region 614, and the intrinsic multiplication region 616. The doped contact region 618 may be at least moderately doped. The doped contact region 618 may include silicon; a combination of indium, gallium, arsenic, or phosphorous; a group 13 element; a group 15 element; or the like. The doped contact region 618 may include n-type or p-type doping. In some examples, the doped contact region 618 may have the opposite doping of the doped absorption region 612 or the doped charge region 614. In various examples, the device 600 may include a waveguide and be built on a silicon on insulator substrate, may be a normal incidence device built on a bulk silicon substrate, may be a backside illuminated device built on a bulk silicon substrate, or the like.

[0038] Figure 7 is a schematic diagram of a cross-section of another example of a device 700 to detect optical energy. The device 700 may include a doped absorption region 712. The doped absorption region 712 may absorb optical energy 720 incident on the doped absorption region 712 and generate free electrons from the absorbed optical energy. The optical energy 720 may pass through silicon dioxide or another material transparent to the optical energy 720 before impinging on the doped absorption region 712. The doped absorption region 712 may be formed as a ring having a diameter between about 10 μm and about 100 μm and a thickness between about 50 nm and about 2 μm . In Figure 7, the thicknesses of the regions 712, 713, 714, 716, 718 are measured along the vertical dimension between the top and bottom of the page, and the diameter may be measured in a direction perpendicular to the vertical dimension. The doped absorption region 712 may be at least moderately doped. In one example, the doped absorption region 712 may include germanium and may have a p-type doping concentration between about 5×10^{18} atoms/cm³ and about 5×10^{19} atoms/cm³.

[0039] The device 700 may include a buffer region 713 in direct contact with the doped absorption region 712 and in direct contact with a doped charge region 714. The buffer region 713 may impede a strong electric field from extending into the doped absorption region 712. For example, an electric field in the doped charge region 714 may decrease as the distance to the buffer region 713 decreases (e.g., an electric field resulting when a reverse bias is applied to the device 700). The electric field may further decrease in the buffer region 713 as the distance to the doped absorption region 712 decreases. Accordingly, the additional decrease in the electric field caused by the buffer region 713 may further impede a strong electric field from occurring in the doped absorption region 712. In an example, the buffer region may include silicon and may be no more than lightly doped (e.g., lightly doped silicon, intrinsic silicon, or the like). For example, the buffer region may have a p-type doping concentration no greater than about 5×10^{17} atoms/cm³ (e.g., a p-type doping concentration between about 1×10^{15} atoms/cm³ and about 5×10^{17} atoms/cm³ or the like). The buffer region may have a thickness between about 20 nm and about 50 nm. In alternate examples, the buffer region may be moderately or highly doped with a p-type dopant.

[0040] The doped charge region 714 may increase an electric field as the distance from the doped absorption region 712 increases. The doped charge region 714 may be at least moderately doped. In one example, the doped charge region 714 may include silicon and may have a p-type doping concentration between about 2×10^{17} atoms/cm³ and about 2×10^{18} atoms/cm³. The doped charge region 714 may have a thickness between about 20 nm and about 100 nm.

[0041] The device 700 may include an intrinsic multiplication region 716. The intrinsic multiplication region 716 may generate additional free electrons from impact ionization of the free electrons generated by absorption. In an example, the intrinsic multiplication region 716 may include silicon and may have a p-type doping concentration between about 1×10^{15} atoms/cm³ and about 2×10^{16} atoms/cm³. The intrinsic multiplication region 716 may have a thickness between about 50 nm and about 1000 nm. The device 700 may also include a doped contact region 718. The doped contact region 718 may conduct away the free electrons and the additional free electrons. In one example, the doped contact region 718 may

include silicon and may have an n-type doping concentration of about 1×10^{20} atoms/cm³. The doped contact region 718 may have a thickness between about 200 nm and about 2 μ m.

[0042] Figure 8 is a schematic diagram of a cross-section of another example of a device 800 to detect optical energy. The device 800 may include a doped absorption region 812. The doped absorption region 812 may receive optical energy and generate free electrons from the received optical energy through absorption. The free electrons may travel to a buffer region 813 that impedes a strong electric field from extending into the doped absorption region 812. The electrons may travel through the buffer region 813 to a doped charge region 814. The doped charge region 814 may increase an electric field as the distance to an intrinsic multiplication region 816 decreases. Some generation of additional electrons through impact ionization may also occur in the doped charge region 814.

[0043] The intrinsic multiplication region 816 may generate additional electrons through impact ionization of the accelerated electrons. The intrinsic multiplication region 816 may also increase the drift velocity of the electrons generated from impact ionization and the electrons generated from absorption to cause impact ionization of still more electrons. Thus, the intrinsic multiplication region 816 may multiply the number of free electrons. The free electrons generated from absorption and the free electrons generated from impact ionization may travel through the intrinsic multiplication region 816 to a doped contact region 818. The doped contact region 818 may conduct away the free electrons.

[0044] In the illustrated example, the device 800 may include a waveguide 820. In other examples, the device 800 may be electromagnetically coupled and/or physically coupled to but not include the waveguide 820. The waveguide 820 may receive optical energy from a grating coupler (not shown) coupled to an optical fiber (not shown) and direct the optical energy to the device 800. The waveguide 820 may be in direct contact with the doped contact region 818 and/or the intrinsic multiplication region 816. The waveguide 820 may include silicon. For example, the waveguide 820 may include intrinsic silicon. In an example, the waveguide 820 may have a length between about 4 μ m and about 100 μ m and a width between about 500 nm and about 10 μ m. In Figure 8, the waveguide length is measured

along the horizontal dimension across the page, and the waveguide width is measured along the dimension into and out of the page (i.e., the dimension perpendicular to the page). The waveguide 820 may transfer the optical energy to the doped absorption region 812 evanescently.

[0045] The above description is illustrative of various principles and implementations of the present disclosure. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. Accordingly, the scope of the present application should be determined only by the following claims.

CLAIMS

What is claimed is:

1. A system, comprising:
a waveguide; and
a photodiode electromagnetically coupled to the waveguide, the photodiode including:
a doped germanium region,
a moderately doped silicon region in direct contact with the doped germanium region,
an intrinsic silicon region in direct contact with the moderately doped silicon region, and
a highly doped silicon region in direct contact with the intrinsic silicon region.
2. The system of claim 1, wherein the waveguide is in direct contact with the highly doped silicon region.
3. The system of claim 1, wherein the doped germanium region includes a p-type doping concentration of at least about 5×10^{18} atoms/cm³.
4. The system of claim 1, wherein the intrinsic silicon region includes a p-type doping concentration less than or equal to about 2×10^{16} atoms/cm³.
5. The system of claim 1, wherein the intrinsic silicon region has a thickness between about 50 nanometers and about 1000 nanometers.
6. A method, comprising:
forming an n-type silicon layer on a substrate;
forming an intrinsic silicon layer on the n-type silicon layer;
forming a p-type silicon layer on the intrinsic silicon layer; and
forming a p-type germanium layer in direct contact with the p-type silicon layer.

7. The method of claim 6, wherein forming the p-type silicon layer comprises:
forming a moderately doped p-type silicon layer on the intrinsic silicon layer;
and
forming a lightly doped p-type layer on the moderately doped p-type silicon layer, wherein the lightly doped p-type layer comprises at least one of silicon and germanium, and wherein the p-type germanium layer is in direct contact with the lightly doped p-type layer.
8. The method of claim 7, wherein the moderately doped p-type silicon layer has a doping concentration between about 2×10^{17} atoms/cm³ and about 2×10^{18} atoms/cm³, and wherein the lightly doped p-type layer has a doping concentration between about 1×10^{15} atoms/cm³ and about 5×10^{17} atoms/cm³.
9. The method of claim 7, wherein forming the lightly doped p-type layer forming a lightly doped p-type layer with a thickness between about 20 nanometers and about 50 nanometers, and wherein forming the moderately doped p-type silicon layer comprises forming a moderately doped p-type silicon layer with a thickness between about 20 nanometers and about 100 nanometers.
10. The method of claim 6, wherein forming the p-type germanium layer comprises forming a p-type germanium layer with a thickness between about 50 nanometers and about 2,000 nanometers.
11. A device, comprising:
a doped absorption region to receive optical energy and generate free electrons from the received optical energy;
a doped charge region to increase an electric field;
an intrinsic multiplication region to generate additional free electrons from impact ionization of the generated free electrons; and
a doped contact region to conduct the free electrons and the additional free electrons.

12. The device of claim 11, further comprising a buffer region in direct contact with the doped absorption region and the doped charge region, wherein the buffer region is to impede a strong electric field from extending into the doped absorption region.

13. The device of claim 12, wherein the buffer region has a p-type doping concentration between about 1×10^{15} atoms/cm³ and about 5×10^{17} atoms/cm³, and wherein the buffer region comprises at least one of silicon and germanium.

14. The device of claim 11, further comprising a silicon waveguide in direct contact with the doped contact region and the intrinsic multiplication region.

15. The device of claim 11, wherein the doped absorption region includes a p-type doping concentration between about 5×10^{18} atoms/cm³ and about 5×10^{19} atoms/cm³, and wherein the doped absorption region comprises germanium.

FIG. 1

1/8

100

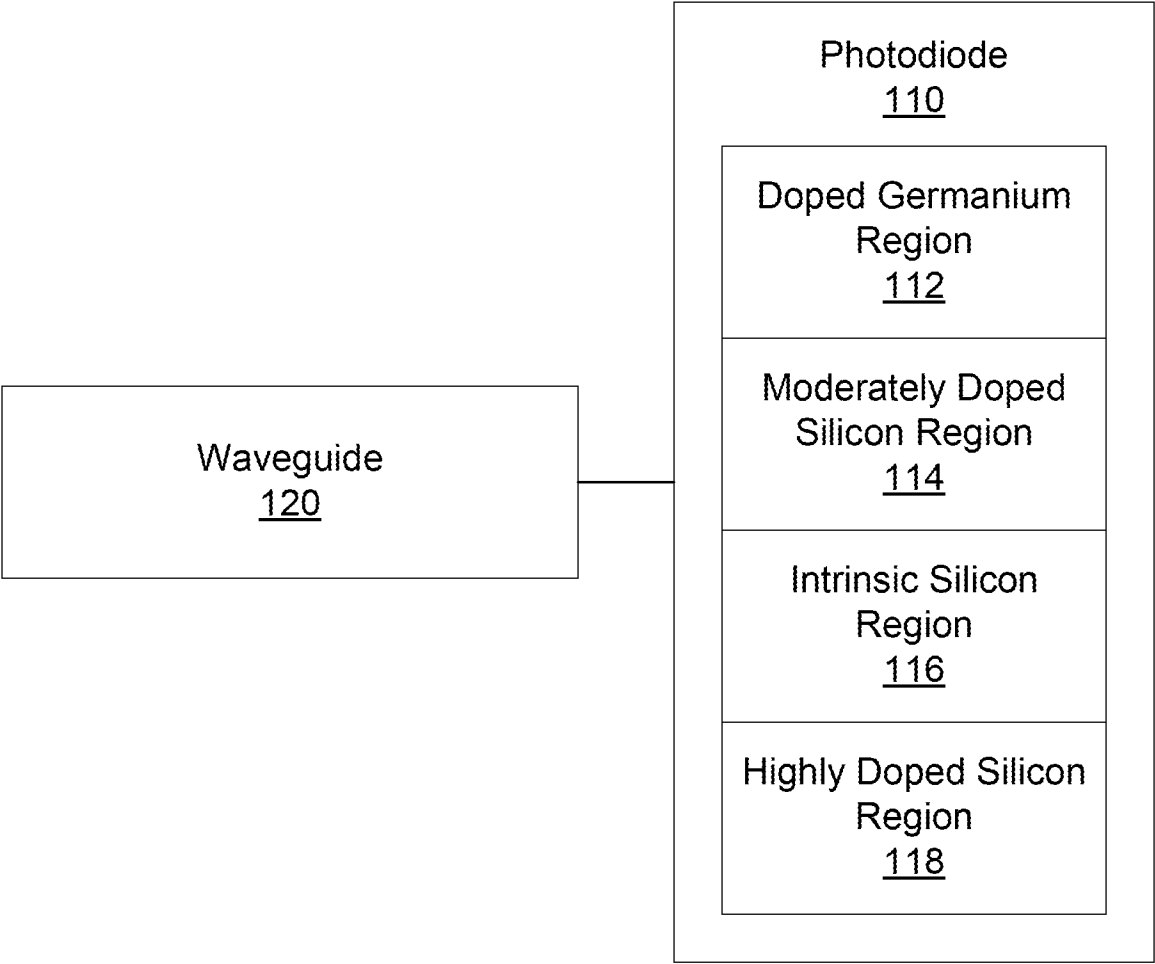


FIG. 2

2/8


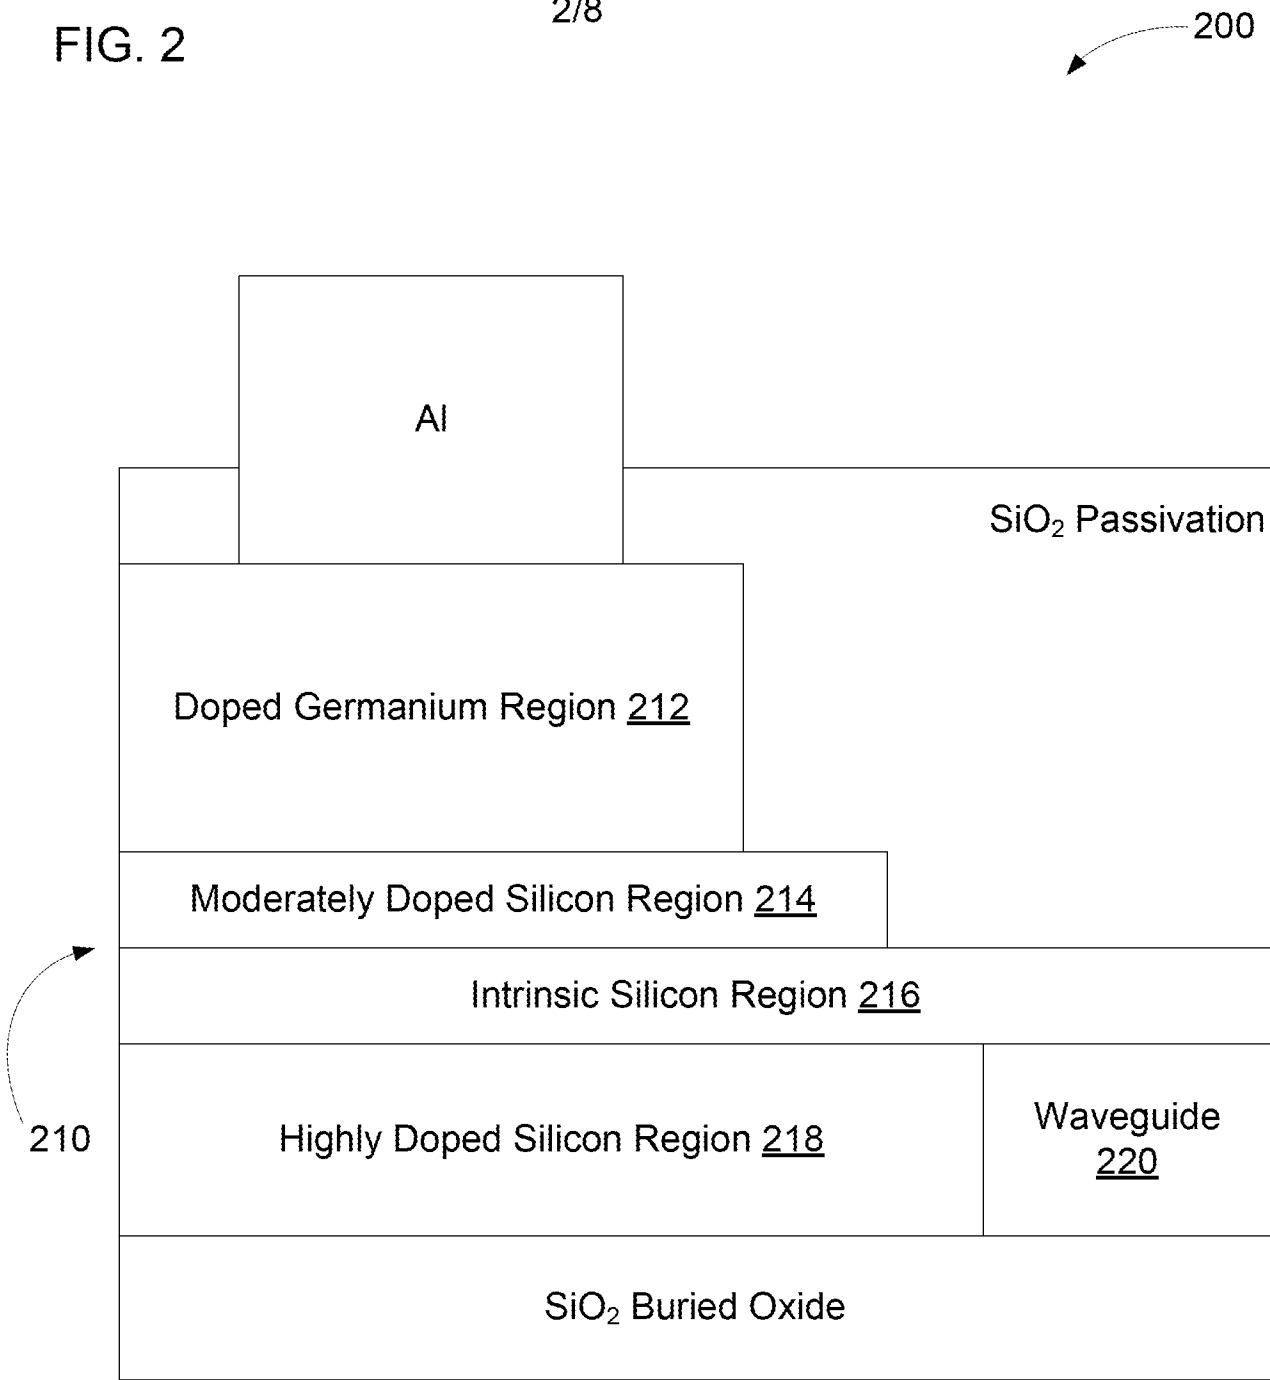


FIG. 3


3/8

300

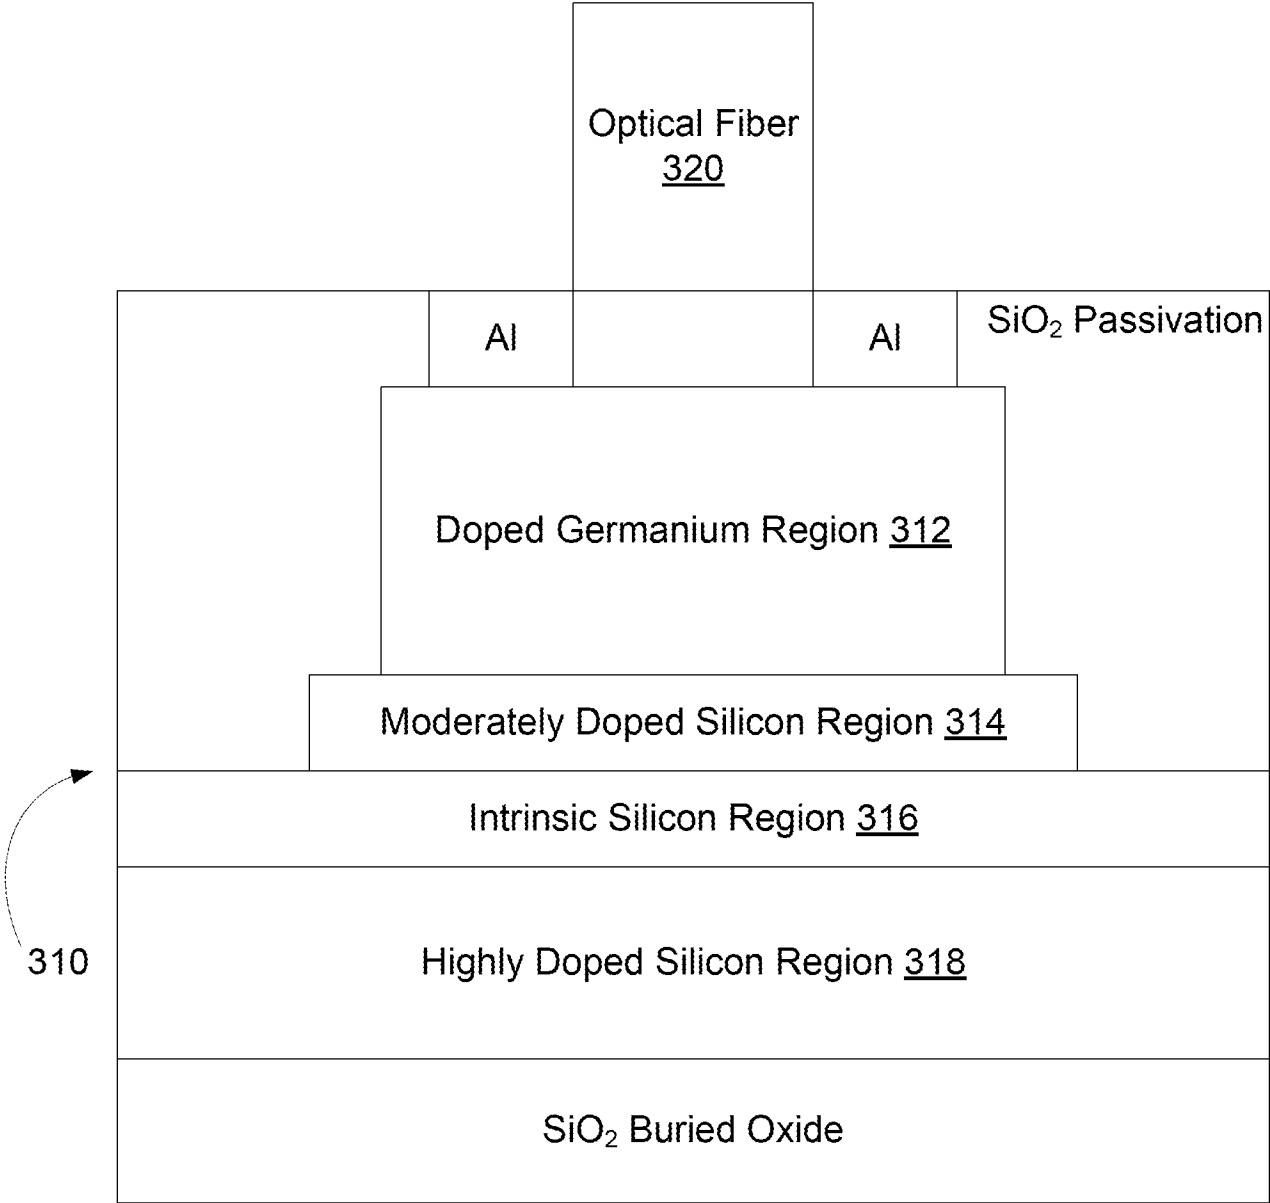

4/8

FIG. 4

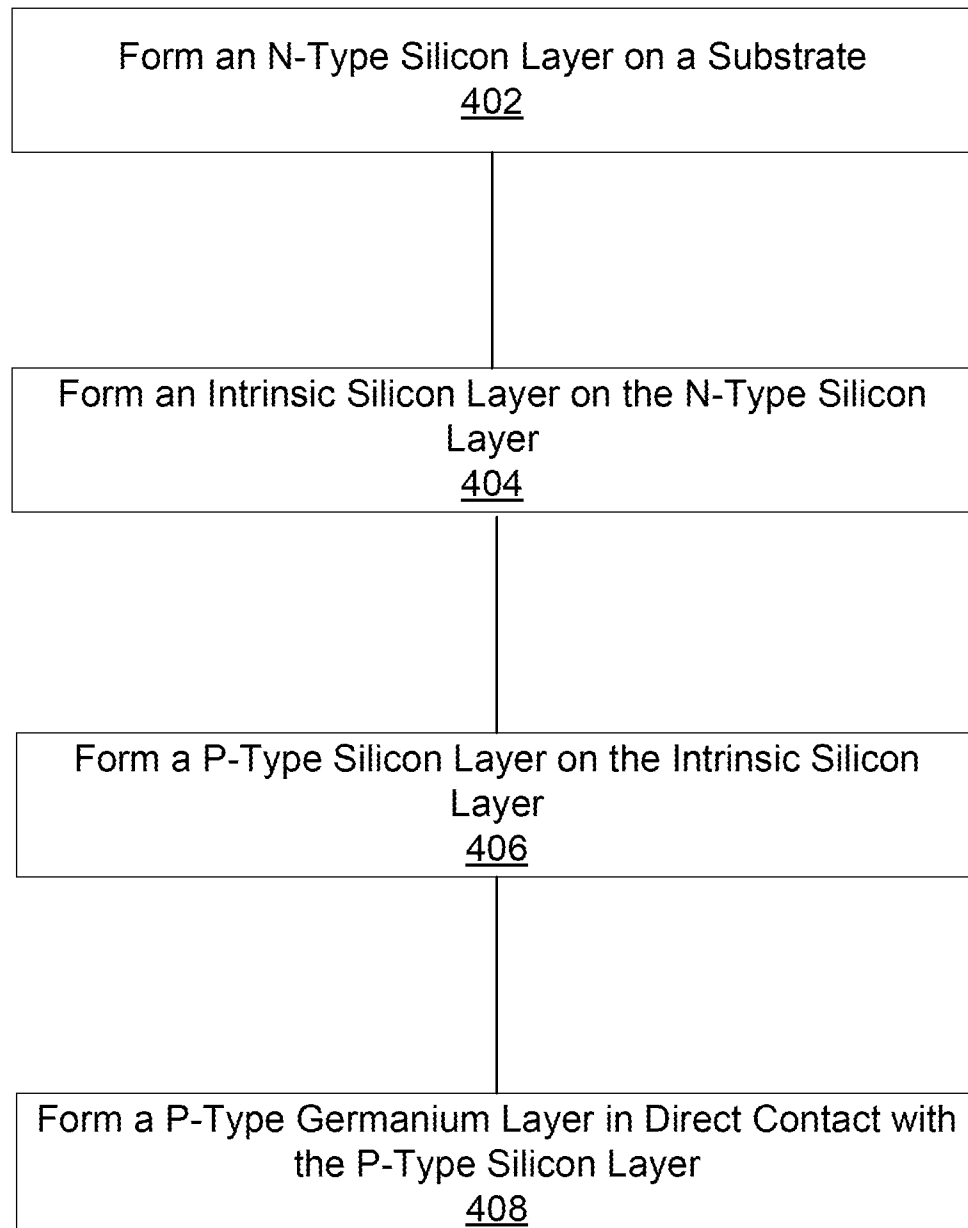400

5/8

FIG. 5

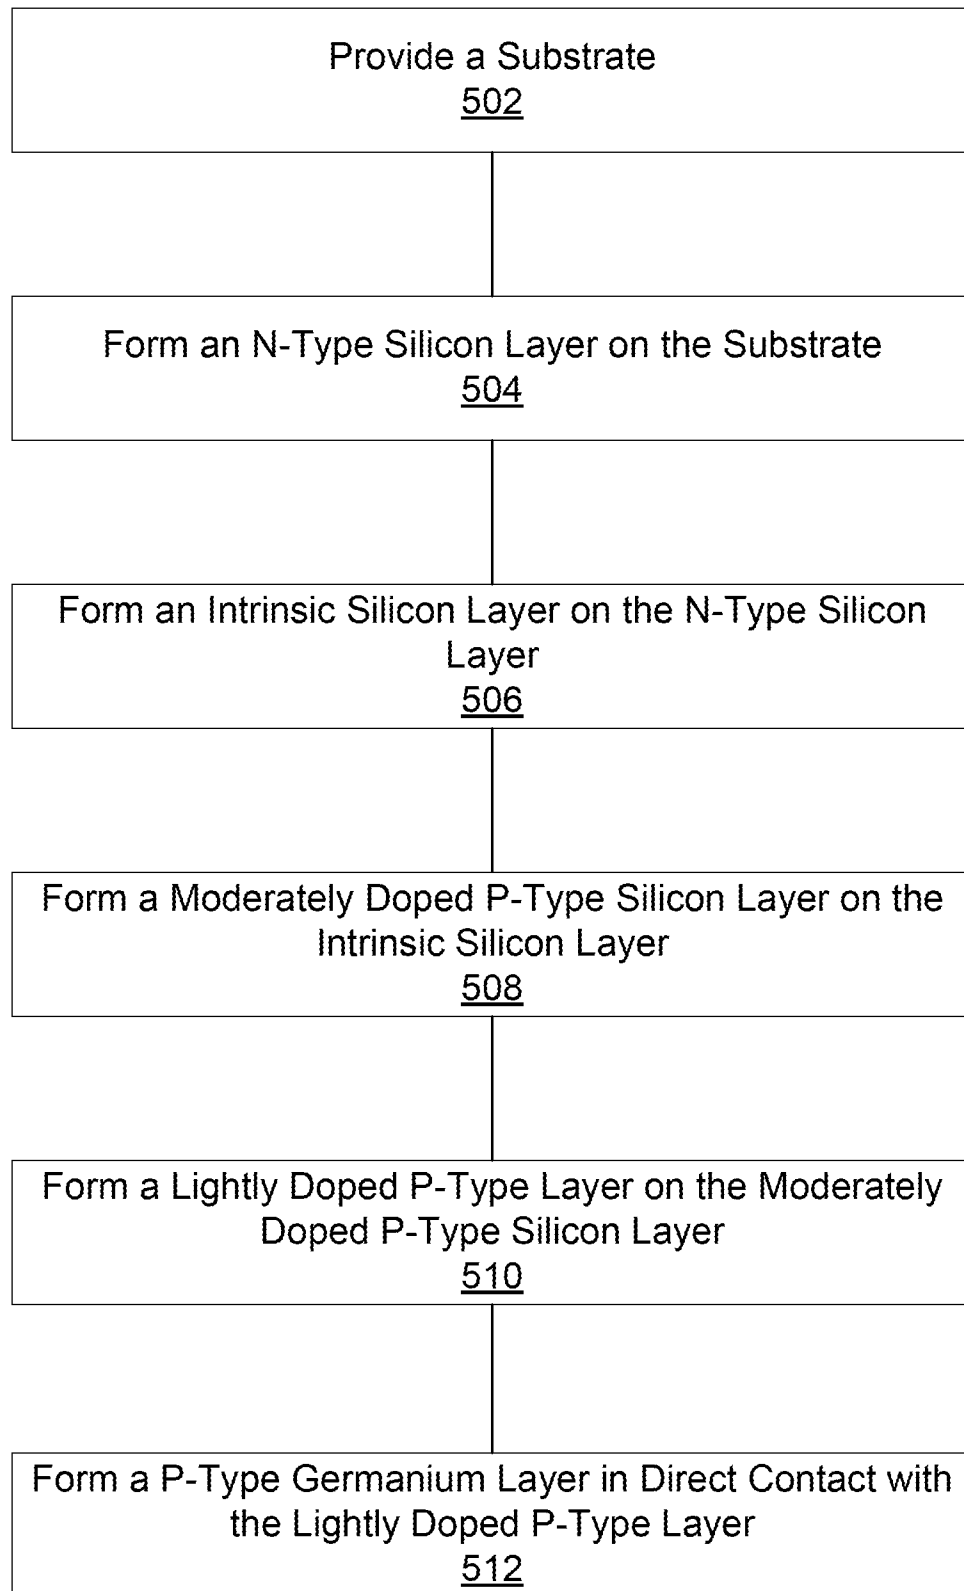
500

FIG. 6

6/8


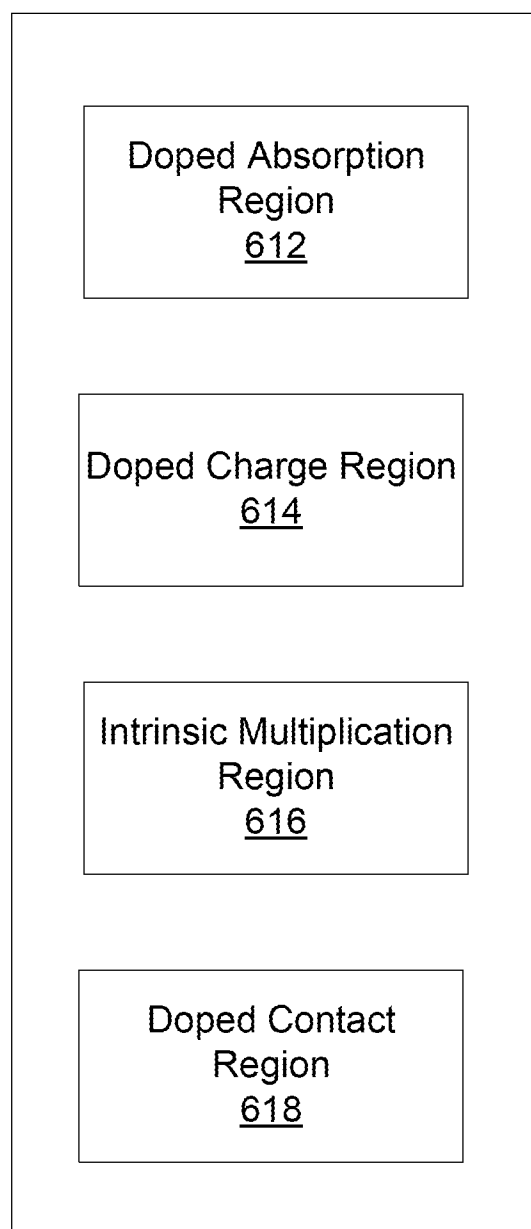
 600

FIG. 7

7/8

700



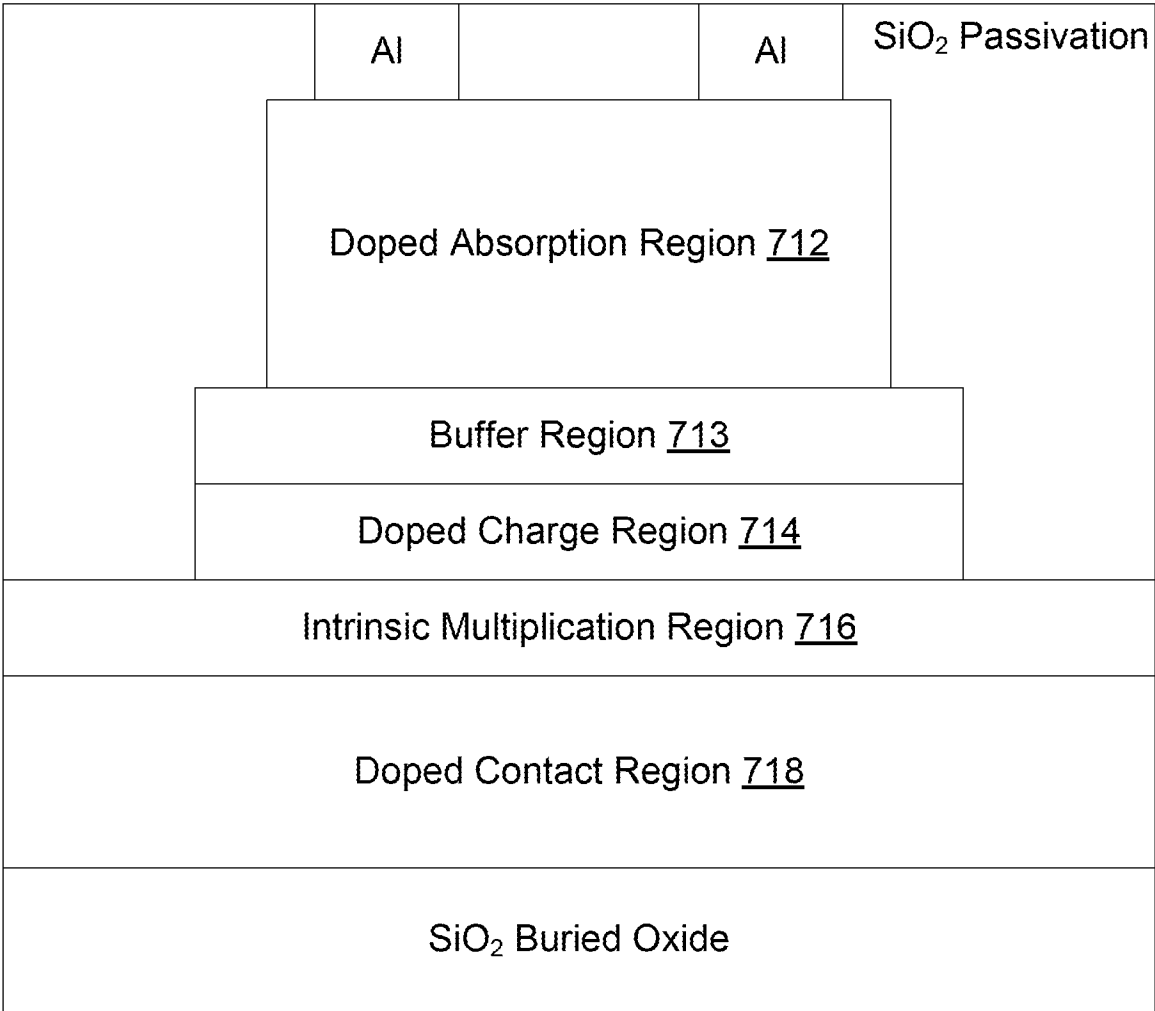


FIG. 8

8/8

800

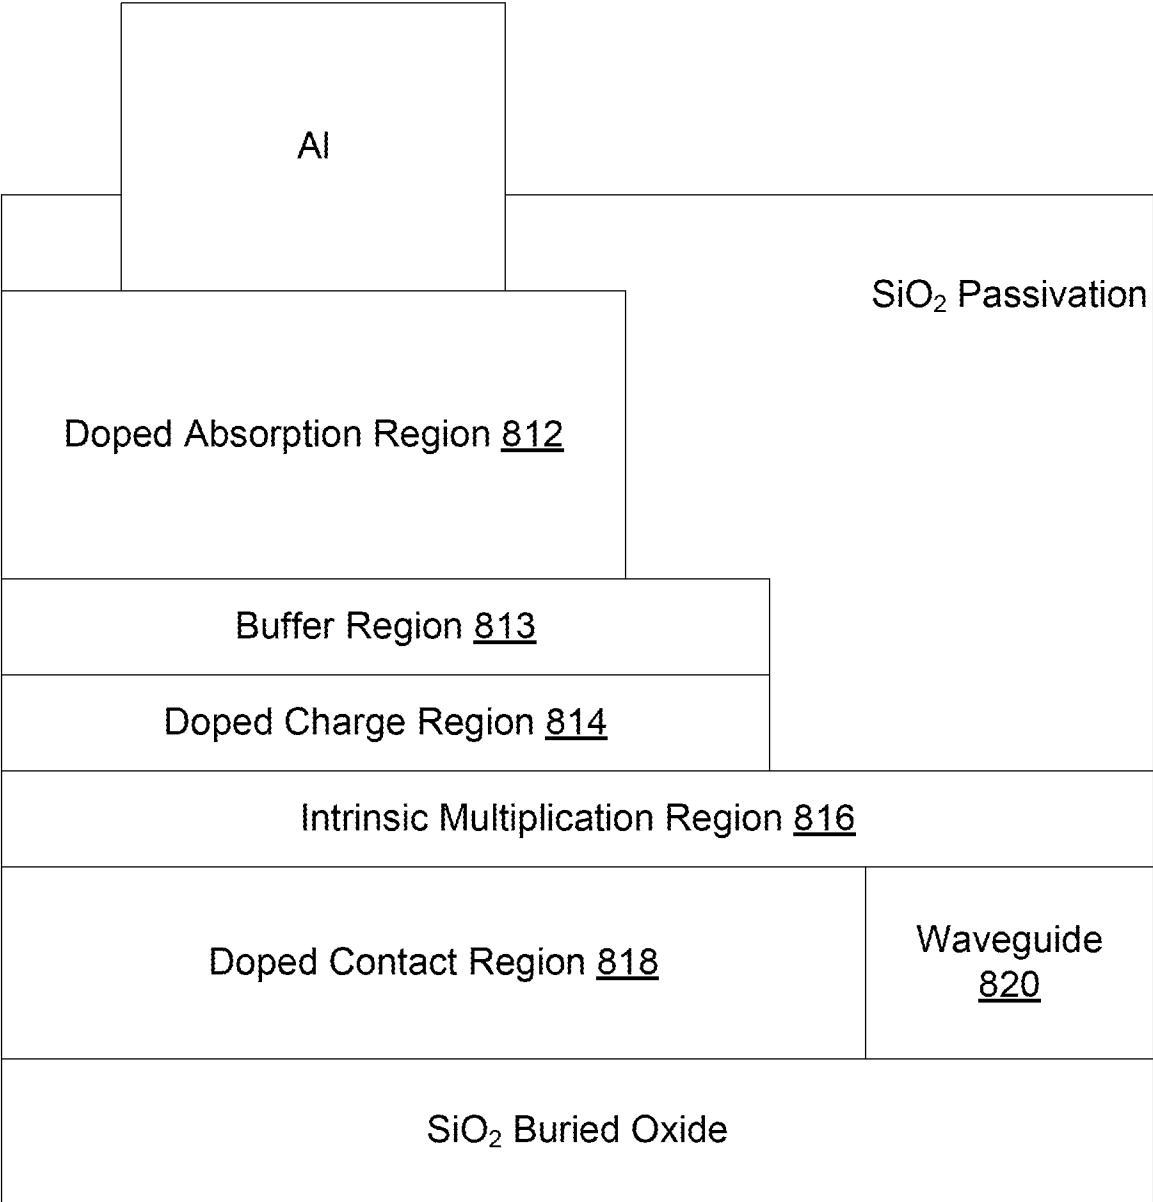

A. CLASSIFICATION OF SUBJECT MATTER**H01L 31/18(2006.01)i, H01L 31/09(2006.01)i, H01L 31/0288(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 31/18; H01L 31/028; H01L 31/107; H01L 31/0224; G01J 1/04; H01L 33/00; G01J 1/42; H01L 31/09; H01L 31/0288

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: photodetector, photodiode, germanium/silicon, absorption region, charge region, multiplication region, contact region, p-type, n-type, and similar terms.**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014-0151839 A1 (YIMIN KANG et al.) 05 June 2014 See paragraphs [0016]–[0018], [0020]–[0022], and [0024]; claims 1, 12–13, and 22; and figure 1.	1–10
Y		11–15
Y	CN 201885758 U (SHENZHEN INSTITUTE OF INSTITUTE OF INFORMATION TECHNOLOGY) 29 June 2011 See paragraphs [0013] and [0016]; claim 1; and figure 1.	11–15
Y	US 2015-0028443 A1 (SIFOTONICS TECHNOLOGIES CO., LTD.) 29 January 2015 See paragraphs [0008] and [0012]–[0013]; and figure 1.	12, 13
A	US 2015-0108327 A1 (ZHIHONG HUANG et al.) 23 April 2015 See paragraphs [0011] and [0020]; and figure 4.	1–15
A	US 8,410,420 B1 (MICHAEL HOCHBERG et al.) 02 April 2013 See column 2, lines 32–37; claim 1; and figure 3.	1–15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 April 2016 (26.04.2016)

Date of mailing of the international search report

27 April 2016 (27.04.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

NHO, Ji Myong

Telephone No. +82-42-481-8528



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042250

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0151839 A1	05/06/2014	CN 104025315 A EP 2798677 A1 EP 2798677 A4 KR 10-2014-0106625 A TW 201340355 A WO 2013-101110 A1	03/09/2014 05/11/2014 14/10/2015 03/09/2014 01/10/2013 04/07/2013
CN 201885758 U		None	
US 2015-0028443 A1	29/01/2015	None	
US 2015-0108327 A1	23/04/2015	CN 104303315 A EP 2856505 A1 KR 10-2015-0018518 A TW 201403848 A WO 2013-180690 A1	21/01/2015 08/04/2015 23/02/2015 16/01/2014 05/12/2013
US 8410420 B1	02/04/2013	None	