



(43) International Publication Date
26 October 2012 (26.10.2012)

- (51) International Patent Classification:
B65F 1/10 (2006.01) *B30B 9/30* (2006.01)
B30B 1/02 (2006.01)
- (21) International Application Number:
PCT/US2012/034368
- (22) International Filing Date:
20 April 2012 (20.04.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/091,004 20 April 2011 (20.04.2011) US
- (72) Inventors; and
- (71) Applicants : **HITCHCOCK, Jim** [US/US]; 24645 Kettle River Blvd., Forest Lake, MN 55025 (US). **JUDGE, Kenneth** [US/US]; 637 Heron Court North, Oakdale, MN 55128 (US). **LUNDQUIST, Luke** [US/US]; 4663 Lansing Ave NE, St Michael, MN 55376 (US).
- (74) Agent: **BELFAY, Roger**; 829 Tuscarora Avenue, St. Paul, MN 55102 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRASH COMPACTOR

FIG. 3

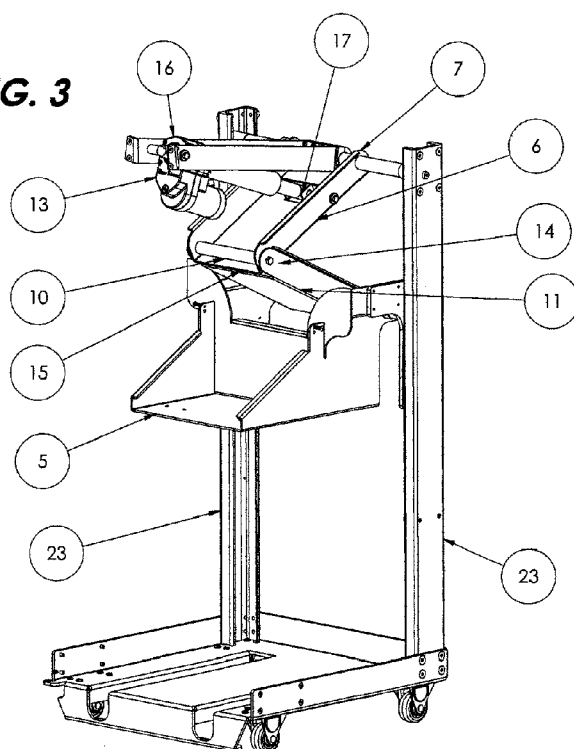

(57) Abstract: The Trash Compactor comprising: a frame, a cavity, a trash receptacle, a platen movable to compress trash collected in the trash receptacle, a set of linkages and a drive mechanism configured to drive said platen up and down, said drive mechanism further configured as one of said link elements, and a platen guide mechanism configured to restrict the motion of said platen in an up and down manner.

DESCRIPTION

Trash Compactor

The Trash Compactor comprises: a frame defining a cavity, a trash receptacle, for containing trash, and disposed within the frame, a platen movable to compress trash collected in the trash receptacle, a upper set of linkages having a first end attached to the frame by a first simple hinge joint, the first simple hinge joint having an axis of rotation, and a second end attached to the platen by a second simple hinge joint, the upper set of linkages operating in a first plane normal to the axis of rotation of the first simple hinge joint, said upper set of linkages comprising two or more link elements, a lower set of linkages having a first end attached to the frame by a third simple hinge joint, the first simple hinge joint having an axis of rotation, and a second end attached to the platen by a fourth simple hinge joint, the lower set of linkages operating in a second plane normal to the axis of rotation of the third simple hinge joint, said lower set of linkages comprising two or more link elements, a drive mechanism configured to drive said platen up and down, said drive mechanism further configured as one of said link elements.

The Trash Compactor of may further comprise a second drive mechanism, said second drive mechanism configured to move the platen up and down, said second drive mechanism further configured as one of said link elements. .

In a second embodiment, the Trash Compactor comprises: a frame defining a cavity, a trash receptacle for containing trash disposed within the frame, a platen movable to compress trash collected in the trash receptacle, one set of linkages having a first end attached to the frame by a first simple hinge joint, the first simple hinge joint having an axis of rotation, and a second end attached to the platen by a second simple hinge joint, the upper set of linkages operating in a first plane normal to the axis of rotation of the first simple hinge joint, said upper set of linkages comprising two or more link elements, a platen guide mechanism configured to restrict the motion of said platen in an up and down manner.

Figure 1 is a perspective view of Trash compactor complete.

Figure 2 is an exploded view of Trash compactor no skins.

Figure 3 is a front perspective view of Trash compactor drive mechanism.

Figure 3A is a detailed top view of Trash compactor linear guide system.

Figure 4 is a rear perspective view of Trash compactor drive mechanism.

Figure 4A is a detailed perspective view of Trash compactor drive mechanism

Figure 5 is a front perspective view of Trash compactor service door.

DESCRIPTION

DESCRIPTION

Figure 5A is a detailed perspective view of Trash door locking mechanism.

Figure 6 is a rear perspective view of Trash compactor service door.

Figure 7 is a perspective view of Trash compactor skins.

The following detailed description should be read with reference to the drawings in which similar elements in different drawings are numbered the same. The detailed description and the drawings, which are not necessarily to scale, depict illustrative embodiments and are not intended to limit the scope of the invention. The illustrative embodiments depicted are intended only as exemplary. Selected features of any illustrative embodiment may be incorporated into an additional embodiment unless clearly stated to the contrary.

The Trash Compactor 1 comprises: a frame 2 defining a cavity 3, a trash receptacle 4, for containing trash, and disposed within the frame 2, a platen 5 movable to compress trash collected in the trash receptacle 4, an upper set of linkages 6 having a first end 7 attached to the frame 2 by a first simple hinge joint 8, the first simple hinge joint 8 having an axis of rotation, and said upper set of linkages having a second end attached to the lower set of linkages 11 by a second simple hinge joint 10, the upper set of linkages 6 operating in a first plane normal to the axis of rotation of the first simple hinge joint 8, said upper set of linkages 6 comprising two or more link elements, a lower set of linkages 11 having a second end 14 attached to the upper linkage by the second simple hinge joint 10, the first simple hinge joint 8 having an axis of rotation, and said lower set of linkages 11 attached to the platen 5 by a fourth simple hinge joint 30, the lower set of linkages 11 operating in a second plane normal to the axis of rotation of the second simple hinge joint 10, said lower set of linkages 11 comprising two or more link elements, a drive mechanism 13 configured to drive said platen 5 up and down, said drive mechanism 13 further configured as one of said link elements. The Trash Compactor 1 of may further comprise a second drive mechanism 13, said second drive mechanism 13 configured to move the platen 5 up and down, said second drive mechanism 13 further configured as one of said link elements.

In a second embodiment, the Trash Compactor 1 comprises: a frame 2 defining a cavity 3, a trash receptacle 4 for containing trash disposed within the frame 2, a platen 5 movable to compress trash collected in the trash receptacle 4, one set of linkages having a first end 7 attached to the frame 2 by a first simple hinge joint 8, the first simple hinge joint 8 having an axis of rotation, and said one set of linkages

DESCRIPTION

DESCRIPTION

having a second end attached to the platen 5 by a second simple hinge joint 10, the upper set of linkages 6 operating in a first plane normal to the axis of rotation of the first simple hinge joint 8, said upper set of linkages 6 comprising two or more link elements, a platen guide 21 mechanism, said platen guide mechanism 21, configured to restrict the motion of said platen 5 in an up and down manner.

The second embodiment may further comprise a first drive mechanism 13 attached to said frame 2 and to said linkage to move the platen 5 up and down.

The second embodiment may further comprise a first drive mechanism 13 configured as one of said link elements and to move said platen 5 up and down.

A Trash Compactor 1 generally includes a case 20, which surrounds the unit on all sides and the top. The front side of the case 20 includes at least one service door 19. It will be appreciated that the overall shape of a Trash Compactor 1 may include other than rectangular shapes, for example, hexagonal, octagonal, circular, and Oval are just a few of the infinite number of choices. Usually Trash Compactors 1 include a frame 2 which provides the structure to which all the other components are attached. The frame 2 may be integral to the design of the outer case 20 or may be independent of the outer case 20.

The Trash Compactor 1 is used in at least two different ways. In one case a person places trash in the compactor and in another a person removes compacted trash from the Trash Compactor 1. A person placing trash in the Trash Compactor 1 the inlet door 18 is opened either manually or by a proximity sensor 27 or other sensor is triggering an opening mechanism. In all cases at predetermined intervals or after a predetermined number of inlet door 18 cycles the compacting mechanism compacts the trash in the trash receptacle 4. The Trash Compactor 1 may provide a signal to indicate that the trash receptacle 4 is full and the liner should be replaced. This may be done by opening up the service door 19 and wheeling out the trash receptacle 4. Interlocks are provided to prevent compaction cycles from occurring while either of the the service door 19 or the inlet door 18 is open, thus preventing possible injury to such users.

Another use of the Trash Compactor 1 is removal of the compacted trash. This occurs when the service door 19 is opened and the trash receptacle 4 is removed and emptied. This may include automatic dispensing of the trash receptacle 4.

The case 20 may be fixed to the frame 2 and may be made of panels of metal, plastic, acrylic, wood, or a combination of such materials or other suitable material or

DESCRIPTION

DESCRIPTION

combination of materials. The case 20 may include, for example, a tray collector molded into its top panel. The case 20 configuration may vary depending on the contemplated installation of the Trash Compactor 1. For example, for a cabinet mounted configuration, where only the front panel of the Trash Compactor 1 is exposed, the case 20 may be reduced to only the front panel and inlet door 18. The inlet door 18 may include a lockable door latch 28, which can be operated to open the inlet door 18. In this embodiment, the service door 19 may be opened regularly to provide access to the trash receptacle 4 and provide access to service the internal mechanisms of the Trash Compactor 1. The Trash Compactor 1 may also include one or more speaker apertures 24, signal light aperture 26s, and proximity sensors 27.

Speaker aperture 24 may be a regular array of holes or other opening or set of openings through which a speaker may be heard. The speaker aperture 24 may be placed in the service door 19 or any suitable location on the case 20 of the Trash Compactor 1. Likewise, signal light aperture 26 may be an opening or set of openings through which a signal light 25 may be seen. The Signal light aperture 26 may include a transparent or translucent cover or may be a naked hole in the service door 19 or any suitable place on the case 20. The light may also be mounted to the frame 2 so that it does not move with the service door 19 or inlet door 18. Other suitable auditory and visual output mechanisms may be included. Such mechanisms can be used to provide cues and information to users, who are throwing trash into the Trash Compactor 1, and service people, who may empty the trash receptacle 4 and perform other maintenance tasks.

In the illustrated embodiment a proximity sensor 27 is mounted in the service door 19 directly above the inlet door 18 and senses movement near to the sensor. Other contemplated locations for the proximity sensor 27 or for a second proximity sensor 27 include locations on the inlet door 18. The proximity sensor 27 provides signals to the inlet door 18 opening mechanism and can be adjusted or configured to provide a desired level of sensitivity and range of detection.

In the embodiment illustrated the back of the service door 19 is provided with a latch 28, a proximity sensor 27, a speaker aperture 24, and a signal light aperture 26. It can also be seen that the inlet door 18 is mounted to the service door 19 with a hinge 29, about which the inlet door 18 pivots. The hinge 29 may include a flex sensor by which the location of the inlet door 18 may be monitored. The inlet door 18 hinge 29 may also be spring-loaded to return to the closed position. One or more

DESCRIPTION

DESCRIPTION

additional inlet door 18 sensors may also be included to provide redundant information to the control unit on the location of the inlet door 18. Any suitable sensor, such as a magnetic sensor or a solenoid sensor may be used. A solenoid or other suitable locking mechanism may also be included to lock the door closed during compacting operations.

In the illustrated embodiment the inlet door 18 includes an opening mechanism. The opening mechanism has two portions, one of which may be mounted to the inlet door 18 and one of which may be mounted to the frame 2 or service door 19.

The first portion of the opening mechanism, which is mounted to the inlet door 18 and the service door 19, includes a T-shaped linkage 31, the upper end of which rests on a pin and the lower end of which is pivotably connected to a strut. The strut, in turn, is pivotably connected to the service door 19. A linkage is preferably confined by brackets to the service door 19 so that it can only move vertically. As the linkage moves up or down, the inlet door 18 opens or closes.

The second portion, which is mounted to the case 20 or frame 2, includes a motor 32, a rotatable arm and a pin. The pin is offset from the rotational output of the motor 32 so that the motor 32 can rotate the pin along an arc. Because the T-shaped linkage 31 rests on the pin, it can be raised either by the pin or independently of it. Further, the service door 19 can be opened and closed easily, as the link between the two portions of the mechanism is easily separated and rejoined. It will be appreciated that any mechanism by which the pin can be lifted up and down may be used in the second portion of the opening mechanism. The motor 32 may be selected to retain the position of its output mechanism when power is cut. Thus, for example, if a Trash Compactor 1 loses power when the inlet door 18 is open, the inlet door 18 will be retained in its position and not close, thus preventing injury to potential users.

Because the first portion of the mechanism can, in some instances, be moved independently of the second portion, there are thus two ways of opening the inlet door 18. In one method, a signal from the proximity sensor 27 is received by a controller, which then tells the motor 32 to rotate. As the pin is rotated by the motor 32, it slides along the T-shaped linkage 31 while raising its vertical position. As the pin is lifted, so too is the T-shaped linkage 31, which, because it is mechanically linked to the inlet door 18, opens the inlet door 18.

DESCRIPTION

DESCRIPTION

In a second method, the inlet door 18 can be pushed in by a person throwing trash away. The T-shaped linkage 31 is thereby raised independently of the pin. Because the sensors can detect the inlet door 18 opening, the pin can be raised to the T-linkage to keep the inlet door 18 in the open position and to provide for a controlled inlet door 18 closing. Alternatively, pushing on the inlet door 18 triggers one of the inlet door 18 sensors, which sends a signal to the controller. Examples of suitable sensors include solenoids, magnetic sensors, flex sensors, proximity sensors 27, and other sensors capable of detecting the users intent to open the inlet door 18. The controller then tells the motor 32 to rotate. In this manner, a person who pushes on the inlet door 18 may be assisted by the opening mechanism in opening the inlet door 18.

The door mechanism may also include stop limiters attached to the inlet door 18, the case 20 or the frame 2 to limit the extent that the inlet door 18 may be opened. Of course, other suitable opening mechanisms for the inlet door 18 may be used in various embodiments.

The frame 2 includes two vertical rear posts 23 and two vertical front posts 22 that are connected to a top frame 2 and a U-shaped bottom frame 2. The two rear posts 23 may be L-shaped and most of the two front posts 22, except for a lower front portion widened to receive the trash receptacle 4, are L-shaped as well. A front cross-piece, mounted above the location of the trash receptacle 4, may also be included to provide additional rigidity and strength. The frame 2 also includes a top cross-piece, which is used in attaching and supporting the compacting mechanism. The frame 2 may be made from steel or other suitably strong material and may be assembled by bolts, welding, manufacturing components together, or some other suitable technique.

The frame 2 is preferably mounted on wheels 33. Alternatively, the frame 2 may also be set directly on feet or on the ground or other suitable surface. In this embodiment, the overall shape is that of a rectangular box. In other embodiments, the Trash Compactor 1 may have a different overall shape and correspondingly different frame 2 components. For example, the Trash Compactor 1, and thus the frame 2, may have a cylindrical shape. The frame 2 may also be made using other techniques. For example, each side of the frame 2 may be stamped from a single piece of material and the sides may then be joined using a suitable technique.

The rear posts 23 may also serve as guides 21 for the motion of the Platen 5. When serving this function the rear posts 23 are preferably U-shaped to accommodate a pair of guides 21. These guides 21 are rigidly attached to the platen 5 and the guide

DESCRIPTION

DESCRIPTION

s 21 are slideably contained within the U-shaped rear posts 23 to maintain the platen 5 in a horizontal orientation.

The wheels 33 of the Trash Compactor 1 or the bottom of the frame 2 provide room for a trash receptacle 4 support. The trash receptacle 4 support is a bottom panel piece that includes that guide and support the trash receptacle 4. The trash receptacle 4 support may include detents or holes that correspond to the wheels 33 or other aligning features of the trash receptacle 4. These detents may provide tactile feedback to indicate when the trash receptacle 4 is properly placed, may keep the trash receptacle 4 from moving out of position and may allow the trash receptacle 4 support bear the force during a compaction cycle.

The compaction cycle is accomplished by forcing the platen 5 downward to compress the contents of the trash receptacle 4. This is accomplished by a linkage mechanism. This linkage has two ends, one end is attached to the frame 2 and the other to the platen 5. In the retracted position the platen 5 is raised to a maximum elevation within the space defined by the frame 2. To accomplish compression of the trash contained within the trash receptacle 4 the linkage mechanism is extended downward which forces the platen 5 downward. The extension of the linkage mechanism is accomplished by lengthening one or more of the linkage members by a drive mechanism 13 placed as one of the members of the linkage mechanism. A scissors type linkage mechanism is a common type linkage mechanism readily adapted to this use. The drive mechanism 13 can be a hydraulic cylinder, an electric screw driven mechanism, or any suitable mechanism which itself extends in length and exerts sufficient force at the ends of the drive mechanism 13 to force the linkage mechanism to extend. In situations where resistance to motion may be encountered by the platen 5 and that resistance is not evenly distributed across the platen 5 a guide 21 mechanism can be employed to maintain the platen 5 in a fixed orientation relative to the case 20.

The platen 5 is a component with a generally flat bottom surface for compressing the trash into the trash receptacle 4 and may include side walls and upper lip to align the platen 5 within the trash receptacle 4 and to prevent trash from accumulating on the platen 5. Preferably, the side walls are sized so that the upper lip is always above the trash receptacle 4. Ordinarily, when trash is being compressed in the trash receptacle 4, the side walls of the platen 5 are at least partially disposed within the trash receptacle 4. This confines trash to the trash receptacle 4 and prevents

DESCRIPTION

DESCRIPTION

contamination of the compacting mechanism. Further, the upper lip, which extends outwardly from the side walls directs any potential spray of liquid trash away from the compacting mechanism.

It can be appreciated that the cross-sectional shape of the platen 5 and the cross-sectional shape of the trash receptacle 4 should preferably correspond so that the platen 5 is compressing the entire surface of the trash. A square or rectangular shape is the most efficient shape for the platen 5 and the trash receptacle 4, though of course other shapes, such as circular or octagonal are within certain embodiments. The platen 5 may also include a beveled front edge, which accommodates the opening of the inlet door 18. A chamfer on the rear edge may also be included. In embodiments that include a rear inlet door 18, this rear chamfer may accommodate the opening of the rear inlet door 18. These chamfers also aid in removing trash and add rigidity. In one contemplated embodiment, the platen 5 may include chamfers around the circumference of the flat bottom surface. The flat bottom surface may also include ribs or ridges to create higher and lower pressure areas to better compress the trash.

It will be understood that more than one linkage mechanism as described above may be used. However, only one linkage will be discussed, although it should be understood that the discussion is applicable to each linkage. The linkage has three components, the upper linkage 34, the lower linkage 11 and the drive mechanism 13. The upper linkage 34 has a first end 7 rotatably connected to the frame 2 and a lower end connected to lower linkage 11. The lower linkage 11 has an upper end 14 connected to the upper linkage 34 and a second end 9 connected to platen 5. The drive mechanism 13 has a fixed end 16 connected to the frame 2 and a movable end 17 connected to upper linkage 34 between the first and lower ends of the upper linkage 34. Changing the length of the linkages and the connection position of the drive mechanism 13 changes the force applied to the platen 5 and the distance the platen 5 may travel. In one embodiment, the linkages may not be completely retracted when the platen 5 is in its highest position so that there is a slight angle between the upper linkage 6 and lower linkage 11. Each of the connections to the upper, lower and drive mechanism 13 allows one degree of rotational freedom. Such connections shall be referred to herein as simple hinge joints. Simple hinge joints can be formed between the linkages by using pins whose ends are captured using C-rings, by press-fitting a pin into one of the linkages and capturing the other end of the pin with a C-ring, or by

DESCRIPTION

DESCRIPTION

some other suitable method. Other components such as roller or ball bearings may be included as well.

The upper linkage 34 may be fabricated from a single U-shaped component. The U-shaped component has two sides and a bottom. The sides should be of sufficient dimension to permit rotatable connection of the upper linkage 34 to: 1) the frame 2, 2) the lower linkage 11, and 3) the drive mechanism 13. The bottom of the U-shaped component should be of sufficient dimension to provide lateral stability of the entire linkage mechanism when subjected to the forces encountered during the compaction cycle.

The linkages, in cooperation with the platen 5 guide 21 mechanism cooperatively stabilize and fix the position of platen 5. The compacting mechanism can thereby go from a fully raised position to a fully extending position.

A control system controls the operation of the Trash Compactor 1. The control system can take inputs such as the position of the inlet door 18, how many times the inlet door 18 has been opened, the time since the last operation of the compaction mechanism, the current draw of the motor 32 and so forth to operate the Trash Compactor 1. One possible mode of operation involves operating the compacting mechanism after the inlet door 18 has been opened a predetermined number of times. For example, after the inlet door 18 has been opened ten times, the control system closes and locks the inlet door 18 shut and operates the compacting mechanism.

The stroke length of the platen 5 may be determined by how many times the compacting mechanism has been operated since the liner to the trash receptacle 4 has been last changed, it might be operated until a predetermined amount of force has been applied to the trash by the platen 5, or it might have a fixed length unless a predetermined force level has been exceeded. Other operating modes may be programmed as desired.

It is to be appreciated that the compacting mechanisms described herein may be suitable for other uses than in a Trash Compactor 1. Any application where force is applied over a surface may be suitable. For example, the compacting mechanism may be suitable for use in a food press, printing press, or even an automobile crusher.

All numeric values are herein assumed to be modified by the term "about", whether or not explicitly indicated. The term "about" generally refers to a range of numbers that one of skill in the art would consider equivalent to the recited value (i.e.,

DESCRIPTION

DESCRIPTION

having the same function or result). In many instances, the term "about" may be indicative as including numbers that are rounded to the nearest significant figure.

The recitation of numerical ranges by endpoints includes all numbers within that range (e.g., 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, and 5).

Although some suitable dimensions ranges and/or values pertaining to various components, features and/or specifications are disclosed, one of skill in the art, incited by the present disclosure, would understand desired dimensions, ranges and/or values may deviate from those expressly disclosed.

As used in this specification and the appended claims, the singular forms "a", "an", and "the" include plural referents unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term "or" is generally employed in its sense including "and/or" unless the content clearly dictates otherwise.

DESCRIPTION

CLAIMS

We claim:

1) A trash compactor comprising:

- a) a frame defining a cavity;
- b) a receptacle for containing trash disposed within the frame;
- c) an upper set of linkages having a first end and a second end, said first end of said upper linkages attached to the frame by a first simple hinge joint, the first simple hinge joint having an axis of rotation;
- d) a lower set of linkages having a first end and a second end, said first end of said lower set of linkages attached to the second end of the upper linkages by a second simple hinge joint; and
- e) a platen movable to compress trash collected in the receptacle, said platen connected to said second end of said lower set of linkages by a third simple hinge joint;
- f) a drive mechanism configured to drive said platen up and down, said drive mechanism having a fixed end and a movable end, said fixed end of said drive mechanism connected to said frame and said movable end of said drive mechanism pivotally connected to said upper set of linkages.

2) The trash compactor of claim 1 further comprising:

- a) a platen guide mechanism configured to restrict the motion of said platen to a linear path.

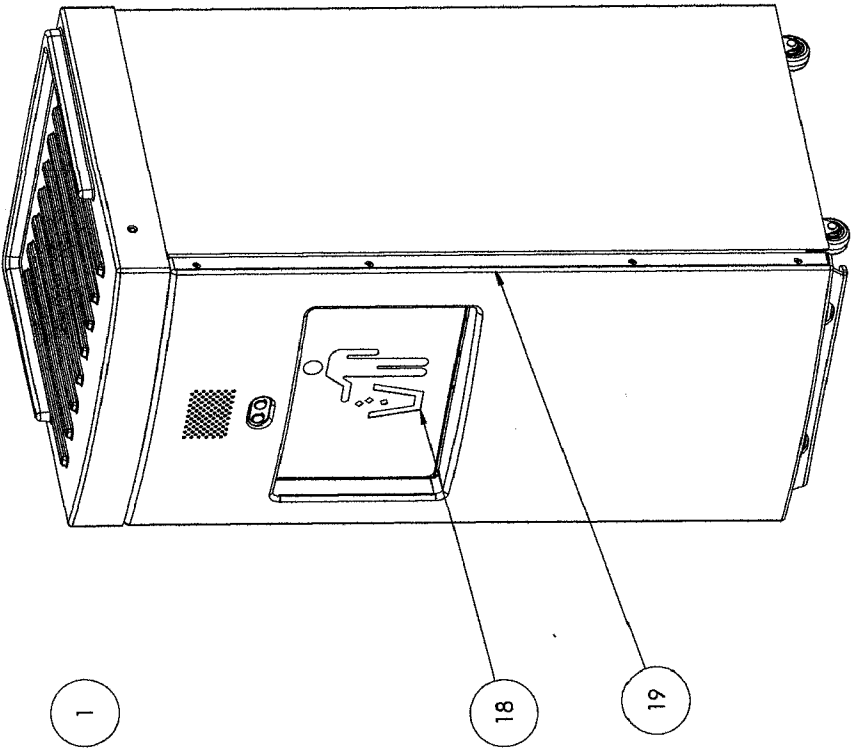


FIG. 1

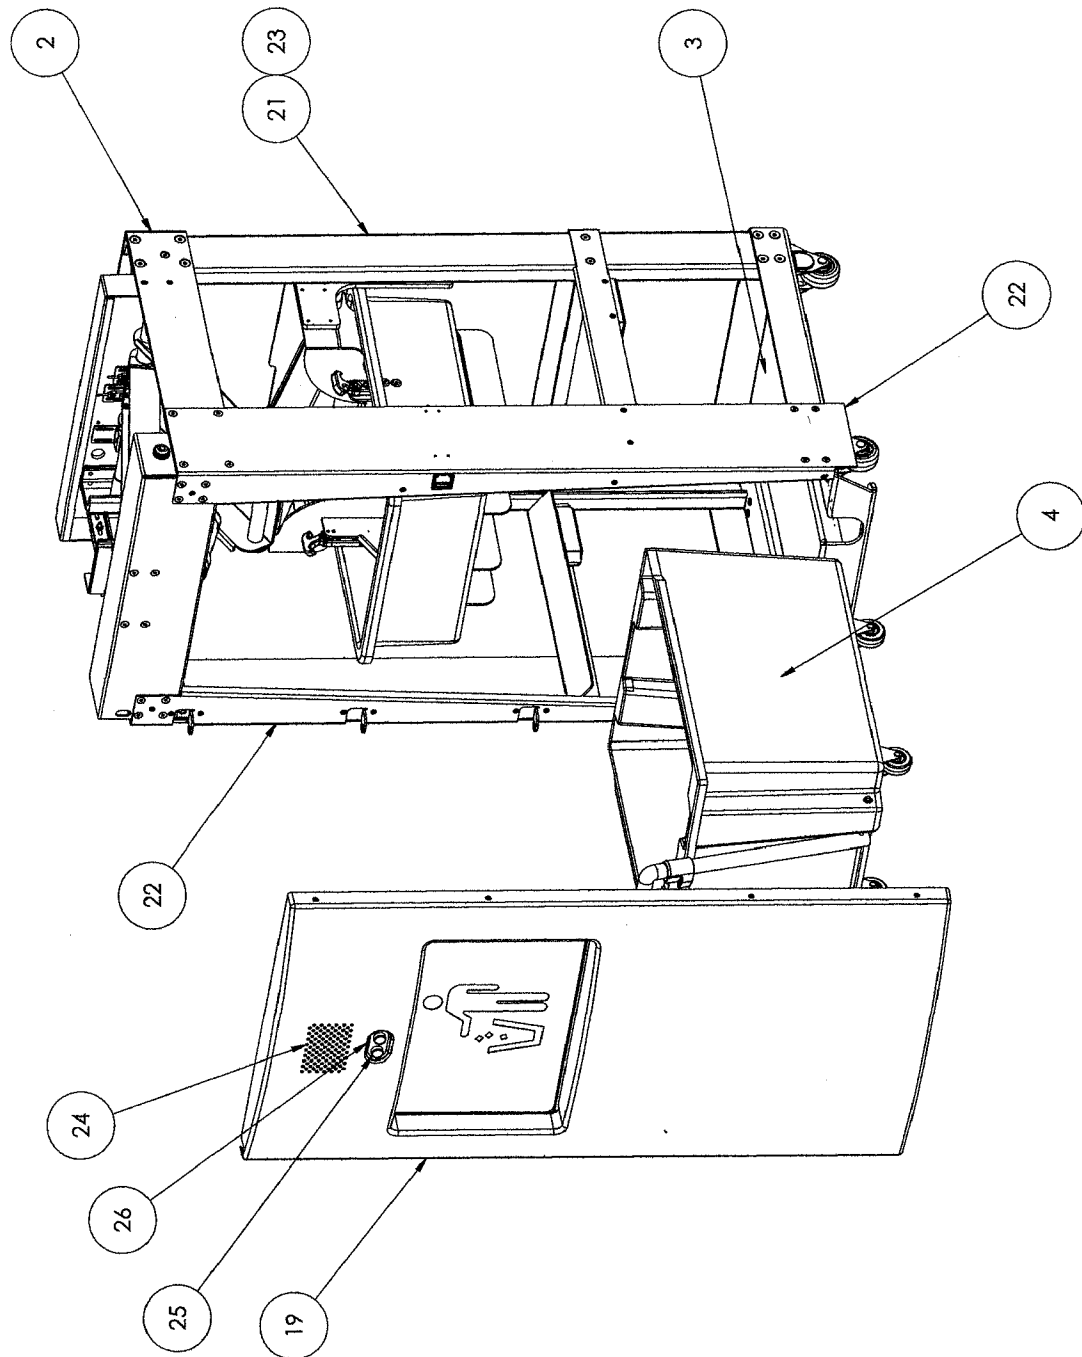


FIG. 2

FIG. 4A

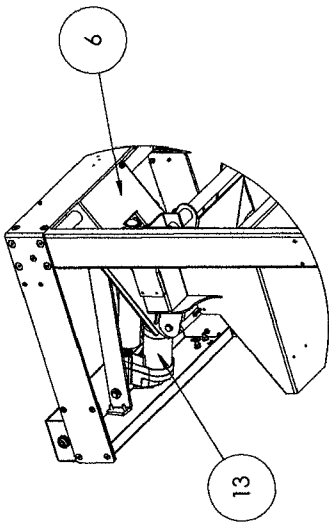


FIG. 4

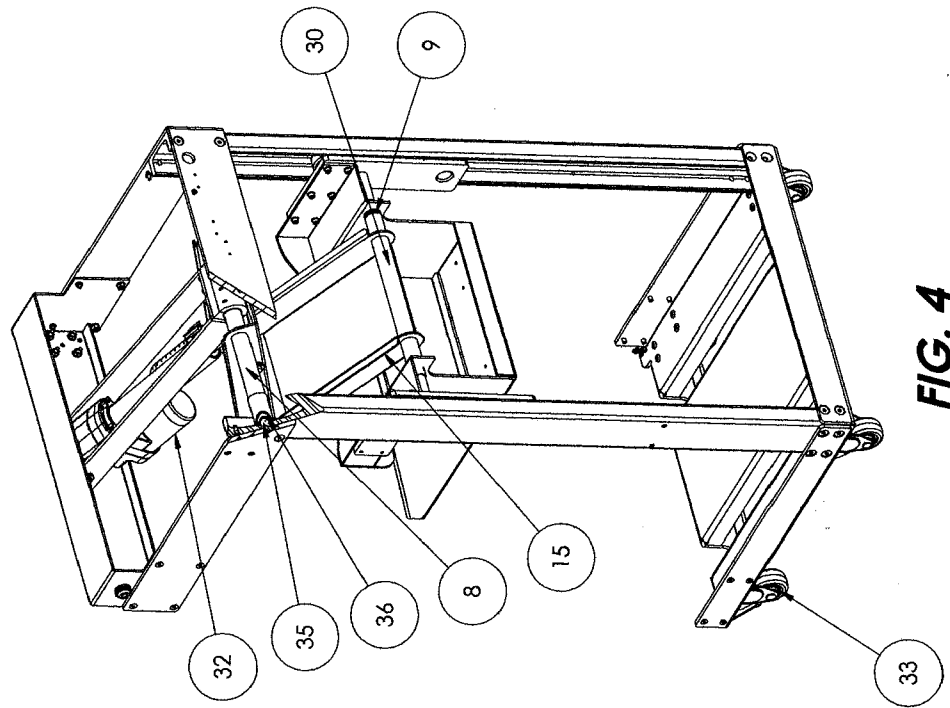


FIG. 3A

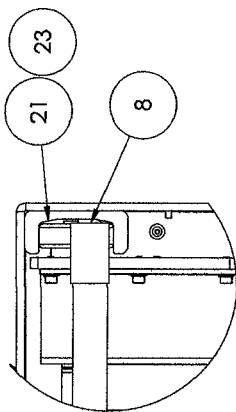
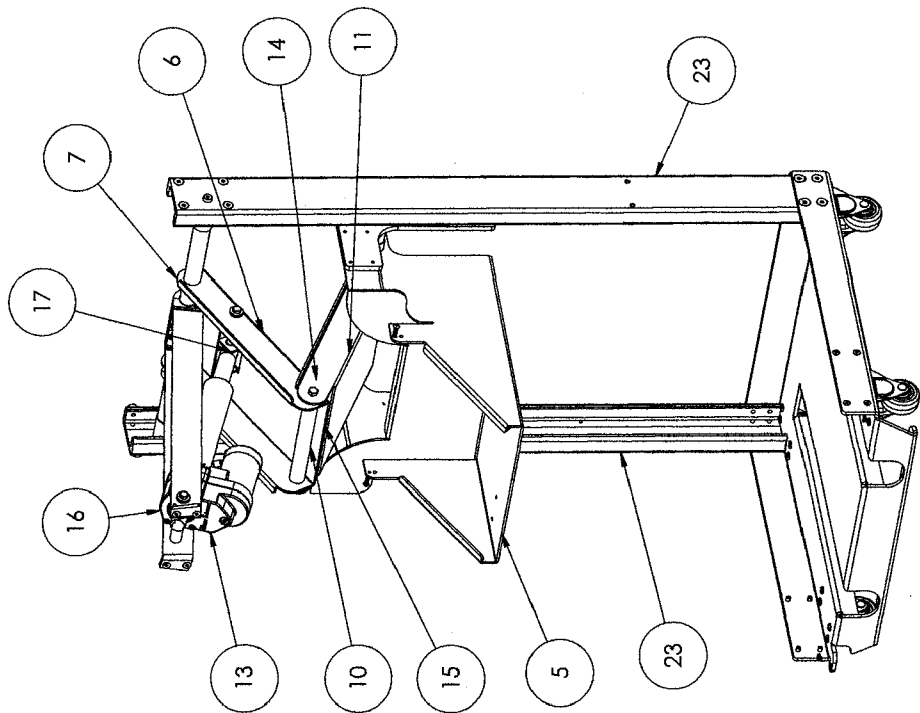


FIG. 3



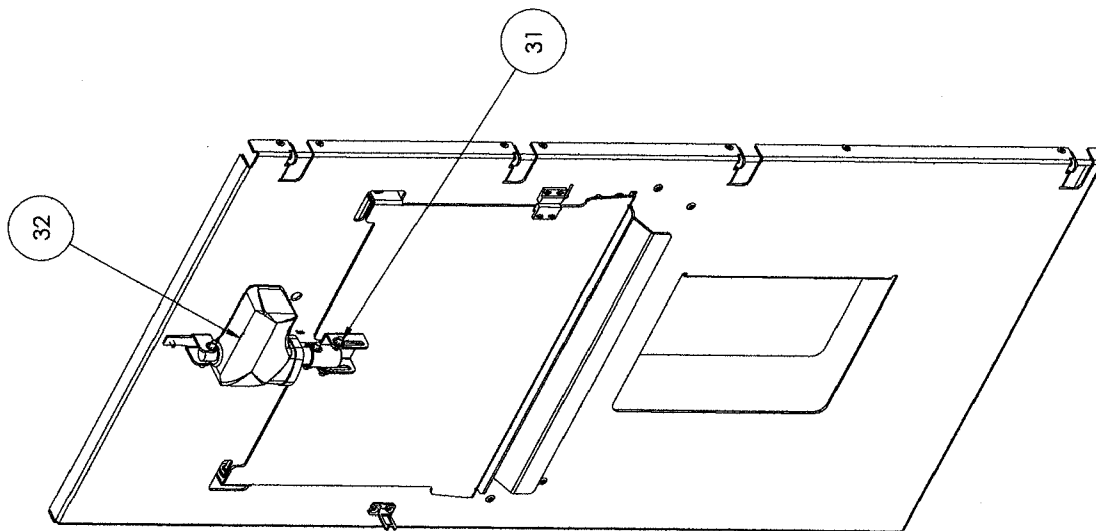


FIG. 6


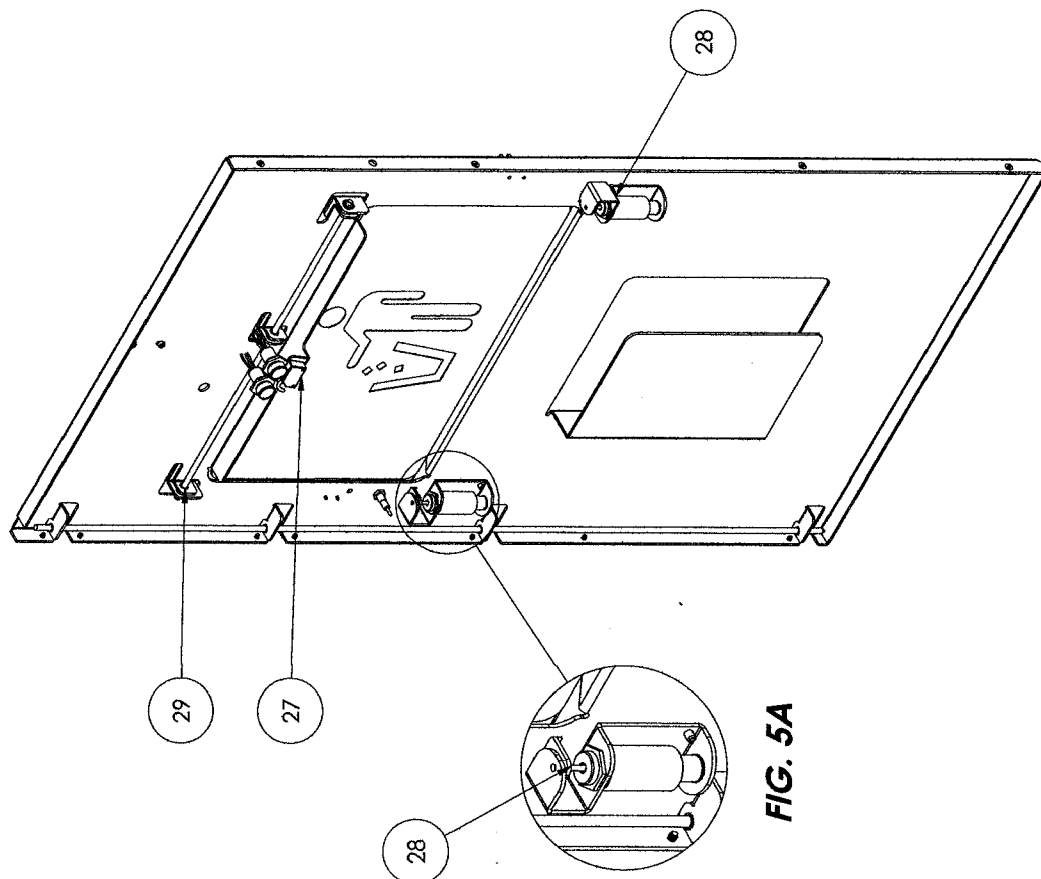


FIG. 5

FIG. 5A

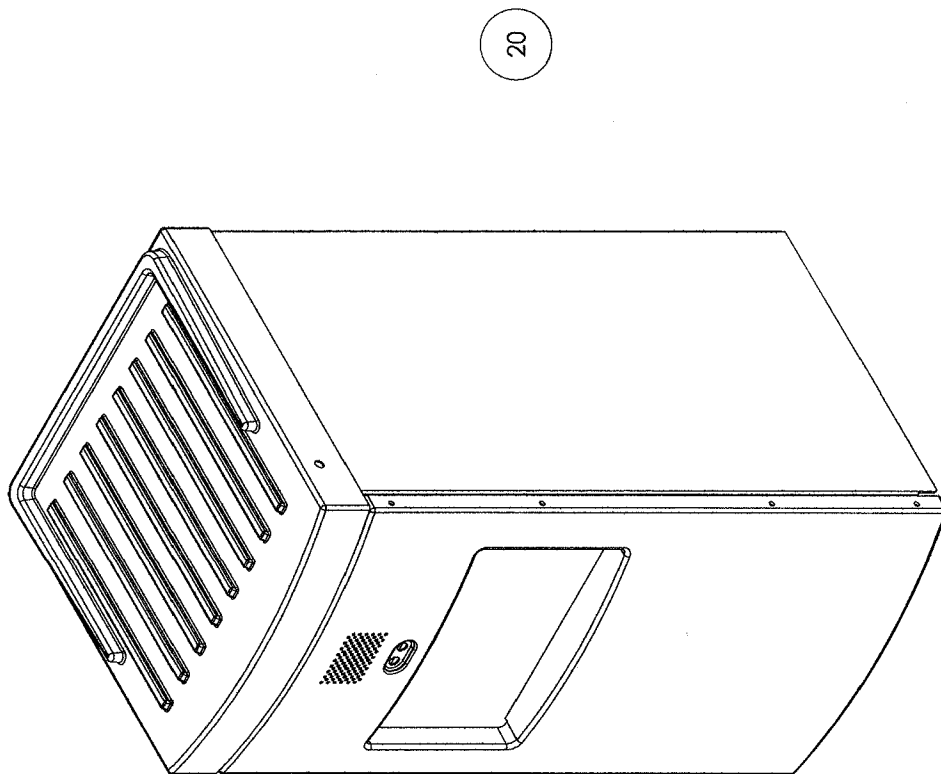

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2012/034368

A. CLASSIFICATION OF SUBJECT MATTER B65F 1/10 (2006.01) B30B 1/02 (2006.01) B30B 9/30 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
B65F 1/00, 1/10, B30B 1/00, 1/02, 15/00, 15/04, 15/06, 9/00, 9/30		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
PATSEARCH, RUPAT, Esp@cenet, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/0314169 A1 (ALIGNEX, INC) 24.12.2009, claims, fig. 5, 9, 12	1-2
A	US 5042374 A (FRANK H. KLEPACKI) 27.08.1991, fig. 1	1-2
A	RU 2018449 C1 (BERGMANN HAINZ) 30.08.1994	1-2
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
02 July 2012 (02.07.2012)		05 July 2012 (05.07.2012)
Name and mailing address of the ISA/ FIPS Russia, 123995, Moscow, G-59, GSP-5. Berezhkovskaya nab., 30-1		Authorized officer
Facsimile No. +7 (499) 243-33-37		S.G.Grinevskaya
		Telephone No.