



- (51) International Patent Classification:
H05B 37/02 (2006.01)
- (21) International Application Number:
PCT/IB2014/060412
- (22) International Filing Date:
4 April 2014 (04.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/810,774 11 April 2013 (11.04.2013) US
- (71) Applicant: **KONINKLIJKE PHILIPS N.V.** [NL/NL];
High Tech Campus 5, NL-5656 AE Eindhoven (NL).
- (72) Inventors: **SHRUBSOLE, Paul Anthony**; c/o High Tech
Campus, Building 5, NL-5656 AE Eindhoven (NL). **SIN-
ITSYN, Alexandre Georgievich**; c/o High Tech Campus,
Building 5, NL-5656 AE Eindhoven (NL).
- (74) Agents: **VAN EEUWIJK, Alexander Henricus Walterus**
et al.; High Tech Campus, Building 5, NL-5656 AE Eindh-
hoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: USER INTERFACE WITH ADAPTIVE EXTENT OF USER CONTROL BASED ON USER PRESENCE INFORMATION

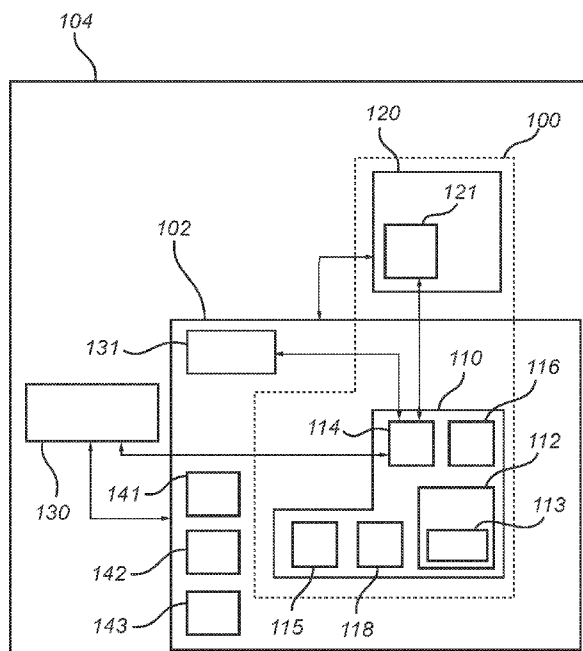


Fig. 1

(57) Abstract: A control device (110) for controlling the environment in a region (102) within a structure (104) by means of controlling operation of a control system (120), which is adapted to adjust at least one property of the environment in the region (102), is disclosed. The control device comprises a user interface (112) adapted to selectively indicate to a user a range of available values representing at least one property of the environment in the region (102) that is adjustable by the control system (120) at least based on presence information of any persons being present within the region (102) such that the extent of control of the environment in the region (102) by means of the control device (120) that is thereby enabled the user is based at least partly on the presence information.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

User interface with adaptive extent of user control based on user presence information

FIELD OF THE INVENTION

The present invention generally relates to control devices. Specifically, the present invention relates to a control device for controlling the environment in a region within a structure by means of controlling operation of a control system adapted to adjust at least one property of the environment in the region. The present invention further relates to a user interface for such a control device. The structure may for example comprise a building. The region may for example comprise one or more rooms in a workplace such as an office or in a home.

BACKGROUND OF THE INVENTION

Offices, in particular open plan offices, generally offer limited individualized or personal control of the office environment in terms of e.g. lighting, heating, ventilation, etc., for the respective office workers or users. At the same time, there are studies which have indicated that users wish to feel in control of their environment, which if achieved may possibly result in an increase in their wellbeing and productivity. For example, studies carried out in the past decades in the fields of environmental psychology, energy efficient lighting, and building automation indicate that there is a significant variation in user preferences with respect to lighting, heating, ventilation, etc., within the workplace or office. However, little is in general offered to office workers in terms of individualized or personal control since, particularly in the case of open plan offices, local changes in properties of the environment in the office by one office worker may negatively affect the (perceived) comfort of other office workers in the office, who may possibly have different preferences with respect to lighting, heating, cooling, ventilation, etc., within the office. Furthermore, applications such as energy saving automation solutions (e.g. so called building automation systems), which are constructed so as to in principle be able to provide a certain degree or extent of energy saving, have been shown to be possibly less optimal with respect to saving energy in practice. One of the reasons for this is because such applications generally do not take into account personal comfort and satisfaction of occupants at the locations where the applications are installed. For example, people may deliberately try to sabotage or override the default

automatic behavior of such applications because they feel that their own comfort is being compromised by the default automatic behavior of the applications.

With the advent of new and improved technologies for varying properties of the environment in a region e.g. in an office or a home, users may wish to have more control of his or her environment e.g. so as to be able to create a variety of different atmospheric scenes. This development may lead to an increased complexity in user interfaces for controlling the environment in the region. For example, an increased complexity in user interfaces for home control systems (e.g. for so called smart homes) has been observed. One approach for mitigating the increased complexity in the user interfaces is to offer the user a relatively large freedom to choose the desired atmospheric scene by permitting the user to control relatively low-level parameters or properties such as light intensity, temperature, speed of fan rotation, etc. Another approach is to pre-program settings for the most common or used atmospheric scenes, such as in SchoolVision and Dynalite systems provided by Philips.

By way of example, WO 2010/143089 A1 discloses systems and apparatus for deriving, modifying and sharing personal preferences applicable to controllable lighting networks.

SUMMARY OF THE INVENTION

However, there is still a need in the art for an improved way to provide personal or individualized control of the environment in a region within a structure. There is further a need in the art for reducing the complexity of user interfaces in control systems for controlling the environment in a region within a structure, which control systems for example may include office or home control systems.

In view of the above discussion, a concern of the present invention is to provide a user interface and a control device which are capable of providing improved personal or individualized control of the environment in a region within a structure as compared to known user interfaces and control devices.

A further concern of the present invention is to provide a user interface for use in controlling the environment in a region within a structure, which user interface exhibits a reduced complexity as compared to known user interfaces.

A further concern of the present invention is to provide a user interface for use in controlling the environment in a region within a structure, which user interface is easier to use as compared to known user interfaces.

To address at least one of these concerns and other concerns, a control device, a user interface and a system in accordance with the independent claims are provided. Preferred embodiments are defined by the dependent claims.

According to a first aspect of the present invention, there is provided a control device for controlling the environment in a region within a structure by means of controlling operation of a control system adapted to adjust at least one property of the environment in the region. The control device comprises a user interface, which is adapted to selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system, and enable the user to control the represented at least one property, whereby the control device is provided with user input. The control device comprises a communication unit adapted to adjust the at least one property by means of communicating a control signal corresponding to the user input to the control system. The user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system at least based on presence information of any persons being present within the region such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

According to a second aspect of the present invention, there is provided a user interface for a control device, which is for controlling the environment in a region within a structure by means of controlling operation of a control system adapted to adjust at least one property of the environment in the region. The user interface is adapted to selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system, and enable the user to control the represented at least one property, whereby the control device is provided with user input. The control device is adapted to adjust the at least one property by means of communicating a control signal corresponding to the user input to the control system. The user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system at least based on presence information of any persons being present within the region such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

The level of user control of the environment in the region that is provided by the user interface can hence be adapted based at least partly on the presence information of

any persons being present within the region, i.e. presence information of the user and/or any other persons possibly being present within the region. For example, the amount, type and/or numerical range of control options that are indicated to the user by the user interface can be controllably selected based at least partly on the presence information of any persons being present within the region.

In a case where there are several users in the region, and where each user has a control device such as described above, by adapting the level of user control of the environment in the region that is provided by the user interfaces of the respective control devices based at least partly on the presence information of any persons being present within the region, there may be no single user or person within the region that is dominating or owning full control of the environment in the region. Rather, the level of user control of the environment in the region for each user may be set so as to provide a balance between a desire of the users to have personal or individualized control of the environment in the region and the possibly different preferences of the different users with respect to properties of the environment in the region. Hence, by adapting the level of user control of the environment in the region that is provided by the user interface, based at least partly on the presence information of any persons being present within the region, presence information of any other users possibly being located within the region may influence the scope of available control actions for each user for controlling the environment in the region.

By adaptation of the level of user control of the environment in the region that is provided by the user interface, based at least partly on the presence information of any persons being present within the region, the control device and user interface may facilitate or enable a more flexible approach to personal or individualized control of properties of the environment of the region by means of the adaptive user interface, which e.g. may offer greater extent of control of properties of the environment when other persons (other than the user) are not present in the region or located relatively far from the user within the region. Presence, location and/or other contextual information within the region may be utilized for rendering or creating the user interface, in order to enable control the control system, e.g. so as to enable controlling lighting, shading, heating, air quality and/or air circulation, etc., locally and/or globally within the region. At the same time, by adaptation of the level of user control of the environment in the region that is provided by the user interface, based at least partly on the presence information of any persons being present within the region, the user may be presented with mostly or only the most relevant or meaningful control options via the

user interface. Thereby, the complexity of the user interface may be reduced, which in turn may facilitate or enable avoiding the user being overburdened with control options.

Principles of embodiments of the present invention will now be described with reference to an example where the user is an office worker wishing to adjust temperature within a region, which according to the example is one or more rooms in an office.

To begin with, the user enters the office and occupies a workspace (e.g. the user sits down at a desk).

Next, the user may prefer warmer conditions than the default conditions in the office which govern temperature in the office, and therefore wishes to increase the temperature globally or at least close to the user by a few °C, e.g. by 4 °C, in order to feel more comfortable.

The user activates the control device, which may e.g. be a personalized building control interface in a smartphone or laptop.

The user interface of the control device is generated with control options that are dynamically populated based on the presence and/or location of the user and/or of any other persons possibly being located in the office. The location of the user may be determined for example by means of a laptop docking location or by means of a position determined by the smartphone, as known in the art.

If occupancy of neighboring regions of the user is relatively low, the user interface can be dynamically adapted so as to provide a relatively high possible set-point for the temperature close to the user's location, otherwise the user interface can be dynamically adapted so as to provide a set-point for the temperature close to the user's location that is only at or substantially at an average expected value for the desired temperature in the office, e.g. for energy saving.

The same of similar principles may apply to cases where the user wishes to adjust other properties of the environment in the region (e.g. an office), e.g. lighting properties, air circulation properties, etc.

The control device may itself be located within the region, such as at a location within the region that is associated with or corresponding to the user of the control device, e.g. at a desk or workspace assigned to the user.

In the context of the present application, by the extent of control of the environment in the region (by means of the control device) that is enabled the user being based at least partly on the presence information, it is meant that the level of user control of the environment in the region that is provided by the user interface, e.g. by selective

population of the user interface with a controllable amount of control options, is based at least partly on the presence information.

A relatively high extent of control of the environment may entail that the user is enabled to control both aspect(s) of the environment in the region close to or at the user's location as well as aspect(s) of the environment in the region further away from the user's location, while a relatively low extent of control of the environment may entail that the user is enabled to control only aspect(s) of the environment in the region close to or at the user's location.

In alternative or in addition, a relatively high extent of control of the environment may entail that the user is enabled to control a property or properties of the environment in the region within a relatively wide range of available values, e.g. about an expected or average value, representing the property or properties of the environment of the region, while a relatively low extent of control of the environment may entail that the user is enabled to control a property or properties of the environment in the region only within a relatively narrow range of available values, e.g. about an expected or average value, representing the property or properties of the environment of the region.

In alternative or in addition, a relatively high extent of control of the environment may entail that the user is enabled to control relatively many different types of properties of the environment in the region, e.g. including properties relating to lighting, thermal conditions, sound level, humidity, and/or air circulation in the region, while a relatively low extent of control of the environment may entail that the user is enabled to control only a relatively small number of different types of properties of the environment in the region.

For example with respect to controlling lighting within the region, when there is a relatively large number of persons other than the user located within the region, the user may be limited to adjusting (local) task lighting and possibly some overhead lighting above the user's location, e.g. with respect to brightness, whereas when there are fewer persons other than the user located within the region, the control options with respect to lighting for the user may be increased, e.g. so as to enable adjusting lighting conditions further away from the user and/or to enable adjusting a wider range of lighting aspects such as brightness, glare, color temperature, and/or intensity, etc. of natural or artificial light within the region.

The user interface may for example be configured to adapt the number, and/or type of properties, and/or the range of available values of the respective properties which are indicated to the user by the user interface, at least based on the presence information.

The control device may for example include or be constituted by a laptop, a mobile telephone such as a so called ‘smartphone’, and/or some other type of user device or wireless transmit/receive unit.

In the context of the present application, by a smartphone it is meant a mobile
5 telephone built on a mobile operating system having functionality that may include one or several of a portable media player, an imaging device such as a digital camera, a Global Positioning System (GPS) navigation unit, etc., combined with the functionality of a mobile telephone. Smartphones may include a user interface e.g. including a touch-sensitive screen or the like, capable of displaying e.g. web browsers that can display standard web pages as
10 well as web pages optimized for viewing by a mobile device, and be capable of transmitting and receiving signals, data, etc., e.g. by means of Wi-Fi. The mobile operating systems used by a smartphone may include Android from Google, iOS from Apple, Symbian from Nokia, BlackBerry OS from RIM (“Research in Motion”), etc.

The indication by the user interface may for example be visual, auditory,
15 tactile, or any combination thereof. Hence, the user interface may be adapted to, visually, tactilely and/or auditory, selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system.

The user interface may for example include or be constituted by a graphical user interface, a web-based user interface (e.g. a user interface which accepts input and
20 provides output by generating web pages which are transmitted via the Internet and viewed by the user e.g. using a web browser program), and/or a touch screen (e.g. based on capacitive or resistive techniques), as known in the art. This list of user interfaces is not exhaustive and the user interface may be of any appropriate type.

The region, or space, may be an at least partially bounded or enclosed region
25 such as one or more rooms in the structure, which one or more rooms may be shared by several persons possibly including the user of the user interface and/or the control device.

The region may for example located in a building. The control system may include a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building. In the following, embodiments of the present invention
30 are described mainly with reference to an example where the region is located in a building and e.g. includes, or is constituted by, one or more rooms in the building. The one or more rooms may for example be one or more offices, one or more rooms in a home, or one or more rooms in a public region. However, it is to be understood that this example is merely for describing principles of embodiments of the present invention and is not to be considered as

limiting the present invention. Rather, the present invention encompasses cases where the region is not necessarily located in a building, and possibly being included in, or constituted by, one or more rooms in the building. For example, the region may for example be included in a vehicle or a non-building structure such as a factory, a warehouse, a power station, a refinery, etc.

The control system may be adapted to control for example lighting, heating, cooling and/or air circulation in the region. The at least one property of the environment in the region may for example include at least one lighting property, at least one thermal property, at least one acoustic property, humidity and/or an air circulation property. The control system may for example include a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building.

The presence information may for example include information on presence of any persons being present within the region.

In alternative or in addition, the presence information may include information on location of any persons being present within the region. The location of a person present within the region may be 'physical', e.g. so as to constitute the actual physical location of a particular user or person within the region. In alternative or in addition, the location of a person present within the region may be 'logical', e.g. being constituted by a location of a work region and/or desk within the at partially enclosed region belonging or corresponding to a particular user or person.

In alternative or in addition, the presence information may include information on identity of any persons being present within the region. The presence information may hence include information identifying a particular user or person being present within the region.

In alternative or in addition, the user interface may be adapted to controllably indicate to a user a range of available values representing at least one property of the environment in the region, which at least one property is adjustable by the control system.

Information other than the presence information may be utilized in the selective, and/or possibly controllable, indication by the user interface to the user of a range of available values representing at least one property of the environment in the region that is adjustable by the control system. The extent of control of the environment in the region by means of the control device that is enabled the user may hence be based on additional information other than the presence information. The further information may for example include current properties or history of properties (e.g. sensed properties) of the environment

in the region, properties of the environment exterior to the region (e.g., weather conditions), information on activity of any person present within the region (e.g. tasks that are performed by persons present within the region, or motion or posture, etc., of any person present within the region), etc. This list is not exhaustive. Any such further information may be sensed by appropriate sensing means, which for example may be included in the control system.

According to an example, the indication by the user interface to the user of a range of available values representing at least one property of the environment in the region that is adjustable by the control system may be further based on signaling or indications received from devices which are adapted to adjust properties of the environment in the region (these devices e.g. being included in the control system). By way of example, light sources arranged to provide illumination within the region may be adapted to emit so called coded light, e.g. modulated light, for carrying information. Modulation of light may for example be with respect to frequency, amplitude, etc.

An example scenario could be as follows. A light source, e.g. a ceiling luminaire, capable of providing task lighting may be controlled via an augmented display application that can be executed in or indicated by the user interface of the control device, e.g. the display screen on a smartphone, using coded light. For example, the user may view the ceiling luminaire on the user interface (or display screen of the smartphone, e.g. using the smartphone's built-in camera). Based on coded light received by the control device, e.g. by the communication unit, from the ceiling luminaire, the user interface may be adapted so as to indicate an overlay of a visualization of the control possibilities of the ceiling luminaire, e.g. superposed a view of the ceiling luminaire on the user interface, by means of identification of the ceiling luminaire using the received coded light. When the user views a light source capable of transmitting coded light that is associated with or corresponds to the user (e.g. a light source that is intended mainly for use by the user), the user interface may provide an extent or range of control options for lighting properties of the light source that may be limited to the user's local environment only in case presence of one or more persons within the region relatively close to the user is detected, or be more extensive in case no presence of one or more persons close to the user is detected. When the user views a light source capable of transmitting coded light that is associated with or corresponds to another user and/or is located relatively far from the user, the user interface may provide an extent of control options for lighting properties of that other light source which may be relatively low in case presence of one or more persons relatively close to that other light source is detected,

or relatively high in case no presence of one or more persons relatively close to that other light source is detected.

The extent of control of the environment in the region by means of the control device that is enabled the user by the indication by the user interface to the user of a range of available values representing at least one property of the environment in the region that is adjustable by the control system may be greater the lower the number of persons being present within the region, e.g. the lower the number of persons being present within a predefined distance from the user. For example in an office environment, the extent of control of the environment in the region by means of the control device that is enabled the user may be greater the smaller the number of people or persons currently occupying the desks or workspaces neighboring the user's own desk or workspace.

The communication unit may be adapted to receive a signal from a presence information sensor unit indicative of the presence information. The presence information sensor unit may be adapted to determine the presence information.

The presence information sensor unit may be arranged in the control device. Hence, the control device may in alternative or in addition comprise a presence information sensor unit adapted to determine the presence information. In alternative or in addition, the presence information sensor unit may be arranged separately from the control device, which presence information sensor unit may communicate the sensed presence information to the control device e.g. via the communication unit of the control device.

The presence information sensor unit may for example comprise a presence or motion sensor. Presence or motion detectors or sensors may use different techniques for detecting presence or motion. Examples include but are not limited to Passive Infrared detectors, Ultrasonic motion detectors, detectors based on a combination of Passive Infrared and Ultrasonic techniques, and camera-based sensors. Further examples include detectors based on radar, sound and pressure. For example in a case where the region is an office, the presence information sensor unit may include pressure sensors arranged e.g. in office chairs of the office workers, which pressure sensors can detect if persons are sitting in their respective office chairs.

In alternative or in addition, the presence information sensor unit may for example include, be constituted by, or be based on, a so called active badge system or the like, such as described for example in R. Want *et al.*, "The Active Badge Location System", Journal ACM Transactions on Information Systems, volume 10, issue 1, January 1992, pages 91-102. Such an active badge system may be used to detect presence and location of people

e.g. in an office environment, by means of badges or tags worn by the people, which badges or tags can periodically emit pulse-width modulated infrared signals, which are sensed by a plurality of infrared sensors located within the environment and which are capable of sensing infrared signals. Reference is made to the above-mentioned paper by R. Want *et al.*, which is
5 incorporated herein in its entirety.

In alternative or in addition, for example where the region is located in an office environment or the like, the presence information sensor unit may for example be coupled to or in communication with a communication network (e.g., a local area network, LAN) connecting user devices of the office workers in a wired or wireless fashion (e.g., by
10 means of a wireless LAN, WLAN) and be adapted to determine location and/or identity of persons in the region by sensing whether persons have logged into their respective user devices, or if usage of the respective user devices have been detected e.g. within a predefined period. For example, the presence information sensor unit may be adapted to sense whether office workers have inserted their respective user devices into docking stations associated
15 with or corresponding to the respective office workers. The user devices may for example be or include laptops, mobile telephones such as smartphones, etc. According to another example, the presence information sensor unit may be adapted to sense a position of the office workers within the region (e.g. one or several office rooms) by retrieving signals from their respective user devices indicating the location of the respective user devices. For
20 example, the user device, e.g. a smartphone, may include an application adapted to determine its location e.g. based on Global Positioning System (GPS), Wi-Fi (e.g. based on received signal strength indication, RSSI), Bluetooth, and/or Radio Frequency Identification (RFID) means, etc.

In alternative or in addition, the control device, or the communication unit,
25 and/or the user interface may be arranged so as to be able to receive user input indicating presence information. Hence, the presence information may, in alternative or as a complement, be manually input by a user of the user interface and/or the control device.

The user interface may be adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is
30 adjustable by the control system further based on preferences of any persons being present within the region for properties of the environment in the region that are adjustable by the control system.

For example, the user interface may be adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the

region that is adjustable by the control system further based on a comparison of preferences of the user for properties of the environment in the region that are adjustable by the control system with preferences of any other persons being present within the region, possibly any persons within a predefined distance from the user and/or any persons within a predefined sub-region in the region, for properties of the environment in the region that are adjustable by the control system.

For example in a case when the presence information indicates that there is a particular, possibly predefined, number of persons neighboring the user or control device, and where all of these neighbors have a preference for lower (or higher) temperatures than an average or predefined or nominal temperature in the region, the user interface may allow the user greater extent of control of temperature in the room or region, at least close to the neighboring persons' locations, e.g. within a temperature interval just below (or above) the average or predefined temperature value. This could be especially relevant e.g. in flexible workplace environments, where the workers have not been assigned workspaces at fixed locations but where the locations at where the users work may vary with time, e.g. from day to day.

In general, in case the presence information indicates that there is a particular, possibly predefined, number of persons neighboring the user or control device, and where the user and the neighboring person(s) share a similar range of preference for one or more properties of the environment in the region, the user interface may allow the user a greater extent of control of the environment in the region by means of the control device with respect to the one or more properties of the environment in the region for which the user and the neighboring persons share a similar range of preference. For example in an office environment or scenario, the user and a person occupying the workspace neighboring the user's workspace may both have a preference for a higher temperature than an average or nominal temperature. The user interface may then be adapted so as to allow the user a greater extent of control of temperature in the region, at least close to the locations of the user and the person occupying the workspace neighboring the user's workspace, e.g. within a temperature interval above the average or nominal temperature value. Generally, in case the user and a person occupying the workspace neighboring the user's workspace both have a certain preference for a particular property of the environment in the region, the user interface may allow the user a greater extent of control of the environment in the region by means of the control device with respect to the property of the environment in the region when other persons (who possibly may not have the same preference for the particular

property of the environment in the region) are not present within the region or at least are located relatively far from the user and the other person.

Information on preferences of persons present within the region may be previously determined or predefined and stored in a memory in the control device. In
5 alternative or as a complement, the information may be manually input by a user of the user interface and/or the control device and/or received by the communication unit, e.g. from a database where the information is stored.

The control device may comprise an estimation unit adapted to estimate an effect on the environment in the region of a selection of a chosen value in the range of
10 available values representing at least one property of the environment in the region indicated to the user by the user interface.

In other words, the estimation unit may estimate an effect on the environment in the region that would be the result, or that would be anticipated, in case the user would select a particular value, or values, in the range of available values representing at least one
15 property of the environment in the region that is indicated to the user by the user interface.

The user interface may be adapted to indicate the effect estimated by the estimation unit to the user. Hence, so called 'feed-forward information' may be provided in the user interface to illustrate the impact on the environment in the region resulting from particular user input that the user plans or foresees to provide to the control device. For
20 example, such feed-forward information may be used to illustrate the impact of certain user input on any other persons within the region. For example in a case where the region is located in a building and the control system includes a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building, and the user is located at or nearby a window, if the user wishes to control blinds at the window (by
25 means of controlling operation of the control system) the user interface may render an effect of decreased light intensity and/or brightness for any other persons situated further away from the window that would be expected as a result from the intended control of the blinds.

The estimation of an effect on the environment in the region by the estimation unit may for example be based on a model for predicting possibilities of effects on the
30 environment in the region resulting from user input planned or foreseen to be provided to the control device via the user interface. With respect to an example of adjusting lighting properties in the region, the model may for example be created in connection to commissioning of a lighting system for providing illumination within the region. For example with respect to an office environment, the installer of the lighting system may for

example map lighting effects that a plurality of light sources in the lighting system are able to provide to work plane illuminance at different workspaces or desks within the region.

For the estimation of an effect on the environment in the region, the estimation unit may in alternative or in addition for example utilize a (self-)learning system, or machine
5 learning system, in order to estimate the effect, e.g. using historical sensed data generated by sensors capable of sensing properties of the environment in the region, possibly at runtime.

The presence information may include identity information identifying at least the user within the region.

The user interface may be adapted to selectively indicate to the user a range of
10 available values representing at least one property of the environment in the region that is adjustable by the control system further based on the identity information identifying the user.

Thus, the level of user control of the environment in the region that is provided by the user interface may be personalized, e.g. so as to be based (further) on control
15 privileges of the user. The control privileges may be predefined.

The control device may comprise a memory unit adapted to store data e.g. relating to the user's usage of the control device.

The user interface may be adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is
20 adjustable by the control system further based on at least some of the data stored in the memory unit.

The data relating to the user's usage of the control device may relate to intended use, e.g. include preferences of the user for certain settings of the available values representing at least one property of the environment in the region that is adjustable by the
25 control system, and/or past use, e.g. be derived from usage data gathered during prior operation of the control device by the user.

According to a third aspect of the present invention, there is provided a system comprising a control system, which is adapted to adjust at least one property of the environment in a region within a structure, and a control device according to the first aspect
30 of the present invention for controlling the environment in the region by means of controlling operation of the control system.

The region may for example be a region within a building. Thus, the structure may for example be a building.

The control system may for example include a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building, as known in the art.

5 The control system may for example be adapted to control lighting, heating, cooling, humidity, sound level and/or air circulation in the region, wherein the at least one property of the environment in the region includes at least one lighting property, at least one thermal property, at least one acoustic property, humidity, and/or at least one air circulation property.

10 The at least one lighting property may for example include brightness, glare, color temperature, and/or intensity, etc. of natural or artificial light within the region. The at least one thermal property may for example include a temperature at or close to a specified location within the region (e.g. the user's location) or a temperature distribution within the region. The at least one air circulation property may for example include a measure of the volume of air in the region that is exchanged with the exterior of the region in a given period
15 of time.

To effect changes in the at least one light property, the control system may for example include a light dimmer, a wavelength filter, a color temperature filter, and/or adjustable light-blocking means such as blinds, etc., as known in the art, which may be used to modify properties of natural or artificial light within the region. Artificial light within the
20 region may be generated e.g. by means of a plurality of light sources, which for example can include light emitting diodes (LEDs). The control system may be adapted to selectively switch the light sources on and off. Each of the plurality of light sources may have light emission characteristics that are controllable (e.g. via the control system), e.g. with respect to intensity, color, color temperature, brightness, etc., of light emitted therefrom.

25 The positions of the plurality of light sources within the region may be communicated to the control device, or the communication unit, from the control system (e.g. including a building management system).

The user interface may be adapted to indicate a 'map' of the light sources within the region, and possibly lighting effects and/or capabilities of the respective light
30 sources, based on the position and type and/or light emission characteristics of the respective light sources. The extent of control of the environment in the region by means of the control device that is enabled the user may further be based on, in addition to the presence information, information on position, type and/or light emission characteristics of the respective light sources as determined by the control system.

To effect changes in air circulation the control system may for example include ventilation equipment or be coupled to ventilation equipment permitting control of ventilation in the region. To effect changes in humidity the control system may for example include a dehumidifier.

5 According to a fourth aspect of the present invention, there is provided a computer program product adapted to be executed in a processing unit of a control device, which control device is for controlling the environment in a region within a structure by means of controlling operation of a control system adapted to adjust at least one property of the environment in the region. The control device comprises a user interface adapted to
10 selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system, and enable the user to control the represented at least one property, whereby the control device is provided with user input. The control device may comprise a communication unit adapted to adjust the at least one property by means of communicating a control signal corresponding to the user
15 input to the control system. The processing unit can be coupled to the user interface. The computer program product comprises computer-readable means carrying computer program code configured to, when executed in the processing unit, based at least on presence information of any persons being present within the region, cause the user interface to selectively indicate to the user a range of available values representing at least one property
20 of the environment in the region that is adjustable by the control system, such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

Further objects and advantages of the present invention are described in the following by means of exemplifying embodiments.

25 It is noted that the present invention relates to all possible combinations of features recited in the claims. Further features of, and advantages with, the present invention will become apparent when studying the appended claims and the following description. Those skilled in the art realize that different features of the present invention can be combined to create embodiments other than those described in the following.

30 BRIEF DESCRIPTION OF THE DRAWINGS

Exemplifying embodiments of the invention will be described below with reference to the other accompanying drawings.

Fig. 1 is a schematic block diagram of a system illustrating embodiments of the present invention.

Fig. 2 is a schematic view of computer-readable means, or computer-readable storage mediums, according to embodiments of the present invention.

5

DETAILED DESCRIPTION

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which exemplifying embodiments of the present invention are shown. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided by way of example so that this disclosure will convey the scope of the invention to those skilled in the art.

10

In the following, embodiments of the present invention are described with reference to an example according to which the region is located in a building and includes, or is constituted by, one or more rooms in the building, and where the one or more rooms are one or more office rooms. However, it is to be understood that this example is merely for describing principles of embodiments of the present invention and is not to be considered as limiting for the present invention. Rather, the present invention encompasses cases where the region is not necessarily located in a building, and where the region is not necessarily included in, or constituted by, one or more rooms (such as office rooms) in the structure.

15

20

Referring now to Fig. 1, there is shown a schematic block diagram of a system 100 according to an embodiment of the present invention. It is to be understood that the block diagram depicted in Fig. 1 is schematic and not drawn to scale, and is for illustrating principles of embodiments of the present invention.

The system 100 shown in Fig. 1 comprises a control system 120, which is adapted to adjust at least one property of the environment in a region 102 within a structure 104. The system 100 comprises a control device 110, which is adapted to control the environment in the region 102 by means of controlling operation of the control system 120 (as indicated in Fig. 1 by the arrows between the control system 120 and the region 102, and by the arrows between the control device 110 and the control system 120, respectively). The control device 110 comprises a user interface 112.

25

30

For example in a case where the structure 104 is a building, the control system 120 may e.g. include a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building, as known in the art. The control

system 120 may for example be adapted to control lighting, heating, cooling, humidity, sound level and/or air circulation within the region 102. Accordingly, the at least one property of the environment in the region 102 that is adjustable by the control system 120 may for example include at least one lighting property, at least one thermal property, at least one acoustic property, humidity, and/or at least one air circulation property of the environment in the region 102.

The user interface 112 is adapted to selectively indicate to a user (not shown in Fig. 1) a range of available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120. The user interface 112 is adapted to enable the user to control the represented at least one property, whereby the control device 110 is provided with user input.

The control device 110 comprises a communication unit 114 which is adapted to adjust the controlled at least one property by means of communicating one or more control signals corresponding to the user input to the control system 120. The communication unit 114 may be integrally arranged in the user interface 112.

The user interface 112 is adapted to selectively, and/or possibly controllably, indicate to the user a range of available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120 at least based on presence information of any persons (not shown in Fig. 1) being present within the region 102, such that the extent of control of the environment in the region 102 by means of the control device 110 that is thereby enabled the user is based at least partly on the presence information.

In accordance with the embodiment depicted in Fig. 1, the control device 110 may include a control and/or processing unit 113. In Fig. 1 the control and/or processing unit 113 is included in the user interface 112, but this arrangement of the processing unit 113 in the control device 110 is merely according to an example. The control and/or processing unit 113 may be adapted to execute appropriate computer program code configured to, when executed in the control and/or processing unit 113, based at least on presence information of any persons being present within the region 102, cause the user interface 112 to selectively indicate to the user a range of available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120, in such a way that the extent of control of the environment in the region 102 by means of the control device 110 that is thereby enabled the user is based at least partly on the presence information.

The user interface 112 may be adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120 further based on preferences of any persons being present within the region 102 for properties of the environment in the region that are adjustable by the control system 120. For example, the selective indication by the user interface 112 may be based on a comparison of preferences of the user for properties of the environment in the region 102 that are adjustable by the control system 120 with preferences of any other persons being present within the region 102, possibly any persons within a predefined distance from the user and/or any persons within a predefined sub-region (not shown in Fig. 1) in the region 102, for properties of the environment in the region 102 that are adjustable by the control system 120.

In accordance with the embodiment depicted in Fig. 1, the communication unit 114 may be adapted to receive a signal from one or more presence information sensor units 115, 121, 130, 131 (as partly indicated in Fig. 1 by the arrows between presence information sensor units 121, 130, 131 and communication unit 114, respectively), which each is adapted to determine presence information of any persons being present within the region 102 (as partly indicated in Fig. 1 by the arrows between the control device 120 and the region 102 and between the presence information sensor unit 130 and the region 102), with the respective signal or signals being indicative of the presence information.

As shown in Fig. 1, a presence information sensor unit 115 may for example be included in the control device 110. In alternative or as a complement, a presence information sensor unit 121, 130, 131 may be arranged externally with respect to the control device 110. As shown in Fig. 1, an externally arranged presence information sensor unit 131 may be arranged within the region 102. However, as also shown in Fig. 1, an externally arranged presence information sensor unit 121, 130 may in alternative or in addition be arranged outside the region 102, e.g. in the control system 120 (cf. presence information sensor unit 121), and need not necessarily be included in the system 100 (cf. presence information sensor unit 130).

The presence information sensor unit 131 may for example comprise a presence or motion sensor, e.g. including pressure sensors arranged in office chairs of the office workers, which pressure sensors can detect if persons are sitting in their respective office chairs. In alternative or in addition, any one of the presence information sensor units 115, 121, 130, 131 may be included in an active badge system such as described in the foregoing, which may be used to detect presence and location of people in the office(s) by

means of badges or tags worn by the office workers, which badges or tags can periodically emit pulse-width modulated infrared signals, which are sensed by a plurality of infrared sensors.

According to another example, any one of the presence information sensor units 115, 121, 130, 131 may be coupled to or in communication with a communication network, e.g., a LAN (not shown in Fig. 1) connecting user devices (e.g. including the control device 110) of the office workers in a wired or wireless fashion (e.g., by means of a WLAN) and be adapted to determine location and/or identity of persons in the region 102 by sensing whether persons have logged into their respective user devices, or if usage of the respective user devices have been detected within a predefined period. For example, any one of the presence information sensor units 115, 121, 130, 131 may be adapted to sense whether office workers have inserted their respective user devices into docking stations (not shown in Fig. 1) associated with or corresponding to the respective office worker, and/or sense a position of the office workers within the region 102 by retrieving signals from their respective user devices indicating the location of the respective user devices. The user devices may for example be laptops, mobile telephones such as smartphones, etc. A user device such as a smartphone may include an application adapted to determine its location e.g. based on GPS, Wi-Fi, Bluetooth, and/or RFID means, etc.

In accordance with the embodiment depicted in Fig. 1, the control device 110 may comprise an estimation unit 116. The estimation unit 116 is optional. The estimation unit 116 is adapted to estimate an effect on the environment in the region 102 resulting from a selection of a chosen value or values in the range of available values representing at least one property of the environment in the region 102 which is indicated to the user by the user interface 112. Hence, the estimation unit 116 can estimate an effect on the environment in the region 102 that would be the result in case the user would select a particular value or values in the range of available values representing at least one property of the environment in the region 102 that is indicated to the user by the user interface 112. The user interface 112 may be adapted to indicate to the user the effect which has been estimated by the estimation unit 116. Thereby, so called 'feed-forward information' may be provided in the user interface 112 to illustrate the impact on the environment in the region 102 resulting from user input that the user plans or foresees to provide to the user interface 112. The estimation unit 116 may be integrally arranged e.g. in the user interface 112.

In accordance with the embodiment depicted in Fig. 1, the control device 110 may comprise a memory unit 118. The memory unit 118 may be adapted to store e.g. data relating to the user's usage of the control device 110. The memory unit 118 is optional.

The user interface 112 may be adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120 further based on at least some of the data stored in the memory unit 118. Data relating to the user's usage of the control device 110 may relate to intended use, e.g. include preferences of the user for certain settings of the available values representing at least one property of the environment in the region 102 that is adjustable by the control system 120, and/or past use, e.g. be derived from usage data gathered during prior operation of the control device 110 by the user.

Although principles of embodiments of the present invention have been described mainly with reference to one control device 110, which may correspond to or be associated with a particular user or person within the region 102 in the structure 104, it is to be understood that within the region 102 there may be additional control devices 141, 142, 143, which each may correspond to or be associated with a particular user or person within the region 102 in the structure 104. For example, each of the control devices 110, 141, 142, 143 may correspond to or be associated with different users or persons within the region 102 in the structure 104. One or more of the control devices 141, 142, 143 may be included in the system 100 (not indicated in Fig. 1). Each of the control devices 141, 142, 143 may be substantially similar to or the same as control device 110, and operate in a similar manner or in the same manner as control device 110. Although Fig. 1 by way of example shows three additional control devices 141, 142, 143, it is to be understood that there may be one, two, three, four, or five or more additional control devices within the region 102 in the structure 104.

Referring now to Fig. 2, there is shown a schematic view of computer-readable means, or computer-readable storage mediums, 201, 202 according to embodiments of the present invention. By way of example, the computer-readable storage mediums 201, 202 comprise a floppy disk 201 and a Digital Versatile Disc (DVD) 202. With reference to Fig. 1, control device 110 may include a control and/or processing unit 113. On the computer-readable storage mediums 201, 202 there are stored computer program code configured to, when executed in the control and/or processing unit 113 of the control device 110, based at least on presence information of any persons being present within the region 102, cause the user interface 112 to selectively indicate to the user a range of available values

representing at least one property of the environment in the region 102 that is adjustable by the control system 120, such that the extent of control of the environment in the region 102 by means of the control device 110 that is thereby enabled the user is based at least partly on the presence information.

5 Although two particular types of computer-readable storage mediums 201, 202 by way of example have been described above with reference to Fig. 2, the present invention encompasses embodiments employing any other suitable type of computer-readable storage medium, such as, but not limited to, a memory, a hard disk drive, a Compact Disc (CD), a flash memory, magnetic tape, a USB stick, a Zip drive, etc. The memory may for example be
10 any combination of read and write memory (RAM) and read only memory (ROM).

 In conclusion, there is disclosed a control device for controlling the environment in a region within a structure by means of controlling operation of a control system, which is adapted to adjust at least one property of the environment in the region. The control device comprises a user interface adapted to selectively indicate to a user a range of
15 available values representing at least one property of the environment in the region that is adjustable by the control system at least based on presence information of any persons being present within the region such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

20 While the present invention has been illustrated and described in detail in the appended drawings and the foregoing description, such illustration and description are to be considered illustrative or exemplifying and not restrictive; the present invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a
25 study of the drawings, the disclosure, and the appended claims. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. A control device (110) for controlling the environment in a region (102) within a structure (104) by means of controlling operation of a control system (120) adapted to adjust at least one property of the environment in the region, the control device comprising:

5 a user interface (112) adapted to:
selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system; and

enable the user to control the represented at least one property,

10 whereby the control device is provided with user input; and

a communication unit (114) adapted to adjust the at least one property by means of communicating a control signal corresponding to said user input to the control system;

15 wherein the user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system at least based on presence information of any persons being present within the region such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

20 2. A control device according to claim 1, wherein the user interface is configured to adapt the number and/or type of properties and/or the range of available values of the respective properties which are indicated to the user by the user interface at least based on the presence information.

25 3. A control device according to claim 1 or 2, wherein the extent of control of the environment in the region by means of the control device that is enabled the user is greater the lower the number of persons being present within the region.

4. A control device according to any one of claims 1-3, wherein, on a condition that the user is located within the region, the extent of control of the environment in the region by means of the control device that is enabled the user is greater the lower the number of persons being present within a predefined distance from the user.

5. A control device according to any one of claims 1-4, wherein the communication unit is adapted to receive a signal from a presence information sensor unit (115, 121, 130, 131) indicative of the presence information, the presence information sensor unit being adapted to determine the presence information.

6. A control device according to any one of claims 1-5, wherein the user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system further based on preferences of any persons being present within the region for properties of the environment in the region that are adjustable by the control system.

7. A control device according to claim 6, wherein the user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system further based on a comparison of preferences of the user for properties of the environment in the region that are adjustable by the control system with preferences of any other persons being present within the region for properties of the environment in the region that are adjustable by the control system.

8. A control device according to any one of claims 1-7, further comprising:
an estimation unit (116) adapted to estimate an effect on the environment in the region of a selection of a chosen value in the range of available values representing at least one property of the environment in the region indicated to the user by the user interface;
wherein the user interface is further adapted to indicate to the user the effect estimated by the estimation unit.

9. A control device according to any one of claims 1-8, wherein the presence information includes identity information identifying at least the user within the region, and wherein the user interface is adapted to selectively indicate to the user a range of available

values representing at least one property of the environment in the region that is adjustable by the control system further based on the identity information identifying the user.

10. A control device according to any one of claims 1-9, further comprising:

5 a memory unit (118) adapted to store data relating to the user's usage of the control device;

wherein the user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system further based on at least some of the data stored in the
10 memory unit.

11. A user interface (112) for a control device (110) for controlling the environment in a region (102) within a structure (104) by means of controlling operation of a control system (120) adapted to adjust at least one property of the environment in the region,
15 the user interface being adapted to:

selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system; and

enable the user to control the represented at least one property, whereby the control device is provided with user input, wherein the control device is adapted to adjust the
20 at least one property by means of communicating a control signal corresponding to said user input to the control system;

wherein the user interface is adapted to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system at least based on presence information of any persons being
25 present within the region such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

12. A system (100) comprising:

30 a control system (120) adapted to adjust at least one property of the environment in a region (102) within a structure (104); and

a control device (110) according to any one of claims 1-10 for controlling the environment in the region by means of controlling operation of the control system.


13. A system according to claim 12, wherein the structure is a building (104), and wherein the control system includes a building management system for controlling and/or monitoring mechanical and/or electrical equipment in the building.

14. A system according to claim 12 or 13, wherein the control system is adapted to control lighting, heating, cooling, humidity, sound level and/or air circulation in the region, wherein the at least one property of the environment in the region includes at least one lighting property, at least one thermal property, at least one acoustic property, humidity and/or at least one air circulation property.

15. A computer program product adapted to be executed in a processing unit (113) of a control device (110) for controlling the environment in a region (102) within a structure (104) by means of controlling operation of a control system (120) adapted to adjust at least one property of the environment in the region, the control device comprising a user interface (112) adapted to selectively indicate to a user a range of available values representing at least one property of the environment in the region that is adjustable by the control system, and enable the user to control the represented at least one property, whereby the control device is provided with user input, the control device further comprising a communication unit (114) adapted to adjust the at least one property by means of communicating a control signal corresponding to said user input to the control system, the processing unit being coupled to the user interface;

the computer program product comprising computer-readable means (201, 202) carrying computer program code configured to, when executed in the processing unit, based at least on presence information of any persons being present within the region, cause the user interface to selectively indicate to the user a range of available values representing at least one property of the environment in the region that is adjustable by the control system, such that the extent of control of the environment in the region by means of the control device that is thereby enabled the user is based at least partly on the presence information.

1/2

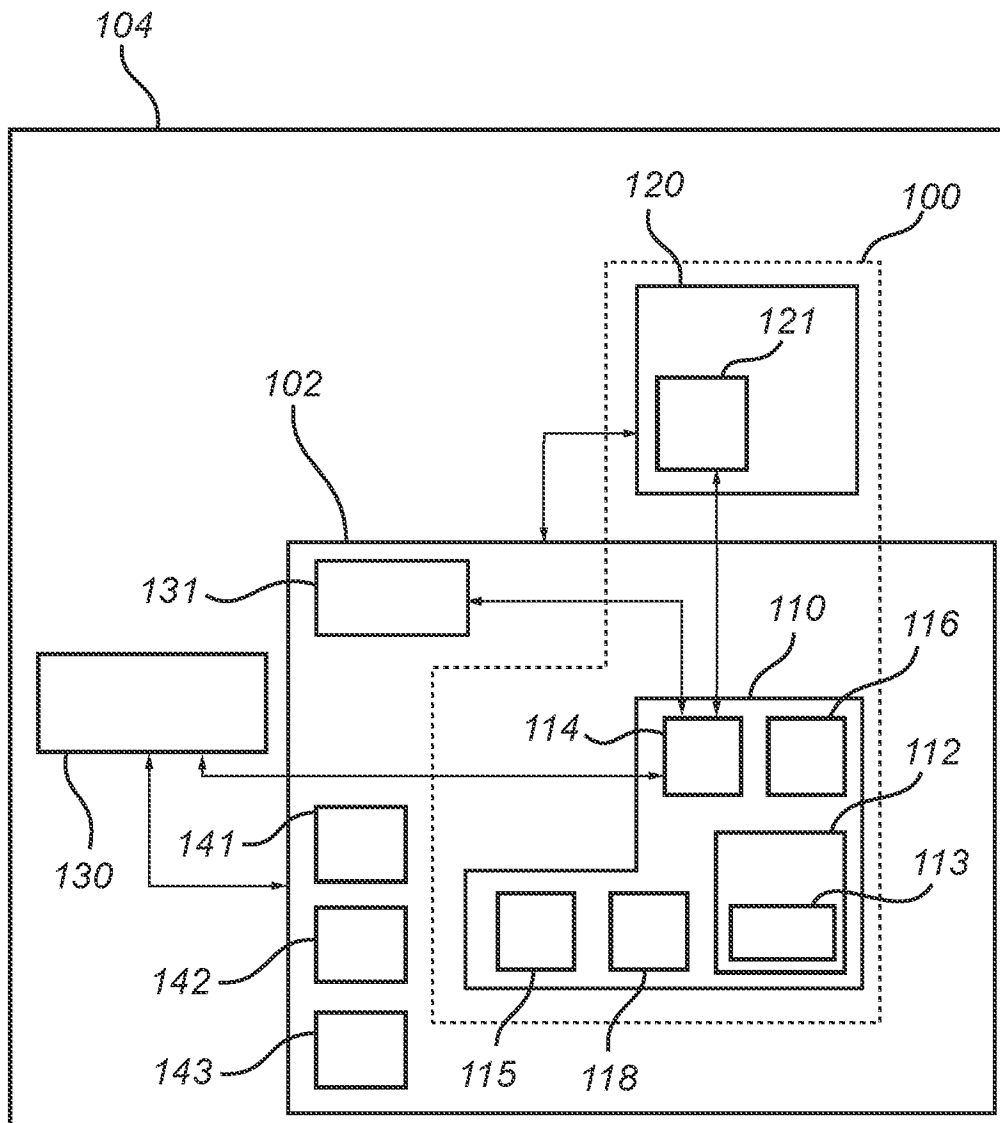*Fig. 1*

2/2

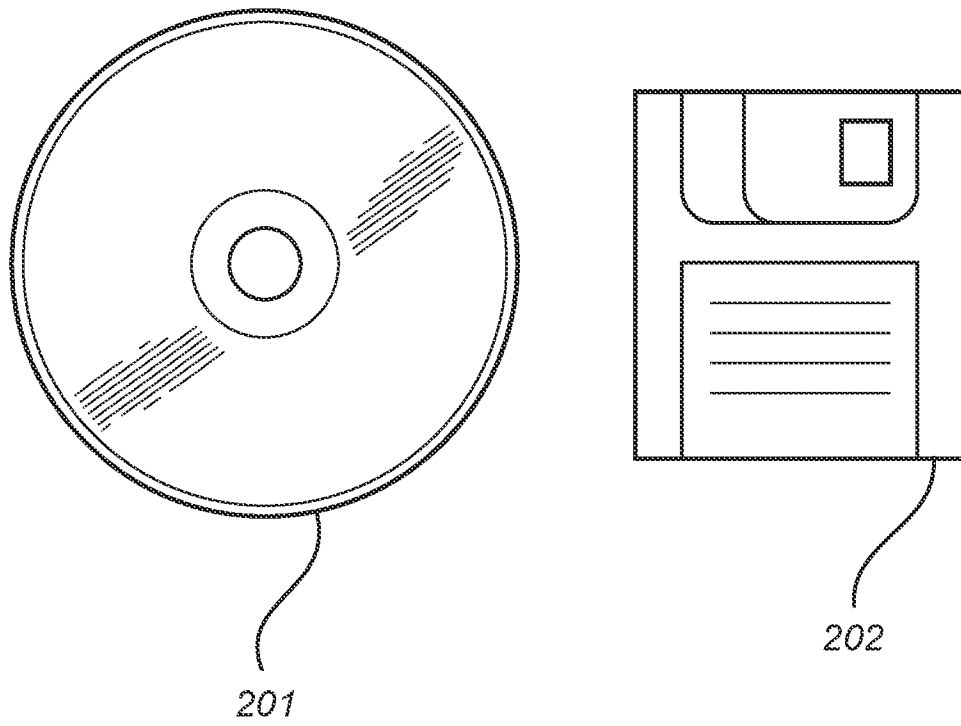


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/060412

A. CLASSIFICATION OF SUBJECT MATTER
INV. H05B37/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L G06F G05B G05D G06Q F24F H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/079388 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; PHILIPS CORP [US]; LOVELAND DAMIE) 15 July 2010 (2010-07-15) abstract paragraph [0001] paragraph [0003] paragraph [0084] - paragraph [0087] paragraph [0092] paragraph [0095] - paragraph [0096] paragraph [0102] paragraph [0108] - paragraph [0109] paragraph [0111] paragraph [0114] - paragraph [0115] paragraph [0117] - paragraph [0118] paragraph [0162] - paragraph [0163] paragraph [0200] ----- -/--	1-15

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 July 2014

Date of mailing of the international search report

05/08/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Martinozzi, A

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/060412

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2008/281472 A1 (PODGORNY MAREK [US] ET AL) 13 November 2008 (2008-11-13) abstract paragraph [0002] paragraph [0019] - paragraph [0021] paragraph [0026] - paragraph [0030] paragraph [0057] paragraph [0068] paragraph [0079] - paragraph [0083] paragraph [0087] - paragraph [0089] paragraph [0091] - paragraph [0092] paragraph [0104] - paragraph [0105] paragraph [0112] - paragraph [0113] paragraph [0122] paragraph [0126] paragraph [0130] paragraph [0142] - paragraph [0144] paragraph [0148] paragraph [0179] - paragraph [0180] sentence 1, paragraph 187 - paragraph 89 paragraph [0191] paragraph [0197] paragraph [0199] paragraph [0201] - paragraph [0202] -----	1-15
A	WO 2006/090546 A2 (MATSUSHITA ELECTRIC WORKS LTD [JP]; OOBAYASHI FUMIAKI [JP]; TERANO MAS) 31 August 2006 (2006-08-31) page 8 - page 9 page 11 - page 15 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/060412

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010079388 A1	15-07-2010	CA 2748984 A1	15-07-2010
		CN 102273323 A	07-12-2011
		EP 2386188 A1	16-11-2011
		JP 2012514829 A	28-06-2012
		KR 20110118783 A	01-11-2011
		RU 2011133069 A	20-02-2013
		TW 201028030 A	16-07-2010
		WO 2010079388 A1	15-07-2010

US 2008281472 A1	13-11-2008	NONE	

WO 2006090546 A2	31-08-2006	JP 2006270913 A	05-10-2006
		WO 2006090546 A2	31-08-2006
