

CORRECTED VERSION

(19) World Intellectual Property Organization International Bureau



(10) International Publication Number WO 2014/169343 A8


(43) International Publication Date 23 October 2014 (23.10.2014)

- (51) International Patent Classification: H04W 24/00 (2009.01) H04W 64/00 (2009.01) H04W 52/00 (2009.01) H04W 72/00 (2009.01)
(21) International Application Number: PCT/AU2014/000446
(22) International Filing Date: 22 April 2014 (22.04.2014)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data: 2013901369 18 April 2013 (18.04.2013) AU
(71) Applicant: BLUEDOT INNOVATION PTY LTD [AU/AU]; 11 Agnes Street, East Melbourne, Victoria 3002 (AU).
(72) Inventor: ELDIC, Filip; 707/2 McGoun Street, Richmond, Victoria 3121 (AU).
(74) Agent: MADDERNS; GPO Box 2752, Adelaide, South Australia 5001 (AU).
(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

- Published: with international search report (Art. 21(3))
(48) Date of publication of this corrected version: 4 December 2014
(15) Information about Correction: see Notice of 4 December 2014

(54) Title: REACTIVE HYBRID LOCATION DETERMINATION METHOD AND APPARATUS

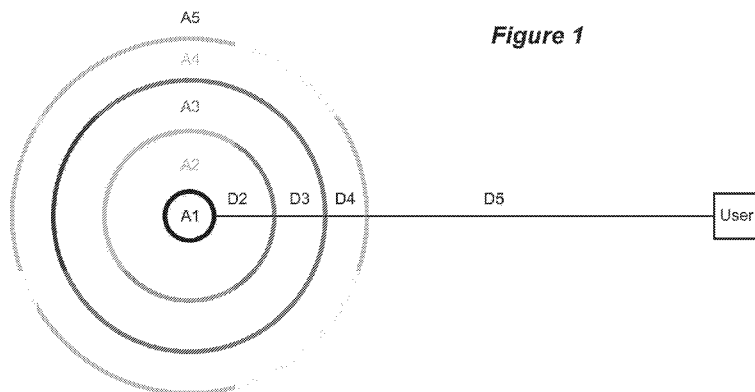

(57) Abstract: This invention relates to location determination technology useable by, in particular, cellular telephone devices having mobile computer capabilities and a self-contained battery supply. A method is described of using the mobile device so as to control the drain of power from the power source of the mobile device, the mobile device having at least two location determination techniques having respective power drain characteristics, the method includes selecting the location determination technique having a lower power drain characteristic the greater the determined distance of the mobile device from a predetermined location or area, and selecting the location determination technique having the greater power drain characteristic the smaller the determined distance of the mobile device from a predetermined location or area. The method thus uses the least accurate technique when furthest away and the most accurate technique when closer to a predetermined location or area.

WO 2014/169343 A8