




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/29
(87) Date publication PCT/PCT Publication Date: 2007/01/11
(45) Date de délivrance/Issue Date: 2014/05/20
(85) Entrée phase nationale/National Entry: 2007/12/20
(86) N° demande PCT/PCT Application No.: US 2006/025916
(87) N° publication PCT/PCT Publication No.: 2007/005793
(30) Priorité/Priority: 2005/06/30 (US11/174,434)

(51) Cl.Int./Int.Cl. *B65D 81/38* (2006.01),
B31B 7/00 (2006.01)
(72) Inventeurs/Inventors:
HARTJES, TIMOTHY P., US;
BREINING, MICHAEL A., US;
VAN HANDEL, GERALD J., US;
BROWN, DAVID C., US;
MALAKHOW, WALTER, US
(73) Propriétaire/Owner:
DIXIE CONSUMER PRODUCTS LLC, US
(74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : RECIPIENT UTILISANT UN REVETEMENT INTERIEUR ET DES AERATIONS D'ISOLATION THERMIQUE ET
PROCEDES DE FABRICATION DE CE RECIPIENT
(54) Title: CONTAINER EMPLOYING INNER LINER AND VENTS FOR THERMAL INSULATION AND METHODS OF
MAKING SAME

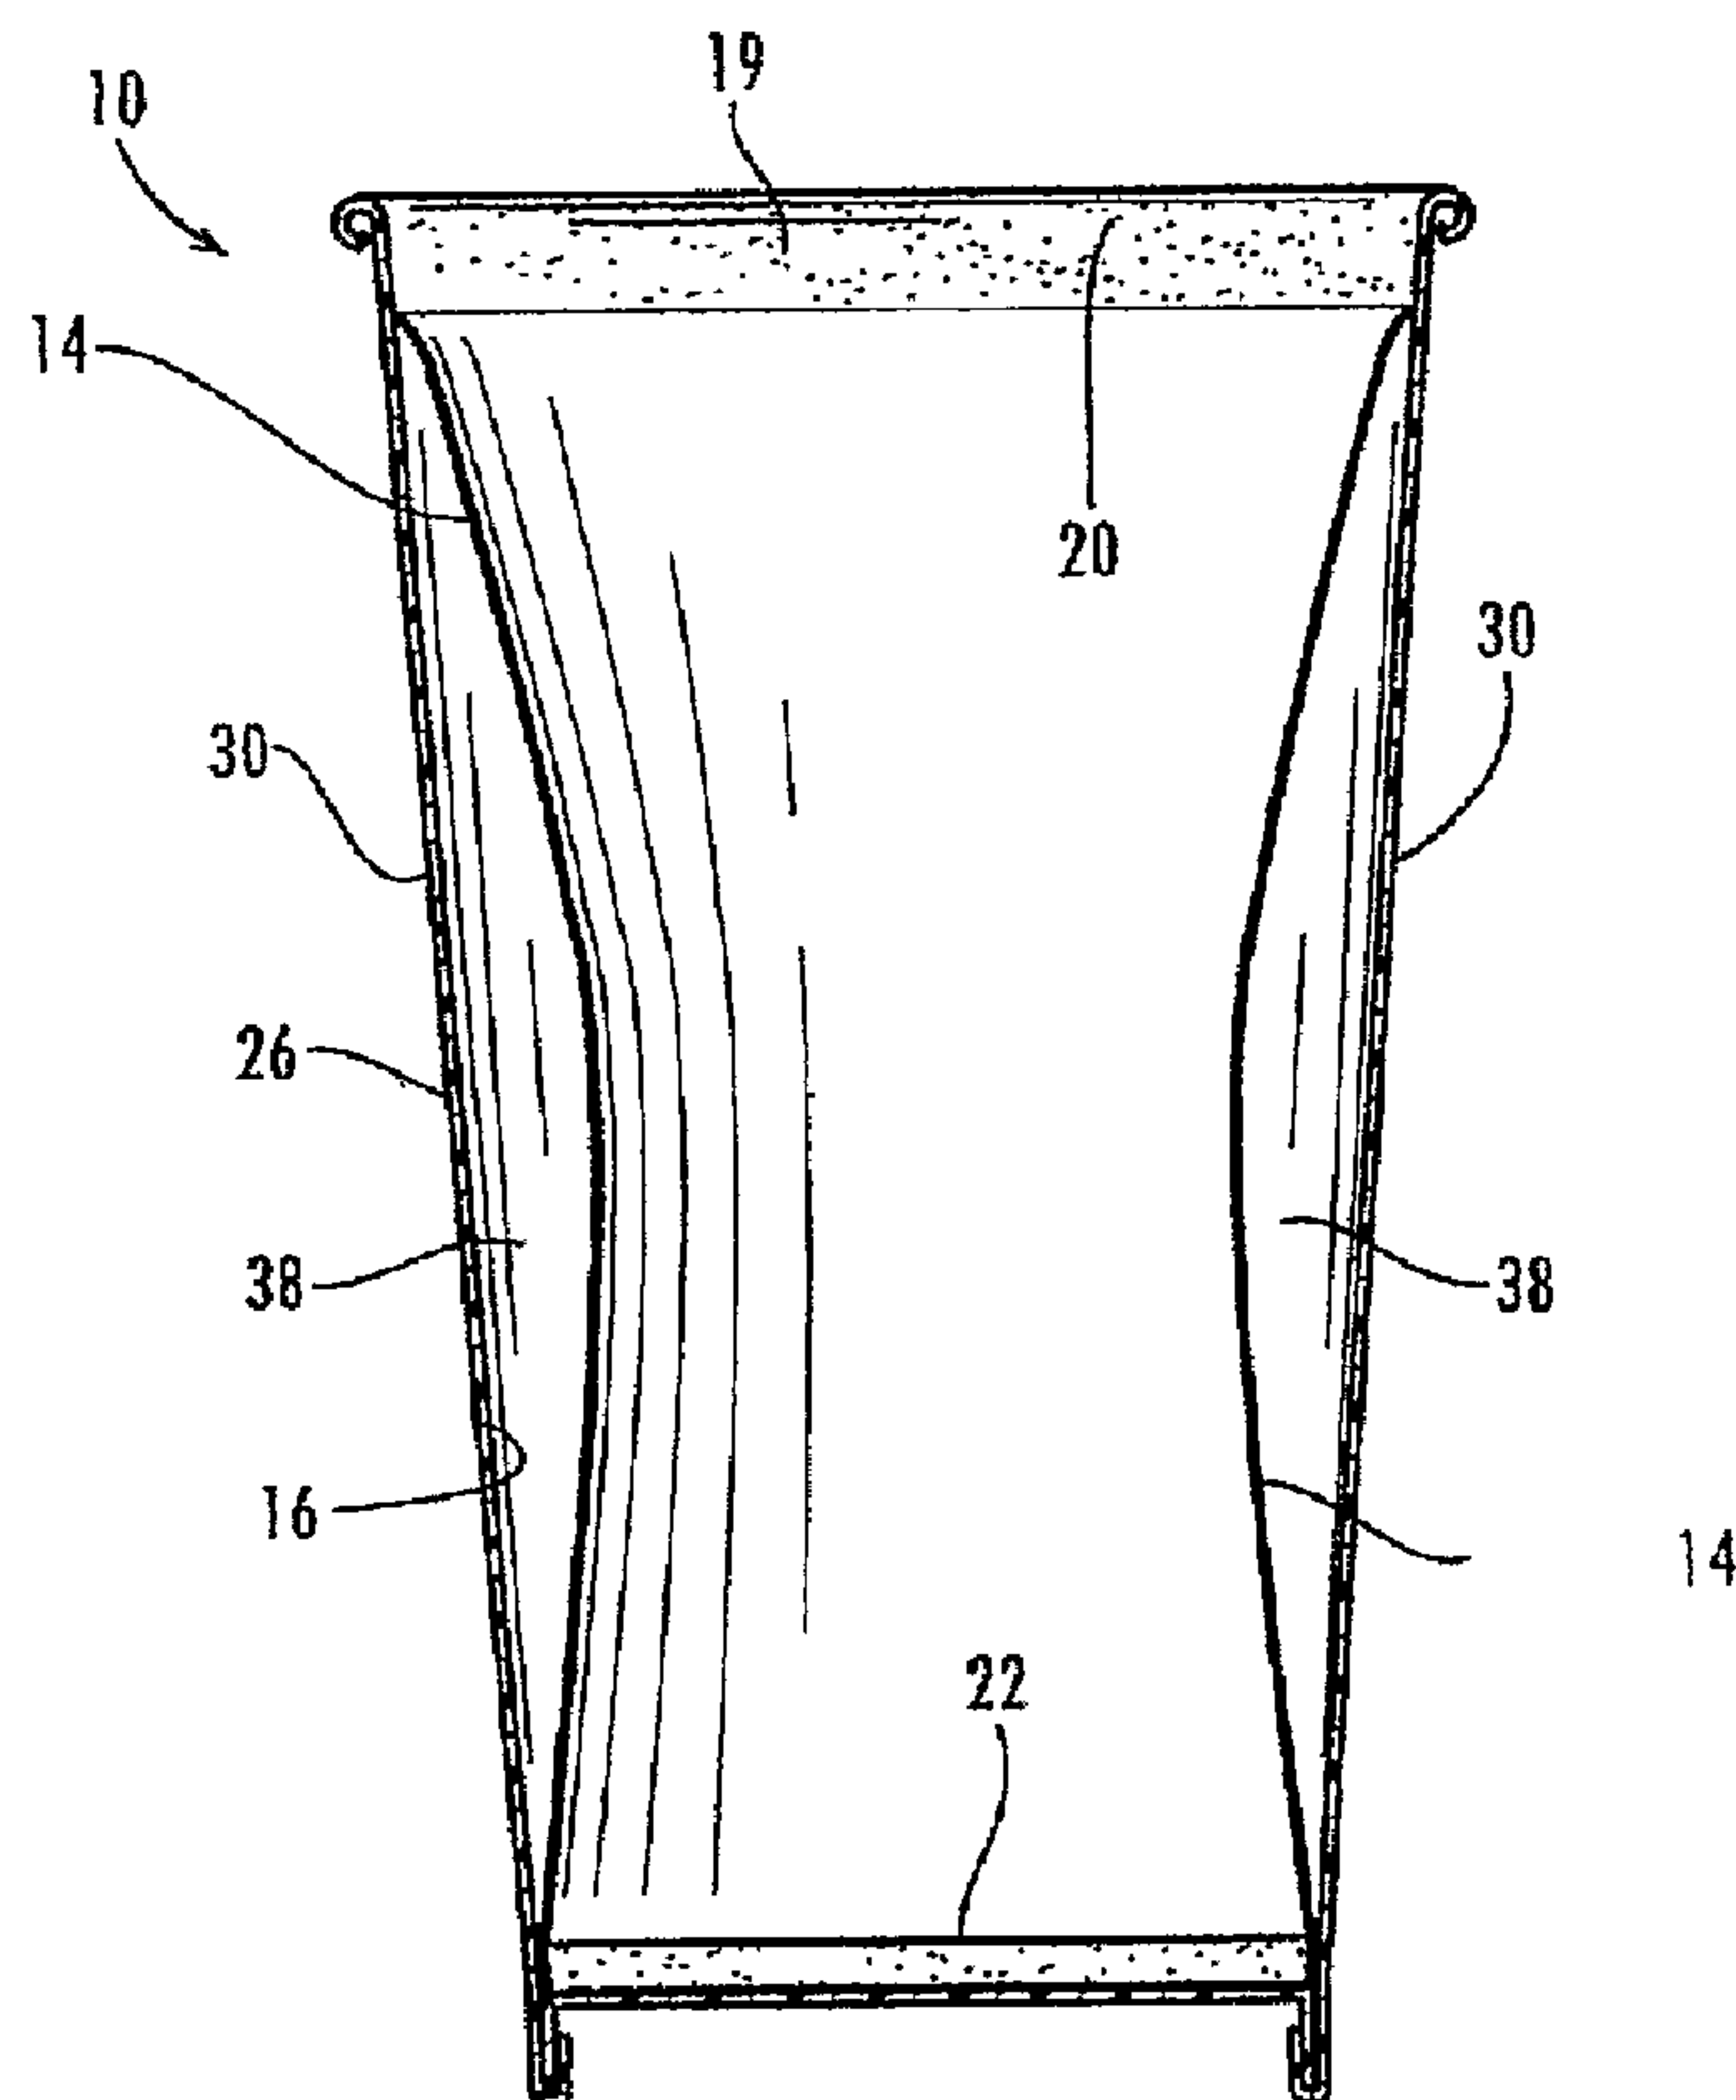

(57) Abrégé/Abstract:

The present invention provides a container (10) suitable for providing insulation wherein the container has an inner shrink film (14) liner. The sidewalls of the container, which can be made from paperboard or other suitable material, are vented to allow ambient air



(57) **Abrégé(suite)/Abstract(continued):**

to freely flow through the sidewall of the container during activation of the shrink film (14) with hot liquid or other suitable material. When the container is filled with material having a temperature of from about 130° F to up to about 212° F, the shrink film (14) is activated and the container (10) provides excellent insulation, thereby allowing the container to be held in a consumer's hand for an extended period without causing burns or excessive discomfort. Methods of making this container (10) are also provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 January 2007 (11.01.2007)

PCT

(10) International Publication Number
WO 2007/005793 A1

(51) International Patent Classification:

B65D 81/38 (2006.01) **B31B 7/00** (2006.01)

(21) International Application Number:

PCT/US2006/025916

(22) International Filing Date: 29 June 2006 (29.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/174,434 30 June 2005 (30.06.2005) US

(71) Applicant (for all designated States except US): **FORT JAMES CORPORATION** [US/US]; 133 Peachtree Street, NE, 133 Peachtree Street, NE, Atlanta, Georgia 30303 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HARTJES, Thomas**


P [US/US]; 413 S. Sidney Street, 413 S. Sidney Street, Kimberly, Wisconsin 54136 (US). **BREINING, Michael A.** [US/US]; 1030 Oak Street, 1030 Oak Street, Neenah, Wisconsin 54956 (US). **VAN HANDEL, Gerald J.** [US/US]; 793 Harvard Drive, 793 Harvard Drive, Neenah, Wisconsin 54956 (US). **BROWN, David C.** [US/US]; 114 Vosburg Lane, 114 Vosburg Lane, Clark Summit, Pennsylvania 18411 (US). **MALAKHOW, Walter** [US/US]; 97 Teaneck Road, 97 Teaneck Road, Teaneck, New Jersey 07666 (US).

(74) Agent: **HUTTER, Jacqueline**; Patent Group GA030-43, Georgia-Pacific Corporation, 133 Peachtree Street N.E., Atlanta, Georgia 30303, (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA,

[Continued on next page]

(54) Title: CONTAINER EMPLOYING INNER LINER AND VENTS FOR THERMAL INSULATION AND METHODS OF MAKING SAME

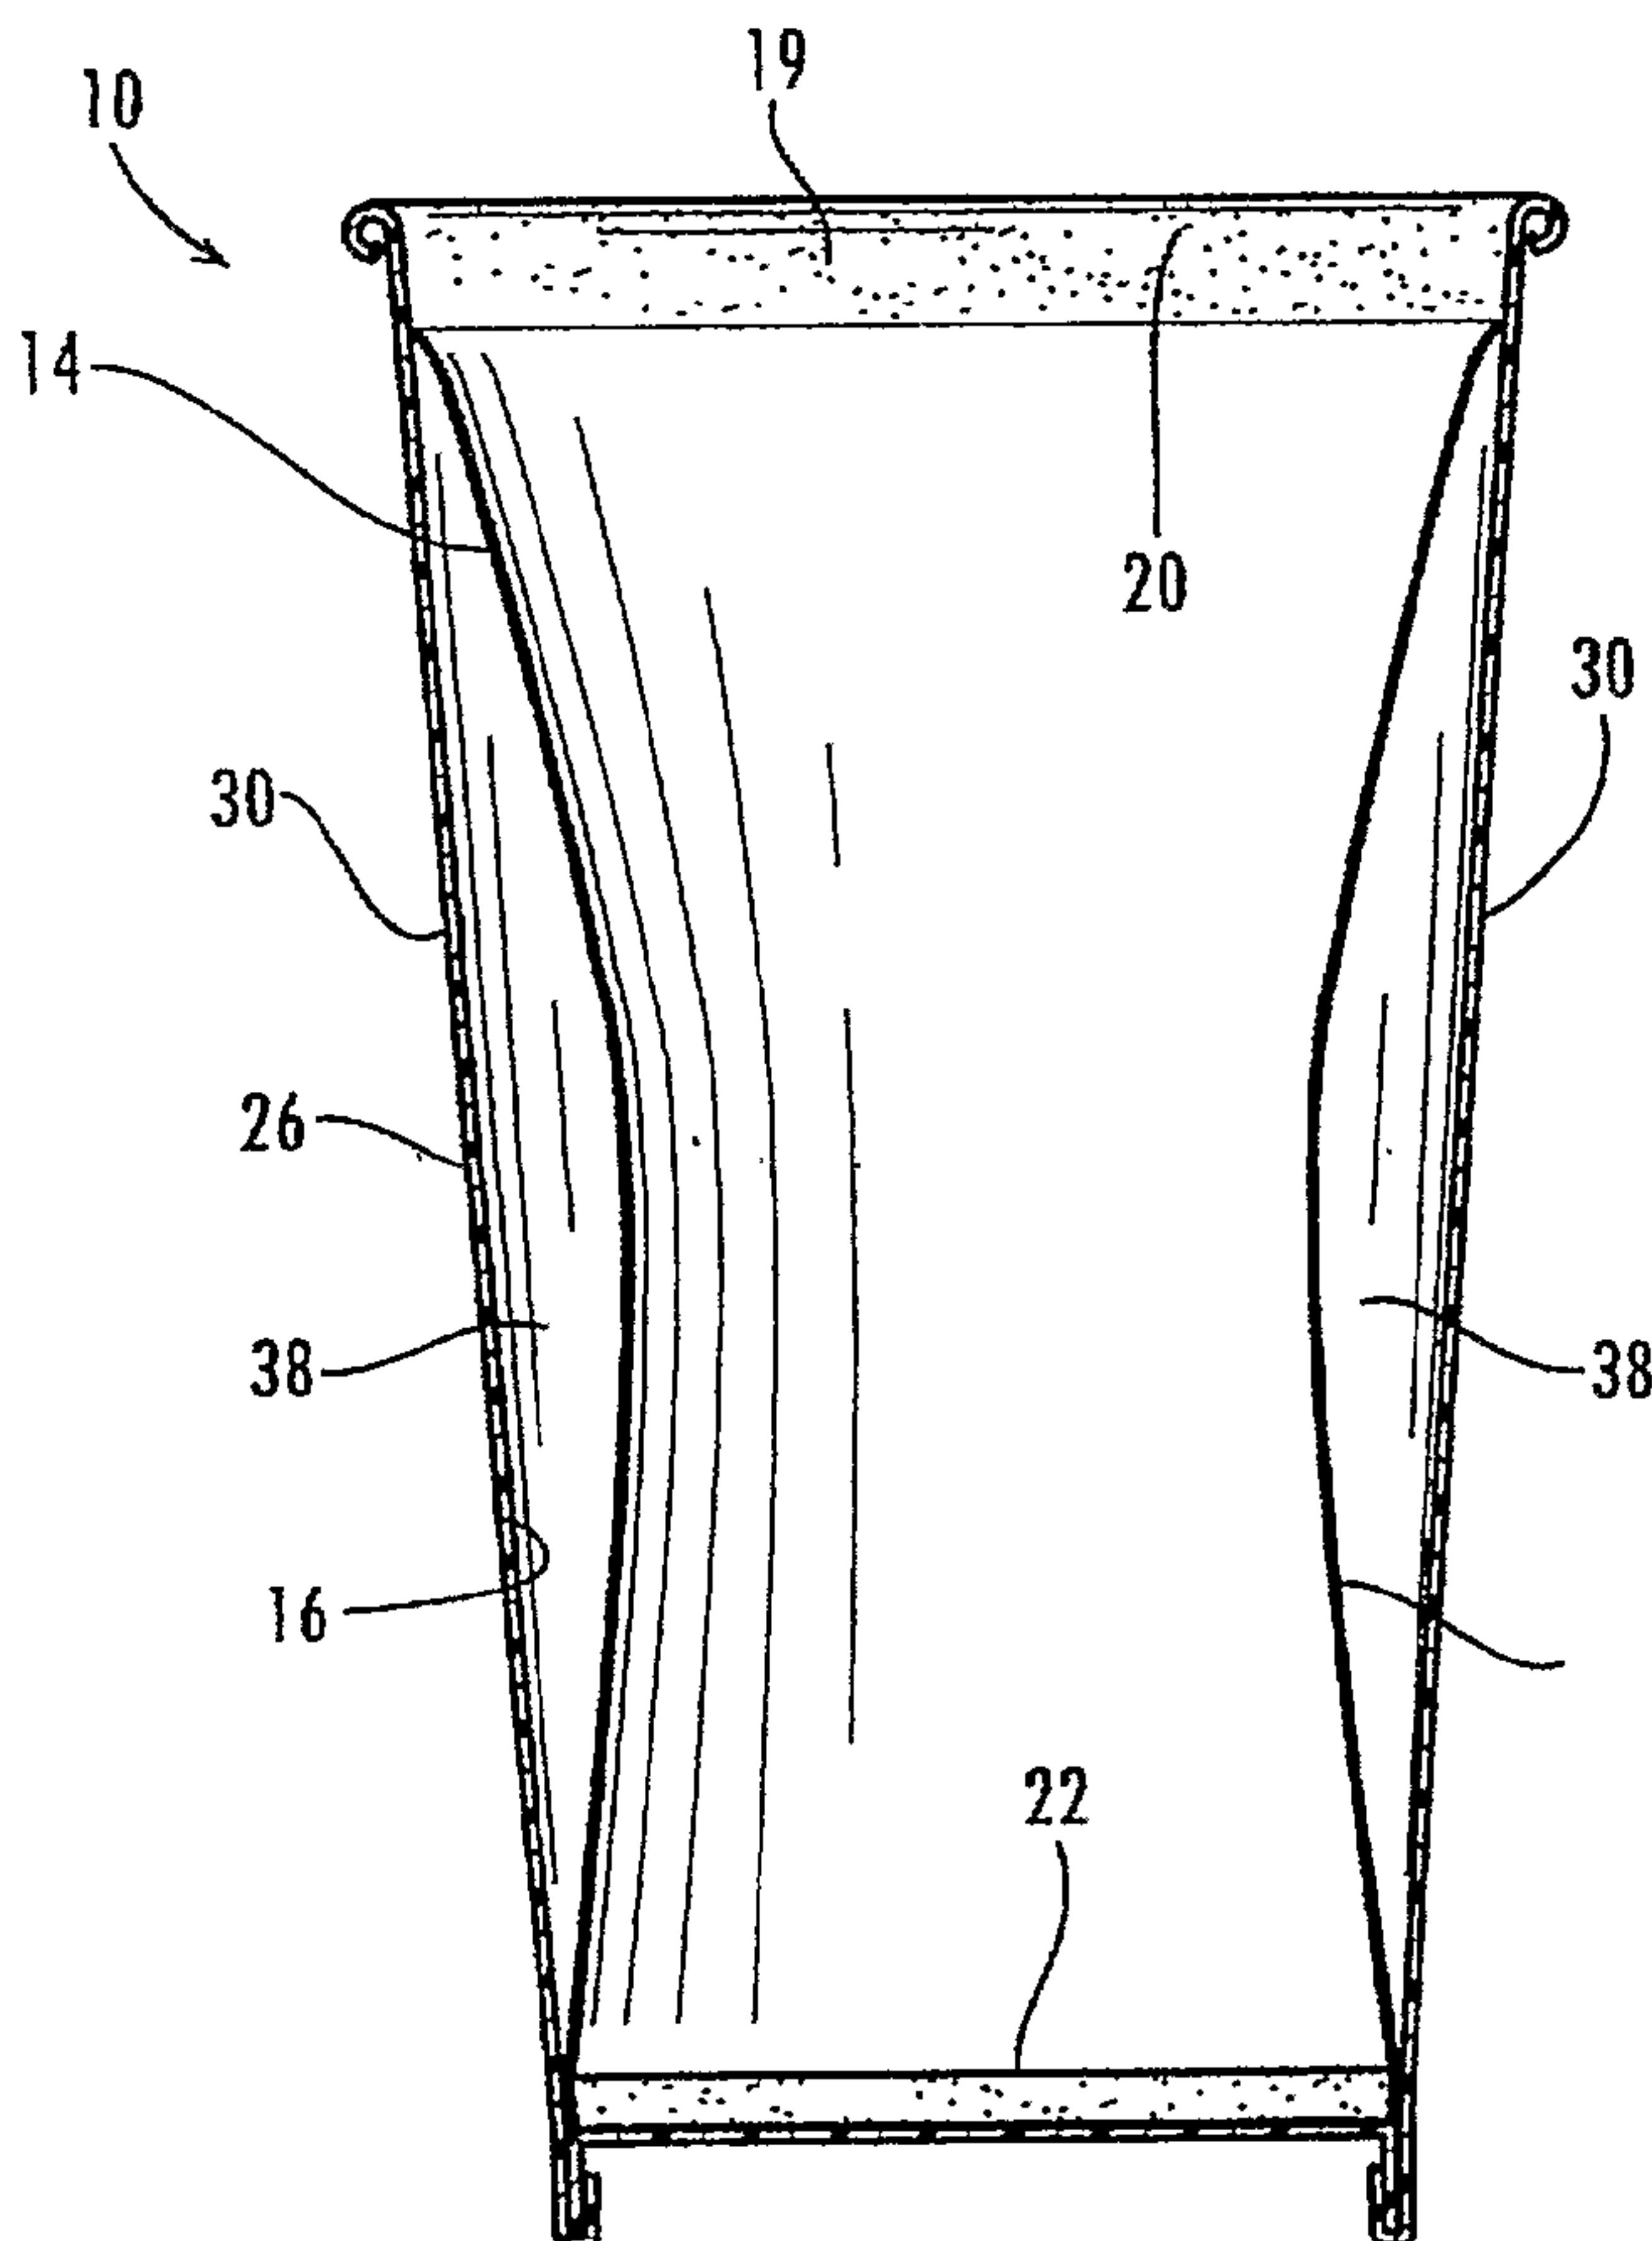

(57) Abstract: The present invention provides a container (10) suitable for providing insulation wherein the container has an inner shrink film (14) liner. The sidewalls of the container, which can be made from paperboard or other suitable material, are vented to allow ambient air to freely flow through the sidewall of the container during activation of the shrink film (14) with hot liquid or other suitable material. When the container is filled with material having a temperature of from about 130° F to up to about 212° F, the shrink film (14) is activated and the container (10) provides excellent insulation, thereby allowing the container to be held in a consumer's hand for an extended period without causing burns or excessive discomfort. Methods of making this container (10) are also provided.

WO 2007/005793 A1

WO 2007/005793 A1

NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTAINER EMPLOYING INNER LINER AND VENTS FOR THERMAL INSULATION AND METHODS OF MAKING SAME

FIELD OF THE INVENTION

5 The present invention provides a container suitable for providing insulation wherein the container has an inner shrink film liner. The sidewalls of the container, which can be made from paperboard or other suitable material, are vented to allow ambient air to freely flow through the sidewall of the container during activation of the shrink film with hot liquid or other suitable material. When the container is filled with material having a
10 temperature of from about 130°F to up to about 212°F, the shrink film is activated and the container provides excellent insulation, thereby allowing the container to be held in a consumer's hand for an extended period without causing burns or excessive discomfort. Methods of making this container are also provided.

BACKGROUND OF THE INVENTION

15 U.S. Patent No. 6,536,657 and 6,729,534 and U.S. Patent Publication No. 2005-0029337 disclose a beverage container having a film adhered to the interior thereof. When the container is filled with a hot liquid, the film will shrink. Upon shrinking, the film moves away from the interior of the container to create a pocket of air. This air pocket
20 results in the container having insulating characteristics. In these referenced patents and application, an insulating band is instantaneously activated (that is, the film shrinks) by contact with hot liquid. The insulated cups formed by the methods and materials set out in the referenced patents were found to provide excellent insulation properties when used for serving hot beverages, such as coffee, tea, etc. However, in use, when the film began to
25 shrink, a partial vacuum was formed and the film could not fully activate to provide maximum insulation effect.

Other types of insulating cups incorporating a plastic interliner are known. For example, U.S. Patent No. 3,737,093 discloses a plastic container situated within a paper

container to create an air space for thermal insulation. U.S. Patent No. 4,435,344 discloses a container made from foam polyethylene-coated paperboard which has insulating properties. More recently, U.S. Patent No. 6,852,381 describes an insulated beverage container comprising (in order from the outermost surface to the inside of the container): a
5 paperboard outer shell, a foam layer laminated to the inner surface of the paperboard shell and a film adhered to the foam surface. In use, it appears that the film would be in contact with the beverage in the container to pull wrinkles out of the inner foam layer.

While the above references disclose a number of different configurations for
10 insulated beverage containers, there remains a need in the art for an insulated beverage container that provides suitable insulation properties for use with hot beverages or other hot materials. The present invention meets such a need.

SUMMARY OF THE INVENTION

15 The present invention provides a container suitable for providing insulation wherein the container has an inner shrink film liner. The sidewalls of the container, which can be made from paperboard or other suitable material, are vented to allow ambient air to freely flow through the sidewall of the container during activation of the shrink film. The shrink film is activated when the container is filled with liquid or other material having a
20 temperature of from about 130°F to up to about 212°F. The shrink film is applied using an adhesive suitable to prevent the shrink film from undergoing substantially any delamination when contacted with liquid or other material exhibiting these temperatures. When the container is filled with material having a temperature of from about 130°F to up to about 212°F, the shrink film is activated and the container provides excellent insulation, thereby
25 allowing the container to be held in a consumer's hand for an extended period without causing burns or excessive discomfort. Methods of making this container are also provided.

In one aspect, there is provided a container comprising a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface; an activatable
30 shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band wherein the insulation band is located between upper and lower circumferential bands where the shrink film is secured to the sidewall; and one or more

vents cut into the paperboard material, wherein the vents are located within an inner perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during activation of the shrink film, and wherein the vents define an opening in the sidewall of 0.05 inches or more across, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material, thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about 130° F. to up to about 212° F, wherein the container is further characterized in that it exhibits a volume before activation of the shrink film of from about 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

In another aspect, there is provided a method of making a container blank suitable for preparing an insulated container: providing a container material web comprising paperboard, wherein the web is of a sufficient width to provide one or more container blanks cuttable from the web; cutting the container material web so as to provide one or more vents in a sidewall of one or more container blanks cuttable from the web; applying an adhesive to the container material web in a pattern approximately coinciding with a perimeter of one or more container blanks cuttable from the web, thereby providing one or more adhesive patterns on the container material web; applying a shrink film web to the one or more adhesive patterns to provide a web-shrink film laminate, wherein the shrink film is adhered to the container material web at locations defined by the one or more adhesive patterns; cutting the container material-shrink film laminate to provide one or more container blanks, wherein the container blanks comprise one or more vents in a location within a perimeter defined by the adhesive pattern, wherein the one or more vents substantially eliminate the formation of a vacuum in a space between the container material web and the shrink film during an activation of the shrink film; wherein the container blank is suitable for preparing an insulated container.

In another aspect, there is provided a method of making a container blank suitable for preparing an insulated container: providing a container material web comprising paperboard, wherein the web is of a sufficient width to provide one or more container blanks cuttable from the web; cutting the container material web so as to provide one or more vents in a sidewall of one or more container blanks cuttable from the web; providing a

shrink film web, wherein the shrink film is activatable by contact with a hot material having an initial temperature of from about 130° F to up to about 212° F; applying an adhesive in an adhesive pattern to the shrink film web, wherein the pattern coincides with a perimeter of one or more container blanks cuttable from the shrink film web, thereby providing one or more adhesive patterns on the shrink film web; marrying the shrink film web with the container material web, thereby providing container material-shrink film laminate, wherein the container material is adhered to the shrink film web in the locations defined by the adhesive pattern; cutting the container material-shrink film laminate to provide one or more container blanks, wherein the container blanks comprise one or more vents in a location within a perimeter defined by the adhesive pattern, wherein the one or more vents substantially eliminate the formation of a vacuum in a space between the container material web and the shrink film during an activation of the shrink film; wherein the container blank is suitable for preparing an insulated container.

In another aspect, there is provided a container comprising: a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface; an activatable shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band, wherein the insulation band is located between upper and lower circumferential bands where the shrink film is secured to the sidewall; and one or more vents cut into the paperboard material, wherein the vents are selected from flap-type vents, elongate slits and holes defining an opening in the sidewall of 0.05 inches or more across and wherein the vents are located within an inner perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during activation of the shrink film, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material, thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about 130° F to up to about 212° F, wherein the container is further characterized in that it exhibits a volume before activation of the shrink film of from about 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

In another aspect, there is provided a container comprising: a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface; an activatable

shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band, such that the activated shrink film defines a single centrally disposed air pocket extending substantially around the entire circumference of the container, wherein the insulation band is located between upper and lower circumferential bands
 5 where the shrink film is secured to the sidewall; and a plurality of circumferentially spaced vents cut into the paperboard material, wherein the vents are selected from flap-type vents, elongate slits and holes defining an opening in the sidewall of 0.05 inches or more across and are located within an inner perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during
 10 activation of the shrink film, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material, thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about to up to about 212° F, wherein the container is further characterized in that it exhibits a volume before activation of the shrink film of from about
 15 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

In another aspect, there is provided a container comprising: a sidewall comprising paperboard including one or more vent(s); a shrink film inner liner having an intermediate portion peripherally affixed to the sidewall at upper and lower circumferential bands, the
 20 vent(s) being disposed within a periphery of the intermediate portion wherein the intermediate portion is adapted to separate from the sidewall with an extent of shrinkage from about 5 to 50% such that ambient air flows through the vent(s) to form an air pocket between the sidewall and the intermediate portion wherein the form, number, and location of the vent(s) are so located such that the shrinkage of the shrink film is not unduly hindered
 25 by slow pressure equalization between ambient air and the forming air pocket.

In another aspect, there is provided a container comprising: a sidewall comprising paperboard including at least one vent; a shrink film inner liner affixed to the sidewall along upper and lower circumferential bands of the inner liner, the at least one vent being
 30 disposed between the upper and lower circumferential bands, wherein an intermediate portion of the inner liner between the upper and lower circumferential bands is adapted to separate from the sidewall wherein the sidewall is provided with at least one vent selected from U-shaped flaps, linear slits, round holes or X-shaped cut-outs such that the

intermediate portion is adapted to separate from the sidewall with an extent of shrinkage of from about 5 to 50% such that ambient air flows through the vent(s) to form an air pocket between the sidewall and the intermediate portion ambient air flows through the at least one vent to form an air pocket between the sidewall and the intermediate portion of the inner
5 liner.

In another aspect, there is provided a container comprising: a sidewall comprising paperboard; a shrink film inner liner affixed to the sidewall along upper and lower circumferential bands of the inner liner, wherein an intermediate portion of the inner liner
10 between the upper and lower circumferential bands is adapted to separate from the sidewall with an extent of shrinkage of from about 5 to 50% such that an air pocket is formed between the sidewall and the intermediate portion of the inner liner, wherein the sidewall is provided with a plurality of vents selected from U-shaped flaps, linear slits, round holes or X-shaped cut-outs wherein the form, number, and location of the vents are so located such
15 that the shrinkage of the shrink film is not unduly hindered by slow pressure equalization between ambient air and the forming air pocket thereby providing for equalization of the pressure in the air pocket with atmospheric pressure.

In another aspect, there is provided a container comprising: a tapered sidewall
20 comprising paperboard including a plurality of vents and having an inner surface coated with a plastic material; a shrink film inner liner, formed of a heat shrinkable plastic material, affixed to the sidewall along upper and lower circumferential bands of the inner liner, wherein an intermediate portion of the inner liner between the upper and lower circumferential bands is adapted to separate from the sidewall with an extent of shrinkage of
25 from about 5 to 50% such that ambient air flows through the vents to form an air pocket between the sidewall and the intermediate portion of the inner liner, the vents being disposed between the upper and lower circumferential bands near a brim of the sidewall, wherein the form, number, and location of the vents are so located such that the shrinkage of a shrink film is not unduly hindered by slow pressure equalization between ambient air
30 and the forming air pocket.

Additional advantages of the invention will be set forth in part in the description that follows, and in part will be obvious from the description, or may be learned by practice of

the invention. The advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as
5 claimed.

DESCRIPTION OF THE DRAWINGS

Figure 1 is a partially cut away front perspective view of a container incorporating an activated shrink film liner.

10

Figure 2 is a vertical cross section of the activated container of Figure 1.

Figure 3 is a layout of a web having the film adhered thereto for later cutting out into blanks.

15

Figure 4 shows different alternatives for the shape of the vents.

Figure 5 is a perspective view of a container having an activated insulating film.

20

Figure 6 is a plot of hold times for different types of shrink films.

Figure 7 is a plot of volume change with different types of shrink films.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

25 The present invention may be understood more readily by reference to the following detailed description of the invention and the examples provided herein. Before the present invention is disclosed and described, it is to be understood that the aspects described below are not limited to specific synthetic methods or specific reagents, and as such may vary. It is also to be understood that the terminology used herein is for the purpose of describing
30 particular aspects only and is not intended to be limiting.

Often, ranges are expressed herein as from "about" one particular value, and/or to "about" another particular value. When such a range is expressed, another

embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent "about," it will be understood that the particular value forms another embodiment. It will be further understood that the endpoints of each of the ranges are
5 significant both in relation to the other endpoint, and independently of the other endpoint.

As used herein, "beverage" is used for convenience. The containers of the present invention are suitable for use with not only beverages, but also soups and other hot foods that are held by a consumer during consumption thereof and wherein
10 insulation would be a beneficial aspect. Further, while the containers of the present invention are readily suitable for use for many types of food products, the containers can also be used generally to contain hot items having liquid characteristics.

"Activate" is used herein in relation to the shrink film wherein the shrink film has been contacted with hot material in a manner to provide shrinkage of the film in
15 an amount suitable to provide insulation effects in the container. Such insulation effects are described in more detail herein.

The present invention relates to an insulated container for hot beverages or other materials. The insulated container is formed from a suitable container material and a shrink film liner. The shrink film liner is adhered to the interior of the
20 container as discussed in more detail herein. When a hot material, such as coffee, soup, water *etc.*, is placed in the container, the film will activate to provide a pocket of air between the inner surface of the container sidewall and the inner surface of the shrink film, that is, the film surface facing the inner surface of the container sidewall. This pocket of air reduces the heat transfer from the hot material to the outer surface
25 of the container. An insulated container is therefore provided with the present invention.

Significantly, the insulated container of the present invention includes one or more vents in a portion of the outer wall of the container. Such vents, which are provided by cutting into a web of container material during manufacture of the
30 container, are an improvement over the prior art in which an insulating band adhered to container material without suitable venting was provided.

In use, the vents of the present invention have been found to substantially eliminate the formation of a vacuum in the space between the container sidewall and the shrink film liner. That is, it was found that when suitably sized vents were not present in the area defined by the insulating band, the ability of the shrink film to activate upon contact with a hot liquid was substantially limited by the amount of air present between the not suitably vented container wall and the film liner. In turn, the limited activation of the shrink film provided an air pocket having reduced volume and, accordingly, reduced insulation with the shrink film lined containers.

10 The inventors herein found that insulation effectiveness using a shrink film-lined container could be markedly improved by allowing air to freely flow through the container sidewall during the activation of the film liner upon contact with a hot material. It was found that such improvements could be obtained by including one or more suitable vents in the container sidewall as described in more detail below.

15 In one aspect, the vents are punched or otherwise formed in the container material (such as paperboard e.g., cupstock, when the container is made from paper) itself prior to formation of the container blanks. In this form, venting can be efficiently conducted by allowing free flow of air through the container wall when a hot material is poured into the container.

It should be noted that U.S. Patent No. 6,536,657 mentioned the addition of pinholes in the container sidewall or the slitting of the shrink film to assist in alleviating a partial vacuum resulting from shrink film activation. However, the inventors herein found that pinholes were not satisfactory to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material when used with the insulating band of the present invention. In other words, pinholes did not allow suitable venting. Accordingly, the vents of the present invention do not constitute pinholes. Still further, the vents of the present invention are larger than pinholes. Yet further, the vents of the present invention do not constitute tiny holes punched through the container sidewall as if made by the sharp end of a pin, such as that used for sewing. Still further, the one or more vents of the present invention are each, independently, about 10 times larger than a typical pinhole.

Typically, the need for insulation in a container for beverages or other materials is decreased as the beverage is stored in the container because the beverage will cool over time. A consumer will desire an insulating effect as long as the beverage is hot enough to cause discomfort when a container is held in the hand. The insulated container of the present invention is suitable to provide insulation such that the beverage container will have an external temperature of about 120 °F or less at the insulated portion of the container when held in a consumer's hand about 30 seconds after the container is filled with a hot beverage, where the beverage has an initial temperature of up to about 212 °F.

10 The "insulated portion" of the container is that portion of the container that is coextensive with the activated film and is defined by the area interior to the adhesive pattern printed on the container material (as is discussed in more detail below). As would be recognized, the areas of the container that are coextensive with the areas of adhesive will not be co-extensive with the activated film and will constitute minimal, if any, insulation. As such, it is desirable to maximize the amount of insulated area and minimize the amount of uninsulated area.

Still further, the insulated container provides insulation such that the beverage container will have an external temperature of 120 °F or less at the insulated portion of the container when held in a consumer's hand about 60 or about 90 or about 120 seconds or about 5 minutes after the container is filled with a hot material such as a beverage or otherwise, where the hot beverage has an initial temperature of up to about 212 °F.

25 "Initial temperature" means the temperature of the hot material when first placed in the container. As would be understood, hot beverages can be provided at a range of initial temperatures (which are generally from about 160 °F to about 195 °F, but sometimes even up to about 212 °F, such as with the use of boiling water for tea or instant coffee). For the purpose of the temperatures disclosed and claimed herein, the ambient air temperature is generally at or near about 75 °F.

As would be recognized, the hotter the initial temperature of the beverage, the hotter the external surface of the container will be when the container is filled with the hot beverage. Nonetheless, it has been found by the inventors herein that when activated, the insulating band of the present invention provides excellent insulation

(that is, the external surface of the container is at or below about 140°F or at about 120°F at 5 minutes or less after the container is filled with a beverage having an initial temperature of up to about 212°F) at all ranges of initial beverage temperatures in which hot beverages are generally served.

5

It has been found that when a container temperature is higher than about 140°F (which is defined as the "threshold of pain" in U.S. Patent No. 6,152,363, a typical consumer will find the container "too hot to handle." However, it is believed that temperatures of as low as about 120°F can cause discomfort to some sensitive people. The insulated containers
10 of the present invention provide suitable insulation so that the container is substantially at or below this threshold of pain and even the discomfort point for sensitive people when filled with a hot beverage having an initial temperature of less than about 212°F.

In one aspect, the vents can be provided in a paperboard container material by first die
15 cutting one or more shapes into the container material when the container is in web form. The shape of the vents is not believed to be critical, as long as the shape suitably allows air to freely flow through the container material sidewall during the film activation process.

For example, a U-shape can be cut into the container material which, in use, will
20 provide a flap that operates as the vent. Other vent shapes suitable to provide a flap-type vent can be determined by one of ordinary skill in the art without undue experimentation. Examples of such alternative vent shapes are pictured in Figure 4 herein.

It has been found that when a flap-type vent is used, it can be beneficial to provide the
25 container for use with the flap slightly out of plane (that is, angled to the inner or outer portion of the container wall) so that air can readily flow through the container wall during activation of the shrink film. To this end, a pushing device, such as a pusher pin, can be used to ensure that the flap is slightly out of plane from the surface of the container material prior to formation of the container. By having a slightly opened flap, it has been found that air
30 flow into the container sidewall is substantially instantaneous with the activation of the film.

Such substantially instantaneous air flow has been found to be particularly useful with the present invention because the activation of the shrink film is substantially instantaneous and coincident with the filling of the container with hot material. It has been found that when the liquid comes into contact with the film, the film immediately (or substantially immediately) shrinks. Thus, any significant delay in the air flow that limits the ability of the shrink film to fully activate has been found to reduce the insulation effectiveness of the container.

Still further, venting can be provided by punching holes into the container to provide air flow through the container sidewall. A die cutting device can be used to punch such structures out of the container material. It has been found that small holes should be provided when this method is used in order to minimize the appearance of holes in the container to the consumer. In one aspect, the holes are less than about 0.10 inches in diameter. Yet further, the holes are less than about 0.08 inches in diameter. Still further, the holes can be from about 0.05 to about 0.10 inches in diameter. Shapes other than circular can be used for the holes, such as square, triangular *etc.*

The vents can be positioned toward an upper region of the insulating band. Still further, the vents can be positioned in any position within the area of the insulating band.

The vents can vary in number, size and location and need not be all the same size, shape or dispersed uniformly within the area of the insulating band. The primary consideration regarding the vent characteristics is believed to be that shrinkage of the shrink film should not be unduly hindered by slow pressure equalization between ambient air and the forming air pocket, which forms substantially instantaneously upon contact of the shrink film with hot liquid, that is, liquid of at least about 130 °F.

Suitable paperboard container material that can be used for the containers of the present invention is cupstock. Cupstock that can be used for the present invention includes solid bleached sulfate ("SBS") from Georgia-Pacific Corporation (Atlanta, GA). Any type of paperboard that can be used to prepare beverage containers are suitable for use to prepare the insulated containers of the present invention.

While paperboard material has been found to lend itself quite suitably to the present invention, the inventors believe that the methods of the present invention can be used for containers made from polymeric materials such as, for example, polystyrene and biodegradable polymeric materials such as polylactic acid. In this regard, it is contemplated that vents can be cut into a web of polymeric material before the shrink film is applied to the container sidewall to provide a polymer web-shrink film laminate from which a container blank can be cut. A bottom can be applied to the container blank to provide a two piece polymeric container. The methods of preparing such a container are known to those of ordinary skill in the art and, as such, will not be discussed in detail herein. It is contemplated that, regardless of whether the container is prepared from paperboard or other material, the vents will function to allow the formation of a suitable insulated area in the container when the container is filled with hot liquid.

When paperboard is used as the container material, the basis weight can be from about 120 to about 250 pounds per ream. As used herein, a ream is 3000 square feet of material. Yet further, when paperboard is used as the container material, the basis weight of the container material can be from about 160 to about 220 pounds per ream. Still further, when paperboard is used for the container material, the basis weight can be from about 120, 140, 160, 180, 200, 220, 240 or 250 pounds per ream, where any value can be used as an upper or a lower endpoint, as appropriate.

When paperboard is used for the container material, the material typically has a coating pre-applied to assist in making the container resistant to liquid. The coating can be on the inner surface of the container or on both the inner and outer surfaces of the container. Such a coating can be polyethylene or any other type of coating that is generally used for imparting liquid resistance to beverage containers. Such coatings are generally applied to the cupstock in an extrusion process as would be recognized by one of ordinary skill in the art. The coating also serves as the method of sealing the container in the forming process.

In order to provide the insulating band for the insulated beverage containers of the present invention made from paperboard, a polymeric shrink film is applied to one side of a web of the container material. While there are numerous temperature ranges in which shrink films can activate, the polymeric shrink film used in the

present invention must exhibit suitable shrinkage under the temperatures exhibited by hot beverages. When subjected to heating resulting from contact with a hot material, the shrink film will shrink away from the sidewall of the container to provide an air-filled insulating band. In order to provide this band, the amount of shrinkage of the shrink film when contacted with a hot beverage having a temperature of from about 130 °F to up to about 212 °F can be from about 5 % to about 50 %, as measured by total area of the original area of the shrink film. Still further, the amount of shrinkage of the shrink film when contacted with a hot material having a temperature of from about 130 °F to about 212 °F can be from about 5, 10, 15, 20, 25, 30 or 35% of the total area of the shrink film, where any value can serve as an upper or a lower endpoint, as appropriate.

It will be recognized that, in use, the shrink film will not shrink unless a hot material comes into contact with the film. However, there will be no need for insulation if there is not a hot material contained in the container, so there will be no requirement for an insulating band to be formed if a lukewarm or cold beverage is contained within a container of the present invention. As such, the containers can be used for both hot and cold materials, beverage or otherwise.

It will be further recognized that shrinkage of the film will result in some loss of the total available volume of the container. In one aspect, the loss of volume from shrinkage of the shrink film is less than about 30 %, where the amount of shrinkage is measured by the area difference in the shrunken film as compared to the original area of the film prior to contact with hot liquid. Still further, the loss of volume from shrinkage of the shrink film is less than about 20 %. Still further, the loss of volume from shrinkage of the shrink film is less than about 10 %. Yet further, the loss of volume from shrinkage of the shrink film is less than about 5 %.

To assist the user in filling the container, the interior of the container can be marked with a fill line to show the maximum volume to which the container can be filled without concern of overflow. However, a fill line is not necessary. Due to the shrinkage of the film being substantially simultaneous with the film coming into contact with the hot material, the final volume of the container is substantially immediately obtained as the hot material is added to the container. Put simply, although some volume loss will occur upon activation of the shrink film, such loss

will not generally be noticeable by the consumer because the consumer will stop filling the container when the container is full.

In order to provide the consumer with the advertised serving size, the container will have to be larger than the final serving size to account for volume loss resulting from film activation. In this regard, the initial container volume (that is, the container having an unactivated film adhered to the interior thereof), will have a volume that is approximately larger than the final volume size. For example, initial container size for a final serving size of 12 ounces of hot liquid where the shrink film shrinks about 10 % will be approximately 13.2 ounces.

10 The shrink film can comprise one or more layers of either or both of polyethylene or polypropylene. Suitable shrink films for use in the present invention include Clysar LLGT (60 gauge polyethylene film), VEZT (50 gauge 3 layer polypropylene/polyethylene/polypropylene film) and EZT (60 gauge 3 layer polypropylene/polyethylene/polypropylene film (Bemis Clysar, Oshkosh, WI). Other
15 suitable shrink films having the characteristics needed for use in the present invention can be identified by one of ordinary skill in the art without undue experimentation.

Suitable adhesives for use in the present invention are those that will not experience failure or marked deterioration of lamination strength upon contact with the hot liquid. As would be appreciated, if the adhesive fails or markedly deteriorates
20 upon contact with hot liquid, the shrink film will pull away (that is, delaminate) from the sidewall of the container upon activation. If this happens, little or no insulation will be provided by the shrink film because the insulating band will not be suitably formed.

Accordingly, the adhesive used in the present invention will result in the
25 shrink film undergoing substantially no delamination upon contact with hot material having an initial temperature of up to about 212 °F where the external (air) temperature is at about ambient, when the film is in contact with this hot material for at least about 5 minutes. While the adhesives used in the present invention can suitably provide good adhesion of the shrink film to the container surface for longer
30 than 60 seconds, it will be appreciated that when the hot material is placed in the container, it will immediately begin to cool. As such, the hot material in the cup will

decrease in temperature over time and the adhesive will be subjected to steadily decreasing temperatures as the hot material with which it is in contact cools.

An adhesive suitable for use in the present invention is Henkel 6B-5458M, a product
5 of Henkel Adhesives (Elgin, IL). A further suitable adhesive is BUV-008, a product of
Royal Adhesives (South Bend, IN). Other suitable adhesives can be determined for use in
the present invention by those of ordinary skill in the art without undue experimentation.

The adhesive can be applied to the container material in a shape that defines the area
10 that will provide the insulation band perimeter. When applying the adhesive using a
flexographic printing process, the adhesive can be applied to the web of container material
in a pattern that follows the desired lamination locations for the film. As noted, in order to
reduce areas in the container where insulation is limited, it can be desirable to minimize the
area of the container wall covered by adhesive. Upon placement of the adhesive onto the
15 interior surface of the container, a web of shrink film is brought into contact with the
uncured adhesive that is laid out in the desired pattern on the web of container material.
The adhesive can be applied to the container material so as to provide a peripheral
attachment of the shrink film as shown, for example, in Figure 3. The adhesive can also be
applied to the web of container material in a pattern, such as those disclosed in U.S. Patent
20 No. 6,536,657 and 6,729,534 and U.S. Patent Publication No. 2005-0029337.

Alternatively, the adhesive can be applied to a web of shrink film material. In such
an application, the container material is brought into contact with the shrink film web after
application of the adhesive to the shrink film. When the adhesive is applied in this manner,
25 further steps can be as discussed elsewhere herein.

It has also been found to be useful to reduce or eliminate adhesive in the area of the
containers at which the seams of the container are located. Therefore, as illustrated by the
shaded portion 47 of Figure 3, the adhesive can be laid down in a pattern on the web of
30 container material such that there is substantially no adhesive present on the container
sidewall where the seams in the finished container will be located.

Blanks are cut from the laminate comprising the shrink film web and container material web to provide the desired final container shape. As seen in Figure 3, the shaded portion 47 of the portion of the laminate (that will define the container blank when cut from the web) shows a suitable adhesive pattern to prepare a
5 container of the present invention. As shown in Figure 3, the adhesive can be applied up to the brim edge of what will be a container. The shrink film will then span the entire brim of the container in use. This is also shown in Figure 5.

Additionally, Figure 3 illustrates a suitable adhesive pattern whereby the adhesive is not applied to the outer portions of what will form the side and bottom
10 seams. As noted, it has been found that reduction or elimination of the adhesive from the heat seal location can provide better cup formation and containers that are more likely to be leak-proof or substantially leak-proof. By providing a container seal area having substantially no adhesive present, it has been found possible to seal the
15 containers using, for example, heat sealing of a polyethylene coating applied to the inner surface of the cupstock. Such polyethylene heat sealing allows the insulated containers of the present invention to be manufactured on conventional container manufacturing equipment, which greatly enhances the utility of the present invention.

In a method of making the container, the insulated container is prepared by providing a web of paperboard container material. The web is of a sufficient width to
20 provide one or more container blanks cuttable from the web when the shrink film is adhered to the web using adhesives as discussed further herein. One or more vents are cut into the web using a suitable cutting apparatus. When the vents are U-shaped flaps, it can be beneficial to ensure that the flap is out of plane of the container. To this end, a pusher pin can be used to fully push the vents out of plane.

25 After cutting of the vents, the web can be rolled for future use, or the web can be immediately directed to the next processing step. In the adhesive application step, an adhesive can be printed on the web in a pattern coinciding with a perimeter of one or more container blanks that will be cut from the container material web. The number of container blanks that can be printed on the web is dependent on the web width and
30 the characteristics of the printing equipment used in this process. When the container material web is printed with adhesive, one or more adhesive patterns are provided on the web.

While the adhesive is still tacky or "green," a web of shrink film is brought into contact with the web. The shrink film will therefore be adhered to the paperboard web where the adhesive has been printed on that web. A laminate comprising the shrink film and the container material is thus provided.

5 After the laminate is obtained, the laminate can be rolled for later use or can be in-line directed to a laminate cutting station. At this cutting station, the container blanks will be cut from the web. Referring to Figure 3, because adhesive is substantially absent from the outer and lower sidewall edges 48a, 48b and 49b, when the container blank is cut from the container material-shrink film laminate, the shrink
10 film will be adhered to the container sidewall as shown by the shaded portion 47.

When cut from the container material-shrink film laminate, the container blank is typically sent to a container forming station for preparation of the container. As noted, the present invention allows the use of conventional container forming equipment and methods. Such methods are well known and will not be discussed in
15 detail herein except where the present invention has significant features in relation to these forming methods.

While the container forming methods are not discussed in detail, it is significant to the present invention that the side and lower outer edges of the container blank (48a, 48b and 49b in Figure 3) do not have adhesive in the locations that will be
20 joined at the side seam and bottom of the finished container. It has been found that the seal of the container (and thus the ability to obtain leak resistant or substantially leak resistant containers) can be markedly improved if the adhesive is absent or substantially absent from the seam locations in the finished container.

To form the seals of the finished container, the outer and lower edges of the
25 container blank are pre-heated to melt the polyethylene located on the container blank. The container blank is then formed around a mandrel to form the side seam of the container. A separately cut bottom portion is then provided on the bottom of the partially finished container.

After formation of the container, a brim curl can be provided on the container
30 using known methods. The containers are then provided for packaging and shipping using known methods.

Turning now to the drawings, Figure 1 illustrates a partially cut away front perspective view of a container 10 having an activated shrink film 14. The container 10 formed from paperboard (such as SBS) has an activated shrink film 14 affixed to the inner surface 16 of the container 10 at the locations of adhesive 19, which are
5 designated by shading the Figures. The intermediate portion of the activated shrink film 14 defines the activated shrink film 14 of the container 10, which is that portion between the upper and lower circumferential bands 20, 22 (which also correspond to locations of adhesive 19).

Still referring to Figure 1, the sidewall 26 includes at least one vent 30
10 disposed within the activated shrink film 14 of the container 10. The vertical seam 34 of the insulated container 10 connects the two side edges (48a and 48b of Figure 3) of the generally annular sector-shaped blank from which sidewall 26 is formed.

Referring to Figure 2, activated shrink film 14 of insulated container 10 is disposed away from the inner surface 16 of the sidewall 26. Activated shrink film 18
15 substantially surrounds the entire circumference of the container 10 and comprises a pocket 38 of ambient air that has passed through the vents 30 in the sidewall 26 upon contact of the activated shrink film 14 with hot liquid (not shown).

Figure 3 illustrates an adhesive pattern for lamination of an unactivated shrink film 44 located in a portion of a web of container material 40. The lamination pattern
20 includes a portion of container material web 42 onto which a web of shrink film 44 is laminated. The adhesive pattern (that is the area where the adhesive is printed on the web of container material 40) is shown by 47. 48a, 48b and 49b of the portion of container material web 42 are the outer edges where adhesive is absent. U-shaped vents 46 can be cut into the web of container material 40 in locations on the portion
25 of container material web 42 corresponding to the insulated band 50 prior to lamination the shrink film 44 onto the web of container material 40.

Alternative vent shapes and locations are depicted in Figure 4. For example, the vents can be large flaps 46, small flaps 52, perforations 54 and 56, x-shaped cut-outs 58, round holes 60, or any other suitable shapes.

30 Figure 5 is a perspective view of an activated container 10. Shaded portion 19 illustrates the locations where activated shrink film 14 is adhered to the inner portion of the container sidewall 26. Activated shrink film 14 (that is, the insulating band), of

the activated container 10 can be activated by contact with hot liquid (not shown). The container sidewall 26 is attached to container bottom 62. Vents 30 are disposed in container sidewall 26.

5 **EXAMPLES**

The following Examples are put forth so as to provide those of ordinary skill in the art with a complete disclosure and description of how the present invention is practiced, and associated processes and methods are constructed, used, and evaluated, and are intended to be purely exemplary of the invention and are not intended to limit
10 the scope of what the inventors regard as their invention. Efforts have been made to ensure accuracy with respect to numbers (*e.g.*, amounts, temperature, *etc.*) but some errors and deviations should be accounted for. Unless indicated otherwise, parts are parts by weight, temperature is as specified or is at ambient temperature, and pressure is at or near atmospheric.

15

EXAMPLE 1

Hold times in relation to type of shrink film used for insulation band

Figure 6 shows the results of hold time tests using different types of shrink films.

20 Hold time was measured using a panel of about 20 men and women (generally equally divided) who held containers filled with 190 °F liquid and were asked to indicate when the container became too hot to hold comfortably. Participants were directed to not hold the container at the seam portion (which contained no insulation band). The test was stopped at 2 minutes (which was considered to conform to an
25 infinite hold time).

The shrink films examined were: 1. Clysar LLGT (60 gauge polyethylene film); 2. VEZT (50 gauge 3 layer polypropylene/polyethylene/polypropylene film); and 3. EZT (60 gauge 3 layer polypropylene/polyethylene/polypropylene film. These were all products of Bemis Clysar, Oshkosh, WI. The shrink film was applied the
30 pattern shown in Figure 3. The adhesive used was Henkel 6B-5458M. The initial temperature of the liquid used to activate the shrink film was 190 F.

The results of this examination illustrated in Figure 6 show that the type of shrink film used can have an effect on the insulation qualities of the container. It is believed that the differences in hold times (which directly relates to insulation effectiveness) are due to the temperature at which the shrink film experiences shrinkage. LLGT, which is polyethylene, experiences significant shrinkage at all temperatures tested. VEZT and EZT, which are each 3 layered films comprised of 2 polypropylene outer layers and a polyethylene inner layer experience lesser shrinkage at lower temperatures. While these films do not show the same performance of LLGT, they still were judged to provide effective insulation and, as such, are suitable for use in the present invention.

EXAMPLE 2

Cup capacity in relation to type of shrink film used for insulation band

Figure 7 illustrates the loss of volume seen with different shrink film types. These results show that to obtain a final liquid volume of about 12 ounces, the unactivated container capacity needs to be larger to account for volume loss.

While the invention has been described in connection with numerous examples, modifications to those examples within the spirit and scope of the invention will be readily apparent to those of skill in the art. In view of the foregoing discussion, relevant knowledge in the art and references including co-pending applications discussed above in connection with the Background and Detailed Description, the disclosures of which are all incorporated herein by reference, further description is deemed unnecessary.

WHAT IS CLAIMED IS:

1. A container comprising:

a) a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface;

b) an activatable shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band wherein the insulation band is located between upper and lower circumferential bands where the shrink film is secured to the sidewall; and

c) one or more vents cut into the paperboard material, wherein the vents are located within an inner perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during activation of the shrink film, and wherein the vents define an opening in the sidewall of 0.05 inches or more across, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material,

thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about 130° F to up to about 212° F, wherein the container exhibits a volume before activation of the shrink film of from about 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

2. The container of claim 1, wherein the shrink film is activatable when contacted with a material having a temperature from about 130° F to about 212° F.

3. The container of claim 1 or 2, wherein the paperboard material has a basis weight of from about 160 to about 220 pounds per ream.

4. The container of any one of claims 1 to 3, wherein the one or more vents are U-shaped.

5. The container of any one of claims 1 to 3, wherein the one or more vents are X-shaped cutouts.

6. The container of any one of claims 1 to 5, wherein the one or more vents each, independently, comprise a hole having a diameter of from about 0.05 to about 0.10 inches in diameter.

7. The container of any one of claims 1 to 5, wherein the one or more vents each, independently, has an area of at least about 10 times larger than a pinhole.
8. The container of any one of claims 1 to 7, wherein the shrink film does not substantially delaminate from the sidewall when contacted with a material having an initial temperature from about 130° F to about 212° F.
9. The container any one of claims 1 to 8, wherein the shrink film is applied to the sidewall with an adhesive and wherein the adhesive is applied to the sidewall in a pattern that results in essentially no adhesive being present in a side seam or a bottom seam of the container.
10. The container of any one of claims 1 to 9, wherein the shrink film comprises one or more layers of polyethylene or polypropylene.
11. The container of any one of claims 1 to 9, wherein the shrink film consists essentially of polyethylene.
12. The container of any one of claims 1 to 11, wherein the one or more vents are located on an upper portion of the sidewall of the container.
13. A method of making a container blank suitable for preparing an insulated container:
- a) providing a container material web comprising paperboard, wherein the web is of a sufficient width to provide one or more container blanks cuttable from the web;
 - b) cutting the container material web so as to provide one or more vents in a sidewall of one or more container blanks cuttable from the web;
 - c) applying an adhesive to the container material web in a pattern approximately coinciding with a perimeter of one or more container blanks cuttable from the web, thereby providing one or more adhesive patterns on the container material web;
 - d) applying a shrink film web to the one or more adhesive patterns to provide a web-shrink film laminate, wherein the shrink film is adhered to the container material web at locations defined by the one or more adhesive patterns;

e) cutting the container material-shrink film laminate to provide one or more container blanks, wherein the container blanks comprise one or more vents in a location within a perimeter defined by the adhesive pattern, wherein the one or more vents substantially eliminate the formation of a vacuum in a space between the container material web and the shrink film during an activation of the shrink film;

wherein the container blank is suitable for preparing an insulated container.

14. The method of claim 13, further comprising:

a) providing the container blank, wherein the container blank has two outer edges and a bottom portion substantially free of the adhesive pattern;

b) heating the two outer edges and bottom portion;

c) forming the container blank on a mandrel to join the two outer edges;

d) applying a bottom to the container blank at the bottom portion;

thereby providing a substantially leak resistant container suitable for providing insulation when filled with a liquid having a temperature from about 130° F to up to about 212° F.

15. The method of claim 13 or 14, wherein the vents are of a size and shape suitable to allow air to freely flow through the sidewall during activation of the shrink film.

16. The method of any one of claims 13 to 15, wherein the shrink film is activatable when contacted with a material having an initial temperature from about 130° F to about 212° F.

17. The method of any one of claims 13 to 16, wherein the paperboard has a basis weight of from about 160 to about 220 pounds per ream.

18. The method of any one of claims 13 to 17, wherein the one or more vents are U-shaped.

19. The method of any one of claims 13 to 18, wherein the one or more vents each, independently, comprise a hole having a diameter of from about 0.05 to about 0.1 inches in diameter.

20. The method of any one of claims 13 to 18, wherein the one or more vents each, independently, is greater than about 10 times the area of a pinhole.

21. The method of any one of claims 13 to 20, wherein the shrink film does not substantially delaminate from the container when the container is contacted with a material having an initial temperature from about 130° F to about 212° F.

22. The method of any one of claims 13 to 21, wherein the shrink film comprises one or more layers of polyethylene or polypropylene.

23. The method of any one of claims 13 to 22, wherein the container blank is for a sleeve.

24. A method of making a container blank suitable for preparing an insulated container:

a) providing a container material web comprising paperboard, wherein the web is of a sufficient width to provide one or more container blanks cuttable from the web;

b) cutting the container material web so as to provide one or more vents in a sidewall of the one or more container blanks cuttable from the web;

c) providing a shrink film web, wherein the shrink film is activatable by contact with a hot material having an initial temperature of from about 130° F to up to about 212° F;

d) applying an adhesive in an adhesive pattern to the shrink film web, wherein the pattern coincides with a perimeter of the one or more container blanks cuttable from the shrink film web, thereby providing one or more adhesive patterns on the shrink film web;

e) marrying the shrink film web with the container material web, thereby providing container material-shrink film laminate, wherein the container material is adhered to the shrink film web in the locations defined by the adhesive pattern;

f) cutting the container material-shrink film laminate to provide the one or more container blanks, wherein the container blanks comprise one or more vents in a location within a perimeter defined by the adhesive pattern, wherein the one or more vents substantially eliminate the formation of a vacuum in a space between the container material web and the shrink film during an activation of the shrink film;

wherein the container blank is suitable for preparing an insulated container.

25. The method of claim 24, wherein the container blank is for a sleeve.

26. A container comprising:

a) a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface;

b) an activatable shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band, wherein the insulation band is located between upper and lower circumferential bands where the shrink film is secured to the sidewall; and

c) one or more vents cut into the paperboard material, wherein the vents are selected from flap-type vents, elongate slits and holes defining an opening in the sidewall of 0.05 inches or more across and wherein the vents are located within an inner perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during activation of the shrink film, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material,

thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about 130° F to up to about 212° F, wherein the container exhibits a volume before activation of the shrink film of from about 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

27. A container comprising:

a) a sidewall comprising a paperboard material, wherein the sidewall has an inner and an outer surface;

b) an activatable shrink film adhered to the inner surface of the sidewall in a pattern that defines an activatable insulation band, such that the activated shrink film defines a single centrally disposed air pocket extending substantially around the entire circumference of the container, wherein the insulation band is located between upper and lower circumferential bands where the shrink film is secured to the sidewall; and

c) a plurality of circumferentially spaced vents cut into the paperboard material, wherein the vents are selected from flap-type vents, elongate slits and holes defining an opening in the sidewall of 0.05 inches or more across and are located within an inner

perimeter of the insulation band, and wherein the vents are of a size and shape suitable to allow ambient air to freely flow through the sidewall during activation of the shrink film, so as to allow substantially simultaneous activation of the shrink film upon contact of the shrink film with a hot material, thereby providing a container suitable for providing insulation when the container is filled with a material having a temperature of from about to up to about 212° F, wherein the container exhibits a volume before activation of the shrink film of from about 10 to about 40% greater than a maximum fill volume after activation of the shrink film.

28. A container comprising:

- a sidewall comprising paperboard including one or more vents;

- a shrink film inner liner having an intermediate portion peripherally affixed to the sidewall at upper and lower circumferential bands, the one or more vents being disposed within a periphery of the intermediate portion wherein the intermediate portion is adapted to separate from the sidewall with an extent of shrinkage from about 5 to 50% such that ambient air flows through the one or more vents to form an air pocket between the sidewall and the intermediate portion wherein the form, number, and location of the one or more vents are so located such that the shrinkage of the shrink film is not unduly hindered by slow pressure equalization between ambient air and the forming air pocket.

29. The container of claim 28, wherein the one or more vents are disposed near a brim of the sidewall.

30. The container of claim 28 or 29, wherein the one or more vents comprise a flap in the sidewall.

31. The container of any one of claims 28 to 30, wherein an inner surface of the sidewall is coated with a plastic material.

32. The container of claim 31, wherein the plastic material comprises a polyethylene plastic material.

33. The container of any one of claims 28 to 30, wherein the inner liner is formed of a biaxially oriented heat shrinkable plastic material.

34. The container of any one of claims 28 to 33, wherein the container is a sleeve.

35. A container comprising:

a sidewall comprising paperboard including at least one vent;

a shrink film inner liner affixed to the sidewall along upper and lower circumferential bands of the inner liner, the at least one vent being disposed between the upper and lower circumferential bands, wherein an intermediate portion of the inner liner between the upper and lower circumferential bands is adapted to separate from the sidewall wherein the sidewall is provided with at least one vent selected from U-shaped flaps, linear slits, round holes or X-shaped cut-outs such that the intermediate portion is adapted to separate from the sidewall with an extent of shrinkage of from about 5 to 50% such that ambient air flows through the at least one vent to form an air pocket between the sidewall and the intermediate portion ambient air flows through the at least one vent to form an air pocket between the sidewall and the intermediate portion of the inner liner.

36. The container of claim 35, wherein the at least one vent is disposed near a brim of the sidewall.

37. The container of claim 35 or 36, wherein the at least one vent comprises a flap in the sidewall.

38. The container of any one of claims 35 to 37, wherein the inner liner comprises a heat shrinkable plastic material.

39. The container of claim any one of claims 35 to 37, wherein an inner surface of the sidewall is coated with a plastic material.

40. The container of claim 39, wherein the plastic material comprises a polyethylene plastic material.

41. The container of any one of claims 35 to 37, wherein the inner liner is formed of a biaxially oriented heat shrinkable plastic material.

42. The container of any one of claims 35 to 41, wherein the container is a sleeve.

43. A container comprising:

a sidewall comprising paperboard;

a shrink film inner liner affixed to the sidewall along upper and lower circumferential bands of the inner liner, wherein an intermediate portion of the inner liner between the upper and lower circumferential bands is adapted to separate from the sidewall with an extent of shrinkage of from about 5 to 50% such that an air pocket is formed between the sidewall and the intermediate portion of the inner liner,

wherein the sidewall is provided with a plurality of vents selected from U-shaped flaps, linear slits, round holes or X-shaped cut-outs wherein the form, number, and location of the vents are so located such that the shrinkage of the shrink film is not unduly hindered by slow pressure equalization between ambient air and the forming air pocket thereby providing for equalization of the pressure in the air pocket with atmospheric pressure.

44. The container of claim 43, comprising at least one vent disposed near a brim of the sidewall.

45. The container of claim 44, wherein the at least one vent comprises a flap in the sidewall.

46. The container of any one of claims 43 to 45, wherein the inner liner comprises a heat shrinkable plastic material.

47. The container of any one of claims 43 to 45, wherein the inner liner is formed of a biaxially oriented heat shrinkable plastic material.

48. The container of any one of claims 43 to 47, wherein the container is a sleeve.

49. A container comprising:

a tapered sidewall comprising paperboard including a plurality of vents and having an inner surface coated with a plastic material;

a shrink film inner liner, formed of a heat shrinkable plastic material, affixed to the sidewall along upper and lower circumferential bands of the inner liner, wherein an intermediate portion of the inner liner between the upper and lower circumferential bands is adapted to separate from the sidewall with an extent of shrinkage of from about 5 to 50% such that ambient air flows through the vents to form an air pocket between the sidewall and the intermediate portion of the inner liner, the vents being disposed between the upper and lower circumferential bands near a brim of the sidewall, wherein the form, number, and location of the vents are so located such that the shrinkage of a shrink film is not unduly hindered by slow pressure equalization between ambient air and the forming air pocket.

50. The container of claim 49, wherein each vent comprises a flap in the sidewall.

51. The container of claim 49 or 50, wherein the plastic material comprises a polyethylene plastic material.

52. The container of claim 49 or 50, wherein the inner liner is formed of a biaxially oriented heat shrinkable plastic material.

53. The container of any one of claims 49 to 52, wherein the container is a sleeve.

1/5

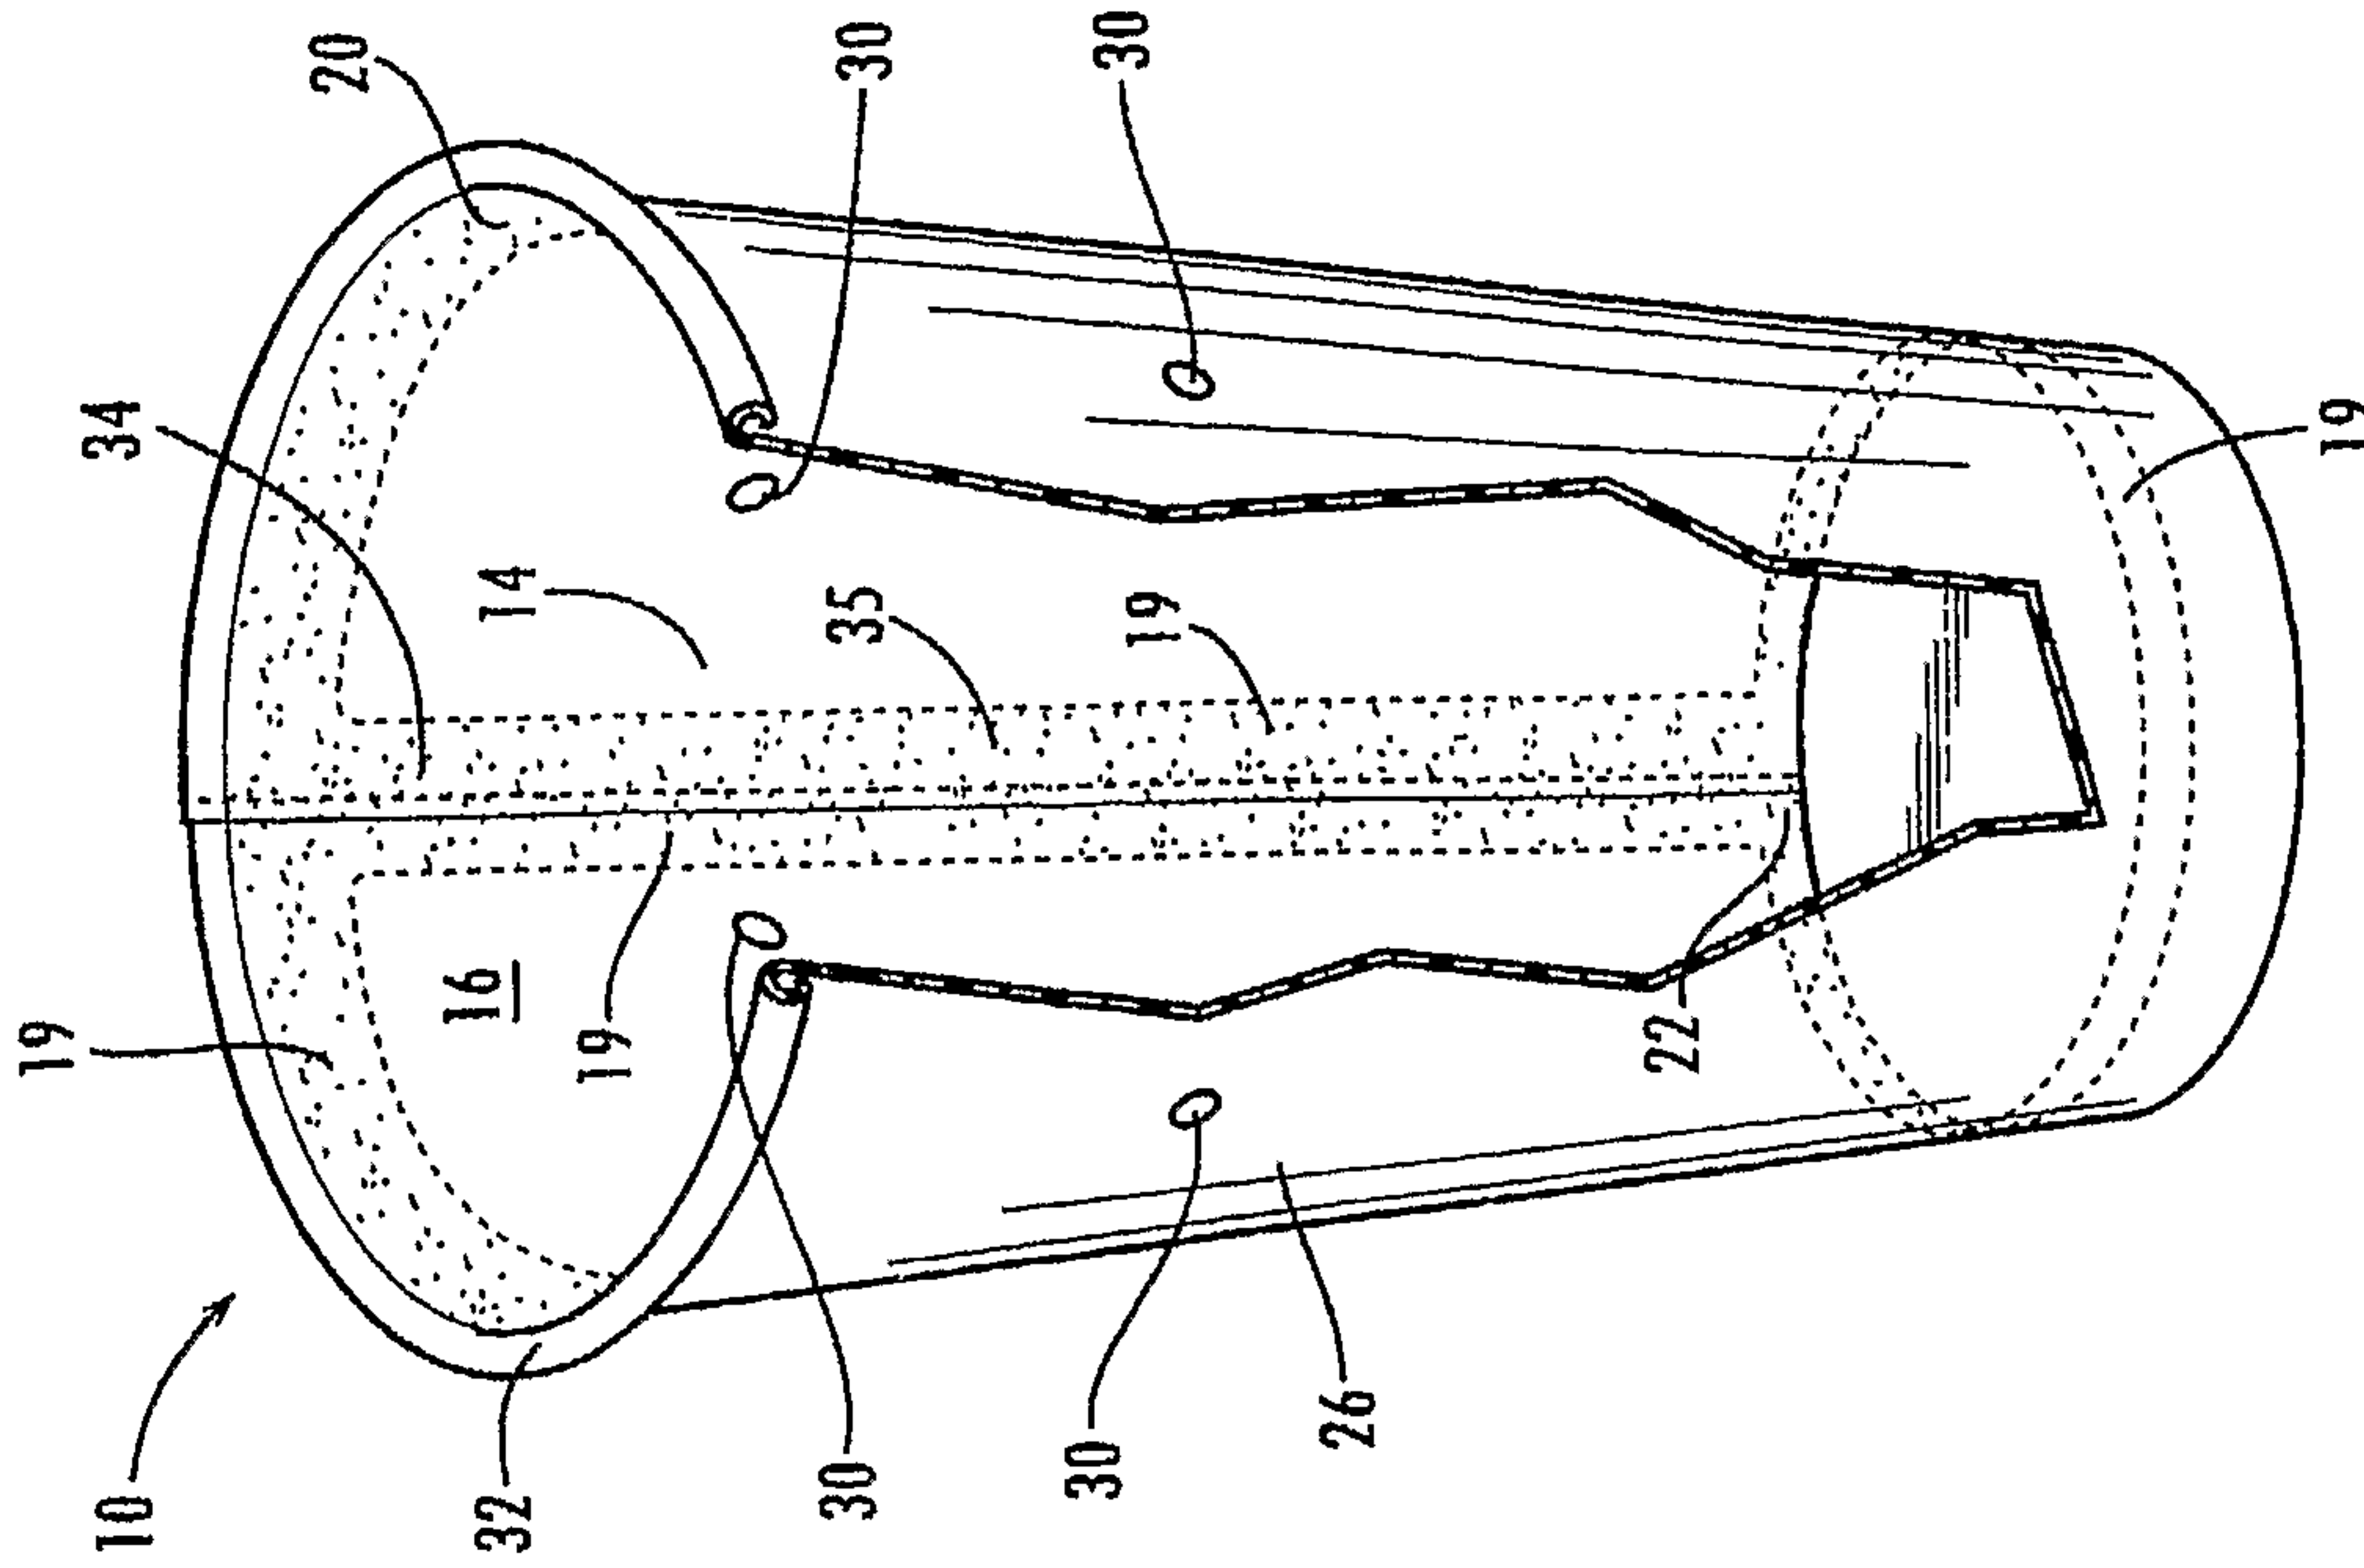


Fig. 1

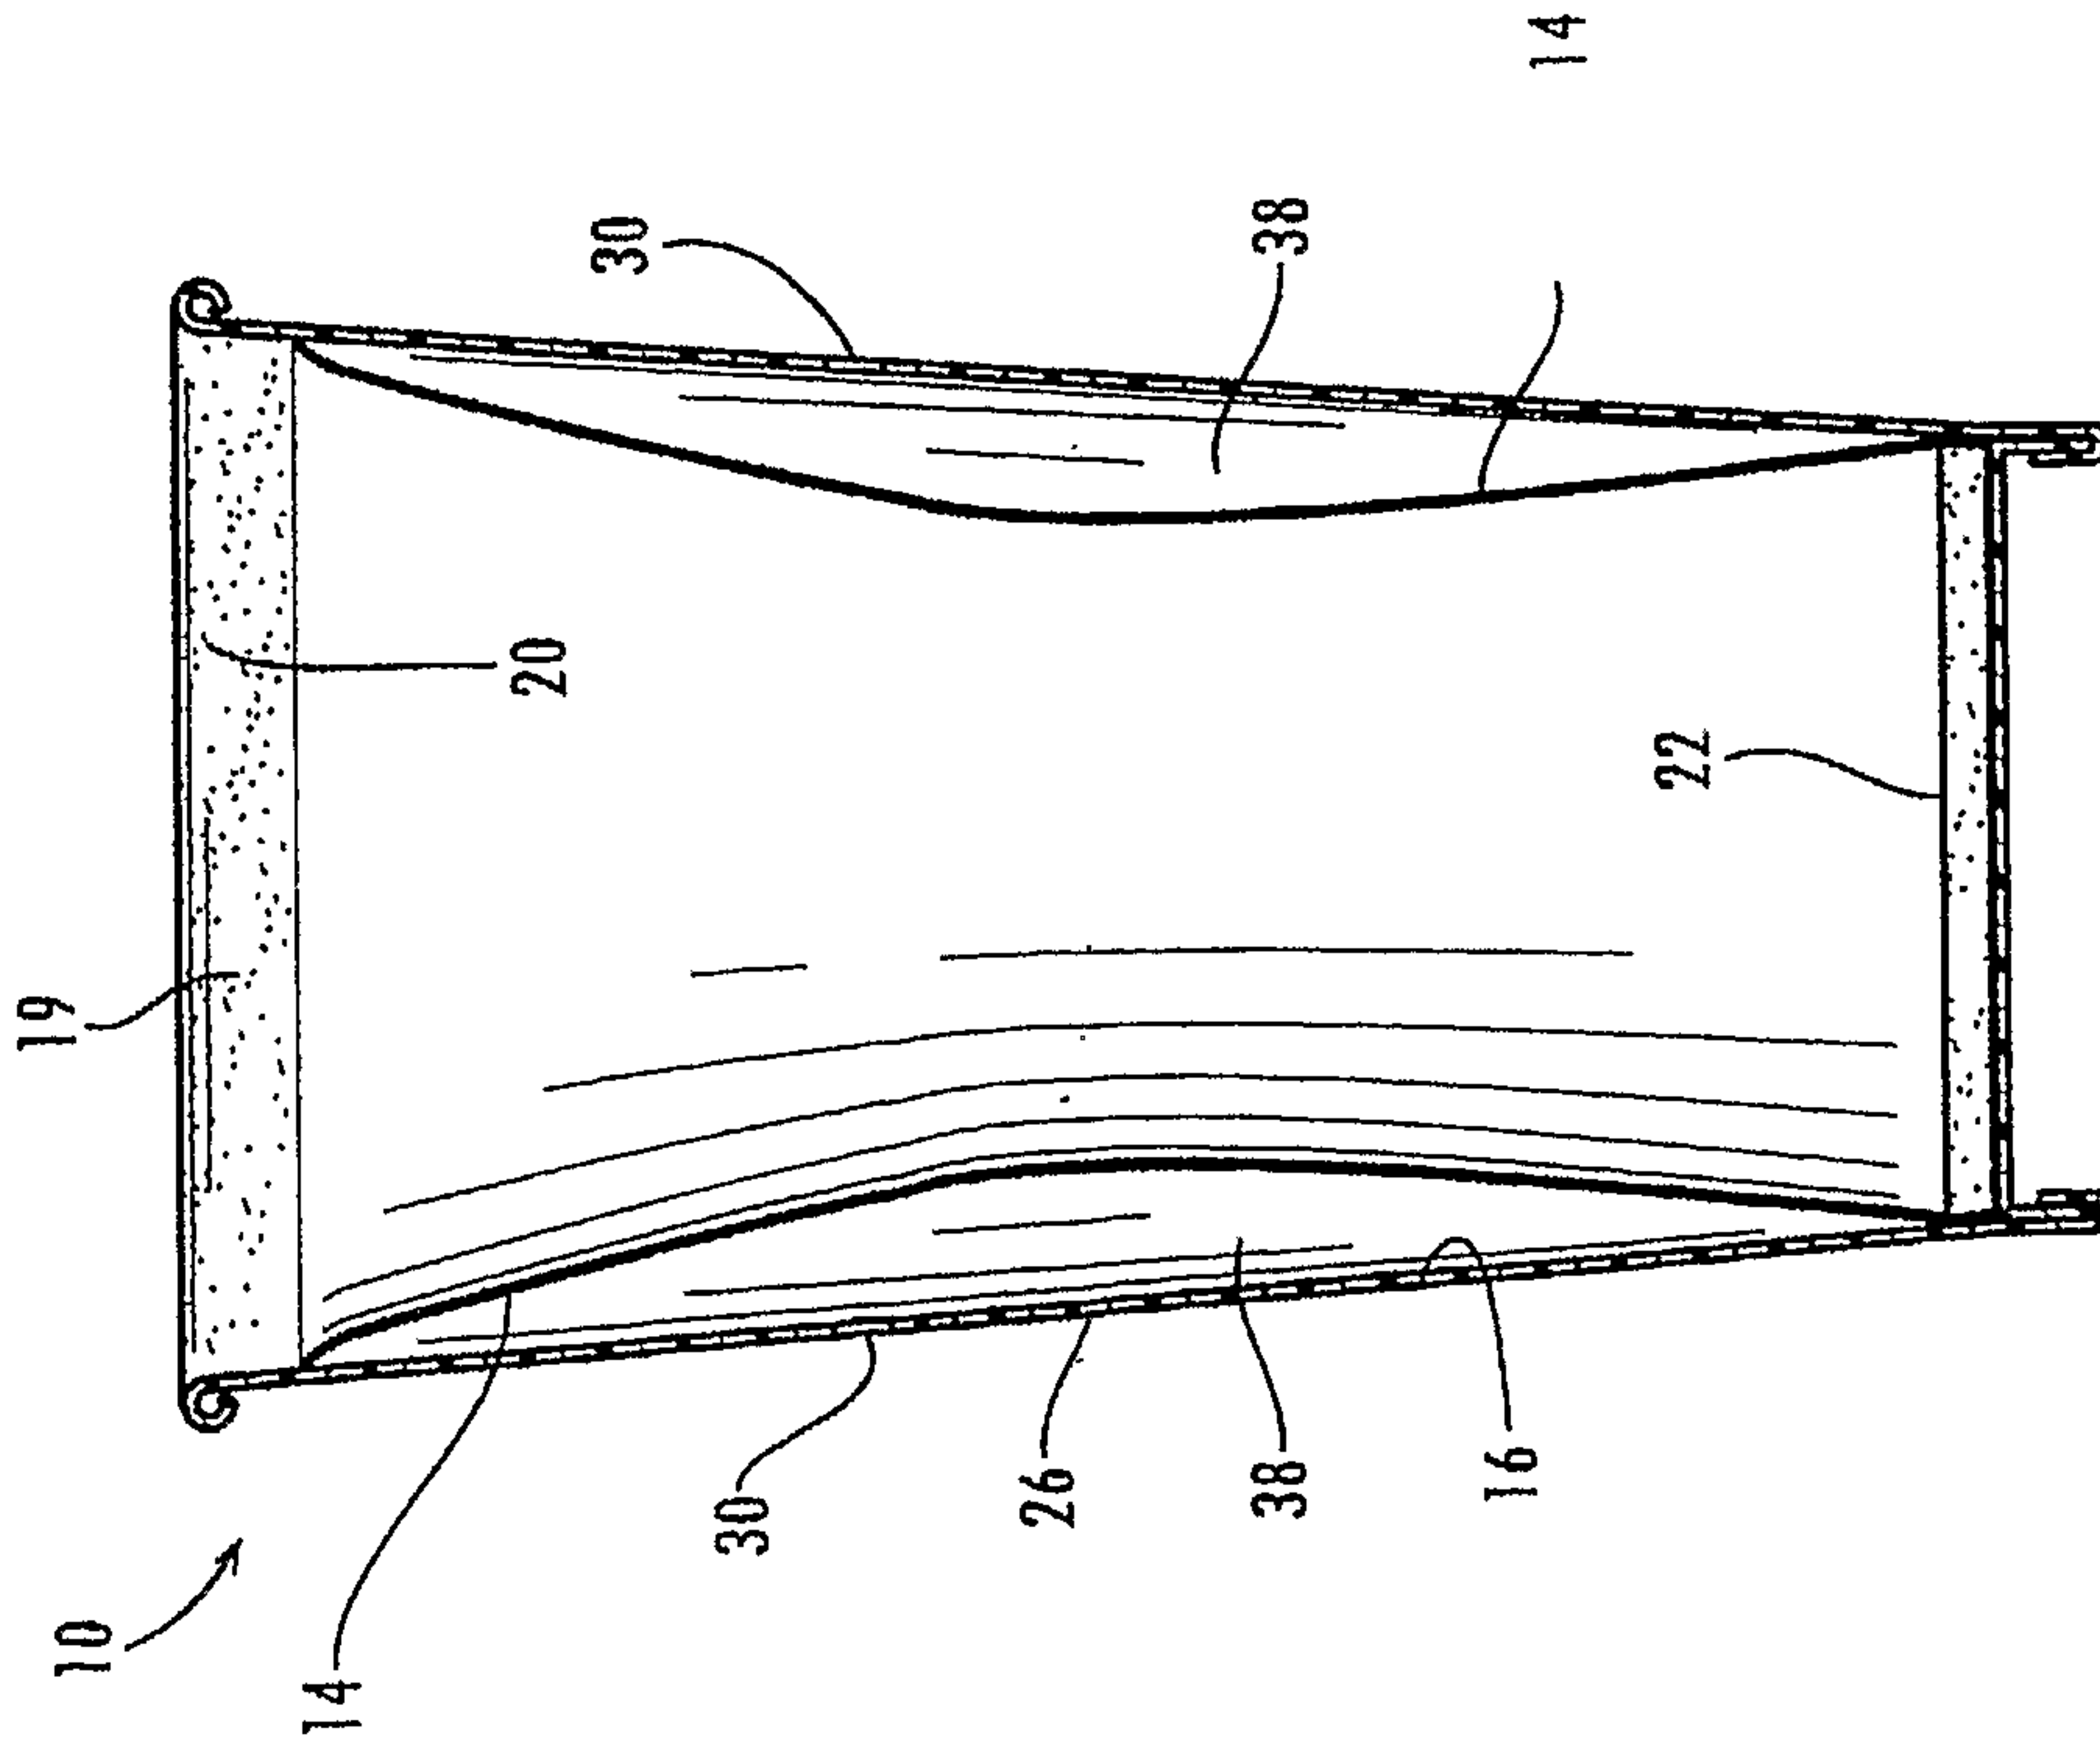
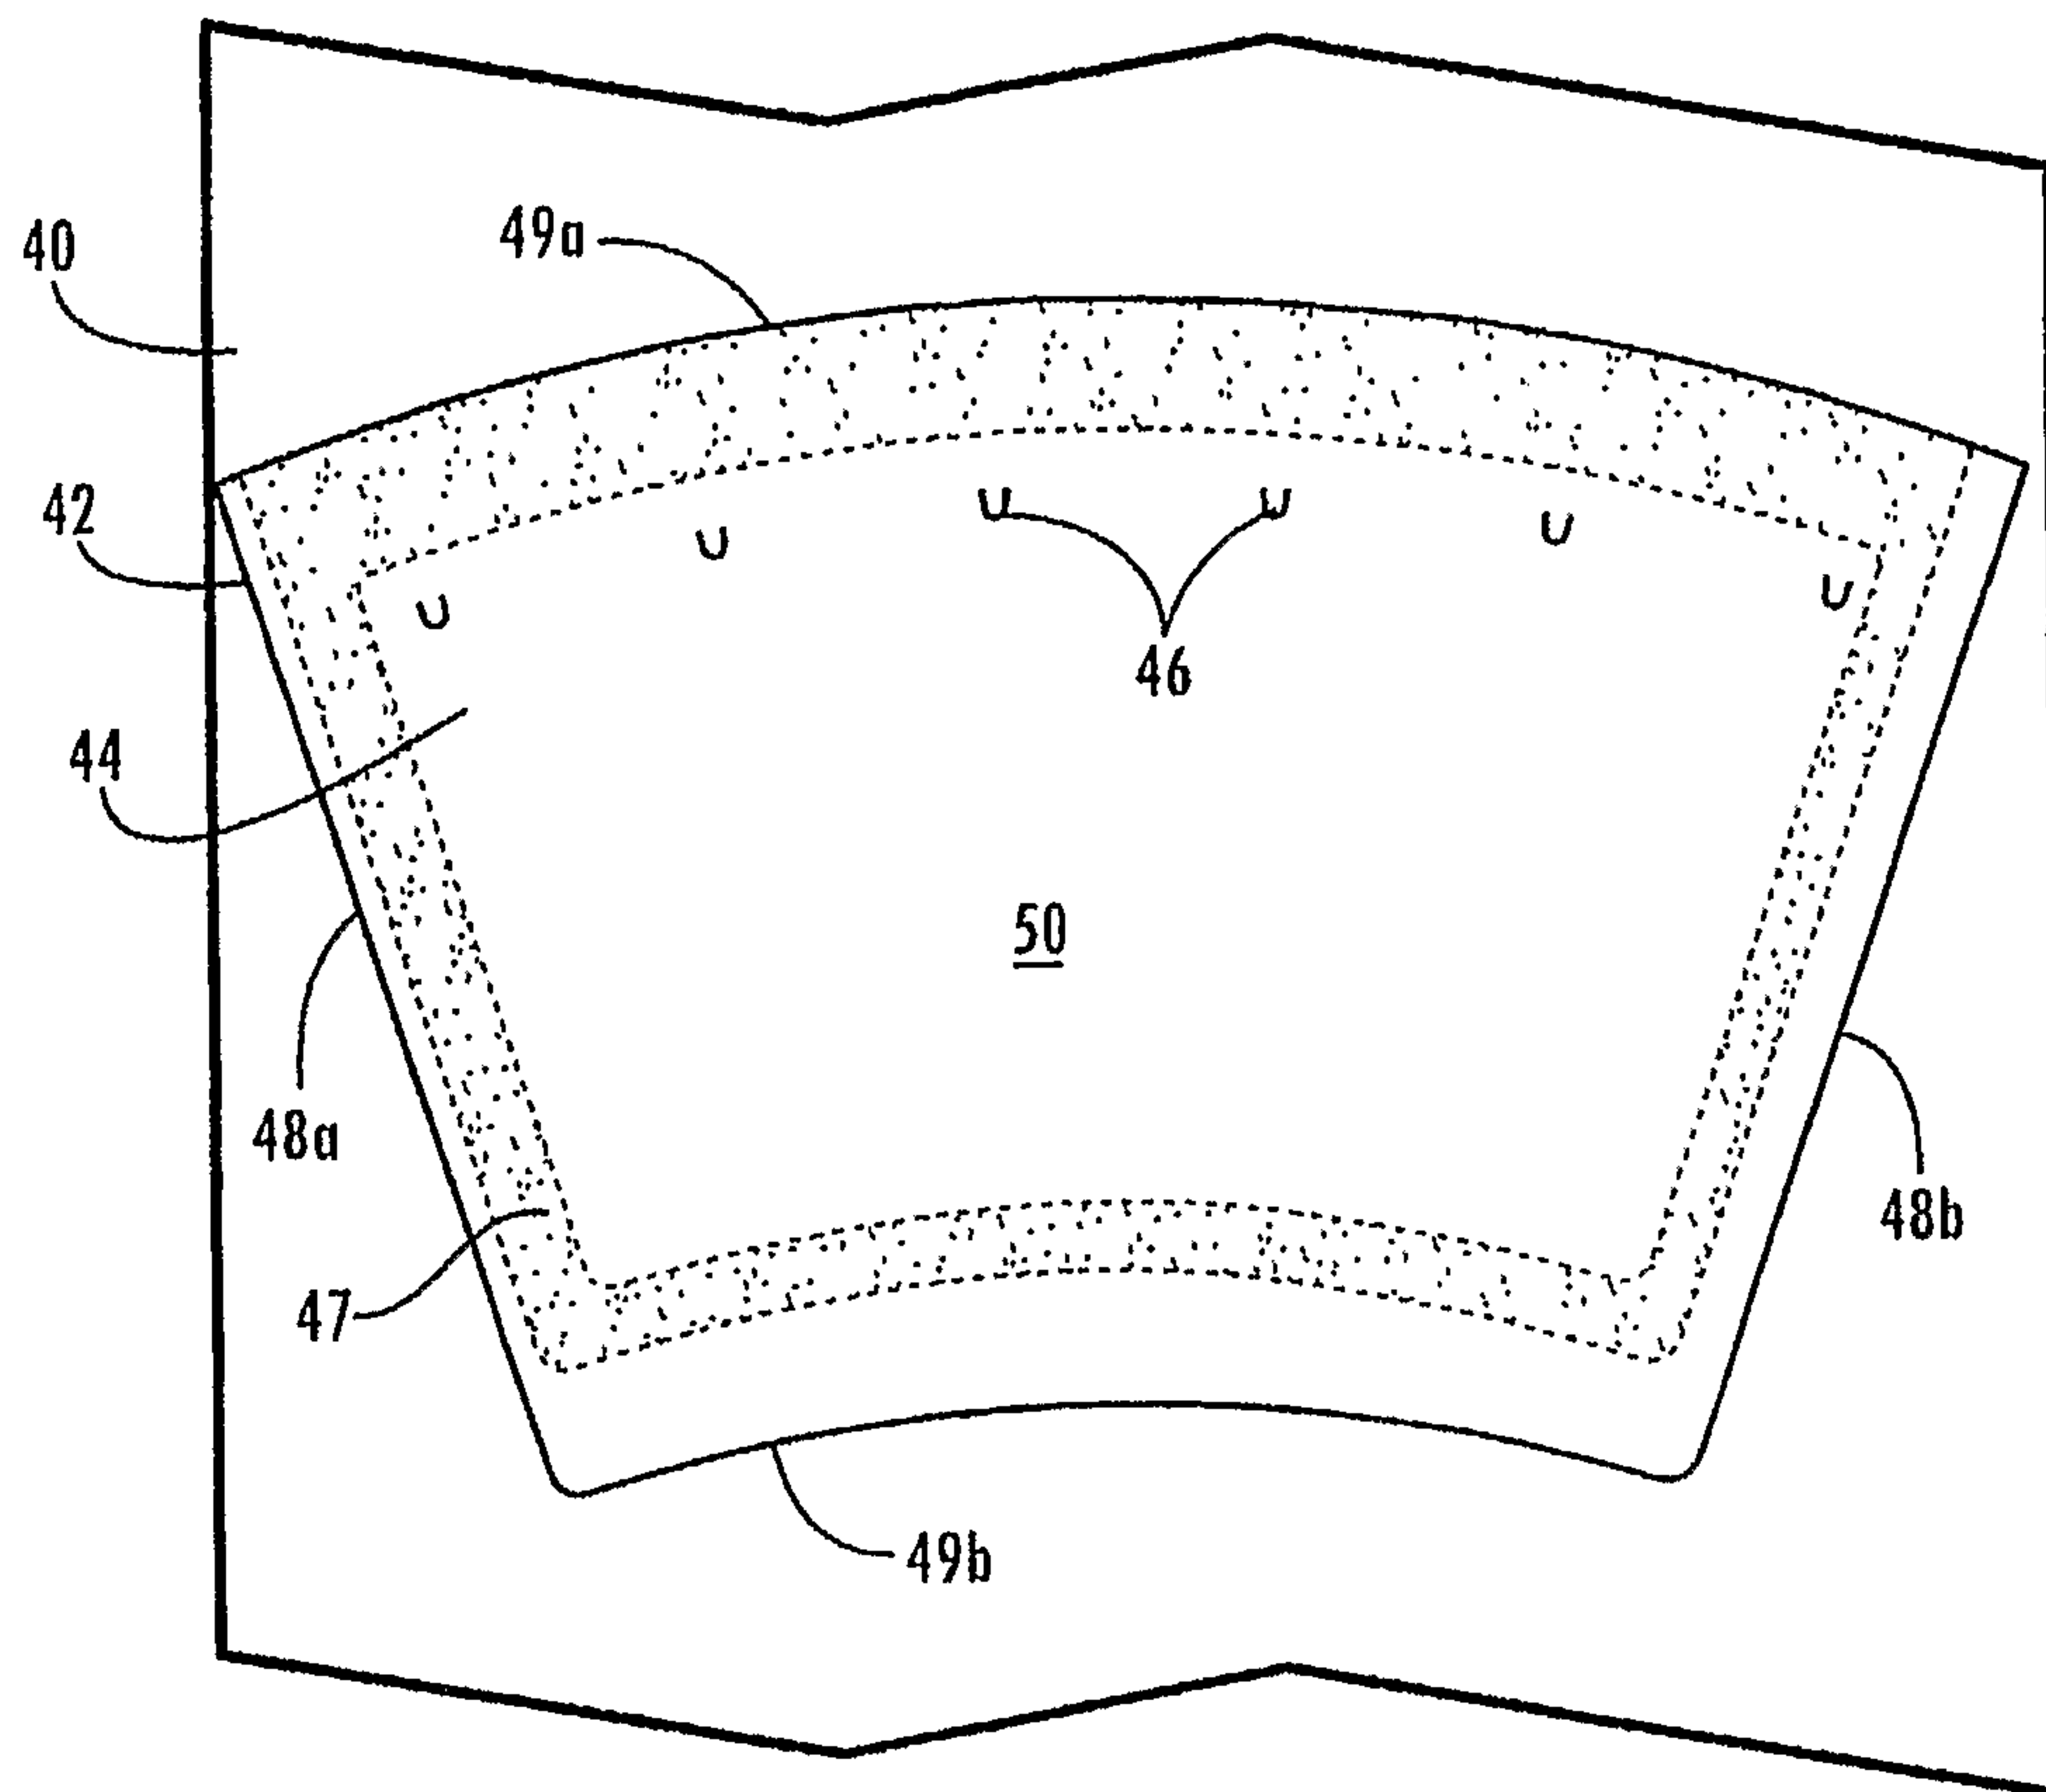
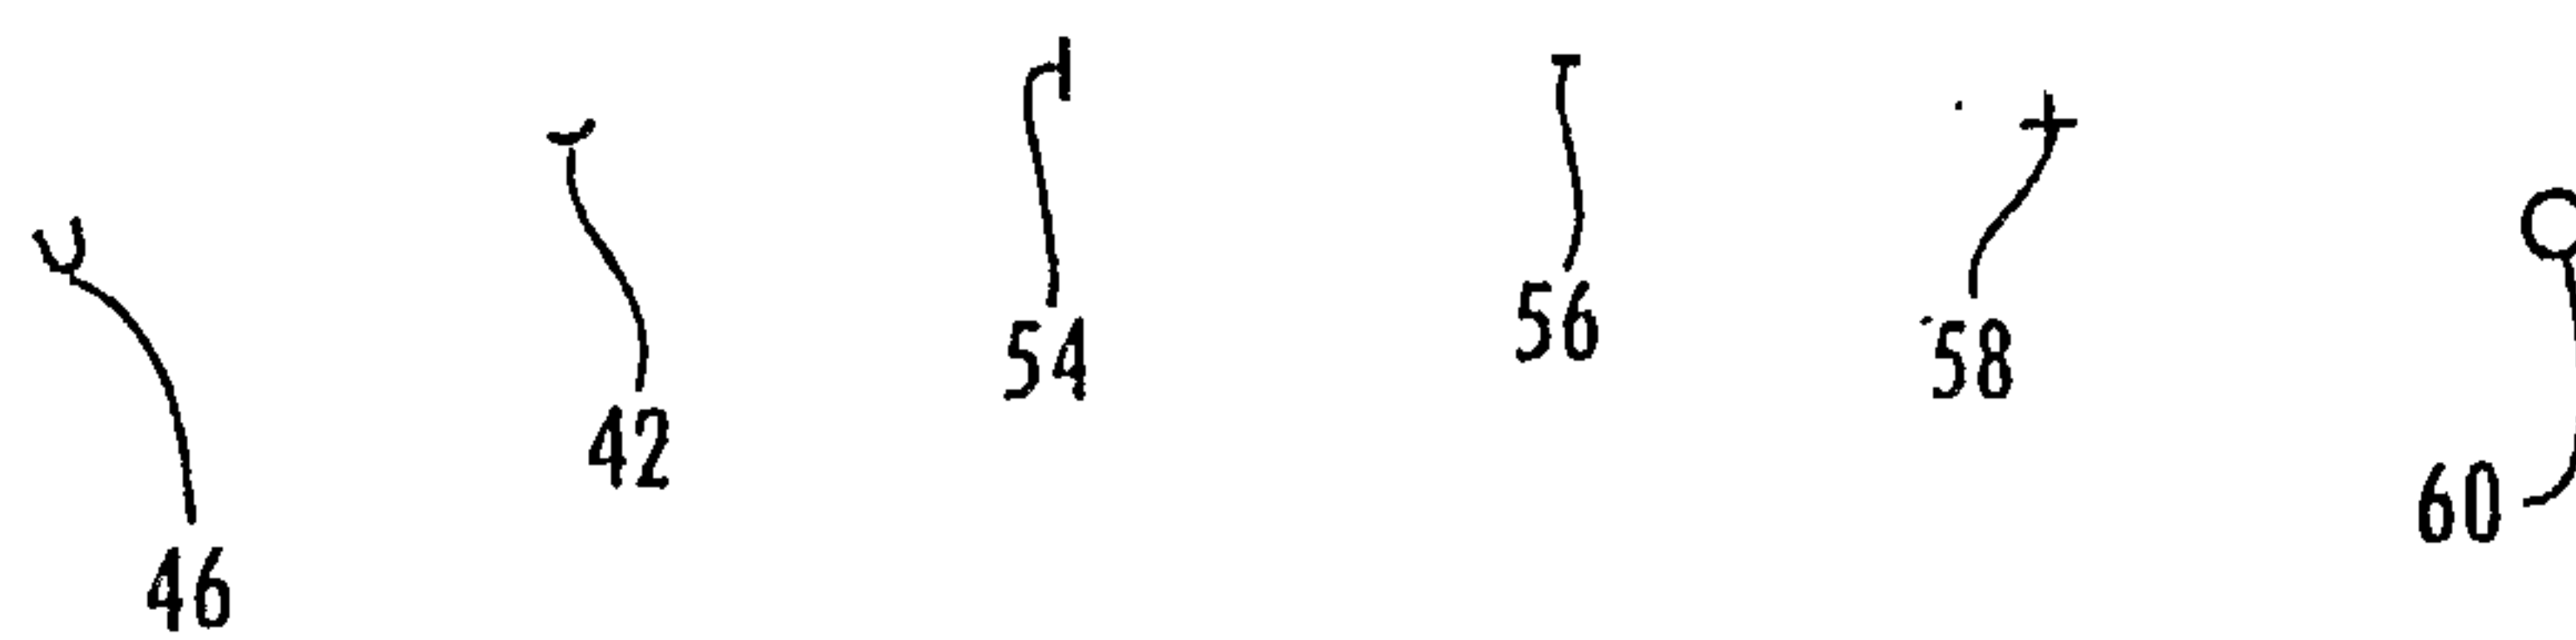
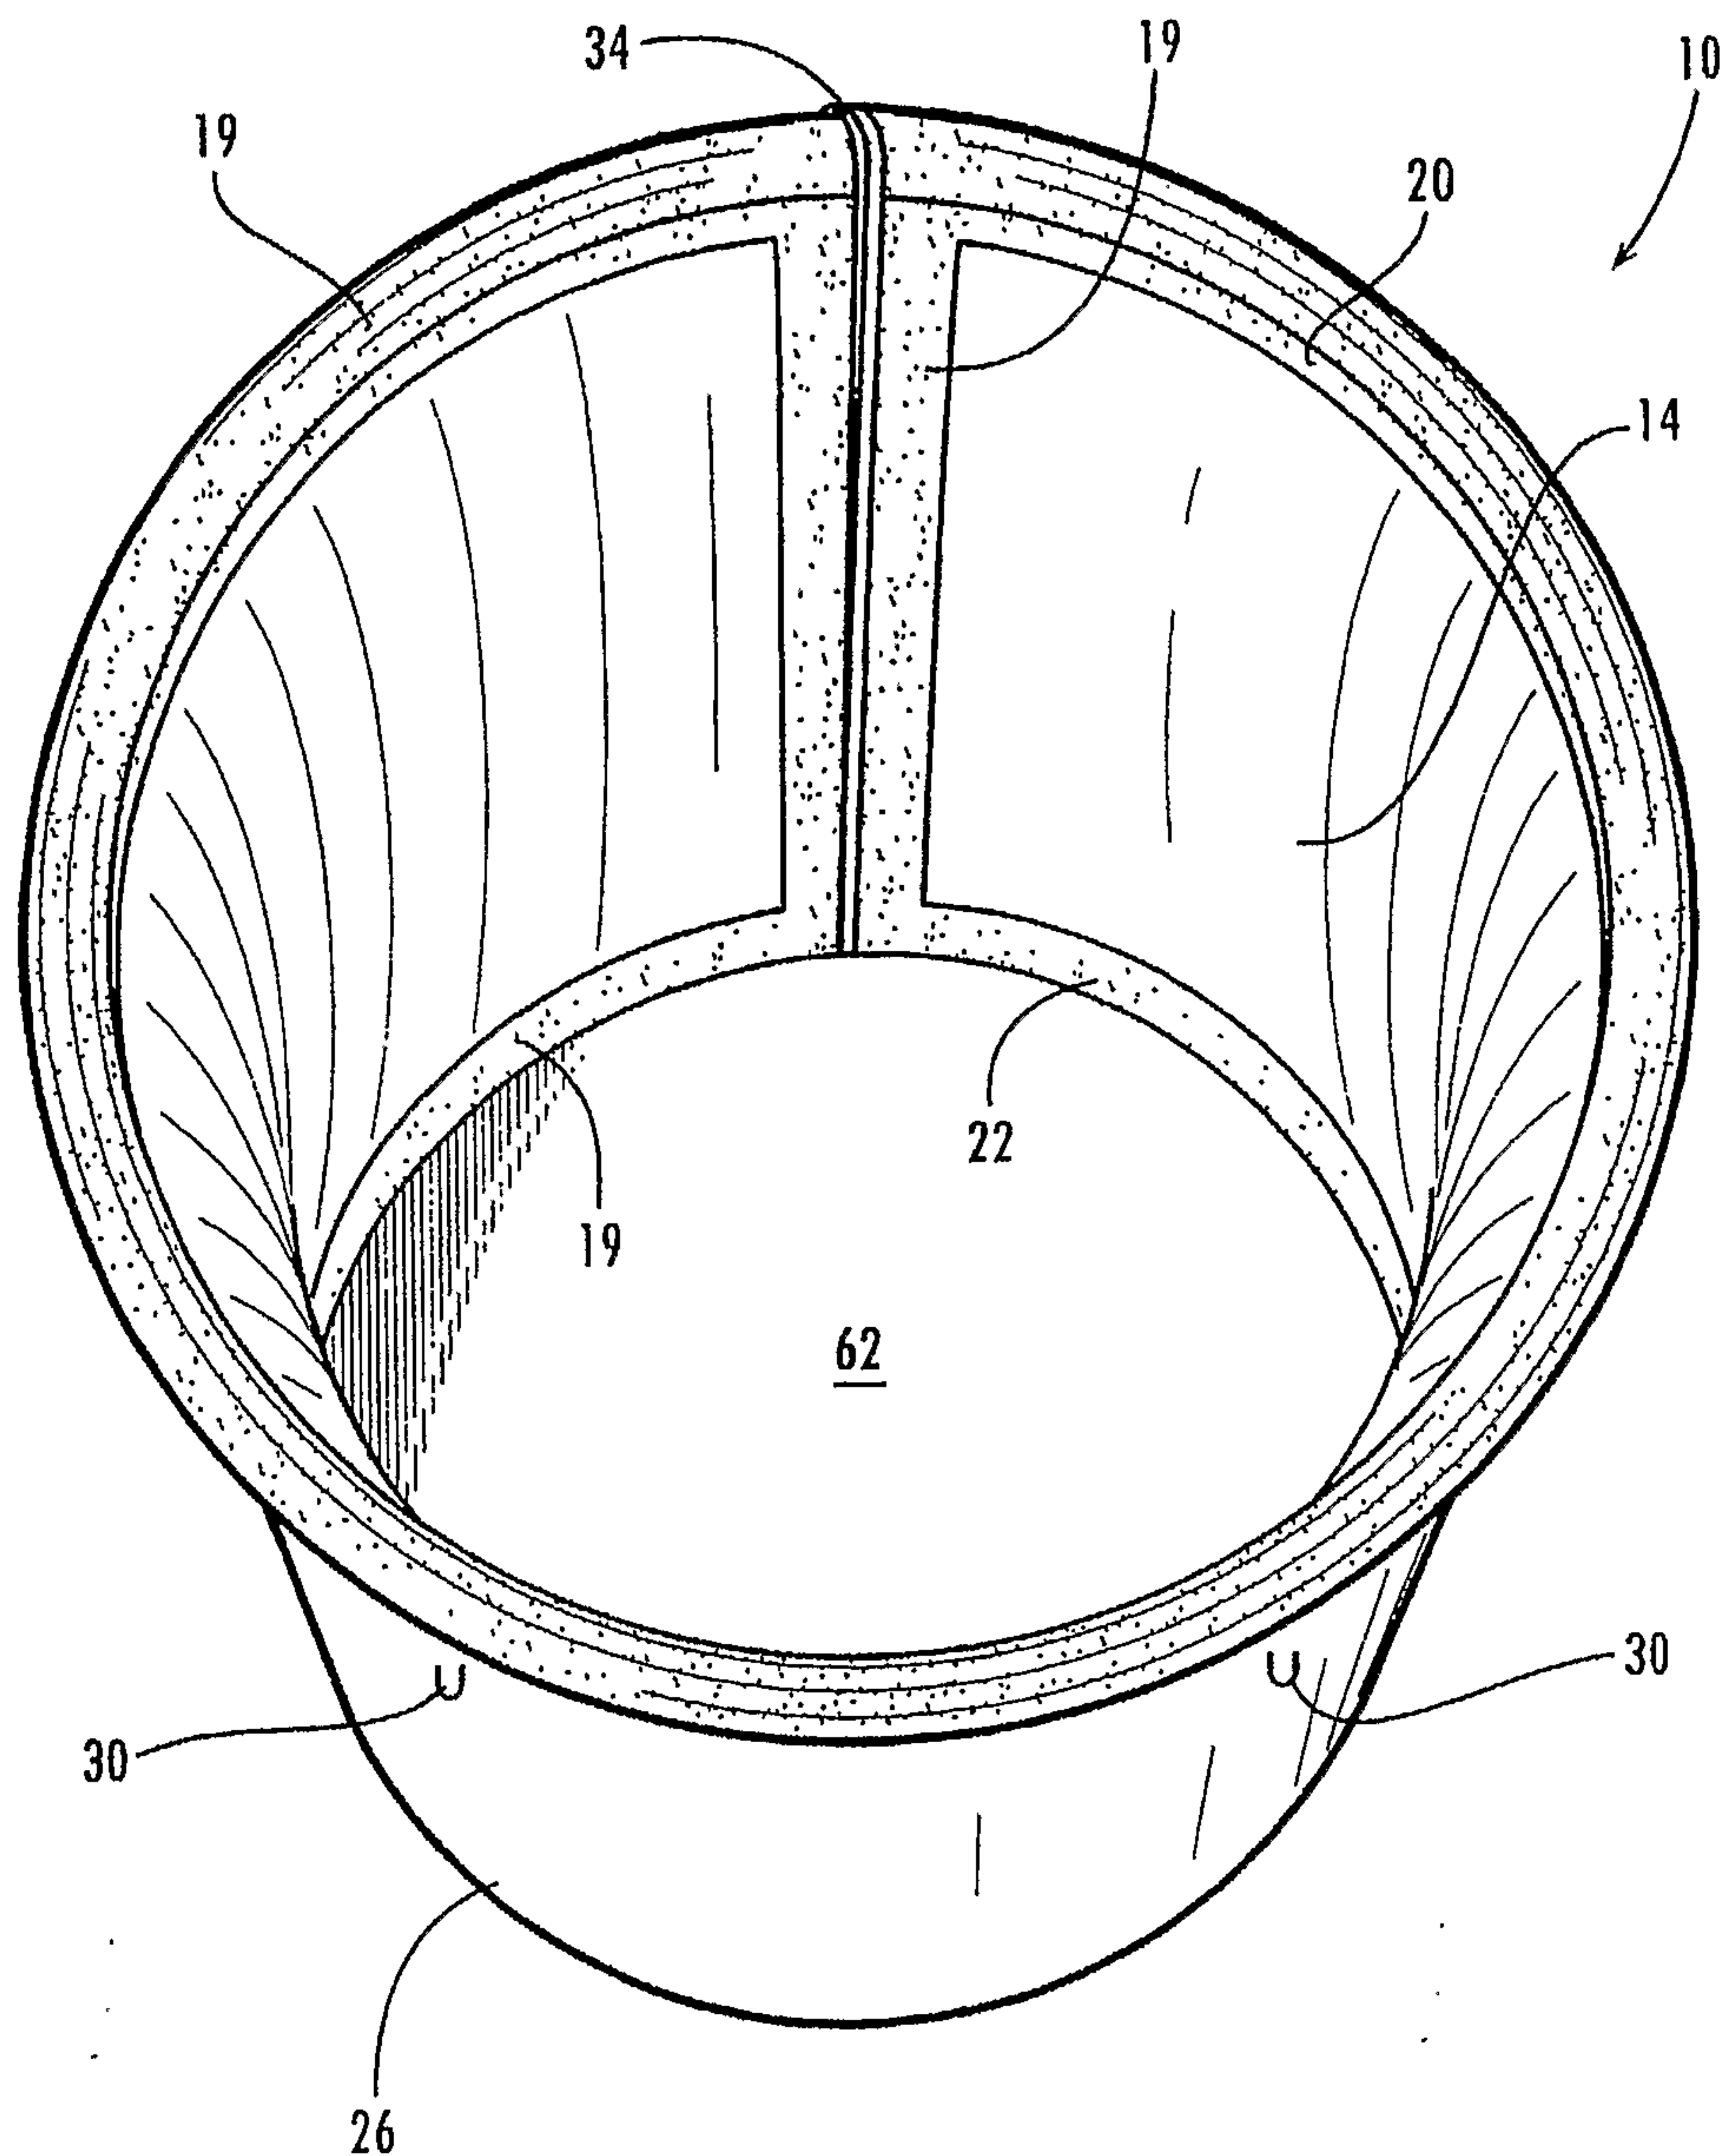


Fig. 2

2/5

*Fig. 3**Fig. 4*

3/5

*Fig. 5*

4/5


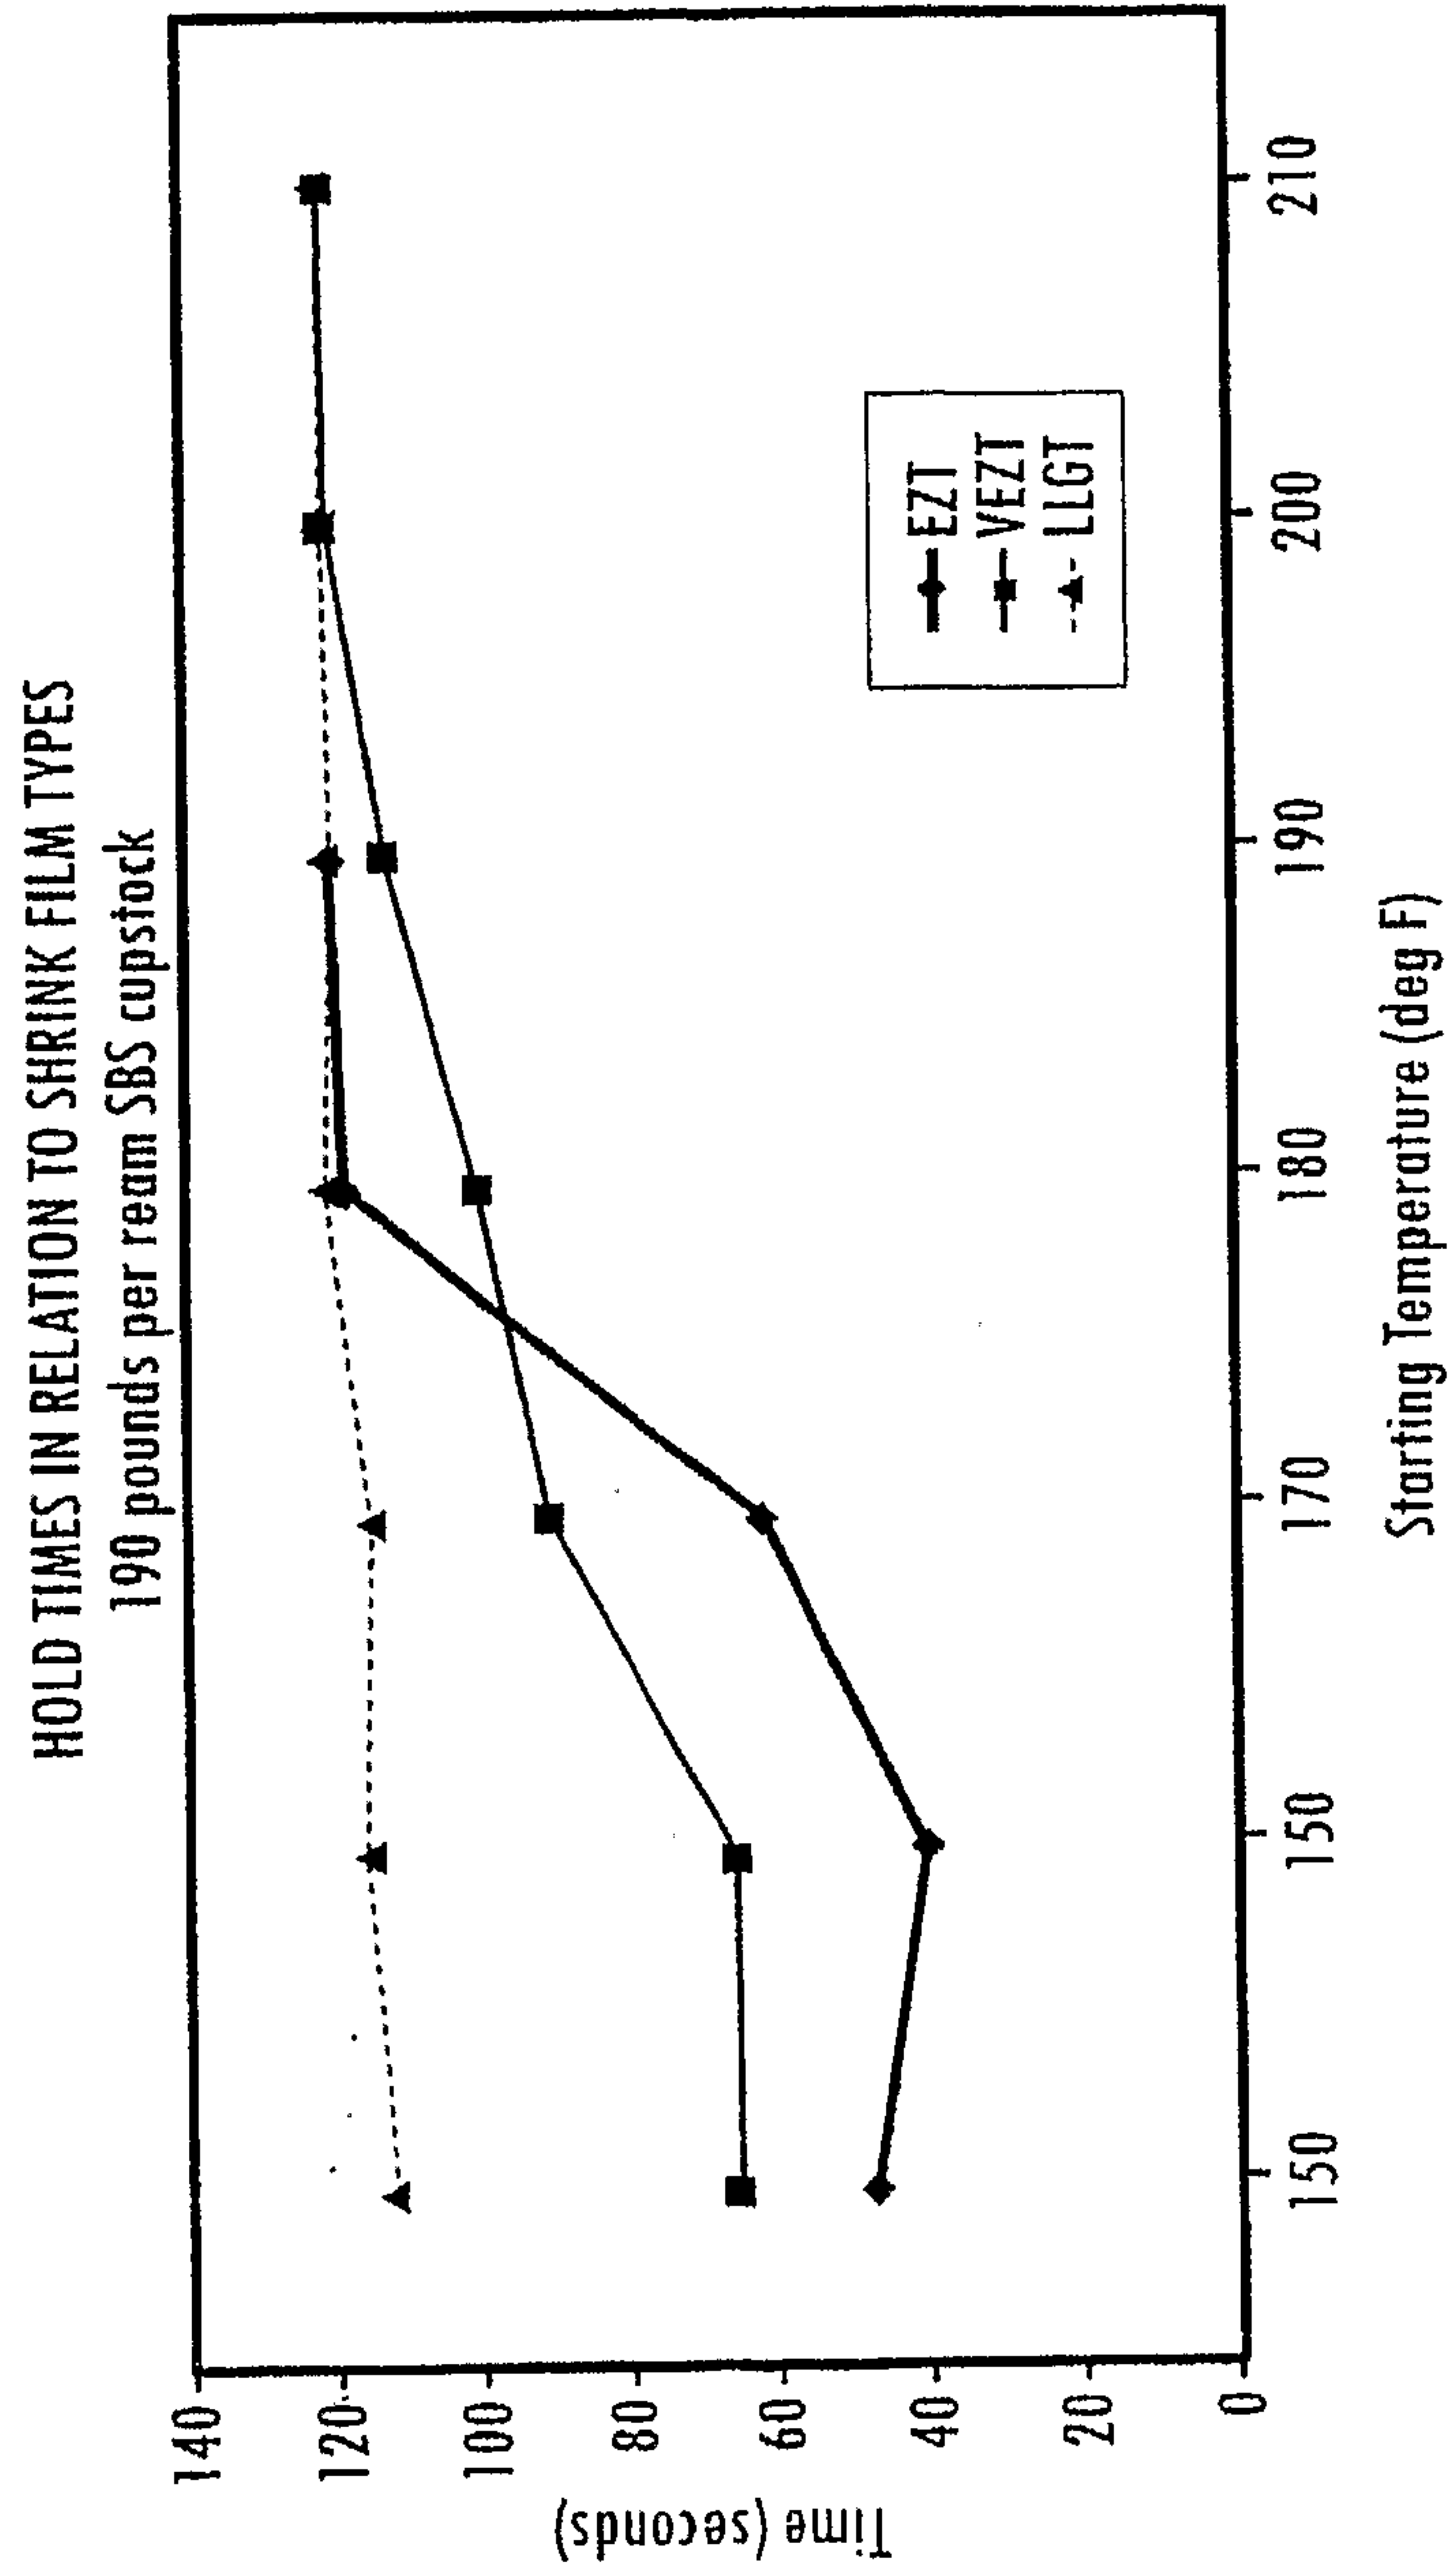


Fig. 6

5/5

*Fig. 7*

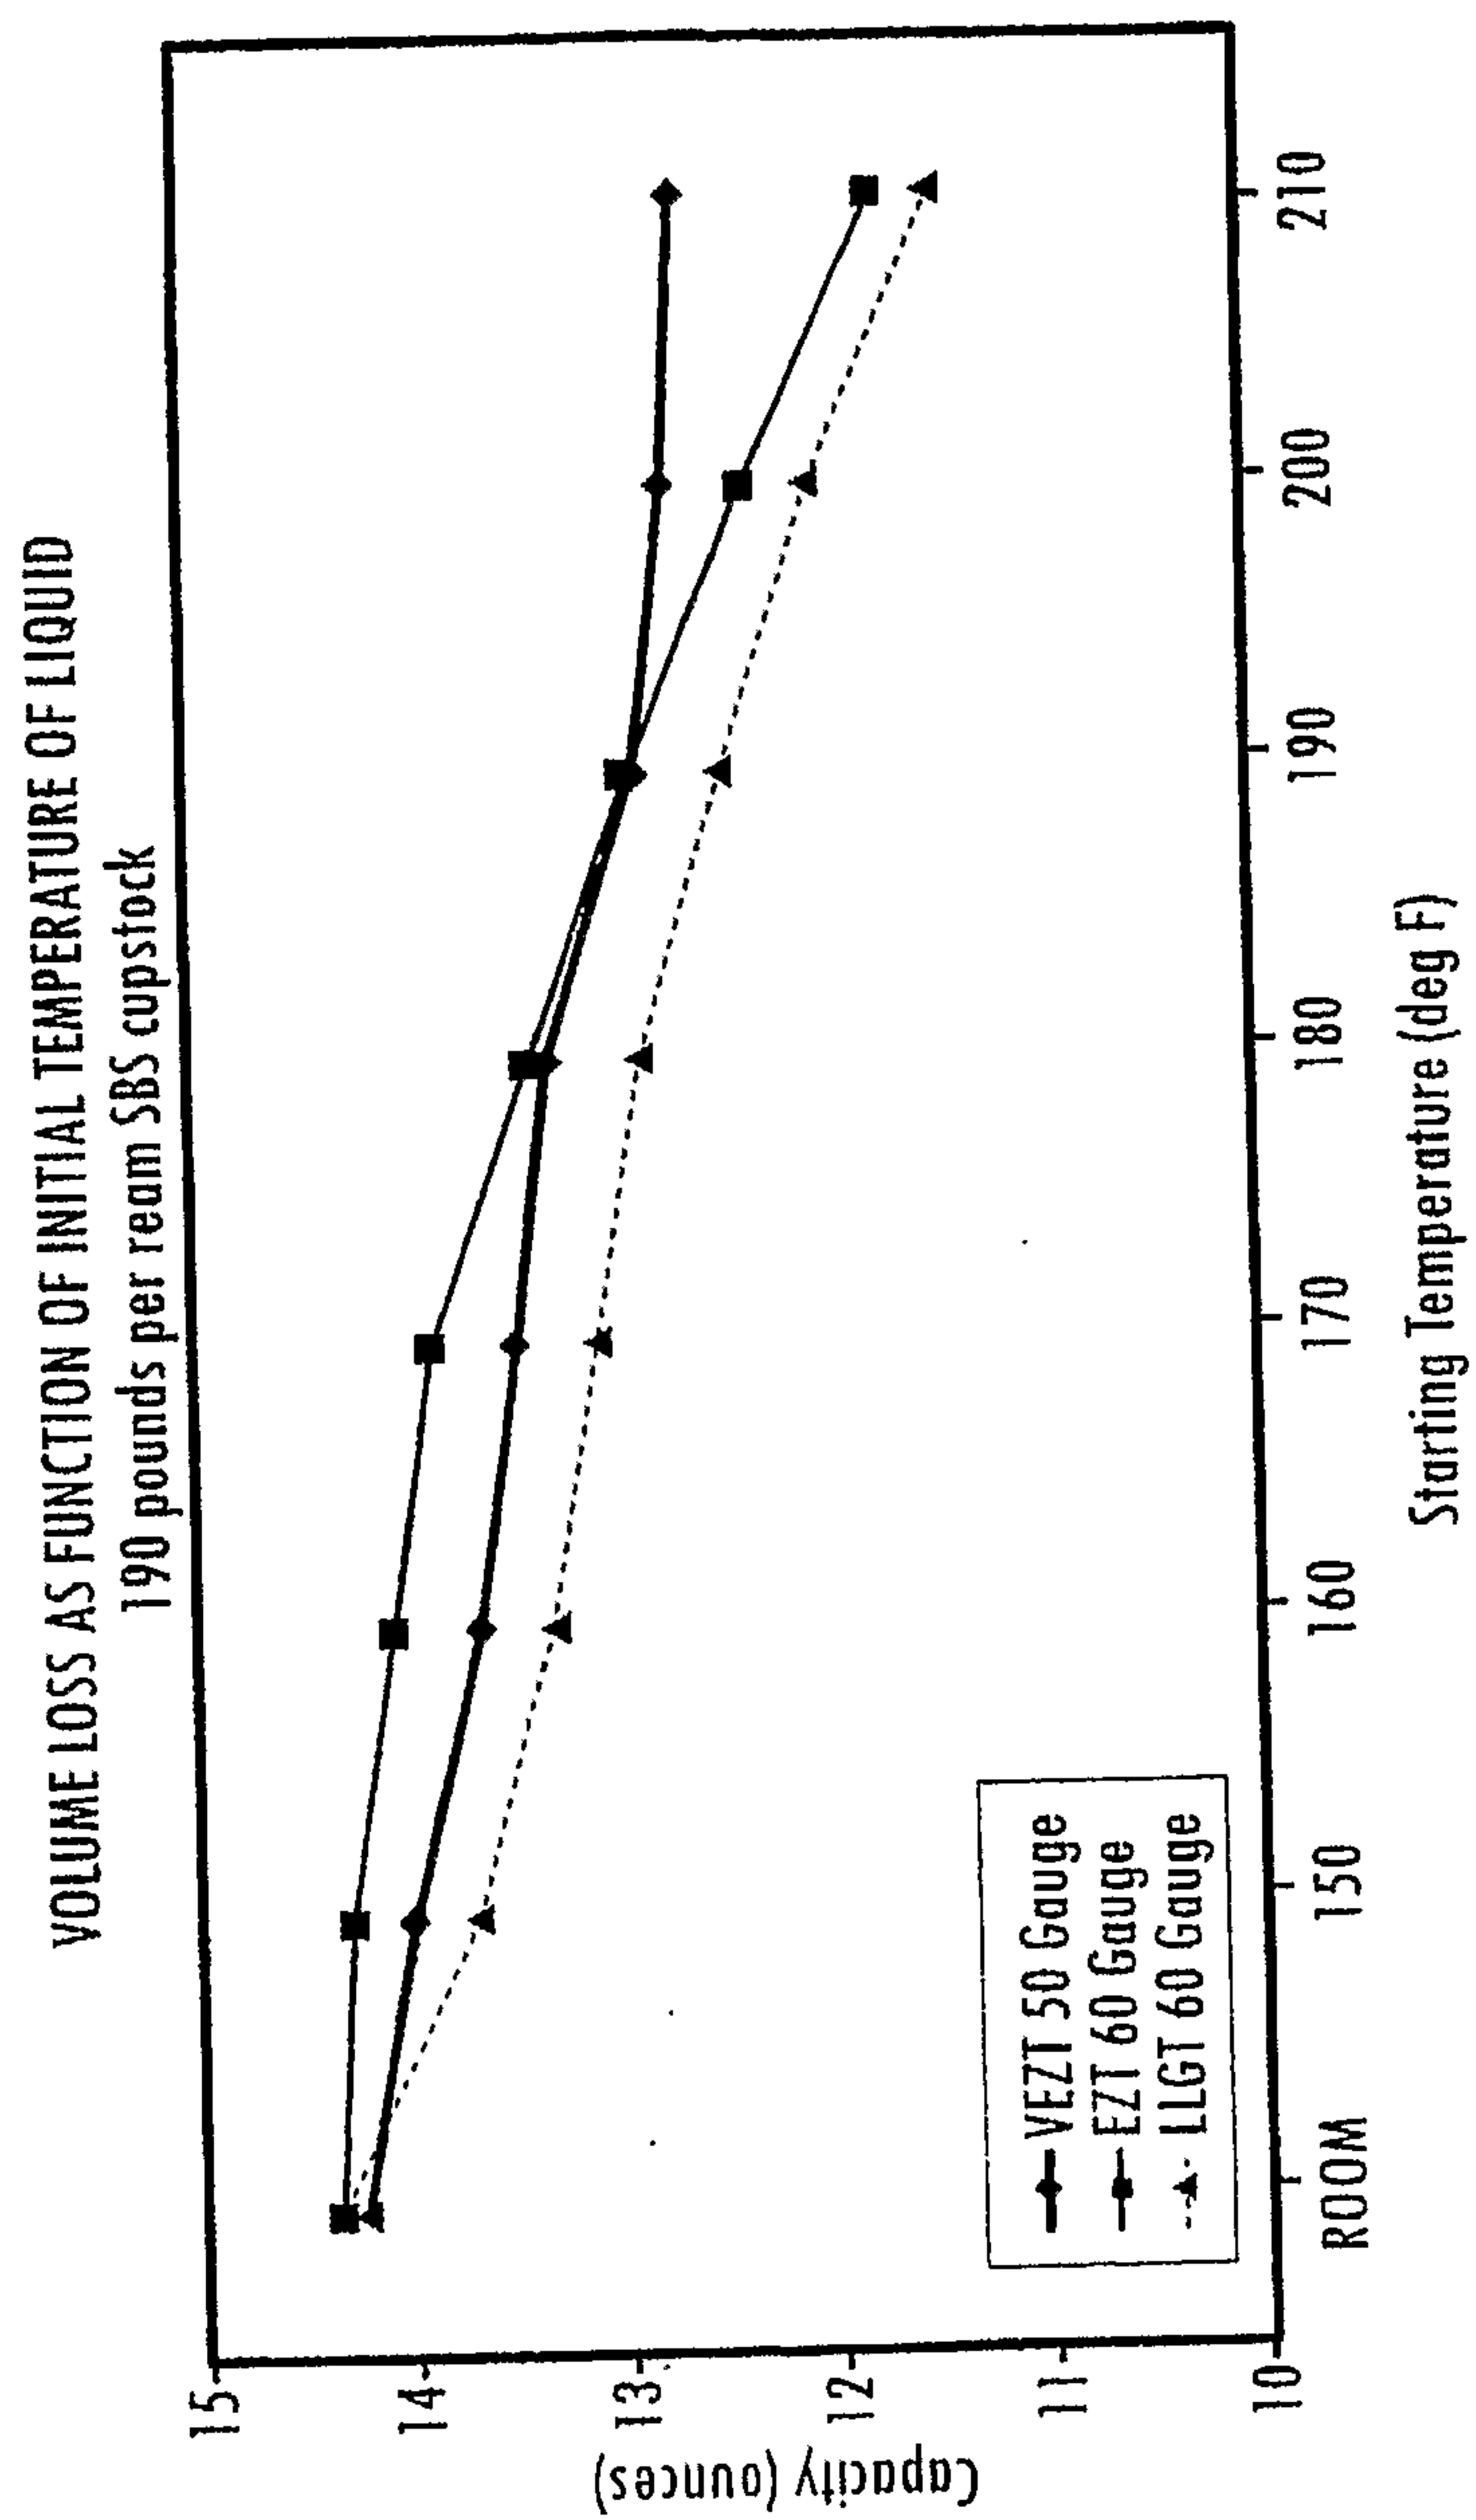