



(51) International Patent Classification:

H05H 1/34 (2006.01) **H01L 21/3065** (2006.01)
H05H 1/46 (2006.01)

(21) International Application Number:

PCT/US20 12/0603 14

(22) International Filing Date:

15 October 2012 (15.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/576,324	15 December 2011 (15.12.2011)	US
61/691,077	20 August 2012 (20.08.2012)	US
13/651,351	12 October 2012 (12.10.2012)	US

(71) **Applicant: APPLIED MATERIALS, INC.** [US/US];
3050 Bowers Avenue, Santa Clara, California 95054 (US).

(72) **Inventors: TODOROW, Valentin**; 2473 Emerson Street,
Palo Alto, California 94301 (US). **BANNA, Samer**; 861
Basking Lane, San Jose, California 95138 (US). **YOUSIF,**
Imad; 2103 Wendover Lane, San Jose, California 95121
(US). **WANG, Albert**; 921 Risdon Court, Concord, Cali-
fornia 94518 (US). **LERAY, Gary**; 100 North Whisman
Road #3324, Mountain View, California 94043 (US).

(74) **Agent: TABOADA, Alan**; Moser Taboada, 1030 Broad
Street, Suite 203, Shrewsbury, New Jersey 07702 (US).

(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** EXTENDED AND INDEPENDENT RF POWERED CATHODE SUBSTRATE FOR EXTREME EDGE TUNABILITY

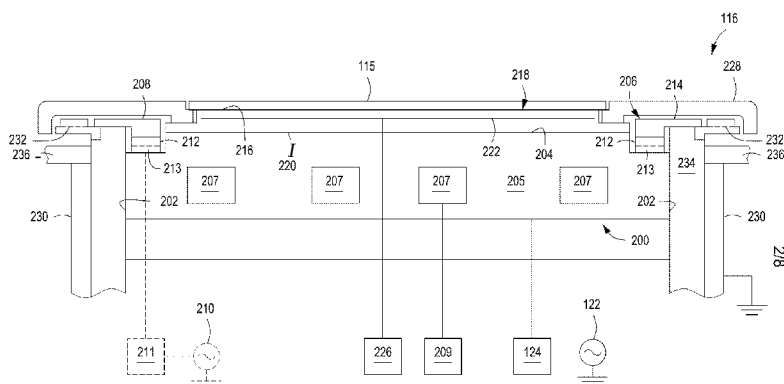


FIG. 2

(57) **Abstract:** Apparatus for processing substrates are provided herein. In some embodiments, an apparatus for processing a substrate may include a substrate support comprising a first electrode disposed within the substrate support and having a peripheral edge and a first surface; a substrate support surface disposed above the first surface of the first electrode; and a second electrode disposed within the substrate support and extending radially beyond the peripheral edge of the first electrode, wherein the second electrode has a second surface disposed about and above the first surface of the first electrode.

EXTENDED AND INDEPENDENT RF POWERED CATHODE SUBSTRATE FOR EXTREME EDGE TUNABILITY

FIELD

[0001] Embodiments of the present invention generally relate to substrate processing equipment.

BACKGROUND

[0002] Substrate processing systems, such as plasma reactors, may be used to deposit, etch, or form layers on a substrate or otherwise treat surfaces of the substrate. One technique useful for controlling aspects of such substrate processing is use of radio frequency (RF) energy to control a plasma proximate the substrate, such as by coupling RF energy to an electrode disposed beneath a substrate disposed on a substrate support.

[0003] The inventors provide herein embodiments of substrate processing systems that may provide improved RF energy control of the substrate processing system, and flexible control of plasma sheath at the vicinity of the wafer edge.

SUMMARY

[0004] Methods and apparatus for processing substrates are provided herein. In some embodiments, an apparatus for processing a substrate may include a substrate support comprising a first electrode disposed within the substrate support and having a peripheral edge and a first surface; a substrate support surface disposed above the first surface of the first electrode; and a second electrode disposed within the substrate support and extending radially beyond the peripheral edge of the first electrode, wherein the second electrode has a second surface disposed about and above the first surface of the first electrode.

[0005] In some embodiments, a substrate support includes a first electrode having a peripheral edge; an substrate support surface disposed above the first electrode; a second electrode disposed about the first electrode and extending radially beyond the peripheral edge of the first electrode; a first dielectric layer disposed about the peripheral edge of the first electrode; and an RF grounding layer disposed about the

first dielectric layer, wherein the second electrode is at least partially disposed above the first dielectric layer.

[0006] In some embodiments, a substrate support may include a support surface; a first electrode disposed within the substrate support and having a peripheral edge that extends beyond a peripheral edge of the support surface; a second electrode disposed within the substrate support and having a peripheral edge that extends beyond the peripheral edge of the first electrode; a dielectric layer disposed about the peripheral edge of the first electrode; and an RF grounding layer disposed about the dielectric layer.

[0007] Other and further embodiments of the present invention are described below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Embodiments of the present invention, briefly summarized above and discussed in greater detail below, can be understood by reference to the illustrative embodiments of the invention depicted in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

[0009] Figure 1 depicts schematic view of a plasma reactor in accordance with some embodiments of the present invention.

[0010] Figure 2 depicts a schematic view of a substrate support in accordance with some embodiments of the present invention.

[0011] Figure 3 depicts a partial schematic view of a substrate support in accordance with some embodiments of the present invention.

[0012] Figure 4 depicts a partial schematic view of a substrate support in accordance with some embodiments of the present invention.

[0013] Figures 5A-B respectively depict a top view and a side cross-sectional view of a process kit ring for use in a plasma reactor in accordance with some embodiments of the present invention.

[0014] Figures 6A-C respectively depict a top view, a side cross-sectional view, and a detail of the side cross-sectional view of a process kit ring for use in a plasma reactor in accordance with some embodiments of the present invention.

[0015] Figures 7A-E respectively depict a top view, a side cross-sectional view, a detail of the side cross-sectional view, a detail of the top view, and a side cross sectional view of the top detail of a process kit ring for use in a a plasma reactor in accordance with some embodiments of the present invention.

[0016] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures. The figures are not drawn to scale and may be simplified for clarity. It is contemplated that elements and features of one embodiment may be beneficially incorporated in other embodiments without further recitation.

DETAILED DESCRIPTION

[0017] Methods and apparatus for processing substrates are disclosed herein. The inventive methods and apparatus may advantageously may facilitate more uniform plasma processing of substrates as compared to conventional plasma processing apparatus. For example, embodiments of the invention may reduce edge roll off or edge roll up at the edge of the substrate, thereby providing a more uniform substrate. The inventors have observed that edge roll off or roll up may be caused by, amongst other factors, discontinuity in RF power coupling proximate the edge of the substrate. The inventive methods and apparatus addresses discontinuity at the edge of the substrate by providing an electrode, or providing one or more additional electrodes, to improve RF power coupling proximate the edge of the substrate.

[0018] Figure 1 depicts a schematic side view of an inductively coupled plasma reactor (reactor 100) in accordance with some embodiments of the present invention. The reactor 100 may be utilized alone or, as a processing module of an integrated semiconductor substrate processing system, or cluster tool, such as a CENTURA[®] integrated semiconductor wafer processing system, available from Applied Materials, Inc. of Santa Clara, California. Examples of suitable plasma reactors that may advantageously benefit from modification in accordance with

embodiments of the present invention include inductively coupled plasma etch reactors such as the DPS® line of semiconductor equipment or other inductively coupled plasma reactors, such as MESA™ or the like also available from Applied Materials, Inc. The above listing of semiconductor equipment is illustrative only, and other etch reactors, and non-etch equipment (such as CVD reactors, or other semiconductor processing equipment) may also be suitably modified in accordance with the present teachings. For example, suitable exemplary plasma reactors that may be utilized with the inventive methods disclosed herein may be found in United States Patent Application serial number 12/821,609, filed June 23, 2010 by V. Todorow, et al., and entitled, "INDUCTIVELY COUPLED PLASMA APPARATUS," or United States Patent Application serial number 12/821,636, filed June 23, 2010 by S. Banna, et al., and entitled, "DUAL MODE INDUCTIVELY COUPLED PLASMA REACTOR WITH ADJUSTABLE PHASE COIL ASSEMBLY."

[0019] The reactor 100 generally includes a process chamber 104 having a conductive body (wall) 130 and a lid 120 {e.g., a ceiling} that together define an inner volume, a substrate support 116 disposed within the inner volume (shown supporting a substrate 115), an inductively coupled plasma apparatus 102, and a controller 140. The wall 130 is typically coupled to an electrical ground 134. In embodiments where the reactor 100 is configured as an inductively coupled plasma reactor; the lid 120 may comprise a dielectric material facing the inner volume of the reactor 100.

[0020] The substrate support 116 generally includes a support surface for supporting the substrate 115. The support surface may be formed from a dielectric material. In some embodiments, the substrate support 116 may include a cathode coupled through a matching network 124 to a bias power source 122. The bias source 122 may illustratively be a source of up to about 1000 W (but not limited to about 1000 W) of RF energy at a frequency of, for example, approximately 13.56 MHz, although other frequencies and powers may be provided as desired for particular applications. The bias source 122 may be capable of producing either or both of continuous or pulsed power. In some embodiments, the bias source 122 may be a DC or pulsed DC source. In some embodiments, the bias source 122 may be capable of providing multiple frequencies, or one or more second bias sources

(as illustrated in Figure 2) may be coupled to the substrate support 116 through the same matching network 124 or through one or more additional matching networks (as illustrated in Figure 2) to provide multiple frequencies.

[0021] Figure 2 depicts further detail of the substrate support 116 in accordance with some embodiments of the present invention. As shown in Figure 2, the substrate support 116 may include a first electrode 200 disposed within the substrate support 116. In some embodiments, the first electrode 200 may be centrally disposed beneath the support surface 216 of the substrate support 116. The first electrode 200 may be formed of a conductive material, such as one or more of aluminum (Al), doped silicon carbide (SiC), or other suitable conductive materials that are compatible with process environment. In some embodiments, the first electrode 200 may be disposed in, or may be, a body 205 that supports the dielectric support surface of the substrate support 116. The body 205 may have a peripheral edge 202 and a first surface 204. In some embodiments, the body 205 may include a plurality of channels 207 disposed through the body 205 to flow a heat transfer medium through the channels 207. A heat transfer medium source 209 may be coupled to the plurality of channels 207 to provide a heat transfer medium to the plurality of channels 207. For example, the flow of the heat transfer medium through the plurality of channels 207 may be used to regulate the temperature of a substrate disposed on the substrate support 116.

[0022] A second electrode 206 may be disposed within the substrate support 116. The second electrode 206 may have a second surface 208 disposed about and above the first surface 204 of the first electrode 200. The second electrode 206 may extend radially from the first electrode 204, for example, such as beyond the peripheral edge 202 of the first electrode 200 as discussed below. The second electrode 206 may be formed of any suitable conductive materials, such as one or more of Al, doped SiC, doped diamond, or other suitable conductive materials that are compatible with process environment. In some embodiments, the second electrode 206 may be electrically coupled to the first electrode 200, such that the first and second electrodes 200, 206 may be coupled to a common RF power supply {e.g., bias source 122}. In some embodiments, the first and second electrodes 200, 206 may be a single integrated electrode formed to a shape suitable to provide the

functions taught herein. Alternatively, in some embodiments, the second electrode 206 may be electrically isolated from the first electrode 200, such that the first and second electrodes 200, 206 may be individually controlled by the same or separate RF power supplies

[0023] For example, in some embodiments, the bias power source 122 (e.g., a first RF power supply) may be coupled to each of the first and second electrodes 200, 206 to provide RF energy to the first and second electrodes 200, 206. In such embodiments, the first and second electrodes 200, 206 may be electrically coupled (either as a single integrated electrode, or as separate electrodes) or may be electrically isolated. Alternatively, the bias power source 122 may be coupled to the first electrode 200 to provide RF energy to the first electrode 200 and a second power supply 210 (shown in phantom) may be coupled to the second electrode 206 via a matching network 211 (shown in phantom) to provide RF energy to the second electrode 206. For example, to electrically isolate the first and second electrodes 200, 206, a dielectric layer 213 (shown in phantom) may be disposed between the first and second electrodes 200, 206 as illustrated in Figure 2. Alternatively, some embodiments of a base 212 (discussed below) may be used to electrically isolate the first and second electrodes 200, 206.

[0024] In some embodiments, a base 212 may be disposed on the first electrode 200. In embodiments where the first and second electrodes 200, 206 are electrically coupled, the base 212 may be a conductive ring or the like disposed about at least a portion of the first electrode 200, as illustrated in Figure 2. Alternatively, the base 212 may have conductive pathways disposed about the first electrode 200

[0025] The base 212 may be fabricated, in whole or in part, from a dielectric material suitable to prevent arcing between the first and second electrodes 200, 206. The second electrode 206 includes a radially extending portion 214 disposed atop the base 212 that extends beyond the peripheral edge 202 of the first electrode 200. The base 212 and the radially extending portion 214 may be a single integrated component or separate components that may be assembled together to form the second electrode 206. The position of the second surface 208 of the second electrode 206 may be positioned to control the RF energy coupling proximate the periphery of a substrate disposed on the substrate support 116 during processing.

In addition, the length to which the radially extending portion 214 extends beyond the peripheral edge 202 of the first electrode 200 may be adjusted to achieve the desired RF energy coupling proximate the periphery of the substrate disposed on the substrate support 116. In some embodiments, the height of the base 212 and/or the thickness of the radially extending portion 214 may together define the position of the second surface 208 with respect to the first surface 204.

[0026] The substrate support may include a substrate support surface 216 disposed above the first surface 204 of the first electrode 200. For example, the substrate support surface 216 may be part of an electrostatic chuck 218. The electrostatic chuck 218 may be disposed above the first electrode 200 and the substrate support surface 216 may be an upper surface of the electrostatic chuck 218. The electrostatic chuck 218 may include a dielectric plate, such as a ceramic puck 220, as illustrated in Figure 2. The ceramic puck 220 may include an electrode 222 disposed therein to provide DC energy for chucking a substrate 115 to the electrostatic chuck 218. The electrode 222 may be coupled to a DC power supply 226.

[0027] An edge ring 228 may be disposed about the electrostatic chuck 218. For example, the edge ring 228 may be a process kit, or the like, designed to improve processing proximate the peripheral edge of the substrate 224 and/or to protect the substrate support from undesired plasma exposure during processing. The edge ring 228 may be dielectric or may have an outer dielectric layer, for example, such as comprising one or more of quartz, yttria (Y₂O₃), aluminum nitride (AlN), diamond coated silicon carbide (SiC) or the like. In some embodiments, such as illustrated in Figure 2, the edge ring 228 may about equal in height with a processing surface of the substrate 115 when disposed on the electrostatic chuck 218. Alternatively, the height of the edge ring relative to the processing surface of the substrate resting on the electrostatic chuck 218 may vary. For example, in some embodiments, such as illustrated in Figure 3, an edge ring 300 may have a height that is higher than the processing surface of the substrate 115. The edge ring may be a singular piece constructed of one material, such as the edge ring 300. Alternatively, additional rings may be used to extend the height of the edge ring above the processing surface of the substrate 115, such as a ring 302 which may rest on and/or be

fitted/stacked on the edge ring 300. For example, the edge ring 300 and the ring 302 may comprise the same materials. Alternatively, the edge ring 300 and the ring 302 may comprise different materials, for example, such as the edge ring 300 may comprise quartz and the ring 302 may comprise SiC. The height of the edge ring {e.g., edge ring 300 or a combination of edge ring 300 and ring 302) above the processing surface of the substrate 115 may be optimized to improve uniformity of the plasma proximate the peripheral edge of the substrate 115.

[0028] Returning to Figure 2, the edge ring 228 may be disposed above and adjacent to the radially extending portion 214 of the second electrode 206 such that the edge ring 228 may be disposed between the extending portion 214 and a grounding layer 230 {e.g., an RF grounding layer). For example, the edge ring 228 may be formed of a singular piece such that the edge ring 228 separates the extending portion 214 from the grounding layer 230. Alternatively, as illustrated in Figure 2, a ring 232, such as a dielectric spacer or the like may be disposed below the edge ring 228 and between the extending portion 214 of the second electrode 206 and the grounding layer 230. In either embodiment, i.e., with or without the ring 232, it may be desired to have the extending portion 214 sufficiently isolated from the grounding layer 230 such that arcing between the extending portion 214 and the grounding layer 230 is limited and/or prevented.

[0029] The ring 232 may be a singular piece or comprise multiple pieces stacked or interconnected together as illustrated by the dotted line in Figure 2. In embodiments where multiple stacked pieces are used, the piece may comprise the same or different materials. In some embodiments, other rings may be utilized or one or more pieces may be removed to accommodate a larger extending portion of the second electrode 206. As illustrated in Figure 4, a ring 400 may be utilized to accommodate a larger extending portion 402 {e.g., larger than the extending portion 214). As illustrated, the extending portion 402 may extend beyond a first dielectric layer 234 (discussed below). Similar to the ring 232, the ring 400 may be utilized to sufficiently isolate the extending portion 402 from the grounding layer 230. The extending portion {e.g., 214 or 402) may range in length, for example, to optimize uniformity in the plasma proximate the peripheral edge of the substrate 115. In some embodiments, the length of the extending portion and the height of the edge

ring may both be optimized to achieve the desired uniformity in the plasma proximate the peripheral edge of the substrate 115.

[0030] Figures 5A-B respectively depict a top view and a side cross-sectional view of a ring 502 that may be used as the ring 232 or the ring 400 in accordance with some embodiments of the present invention. The dimensions of the ring 502 described below advantageously allow the ring 502 to be suitable for use with the substrate support 116 described above. In some embodiments, the ring 502 is fabricated from silicon carbide (SiC). By fabricating the ring 502 from silicon carbide the ring 502 may advantageously be resistant to degradation when exposed to a process environment within the process chamber.

[0031] In some embodiments, the ring 502 may generally comprise a ring shaped body 504 having an outer edge 511, inner edge 513, a top surface 515, and a bottom surface 517. In some embodiments, the body 504 may comprise a plurality of protrusions 506 (three protrusions 506 shown) extending upwardly from the top surface 515.

[0032] In some embodiments, a diameter of the outer edge 511 may be about 12.473 inches to about 12.479 inches. In some embodiments, a diameter of the inner edge 513 may be about 11.726 inches to about 11.728 inches. In some embodiments, the inner edge 513 of the ring 502 comprises a flat portion 509 proximate one of the plurality of protrusions 506. The flat portion 509 interfaces with a portion of the substrate support to facilitate proper orientation of the ring 502 when installed on the substrate support. In some embodiments, a distance 512 from the flat portion 509 to a center 510 of the ring 502 may be about 5.826 inches to about 5.831 inches. In some embodiments, the flat portion 509 may have a length 508 of about 1.310 inches to about 1.320 inches.

[0033] When present, the plurality of protrusions 506 (three protrusions 506 shown) support a component of a substrate support (*e.g.*, the edge ring 228 of substrate support 116 described above) atop the ring 502 and provide a gap therebetween. In embodiments where three protrusions 506 are present, the protrusions 506 may be disposed symmetrically about the body 504. For example, each of the three protrusions 506 may be separated by an angle 519 of about 120

degrees from one another about the body 504. In addition, each protrusion 506 may be disposed about the body 504 such a distance 525 between an outer edge 527 of the protrusion 506 and the center 510 of the body 504 is about 6.995 inches to about 6.105 inches. In some embodiments a distance 523 from an inner edge 529 of the protrusion 506 to the center 510 of the body 504 is about 5.937 inches to about 5.947 inches.

[0034] Referring to Figure 5B, in some embodiments, the body 504 may have a height H1 of about 0.116 inches to about 0.118 inches. The protrusion 506 may extend from the surface 515 of the body 504 to a height H2 of about 0.049 inches to about 0.059 inches. In some embodiments, the protrusion 506 may have a sloped side 531 that is angled about 9 degrees to about 11 degrees from an axis 533 perpendicular to the surface 515 of the body 504.

[0035] Figures 6A-C respectively depict a top view, a side cross-sectional view, and a detail of the side cross-sectional view of a process kit ring 602 that may be used as the edge ring 228 or the edge ring 300 for use in a plasma reactor in accordance with some embodiments of the present invention. The dimensions of the process kit ring 602 described below advantageously allow the process kit ring 602 to be suitable for use with the substrate support 116 described above. In some embodiments, the process kit ring 602 is fabricated from quartz (S102). By fabricating the process kit ring 602 from quartz, the process kit ring 602 may advantageously be dielectric and resistant to degradation when exposed to a process environment within the process chamber.

[0036] The process kit ring 602 generally comprises a ring shaped body 601 having an outer edge 615, inner edge 616, a top surface 604 and a bottom 613. A first step 607 and second step 608 may be formed between the outer edge 615 and the inner edge 616.

[0037] In some embodiments, a diameter of the outer edge 615 may be about 15.115 inches to about 15.125 inches. In some embodiments, a diameter of the inner edge 616 may be about 11.752 inches to about 11.757 inches. In some embodiments, the inner edge 616 of the body 601 comprises a flat portion 617 configured to interface with a portion of the substrate support to facilitate proper

orientation of the process kit ring 602 when installed on the substrate support. In some embodiments, a distance 605 between the flat portion 617 and a center axis of the process kit ring 602 may be about 5.825 to about 5.830 inches.

[0038] Referring to Figure 6B, the first step 607 provides an open area 634 above and about the periphery of a substrate when disposed on the process kit ring 602 for processing. The open area 634 may allow for processing and/or may reduce an amount of heat transfer from the substrate to the process kit ring 602. In some embodiments, the first step 607 may have an outer diameter 614 of about 12.077 inches to about 12.087 inches and extend to the outer diameter 612 of the second step 608. In some embodiments, a transition 611 from a surface 609 of the second step 608 to the top surface 604 of the process kit ring 602 may have an angle 629 of about 99 degrees to about 101 degrees, such as shown in Figure 6C. Referring back to Figure 6B, in such embodiments, an inner diameter 610 of the top surface 604 may be about 12.132 inches to about 12.142 inches.

[0039] The second step 608 provides a supporting surface for a substrate when disposed on the process kit ring 602 for processing. The second step 608 may have an outer diameter 612 of about 11.884 inches to about 11.889 inches and extend to the inner edge 616 of the process kit ring 602.

[0040] In some embodiments, the process kit ring 602 may comprise a ring 632 extending downward from the bottom 613 of the process kit ring 602 and about an outer edge 630 of the process kit ring 602. The ring 632 allows the process kit ring 602 to securely sit atop the substrate support and allow other components of the substrate support to fit underneath the process kit ring 602 (e.g., the ring 502 described above). In some embodiments, the ring 632 may have an inner diameter 633 of about 14.905 inches to about 14.915 inches. Referring to Figure 6C, in some embodiments, an overall thickness 620 of the process kit ring 602 may be about 0.510 inches to about 0.520 inches.

[0041] Figures 7A-E respectively depict a top view, a side cross-sectional view, a detail of the side cross-sectional view, a detail of the top view, and a side cross sectional view of the top detail of a process kit ring for use in a plasma reactor in accordance with some embodiments of the present invention. The dimensions of

the process kit ring 702 described below advantageously allow the process kit ring 702 to be suitable for use with the substrate support 116 described above. In some embodiments, the process kit ring 702 is fabricated from quartz (S102). By fabricating the process kit ring 702 from quartz, the process kit ring 702 may advantageously be dielectric and resistant to degradation when exposed to a process environment within the process chamber.

[0042] The process kit ring 702 generally comprises a ring shaped body 704 having an outer edge 705, inner edge 706, a top surface 707 and a bottom 709 and a plurality of protrusions (three protrusions 716 shown) extending inwardly from the inner edge 706 towards a center 711 of the process kit ring 702.

[0043] In some embodiments, a diameter 708 of the outer edge 705 may be about 15.115 inches to about 15.125 inches. In some embodiments, a diameter of the inner edge 706 may be about 12.245 inches to about 12.250 inches.

[0044] The plurality of protrusions 716 provides a supporting surface for a substrate when disposed on the process kit ring 702 for processing. In some embodiments, the plurality of protrusions 716 may be disposed symmetrically about the inner edge 706 of the process kit ring 702, for example such as disposed about 120 degrees from one another. In some embodiments, each of the plurality of protrusions 716 extend towards the center 711 of the process kit ring 702 such that a distance 710 from the center 711 to an end 719 of each of the plurality of protrusions 716 may be about 5.937 inches to about 5.947 inches.

[0045] Referring to Figure 7D, in some embodiments, each of the plurality of protrusions 716 may have a width 731 of about 0.205 inches to about 0.216 inches. In some embodiments, each of the plurality of protrusions 716 may comprise a rounded end 741.

[0046] Referring to 7E, in some embodiments, a substrate supporting surface 737 of each of the plurality of protrusions 716 may be disposed beneath the top surface 707 of the process kit ring 702. In some embodiments, a transition 735 between the substrate supporting surface 737 and the top surface 707 of the process kit ring 702 may be curved.

[0047] Referring to Figure 7B, in some embodiments, a notch 726 may be formed beneath the inner edge 706. When present, the notch 726 may interface with another component of the substrate support to facilitate centering the process kit ring 702 on the component. In some embodiments, the notch 726 may be formed in the process kit ring 702 to a diameter 720 of about 12.405 inches to about 12.505 inches. In some embodiments, the process kit ring 702 may comprise a ring 724 extending downward from the bottom 709 of the process kit ring 702 about an outer edge 726 of the process kit ring 702. The ring 724 allows the process kit ring 702 to securely sit atop the substrate support and allow other components of the substrate support to fit underneath the process kit ring 702 {e.g., the ring 502 described above). In some embodiments, an inner diameter 722 of the ring 724 may be about 14.905 inches to about 14.915 inches. In some embodiments, the inner edge 706 may comprise a tapered portion 739 extending from the inner edge 706 to the top surface 707 thereby providing an inner diameter 718 of about 12.295 inches to about 12.305 inches proximate the top surface 707 of the process kit ring 702. Referring to Figure 7C, in such embodiments, an angle 743 between the tapered portion 735 and the surface may be about 99 degrees to about 101 degrees. In some embodiments, an overall thickness 729 of the process kit ring 702 may be about 0.520 inches to about 0.530 inches.

[0048] Returning to Figure 2, the ring 232 (or ring 400) may rest on a first dielectric layer 234. The first dielectric layer 234 may be disposed about the peripheral edge 202 of the first electrode 200. For example, the first dielectric layer 234 may electrically isolate the first electrode 200 and/or at least a portion of the second electrode 206 from the grounding layer 230. As illustrated, the grounding layer 230 may be disposed about the first dielectric layer 234. In some embodiments, the radially extending portion 214 of the second electrode 206 may be at least partially disposed above the first dielectric layer 234, as illustrated in Figure 2. The first dielectric layer 234 may comprise any suitable dielectric materials, such as one or more of quartz, yttria (Y₂O₃), silicon carbide (SiC), diamond coated quartz, or the like. The grounding layer 230 may comprise any suitable conductive material, such as one or more of aluminum, doped SiC, doped diamond, or other suitable conductive materials that are compatible with process environment. As illustrated in

Figures 1 and 2, the ground layer 230 may be coupled to a plasma shield 236 which may be disposed about the substrate support 116, for example, about the first dielectric layer 234.

[0049] Returning to Figure 1, in some embodiments, the lid 120 may be substantially flat. Other modifications of the chamber 104 may have other types of lids such as, for example, a dome-shaped lid or other shapes. The inductively coupled plasma apparatus 102 is typically disposed above the lid 120 and is configured to inductively couple RF power into the process chamber 104. The inductively coupled plasma apparatus 102 includes the first and second coils 110, 112, disposed above the lid 120. The relative position, ratio of diameters of each coil, and/or the number of turns in each coil can each be adjusted as desired to control, for example, the profile or density of the plasma being formed via controlling the inductance on each coil. Each of the first and second coils 110, 112 is coupled through a matching network 114 via the RF feed structure 106, to the RF power supply 108. The RF power supply 108 may illustratively be capable of producing up to about 4000 W (but not limited to about 4000 W) at a tunable frequency in a range from 50 kHz to 13.56 MHz, although other frequencies and powers may be provided as desired for particular applications.

[0050] In some embodiments, a power divider 105, such as a dividing capacitor, may be provided between the RF feed structure 106 and the RF power supply 108 to control the relative quantity of RF power provided to the respective first and second coils. For example, as shown in Figure 1, the power divider 105 may be disposed in the line coupling the RF feed structure 106 to the RF power supply 108 for controlling the amount of RF power provided to each coil (thereby facilitating control of plasma characteristics in zones corresponding to the first and second coils). In some embodiments, the power divider 105 may be incorporated into the match network 114. In some embodiments, after the power divider 105, RF current flows to the RF feed structure 106 where it is distributed to the first and second RF coils 110, 112. Alternatively, the split RF current may be fed directly to each of the respective first and second RF coils.

[0051] A heater element 121 may be disposed atop the lid 120 to facilitate heating the interior of the process chamber 104. The heater element 121 may be disposed

between the lid 120 and the first and second coils 110, 112. In some embodiments, the heater element 121 may include a resistive heating element and may be coupled to a power supply 123, such as an AC power supply, configured to provide sufficient energy to control the temperature of the heater element 121 to be between about 50 to about 100 degrees Celsius. In some embodiments, the heater element 121 may be an open break heater. In some embodiments, the heater element 121 may comprise a no break heater, such as an annular element, thereby facilitating uniform plasma formation within the process chamber 104.

[0052] During operation, the substrate 115 (such as a semiconductor wafer or other substrate suitable for plasma processing) may be placed on the substrate support 116 and process gases may be supplied from a gas panel 138 through entry ports 126 to form a gaseous mixture 150 within the process chamber 104. For example, prior to introduction of the process gases, a temperature of surfaces within the chamber may be controlled, for example, by the heater 121 as discussed above to have inner volume facing surfaces at a temperature of between about 100 to 200 degrees Celsius, or about 150 degrees Celsius. The gaseous mixture 150 may be ignited into a plasma 155 in the process chamber 104 by applying power from the plasma source 108 to the first and second coils 110, 112. In some embodiments, power from the bias source 122 may be also provided to the substrate support 116. The pressure within the interior of the chamber 104 may be controlled using a throttle valve 127 and a vacuum pump 136. The temperature of the chamber wall 130 may be controlled using liquid-containing conduits (not shown) that run through the wall 130.

[0053] The controller 140 comprises a central processing unit (CPU) 144, a memory 142, and support circuits 146 for the CPU 144 and facilitates control of the components of the reactor 100 and, as such, of methods of forming a plasma, such as discussed herein. The controller 140 may be one of any form of general-purpose computer processor that can be used in an industrial setting for controlling various chambers and sub-processors. The memory, or computer-readable medium, 142 of the CPU 144 may be one or more of readily available memory such as random access memory (RAM), read only memory (ROM), floppy disk, hard disk, or any other form of digital storage, local or remote. The support circuits 146 are coupled

to the CPU 144 for supporting the processor in a conventional manner. These circuits include cache, power supplies, clock circuits, input/output circuitry and subsystems, and the like. The memory 142 stores software (source or object code) that may be executed or invoked to control the operation of the reactor 100 in the manner described herein. The software routine may also be stored and/or executed by a second CPU (not shown) that is remotely located from the hardware being controlled by the CPU 144.

[0054] While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof.

Claims:

1. A substrate support, comprising:
 - a first electrode disposed within the substrate support and having a peripheral edge and a first surface;
 - a substrate support surface disposed above the first surface of the first electrode; and
 - a second electrode disposed within the substrate support and extending radially beyond the peripheral edge of the first electrode, wherein the second electrode has a second surface disposed about and above the first surface of the first electrode.
2. The substrate support of claim 1, wherein the first and second electrodes are a single integrated electrode.
3. The substrate support of claim 1, further comprising:
 - a dielectric layer disposed to between the first electrode and the second electrode.
4. The substrate support of claim 1, further comprising one of:
 - a first power supply coupled to the first and second electrodes to provide RF energy to the first and second electrodes; or
 - a first power supply coupled to the first electrode to provide RF energy to the first electrode, and a second power supply coupled to the second electrode to provide RF energy to the second electrode.

5. The substrate support of claim 1, wherein the first electrode has a peripheral edge that extends beyond a peripheral edge of the support surface, wherein the second electrode has a peripheral edge that extends beyond the peripheral edge of the first electrode, and further comprising a dielectric layer disposed about the peripheral edge of the first electrode and an RF grounding layer disposed about the dielectric layer.
6. The substrate support of any of claims 1 to 5, further comprising:
an electrostatic chuck disposed above the first electrode, wherein an upper surface of the electrostatic chuck comprises the substrate support surface.
7. The substrate support of any of claims 1 to 2, or 4 to 5, wherein the second electrode further comprises:
a base disposed on the first electrode; and
a radially extending portion disposed atop the base and extending beyond the peripheral edge of the first electrode.
8. The substrate support of claim 6, wherein the base and the radially extending portion are a single integrated electrode.
9. The substrate support of claim 6, further comprising:
a first dielectric layer disposed about the peripheral edge of the first RF electrode; and
an RF grounding layer disposed about the first dielectric layer, wherein the radially extending portion of the second RF electrode is at least partially disposed above the first dielectric layer.
10. The substrate support of claim 9, further comprising:
an edge ring disposed above and adjacent to the radially extending portion of the second electrode such that the edge ring is disposed between the extending portion of the second electrode and the RF grounding layer.

11. The substrate support of any of claims 1 to 5, wherein the first electrode further comprises:

a body formed of a conductive material and having a plurality of channels disposed through the body.

12. The substrate support of claim 10, further comprising:

a heat transfer medium source coupled to the plurality of channels to provide a heat transfer medium to the plurality of channels.

13. The substrate support of any of claims 1 to 4, wherein the first electrode has a peripheral edge, and wherein the second electrode is disposed about the first electrode and extends radially beyond the peripheral edge of the first electrode, and further comprising: a first dielectric layer disposed about the peripheral edge of the first electrode and an RF grounding layer disposed about the first dielectric layer.

14. The substrate support of claim 13, further comprising:

an edge ring disposed above and adjacent to the second electrode such that the edge ring is disposed between the second electrode and the RF grounding layer.

15. The substrate support of claim 13, further comprising:

an electrostatic chuck disposed above the first electrode, wherein an upper surface of the electrostatic chuck comprises the substrate support surface.

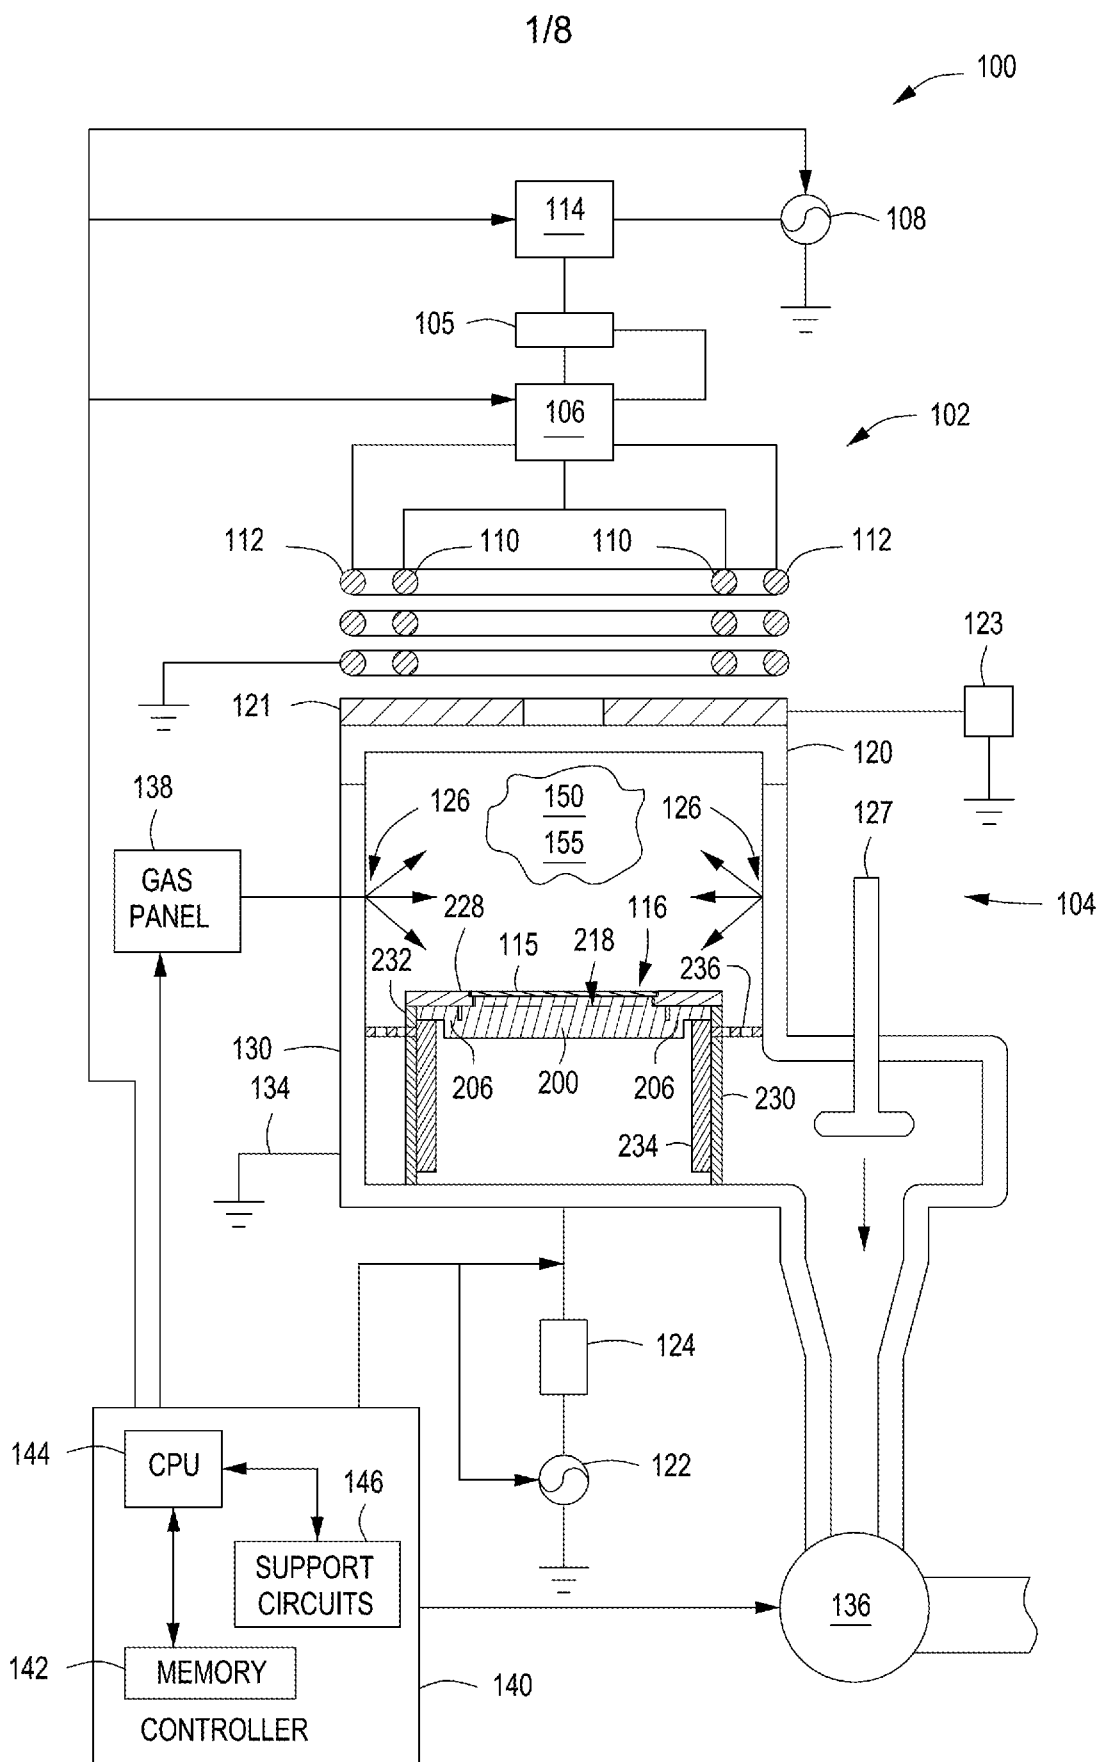


FIG. 1

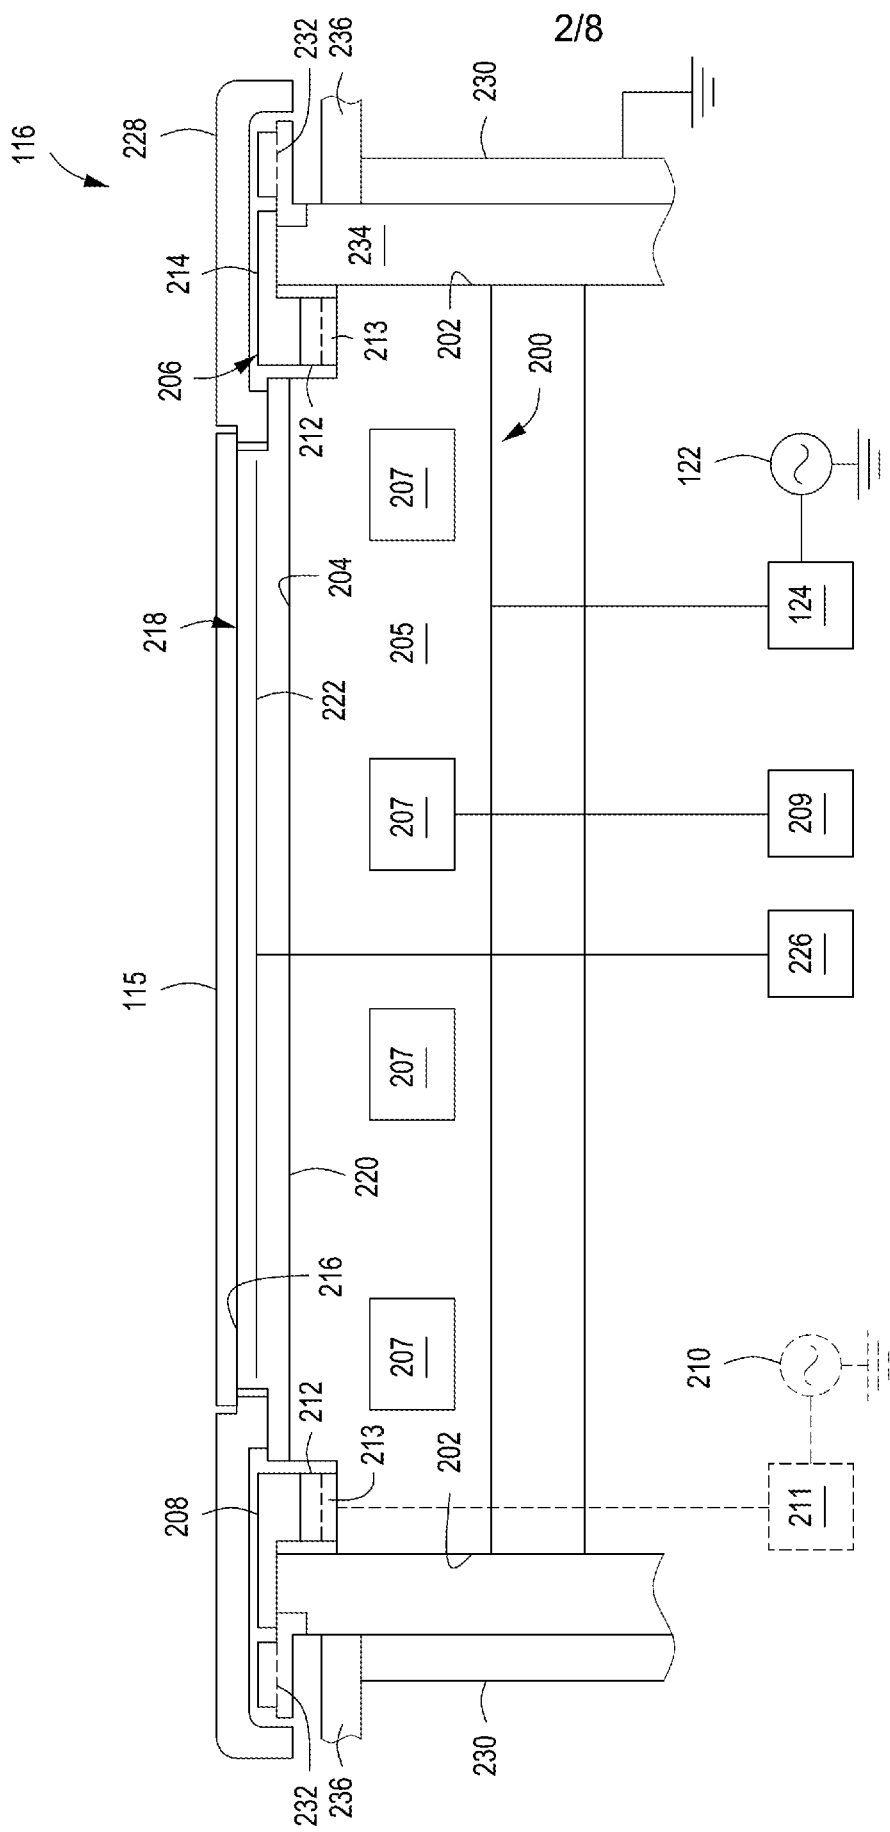


FIG. 2

FIG. 3


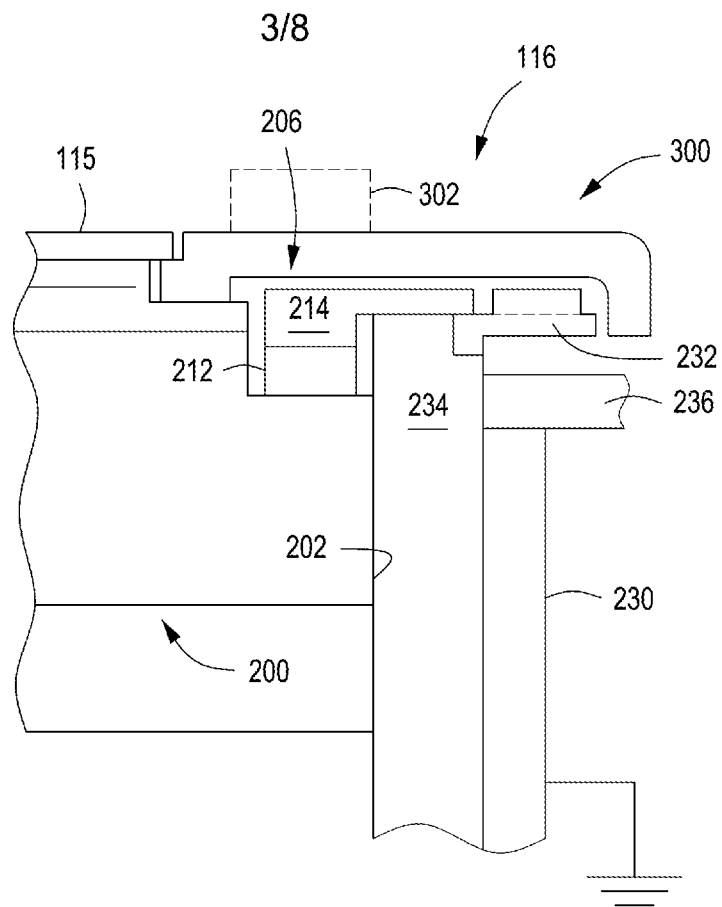


FIG. 4

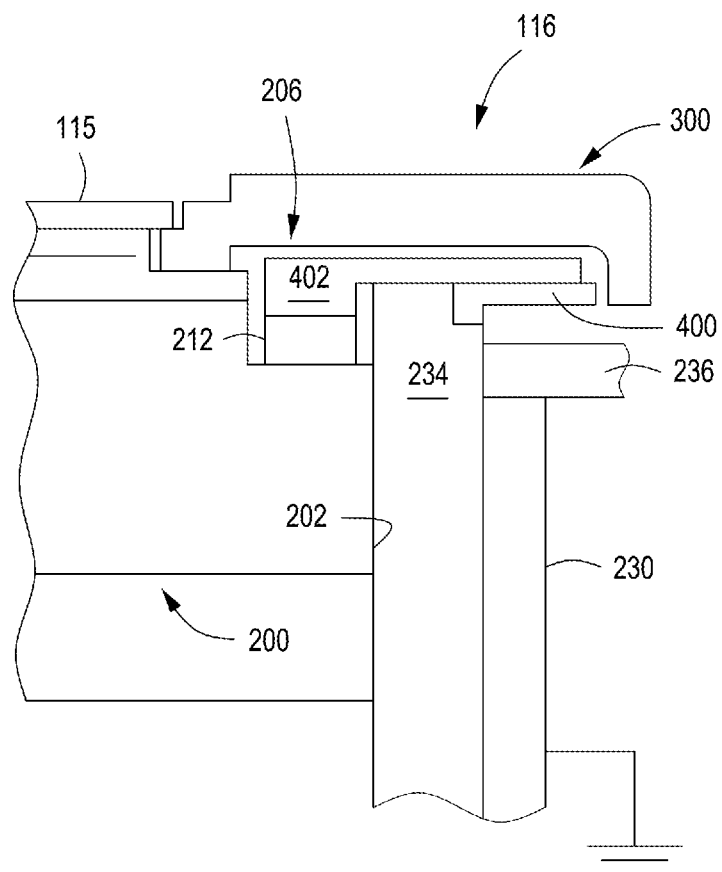

4/8

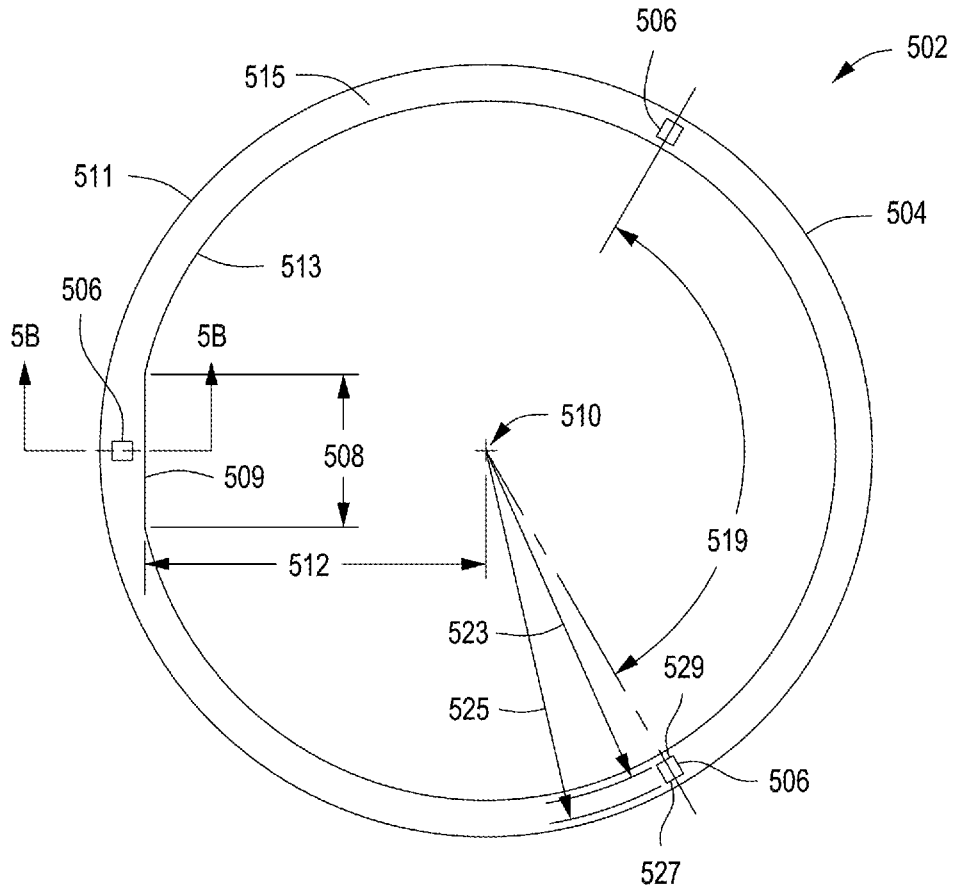


FIG. 5A

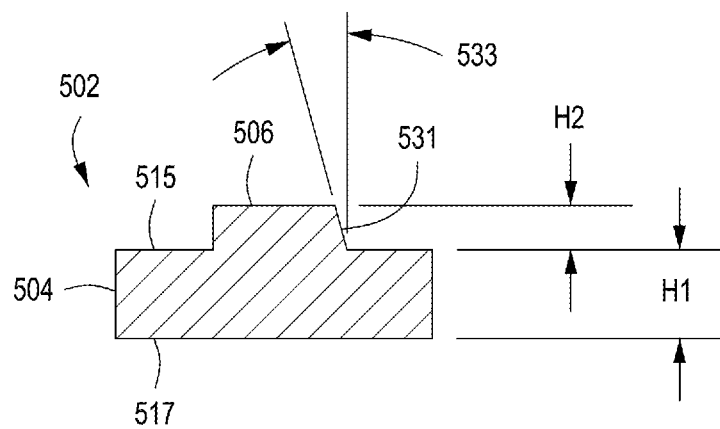


FIG. 5B

5/8

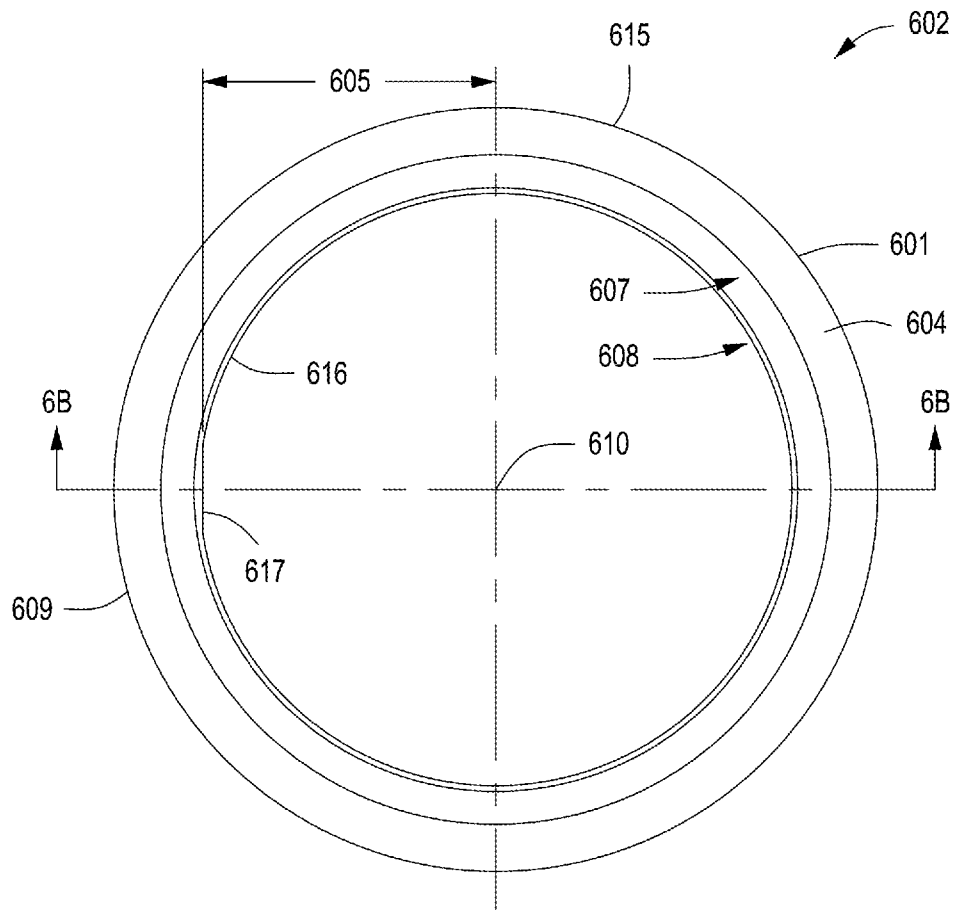


FIG. 6A

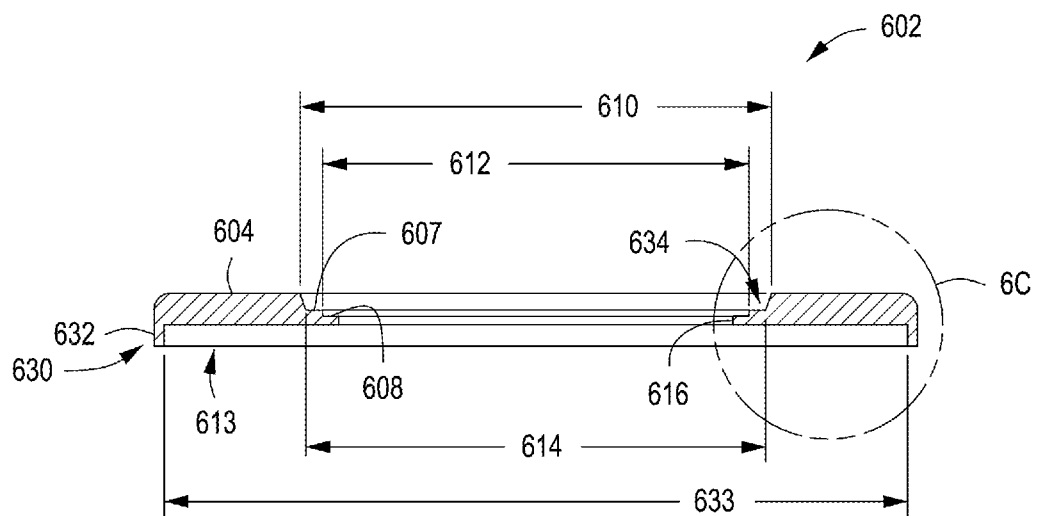


FIG. 6B

6/8

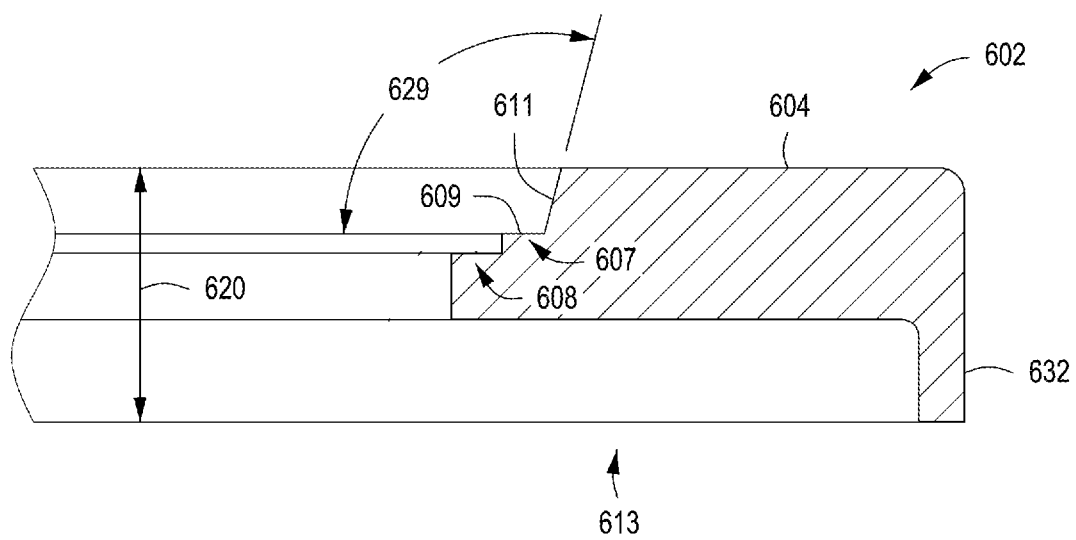


FIG. 6C

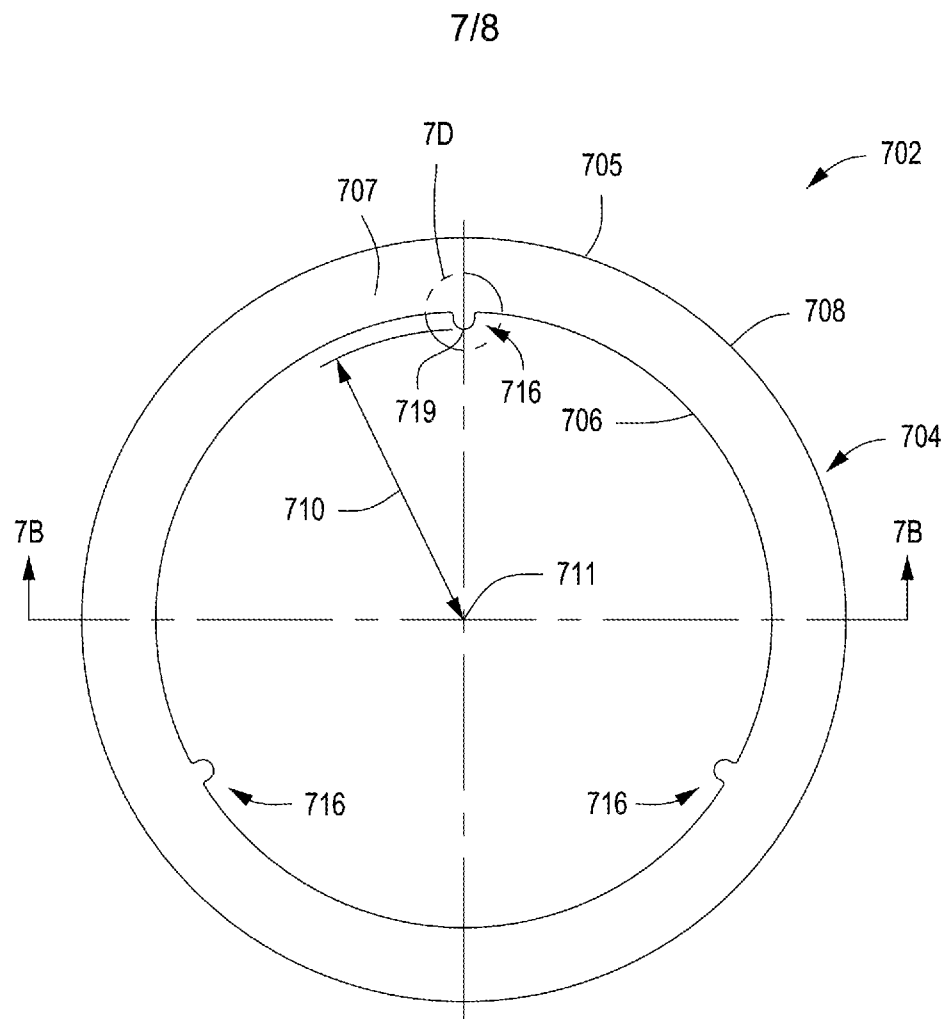


FIG. 7A

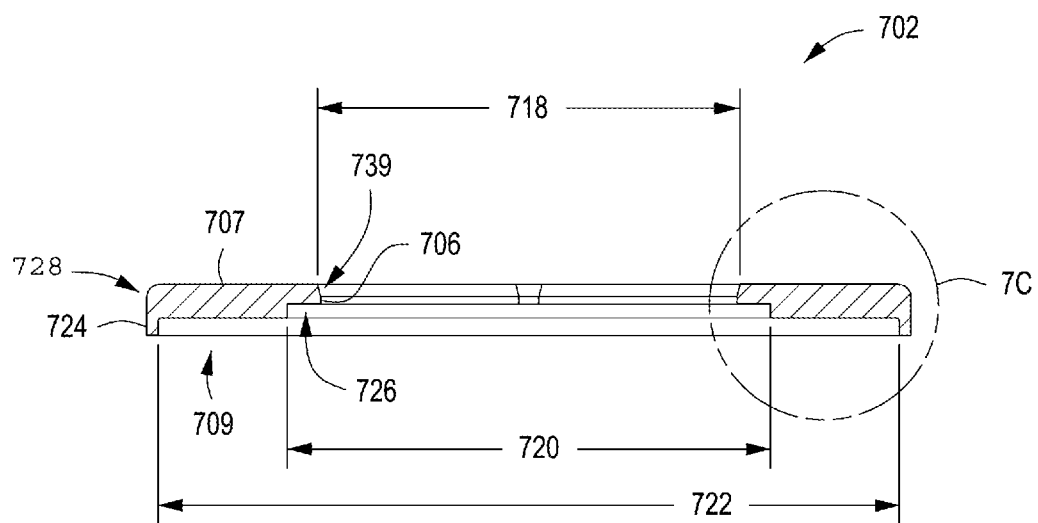


FIG. 7B

8/8

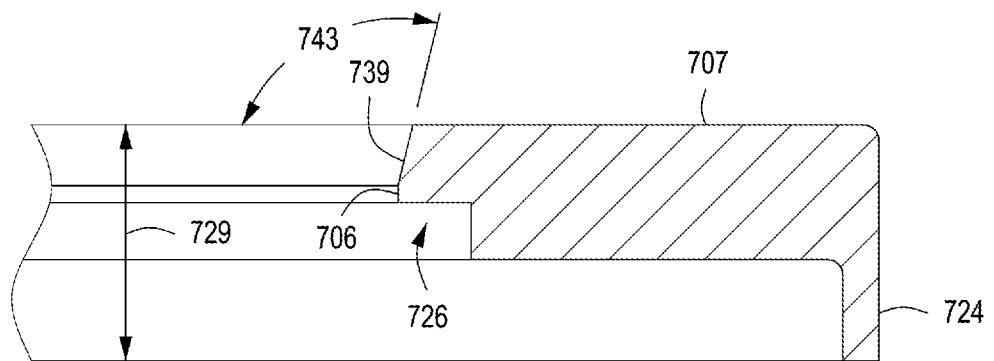


FIG. 7C

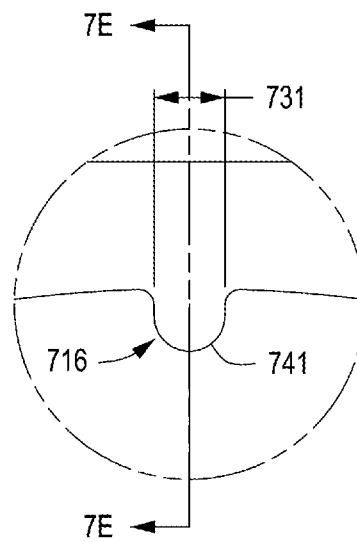


FIG. 7D

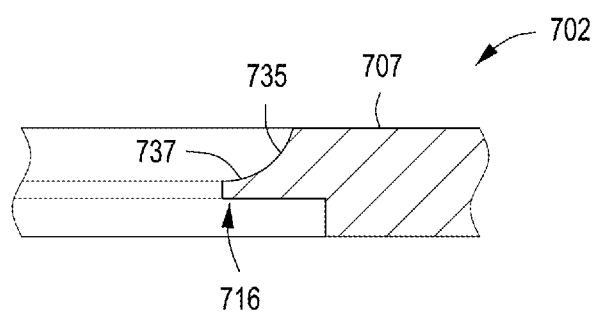


FIG. 7E

INTERNATIONAL SEARCH REPORT

International application No.

PCTYUS2012/060314

A. CLASSIFICATION OF SUBJECT MATTER**H05H 1/34(2006.01)i, H05H 1/46(2006.01)1, HOIL 21/3065(2006.01)1**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05H 1/34; HOIL 21/302; HOIL 21/3065; C23F 1/00; C23C 16/513; C23F 1/02; C23C 14/24; C23C 16/00; H01L 21/461

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: plasma, cathode, electrode, substrate support, RF, dielectric layer, power supply, grounding layer, substrate, chamber

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 2003-0037880 Al (CARDUCCI et al.) 27 February 2003 See paragraphs [0055]-[0060] , [0076] -[0080] , and figures 1-4 .	1-9 , 11 , 13 , 15 10 , 12 , 14
Y A	US 2002-0139478 Al (MA et al.) 03 October 2002 See paragraphs [0020] , [0031H0037] , [0050]-[0052] , and figures 1-3 .	1-9 , 11 , 13 , 15 10 , 12 , 14
A	US 2009-0285998 Al (OKUMURA et al.) 19 November 2009 See abstract , paragraphs [0088] -[0095] , and figure 1.	1-15
A	US 2002-0004309 Al (COLLINS et al.) 10 January 2002 See abstract , paragraphs [0042] -[0047] , and figures 1-3 .	1-15
A	KR 10-2008-0032163 A (LAM RESEARCH CORPORATION) 14 April 2008 See abstract , paragraphs [0034] -[0045] , claim 1, and figures 1-3 .	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 March 2013 (28.03.2013)

Date of mailing of the international search report

29 March 2013 (29.03.2013)

Name and mailing address of the ISA/KR




Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan
City, 302-70 1, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Sung Gon

Telephone No. 82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT /US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
us 2003-0037880 A1	27.02.2003	EP 1334514 A2 JP 2004-5135 16 A KR 10-08870 14 B1 TW 588401 A us 2003-0038 111 A1 us 2005-0003675 A1 us 6403491 B1 us 6716302 B2 us 6797639 B2 Wo 02-37541 A2	13.08.2003 30.04.2004 04.03.2009 21.05.2004 27.02.2003 06.01.2005 11.06.2002 06.04.2004 28.09.2004 10.05.2002
us 2002-0139478 A1	03.10.2002	CN 1531739 A CN 1531739 CO DE 60237195 D1 EP 1378000 A2 EP 1378000 B1 JP 2004-53 1059 A JP 2010-17767 1 A JP 3100986 U KR 10-0813823 B1 KR 20-0333 176 Y1 US 6554954 B2 Wo 02-082499 A2	22.09.2004 07.03.2007 16.09.2010 07.01.2004 04.08.2010 07.10.2004 12.08.2010 03.06.2004 17.03.2008 12.11.2003 29.04.2003 17.10.2002
us 2009-0285998 A1	19.11.2009	CN 100495654 C CN 101477944 A CN 101477944 B CN 1745463 A CN 1745463 CO EP 1594161 A1 EP 1594161 A4 JP 04472372 B2 JP 2004-363552 A JP 2010-1358 13 A KR 10-0839677 B1 KR 2005-0094475 A TW 1334173 A TW 1334173 B US 2005-0276928 A1 us 2011-0162802 A1 us 7585386 B2 us 7922862 B2 wo 2004-070808 A1	03.06.2009 08.07.2009 20.10.2010 08.03.2006 08.03.2006 09.11.2005 22.10.2008 12.03.2010 24.12.2004 17.06.2010 19.06.2008 27.09.2005 01.12.2010 01.12.2010 15.12.2005 07.07.2011 08.09.2009 12.04.2011 19.08.2004
us 2002-0004309 A1	10.01.2002	CN 1071347 AO EP 0421430 A2 EP 0421430 A3 EP 0421430 B1 EP 0421430 B2	28.04.1993 10.04.1991 14.08.1991 02.04.1997 10.12.2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT /US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 0469597 A2	05.02.1992
		EP 0469597 A3	22.04.1992
		EP 0469597 B1	14.10.1998
		EP 0470031 A2	05.02.1992
		EP 0470031 B1	15.05.1996
		EP 0472941 A2	04.03.1992
		EP 0472941 A3	05.04.1995
		EP 0489407 A2	10.06.1992
		EP 0489407 A3	22.07.1992
		EP 0495524 A1	22.07.1992
		EP 0520519 A1	30.12.1992
		EP 0537599 A1	21.04.1993
		EP 0537599 B1	19.02.1997
		EP 0552490 A1	28.07.1993
		EP 0552491 A1	28.07.1993
		EP 0552491 B1	15.07.1998
		EP 0552955 A1	28.07.1993
		EP 0597497 A1	18.05.1994
		EP 0598390 A1	25.05.1994
		EP 0598390 B1	15.10.1997
		EP 0601468 A1	15.06.1994
		EP 0601468 B1	18.03.1998
		EP 0650182 A1	26.04.1995
		EP 0702995 A1	27.03.1996
		EP 0702995 B1	08.12.1999
		EP 0715335 A1	05.06.1996
		EP 0802560 A1	22.10.1997
		EP 0802560 B1	31.07.2002
		EP 0807952 A2	19.11.1997
		EP 0807952 A3	14.01.1998
		EP 0807953 A1	19.11.1997
		EP 0825712 A2	25.02.1998
		EP 0825712 A3	11.03.1998
		EP 0837489 A2	22.04.1998
		EP 0838842 A2	29.04.1998
		EP 0838842 A3	13.01.1999
		EP 0838843 A2	29.04.1998
		EP 0838843 A3	13.01.1999
		EP 0840349 A2	06.05.1998
		EP 0840349 A3	10.10.2001
		EP 0840350 A2	06.05.1998
		EP 0840365 A2	06.05.1998
		EP 0840365 A3	29.10.2003
		EP 0849766 A2	24.06.1998
		EP 0849766 A3	14.10.1998
		EP 0877482 A1	11.11.1998
		EP 0892422 A2	20.01.1999
		EP 0892422 A3	14.04.1999
		GB 2251977 A	22.07.1992
		JP 02519364 B2	17.05.1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 02521399 B2	17. 05 . 1996
		JP 02543642 B2	25. 07 . 1996
		JP 02625072 B2	11. 04. 1997
		JP 02634313 B2	25. 04. 1997
		JP 02634334 B2	25. 04. 1997
		JP 02635267 B2	25. 04. 1997
		JP 02997142 B2	29. 10 . 1999
		JP 03-171623 A	25. 07 . 199 1
		JP 03236216 B2	28. 09 . 200 1
		JP 03363782 B2	25. 10 . 2002
		JP 03386868 B2	10. 0 1 . 2003
		JP 03422540 B2	25. 04. 2003
		JP 03426040 B2	09. 05 . 2003
		JP 04-247878 A	03. 09 . 1992
		JP 04-2873 18 A	12. 10 . 1992
		JP 04236294 B2	11. 03 . 2009
		JP 04299896 B2	24. 04. 2009
		JP 04418534 B2	04. 12 . 2009
		JP 05-192530 A	03. 08 . 1993
		JP 05-206072 A	13. 08 . 1993
		JP 06-029256 A	04. 02 . 1994
		JP 06-086464 A	25. 03 . 1994
		JP 06-1 12166 A	22. 04. 1994
		JP 06-151367 A	3 1. 05 . 1994
		JP 06-215955 A	05. 08 . 1994
		JP 06-224679 A	12. 08 . 1994
		JP 06-283473 A	07. 10 . 1994
		JP 07-0140 18 A	17. 0 1 . 1995
		JP 07-183283 A	2 1. 07 . 1995
		JP 08031705 B2	27. 03 . 1996
		JP 09-027485 A	28. 0 1 . 1997
		JP 09-232292 A	05. 09 . 1997
		JP 10-064882 A	06. 03 . 1998
		JP 10-092598 A	10. 04. 1998
		JP 10-144663 A	29. 05 . 1998
		JP 10-15002 1 A	02. 06 . 1998
		JP 10-154599 A	09. 06 . 1998
		JP 10-189296 A	2 1. 07 . 1998
		JP 10-241894 A	11. 09 . 1998
		JP 10-241895 A	11. 09 . 1998
		JP 10-261629 A	29. 09 . 1998
		JP 11-097430 A	09. 04. 1999
		JP 11-135296 A	2 1. 05 . 1999
		JP 11-154600 A	08. 06 . 1999
		JP 2002-141341 A	17. 05 . 2002
		JP 2002-502547 A	22. 0 1 . 2002
		JP 2003-518324 A	03. 06 . 2003
		JP 2017-519364 B	3 1. 07 . 1996
		JP 2017-543642 B	16. 10 . 1996
		JP 2521399 B2	07. 08 . 1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2625072 B2	25.06.1997
		JP 2634313 B2	23.07.1997
		JP 2634334 B2	23.07.1997
		JP 2635267 B2	30.07.1997
		JP 2997142 B2	11.01.2000
		JP 3386868 B2	17.03.2003
		JP 3422540 B2	30.06.2003
		JP 3426040 B2	14.07.2003
		JP 4290428 A	15.10.1992
		JP 4299896 B2	22.07.2009
		JP 4346829 A	02.12.1992
		KR 10-0170387 B1	30.03.1999
		KR 10-0226556 B1	15.10.1999
		KR 10-0249 139 B1	15.03.2000
		KR 10-0255703 B1	01.05.2000
		KR 10-02656 17 B1	02.10.2000
		KR 10-0281345 B1	02.03.2001
		KR 10-0362598 B1	05.02.2003
		KR 10-0369720 B1	17.03.2003
		KR 10-0498585 B1	09.09.2005
		KR 10-0515 122 B1	28.11.2005
		KR 10-052596 1 B1	21.12.2005
		KR 10-0550420 B1	25.05.2006
		KR 10-1992- 00 14373 A	30.07.1992
		KR 10-1992- 00 15968 A	27.08.1992
		KR 10-1993- 0007495 A	20.05.1993
		KR 10-1994-00 12770 A	24.06.1994
		KR 10-1994-00 128 19 A	24.06.1994
		KR 10-1995- 00 126 15 A	16.05.1995
		KR 10-1997- 00773 18 A	12.12.1997
		KR 10-1997- 00773 19 A	12.12.1997
		KR 10-1998- 0032998 A	25.07.1998
		KR 10-1998- 0033120 A	25.07.1998
		TW 399396 A	21.07.2000
		TW 462209 A	01.11.2001
		TW 462209 B	01.11.2001
		us 05187454 A	16.02.1993
		us 05210466 A	11.05.1993
		us 05223457 A	29.06.1993
		us 05226932 A	13.07.1993
		us 05300460 A	05.04.1994
		us 05312778 A	17.05.1994
		us 05349313 A	20.09.1994
		us 05392018 A	21.02.1995
		us 05428506 A	27.06.1995
		us 05477975 A	26.12.1995
		us 0555650 1 A	17.09.1996
		us 05572170 A	05.11.1996
		us 05574410 A	12.11.1996
		us 05618382 A	08.04.1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		us 05707486 A	13.01.1998
		us 05770099 A	23.06.1998
		us 05772832 A	30.06.1998
		us 05888414 A	30.03.1999
		us 05908576 A	01.06.1999
		us 05990017 A	23.11.1999
		us 06024826 A	15.02.2000
		us 06036877 A	14.03.2000
		us 06036878 A	14.03.2000
		us 06054013 A	25.04.2000
		us 06063233 A	16.05.2000
		us 06068784 A	30.05.2000
		us 06074512 A	13.06.2000
		us 06077384 A	20.06.2000
		us 06083412 A	04.07.2000
		us 06090303 A	18.07.2000
		us 06095083 A	01.08.2000
		us 06095084 A	01.08.2000
		us 0616531 1 A	26.12.2000
		us 2001-042594 A1	22.11.2001
		us 2001-054483 A1	27.12.2001
		us 2001-05460 1 A1	27.12.2001
		us 2002-020499 A1	21.02.2002
		us 2002-0926 18 A1	18.07.2002
		us 2002-092826 A1	18.07.2002
		us 2002-096259 A1	25.07.2002
		us 2004-163764 A1	26.08.2004
		us 6171974 [31	09.01.2001
		us 6217785 [31	17.04.2001
		us 6218312 [31	17.04.2001
		us 6238588 f31	29.05.2001
		us 6251792 [31	26.06.2001
		us 6361644 [31	26.03.2002
		us 6365063 B2	02.04.2002
		us 6399514 [31	04.06.2002
		us 6440221 B2	27.08.2002
		us 6440866 [31	27.08.2002
		us 6444084 i31	03.09.2002
		us 6444085 [31	03.09.2002
		us 6444137 [31	03.09.2002
		us 6454898 i31	24.09.2002
		us 6488807 [31	03.12.2002
		us 6514376 [31	04.02.2003
		us 6518195 [31	11.02.2003
		us 6524432 f31	25.02.2003
		us 6545420 [31	08.04.2003
		us 6572732 B2	03.06.2003
		us 6623596 f31	23.09.2003
		us 6736931 B2	18.05.2004
		us 679031 1 B2	14.09.2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/060314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 6818140 B2	16. 11. 2004
KR 10-2008-0032 163 A	14. 04. 2008	CN 101238553 A	06. 08. 2008
		CN 101238553 CO	06. 08. 2008
		US 2007-003208 1 A1	08. 02. 2007
		US 2009-0186487 A1	23. 07. 2009
		Wo 2007-019049 A2	15. 02. 2007