

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



**(43) International Publication Date
26 April 2001 (26.04.2001)**

PCT

(10) International Publication Number
WO 01/28856 A1

(51) International Patent Classification⁷:
21/06, 21/18

B65B 5/08,

(74) **Agents:** FLINT, Cort et al.; P.O. Box 10827, Greenville, SC 29603 (US).

(21) International Application Number: PCT/US00/27577

(22) International Filing Date: 5 October 2000 (05.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 09/418,619 15 October 1999 (15.10.1999) US

(71) Applicant: HARTNESS INTERNATIONAL, INC.
[US/US]; 1200 Garlington Rd., Greenville, SC 29615
(US).

(72) **Inventors:** **HARTNESS, Thomas, Patterson**; 300 Smith Road, Greenville, SC 29615 (US). **WIERNICKI, Richard, M.**; 13 Moore's Ridge Road, Roebuck, SC 29376 (US). **DILLARD, Robert, Leslie**; 132 Fire Station Road, Easley, SC 29642 (US). **SCOTT, David, Lee**; 802 Half Mile Way, Greenville, SC 29609 (US). **COOLEY, David, N.**; 11 Trenholm Road, Greenville, SC 29615 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTINUOUS CIRCULAR MOTION CASE PACKING AND DEPACKING APPARATUS AND METHOD

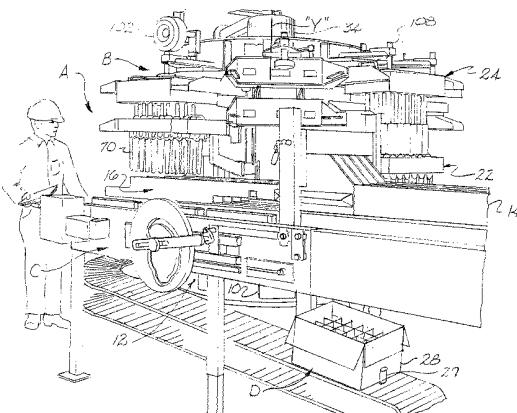

WO 01/28856 A1

(57) Abstract: An apparatus and method for continuously transferring articles from a pickup station to a release station using a circular, continuously rotating turret (B) is disclosed which includes a plurality of transfer arms (20) carried in a circular motion wherein pickup heads (22) carried by the transfer arms are converted from the circular motion to a straight-line motion during pick up of the articles (13) to provide a case packing machine having high speed and reliable operation. In accordance with the general aspects of the invention, a first conveyor is disclosed for conveying the articles to a pickup station and a second conveyor is provided for delivering the articles away from a release station. One of the first and second conveyors includes an arcuate conveyor section disposed below a congruent path of the pickup heads. At least one of the pickup and release stations is advantageously located over the arcuate conveyor section whereby high speed operation requiring only a small amount of machine floor space is provided. When utilized as a case packing machine, both the pickup heads and grid heads, which define a plurality of guides through which the articles are released at the case packing station, are moved in a translatory motion during article pick up.

**CONTINUOUS CIRCULAR MOTION CASE PACKING
AND DEPACKING APPARATUS AND METHOD**

This is a continuation-in-part of a copending application serial no. 09/301,394, 5 filed April 28, 1999, entitled Continuous Motion Case Packing Apparatus And Method; which is a continuation-in-part of application serial no. 09/137,327, filed August 20, 1998, entitled Continuous Motion Case Packing Apparatus, now abandoned; which is a continuation of application serial no. 08/736,376, filed on October 26, 1996, entitled 10 Continuous Motion Case Packing Apparatus, which is now United States Patent no. 5,797,249 issued on August 25, 1998; which is a continuation-in-part of application serial no. 08/ 338,026, filed on November 10, 1994, entitled Continuous Motion Case Packing Apparatus, which is now United States Patent no. 5,588,282 issued on December 31, 1996; and the above applications and patent disclosures are incorporated herein by reference.

15

Background of the Invention

The invention relates to an apparatus and method for transferring articles into and out of cases using continuous motion, and particularly, where the continuous motion is basically circular at higher transfer speeds with a small footprint.

20

In the art of case packing, large numbers of articles must be grouped and packaged rapidly by an apparatus that will function dependably without damage to the articles processed. When unpacking articles from cases, the articles are already grouped in a pattern in the case reducing some of the problems of article pickup. Case packing apparatus has been generally categorized as either intermittent case packing or continuous case packing. In intermittent case packing the article flow and/or case flow is interrupted during article pickup and/or release. Most recently, attention has been directed to continuous case packing in order to increase production. However, the continuous case packing has brought increased problems with handling the processed articles without breakage, damage, or interruption.

In the continuous case packing apparatus, articles are grouped together in successive slugs at a pickup position. The slugs are typically picked up at the pickup position by article grippers carried by an orbital handling machine rotating about two vertical axes. The slugs are transferred to a case loading position where the grippers release the slug of articles into a case. The articles can be released either simultaneously or sequentially as the case is conveyed beneath the slug of articles. Apparatus of this type may be either of the "drop packer" type or "placement packer type." In the drop packer type, the articles are allowed to drop at least a small distance into the case after release. In the placement packer type, the drop, if any, is minimal and the articles are essentially placed gently onto the bottom of the case.

Continuous motion machines rotating about a single horizontal axis are shown in U.S. Patent Nos. 5,375,395, 5,257,888, and 5,313,764 using articulating arms and pickup heads. A set of article grippers is carried on the ends of the articulating arms. However, during the angular descent from the pickup position to the case packing position, both horizontal and vertical accelerations are typically encountered by the articles which are gripped only at their tops or necks. Intermittent circular machines rotating about a single vertical axis are shown in U.S. Patent Nos. 3,780,492 and 2,807,125.

Various other case packers, generally of the continuous motion type, using a vertical orbital conveyor are shown in U.S. Patent Nos. 5,212,930; 4,541,524; and 4,294,057. The first patent shows depositing the articles sequentially and individually, rather than as a group or slug, into partitioned cases without positively gripping the articles. The latter two patents use gripper devices to grip and place the articles. U. S.

5

Patent No. 4,457,121 discloses a continuous motion bottle packer wherein a plurality of grids are mounted individually on spokes of a vertical wheel so that each grid moves through an article infeed position where groups of articles are fed into the grid without interrupting the forward speed. Angular and horizontal accelerations of the articles and their contents are encountered due to the rotary wheel motion during the transfer which may be detrimental to the article and/or contents.

10

Continuous case packers are also known in which a horizontal rotary carousel is used to move vertically reciprocating gripper sets in a horizontal plane about two vertical axes. The reciprocating gripper sets pick up a slug of articles at one position and transfer the slug of articles to a second position where the gripper set is lowered to deposit the articles into a case. Typically the pickup and release stations are on opposite sides of the carousel, requiring parallel conveyors on each side. However, the disposition of the rotary carousel in a horizontal plane requires an inconvenient floor layout which also occupies a large amount of floor space. The parallel conveyor arrangements needed for the infeed and outfeed of articles adds to the floor space problem. The path of the gripper sets between the slug pickup position and the case packing position is also typically curved producing angular and acceleration forces on the articles. The curved article transfer path intersects the path of the conveyed case only for a brief interval making timing a factor. In various of the rotary carousel types, it is known to deposit the articles by lowering the articles, already gripped by the gripper set, through resilient fingers that guide the articles into partitioned cases.

20

Case packers, generally of the intermittent type, are shown in U. S. Patent Nos. 3,553,932 and 3,505,787 which also disclose using combinations of a lifting head

having suction cups and bottle grids having pockets for picking up containers and depositing them into cases. The containers and the cases are conveyed on parallel conveyors rather than in-line conveyors, and the transfer from the pickup position to the case loading position is lateral, or transverse, to the flow of containers and cases. U. S. 5 Patent No. 2,277,688 discloses another case packer using an arrangement of a gripper set and a bottle guide set to package the containers into a case. These type of case packers are generally non-continuous as compared to the continuous motion in-line transfer case packers described above where neither the flow of articles nor the flow of the cases is interrupted during operation of the packer.

10 Accordingly, an object of the invention is to provide an improved continuous case packing and depacking apparatus having a characteristic circular motion.

Another object of the invention is to provide a continuous motion apparatus and method which moves in a circular motion to provide high speeds of operation.

15 Another object of the invention is to provide a continuous, circular motion case packing or depacking apparatus and method which rotates about a single axis to provide a small footprint and high speed operation.

20 Another object of the invention is to provide a continuous, circular motion case packing apparatus and method in which slugs or groups of articles are picked up and transferred to a release station where the motion of the pickup heads is converted to a substantially straight-line motion along a pickup section during which time the articles are picked up.

Still another object of the invention is to provide a continuous, circular motion case packing or depacking apparatus and method wherein the articles are either picked

up or released over an arcuate section of a conveyor disposed below the path of pickup heads rotating along a common arc.

Yet another object of the invention is to provide a continuous motion apparatus and method in which a revolving turret moves a plurality of transfer arms in a circular path about a single vertical axis as reciprocating article pickup heads and/or grid heads, carried by the transfer arms, pickup and release the articles wherein either the pick up or release occurs over an arcuate conveyor section disposed below the pickup heads moving in a circular motion for high speed, reliable operation.

Summary of the Invention

The above objectives are accomplished according to the present invention by providing apparatus and method for transferring articles from a pickup station to a release station basically in a continuous circular motion. The apparatus includes a rotating turret which continuously rotates about a substantially vertical axis for continuously transferring the articles. A plurality of reciprocating article pickup heads are carried by the rotating turret for continuously and successively picking up groups of the articles at the pickup station and releasing the articles at the release station. A conveyor is provided having an arcuate conveyor section disposed generally below a congruent path of the pickup heads over which the heads are continuously rotated. Advantageously, one of the pickup and release stations is located along the arcuate section of the conveyor.

In a case packing embodiment of the invention, the turret rotates the pickup heads in a closed curvilinear path around the vertical axis which includes a circular

section and a generally linear pickup section along which the circular motion of the pickup heads is converted to a substantially linear motion to pick up the articles while the turret rotates. For this purpose, the apparatus may include a motion converter operatively associated with the pickup heads for causing the pickup heads to move generally in a straight-line motion along the pickup section, a distance which corresponds generally to a predetermined arc of turret rotation. In one illustrated embodiment of the invention, the motion converter includes support frames carried by transfer arms, and the pickup heads are slidably carried by the support frames whereby the pickup heads swivel and translate to maintain a straight-line motion along the pickup section as the turret rotates. The motion converter may include connector mechanisms associated with the rotating turret and the pickup heads for imparting the motion. Advantageously, the connector mechanisms may include vertical cam shafts and linkage arrangements connected between the cam shafts and pickup heads. The linkage arrangements are slidably carried by the vertical cam shafts to slide up and down as the pickup heads reciprocate during pick up and release of the articles. Cam followers may be connected to the linkage arrangements, with at least one cam assembled to a fixed center column which the cam followers follow as the turret rotates to impart the straight-line motion to the pickup heads.

The pickup station may be a station where articles are picked up for packing into cases, or a station where empty articles are removed from cases. Likewise, the release station may be a case packing station, or a station where empty articles are released on a conveyor to be conveyed away. When the release station is a case packing station, it may be located along the arcuate conveyor section, and the conveyor conveys indexed

cases to the arcuate conveyor section for receiving the released articles in synchronization with the rotating turret. In this case, a plurality of grid heads may be advantageously carried below the pickup heads. The grid heads may have guides in the form of pivoting grid fingers arranged in a grid corresponding to an array of the 5 articles to be picked up. The grid fingers define grid chutes having upper and lower ends for receiving the articles. The pickup heads have gripper elements arranged in a pattern corresponding to the pattern of grid chutes for gripping the articles.

Preferably, a vertical motion mechanism is provided which controls the operative 10 positions of the pickup and/or grid heads. The mechanism may include two cams encircling and supported by the stationary center column affixed inside the rotating turret. The pickup and grid heads may be slidably carried on vertical transfer arms carried by the turret. A cam roller associated with the pickup and grid heads rides on a respective cam to control the vertical position of the heads. A pickup head actuator 15 mechanism may be provided for actuating the gripper elements to selectively grip and release the articles. In one form of the invention, the pickup head actuator mechanism may include gripper actuators carried by the pickup heads having movement between a closed position wherein the articles are gripped, and an open position wherein the articles are released by the gripper elements. An operator controls the movement of the gripper actuators between the open and closed position. An engagement member may 20 be carried by the stationary column and positioned at the release station. The operator is arranged to strike the engagement member at the release station whereby the gripper actuators are moved to the open position for releasing the articles. In the case packing embodiment of the invention, the grid heads provide guides so that the articles are

reliably inserted into pockets of the partitioned cases. For this reason, the motion of the grid heads may also be controlled by the motion converter in unison with the pickup heads whereby their circular motion is converted into a straight-line motion for article pick up.

5 In accordance with the method of the invention, a method is provided for continuously transferring articles between a pickup station and a release station which comprises continuously conveying the articles to a pickup station; and continuously picking the articles up at the pickup station using pickup heads rotating about a single vertical axis in a closed cyclic path. Basically, as applied to case packing, the invention
10 contemplates using reciprocating pickup heads carried on a rotating turret, and converting the circular motion of the pickup heads to a straight-line motion over a predetermined arc of the turret along which the articles are picked up. The method advantageously includes providing an arcuate conveyor section, and carrying out one of the article pick up and release steps while the pickup heads are moving in a common
15 path over the arcuate conveyor section. The method includes, in one embodiment, conveying the cases to the arcuate conveyor section and picking up empty articles from the cases along the arcuate conveyor section for depacking the cases. In a second embodiment, the invention includes picking up articles delivered by an article infeed conveyor, and releasing the articles over the arcuate conveyor section into empty cases
20 at a case packing station.

Description of the Drawings

The construction designed to carry out the invention will hereinafter be described, together with other features thereof.

The invention will be more readily understood from a reading of the following specification and by reference to the accompanying drawings forming a part thereof, 5 wherein an example of the invention is shown and wherein:

Figure 1 is a perspective view of a circular, continuous motion case packing and depacking apparatus and method according to the invention;

Figure 2 is a top plan view of the apparatus and method of Figure 1;

10 Figure 3 is a simplified side elevation illustrating apparatus having a turret rotating about a single vertical axis for use in a continuous case packing and depacking apparatus and method according to the invention;

Figure 4 is a perspective view with parts omitted of a pair of circular cams for controlling the vertical positions of pickup and grid heads carried on a rotating turret according to the present invention;

15 Figure 5 is a schematic drawing of the cam patterns according to the illustrated embodiment of the invention;

Figure 5A is a schematic illustration of the sequencing of the pick up operation at an article pickup station according to the invention;

20 Figure 6 is a perspective view illustrating parts of a vertical motion mechanism for controlling the vertical positions of pickup and grid heads on a rotating turret according to the invention;

Figure 7 is a perspective view of the motion mechanism and a pickup head actuator mechanism for controlling the gripping and releasing of articles according to the invention;

5 Figure 8 is a schematic top plan view illustrating a closed cyclic path of pickup heads and grid heads in a case packing embodiment of the invention wherein the circular motion of the heads is converted to a translatory motion along a pickup section for reliable article pickup;

10 Figure 9 is a perspective view illustrating a motion converter for the pickup and grid heads which controls the motion of the heads over the pickup section whereby a straight-line motion of the heads is produced;

Figure 10 is a top plan view illustrating the motion converter in a first position at the center point of the pickup section;

15 Figures 11A and 11B illustrate the combination swivel and translatory motion of the pickup and grid heads over the pickup section to maintain a straight-line motion in the case packing embodiment of the invention;

Figure 12 is a perspective view of the pickup head actuating mechanism for controlling the gripping and releasing of articles by the pickup head according to the invention;

20 Figure 13 is a perspective view of the pickup head actuating mechanism and an overload kick out mechanism disposed at the pickup station of a case packing machine according to the invention;

Figure 14 is a perspective view of the parts of a pickup head actuating mechanism and overload kick out mechanism disposed at a release station of the case packing embodiment according to the invention;

5 Figure 15A is a top plan view with parts omitted and cut away illustrating the pickup head actuating mechanism of the present invention prior to pick up of the articles;

Figure 15B is a top plan view of the pickup head actuating mechanism at the article pick up position wherein a latching mechanism has been withdrawn to allow the gripping jaws to close on the article;

10 Figure 15C is a top plan view with parts cut away and omitted illustrating the pickup head actuating mechanism in which the mechanism has passed the pickup station and the mechanism is in a position which allows the gripping fingers to remain closed; and

15 Figure 16 is a top plan view illustrating a case depacking embodiment of the apparatus and method according to the invention.

Description of a Preferred Embodiment

Referring now to the drawings, the invention will be described in more detail. As can best be seen in Figure 1, apparatus and method for packing articles into cases, or 20 depacking articles from cases, in a simple, continuous circular motion, is illustrated generally as A. The apparatus includes a rotating turret B which rotates about a single vertical axis Y, and a stationary central column 34. A plurality of article transfer arms 20 are carried by the rotating turret, as can best be seen in Figures 2 and 3. A plurality of

reciprocating grid heads 22 and article pickup heads 24, are carried on the transfer arms. Figures 1 and 2 illustrate the embodiment of the invention in the form of a case packing apparatus and method in which articles are packed into cases. In the illustrated embodiment, the pickup and grid heads are slidably carried on the transfer arms and 5 reciprocate in a linear motion for picking up the articles at a pickup station, designated generally as 16. The invention can also be utilized in the form of a case depacking apparatus and method wherein the articles are removed from cases. Presently, and because the inventive aspects are generally the same whether the machine is used for packing or depacking, the invention will be described in relation to the case packing 10 embodiment of the apparatus and method shown in Figures 1 and 2.

An article feeder, designated generally as C, is illustrated for conveying articles 13 to pickup station 16. Article feeder C may be a slug feeder having a metering section 12, as disclosed in U.S. Patent no. 5, 797,249 ("the '249 patent"), incorporated herein by reference. Slug metering section 12 receives a continuous flow of articles 13 which are conveyed from a laner section 14. The metering section breaks the articles 15 up into a desired number of articles having a pattern which corresponds to the pattern of the case into which the articles are to be packed. The articles are picked up at pickup station 16 and deposited into empty cases 28 at a release station, designated generally as 18, which constitutes a case packing station in the embodiment of Figures 1 and 2. For this purpose, a case indexing conveyor, designated generally as D, is disposed 20 below slug feeder C to provide a continuous flow of indexed cases 28 to release station 18 where the articles are generally deposited in the case. The case conveyor includes lugs 27 for positioning and moving the indexed cases. Advantageously, conveyor D

includes an arcuate conveyor section 26 along which the release station and operation occur. The configuration of the illustrated conveyor is that of a U-shape with two parallel legs. The mechanics of a suitable case indexing conveyor arrangement is disclosed in more detail in the incorporated '249 patent. When used as a case depacker, the article feeder constitutes an indexing case conveyor which conveys 5 indexed cases of empty articles for removal.

As can best be seen in Figure 3, turret B includes a top plate 30 and bottom plate 32 between which transfer arms 20 are affixed. Transfer arms 20, in the illustrated form of steel beams, are circumferentially spaced around the plates to generally define 10 a turret cage 20b which rotates in circular path 20a (Figure 2). As illustrated, there are ten transfer arms spaced around the turret. The number of arms may vary depending on the application. A ring bearing 36 has an outside ring gear 36a affixed to bottom plate 32, and an inner bearing race 36b affixed to a frame 37 supported on the floor. A gear 36b is meshed in driving arrangement with ring gear 36a and a drive gear 36b of a gear 15 motor 36c, also mounted to frame 37. By this means, turret B is rotated clockwise as illustrated. The turret may be also be rotated counter clockwise if the apparatus is designed that way. The gear motor may be utilized to drive case conveyor D through a suitable belt drive arrangement 36d, so that the turret and transfer operation are synchronized with the conveying of indexed cases to be packed or depacked.

20 Within the interior of turret B, as defined by the turret cage of arms 20, is stationary central column or support 34 supported by frame 37. Affixed to stationary support 34 is a cam support drum 40 having a plurality of vertical braces 40a affixed to the stationary support by intermediate plates 40b. Central support 34 extends through a

clearance hole formed in top and bottom turret plates 30,32. Circular cams 42, 44 encircle and are affixed to braces 40a of drum 40. The circular cams form part of a vertical position mechanism E that controls the vertical positions of pickup and grid heads 24, 22. The drum braces, cams, intermediate plates, and central support may 5 be affixed together in any suitable manner, such as conventional bolts, to define a stationary structure about which turret B rotates. Other suitable means of reinforcing and securing the operative construction together may be utilized, such as welding and the like, as will be apparent to a mechanic of average skill in the art.

Vertical motion mechanism E preferably includes circular cams 42 and 44 carried 10 by cam mounting drum 40 to control the positions of pickup heads 24 and grid heads 22, as can best be seen in Figures 3-6. For this purpose, cam rollers 42a and 44a are carried respectively by pickup and grid heads 24, 22 which ride on cams 42 and 44, respectively. Pickup heads 24 and grid heads 22 slide on transfer arms 20 by means of guide bearings, designated generally as 48 and 50 respectively. Guide bearing 48 15 carries a support frame 52 on which pickup head 24 is slidably carried. Likewise, bearing guide 50 carries a support frame 54 which slidably carries grid head 22. Support frame 54 is attached to bearing guide 50 by means of spaced arms 56, and support from 52 may be affixed to bearing guide 48 in the same manner (not shown). Bearing guides 48 and 50 may be constructed in the same manner as bearing blocks 86 20 and 90 disclosed in the incorporated '249 patent. Cam roller 42a is secured to the guide bearing 48 and cam roller 44a is secured to guide bearing 50. In this manner, the vertical positions of the pickup head 24 and grid head 22 are controlled as the cam rollers follow circular cams 42 and 44 to provide the desired operational positioning. For

examples, Figures 4, 5, and 5A illustrate an example of a cam pattern for cams 42, 44 for use with one illustrated embodiment of the invention. In essence, the sequencing and control of the vertical positions of pickup heads 24 and grid heads 22 may be provided like that disclosed in the incorporated '249 patent in regard to the picking up and releasing steps of operation. In the example of Figure 5, 5A, the picking up (gripper closure) position, is illustrated at zero or 360 degrees, and the release position (gripper open) position is indicated at 137 degrees. After pick up, the heads raise for clearance and then descend for case packing over about 10 to 130 degrees. The heads then raise over about 140 to 230 degrees, and thereafter travel level back to the pickup station over about 230 to 340 degrees.

As can best be seen in Figure 8, pickup heads 24 and grid heads 22 move in a closed cyclic path, designated generally as 60 as they are rotated by turret B. In the case packing embodiment, closed cyclic path 60 includes a circular section 62, shown by dotted lines in Figure 8, and a linear pickup section 64 shown in a solid line. Along pickup section 64, the heads move over the articles fed in by article feeder C. For this purpose, the circular motion of the pickup and grid heads is converted to a straight-line motion over section 64 so that the pickup heads may reliably align with the articles and pick up the articles over the pickup section 64. For this purpose, a motion converter, designated generally as F, is provided for causing pickup heads 24 and grid heads 22 (or pickup heads 24 alone) to move in a straight-line motion, also indicated at 64, over the pickup section. During this time, the pickup heads descend and grip the articles for transfer to the release station. The pickup section 64 is measured over a pre-determined arc of rotation of turret B which, in the illustrated embodiment, is an arc of

about 30 degrees of turret rotation. The 30 degrees includes 15 degrees either side of a radius line 66 perpendicular to a tangent at the pickup station.

Referring now to Figures 6 and 7, pickup heads 24 and grid heads 22 will now be described in more detail. While the illustrated embodiment shows the use of the pickup heads with the grid heads, it is to be understood that in some applications only the use of the pickup heads may be needed. However, in the packing of indexed cases, it is desirable, and sometimes necessary, to use grid heads having pivotal fingers 70 to ensure the articles are released into the compartments of the case. In some applications other types of guides or corner guides may be utilized. When used in the depacking embodiment of the invention, the grid heads are not needed because the articles may be released on a bow conveyor which does not require a patterned release (Figure 16). In addition, the empty articles are already in a pattern in a case at the pickup station and hence the pickup heads do not need to maintain a straight-line motion, particularly when pick up is over an arcuate conveyor congruent with the pickup head path. Grid head 22 includes a plurality of fingers 70 carried by a frame 22a to define an array of grid chutes 72 in a pattern corresponding to the pattern of articles 13 to be picked up. The grid chutes are formed by four of the grid fingers. It is preferred that there is a corner grid finger in each corner of the chutes so that the fingers define a generally rectangular chute that corresponds to each compartment of the container.

Pickup heads 24 include a plurality of gripper elements, designated generally as 74, carried by a pickup head frame 24a. Gripper elements include gripper tubes 76 having grippers, such as pivoting gripper jaws (not shown), disposed within a profiled body 78. The gripper tubes are arranged in the same pattern as grid chutes 72 and the pattern of

articles 13 to be picked up. A pickup head actuator mechanism, designed generally as G, operates the gripper elements 74 of the pickup head to grip and release articles 13 at the pickup and release stations respectively. Grid fingers 70 are opened and closed by the profiled body 78 gripper elements 74 as the body moves through the fingers. For 5 example, as pickup head 24 descends to pick up the articles, the profile bodies spread the fingers apart to open the grid chutes so that the gripper elements may grip the necks of the articles. Afterwards, the pickup heads move vertically relative to the grid heads in such a manner that the articles are pulled through the grid chutes in an open position. The construction of the pickup heads, grid heads and gripper elements, and 10 their operation, is described in more detail in the incorporated '249 patent.

Motion converter F, as can best be seen in Figures 9 through 11, will now be described in more detail. First, it is noted that pickup head frame 24a is slidably carried in a horizontal frame on pickup head support frame 52 (Figure 7) having a swivel axis 68. Grid head frame 22a is likewise slidably supported on grid head support frame 54. 15 Each support frame 52, 54 includes a bottom ledge 80 and an upper ledge 82 between which a curved bearing member 84 of the head frame is sandwiched on both sides of the frame (Figure 10). Preferably curved bearing 84 is constructed of a suitable bearing material such as a high molecular weight plastic. By this means, the pickup and grid heads are allowed to slide in a combined swivel and translatory motion within their 20 respective support frames. Thus, in operation, the pickup heads (and grid heads) rotate about a first turret axis Y as they are carried by turret B; and about a second swivel axis 68 along straight-line pickup section 64 (Figure 8). Motion converter F further includes a plurality of connector mechanisms, designated generally as 90, connected between

the rotating turret and an associated set of pickup and grid heads to control movement of the pickup and grid heads so they move in a straight-line motion along pickup section 64. As can best be seen in Figure 9, connector mechanism 90 includes a first linkage arrangement 92 connected to one side of the pickup head and grid head; and a second linkage arrangement 94 connected to an opposing side of the pickup head and grid head. By this means, the heads are moved in unison. The linkage arrangements include rotary-motion transfer cam shafts 92a, 94a which are carried vertically between top and bottom turret plates 30 and 32. Upper arm links 92b and 94b are received about upper ends of the cam shafts and are secured thereto against rotation. In this manner, actuation of upper arm links 92b, 94b causes rotation of the cam shafts. First and second lower arm links 92c, 94c, and 92d, 94d are slidably carried on cam shaft 92 and 94, respectively. First lower arm links 92c, 94c are secured to opposing sides of pickup heads 24 and second lower arm links 92d, 94d are connected to grid heads 22. Cam followers 92e and 94e carried by the upper arm links 92b, 94b follow a cam plate 96 which is affixed to the top of stationary column 34 (Figure 10). The cam followers ride in a cam groove 98 and follow a cam plate 96 to actuate the first and second lower arm links to move the pickup heads and grid heads in a combination swivel and translatory motion to maintain the pickup and grid heads in a straight-line motion over the pickup section 64 for reliable pick up of articles 13. Cam plate 96 may be stationarily mounted on central support 34. This range of motion of the pickup and grid heads can best be seen in Figures 8, 10, and 11. Basically, the heads are maintained in a straight-line motion over a linear distance that corresponds to a predetermined arc of about 30 degrees of turret rotation. Other means of converting circular motion of the

pickup and/or grid heads may also be used other than illustrated mechanism F. For example, use of position sensors and control through an electronic gear motor may be had, or hydraulic control systems, as well as other mechanical arrangements.

Referring now to Figures 12 through 15, pickup head actuator mechanism G will now be described in more detail. First, it is noted, by referring to Figure 2, that the actuator mechanism includes a first engagement member 100 disposed at release station 18 where it is desired to release the articles, for example into empty cases 28. A second engagement member 102 may be disposed at pickup station 16 where it is desired to pick up the articles. The engagement members are fixed in their relationship by means of support bars 102a and 100a affixed to a center hub 104 atop column 34. Hub 104 and engagement members 100, 102 are stationary but may be adjusted to desired relative positions before being fixed. In addition, the engagement members may be rotated depending on whether the invention is being used in the case packing or depacking mode (Figure 16). In the illustrated case packing embodiment, the bars are angularly disposed about 135 degrees, which is about the minimum arc needed to pick up articles and then descend to release them into a case 28. However, it is contemplated that angles in a range of 135 to 180 may be utilized. If need be, the outfeed conveyor leg may be made to wrap more around the turret, if larger angles are needed to provide for a larger arcuate conveyor section, or to save more floor space.

Referring now to Figures 12 through 15, it can be seen that engagement member 102 is suspended by means of bracket 102b to support arm 102a. An unlatching device 106 is likewise carried by bracket 102b, whose operation will be described hereinafter. An actuator operator 108 for operating gripper elements 74 is slidably carried in a block

110. Operator 108 bears against an actuator plate 108a by means of a hub 108b. Hub 108b and plate 108a slide relative to each other during articulation of the pickup heads to maintain a straight-line motion, as will be explained later. Actuator plate 108a bears against reciprocating gripper actuators 76a within gripper tubes 76. In addition, actuator plate 108a is affixed to the four corner gripper tube actuators by means of bolts (Figure 5 12). Gripper actuators 76a are normally biased upwards wherein the gripper elements are closed to grip the articles. When biased upwards, gripper actuators 76a also bias actuator plate 108a and actuator operator 108 upwards. However, when struck by engagement member 100, actuator operator 108 is moved downward causing actuator 10 plate 108a to move downward which moves gripper actuators 76a downward to release the gripper jaws and articles. There is an optional latching assembly, designated 10 generally as 112, for latching the gripper jaws in their open position to ensure reliability. The latching assembly includes a spring loaded plunger 112a also slidably carried in block 110 which is biased toward operator 108. There is a circumferential groove 114 15 formed in operator 108a in which latching plunger 112a is received when operator 108 is moved down by engagement member 100 at release station 18 to latch gripper elements 74 in an open position wherein the grippers are maintained spread apart after article release. In the illustrated embodiment, engagement members 100, 102 are in the form of a rubber tire so that the striking of operator 108 is cushioned.

20 In operation, at release station 18 when operator 108 is struck by engagement member 100, the articles are released from gripper elements 74 into cases 28. At that time, plunger 112a latches the fingers open since its insertion in groove 114 prevents upward movement of operator 108 and hence gripper actuators 76a. The gripper

elements or jaws are not allowed to close. This is an advantage because the article grippers will now be spread apart and open at the pickup station for being received over the articles. However, in order for the gripper elements to close upon the articles at the pickup station, it is necessary that the latch 112a be retracted from gripper 114 so that 5 operator 108 may move upwards under the spring force of gripper actuator 76a at the pickup station. For this purpose, unlatching device 106 includes a cam block 116 carried at the pickup station, as can best be seen in Figures 15a through 15c. Cam block 116 has an apex 116a.

The sequencing of operation at the pickup station will now be described. In 10 Figure 15a, the article grippers are latched open and the pickup head is approaching cam block 116. At the time the apex 116a of the cam block engages unlatching plate 112d, second actuator element 102 engages actuator operator 108, pushing it down (Figure 15B). This relieves the pressure on latch plunger 112a so that it is reliably disengaged from groove 114 by the riding up of unlatching plate 112d onto apex 116a. 15 In Figure 15C, it can be seen that plunger 112a bears against operator 108 below groove 114 because operator 108 has been raised by the upward, spring biased movement of gripper actuators 76a which has closed the gripper elements around the articles.

As can best be seen in Figure 13, there is also a overload kick out mechanism 20 118 illustrated which automatically kicks up out of the way if wheel 100 or 102 is accidentally struck sideways by an operator 108. To prevent a malfunction at the pickup station, the wheel is allowed to kick up to prevent damage in a jam or overload. If struck sideways by an out of position operator, the overload kick out mechanism

allows a wheel to pivot to dotted line position 118d. For this purpose, there is a support 118a affixed to bracket 102b which carries engagement member 102. A plate 122 is affixed to support 118a. A spring and shaft assembly 122b passes through the plate 122 and is secured to a plate 124 to urge plate 124 against plate 122. A ball/detent 5 assembly 122a, 124a locks plate 122 and 124 together in the position shown. However, should engagement member 102 be struck sufficiently from the side by operator 108 or other structure, plate 122 and support 118a are released to pivot wheel 102 out of the way.

Referring now to Figure 16, the operation of the apparatus and method in the 10 embodiment of a case depacking machine will now be described. In this case it can be seen that first and second engagement members 100 and 102 are rotated approximately 25 to 35 degrees from their positions when used in the case packing embodiment. Empty articles 13 are picked up from empty cases 28' at a pickup station designated generally as 16' and released over a bow conveyor 120 at a release station 15 generally indicated at 18'. For this purpose arms 100a and 102a are rotated slightly from the case packing embodiment. The arms are approximately 135 degrees apart, although they may range anywhere from 130 to 180 degrees apart. It is noted that both stations occur over the arcuate conveyor sections at 26 and 120a. The cases containing the empty articles are conveyed on case indexing conveyor D essentially as 20 shown in the case packing embodiment. It is also possible to wrap bow conveyor 20 around turret B, for example even 180 degrees, and then turn parallel to case conveyor D and the incoming cases 28', as illustrated at 120b, so that floor space is further conserved.

As noted previously, there may not be a no need to use grid heads 22 when depacking. Pickup heads 24 are carried in the same manner as described previously in the case packing embodiment, and descend into the cases to pick up the articles 13. Since the articles are already arranged in a pattern and aligned with the pickup heads 5 over their congruent arcuate paths, there is no need to move the pickup heads in a straight line. By conveying the cases on an indexing conveyor having an arcuate section 26, it is possible to follow the cases by moving the pickup heads in a congruent path with the cases while the pickup heads descend to grip the articles. At release station 18', it is also not necessary that the articles be in an exact pattern when 10 released over an arcuate section of bow conveyor 120. Thus, engagement members 100, 102 act in the same manner as described previously. For example, engagement member 100 strikes operator 108 to release the gripper elements 74 and the articles 13 therefrom. Upon the opening of the gripper jaws of the gripper element 74, the gripper jaws are latched in their open position as described previously. As the pickup head 15 travels back around to pick up station 16', the unlatching device and second engagement member 102 work in combination to depress operator 108, relieving pressure on plunger 112a, so that the fingers are unlatched and allowed to close to pick up the articles in the empty cases. It can be seen that a continuous circular motion case depacking machine can be provided according to the present invention wherein at 20 least one of the pickup and release stations occurs over an arcuate conveyor section. While it is possible to use a circular to straight-line motion conversion to pick the articles up along a straight run, it is not necessary, and the arcuate conveyor and rotating turret allow for a more compact arrangement.

While a conventional type conveyor is disclosed for conveying the indexed cases, it is also contemplated that a rotating case plate can be utilized for circulating the cases in synchronization with the turret. The plate may be circular and affixed directly to a lower portion of the turret to provide the arcuate conveyor section defined herein. The 5 plate may include circumferentially spaced positioning lugs 27 corresponding to a desired placement of the cases in alignment with a corresponding pickup head. The cases can be wiped on the circular plate from an infeed conveyor and wiped off the circular plated onto a conventional outfeed conveyor, thus eliminating the need for an expensive, flexible, or table top conveyor around the rotating turret.

10 Thus, it can be seen that a highly advantageous apparatus and method for a continuous case packing and depacking machine can be had according to the present invention wherein a small foot print, turret may be rotated continuously to pick up and release articles at a high speed while requiring only a small floor area. The transfer of articles occurs at high speeds yet the motion is balanced and smooth since it is 15 basically circular. The dynamic forces produced by orbital machines having straight runs and radial ends is avoided. By converting the motion of the pickup heads from circular to translational when the articles are picked up, reliable pick up of the scrambled articles is provided for reliable insertion into a partitioned case. The case packing may occur over an arcuate section of the conveyor immediately after pick up by using 20 congruent case and pickup head paths at increased speeds.

While a preferred embodiment of the invention has been described using specific terms, such description is for illustrative purposes only, and it is to be understood that

changes and variations may be made without departing from the spirit or scope of the following claims.

What is claimed is:

1. Apparatus for transferring articles from a pickup station to a release station in a continuous motion, said apparatus being of the type which includes a plurality of pickup heads for picking up the articles at said pickup station and releasing the articles at said release station, and a vertical motion mechanism for moving said pickup heads to operative positions relative to the articles at said pickup and release stations, wherein said apparatus comprises:

5 a rotating turret which continuously rotates about a substantially vertical turret axis for continuously transferring the articles;

10 a plurality of reciprocating pickup heads carried by said turret for continuously and successively picking up groups of the articles at said pickup station and releasing the articles at said release station;

15 a conveyor having an arcuate conveyor section disposed generally below said pickup heads over which the heads are continuously rotated; and

one of said pickup and release stations being located along said arcuate section of said conveyor.

20 2. The apparatus of claim 1 wherein said turret moves said pickup heads in a closed curvilinear path around said vertical axis which includes a circular section and a linear pickup section along which said pickup heads move substantially in a linear motion to pickup the articles while said turret rotates.

25 3. The apparatus of claim 1 wherein said turret rotates said pickup heads in a circular path section, and said arcuate conveyor section has a curvature generally corresponding to said circular path section of said pickup heads.

4. The apparatus of claim 1 including a motion converter operatively associated with said pickup heads for causing said pickup heads to move generally in a straight-line motion along a pickup section to pick up the articles for transfer from said pickup station as said turret rotates.

5 5. The apparatus of claim 4 wherein said motion converter moves said pickup heads a linear distance which corresponds generally to a predetermined arc of rotation of said turret.

10 6. The apparatus of claim 5 wherein said motion converter moves said pickup heads along said linear pickup section a distance which corresponds generally to about 30 degrees of turret rotation.

7. The apparatus of claim 4 wherein said motion converter includes support frames carried by said turret, said pickup heads being slidably carried by said support frames to rotate about a swivel axis whereby said pickup heads swivel to maintain said straight-line motion along said pickup section.

15 8. The apparatus of claim 7 wherein said motion converter includes connector mechanisms operatively associated with said rotating turret and connected to said pickup heads for imparting a swivel and translatory motion to said pickup heads as said turret rotates whereby said straight-line motion is maintained.

20 9. The apparatus of claim 8 wherein said connector mechanisms include vertical cam shafts carried by said turret, linkage arrangements connected between said cam shafts and said pickup heads for imparting said motion to said pickup heads; and said linkage arrangements being slidably carried by said cam shafts to slide up and

down as said pickup heads reciprocate vertically during pick up and release of the articles.

10. The apparatus of claim 9 including a stationary support about which said turret rotates; cam followers connected to said linkage arrangements, and at least one cam carried by said stationary support which said cam followers follow to impart said straight-line motion to said pickup heads.

11. The apparatus of claim 1 wherein said release station is a case packing station located along said arcuate conveyor section; and said conveyor includes a case indexing conveyor for conveying indexed cases to said arcuate conveyor section and 10 case packing station for receiving said released articles in synchronization with said rotating turret.

12. The apparatus of claim 11 including a plurality of transfer arms carried by said turret; said pickup heads being carried by said transfer arms; a plurality of grid heads having pivoting grid fingers arranged in a grid array corresponding to an array of the articles to be picked up, said grid fingers defining grid chutes having upper ends and 15 lower ends for receiving the articles; said grid heads being carried by said transfer arms below said pickup heads; and said pickup heads having an array of article gripper elements arranged in a matrix corresponding to the array of grid chutes for gripping the articles.

20 13. The apparatus of claim 12 wherein said grid chutes have an open chute position wherein said lower chute ends are open for receiving the articles, said vertical motion mechanism is operatively connected to said grid heads for lowering said grid heads relative to said transfer arms over the articles in said open chute position; said

grid fingers having a closed position with the articles being held generally in said chutes, and including a grid actuator operatively associated with said grid fingers to cause said grid fingers to move between said open and said closed positions.

14. The apparatus of claim 12 including a motion converter operatively associated with said pickup heads and grid heads for causing said pickup and grid heads to move generally in a straight-line motion along a pickup section as the articles are picked up for transfer from said pickup station while said turret rotates.

15. The apparatus of claim 12 including a pickup head actuator mechanism for actuating said gripper elements to selectively grip and release the articles; wherein said pickup head actuator mechanism includes;

gripper actuators having movement between a closed position wherein the articles are gripped by said gripper elements and an open position wherein the articles are released by said gripper elements;

an actuator operator which controls said movement of said gripper actuators; and

an engagement member carried at said release station, and said actuator operator being arranged to strike said engagement member at said release station whereby said gripper actuators are moved to said open position for releasing the articles.

16. The apparatus of claim 15 including a latch operatively associated with said pickup heads for latching said actuator operator in said open position, and an unlatching device carried at said pickup station for unlatching said latch so that said gripper actuator moves to said closed position.

5

17. The apparatus of claim 1 wherein said pickup station comprises a case depacking station located along said arcuate conveyor section at which the articles are gripped by said pickup heads and removed from the cases, and said conveyor includes a case indexing conveyor for conveying cases containing the articles to said pickup station at prescribed intervals in synchronization with said rotating turret.

10

18. The apparatus of claim 1 wherein said vertical motion mechanism includes at least one circular cam carried around a stationary support disposed centrally of said turret; and a cam roller associated with each said pickup head which rides on said cam, said cam roller being interconnected to control the vertical position of said pickup head.

15

19. The apparatus of claim 18 including transfer arms circumferentially spaced around said turret; and wherein said vertical motion mechanism includes guide bearings slidably supporting said pickup heads on said transfer arms, and said cam roller being carried by one of said guide bearings and pickup heads.

20

20. The apparatus of claim 1 wherein said pickup heads include a plurality of gripper elements arranged in a matrix corresponding to an array of the articles to be picked up; said gripper elements being constructed and arranged to grip an upper portion of the articles; and including a pickup head actuator mechanism for actuating said gripper elements to selectively grip and release the articles; wherein said pickup head actuator mechanism includes;

20

gripper actuators having movement between a closed position wherein the articles are gripped by said gripper elements and an open position wherein the articles are released by said gripper elements;

an operator which controls said movement of said gripper actuators;

an engagement member carried at said release station, and said operator being arranged to strike said engagement member at said release station whereby said gripper actuators move to said open position for releasing the articles,

5 a latch operatively associated with said pickup heads for latching said gripper actuators in said open position,

and an unlatching device carried at said pickup station for unlatching said latch so that said gripper actuators move to said closed position.

21. The apparatus of claim 20 including a second engagement member carried at said pickup station for urging said actuator operator downward to remove 10 pressure from said latch to aid said unlatching device in releasing said latch whereby said gripper elements grip the articles for pick up.

22. Apparatus for continuously transferring articles from a pickup station to a release station, said apparatus being of the type which includes a plurality of pickup heads for picking up the articles at said pickup station and releasing the articles at said 15 release station, a vertical motion mechanism for moving said pickup heads to operative positions relative to the articles at said pickup and release stations, and an infeed conveyor for continuously conveying articles to the pickup station, said apparatus comprising:

20 a rotating turret which continuously rotates about a vertical turret axis and carries a plurality of article transfer arms in a circular path;

a plurality of reciprocating pickup heads carried by said transfer arms for picking up the articles at said pickup station and releasing the articles at said release station;

said turret continuously rotating said transfer arms in a circular path to continuously move said pickup heads and articles from said pickup station to said release station; and

5 a motion converter associated with said turret and operatively connected to said pickup heads for causing said pickup heads to move generally in a straight-line motion while said pickup heads grip the articles at the pickup station.

23. The apparatus of claim 22 wherein said motion converter moves said pickup heads a distance which corresponds to a predetermined arc of said turret rotation.

10 24. The apparatus of claim 23 wherein said predetermined arc is generally about 30 degrees of turret rotation.

25. The apparatus of claim 24 wherein said 30 degrees of rotation corresponds generally to 15 degrees about either side of a line perpendicular to a tangent to the circular path of said pickup heads.

15 26. The apparatus of claim 22 wherein said motion converter includes: support frames carried by said transfer arms for slidably carrying said pickup heads so that said pickup heads may swivel about a swivel axis relative to said support frames as said frames and pickup heads rotate about said turret axis; and connector mechanisms interconnected between said rotating turret and said pickup heads for imparting swivel and translatory motion to said pickup heads on said frames.

20 27. The apparatus of claim 26 wherein said connector mechanisms include vertical cam shafts, linkage arrangements connected between said transfer shafts and

said pickup heads for imparting said motion to said pickup heads; and said linkage arrangements being slidably carried by said cam shafts to slide up and down as said pickup heads reciprocate vertically during pick up and release of the articles while carried by said turret.

5 28. The apparatus of claim 27 including cam followers connected to said linkage arrangements, and at least one cam mounted to a stationary support disposed inwardly of said turret, and said cam followers engage said cam to impart said motion to said pickup heads.

10 29. The apparatus of claim 28 wherein said release station is a case packing station where articles are deposited into cases, and including a case conveyor for conveying cases to said release station for receiving the released articles in synchronization with said rotating turret; wherein said pickup heads and case conveyor have a generally congruent arcuate path along which said pickup heads and cases move at said release station.

15 30. The apparatus of claim 29 wherein said pickup heads include a plurality of article gripper elements for gripping the articles arranged in a matrix corresponding to an array of the articles to be picked up, and including;

 a pickup head actuator mechanism for actuating said gripper elements to grip and release the articles;

20 a plurality of grid heads having pivoting grid fingers arranged in a grid array corresponding to an array of the articles to be picked up, said grid fingers defining grid chutes having upper ends and lower ends for receiving the articles; said grid heads being carried by said transfer arms in alignment with said pickup heads; and said pickup

heads having an array of article gripper elements arranged in a matrix corresponding to the array of grid chutes for gripping the articles.

31. The apparatus of claim 30 wherein said grid chutes have an open chute position wherein said lower chute ends are open for receiving the articles, said vertical motion mechanism is operatively connected to said grid heads for lowering said grid heads over the articles in said open chute position; said grid fingers having a closed position with the articles being held generally in said chutes, and including a grid actuator operatively associated with said grid fingers to cause said grid fingers to move between said open and said closed positions.

10 32. The apparatus of claim 31 wherein said grid finger actuator includes a profiled body carried with said gripper elements which engages said grid fingers during relative movements between said grid heads and pickup heads to move said grid fingers to said open position and provide said open chutes for receiving the articles.

15 33. The apparatus of claim 32 wherein said pickup head actuator mechanism includes a fixed engagement member carried by said stationary support at least at said release station, and operators carried by said pickup heads which strike said engagement member at said release station whereby said operators actuate said gripper elements to release the articles.

20 34. The apparatus of claim 33 including a latch operatively associated with said pickup heads for latching said operators in said release position; and an unlatching device carried at said pickup station for releasing said latch so that said pickup heads grip the articles.

35. The apparatus of claim 34 including a second engagement member carried at said pickup station for urging said operators downward to remove pressure from said latch to aid said unlatching device in releasing said latch.

36. The apparatus of claim 35 wherein said gripper elements include gripper actuators acted upon by said operator, wherein said gripper actuators are normally biased in a gripper closing position unless acted upon by said operator whereupon said gripper actuators are moved to an open, release position.

37. The apparatus of claim 22 wherein said turret moves said transfer arms in a closed circular path, and carries said pickup heads along a linear pickup path at said pickup station, and a circular return path from said release station to said pickup station.

38. A continuous motion apparatus for packing articles into cases, said apparatus having an article feeder which continuously supplies articles to be picked up and packed into the cases, said apparatus comprising:

a pickup station where the articles are picked up and a release station where the articles are released for packing into the cases;

a turret which rotates continuously about a single vertical axis;

a plurality of transfer arms carried by said rotating turret for movement along a circular path;

a plurality of pickup heads carried by said transfer arms for picking up the articles at said pickup station;

a plurality of grid heads having pivoting grid fingers arranged in a grid array corresponding to an array of the articles to be picked up, said grid fingers defining grid

chutes having upper ends and lower ends for receiving the articles; said grid heads being carried by said transfer arms in alignment with said pickup heads; said pickup heads having an array of article gripper elements corresponding to the array of grid chutes and the articles for gripping the articles;

5 a pickup head actuator mechanism for actuating said gripper elements to selectively grip and release the articles; and

a vertical motion mechanism for controlling relative positions of said pickup heads during transfer of the articles between said pickup and release stations as said turret rotates continuously about its vertical axis.

10 39. The apparatus of claim 38 including a motion converter operatively associated with said pickup heads and said grid heads for causing said pickup and grid heads to move generally in a straight-line motion along a pickup section to pick up the articles for transfer as said turret rotates.

15 40. The apparatus of claim 39 including a case conveyor for conveying empty cases to said release station, said case conveyor having an arcuate conveyor section disposed generally below a circular path over which said pickup heads are rotated at said release station; and wherein said circular path of said pickup heads is generally congruent with said arcuate conveyor section at said release station.

20 41. The apparatus of claim 39 wherein said motion converter moves said pickup heads a distance which corresponds generally to a predetermined arc of the turret rotation.

42. The apparatus of claim 39 wherein said motion converter moves said pickup heads along said linear pickup section a distance which corresponds generally to about 30 degrees of rotation of said turret.

5 43. The apparatus of claim 41 wherein said motion converter includes support frames carried by said transfer arms, said pickup heads and grid heads being carried by said support frames so that said pickup and grid heads swivel to maintain said straight-line motion along said pickup section.

10 44. The apparatus of claim 43 wherein said motion converter includes connector mechanisms associated with said rotating turret and said pickup and grid heads for swiveling said pickup and grid heads.

45. The apparatus of claim 44 wherein said connector mechanisms include a first linkage arrangement connected near one side of said pickup and grid heads and a second linkage arrangement connected near a second side of said pickup and grid heads for moving said pickup and grid heads to maintain said straight-line motion.

15 46. The apparatus of claim 45 including at least one fixed cam carried by a stationary support, and cam followers carried by said first and second linkage arrangements engaged with said cam for imparting said motion to said pickup and grid heads.

20 47. The apparatus of claim 46 wherein said first and second linkage arrangements include respective first and second vertical cam shafts connected to said cam followers, and lower arm links slidably carried by said first and second rotary motion transfer shafts connected to said pickup and grid heads.

48. The apparatus of claim 47 wherein said first and second linkage arrangements include upper arm links connected to said cam follower and to said first and second cam shafts.

49. The apparatus of claim 38 wherein said pickup head actuator mechanism includes an engagement member carried at said release station, and operators carried by said pickup heads which strike said engagement member at said release station whereby said operators are moved to a release position for releasing the articles.

50. The apparatus of claim 49 including a latch operatively associated with said pickup heads for latching said operators in said release position, and an unlatching device carried at said pickup station for releasing said latch so that said pickup heads 10 grip the articles.

51. The apparatus of claim 50 including a second engagement member carried at said pickup station for urging said operator downward to remove pressure from said latch to aid said unlatching device in releasing said latch whereby said gripper 15 elements grip the articles for pick up.

52. The apparatus of claim 51 wherein said first and second engagement members are carried in a fixed relationship by said turret wherein said engagement members are separated by an angle in a range of 100 to 180 degrees.

53. The apparatus of claim 38 including a stationary support about which said 20 turret rotates; and wherein said vertical motion mechanism includes first and second cams generally encircling said stationary support, a first cam roller associated with each said pickup head which rides on said first cam and a second cam roller associated with

each said grid head which rides on said second cam whereby the vertical positions of said pickup and grid heads are controlled.

5 54. The apparatus of claim 53 wherein said vertical motion mechanism includes guide bearings slidably supporting said pickup and grid heads on said transfer arms, and said first and second cam rollers being carried by said guide bearings. 55.

Apparatus for continuously transferring articles from a pickup station to a release station comprising:

a rotating turret which continuously rotates during said transfers;

a plurality of reciprocating pickup heads carried by said rotating turret for picking

10 up the articles at the pickup station and releasing the articles at the release station;

a first conveyor for delivering the articles to said pickup station;

a second conveyor for delivering the articles away from said release station;

one of said first and second conveyors including an arcuate conveyor section disposed below a path of said pickup heads; and

15 one of the pickup and release stations being located at said arcuate conveyor section.

56. The apparatus of claim 55 wherein said second conveyor includes a case conveyor for conveying empty cases in which the articles are released and deposited, and said release station is disposed over said arcuate section of said second conveyor.

20 57. The apparatus of claim 56 including a motion converter operatively connected to said pickup heads to control movement of said pickup heads generally in a straight-line over a linear pickup section at which the articles are to be picked up.

58. The apparatus of claim 55 wherein said first conveyor includes a case conveyor for delivering cases containing the articles to said pickup station, and said pickup station is disposed over said arcuate conveyor section.

5 59. The apparatus of claim 55 including a vertical motion mechanism for controlling the vertical position of the pickup heads as they rotate with said turret, said motion mechanism including at least one circular cam attached to a stationary support; a cam roller associated with each said pickup head which rides on said cam as said turret rotates, and said cam roller being interconnected to control the vertical position of said pickup head.

10 60. The apparatus of claim 59 including grid heads disposed below said pickup heads having a plurality of guides arranged in a pattern for guiding the articles into the cases.

15 61. The apparatus of claim 60 wherein said vertical motion mechanism includes a second circular cam attached to said stationary support, and a cam roller associated with each grid head which follows said second cam second as said turret rotates.

62. Apparatus for continuously transferring articles from a pickup station to a release station comprising:

20 a rotating turret which continuously rotates about a single vertical axis; a plurality of reciprocating pickup heads carried outwardly by said turret for continuously and successively picking up groups of the articles at said pickup station and releasing the articles at said release station;

an upstanding stationary support disposed inwardly of said rotating turret about which said turret rotates; and

5 a vertical motion mechanism operatively connected to said pickup heads and associated with said upstanding stationary support for controlling operative positions of said pickup heads during transfer of the articles as said turret and pickup heads continuously rotate.

63. The apparatus of claim 62 including a plurality of vertical transfer arms spaced circumferentially around said turret generally defining a turret cage surrounding said upstanding support; and said pickup heads being carried by said transfer arms.

10 64. The apparatus of claim 63 wherein said vertical motion mechanism includes a cam carried by and generally encircling said stationary support; and a cam roller associated with each said pickup head which rides on said cam, said cam roller being interconnected to control the vertical position of said pickup head.

15 65. The apparatus of claim 64 wherein said vertical motion mechanism includes guide bearings slidably supporting said pickup heads on said transfer arms, and said cam roller being carried by one of said guide bearings and pickup heads.

20 66. The apparatus of claim 65 wherein said pickup heads include a plurality of gripper elements arranged in pattern to pickup a group of the articles; and including a pickup head actuator mechanism having an operator for actuating said gripper elements to selectively grip and release the articles; and an engagement member carried by said stationary support at said release station arranged to strike said operator at said release station whereby said gripper elements release the articles.

67. A method of continuously transferring articles between a pickup station and a release station comprising:

continuously conveying the articles to a pickup station;

continuously picking the articles up at said pickup station using continuously

5 moving pickup heads;

continuously rotating said pickup heads about a single vertical axis in a closed cyclic path which includes a circular section;

releasing the articles at said release station; and

providing an arcuate conveyor section, and carrying out one of said article pick

10 up and release steps while the pickup heads are moving over said arcuate conveyor section.

68. The method of claim 67 including conveying cases containing articles to said arcuate conveyor section at prescribed intervals, and picking up the articles along said arcuate conveyor section from the cases for depacking the cases.

15 69. The method of claim 67 including releasing the articles over said arcuator conveyor section into cases conveyed along said arcuate conveyor section.

70. The method of claim 69 wherein said closed cyclic path of said pickup heads includes a linear pickup section along which said pickup heads move in a substantially straight-line motion to pick up the articles.

20 71. A method of continuously packing articles into a case comprising:

continuously feeding the articles to a pickup station;

providing a plurality of article pickup heads for picking up the articles at the pickup station;

continuously rotating said pickup heads about a vertical axis in a closed cyclic path which includes a circular path section and a linear pickup section; causing said pickup heads to depart from a circular motion and move in a substantially straight-line motion at said pickup section to pick up the articles; and

5 releasing the articles from said pickup heads at said release station.

72. The method of claim 71 including releasing the articles at said release station which is disposed at an arcuate conveyor section below the circular path section of said pickup heads.

73. The method of claim 72 comprising conveying the cases to said release station on a case conveyor which includes said arcuate conveyor section.


10 74. The method of claim 73 including depositing the articles into the cases after pick up along an arc that ranges from 90 to 180 degrees.


15 75. The method of claim 72 comprising;
providing pickup heads having a plurality of gripper elements arranged in an array corresponding to an array of the articles to be picked up;
providing a plurality of reciprocating grid heads carried in alignment with said gripper heads wherein said grid heads include a plurality of guides arranged to guide the articles into partitioned cases;


20 moving said gripper and grid heads downward over the articles at said pickup station;

moving said grid heads in a motion relative to said gripper heads to pick up the articles;

moving said grid heads and pickup heads in a relative motion at said release station to guide the articles into said partitioned cases; and releasing the articles from said pickup heads for passage through said grid heads into said partitioned case.

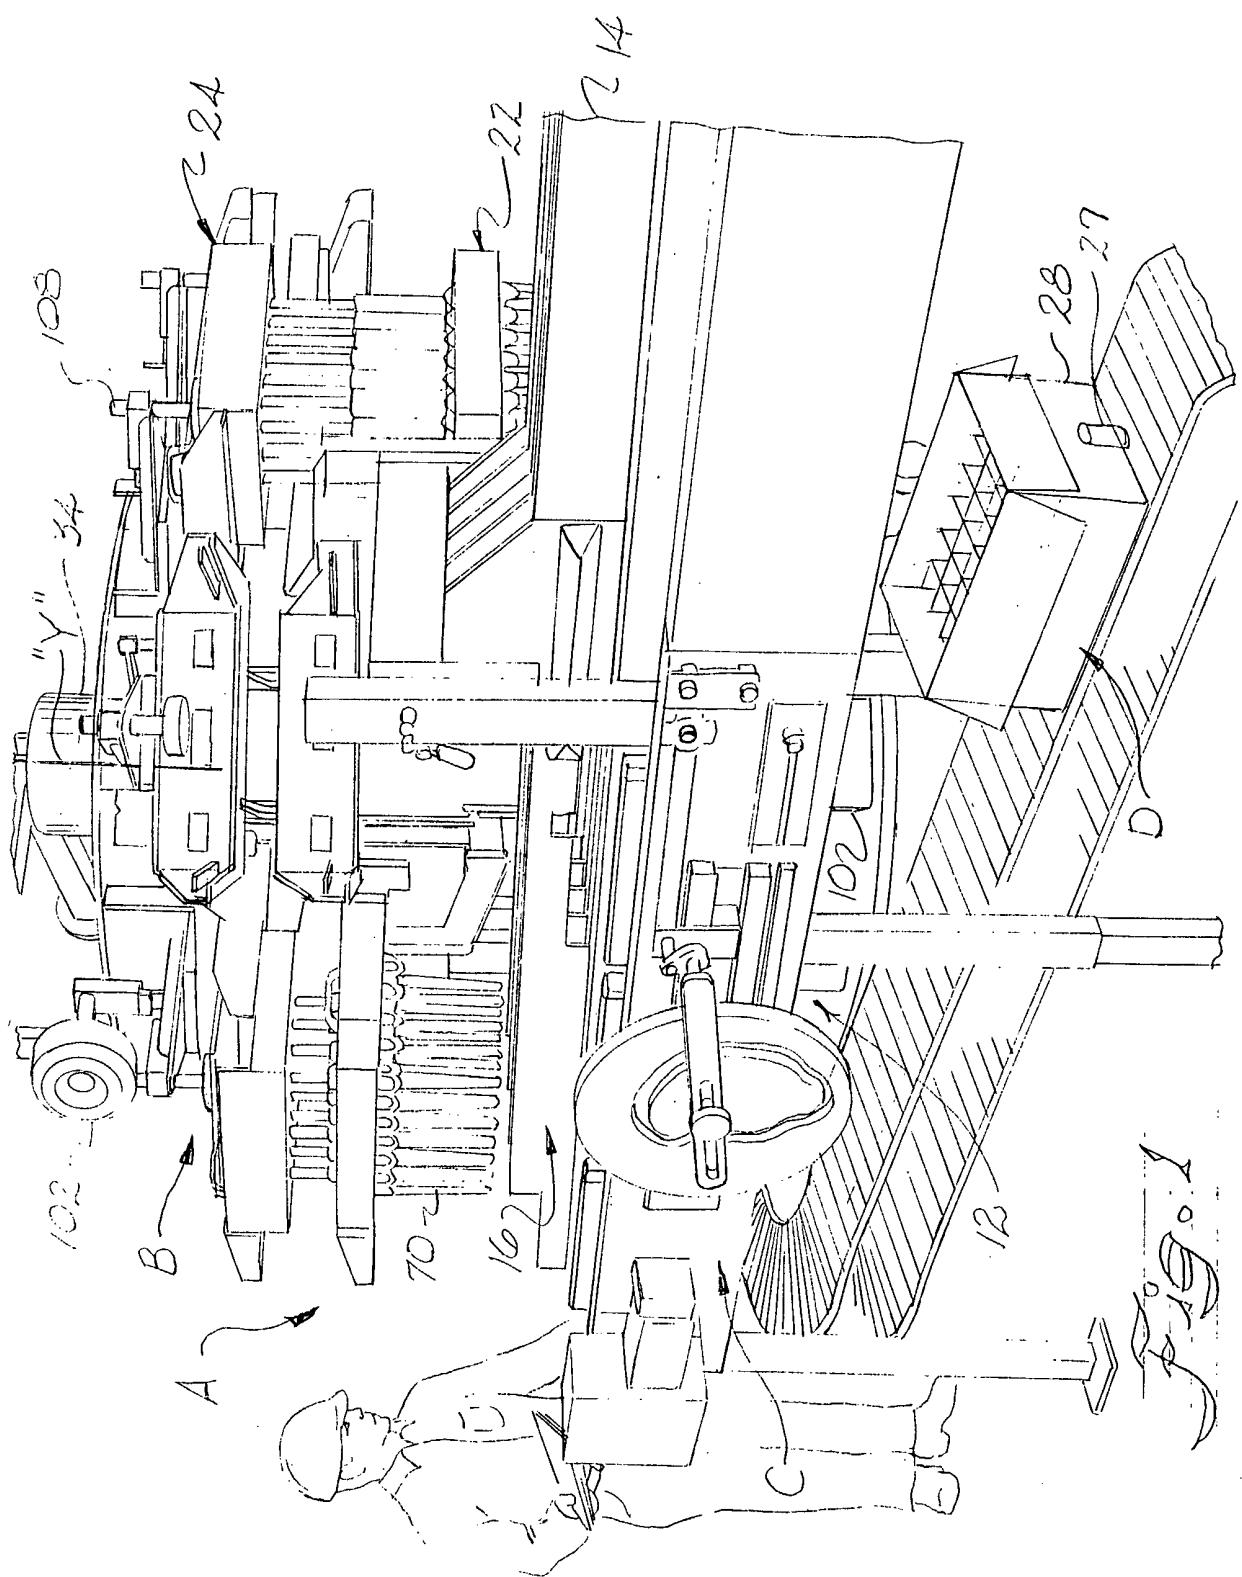

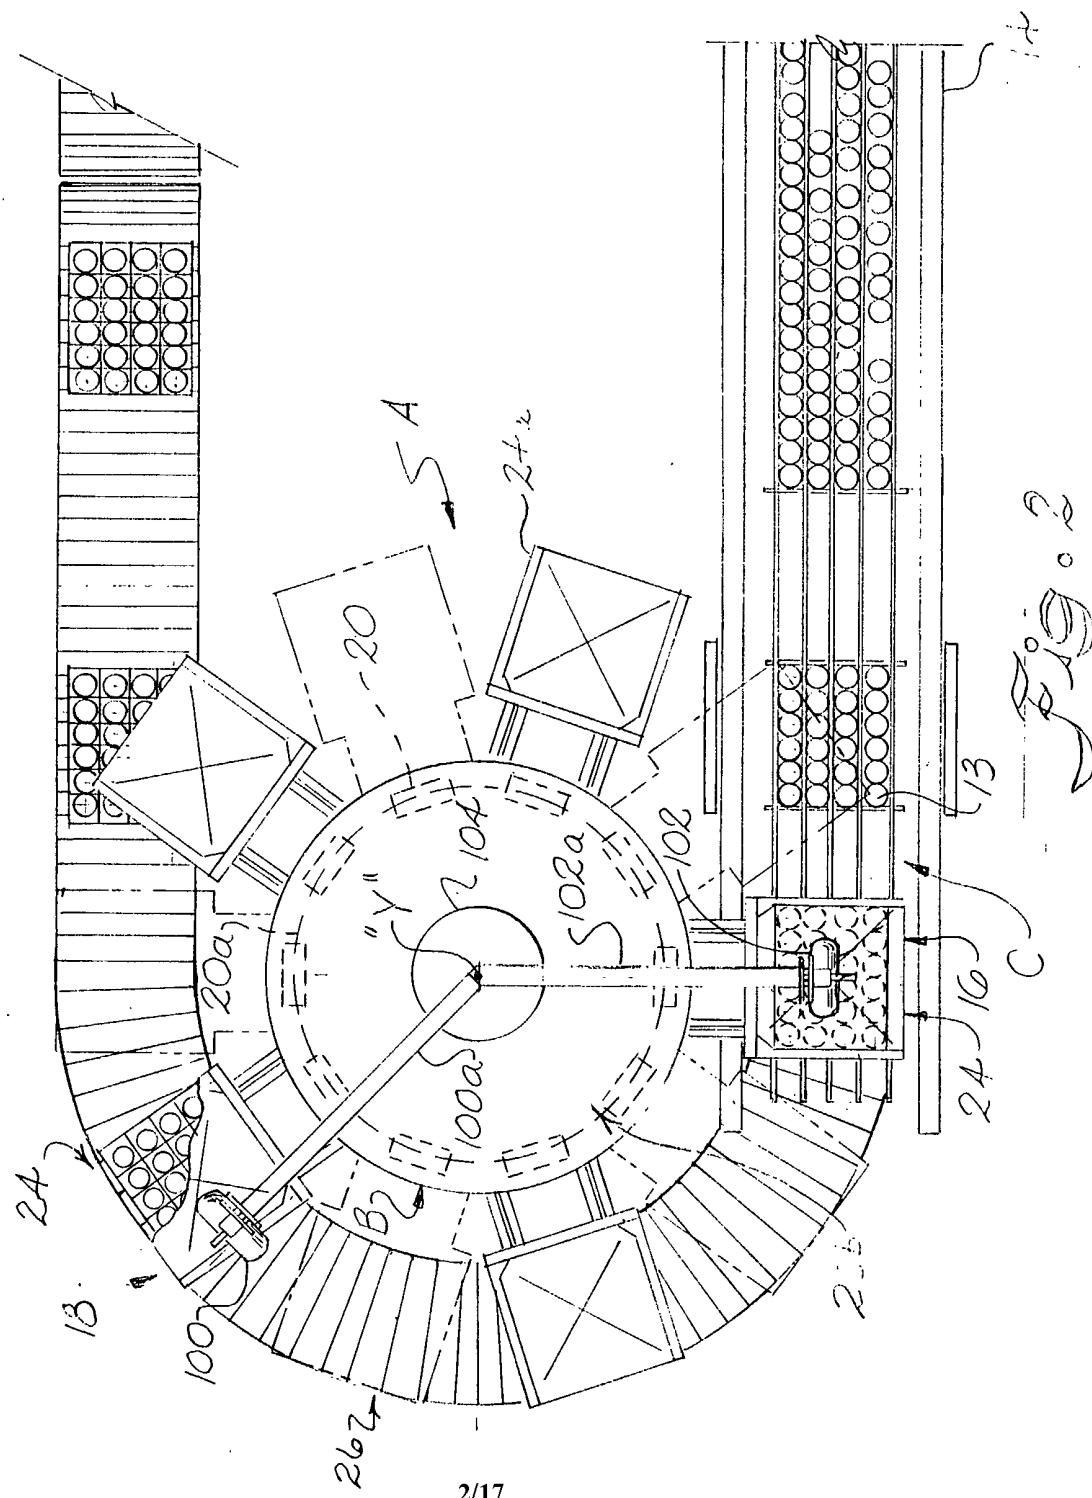

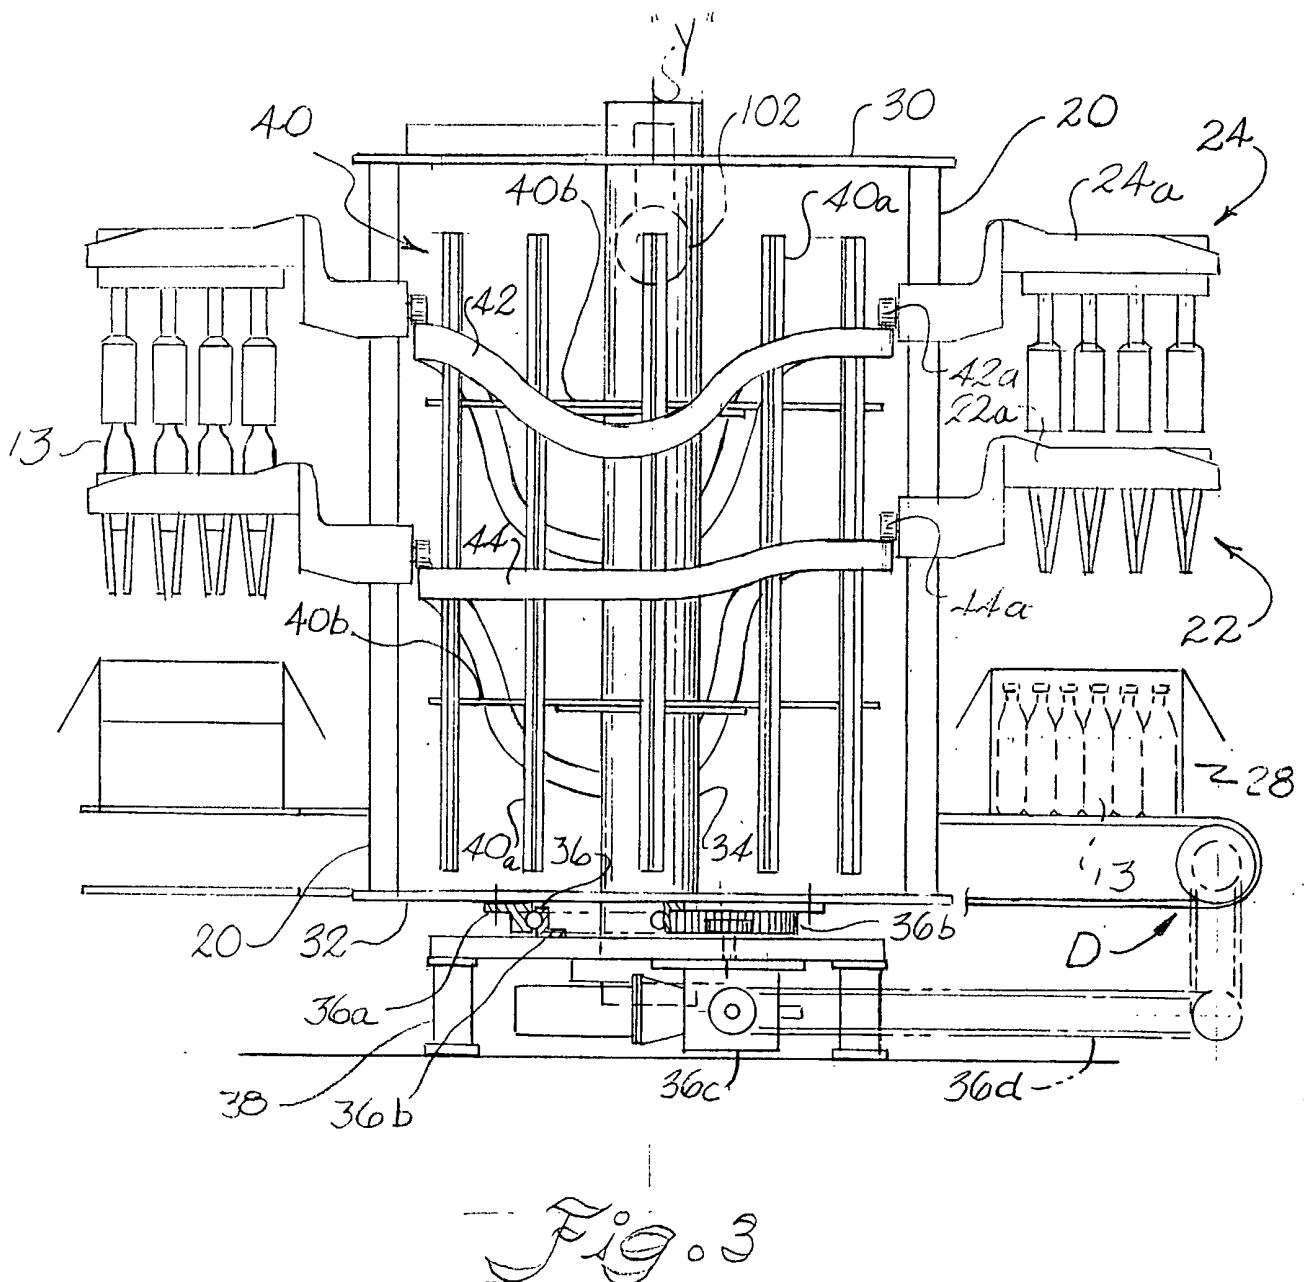

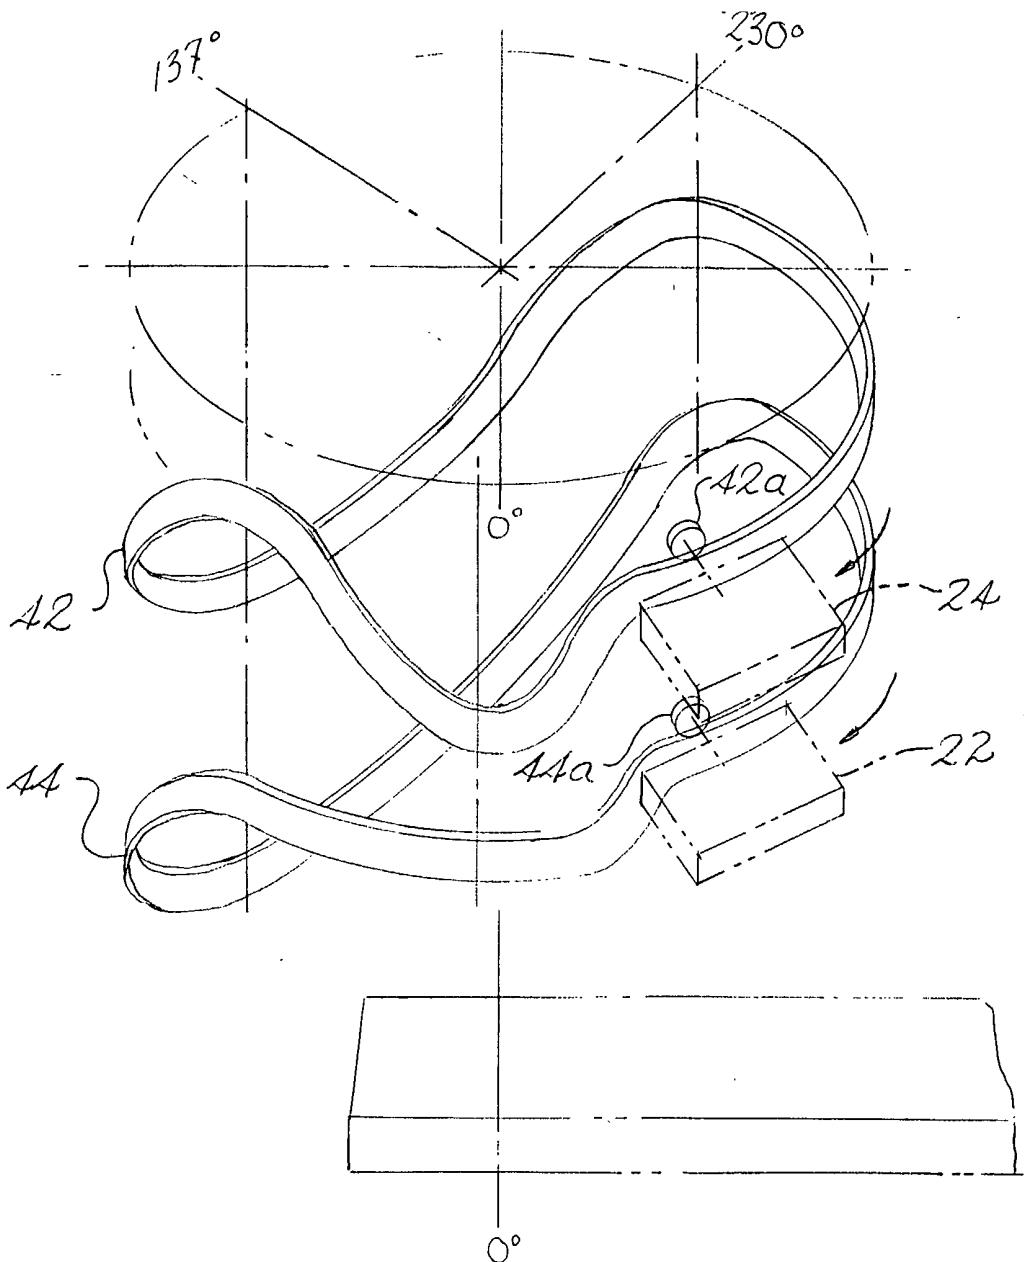
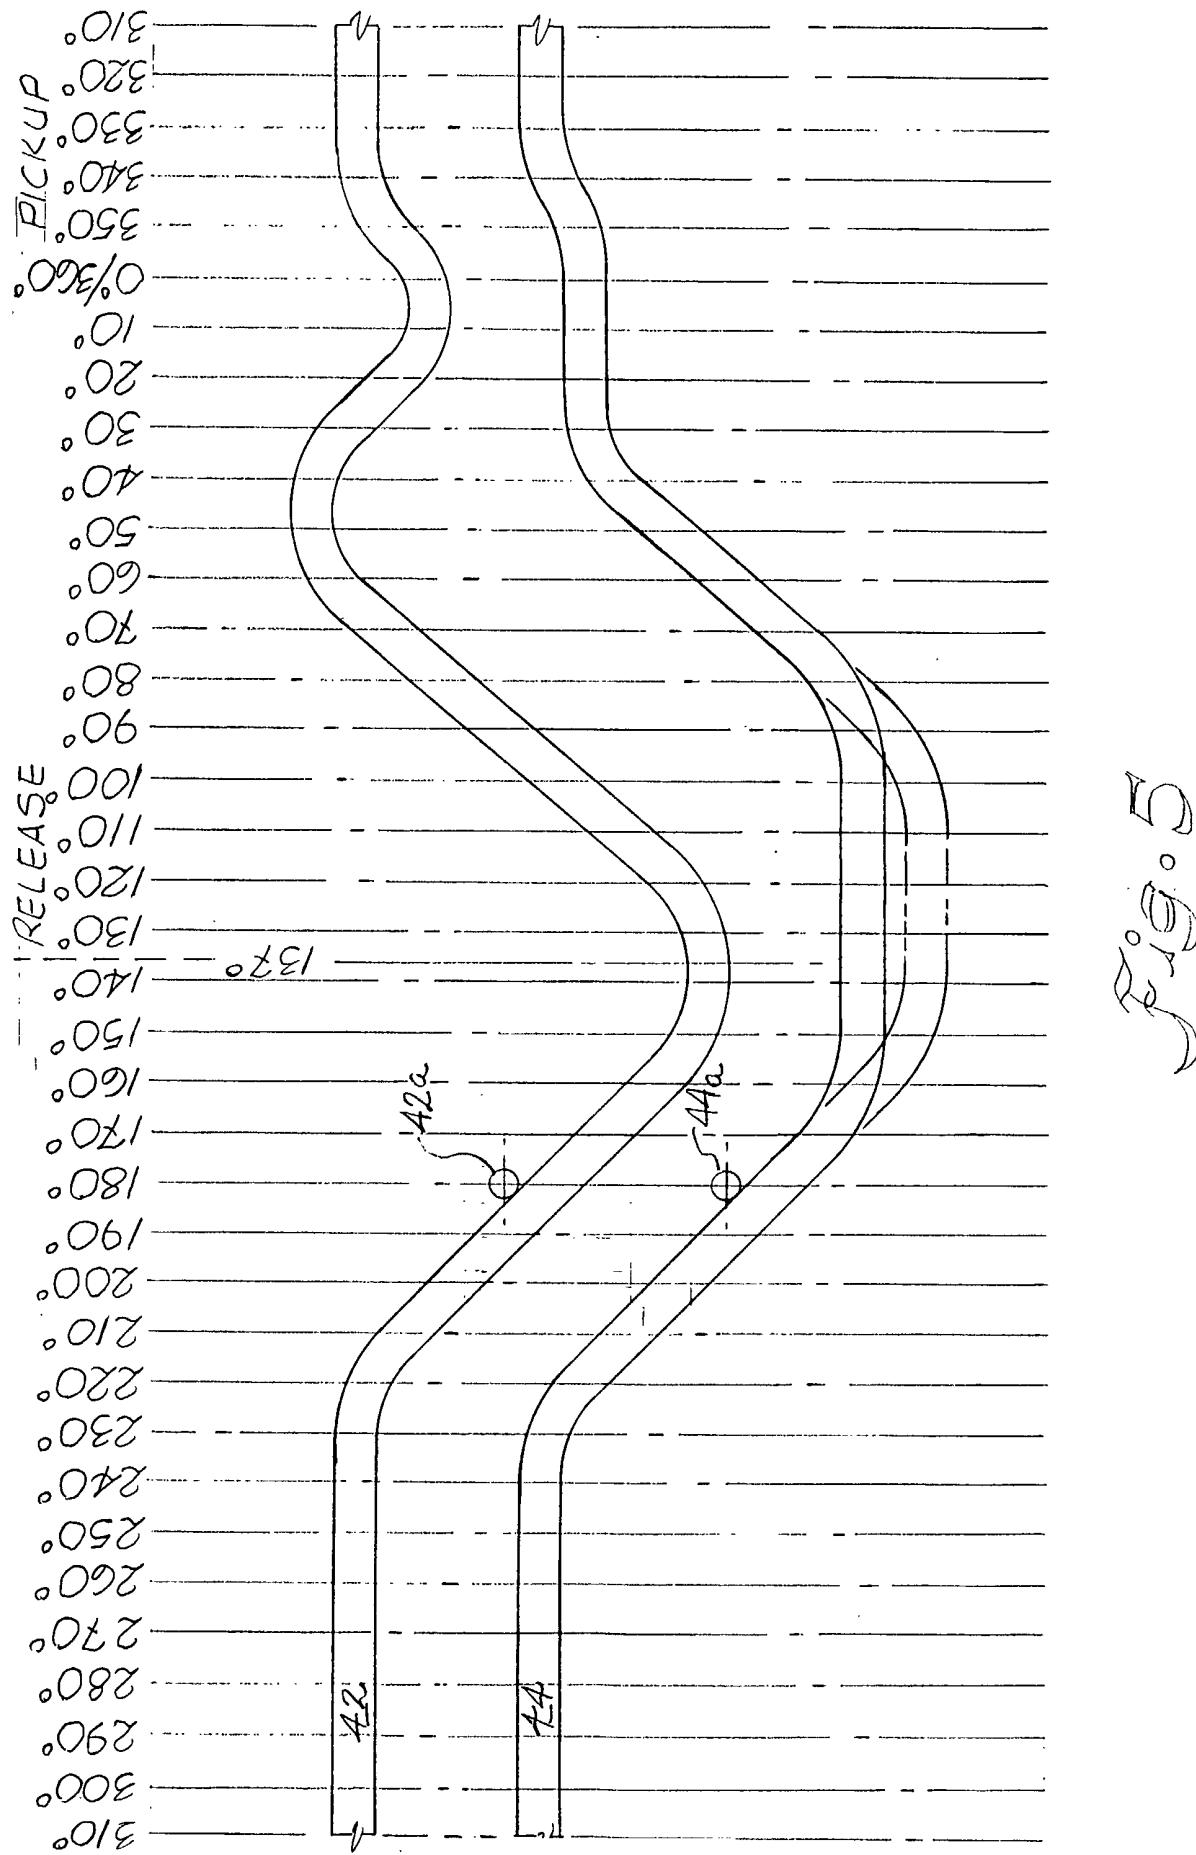
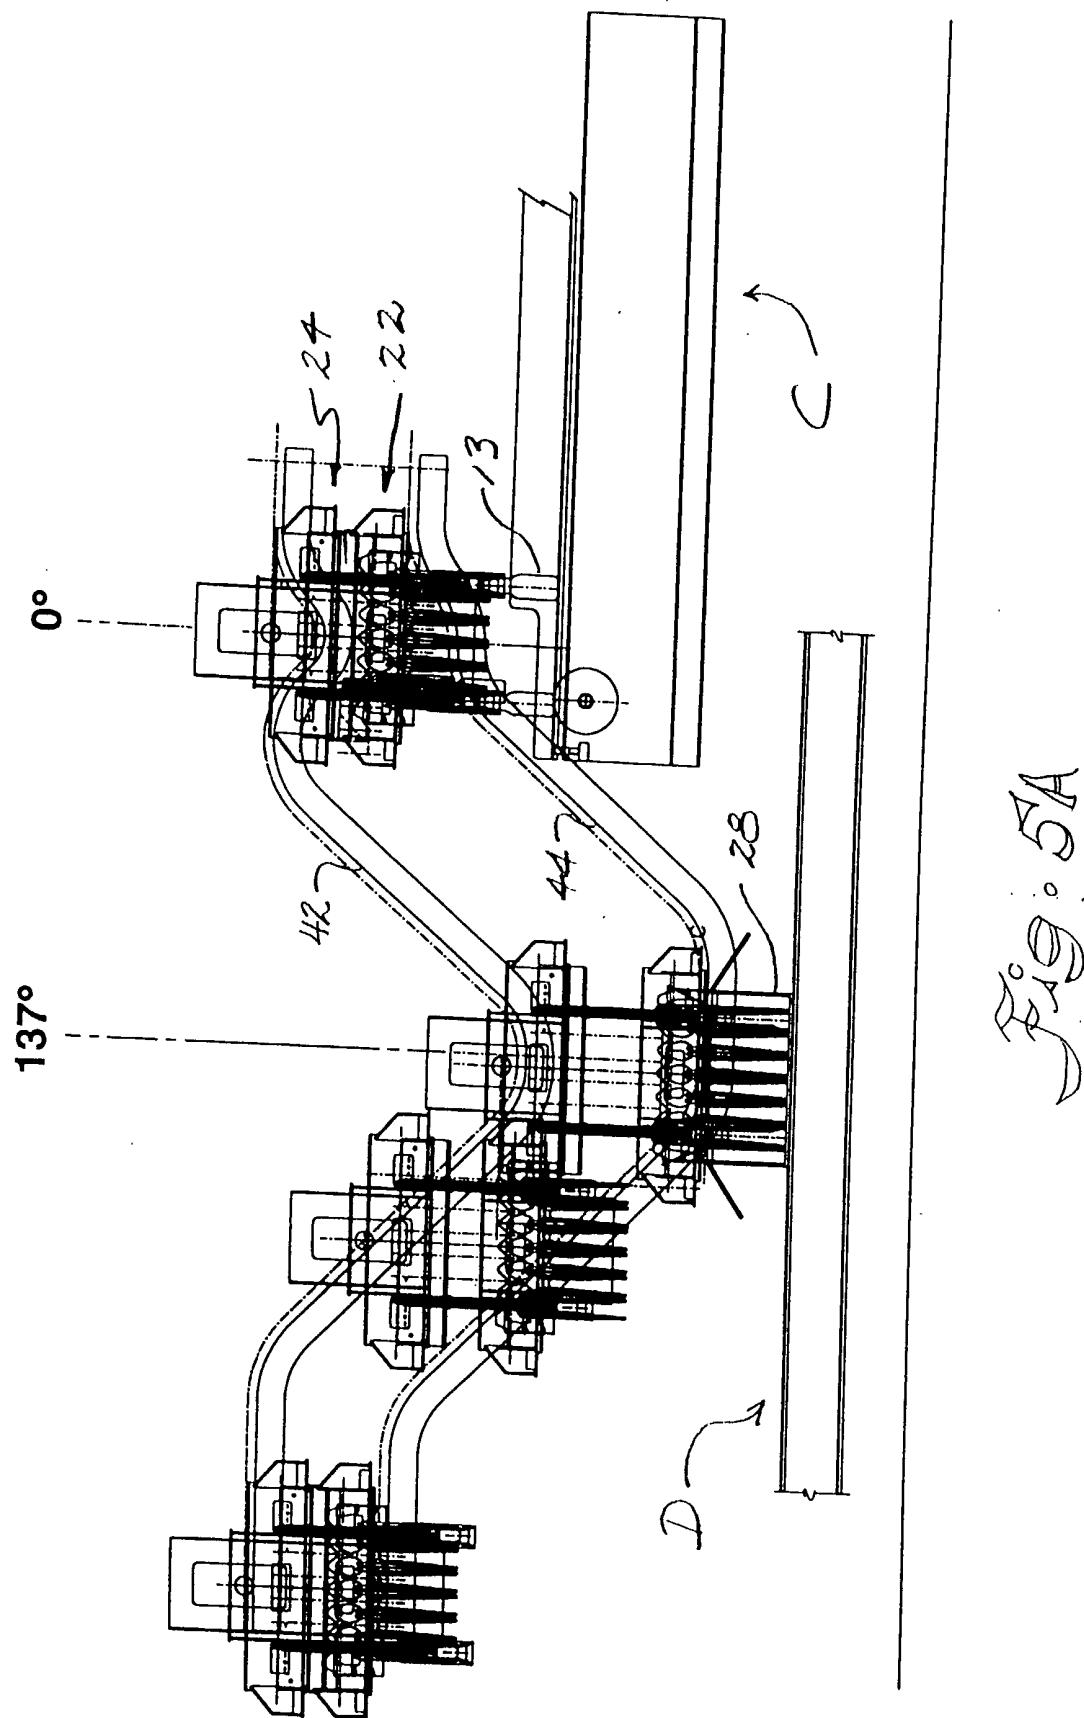
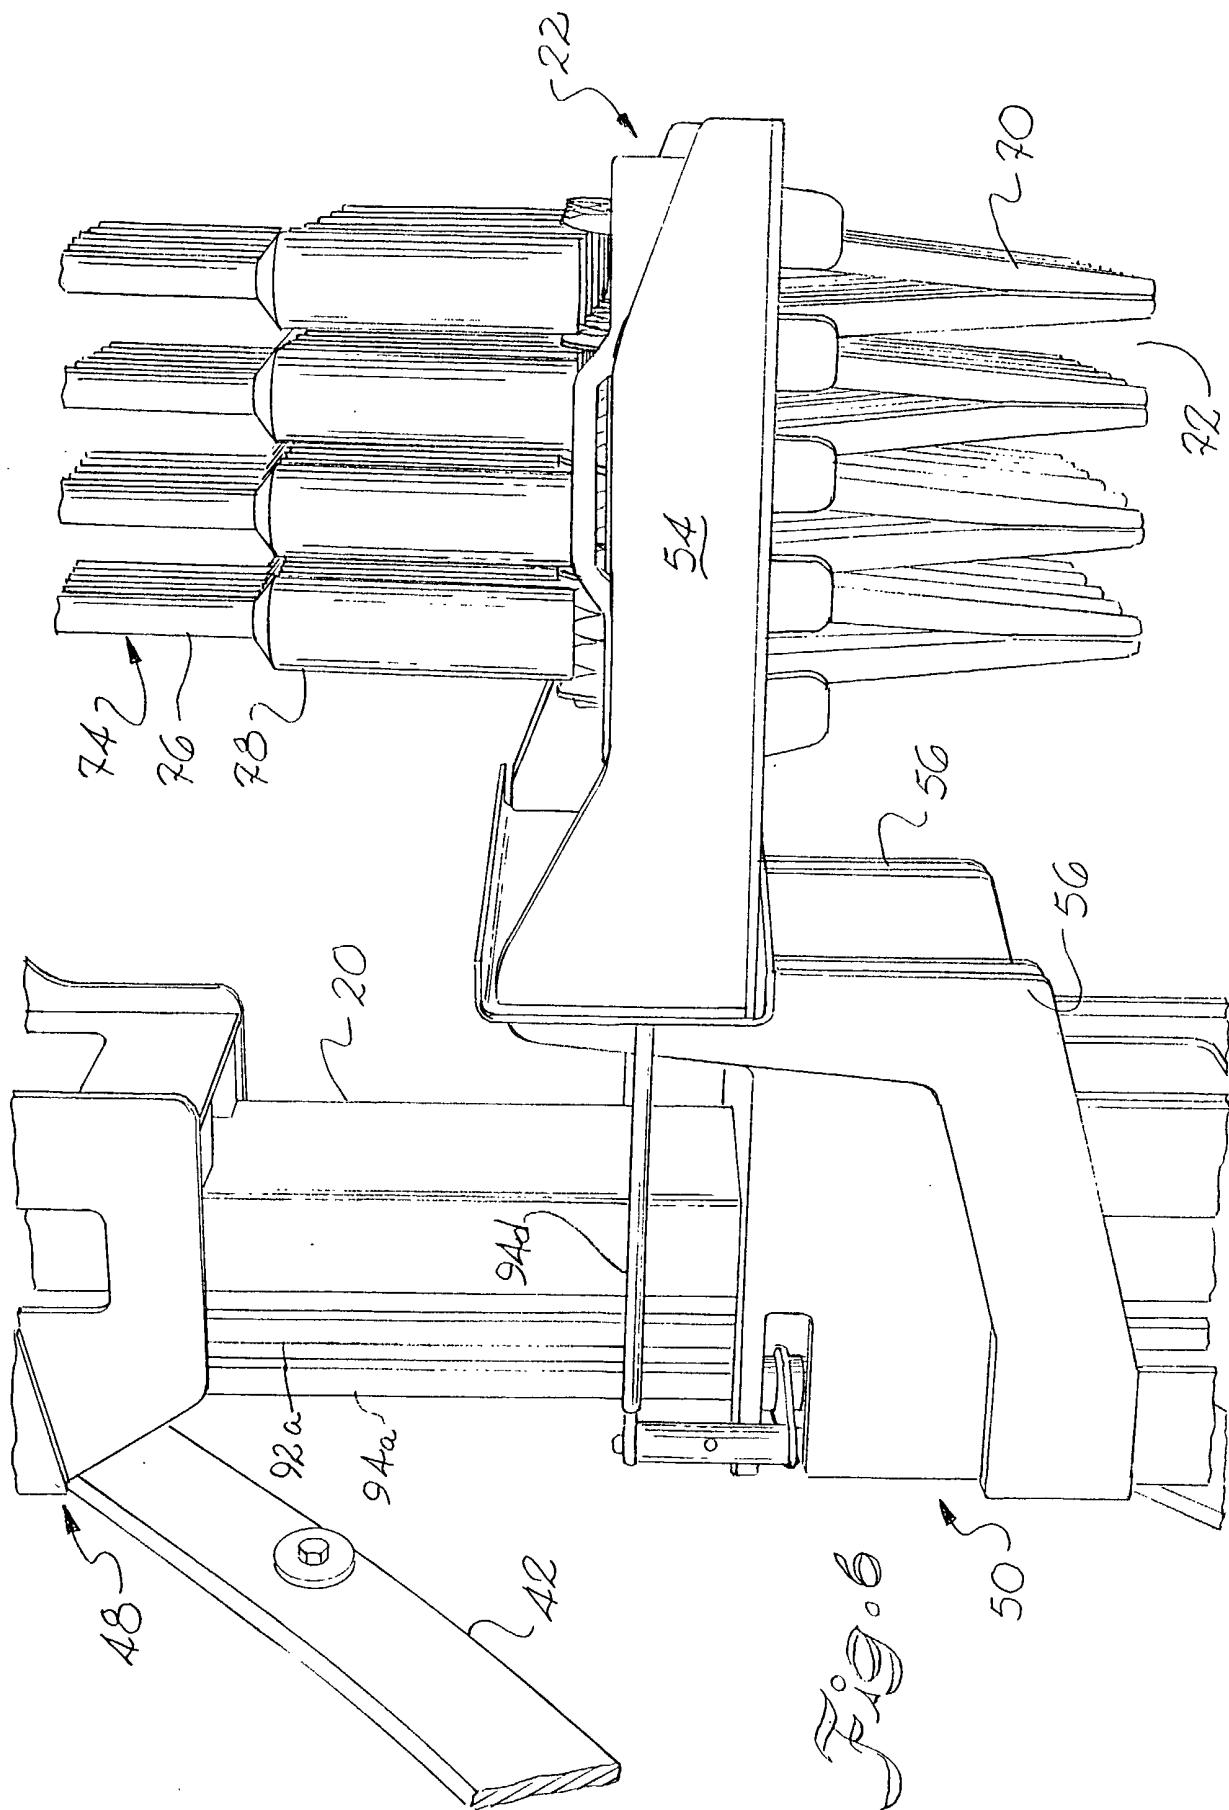
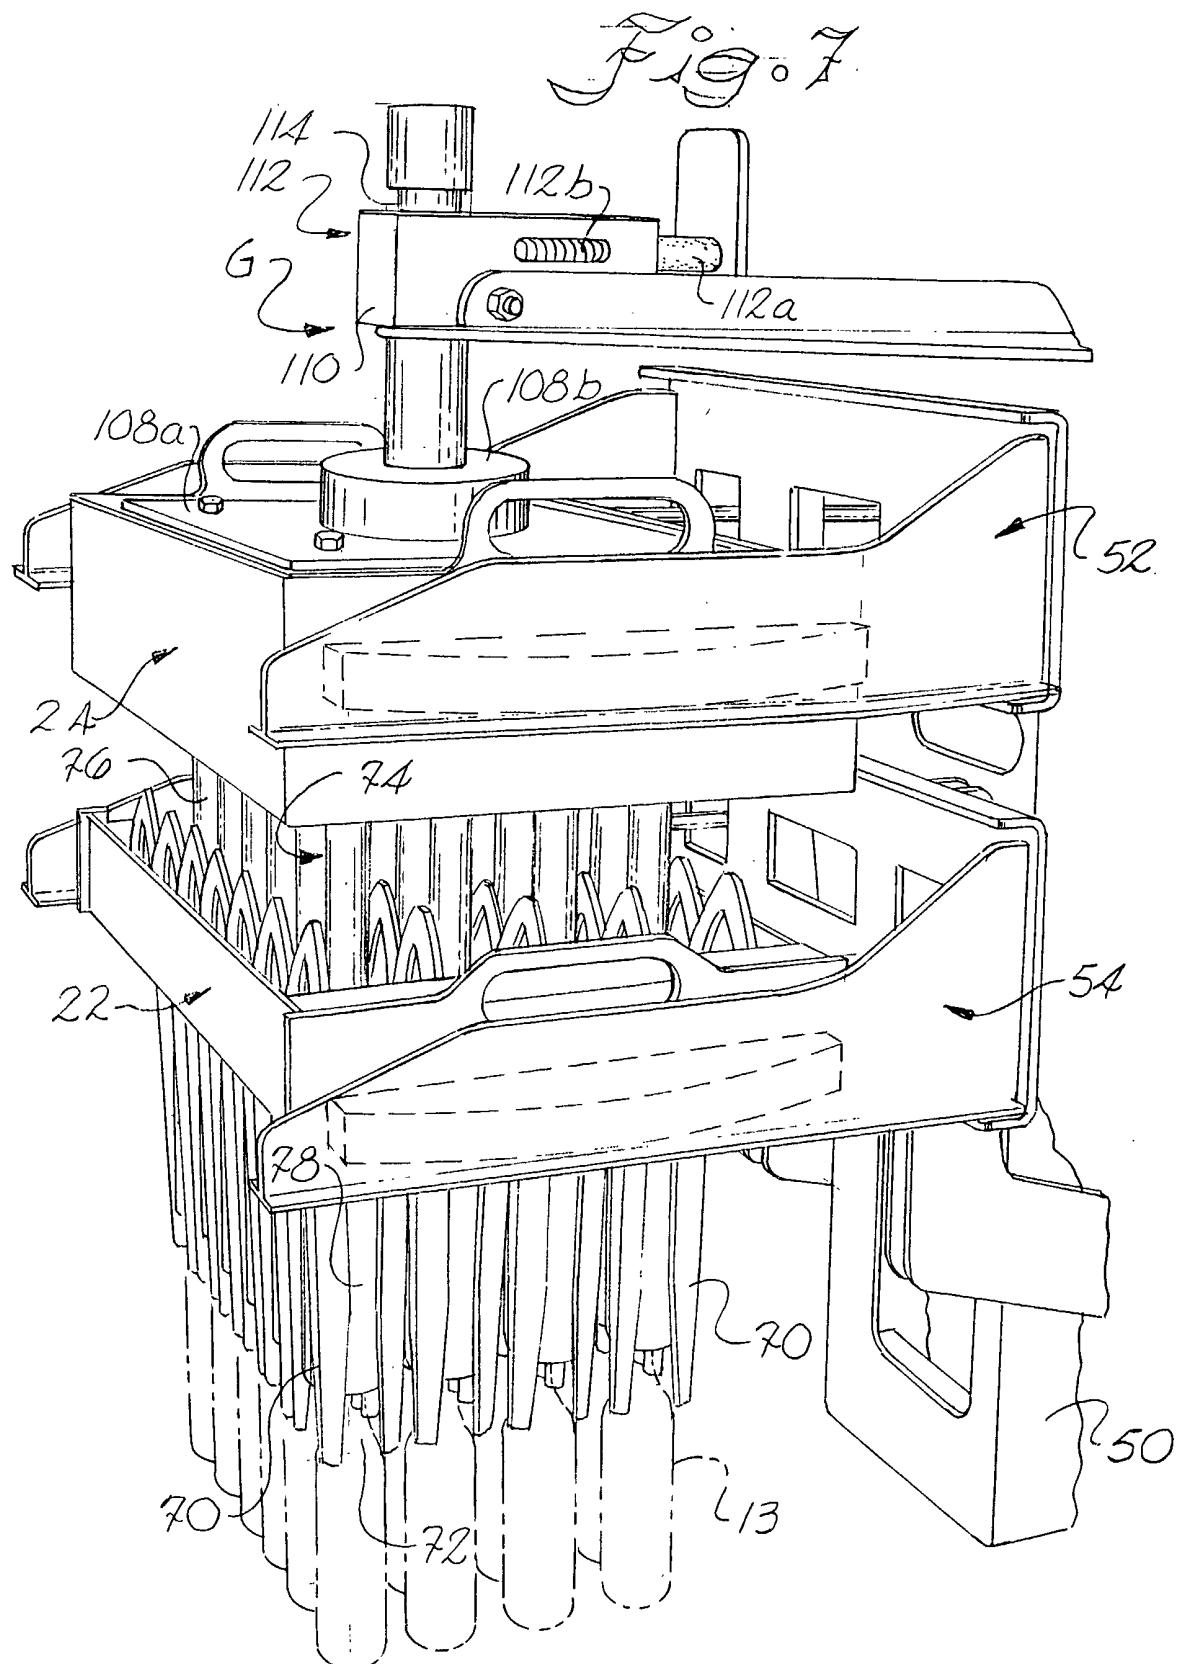




Fig. 4









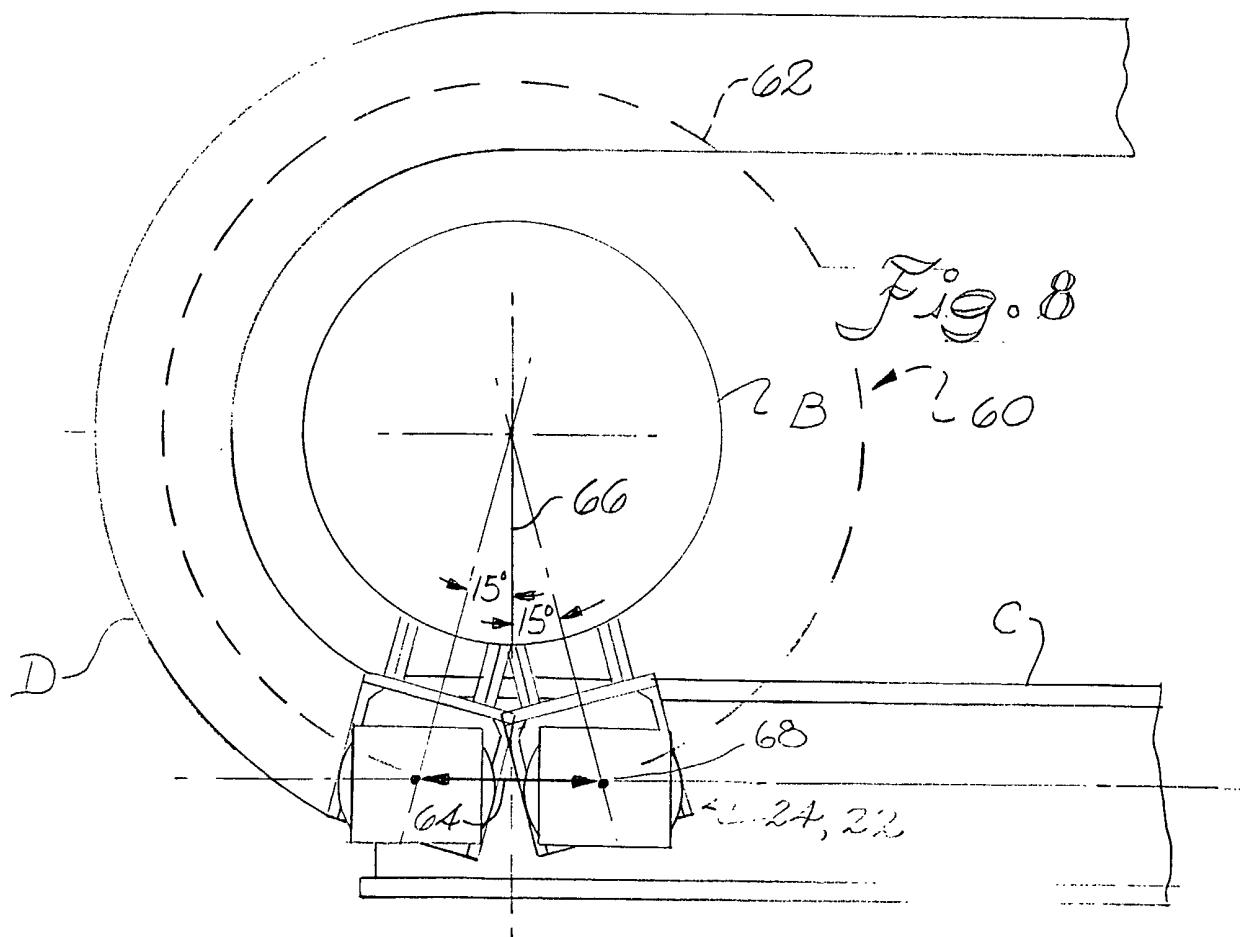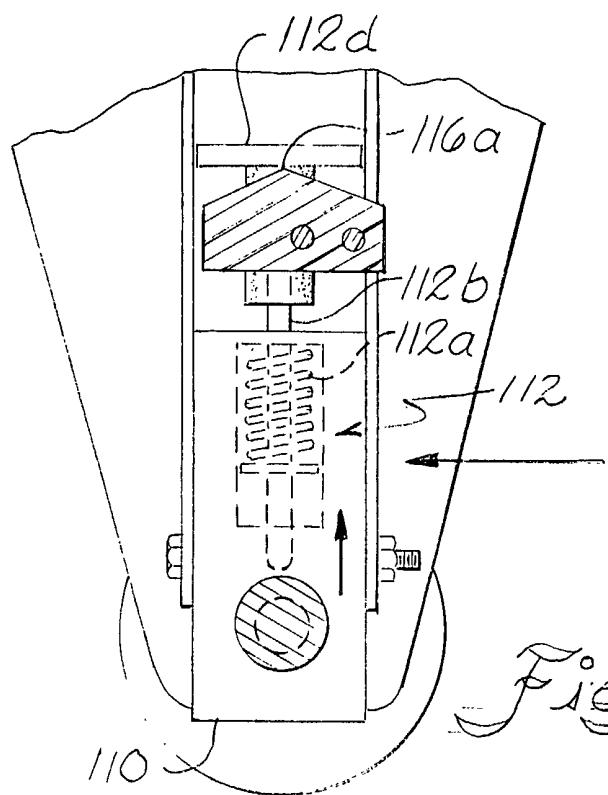

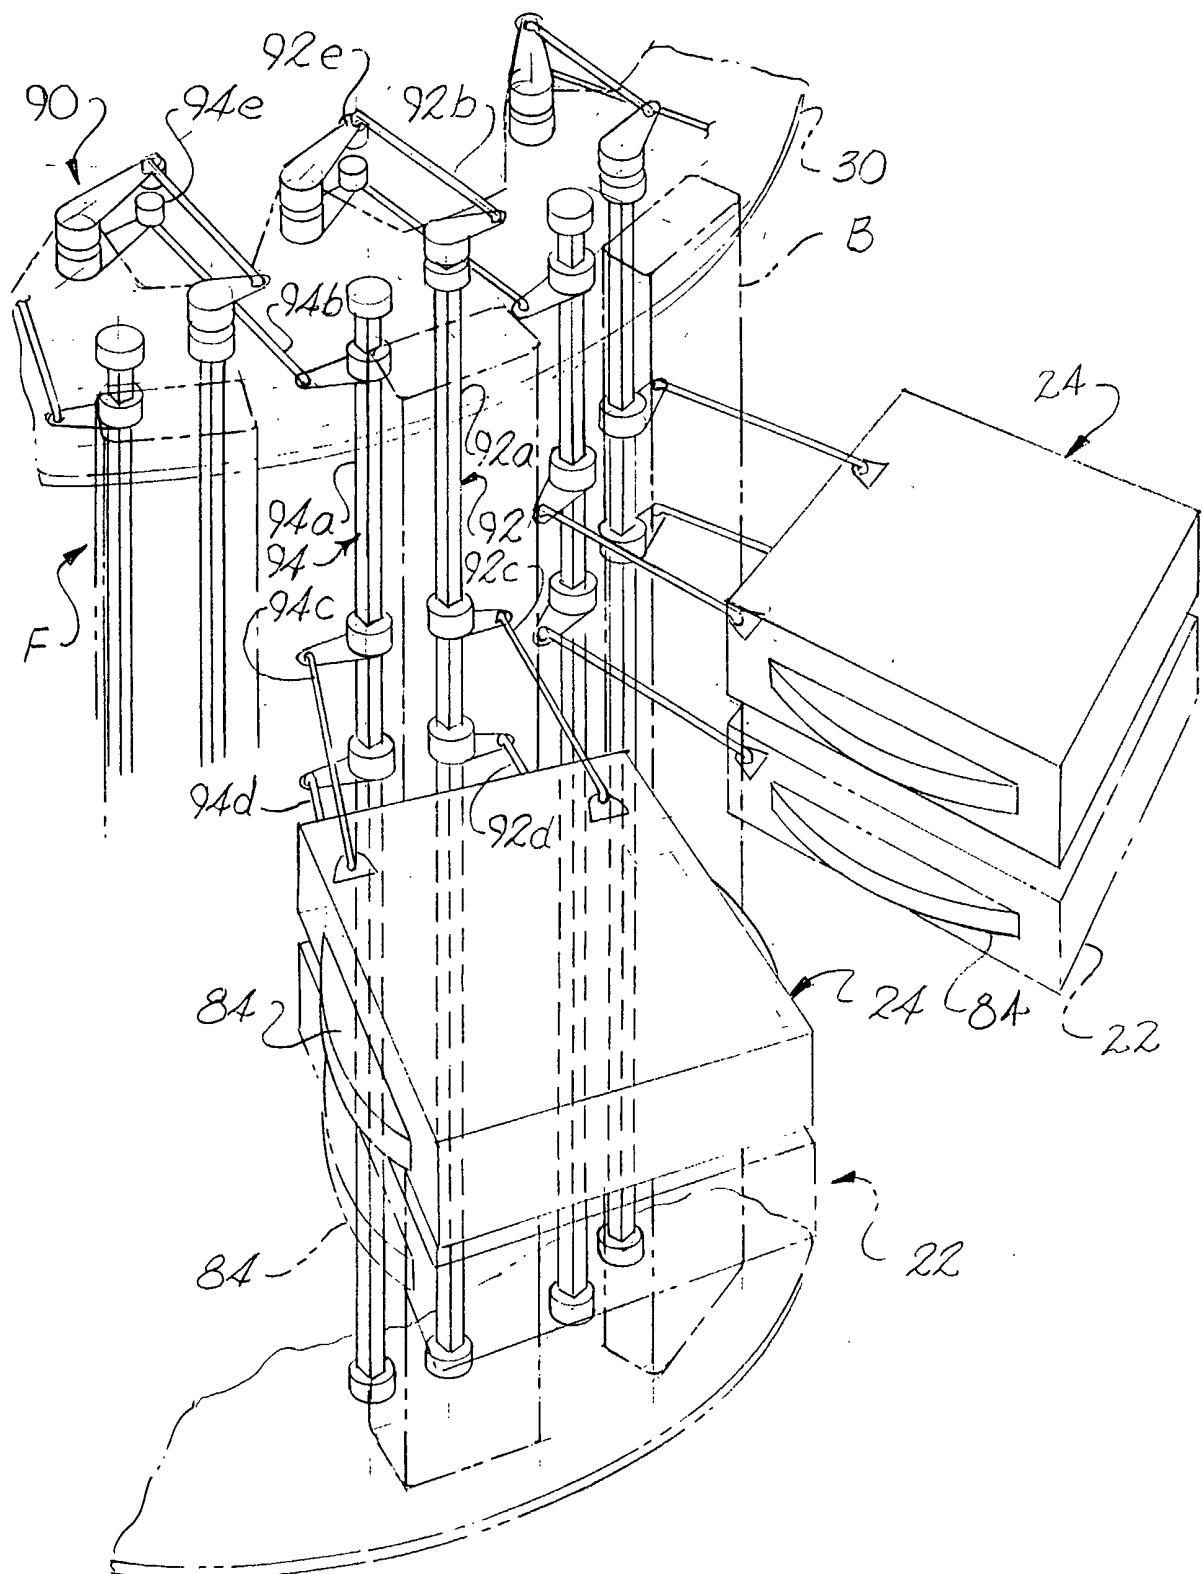


Fig. 9

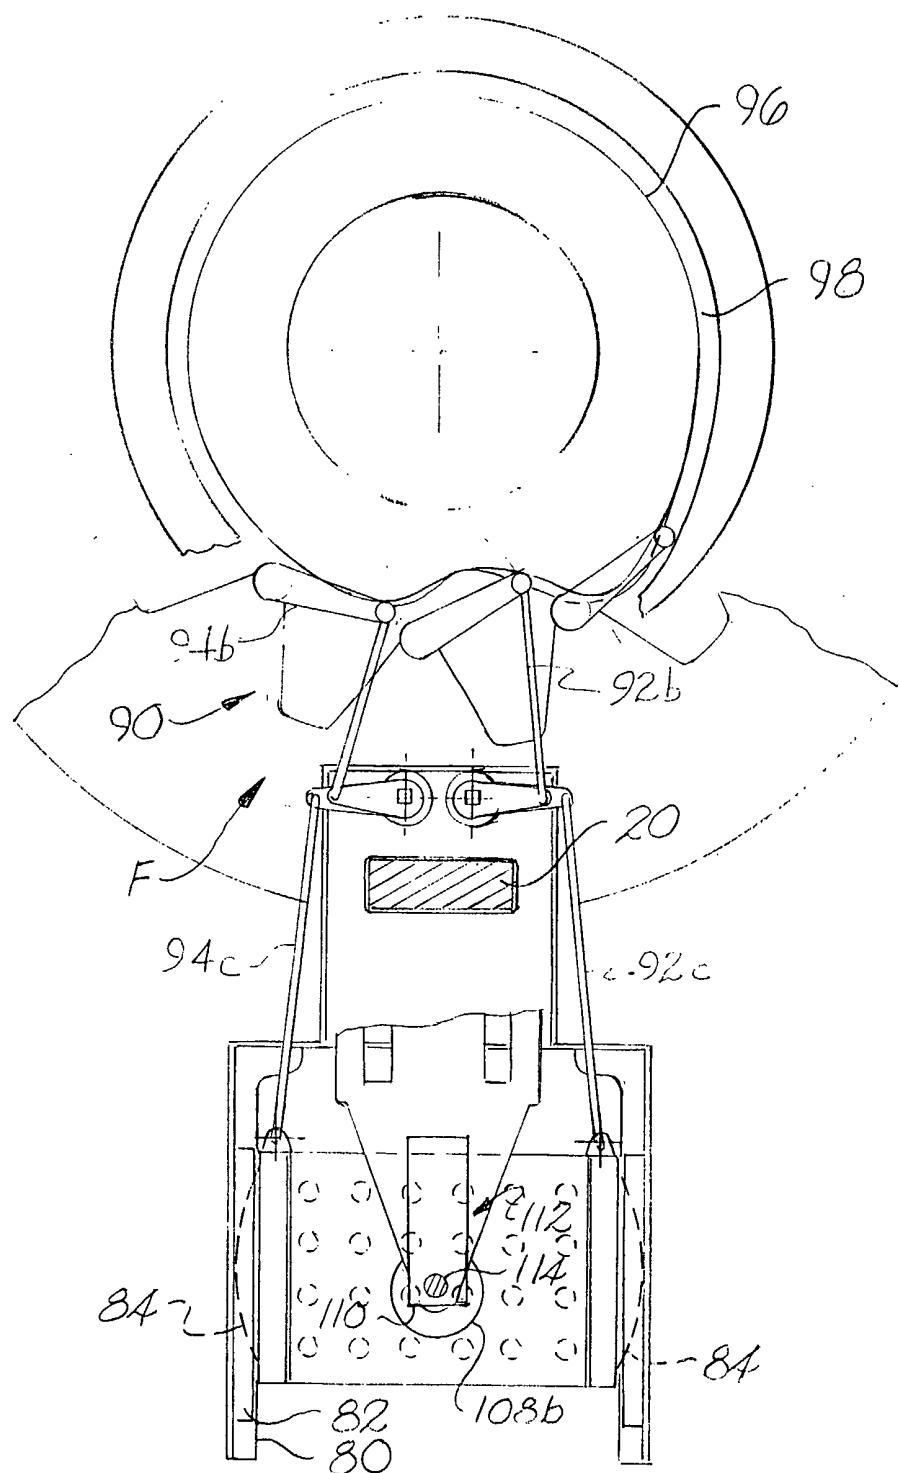
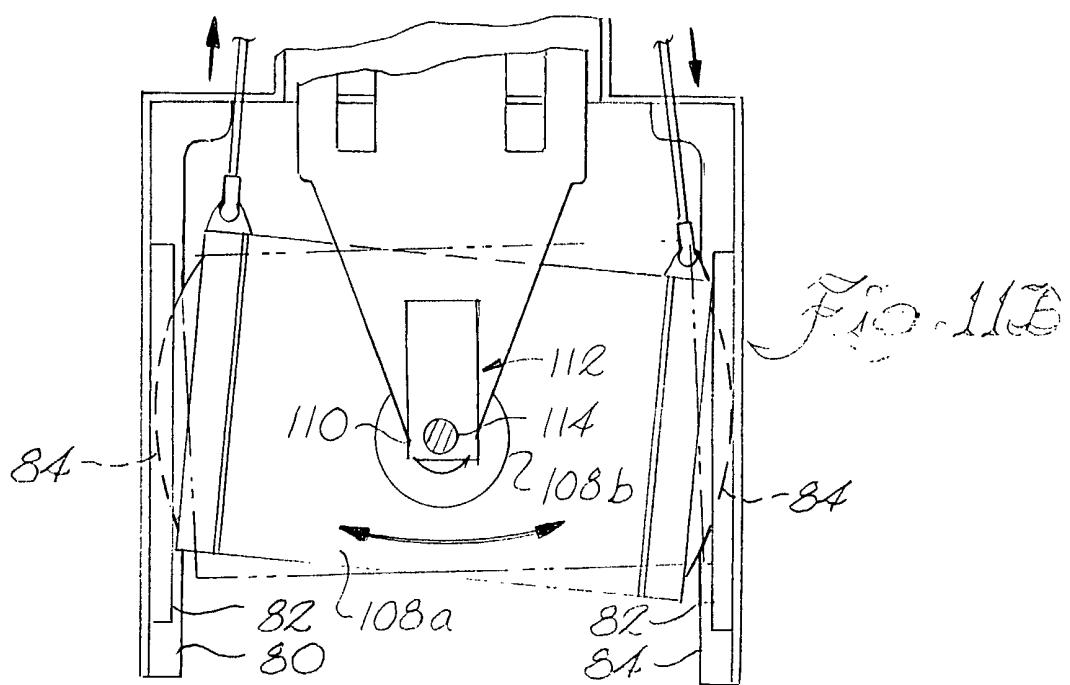
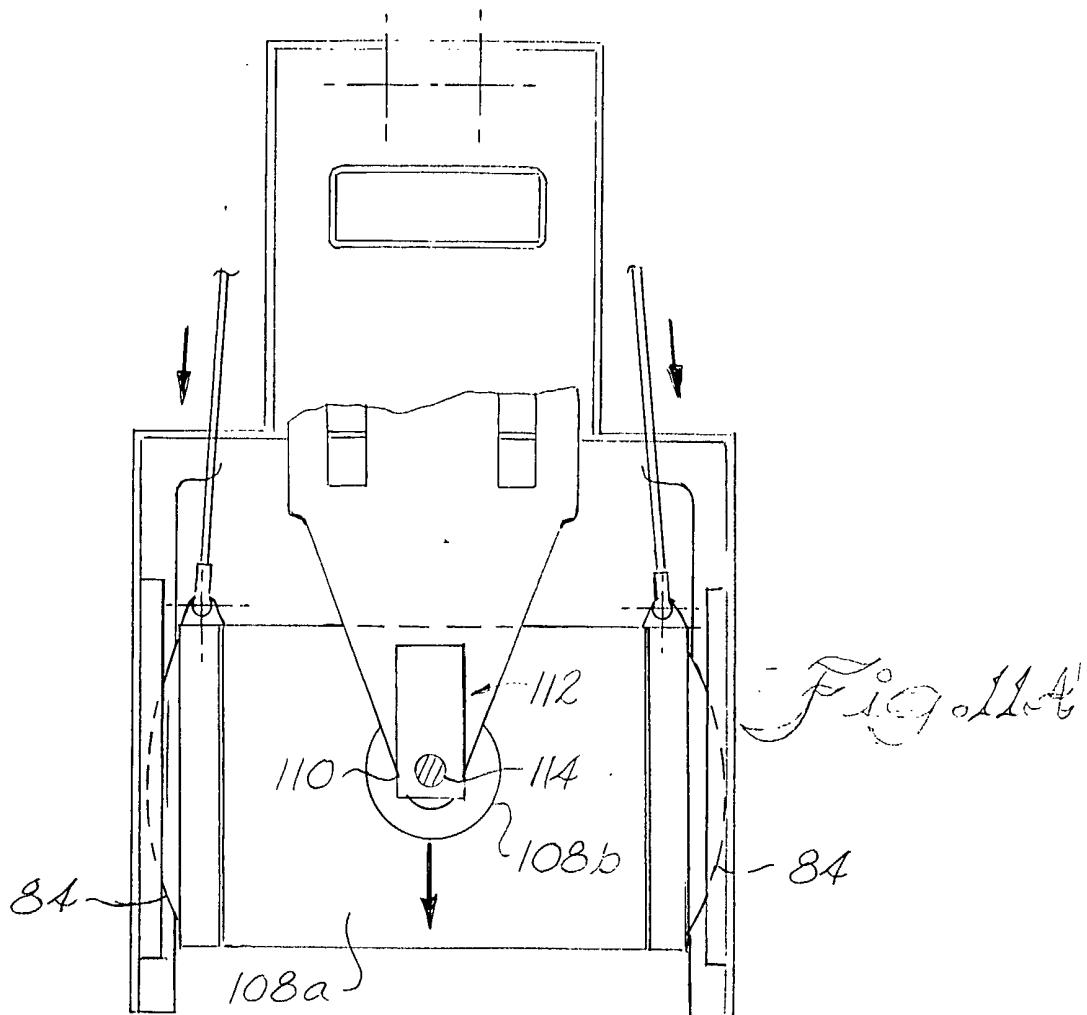
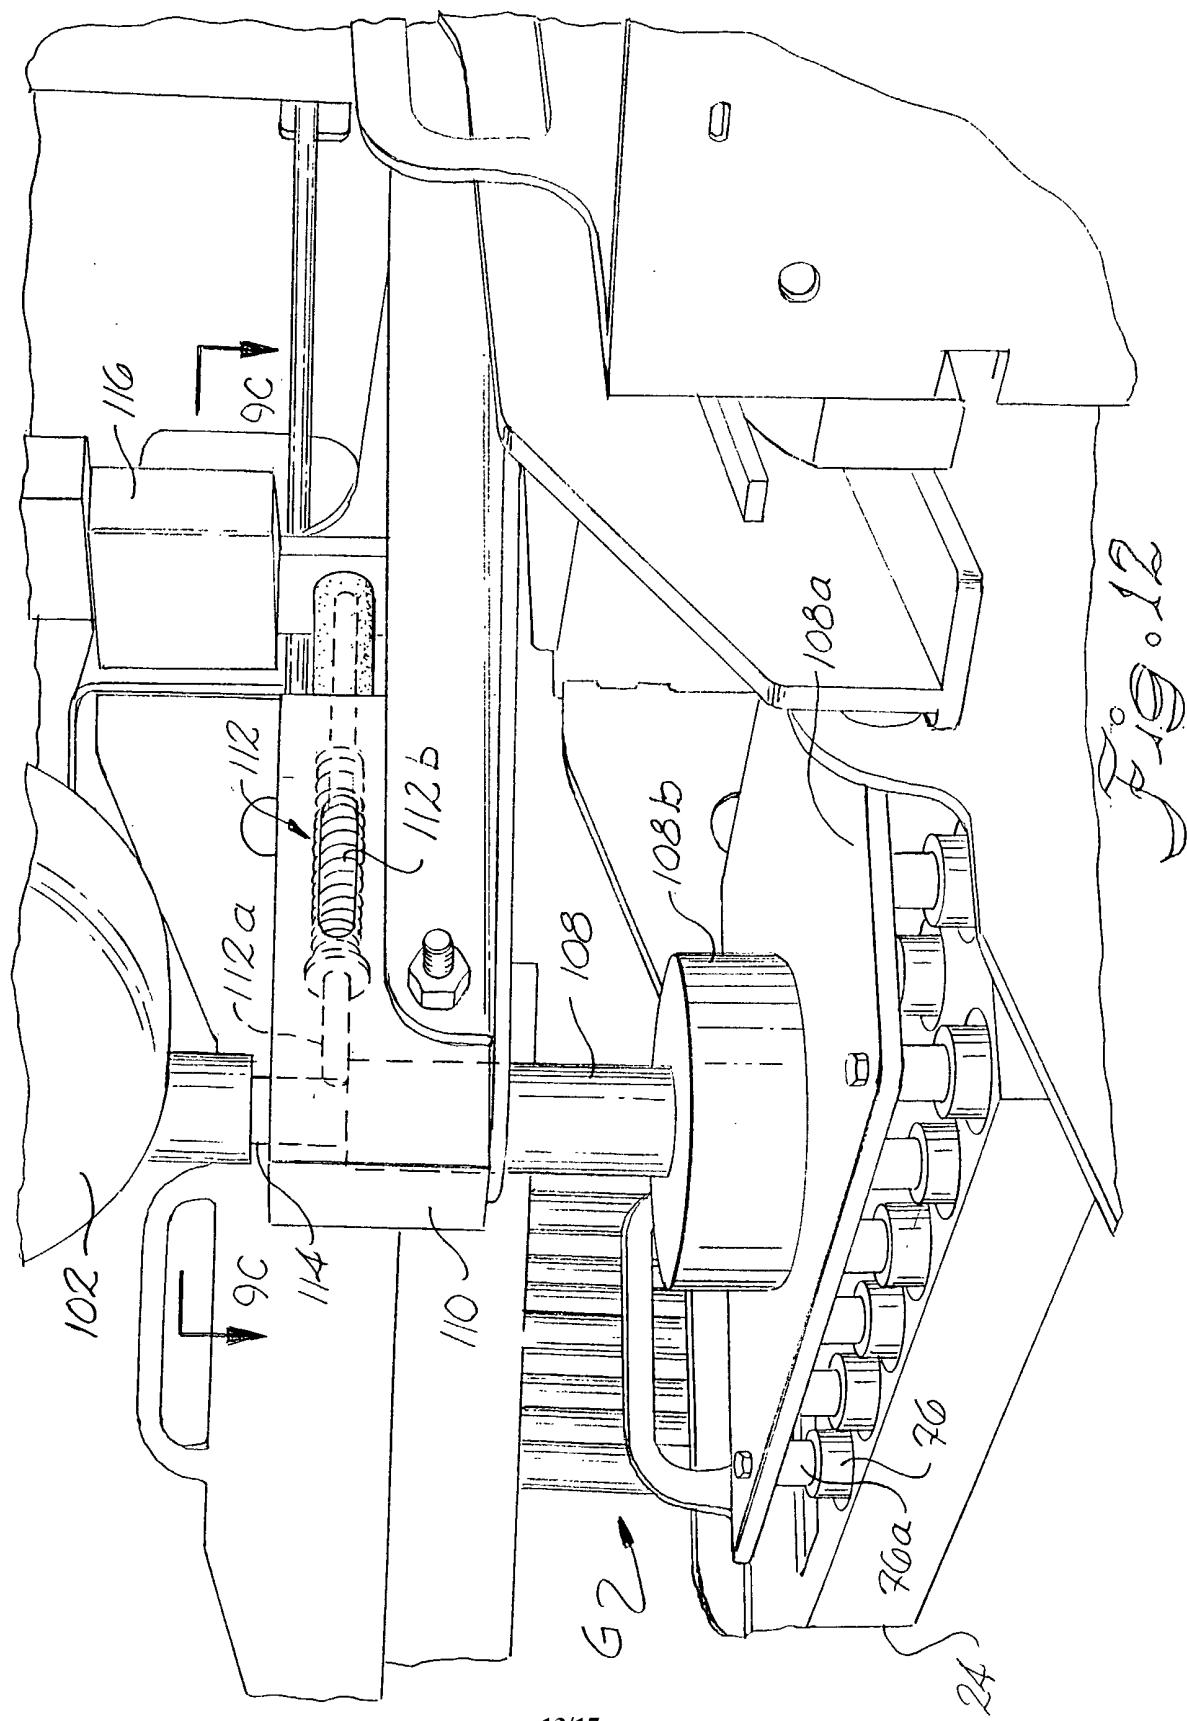


Fig. 10







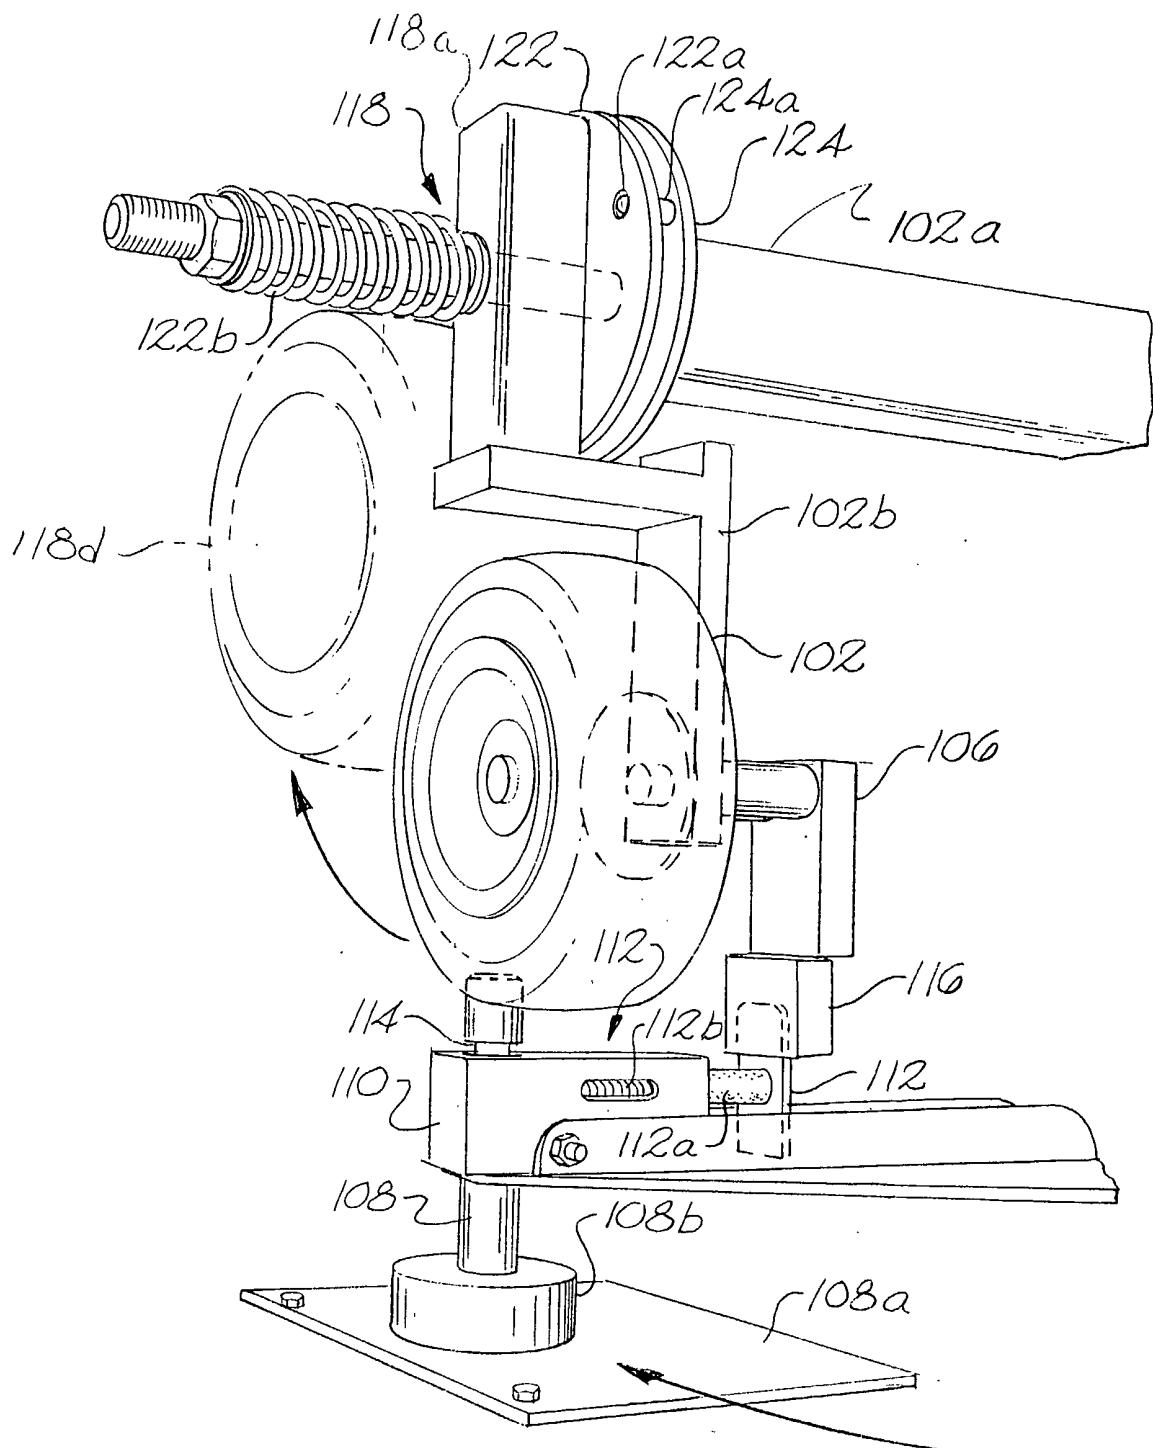



Fig. 13

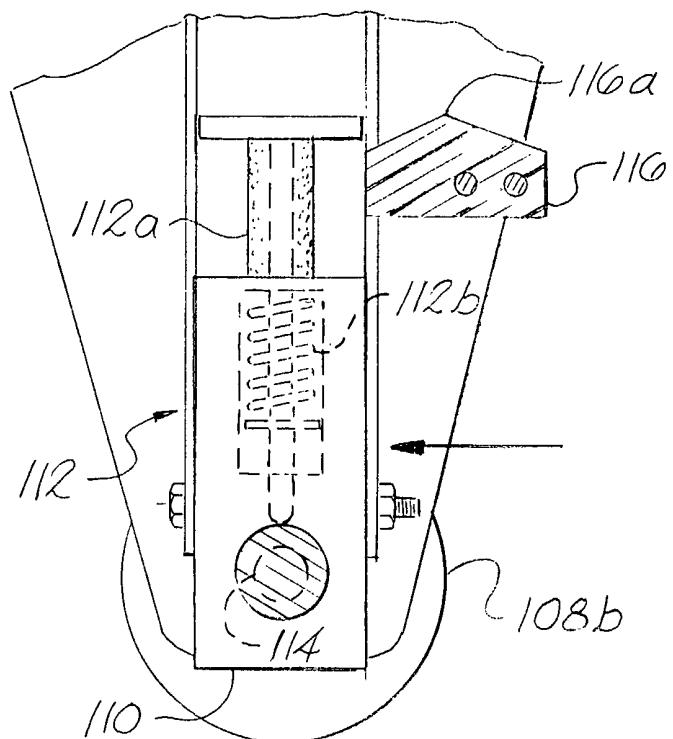


- Fig. 15C

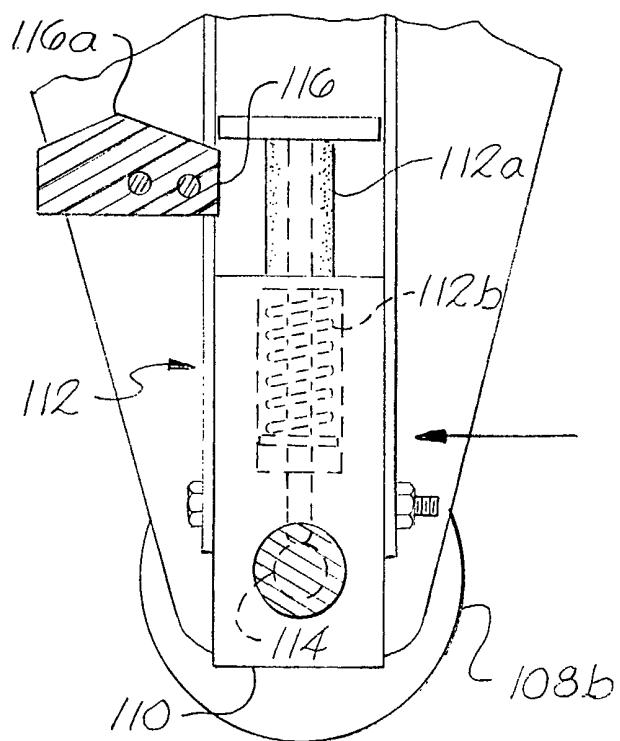

- Fig. 15A

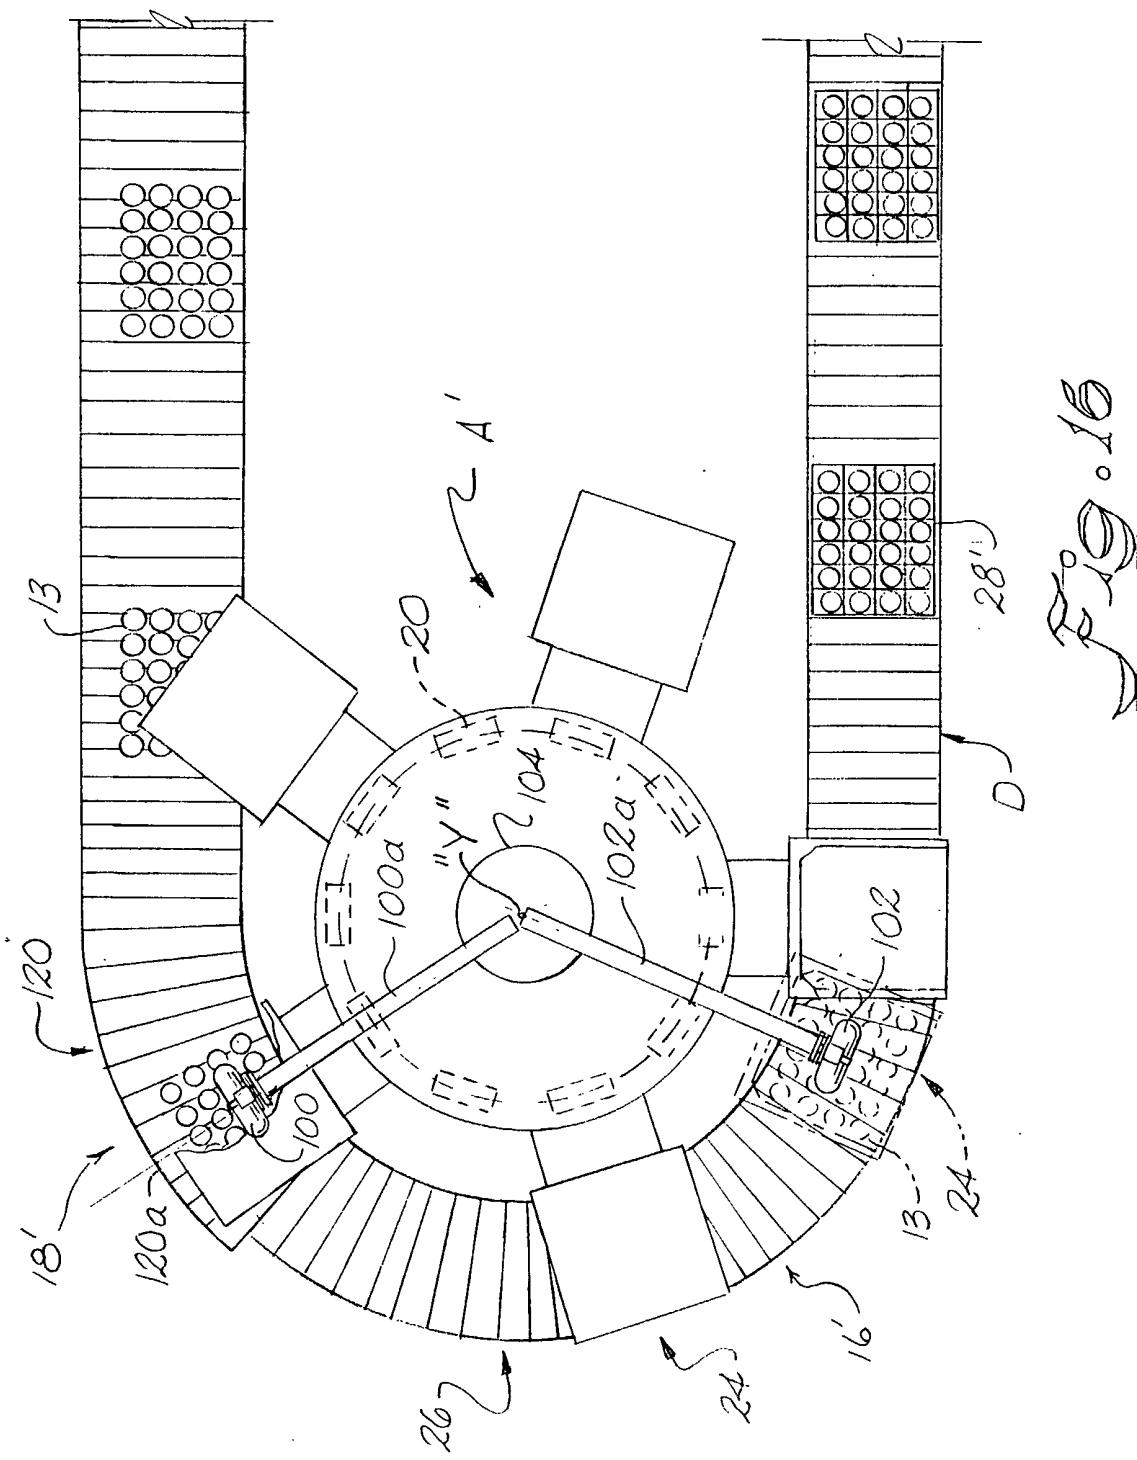

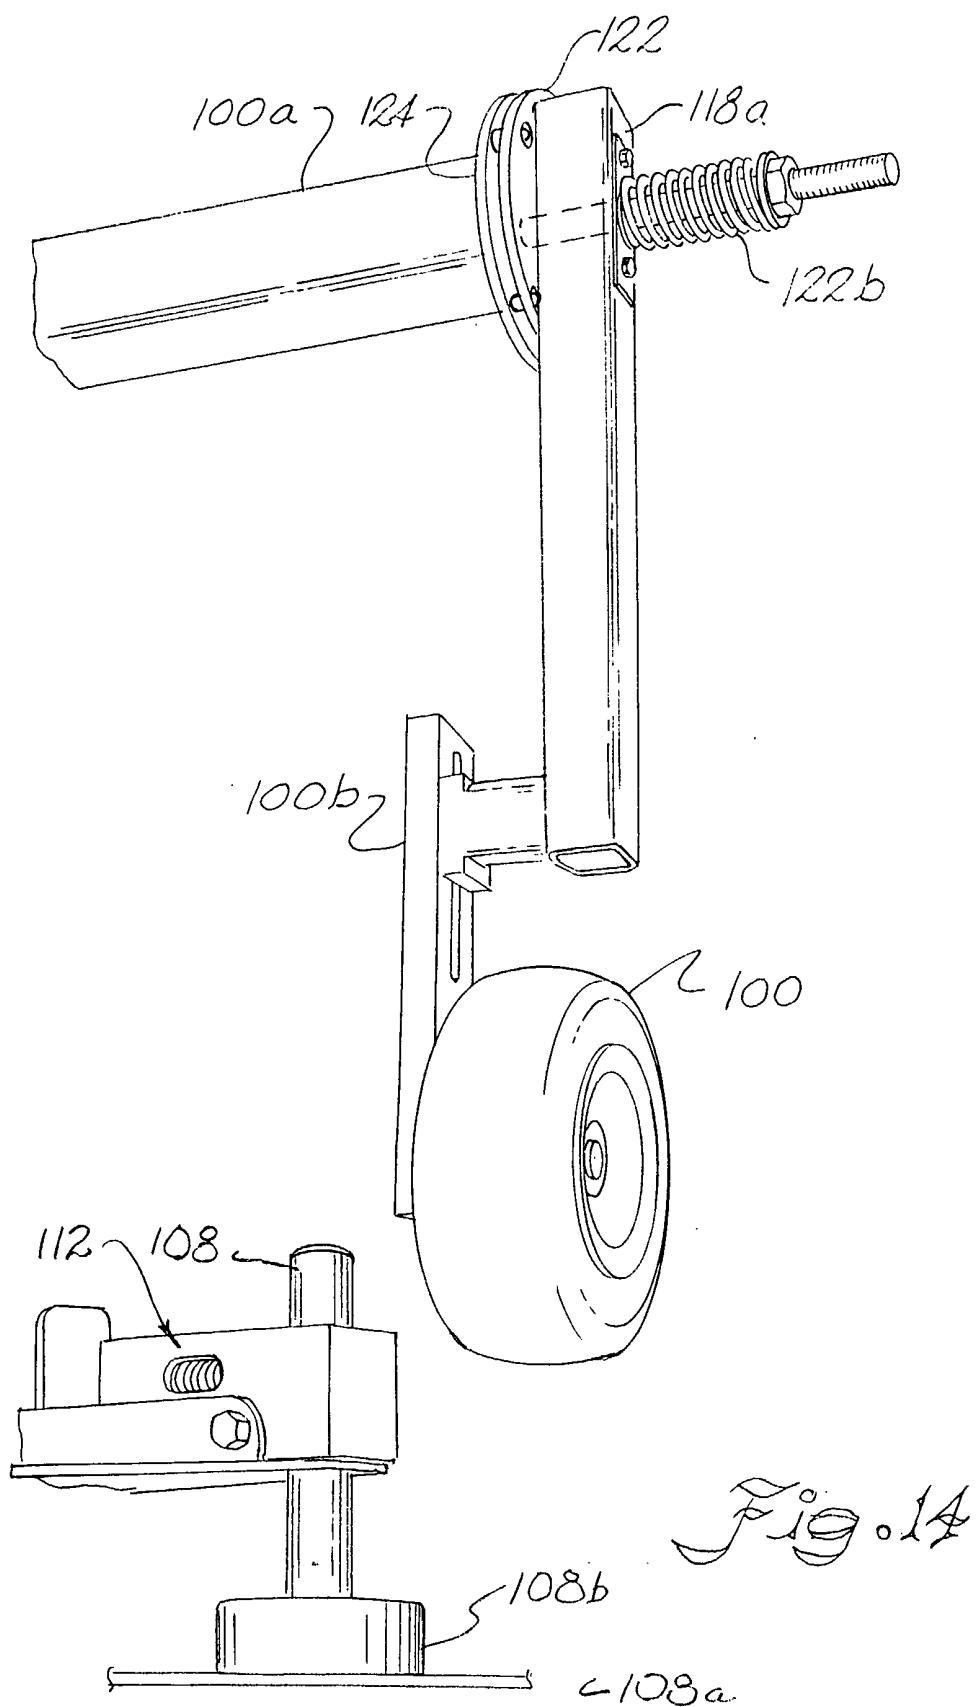

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/27577

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :B65B 5/08, B65B 21/06, B65B 21/18

US CL :53/473, 248, 251

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 53/473, 475, 248, 249, 250, 251, 252, 539

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 3,431,066 A (MAX KETTNER) 06 March 1986, See entire document	1-75
Y	DE 1,152,351 A (ENZINGER-UNION-WERKE) 01 August 1963, See entire document	9, 10, 18, 19, 27, 28, 45-48, 53, 54, 59, 61, 64, 65
Y	US 4,891,928 A (JAMES et al.) 09 January 1990, See entire document	15, 20, 21, 34, 35, 36, 50, 51, 52
A	US 4,294,057 A (WINIASZ et al.) 13 October 1981, See entire document	1-75
A	US 5,060455 A (SCHMEISSER) 29 October 1991, See entire document	1-75

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

01 DECEMBER 2000

Date of mailing of the international search report

16 JAN 2001


Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

GENE KIM

Telephone No. (703) 308-1886

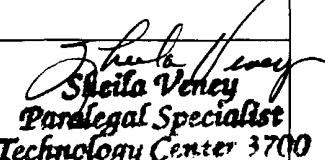

Sheila Veney
Paralegal Specialist
Technology Center 3700

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/27577

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,487,257 A (DOMEIER et al.) 30 January 1996, entire document	1-75
A	US 5,212,932 A (RAUDAT) 25 May 1993, entire document	1-75
A	US 5,797,249 A (HARTNESS) 25 August 1998, entire document	1-75
A	US 5,588,282 A (HARTNESS) 31 December 1996, entire document	1-75

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/27577

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

The additional search fees were accompanied by the applicant's protest.
 No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No. PCT/US00/27577

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claim(s)1-37, 55-70, drawn to method and apparatus for transferring articles from a pickup station to a release station.

Group II, claim(s) 38-54, 71-75, drawn to method and apparatus for packing articles into cases.

The inventions listed as Groups I-II do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: Group I lacks the special technical feature of Group II of packing articles into cases and Group II lacks the special technical feature of Group I of transferring articles from a pickup station and releasing the articles.