



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2224966 C 2001/09/18

(11)(21) **2 224 966**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 1997/03/10
(87) Date publication PCT/PCT Publication Date: 1997/12/04
(45) Date de délivrance/Issue Date: 2001/09/18
(85) Entrée phase nationale/National Entry: 1998/01/27
(86) N° demande PCT/PCT Application No.: US 97/04153
(87) N° publication PCT/PCT Publication No.: WO 97/45509
(30) Priorité/Priority: 1996/05/31 (08/655,952) US

(51) Cl.Int.⁶/Int.Cl.⁶ C10M 173/02, C10M 105/60

(72) Inventeurs/Inventors:
SYKES, Christopher S., US;
SCHMIDT, Bruce E., US;
BESSE, Michael E., US;
PERSON HEI, Kimberly L., US

(73) Propriétaire/Owner:
ECOLAB INC., US

(74) Agent: ROBIC

(54) Titre : LUBRIFIANT A BASE D'ALKYLE ETHER AMINE POUR CONVOYEUR CONTENANT DES INHIBITEURS DE CORROSION

(54) Title: ALKYL ETHER AMINE CONVEYOR LUBRICANTS CONTAINING CORROSION INHIBITORS

(57) **Abrégé/Abstract:**

The invention is a lubricant concentrate composition, use solution, and method of use. The lubricant includes amine compounds of the formula $R_1 - O - R_2 - NH_2$, $R_1 - O - R_2 - NH - R_3 - NH_2$, and mixtures thereof, wherein R_1 may be a linear C_6 - C_{18} alkyl, R_2 may be a linear or branched C_1 - C_8 alkyl, and R_3 may be a linear C_1 - C_8 alkyl, and a corrosion inhibitor. The lubricant composition preferably includes a polycarboxylic acid as a corrosion inhibitor. The composition may also include a hydrotrope, stabilizer, and a surfactant to provide detergency to the composition upon dilution and use. The invention also includes a lubricant use solution resulting from dilution of this concentrate.



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10M 173/02 // (C10M 173/02, 129:06, 129:08, 129:28, 133:08), C10N 40:00	A1	(11) International Publication Number: WO 97/45509 (43) International Publication Date: 4 December 1997 (04.12.97)
(21) International Application Number: PCT/US97/04153 (22) International Filing Date: 10 March 1997 (10.03.97) (30) Priority Data: 08/655,952 31 May 1996 (31.05.96) US (71) Applicant: ECOLAB INC. [US/US]; Ecolab Center, St. Paul, MN 55102 (US). (72) Inventors: PERSON HEI, Kimberly, L.; 6185 - 26th Street North, Oakdale, MN 55128 (US). BESSE, Michael, E.; 7450 Winnetka Heights, Golden Valley, MN 55427 (US). SCHMIDT, Bruce, E.; 1204 Hartford Avenue, St. Paul, MN 55116 (US). SYKES, Christopher, S.; 510 Benz Road, New Brighton, MN 55112 (US). (74) Agent: BRUESS, Steven, C.; Merchant, Gould, Smith, Edell, Welter & Schmidt, P.A., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: ALKYL ETHER AMINE CONVEYOR LUBRICANTS CONTAINING CORROSION INHIBITORS		
(57) Abstract The invention is a lubricant concentrate composition, use solution, and method of use. The lubricant includes amine compounds of the formula $R_1 - O - R_2 - NH_2$, $R_1 - O - R_2 - NH - R_3 - NH_2$, and mixtures thereof, wherein R_1 may be a linear C_6 - C_{18} alkyl, R_2 may be a linear or branched C_1 - C_8 alkyl, and R_3 may be a linear C_1 - C_8 alkyl, and a corrosion inhibitor. The lubricant composition preferably includes a polycarboxylic acid as a corrosion inhibitor. The composition may also include a hydrotrope, stabilizer, and a surfactant to provide detergency to the composition upon dilution and use. The invention also includes a lubricant use solution resulting from dilution of this concentrate.		

ALKYL ETHER AMINE CONVEYOR LUBRICANTS CONTAINING
CORROSION INHIBITORS

Field of the Invention

5 The invention relates generally to amine-based
lubricant compositions and methods of use. More
specifically, the invention relates to antimicrobial
conveyor lubricants containing corrosion inhibitors
which are based upon compositions which include linear
10 alkyl ether amine and/or diamine compounds.

Background of the Invention

Beverages and other comestibles are often
processed and packaged on mechanized conveyor systems.
15 These conveyor systems are lubricated to reduce friction
between the packaging and the load bearing surface of
the conveyor.

Antimicrobial agents are useful for conveyor
systems which may transport food substances. Spillage
20 of beverage and other comestibles on the conveyor often
results in the growth of bacteria, yeast and mold and
may create a slime or soil which, in turn, hampers
conveyor performance and may also detract from product
purity and appearance. Antimicrobial agents are
25 particularly useful for reducing such slime formation in
conveyor systems which transport food substances.

In the past, the lubricants commonly used on
the load bearing surfaces of these conveyor systems
typically contained fatty acid soaps as the active
30 lubrication ingredient, and antimicrobial agents to
control microbial growth. However, the tendency of
fatty acid soap lubricants to react with water hardness

ions compromised the overall performance of the lubricant.

Lubricant compositions which do not contain fatty acids have been developed in an effort to avoid or
5 eliminate the precipitation problem encountered when the lubricant is diluted with water containing hardness ions. For example, Jansen, U.S. Pat. No. 4,839,067 discloses a process for the maintenance of chain-type conveyor belts by treating the conveyor belt with a
10 lubricant composition containing a lubricating amount of a neutralized C_{12-18} primary fatty amine. However, as noted in Jansen, the primary fatty acid amines tend to form a precipitate in the presence of anions such as SO_4^{2-} , PO_4^{3-} and CO_3^{2-} , commonly found as impurities in water
15 which will plug spray nozzles and soil the surfaces of the conveyor system in much the same way as fatty acid soaps in the presence of water hardness.

Schmidt et al., U.S. Patent No. 5,182,035 discloses aliphatic ether diamine acetates which are
20 used in lubricant compositions in combination with alcoholic hydrotropes used to enhance physical stability.

Weber et al., U.S. Patent No. 5,062,978 also discloses aqueous lubricant compositions based upon
25 fatty alkyl amines which are useful in conveyor belt operations, especially in the transport of bottles.

Schapira, Published European Patent Application No. 0,533,522 A1 discloses lubricant compositions comprising branched saturated or
30 unsaturated C_6 to C_{21} alkyl ether amines and diamines. The lubricant compositions are useful in conveyor



operations and may also comprise a surfactant, and alcohol solvent.

An additional precipitate problem occurs with the formation of a black precipitate which occurs during the production of certain foods. This black precipitate most often occurs during the production, processing and bottling of carbonated beverages such as beer. In the past, this precipitate has formed to varying degrees in given applications. The precipitate is believed to result from metal on metal wear, metal corrosion, and the interaction of certain food soils, (otherwise present in the processing environment) with the lubricant used in the application.

Hence a need still exists for an antimicrobial lubricant for use on all packaging materials and conveyor surfaces, which provides improved metal on metal lubricity with corrosion inhibition properties.

Summary of the Invention

In accordance with a first aspect of the invention, there is provided a lubricant concentrate composition having an effective lubricating amount of amine compound of the formula,

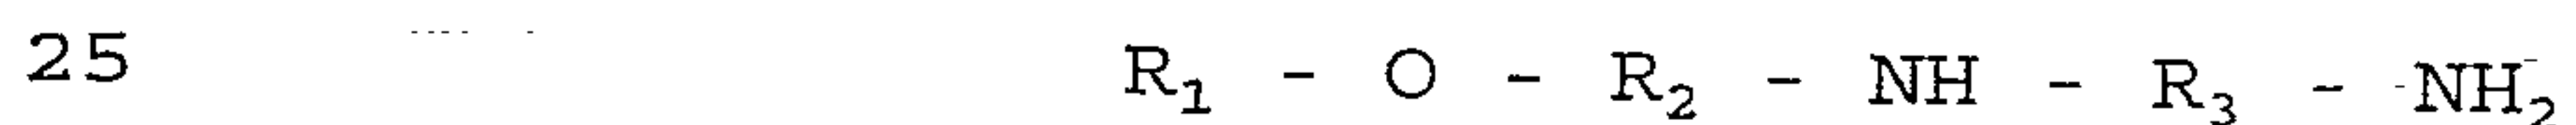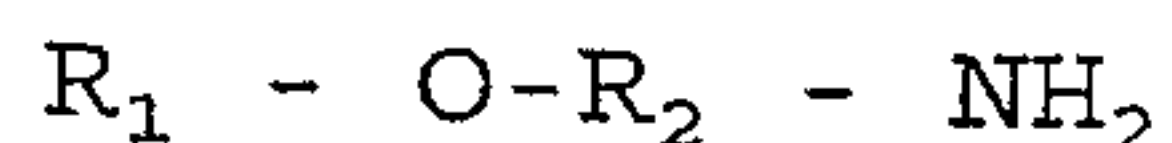

and mixtures thereof

wherein R_1 may be a linear saturated or unsaturated $C_6 - C_{18}$, R_2 may be a linear or branched $C_1 - C_8$ alkyl, and R_3 may be a linear or branched $C_1 - C_8$ alkyl. The concentrate contains a corrosion inhibitor and may also contain a surfactant in an amount effective to provide detergency to the concentrate upon dilution

and use, and an acid in an amount effective to solubilize the amine. Optionally, the concentrate may also comprise a hydrotrope for product stability.

The invention also provides a lubricant use
5 solution resulting from dilution of this concentrate, with the amine compound present in a concentration ranging from about 10 ppm to 10000 ppm.

In accordance with another aspect of the invention there is provided a method of lubricating a
10 conveyor system with a use solution of the lubricant concentrate composition of the invention.

The invention is a lubricant comprised of linear alkyl ether amines and corrosion inhibitors. The linear alkyl ether amine lubricants of the invention
15 promote lubricity and solubility in aqueous systems in the presence of ions and beverage soil, and remain in solution over a wide pH range. The lubricants of the invention remain stable and substantially unreacted with free anions and food soil present in the system.
20 Furthermore, the linear alkyl ether amines of the invention negate the need for alcohol type solvents to maintain physical stability of the concentrate. Compositions of the invention also provide reduced metal corrosion and improved metal lubricity. The claimed
25 invention also provides good gliding action at low dilution rates for polyethylene terephthalate (PET), glass, and metal surfaces. Further, the lubricants of the invention also provide antimicrobial efficacy on non-food contact surfaces providing a bacterial
30 reduction of 99.9 within five minutes.


Detailed Description of the Preferred Embodiment

The invention is a lubricant concentrate composition and use solution. The concentrate may be a solid or a liquid. The compositions of the invention include linear alkyl ether amine compounds which provide lubricity, antimicrobial character, as well as a reduction in the formation of various precipitates which often occur in the environment of use. Compositions of the invention also include corrosion inhibitors, detergency agents, an acid source, and optional hydrotropes, among other constituents. The invention also includes methods of using the claimed invention.

A. The Alkyl Ether Amine Compounds

The lubricant of the invention comprises an amine compound. The amine compound functions to enhance compositional lubricity, further antimicrobial character, and reduce or eliminate the formation of various precipitates resulting from the dilution of water and/or contaminants on the surface of application.

The amine compounds of the invention may comprise any number of species. Preferably, the amine compound is an alkyl ether amine compound of the formula,

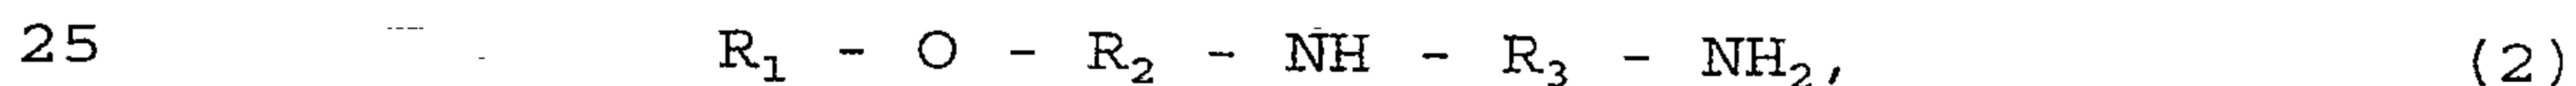

and mixtures thereof

wherein R_1 may be a linear saturated or unsaturated $C_6 - C_{18}$ alkyl, R_2 may be a linear or branched $C_1 - C_8$ alkyl, and R_3 may be a linear or branched $C_1 - C_8$ alkyl.

More preferably, R_1 is a linear $C_{12} - C_{16}$ alkyl; R_2 is a $C_2 - C_6$ linear or branched alkyl; and R_3 is a linear or branched $C_2 - C_6$ alkyl.

Preferred compositions of the invention
5 include linear alkyl ether amine compounds of formulas (1) and (2) wherein R_1 is $C_{12} - C_{16}$, R_2 is C_3 and R_3 is C_3 .

When the amine compound used is an amine of formula (1) and/or (2), R_1 is either a linear alkyl $C_{12} - C_{16}$ or a mixture of linear alkyl $C_{10} - C_{12}$ and $C_{14} - C_{16}$.

10 Overall the linear alkyl ether amine compounds used in the composition of the invention provide lower use concentrations, upon dilution, with enhanced lubricity. The amount of the amine compound in the concentrate generally ranges from about 0.1 wt-% to 90
15 wt-%, preferably about 0.25 wt-% to 75 wt-%, and more preferably about 0.5 wt-% to 50 wt-%.

The amine materials are commercially available from Tomah Products Incorporated as PA-19, PA-1618, PA-1816, DA-1618, DA-18, DA-19, DA-1816, and the like.


20 The use dilution of the concentrate is preferably calculated to get disinfectant or sanitizing efficacy in the intended application of use. Accordingly, the active amine compound concentration in the composition of the invention ranges from about 10
25 ppm to 10000 ppm, preferably from about 20 ppm to 7500 ppm, and most preferably about 40 ppm to 5000 ppm.

B. Corrosion Inhibitors

The concentrate and use dilution compositions of the invention also include a corrosion inhibitor.
30 Useful corrosion inhibitors include polycarboxylic acids such as short chain carboxylic diacids, triacids, as well as phosphate esters and combinations thereof.


Useful phosphate esters include alkyl phosphate esters, monoalkyl aryl phosphate esters, dialkyl aryl phosphate esters, trialkyl aryl phosphate esters, and mixtures thereof such as Emphos PS 236 commercially available from Witco Chemical Company.

More specifically, the esterified alkyl phosphoric acids or phosphates correspond to the general formula (3):

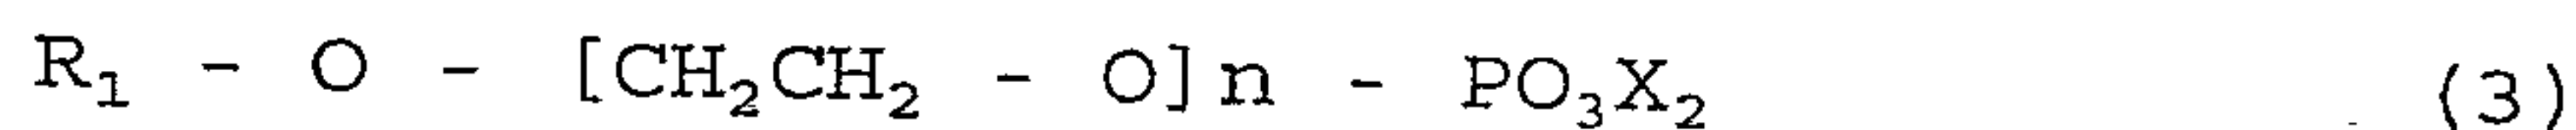

in which R_1 is a linear or branched saturated primary alkyl group, C_8 to C_{12} , X is hydrogen and/or an alkali metal, and n is an integer in the range from about 3 to 10.

The esterified alkyl aryl phosphoric acids or phosphates correspond to the general formula (4):

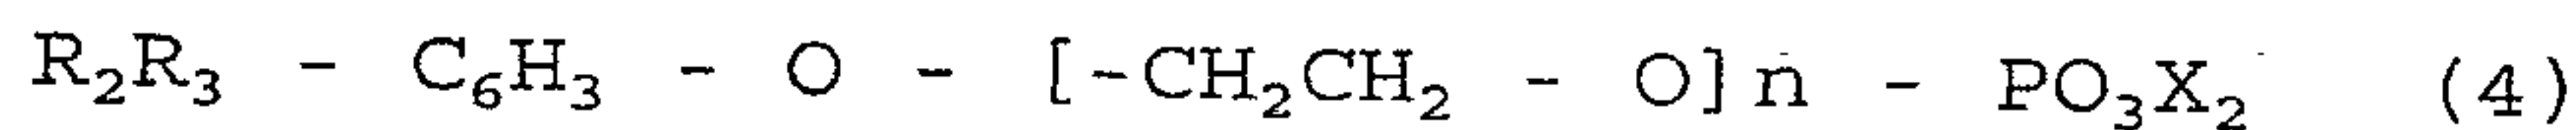

in which R_2 is linear or branched saturated primary alkyl groups, C_8 to C_{10} , R_3 is hydrogen, or linear or branched saturated primary alkyl groups, C_8 or C_{10} , X is hydrogen and/or an alkali metal, and n is an integer in the range from about 4 to about 10.

Other useful corrosion inhibitors include the triazoles, such as benzotriazole, tolyltriazole and mercaptobenzothiazole, and in combinations with phosphonates such as 1-hydroxyethylidene-1, 1-diphosphonic acid, and surfactants such as oleic acid diethanolamide and sodium cocoamphohydroxy propyl sulfonate, and the like.

In accordance with the invention, the preferred corrosion inhibitors are polycarboxylic acids such as dicarboxylic acids. The acids which are preferred include adipic, glutaric, succinic, and

mixtures thereof. The most preferred is a mixture of adipic, glutaric and succinic acid, which is a raw material sold by BASF under the name SOKALAN® DCS.

The corrosion inhibitors concentration in the composition range from 0.05% to 25% and, preferably, from 0.1% to 20%, in the concentrate. In one preferred aspect, the concentrate comprises from about 1 wt-% to 6 wt-% of corrosion inhibitor and comprises the Sokalan® DCS diacid mixture.

10 C. Neutralizing Agents

Generally, a neutralizing agent may also be used to provide an effective pH between about 5 and 10 in both the concentrate and use solution.

Exemplary acids include organic and inorganic acids. Inorganic acids useful in the composition of the invention include hydrochloric acid, phosphoric acid, hydrofluoric acid, sulfuric acid, nitric acid, hydrobromic acid, and sulfamic acid, among others.

Organic acids useful in the invention include acetic acid, hydroxyacetic acid, gluconic acid, lactic acid, benzoic acid, C₈-C₂₀ saturated and unsaturated fatty acids, such as oleic acid, and mixtures thereof.

The concentration of acid should be adequate and effective to solubilize and stabilize the various constituents and the concentrate and use dilution compositions of the invention.

D. Surfactants

The lubricant compositions of the invention optionally, but preferably, may further include a surfactant. The surfactant functions as an adjuvant to increase detergency and lubricity. Compounds which may be used as surfactants in the invention include,

nonionic surfactants, amphoteric surfactants, anionic surfactants, and cationic surfactants, among other compounds.

Anionic surfactants are generally those compounds containing a hydrophobic hydrocarbon moiety and a negatively charged hydrophilic moiety. Typical commercially available products provide either a carboxylate, sulfonate, sulfate or phosphate group as the negatively charged hydrophilic moiety. Particularly suitable anionic surfactants for use in the lubricant composition of the invention are the phosphate esters. Broadly, any of the commercially available anionic surfactants may be usefully employed in the lubricant composition of the invention.

Nonionic surfactants are generally hydrophobic compounds which bear essentially no charge and exhibit a hydrophilic tendency due to the presence of oxygen in the molecule. Nonionic surfactants encompass a wide variety of polymeric compounds which include specifically, but not exclusively, ethoxylated alkylphenols, ethoxylated aliphatic alcohols, ethoxylated amines, ethoxylated ether amines, carboxylic esters, carboxylic amides, and polyoxyalkylene oxide block copolymers.

Particularly suitable nonionic surfactants for use in the lubricant composition of the invention are the alkoxylated (preferably ethoxylated) alcohols having the general formula $R^{10}O((CH_2)_mO)_n$ wherein R^{10} is an aliphatic group having from about 8 to about 24 carbon atoms, m is a whole number from 1 to about 5, and n is a number from 1 to about 40 which represents the average number of ethyleneoxide groups on the molecule.

Cationic surfactants are also useful in the invention and may also function as an additional antimicrobial. Typical examples include quaternary ammonium chloride surfactants such as n-alkyl (C_{12-18}) dimethyl benzyl ammonium chloride, n-alkyl (C_{14-18}) dimethyl benzyl ammonium chloride, n-tetradecyl dimethyl benzyl ammonium chloride monohydrate, n-alkyl (C_{12-14}) dimethyl 1-naphthylmethyl ammonium chloride.

Amphoteric surfactants, surfactants containing both an acidic and a basic hydrophilic group can be used in the invention. Amphoteric surfactants can contain the anionic or cationic group common in anionic or cationic surfactants and additionally can contain either hydroxyl or other hydrophilic groups that enhance surfactant properties. Such amphoteric surfactants include betaine surfactants, sulfobetaine surfactants, amphoteric imidazolinium derivatives and others.

In the concentrate, the surfactant concentration generally ranges from about 0.01 wt-% to 50 wt-%, and preferably from about 0.1 wt-% to 20 wt-%. More preferably, the surfactant concentration ranges from about 1 to 10 wt-% and the surfactant is a nonionic alcohol ethoxylate such as Neodol 25-7 from Shell Chemical.

25 E. Hydrotrope

The lubricant composition of the invention may optionally include an effective amount of a hydrotrope for viscosity control and cold temperature stability of the concentrate.

30 A variety of compatible hydrotropes are available for use in the lubricant composition including monofunctional and polyfunctional alcohols as well

glycol and glycol ether compounds. Those which have been found most useful include alkyl alcohols such as, for example, ethanol, isopropanol, and the like. Polyfunctional organic alcohols include glycerol, 5 hexylene glycol, polyethylene glycol, propylene glycol, sorbitol and the like.

The preferred hydrotropes are di-functional alcohols such as alkyl glycols. One compound which has found heightened efficacy in stabilization of the 10 concentrate and its use solution is hexylene glycol. Generally, the concentration of the hydrotrope ranges from about 0.1 to 40 wt-%, and preferably about 1 to 25 wt-% in the concentrate. In one of the more preferred aspects of the invention, the hydrotrope is present in a 15 concentration ranging from about 3 wt-% to 10 wt-% and comprises hexylene glycol.

WORKING EXAMPLES

20

The following Working Examples illustrate the various properties, characteristics, and embodiments of the invention. However, these are not intended to be limiting of the claimed invention:

25

Example 1: Friction and Wear Testing

Lubricant concentrates for friction and wear testing were prepared as set forth in Table 1, by combining soft water with the hydrotrope and acid, heating to 120°F, and adding the remaining raw materials 30 with mixing. Use solutions of these concentrates were made by combining 1000 parts tap water (5-6 grains hardness) with 2.5 parts concentrate to yield 0.25% solutions.

TABLE 1

Formulas Prepared for Friction and Wear Testing

Raw Material	1A	1B	1C	1D
	wt-%			
C12/C14 alkyloxypropyl-1, 3-diamino propane	9.0	8.0	8.0	
N-oleyl-1, 3-diamino propane				4.0
N-coco-1, 3-diamino propane				4.0
Glutaric/Adipic/Succinic Acid ¹	4.0			
Acetic Acid			1.8	1.8
Phosphate Ester ²		18.2		
Hydrotrope	7.0	10.0	10.0	10.0
Nonionic Surfactant	7.0	10.0	10.0	10.0
Soft Water	73.0	53.8	70.2	70.2

¹Diacid mixture available from BASF Corporation as Sokalan DCS.

5 ²Emphos PS 236 phosphate ester available from Witco Chemical.

A Falex Friction and Wear Machine (Faville-LeVally Corp., Model: Pin and V-Block) fitted with mild steel v-blocks (1137) and stainless steel pins (302) was employed to determine the fail point of lubricant use solutions. The solutions were circulated over the v-block and pin assembly at a rate of 100 ml/min. Meanwhile, pressure on the falex was set to 50 psi for 5 minutes, then increased to 200, 250, 300, etc. at 5 minute intervals until such time as grossly erratic torque readings or sudden loss of pressure indicated galling of the pin and/or v-blocks and hence failure. The pressure was re-set to the desired level at one minute intervals in the event that minor loss of pressure occurred. The torque, pressure, and wear as measured by tooth adjustments, were recorded each minute.

TABLE 2Friction and Wear Fail Point Determination

Formula	Amine Type	Acid Source	pH	Fail Point (psi)	Elapsed Time (min:sec)
1A ¹	Linear Ether Diamines	Diacid Mixture	6.8	330	20:00
1B ¹	Linear Ether Diamines	Phosphate Ester	7.3	200	6:45
1C	Linear Ether Diamines	Acetic	7.6	190	5:00
1D	Alkyl Diamines	Acetic	7.6	200	5:30

¹Formulas represent the teaching of the current invention.

5

Neutralization of the linear ether amines with a combination of diacids results in a reduction in friction and wear between mild steel and stainless steel. Both commercial and experimental lubricants utilizing acetic acid neutralization fail shortly after the five minute equilibration at 50 psi.

10

Example 2: Corrosion Inhibition

Lubricant concentrates were prepared as set forth in Table 3 by combining soft water with the specified acid and hydrotrope, warming to 120°F, and adding the remaining raw materials with mixing.

15

TABLE 3Formulas Prepared for Mild Steel Corrosion Testing

Raw Material	2A	2B	2C	2D	2E
	wt-%				
Tetradecyloxypropyl-1, 3-diamino propane	6.0	6.0	6.0		
C ₁₂ /C ₁₅ alkyloxypropyl-1, 3-diamino propane				6.0	6.0
Glutaric/Adipic/Succinic Acid ¹	4.0				
Acetic Acid		2.2	1.1		
Glycolic Acid				4.0	4.0
Phosphate Ester ²			9.1		
Hydrotrope	3.0	3.0	3.0	5.0	5.0
Nonionic Surfactant	10.0	10.0	10.0	10.0	10.0
Corrosion Additive ³				5.0	
Soft Water	77.0	78.8	70.8	70.0	75.0

¹Diacid mixture available from BASF Corporation as Solkalan DCS.

5 ²Phosphate ester Emphos PS 236 available from Witco.

³Corrosion additive referenced below.

To test mild steel corrosion inhibition for lubricant concentrates containing various neutralizing agents, 0.25% use solutions were prepared with 1000 parts tap water containing 5-6 grains hardness, and the use solution pH was adjusted to 9 with dilute KOH. Pre-cleaned 1x3 inch cold rolled steel (#1018) panels were immersed in the use solution such that the use solution covered half of the coupon. Corrosion of the panel and use solution clarity were assessed visually after 24 hours, and rated according to the description listed below. All testing was completed in duplicate. The samples were evaluated on the basis of the following scale.

<u>Rank</u>	<u>Solution Appearance</u>	<u>Panel Corrosion</u>
1	Solution unchanged	No visible signs of corrosion

2	Solution slightly discolored	Very slight corrosion, 1-5% of panel surface area showing corrosion.
5		
3	Solution discolored	Moderate corrosion, 6-10% of panel surface area showing corrosion.
10		
4	Solution is dark amber	Heavy corrosion, 11- 90% of panel surface area showing corrosion.
15		

TABLE 4

20 Mild Steel Corrosion Testing Results for Formulas 2A, 2B, and 2C
(0.25% Solutions Adjusted to pH 9, Ranked after 24 Hours)

Formula	Constituent	Corrosion Rating With 2 Readings	
		Solution Clarity	Panel Appearance
2A	Glutaric/Adipic/Succinic	2,2	2,1
2B	Acetic	3,3	3,2
2C	Phosphate Ester/Acetic	--,--	2,3

25 To test mild steel corrosion inhibition for
lubricant concentrates containing various corrosion
inhibitors, 0.5% use solutions were prepared from
Formulas 2D and 2E. For this evaluation the solutions
were prepared by combining 5 parts concentrate with 1000
parts tap water containing 5-6 grains hardness, and the
solution pH adjusted to 8 with dilute KOH. Pre-cleaned
30 1x3 cold rolled steel (#1018) panels were immersed in
the use solution such that the use solution covered half
of the coupon. Corrosion of the panel and use solution
clarity were assessed visually after 48 hours, and
rated. All testing was completed in duplicate.

TABLE 5

Mild Steel Corrosion Testing Results for Formulas 2D and 2E
(0.50% Solutions Adjusted to pH 8, Ranked after 48 Hours)

Formula	Corrosion Additive	Corrosion Rating with 2 Readings	
		Solution Clarity	Panel Appearance
2D	Adipic Acid	1,1	2,2
2D	D-isoascorbic Acid	2,2	1,2
2D	Lactic Acid	3,3	1,1
2D	Malic Acid	2,2	1,2
2D	Oleic acid diethanolamide ¹	3,3	1,1
2D	Sodium cocoamphophydroxy propyl sulfonate ²	3,3	1,1
2E	none	3,3	2,2

5 ¹Alkamide WRS-166 sold by Rhone Poulenc

²Miranol CS sold by Rhone Poulenc.

10 Various corrosion inhibitors and especially the diacids provide corrosion protection against mild steel in the linear alkyl ether amine formulations. Further, it is evident that the acidic species can be incorporated for the dual role of corrosion inhibitor and amine neutralizing agent, with a benefit to production cost and efficiency.

15 The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, 20 the invention resides in the claims hereinafter appended.

1. A lubricant concentrate composition comprising:

- a. an effective lubricating amount of one or more amine compounds each of said amine compounds having a formula selected from the group consisting of,



and mixtures thereof

wherein R_1 is a linear saturated or unsaturated $C_6 - C_{18}$ alkyl, R_2 is a linear or branched $C_1 - C_8$ alkylene, and R_3 is a linear or branched $C_1 - C_8$ alkylene;

- b. an anticorrosive effective amount of a corrosion inhibitor, said corrosion inhibitor comprising a dicarboxylic acid, a tricarboxylic acid or mixture thereof; and
- c. a deterative amount of surfactant effective to provide detergency to the composition, said surfactant selected from the group consisting of an anionic surfactant, a nonionic surfactant, a cationic surfactant, an amphoteric surfactant, and mixtures thereof

wherein said concentrate has a pH ranging from about 5 to 10 and can be diluted to produce a lubricant having a pH greater than 7.

2. An aqueous lubricant composition comprising a major portion of an aqueous diluent, from about 10 ppm to 10000 ppm of at least one amine compounds having a formula selected from the group consisting of



and mixtures thereof

wherein R_1 is a linear saturated or unsaturated $C_6 - C_{18}$ alkyl, R_2 is a linear or branched $C_1 - C_8$ alkylene, and R_3 is a linear or branched $C_1 - C_8$ alkylene; an anticorrosive effective amount of a corrosion inhibitor, said corrosion inhibitor comprising a dicarboxylic acid, a tricarboxylic acid or mixture thereof; a deterative amount of surfactant effective to provide detergency upon use,

wherein said surfactant is selected from the group consisting of an anionic surfactant, a nonionic surfactant, a cationic surfactant, an amphoteric surfactant, and mixtures thereof, wherein said lubricant has a pH of from about 7 to 10.

3. The composition of claim 1, wherein said amine compound is present in a concentration of about from 0.1 wt-% to 90 wt-%.

4. The composition of claim 1, wherein said amine compound is a monoamine compound and R_1 is a linear $C_{12} - C_{16}$ group, and R_2 is a $C_2 - C_6$ alkylene group.

10

5. The composition of claims 1 or 2, wherein more than one amine compound is present in said concentrate, at least one of said amine compounds is a monoamine compound, R_1 is selected from the group consisting of a $C_{10} - C_{12}$ alkyl group, a $C_{14} - C_{16}$ alkyl group, and mixtures thereof; and R_2 is a $C_2 - C_6$ alkylene group.

6. The composition of claims 1 or 2, wherein said amine compound is a diamine compound, R_1 is a $C_{12} - C_{16}$ alkyl group, R_2 is a $C_2 - C_6$ alkylene group, and R_3 is a $C_2 - C_6$ alkylene group.

20

7. The composition of claims 1 or 2, wherein more than one amine compound is present in said concentrate, at least one of said amine compounds is a diamine compound, R_1 is selected from the group consisting of a $C_{10} - C_{12}$ alkyl group, a $C_{14} - C_{16}$ alkyl group, and mixtures thereof; R_2 is a $C_2 - C_6$ alkylene group and R_3 is a $C_2 - C_6$ alkyl group.

8. The composition of claims 1 or 2, additionally comprises a hydrotrope.
9. The composition of claim 8, wherein said hydrotrope is selected from the group consisting of glycols, alcohols, glycol ethers, and mixtures thereof.
10. The composition of claim 1 wherein said composition additionally comprises a hydrotrope and said hydrotrope comprises hexylene glycol, present in a concentration of from about 0.1 wt-% to 40 wt-%.
11. The composition of claim 1, wherein said corrosion inhibitor comprises a dicarboxylic acid present in a concentration of from about 0.05 wt-% to 25 wt-%.
12. The composition of claim 11, wherein said dicarboxylic acid is selected from the group consisting of glutaric acid, adipic acid, succinic acid and mixtures thereof.
13. The composition of claim 1, wherein said surfactant comprises a nonionic surfactant present in a concentration of from about 0.01 wt-% to 50 wt-%.
14. The composition of claim 13, wherein said nonionic surfactant has from about 1 to 40 moles of ethoxylation.

15. The composition of claim 1, wherein said concentrate is a solid.

16. The composition of claim 1, wherein said concentrate is a liquid.

17. The composition of claims 1 or 2, additionally comprising a neutralizing agent, wherein said neutralizing agent comprises an acid, said acid selected from the group consisting of an organic acid, an inorganic acid, and mixtures thereof.

18. The composition of claims 1 or 2, wherein said concentrate has a sanitizing level
10 of antimicrobial efficacy sufficient to provide a bacterial reduction of 99.9 percent within five minutes.

19. The composition of claim 2, wherein said amine compound is present in a concentration of about 40 ppm to 5000 ppm.

20. The composition of claim 2, additionally comprises a hydrotrope.

21. The composition of claim 20, wherein said hydrotrope is selected from the group consisting of glycols, alcohols, glycol ethers, and mixtures thereof.

20

22. The composition of claim 21, wherein said hydrotrope comprises hexylene glycol, present in a concentration of from about 0.001 wt-% to 1 wt-%.


23. The lubricant of claim 2, wherein said corrosion inhibitor comprises a dicarboxylic acid present in a concentration of from about 1 ppm to 10000 ppm.

24. The lubricant of claim 23, wherein said dicarboxylic acid is selected from the group consisting of glutaric acid, adipic acid, succinic acid and mixtures thereof.

25. The composition of claim 2, wherein said surfactant comprises a nonionic surfactant present in a concentration of from about 0.0005 wt-% to 1 wt-%.

26. The composition of claim 25, wherein said nonionic surfactant has from about 1 to 40 moles of ethoxylation.

27. A method of lubricating a conveyor system using the diluted lubricant concentrate composition of claims 1 to 18 comprising an effective lubricating amount of one or more amine compounds, each of said amine compounds having a formula selected from the group consisting of,

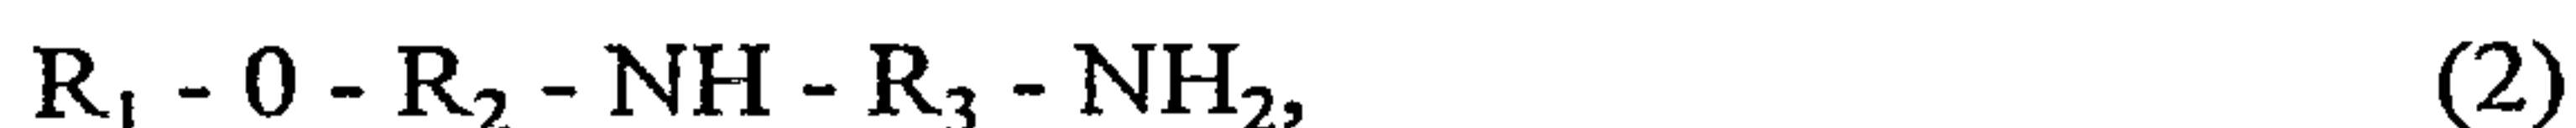

and mixtures thereof

wherein R_1 is a linear saturated or unsaturated $C_6 - C_{18}$ alkyl, R_2 is a linear or branched $C_1 - C_8$ alkylene, and R_3 is a linear or branched $C_1 - C_8$ alkylene; an anticorrosive effective amount of a corrosion inhibitor, said corrosion inhibitor comprising a dicarboxylic acid, a tricarboxylic acid or mixture thereof; a deterative amount of surfactant effective to provide detergency upon dilution and use said surfactant selected from the group consisting of an anionic surfactant, a cationic surfactant, a nonionic surfactant, an amphoteric surfactant, and mixtures thereof; and wherein said composition has a pH of from about 7 to 10, said method comprising the steps of:

- a. formulating the lubricant concentrate composition to have from about 0.1 wt-% to 90 wt-% of said amine compound;
- b. diluting said lubricant concentrate composition with a major portion of an aqueous diluent to form a diluted lubricant comcentrate composition; and
- c. applying said lubricant concentrate composition to the intended surface of use.