



(22) Date de dépôt/Filing Date: 2013/02/28

(41) Mise à la disp. pub./Open to Public Insp.: 2013/09/09

(30) Priorité/Priority: 2012/03/09 (US13/416,056)

(51) Cl.Int./Int.Cl. *C10J 3/30* (2006.01),
C01B 3/32 (2006.01)


(71) Demandeur/Applicant:
GENERAL ELECTRIC COMPANY, US

(72) Inventeurs/Inventors:
DEPUY, RICHARD ANTHONY, US;
MAJMUDAR, JINMESH PRANAV, IN;
MALL, OMPRAKASH, IN;
VENKATRAMAN, VIGNESH, IN;
DSOUZA, AVISH, IN

(74) Agent: CRAIG WILSON AND COMPANY


(54) Titre : GAZEIFICATEUR DE BIOMASSE

(54) Title: BIOMASS GASIFIER

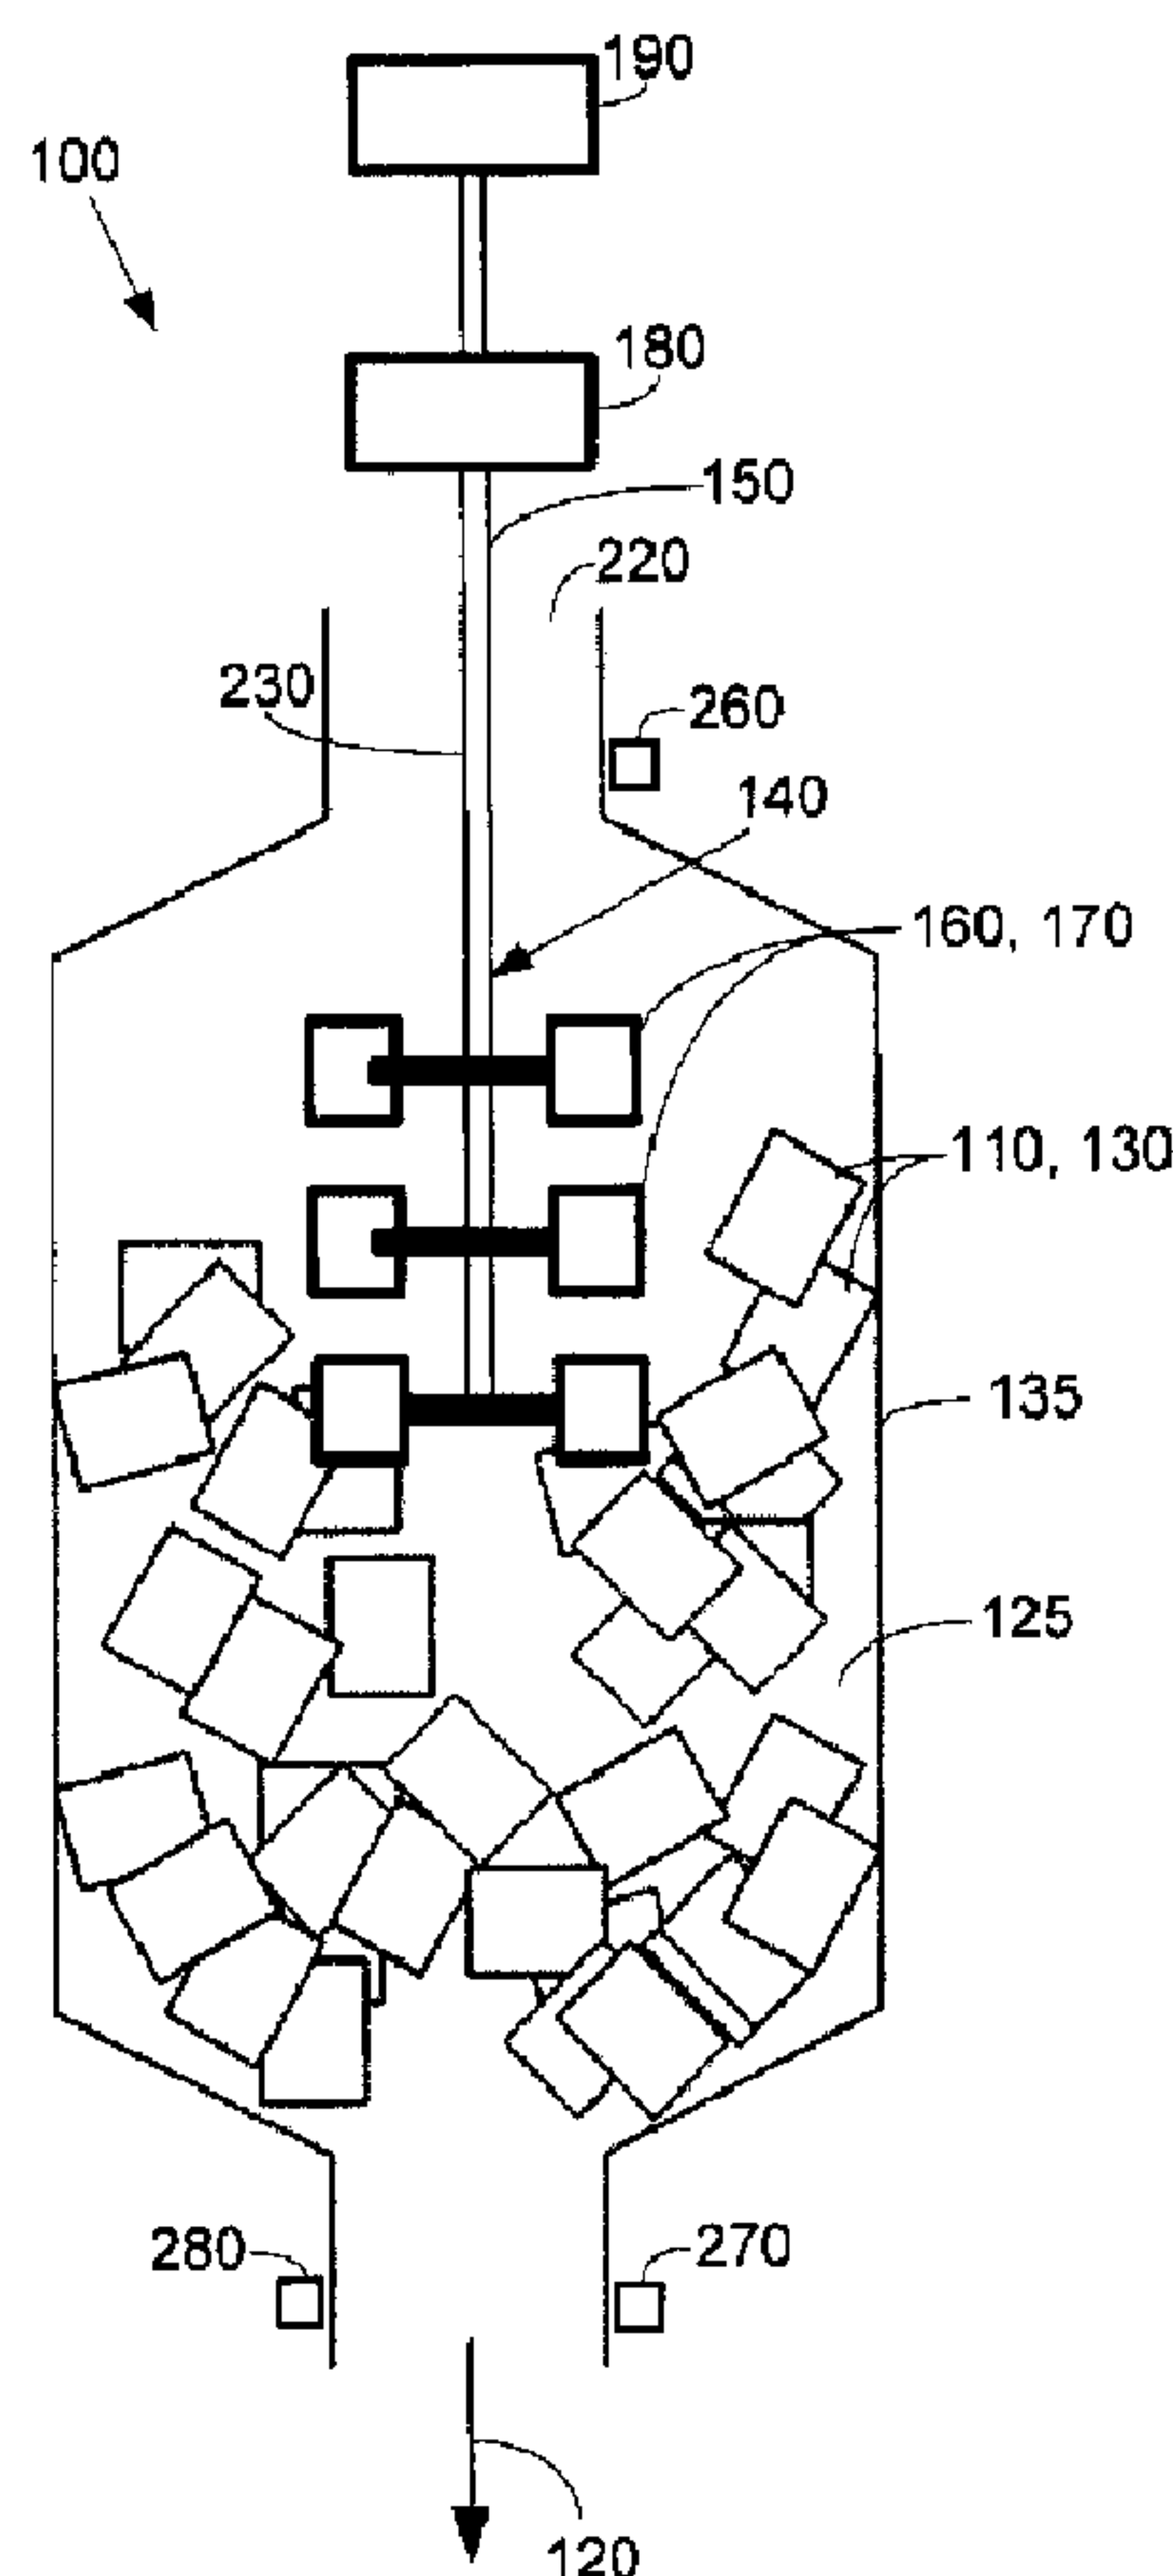

(57) Abrégé/Abstract:

The present application thus provides a gasifier for use in converting a feedstock material into a syngas. The gasifier may include an outer chamber, a reaction zone positioned within the outer chamber, and a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone without bridging.

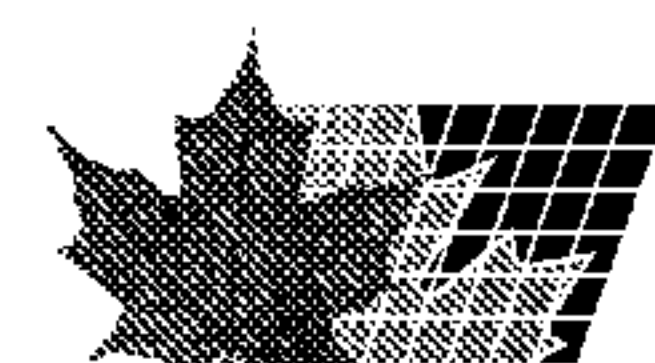

BIOMASS GASIFIER

ABSTRACT

The present application thus provides a gasifier for use in converting a feedstock material into a syngas. The gasifier may include an outer chamber, a reaction zone positioned within the outer chamber, and a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone without bridging.

BIOMASS GASIFIER

TECHNICAL FIELD

[01] The present application and the resultant patent relate generally to power generation systems and more particularly relate to a gasifier with an internal disruption device so as to prevent the bridging of biomass and other types of feedstock materials therein.

BACKGROUND OF THE INVENTION

[02] In hydrocarbon gasification processes, solid fuels such as wood, agricultural wastes, and the like, are gasified to generate a gaseous fuel. Specifically, such gasification processes may convert a feedstock of biomass or other hydrocarbon into a gaseous mixture of carbon monoxide and hydrogen, i.e., a synthetic gas or a syngas referred to as a producer gas, by reaction with oxygen and steam in a gasifier. These gases then may be cleaned, processed, and utilized as a fuel in an engine to produce electricity. In other systems, the producer gas may be used to generate power, to produce fuel for heating, or to generate chemical products such as Fisher Tropsch liquids and the like.

[03] Examples of such agricultural waste products include sugarcane and the like. Such biomass feedstock materials tend to be fibrous. As such, the biomass feedstock materials may tend to bridge across the interior of a gasifier when fed therein. Such a biomass bridge, when formed, may reduce the flow of the feedstock materials into the reaction zone and thus may have an impact on the output of the producer gas in terms of composition and flow rate.

[04] One known method of reducing the bridging of feedstock materials in a gasifier involves an operator physically poking the bridge of feedstock materials with a pole. The need for operator intervention, however, may expose the operator to higher than normal levels of reaction product gases as well as exposure to the hot surfaces of the gasifier.

254021

Moreover, the need of operator intervention generally is not detected until there is some degradation in the overall performance of the gasifier.

[05] There is thus a desire for an improved biomass gasifier. Preferably such an improved gasifier may prevent or limit the bridging of feedstock materials such as biomass materials so as to ensure a constant output of syngas without requiring manual operator intervention.

SUMMARY OF THE INVENTION

[06] The present application and the resultant patent thus may provide a gasifier for use in converting a feedstock material into a syngas. The gasifier may include an outer chamber, a reaction zone positioned within the outer chamber, and a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone without bridging.

[07] The present application and the resultant patent further may provide a method of operating a gasifier to produce a syngas. The method may include the steps of flowing a feedstock material into an outer chamber of the gasifier, maneuvering a disruption device within the outer chamber to prevent the bridging of the feedstock material therein, and flowing the feedstock material into a reaction zone.

[08] The present application and the resultant patent further may provide a biomass gasifier for use in converting a feedstock material into a syngas. The biomass gasifier may include an outer chamber, a reaction zone positioned within the outer chamber, and a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone. The disruption device may include a shaft maneuvered by a drive device.

[09] These and other features and advantages of the present application and the resultant patent will become apparent to one of ordinary skill in the art upon review of the

254021

following detailed description when taken in conjunction with the several drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[010] Fig. 1 is a schematic diagram of an example of a power plant with a gasifier.

[011] Fig. 2 is a schematic diagram of a known gasifier with a bridge of feedstock materials therein.

[012] Fig. 3 is a schematic diagram of a gasifier with a disruption device as may be described herein.

[013] Fig. 4 is a schematic diagram of an alternative embodiment of a disruption device as may be described herein.

[014] Fig. 5 is a schematic diagram of an alternative embodiment of a disruption device as may be described herein.

[015] Fig. 6 is a schematic diagram of an alternative embodiment of a gasifier with a disruption device as may be described herein.

DETAILED DESCRIPTION

[016] Referring now to the drawings, in which like numerals refer to like elements throughout the several views, Fig. 1 shows a schematic diagram of a biomass gasification system 10. Only a high level description of the components of the biomass gasification system 10 related to the subject matter described herein is shown for the purpose of simplification. One of ordinary skill in the art will understand that the overall biomass gasification system 10 may have other configurations and may use many other types of components. The biomass gasification system 10 may be integrated with a power generation system 15.

[017] Generally described, the biomass gasification system 10 gasifies a biomass feedstock 20 to produce a treated producer gas 25. The producer gas 25 is a type of diluted syngas that may be produced by relatively low temperature gasification of biomass in the presence of air. The producer gas 25 may be directed to the power generation system 15 as a fuel source to generate power and the like. As an example, the treated producer gas 25 may be combusted within one or more gas engines and the like contained within the power generation system 15 to produce electricity. Other types of power generators also may be used herein. The treated producer gas 25 also may have a number of other uses, such as fuel for heating, or the production of Fisher Tropsch liquids, and so on.

[018] The biomass gasification system 10 may include a feedstock preparation unit 30 to prepare and condition the biomass feedstock 20. The conditioning may include selecting, sizing, and/or drying the biomass feedstock 20 as well as providing various types of additives. After preparation, the biomass feedstock 20 may be directed along with a source of air 35 to a biomass gasifier 40. As is shown, the biomass gasifier 40 may be an open air gasifier and the like. The biomass gasifier 40 may have an inlet 45 that enables the gasifier 40 to receive a substantially constant stream of the biomass feedstock 20 and the air 35. A series of reactions occur within the gasifier 40 including combustion of the biomass feedstock 20 and the air 35. The biomass feedstock 20 and the air 35 may be combusted at sub-stoichiometric fuel to air ratios to produce carbon monoxide (CO), hydrogen (H₂), carbon dioxide (CO₂), water (H₂O), and a hot char or hot ash bed. The gasifier 40 may include a number of air inlets 50 to promote this combustion. The gasifier 40 also may include an ash extraction system 55 configured to extract ash from the process.

[019] The gasifier 40 thus may produce a flow of the producer gas 25. The producer gas 25 may be forwarded to one or more processing devices 60 for cleaning and the like. These processing devices 60 may include a cyclone, one or more scrubbing units, a filtering system, and the like. The producer gas 25 then may be provided to the power

254021

generation system 15 or otherwise directed. Other components and other configurations may be used herein.

[020] Fig. 2 shows a schematic diagram of an example of the gasifier 40. As described above, the feedstock materials 20 tend to form a bridge of material 65 therein. This bridge of material 65 may prevent entry of further feedstock materials 20 such that the resultant flow of the producer gas 25 produced therein may be reduced or otherwise compromised.

[021] Fig. 3 shows an example of a gasifier 100 as may be described herein. The gasifier 100 may be used with the power generation system 15 or elsewhere. The gasifier 100 converts a feedstock material 110 into a producer gas 120 or other type of syngas and the like in any manner. In this example, the feedstock materials 110 may take the form of any type of biomass materials 130. Any other types of feedstock materials 110, however, may be used herein. Other component and other configurations may be used herein.

[022] The gasifier 100 may include a reaction zone 125 positioned within an outer chamber 135. The gasifier 100 also may include a disruption device 140 positioned within the outer chamber 135. The disruption device 140 may be any type of device or system that adequately disrupts the flow of the feedstock materials 110 when entering the gasifier 100 so as to prevent the creation of the feedstock bridge 65 similar to that described above. In the example of Fig. 3, the disruption device 140 may include a shaft 150 with a number of extensions 160 thereon. The shaft 150 may have any desired size, shape, or configuration. The extensions 160 may be in the form of a number of paddles 170 or any type of substantially horizontally extending structure. The paddles 170 or other types of the extensions 160 also may have any size, shape, or configuration. Any number of the paddles 170 or other types of the extensions 160 may be used herein in any orientation.

[023] The shaft 150 may be maneuvered within the outer chamber 135 by a drive device 180. The drive device 180 may include a conventional electrical motor and the like. The drive device 180 may rotate the shaft 150, shake the shaft 150, vibrate the shaft

254021

150, or impart any type of motion to the shaft 150 and hence the extensions 160 thereon. The gasifier 100 also may have an insertion device 190. The insertion device 190 also may include an electrical motor and the like. The insertion device 190 may insert and remove the disruption device 140 from the gasifier 100 in any orientation. Specifically, the disruption device 140 may be inserted manually or via the insertion device 190 and/or other types of insertion means. Alternatively, the disruption device 140 may be fixed within the gasifier 100. Other components and other configurations may be used herein.

[024] The disruption device 140 may use many different components and configurations. For example, Fig. 4 shows the disruption device 140 in the form of an extended spiral 200. The spiral 200 also may rotate, shake, vibrate, or otherwise be maneuvered therein to disrupt the creation of the bridge 80. Likewise, Fig. 5 shows the disruption device 140 in the form of an extended screw 210. As above, the extended screw 210 also may rotate, shake, vibrate, or otherwise be maneuvered therein to disrupt the creation of the bridge 80. Other components and other configurations may be used herein.

[025] The orientation of the disruption device 140 also may vary. For example, Fig. 3 shows the insertion of the disruption device 140 through an upper inlet 220 of the gasifier 100 in a substantially vertical orientation 230. Fig. 6, however, shows the insertion of the disruption device 140 via a sidewall 240 of the gasifier 100 in a substantially horizontal orientation 250. Insertion of the disruption device 140 from any direction or orientation thus may be used herein. Other components and other configurations also may be used herein.

[026] Operation of the disruption device 140 may be manually initiated or automatically initiated as part of a feedback loop. For example, a pressure drop across the gasifier 100 may be determined by an input pressure sensor 260 and an output pressure sensor 270 and similar types of devices. An increase in the pressure drop across the gasifier 100 as determined by the sensors 260, 270 may indicate an inadequate flow of the feedstock materials 110. Likewise, a flow sensor 280 and the like may be

positioned about an exit of the gasifier 100 or elsewhere. A decrease in the flow of the syngas 120 also may indicate an inadequate flow of the feedstock materials 110. Other types of sensors may be used herein with different types of control logic. Other components and other configurations may be used herein.

[027] The disruption device 140 thus prevents the bridge 65 of the feedstock materials 110 from forming within the gasifier 100. The disruption device 140 may rotate, shake, vibrate, or otherwise maneuver to ensure an adequate flow of the feedstock materials 110. As described above, the disruption device 140 may take many different forms, many different orientations, and many different forms of operation. By preventing the bridging of the feedstock materials 110, the gasifier 100 may provide a steady production of the producer gas 120 so as to ensure the steady operation of the overall power plant 15 and overall efficient power production. Moreover, manual operator intervention may be avoided herein.

[028] It should be apparent that the foregoing relates only to certain embodiments of the present application and the resultant patent. Numerous changes and modifications may be made herein by one of ordinary skill in the art without departing from the general spirit and scope of the invention as defined by the following claims and the equivalents thereof.

CLAIMS

We claim:

1. A gasifier for use in converting a feedstock material into a syngas, comprising:
an outer chamber;
a reaction zone positioned within the outer chamber; and
a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone without bridging.
2. The gasifier of claim 1, wherein the disruption device comprises a shaft.
3. The gasifier of claim 2, wherein the disruption device comprises a drive device to maneuver the shaft within the outer chamber.
4. The gasifier of claim 2, wherein the disruption device comprises an insertion device to insert and remove the disruption device from within the chamber.
5. The gasifier of claim 1, wherein the disruption device comprises one or more extensions.
6. The gasifier of claim 5, wherein the one or more extensions comprise one or more paddles.
7. The gasifier of claim 1, wherein the disruption device comprises an extended spiral.
8. The gasifier of claim 1, wherein the disruption device comprises an extended screw.
9. The gasifier of claim 1, wherein the outer chamber comprises an upper inlet and wherein the disruption device comprises a substantially vertical orientation.

10. The gasifier of claim 1, wherein the outer chamber comprises a sidewall and wherein the disruption device comprises a substantially horizontal orientation.

11. The gasifier of claim 1, further comprising an input pressure sensor and an output pressure sensor.

12. The gasifier of claim 1, further comprising a flow meter.

13. A method of operating a gasifier to produce a syngas, comprising:
flowing a feedstock material into an outer chamber of the gasifier;
maneuvering a disruption device within the outer chamber to prevent the bridging of the feedstock material therein; and
flowing the feedstock material into a reaction zone.

14. The method of claim 13, wherein the step of maneuvering the disruption device comprises rotating, shaking, and/or vibrating the disruption device within the outer chamber.

15. The method of claim 13, further comprising the steps of inserting and removing the disruption device from within the outer chamber.

16. A biomass gasifier for use in converting a feedstock material into a syngas, comprising:
an outer chamber;
a reaction zone positioned within the outer chamber; and
a disruption device maneuverable within the outer chamber to ensure a steady flow of the feedstock material into the reaction zone;
the disruption device comprising a shaft maneuvered by a drive device.

17. The biomass gasifier of claim 16, wherein the disruption device comprises an insertion device to insert and remove the disruption device from within the outer chamber.

254021

18. The biomass gasifier of claim 16, wherein the disruption device comprises one or more extensions attached to the shaft.

19. The biomass gasifier of claim 16, wherein the shaft comprises an extended spiral.

20. The biomass gasifier of claim 16, wherein the shaft comprises an extended screw.

Application number / Numéro de demande: 2807985

Figures: 4-5

Pages: _____

Unscannable items received with this application
(Request original documents in File Prep. Section on the 10th floor)

Documents reçu avec cette demande ne pouvant être balayés
(Commander les documents originaux dans la section de la préparation
des dossiers au 10^{ième} étage)

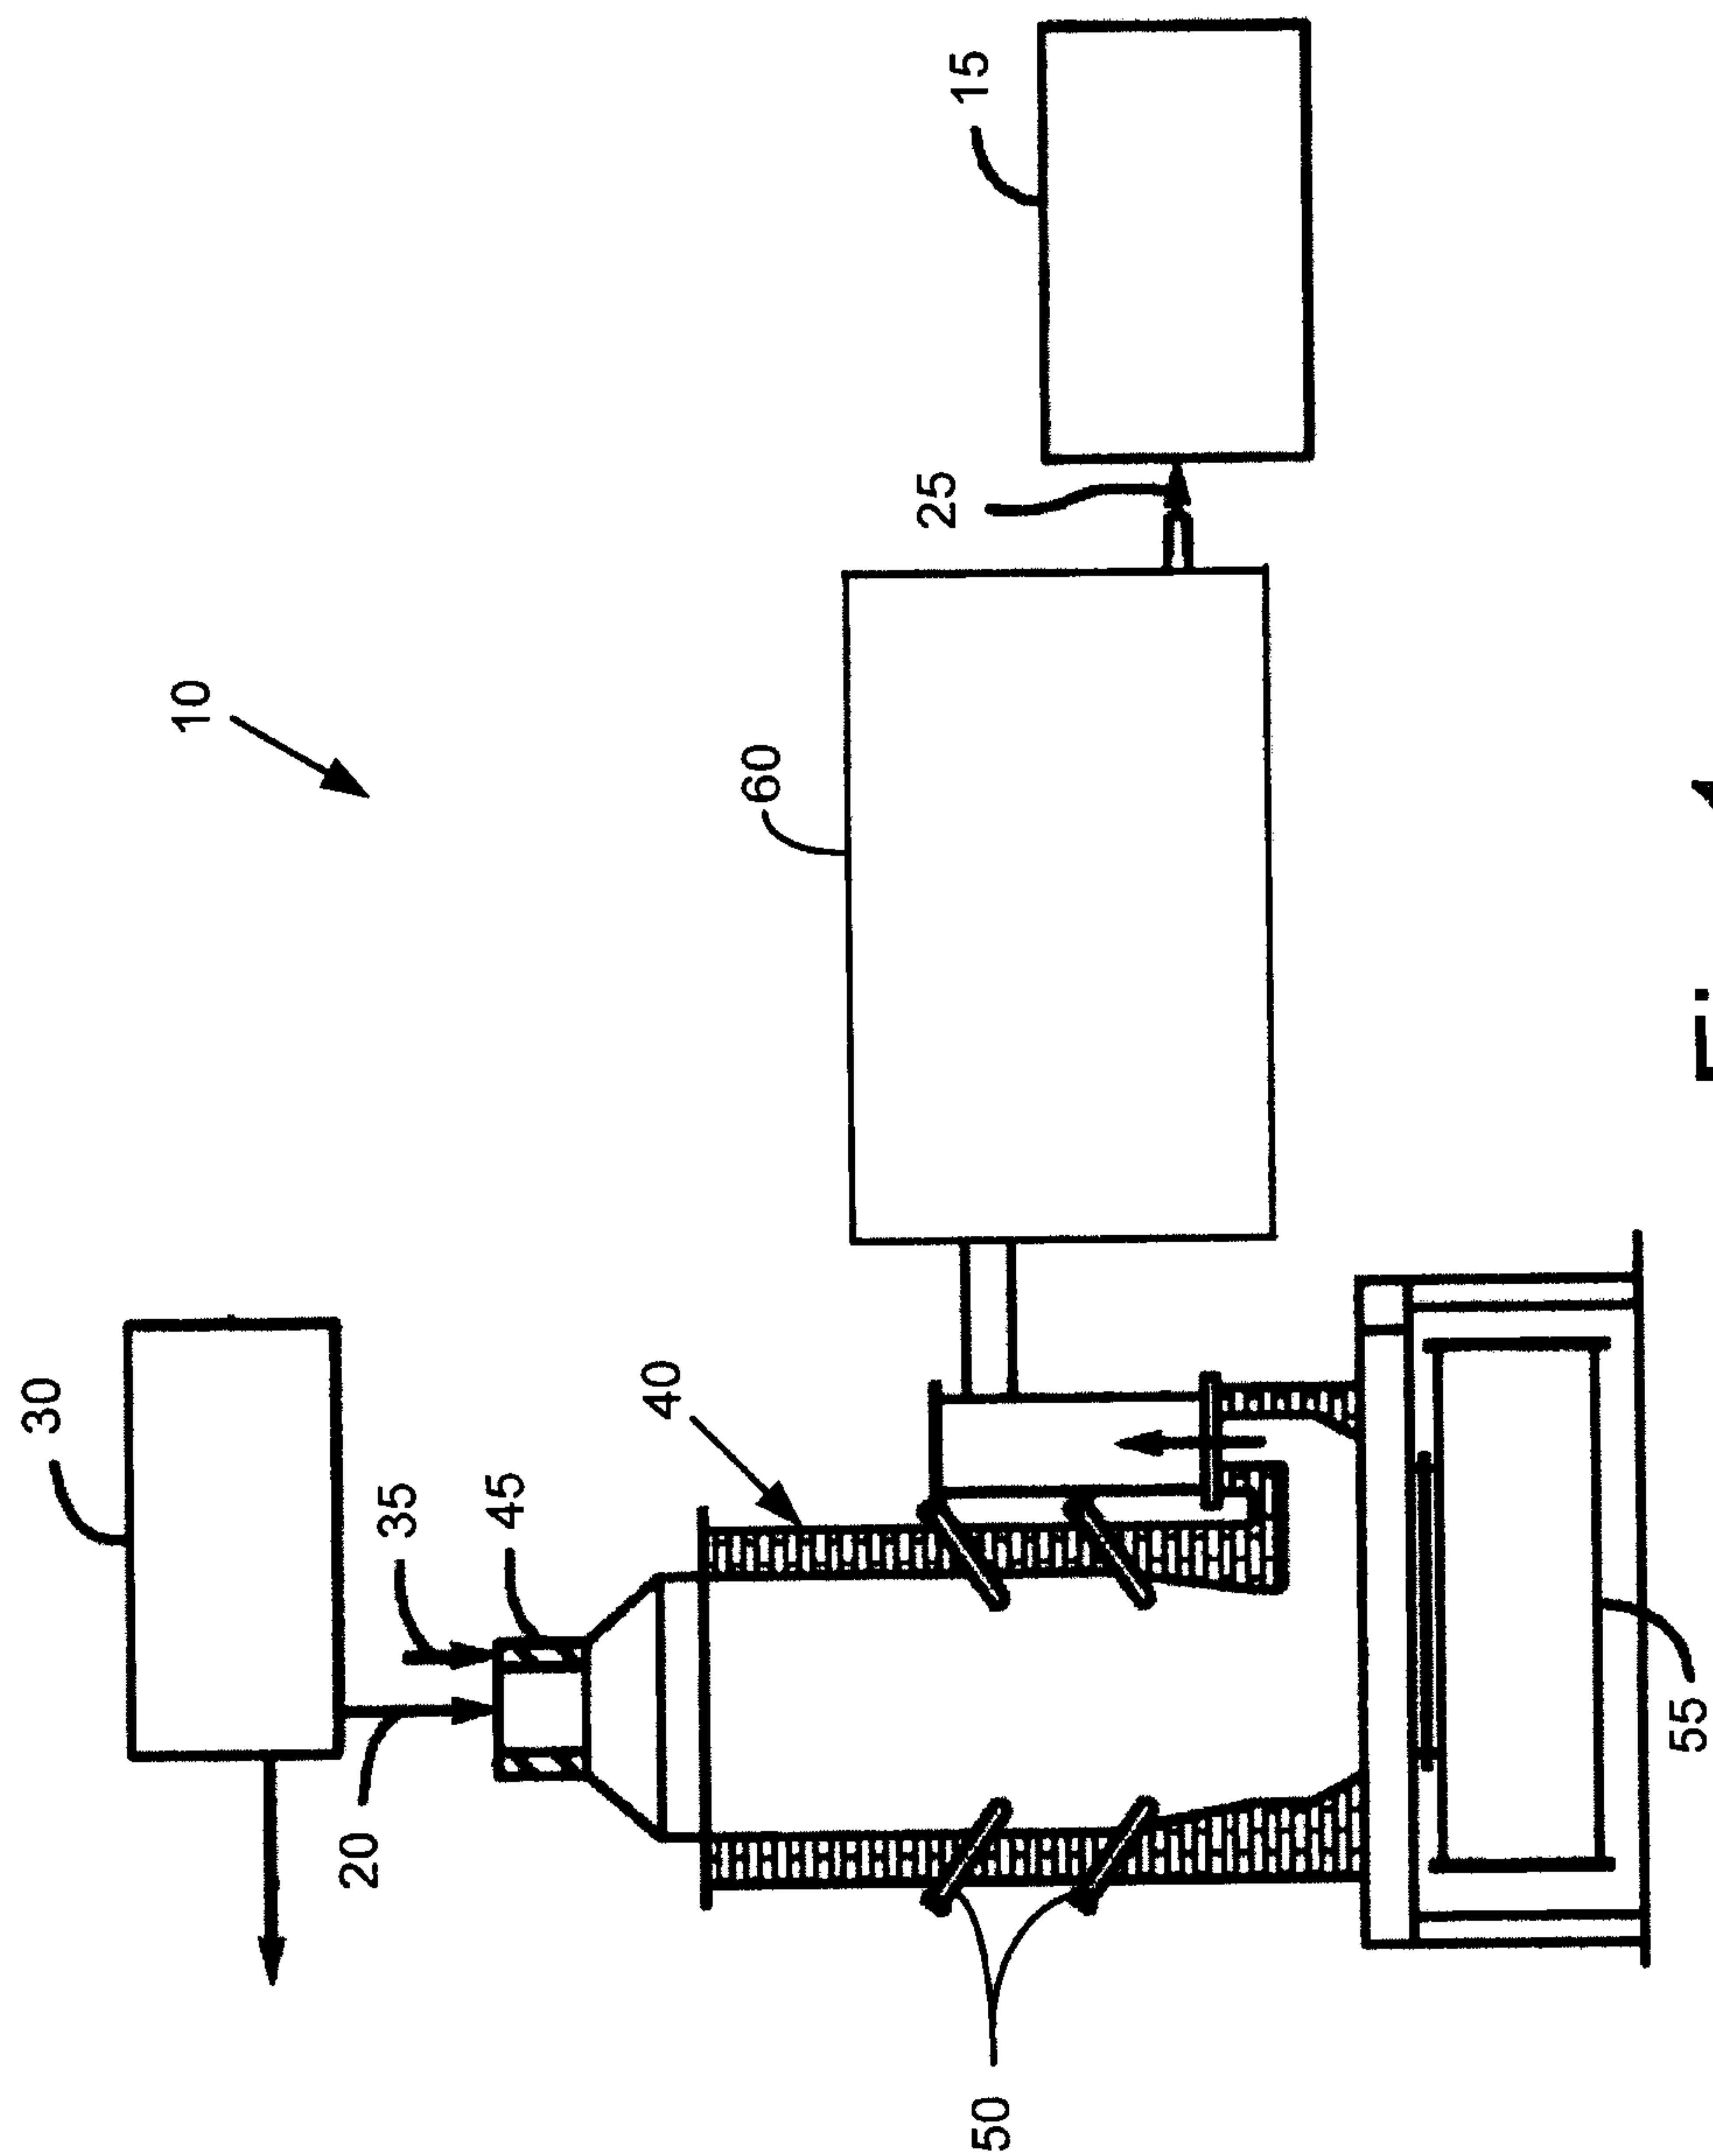


Fig. 1

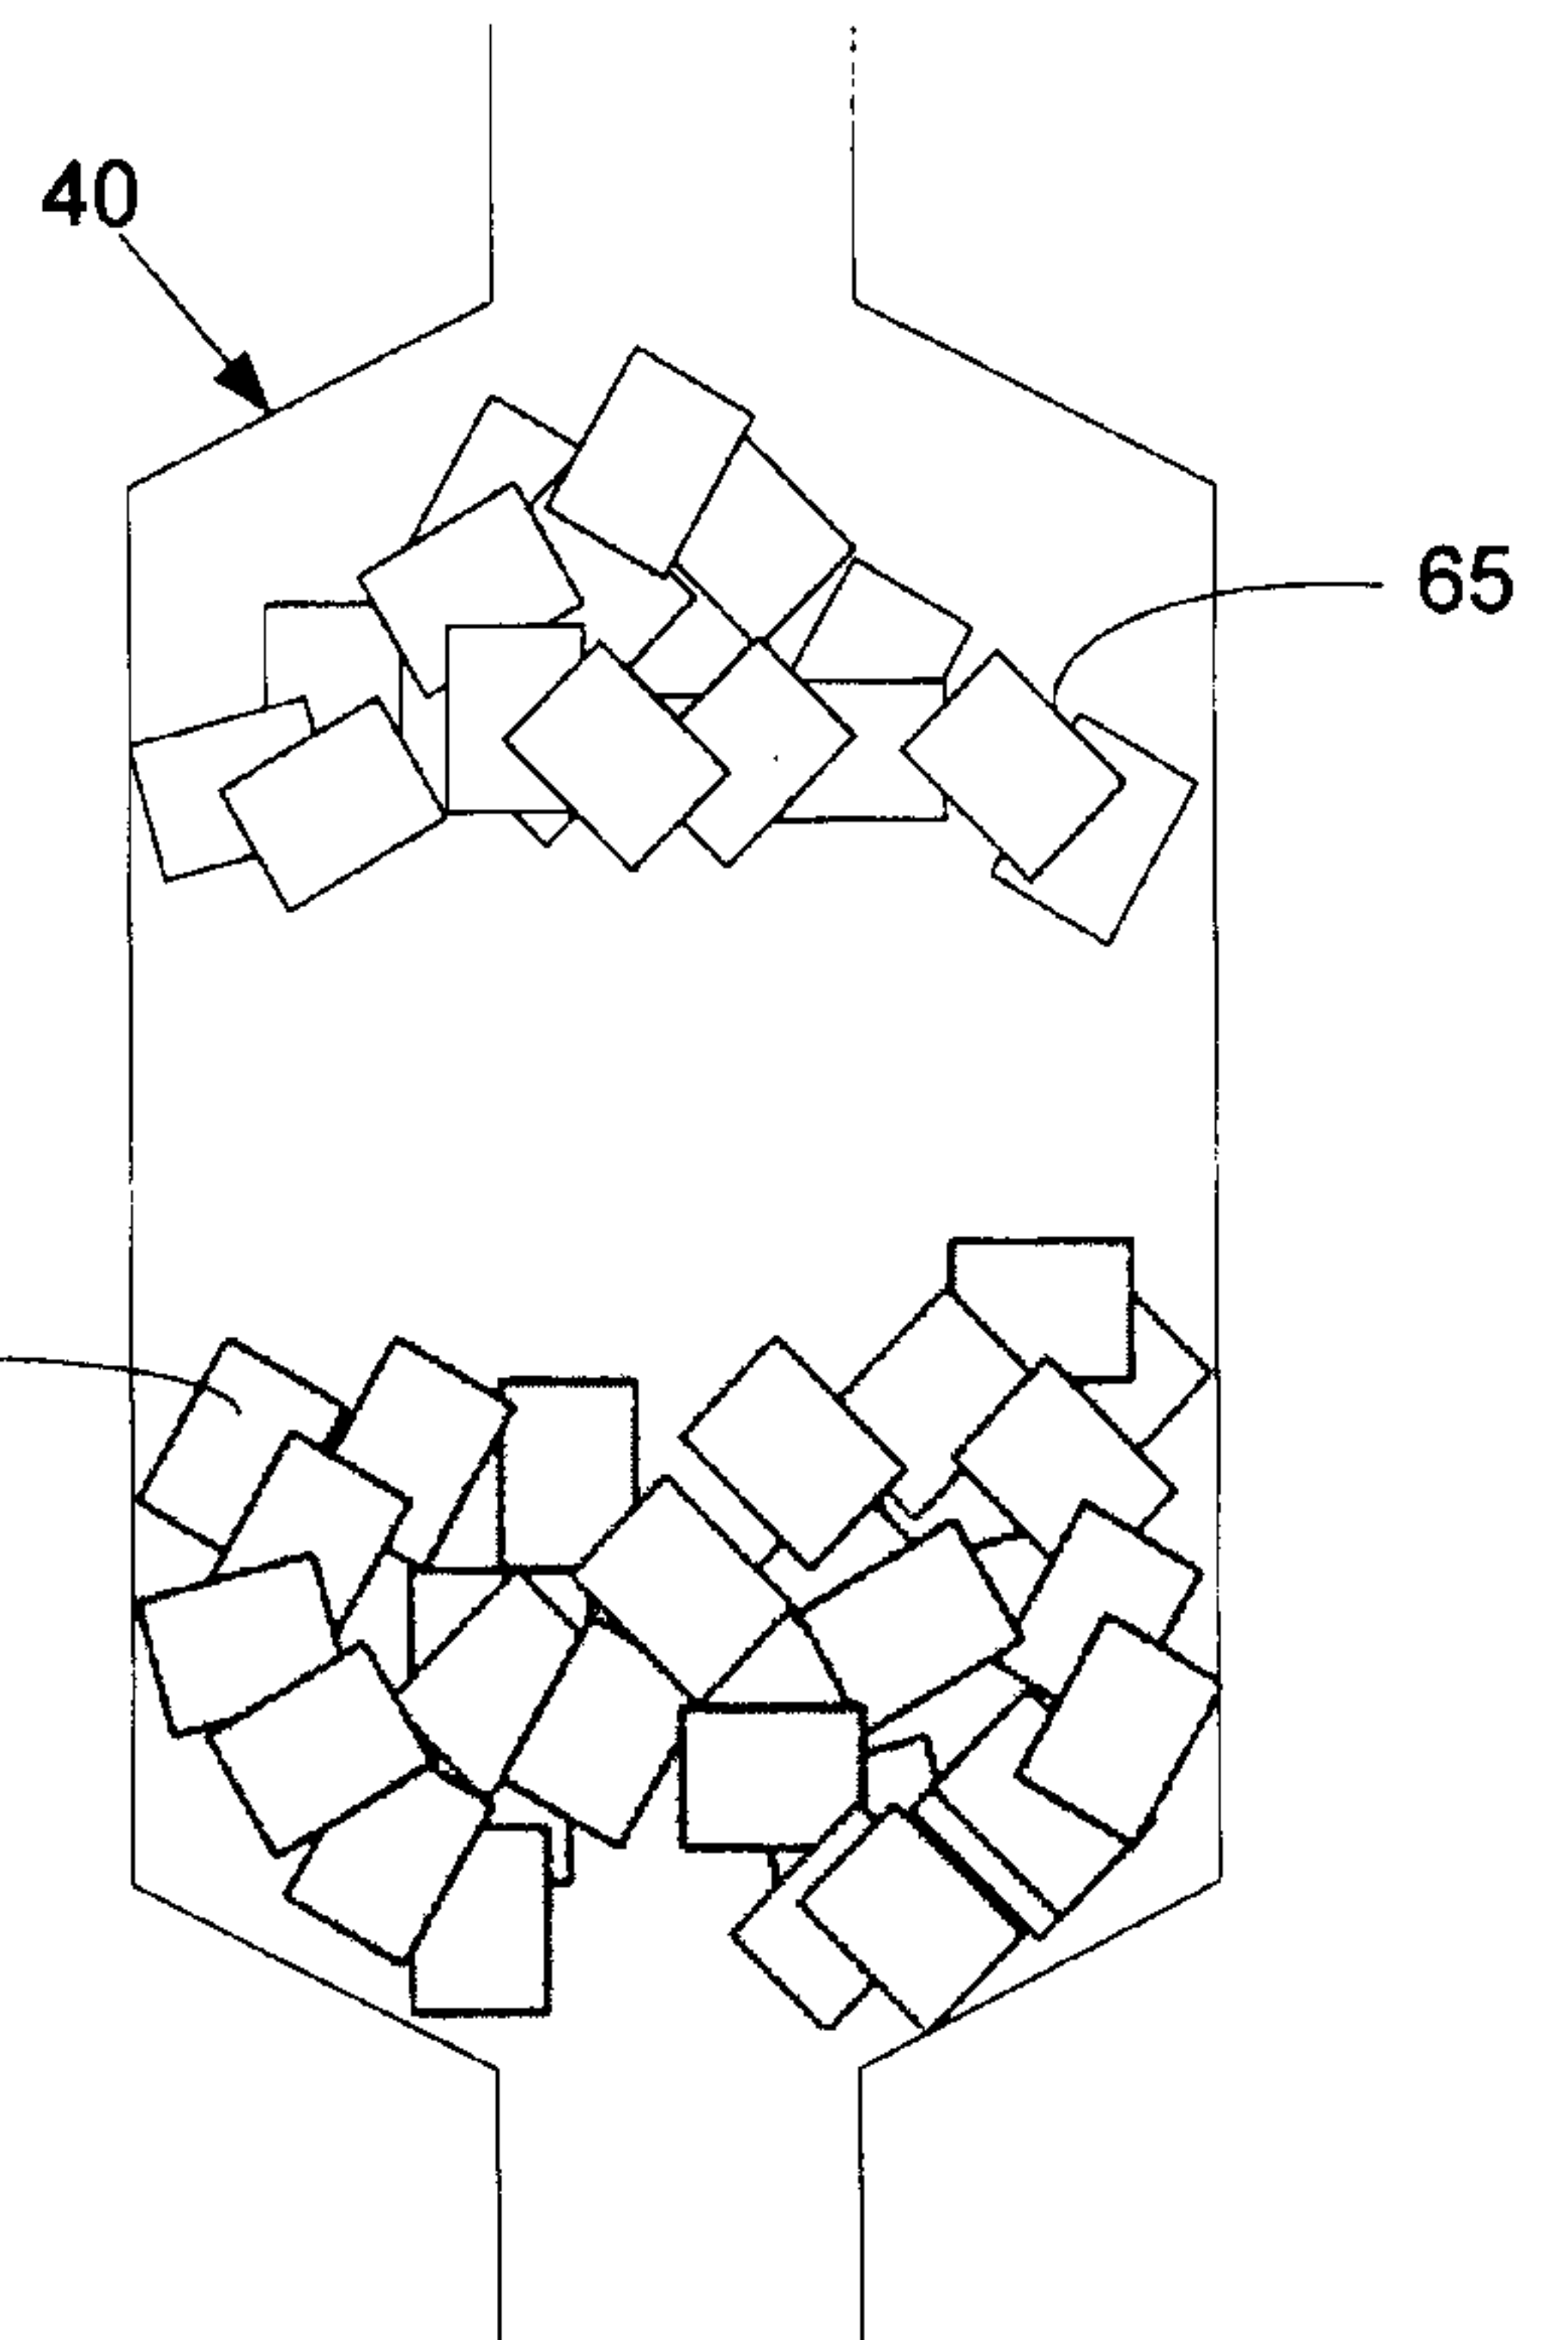


Fig. 2

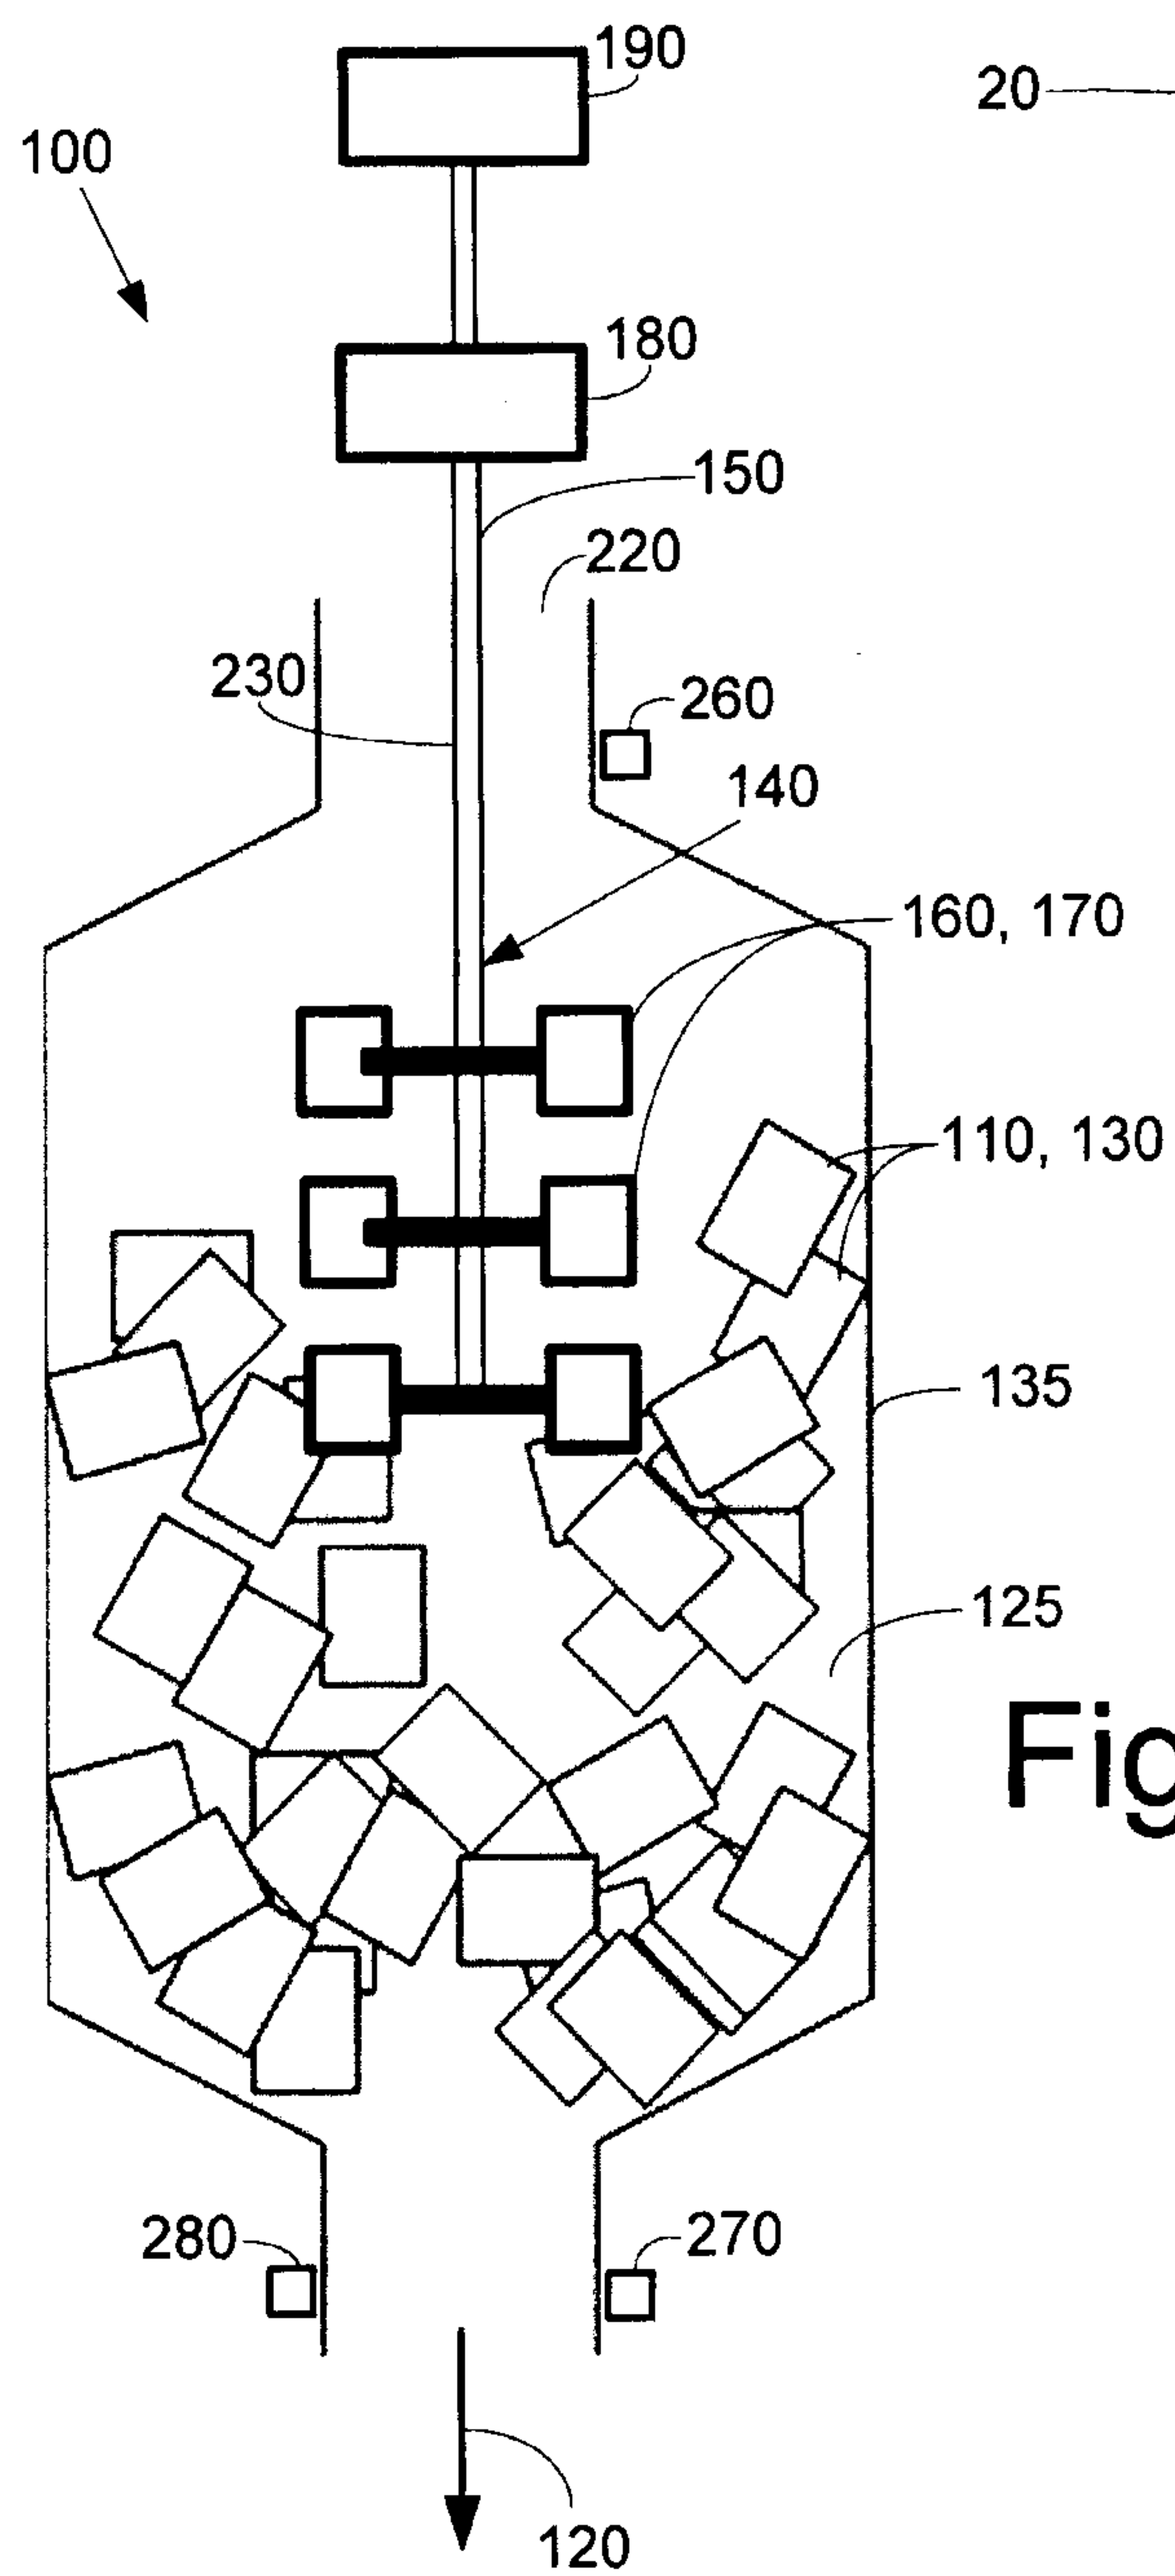


Fig. 3

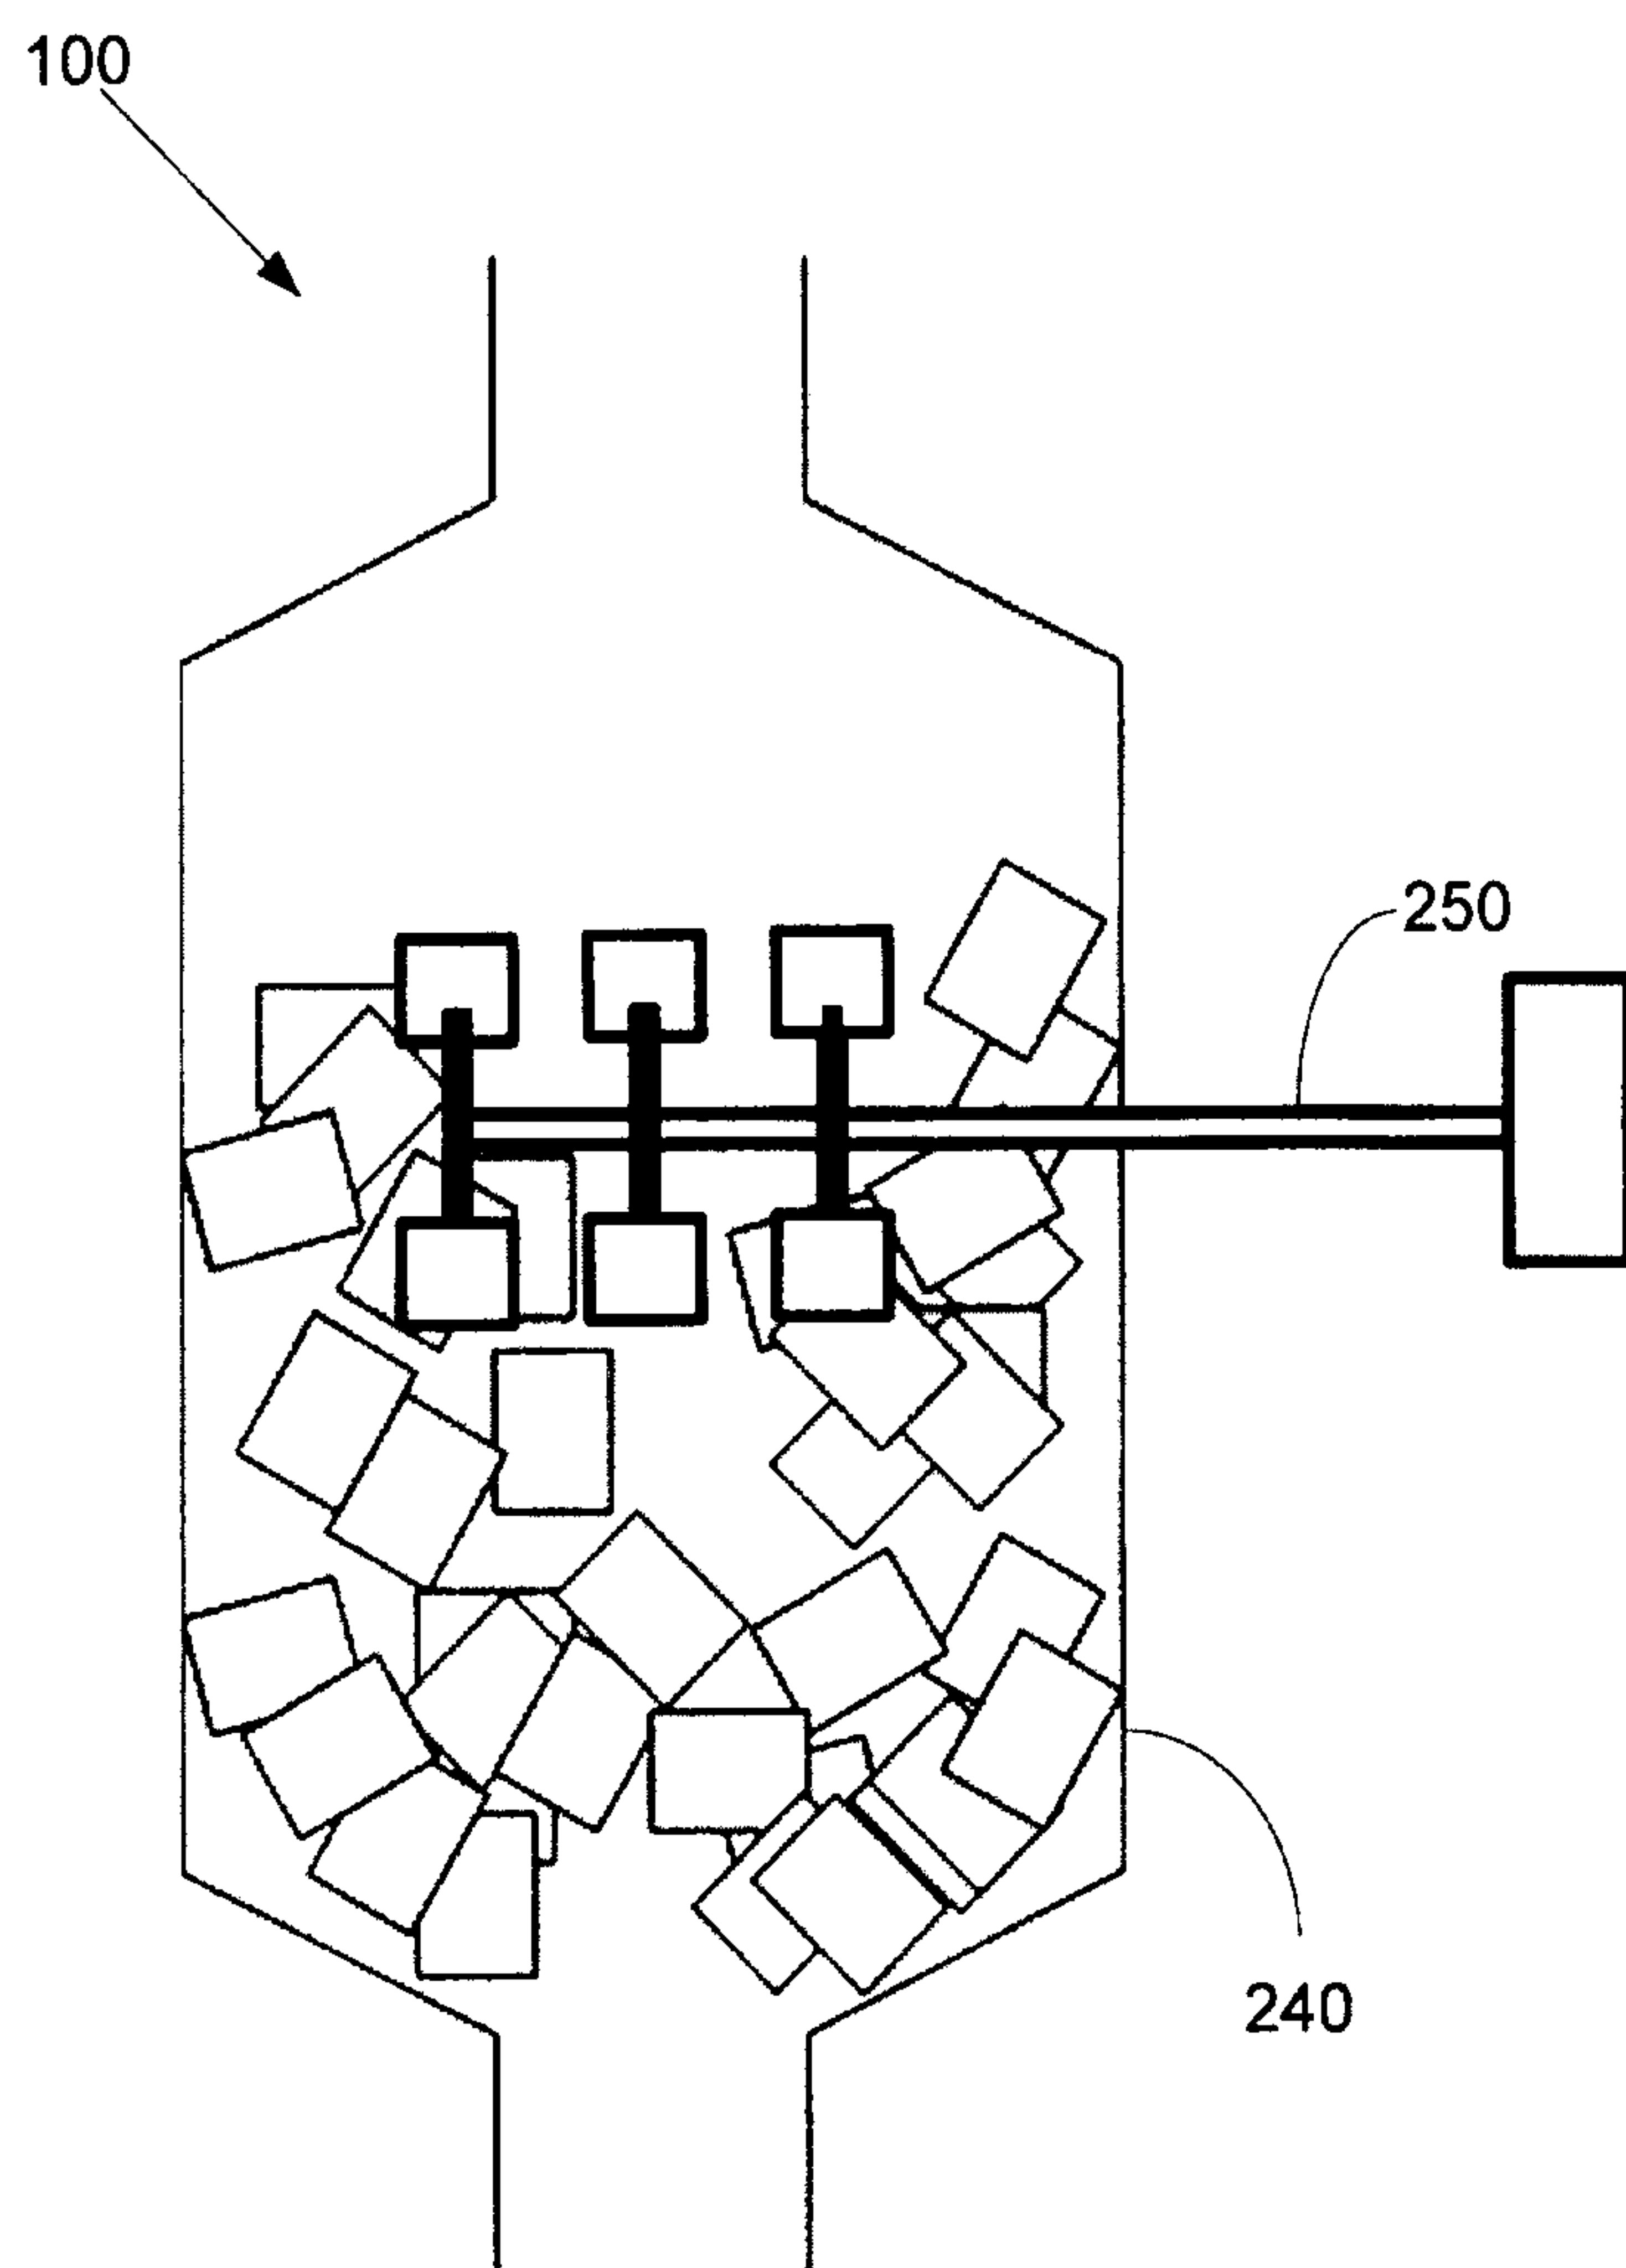


Fig. 6

