

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200149040 B2
(10) Patent No. 781102

(54) Title
Programmable breastpump

(51)⁶ International Patent Classification(s)
A61M 001/06

(21) Application No: **200149040** (22) Application Date: **2000.12.07**

(87) WIPO No: **WO01/47577**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/170070	1999.12.10	US
09/475426	1999.12.30	US
09/475681	1999.12.30	US
09/476075	1999.12.30	US
09/476076	1999.12.30	US

(43) Publication Date : **2001.07.09**
(43) Publication Journal Date : **2001.09.20**
(44) Accepted Journal Date : **2005.05.05**

(71) Applicant(s)
Medela Holding AG

(72) Inventor(s)
Brian H. Silver; Andy Greter; Michael Larsson; Larry D. Annis ; Michael Dettling; Richard S. Weston; Jurgen Eixler

(74) Agent/Attorney
SPRUSON and FERGUSON, GPO Box 3898, SYDNEY NSW 2001

(56) Related Art
US 5776098
US 5771084

AU 200149040

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 July 2001 (05.07.2001)

PCT

(10) International Publication Number
WO 01/47577 A3

(51) International Patent Classification?: A61M 1/06

(71) Applicant and

(21) International Application Number: PCT/US00/42659

(72) Inventor: SILVER, Brian, H. [US/US]; 340 Ann Street.
Cary, IL 60013 (US).

(22) International Filing Date: 7 December 2000 (07.12.2000)

(72) Inventors; and

(25) Filing Language: English

(75) Inventors/Applicants (for US only): GRETER, Andy

(26) Publication Language: English

[CH/CH]; Guntenbühl 8, CH-6312 Steinhausen (CH).

(30) Priority Data: 60/170,070 10 December 1999 (10.12.1999) US

LARSSON, Michael [CH/CH]; Inwilerriedstrasse 7,

09/475,426 30 December 1999 (30.12.1999) US

CH-6340 Baar (CH). ANNIS, Larry, D. [US/US]; 38

09/475,681 30 December 1999 (30.12.1999) US

W 734 Hopi Lane, Elgin, IL 60123 (US). DETTLING,

09/476,075 30 December 1999 (30.12.1999) US

Michael [CH/CH]; Aulweg 4, CH-6424 Lauerz (CH).

09/476,076 30 December 1999 (30.12.1999) US

WESTON, Richard, S. [US/US]; Escondido Village

(71) Applicant (for all designated States except US):

(75) #140, Stanford, CA 94305 (US). EIXLER, Jurgen



MEDELA Holding AG, 1101 Corporate Drive,
McHenry, IL 60050 (US); Lattichinstrasse 4, 6340,
Barr, Switzerland.

[CH/CH]; Langweid 4, CH-6330 Cham (CH).

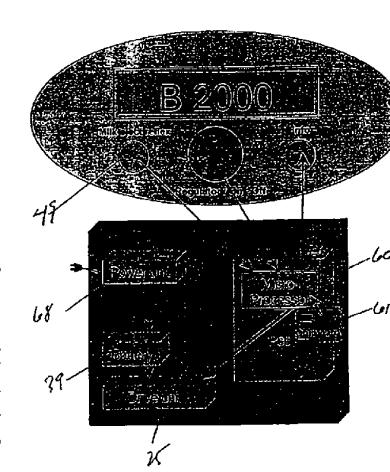
[Continued on next page]

(54) Title: PROGRAMMABLE BREASTPUMP

8 2000

3.1 Description

Service module



WO 01/47577 A3

(57) Abstract: A breastpump (fig. 1) which can be programmed to generate, among other things, a plurality of differing milk expression (extraction) sequence, or curves is disclosed. In one embodiment of the invention, a motorized pump (e.g., compressed air, battery and/or house current) (fig. 17) is provided with a micro-processor-based controller (50). Cards (figs. 11-14), with microprocessor "chip" (61), containing different suction curves adapted for varying condition and objectives are included for programming the controller in this embodiment.



(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW

IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) **Date of publication of the international search report:**

20 December 2001

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

-1-

PROGRAMMABLE BREASTPUMP**FIELD OF THE INVENTION**

This invention relates to breastpumps for drawing breastmilk, and particularly to a motorized, such as electrically driven, breastpump.

5 BACKGROUND OF THE INVENTION

Breastpumps for use by nursing mothers are well known. They allow the nursing woman to express the breastmilk as necessary or convenient, and further provide collection of the breastmilk for later use. For some mothers, breastpumps may be a necessity, such as when the child has suckling problems, or if the mother has 10 problems with excessive or deficient milk production, or soreness, deformation or injury of the mammilla.

Manual breastpumps are commonplace, primarily because they are relatively inexpensive and easy to transport. Being manually driven, however, stroke rate and suction pressure produced can be uneven, and operating the pump can ultimately be 15 tiring.

Electrically-driven breastpumps are also commonplace. They may be of a substantially large size of a non-portable or semi-portable type, typically including a vacuum pump which has an electric motor that plugs into standard house current. Advantages of this type of pump are ready controllability and regulation of the 20 vacuum, and the ability to pump both breasts at once. That is, the nursing woman has both hands free to hold two breastpump shields in place for pumping of both breasts at the same time.

Battery-driven breastpumps have also been developed. These breastpumps have the advantages of controllability and regulation of the vacuum, as well as being 25 easily carried. Such a battery-driven portable breastpump is described in U.S. 4,964,851, for example. This breastpump, sold under the name MINIELECTRIC by Medela, Inc., is lightweight and achieves good vacuum (i.e., negative pressure) regulation in preferred limits, for example, between about 100 and about 220 mmHg. The LACTINA breastpump sold by Medela, Inc. is also another type of breast pump 30 which may be driven by battery as well as house current. It is generally disclosed in U.S. Patent No. 5,007,899.

Electrically driven motorized breastpumps have almost universally been developed with a single type of "cycle" for a given pump. That is, the driving mechanism for generating the vacuum (negative pressure) to be applied at the breast in the more sophisticated pumps is geared to a particular sequence, or curve, of negative pressure increase (i.e., increasing suction), and then release. This is often aimed at reproducing in some sense the suckling action of an infant, for instance. Breastpumping can cover a range of different conditions, however, such as where the mother's nipples are sore for some reason, there is a state of significant engorgement, some nipple stimulation may be particularly desired, let-down and relaxation may be of particular interest, it may be desired to increase milk production, and so on.

Some breastpumps provide the user with the ability to vary the amount of vacuum being applied, as well as the speed of the pumping action (i.e., number of cycles per minute). In some instances in the prior art, speed and vacuum level may influence each other, such that as speed increases so does the vacuum level. The basic "curve" remains fixed, however, and the user must adapt as best she can to making variations within that particular curve built into the machine, which typically has been generalized for the overall population of users.

Object of the Invention

It is the object of the present invention to overcome or substantially ameliorate at least one of the above disadvantages, or at least to provide a useful alternative.

Summary of the Invention

In a first aspect, the present invention provides a breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of pressure in communication with said breastshield; and
a programmable controller having an interface for the inputting of programs, said programs instructing said controller to produce different shaped sequences of operation of said source of pressure.

In a second aspect, the present invention provides a breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of vacuum in communication with said breastshield;
a mechanism for operating said source of vacuum according to a first sequence having a curve with a first waveform shape; and

a controller for operating said source of vacuum according to a second sequence having a curve with a second waveform shape which is different than said first waveform shape.

In a third aspect, the present invention provides a breastpump for the expression 5 of mother's milk, the breastpump having a mechanism for manipulating the breast to express milk therefrom,

comprising a programmable controller for said mechanism, said controller having an interface for the inputting of programs, said programs instructing said controller to produce different pressure sequences of operation of said source of pressure.

10 In a fourth aspect, the present invention provides a method for operating a breastpump comprising the steps of:

recording the pressure waveform of a suckling sequence of an infant in terms of at least suction force over time, and

programming a breastpump to operate in accordance with said recording.

15 In a fifth aspect, the present invention provides a method for breastpumping comprising:

providing a breastshield having a portion within which a woman's breast is received for the expression of milk;

20 providing a source of vacuum in communication with the breastshield which is operated by a controller; and

programming the controller to operate the source of vacuum to produce different shaped sequences of operation, wherein at least one of said sequences has a pressure slope deviating from a simple curve between pressure peaks.

25 In a sixth aspect, the present invention provides a motor drive for a breastpump, comprising:

a motor having a rotary output;

a reduction drive system communicating with said rotary output with at least first and second belts conveying motive power from said rotary output to a movable member of an expandible chamber device wherein a vacuum is generated.

30 In a seventh aspect, the present invention provides a breastpump comprising:

a breastshield having a portion within which a woman's breast is received for the expression of milk;

a source of pressure in communication with said breastshield; and

a user programmable controller including an input mechanism through which the user interfaces with said controller to provide program commands capable of varying the waveform shape of a curve defining one or both of an amount of pressure applied and a frequency of pressure application to said breastshield, said curve of at least one program being defined by more than a single peak pressure input.

In an eighth aspect, the present invention provides a breastpump comprising:

a breastshield having a portion within which a woman's breast is received for the expression of milk;

a source of pressure in communication with said breastshield; and

10 a programmable controller having an interface which receives program commands from a user that cause a desired change in the curve defining a cycle sequence for operating said source of pressure, where said program commands are capable of changing said curve by more than a change in a selected maximum pressure and a selected frequency.

15 In a ninth aspect, the present invention provides a breastpump comprising:

a breastshield having a portion within which a woman's breast is received for the expression of milk;

a source of pressure in communication with said breastshield; and

19 a programmable controller having means for a user to select programs, said programs operatively instructing said controller to produce different shaped sequences of operation of said source of pressure.

In a tenth aspect, the present invention provides a breastpump comprising:

a breastshield having a portion within which a woman's breast is received for the expression of milk;

25 a source of pressure in communication with said breastshield; and

a programmable controller having an input device through which a user can controllably vary the shape of a suction sequence from a simple curve, wherein said simple curve is established by only a pressure level input and a frequency input.

In an eleventh aspect, the present invention provides a method of operating a 30 breastpump comprising:

providing a breastshield having a portion within which a woman's breast is received for the expression of milk;

providing a source of pressure in communication with the breastshield;

providing a programmable controller having an interface;

receiving from a user and through the interface commands that cause a desired change in operation of the source of pressure; and

changing the shape of a curve defining a cycle sequence for operating the source of pressure in response to commands beyond simply selecting a variation in maximum pressure and frequency.

In a twelfth aspect, the present invention provides a method of operating a breastpump comprising:

providing a breastshield having a portion within which a woman's breast is received for the expression of milk;

10 providing a source of pressure in communication with the breastshield;

providing a programmable controller having means for a user to input programs;

inputting programs into the programmable controller; and

instructing said controller to produce different sequences of operation of the source of pressure in response to said inputting of the programs by the user.

15 In a thirteenth aspect, the present invention provides a breastpump comprising:

a breastshield having a portion within which at least part of a woman's breast is received;

a pressure source in communication with said breastshield; and

20 a mechanism operating said pressure source to produce at least a milk letdown sequence and another sequence different from said letdown sequence.

In a fourteenth aspect, the present invention provides a breastpump for the expression of mother's milk, the breastpump having a mechanism for applying a cyclical pressure to the breast to express milk therefrom, including a programmable controller for said mechanism, said controller having an interface for the inputting of programs, said 25 programs instructing said controller to produce different shaped sequences of operation of said source of pressure and wherein one of said sequences is a letdown sequence.

In a fifteenth aspect, the present invention provides a method for breast pumping comprising:

providing a breastshield having a portion within which at least part of a woman's 30 breast is received for the expression of milk;

providing a source of pressure in communication with the breastshield;

operating said source of pressure according to a milk letdown sequence, and then operating said source of pressure according to a milk expression sequence.

In a sixteenth aspect, the present invention provides a method for breast pumping comprising:

providing a breastshield having a portion within which a woman's breast is received for the expression of milk;

5 providing a source of pressure in communication with the breastshield which is operated by a controller;

programming said controller to operate said source of pressure to produce at least a milk letdown sequence and a milk expression sequence;

10 operating said breastpump according to said milk letdown sequence, and then operating said breastpump according to said milk expression sequence.

In a seventeenth aspect, the present invention provides a breastpump comprising: a breastshield having a portion within which a woman's breast is received for the expression of milk;

15 a variable source of pressure in communication with said breastshield; and a controller for operating said source of pressure according to at least two different sequences, wherein said controller transitions from a first of said sequences which is a letdown sequence to a second of said two sequences.

In an eighteenth aspect, the present invention provides a vacuum pump for a breastpump comprising:

20 a source of vacuum for applying a level of vacuum force;

a motor drive for said source of vacuum;

a mechanism which alters the level of vacuum force from said source of vacuum, and which varies the rate of vacuum application;

25 a controller, said controller providing a rate control input to said mechanism and a level control input to said mechanism such that said vacuum force is varied according to an inverse relationship with said rate, and

a single manually operated switch operatively connected to said controller, said switch providing an input to said controller over a range that simultaneously adjusts said vacuum force and said rate according to said inverse relationship.

30 There is disclosed herein a diaphragm pump protection device for a breastpump, where the breastpump has a pumping device including a shell and a member moveable relative to the shell, comprising:

a removably mounted cover, said removably mounted cover being received

between the shell and the member moveable relative to the shell of the breastpump and mounted upon and traveling with the moveable member, said removably mounted cover isolating the moveable member relative to the shell from any fluid.

There is disclosed herein a pump for a breastpump comprising:

- 5 a chamber defined by a shell and a member moveable relative to said shell;
- 10 a mechanism connected to said moveable member which moves said movable member to expand and contract a volume defined within said chamber;
- 15 a port in said shell through which fluid moves in response to expansion and contraction of said volume; and
- 20 a removably mounted cover between said shell and said moveable member isolating said movable member from fluid, said cover being removable for at least one of cleaning and disposal.

There is disclosed herein a diaphragm pump for a breastpump, comprising:

- 25 a shell having a generally hemispherical interior shape;
- 30 a flexible membrane movable within said hemispherical shape to expand and contract a volume created in a chamber defined between said membrane and shell;
- 35 a mechanism connected to said membrane which moves said membrane to expand and contract said volume;
- 40 a port in said shell through which air moves in response to expansion and contraction of said volume; and
- 45 a removably mounted flexible cover between said shell and said membrane which isolates said membrane from fluid, said cover being removable for at least one of cleaning and disposal, said flexible membrane having a circumferential rim, said cover being received over said rim, and said shell having an internal opening defined therein sized to encompass said rim with said cover mounted on said rim in a substantially airtight fit, said cover thereby forming a gasket between said rim and shell.

There is disclosed herein a method for operating a breastpump comprising varying the amount of vacuum within a range of from about 20 mmHg (the least vacuum) to about 250 mmHg (the greatest vacuum) while simultaneously varying the overall suction cycle from about 25 cycles/min. at the greatest vacuum to about 40 cycles/min. at the least vacuum, such that for a lower vacuum applied there is an increase in the number of cycles.

There is disclosed herein a method for operating a breastpump which is considered to yield an increase in milk output, comprising operating said pump at a rapid cyclical rate on the order of about 120 cycles, min, with a negative pressure in the range of about 50 to about 150 mmHg.

5 There is disclosed herein a method for operating a breastpump comprising varying the vacuum within a range of about 100 (the least vacuum) to about 250 mmHg (the greatest vacuum), while simultaneously varying the overall suction cycle from about 78 cycles/min. at the least vacuum to about 47 cycles/min. at the greatest vacuum, such that for a lower vacuum applied there is an increase in the number of cycles, with a cycle
10 following a curve which initially builds to a peak negative pressure, then smoothly starts a pressure increase (less negative) along an initial slope but then slows the pressure increase briefly, before continuing on essentially said initial slope for the negative pressure release.

It is an objective of the preferred embodiment to provide a breastpump which
15 can be programmed to generate, among other things, a plurality of differing milk expression (extraction) sequences, or curves. To this end, the preferred embodiment in one form is a breastpump comprising a breastshield having a portion within which a woman's breast is received for the expression of milk. A source of vacuum is in communication with the breastshield. There is a mechanism for operating the source of
20 vacuum according to a first sequence, and a controller for operating the source of vacuum according to a second sequence.

The controller can have a preset program for the second sequence which is a milk letdown sequence, for example. Preferably, the breastpump has a plurality of different programs for the controller wherein each program has a different sequence.

25 In one embodiment, a motorized pump (e.g., compressed air, battery and/or house current) is provided with a microprocessor-based controller. Cards, with memory "chips," containing different suction curves adapted for varying conditions and objectives are included for programming the controller in this

embodiment. A user selects a desired program, and that card is then read by a mechanism providing input to the controller. It should be noted that while suction curves are generally addressed in the first instance herein, the milk expression sequences may also include a positive pressure aspect. The programming could also 5 be provided via other media, including discs, CDs, infrared data transfer, electronic feed (e.g., an Internet connection), and so forth.

A significant, and heretofore unavailable advantage realized by the preferred embodiment is the ready ability to modify the breastpump suction action to a variety of desired conditions, and provide this ability to the end-user. An attendant advantage is 10 that, as the science of breastpumping continues to make advances, new and improved suction curves and sequences can be made available on further cards, or other program-inputting means.

Yet another attendant advantage is that the programmable pump can also record data relating to its use and operation. That data could be stored, for instance, 15 and then retrieved as by downloading through an Internet connection, magnetic recording (disk or card), and the like. This data retrieval would be useful in medical research, for updating the pump with new data, for monitoring usage, just for some instances.

Further, a program could be made of a particular infant's suckling pattern. 20 That program could then be used to operate the pump, and then varied over time as the infant grows.

In yet another embodiment, an improved breastpump is provided which has a pre-programmed milk let-down sequence. The let-down sequence is most advantageously made available through a button or the like provided on the 25 breastpump used to actuate the sequence.

In still another embodiment, a breastpump includes an electric motor having a reduction gear system with at least first and second belts conveying motive power to a movable member of an expandable chamber device wherein a vacuum is generated. The expandable chamber device is, in one embodiment, a pair of 30 diaphragm pumps. Each diaphragm pump has a membrane which is movable relative to a shell, each said membrane being connected to a respective drive shaft, each shaft being mounted to a respective belt for linear movement with the respective belt.

An objective of the preferred embodiment is to provide a breastpump with one or more novel suction sequences which are considered to produce advantageous particularized results. Such sequences include, but are not limited to: a suction method (e.g., program or curve) for a sore nipple condition; a suction method for increased milk production; an improved suction method in general; and a method for nipple stimulation.

A method for operating a breastpump for a sore nipple condition according to the preferred embodiment comprises varying the amount of vacuum within a range of from about 20 mmHg (the least vacuum) to about 250 mmHg (the greatest vacuum) while simultaneously varying the overall suction cycle from about 25 cycles/min. at the least vacuum to about 40 cycles/min. at the greatest vacuum, such that for a lower vacuum applied there is an increase in the number of cycles. In general, this program is intended to provide a lower peak vacuum over a longer cycle.

A method for operating a breastpump which is considered to yield an increase in milk output according to the preferred embodiment comprises operating the pump at a rapid cyclical rate on the order of about 120 cycles/min., with a negative pressure in the range of about 50 to about 150 mmHg. This method further preferably includes a pause after each period of vacuum application, such as applying the vacuum for about ten seconds of vacuum, with then a two second pause.

A method for operating a breastpump according to yet another embodiment comprises varying the vacuum within a range of about 100 (the least vacuum) to about 250 mmHg (the greatest vacuum), while simultaneously varying the overall suction cycle from about 47 cycles/min. at the greatest vacuum to about 78 cycles/min. at the least vacuum, such that for a lower vacuum applied there is an increase in the number of cycles, with a cycle following a curve which initially builds to a peak negative pressure, then smoothly starts a pressure increase (less negative) along an initial slope but then slows the pressure increase briefly, before continuing on essentially said initial slope for the negative pressure release.

A still further preferred embodiment provides a unique breastpump assembly having features including: a compact housing design and breastshield carrying casing; and a double-diaphragm pumping mechanism.

A prophylactic device for protecting the diaphragm from fluid (air/milk) is additionally provided. In one embodiment, a

diaphragm pump for a breastpump comprises a shell having a generally hemispherical interior shape with a flexible membrane movable within the hemispherical shape to expand and contract a volume created in a chamber defined between the membrane and the shell. A mechanism connected to the membrane, such as a puller, moves the membrane to expand and contract the volume. A port is provided in the shell through which air moves in response to expansion and contraction of the volume, such that vacuum can be communicated to a breastshield through connection to the port.

5 A removably mounted flexible cover is located between the shell and the membrane which isolates the membrane from fluid. The cover is removable for at least one of cleaning and disposal. To that end, the flexible membrane has a circumferential rim upon which the cover is received over the rim. The shell has an internal opening defined therein sized to encompass the rim with the cover mounted on the rim in a substantially airtight fit. The cover thereby forms a gasket between the rim and shell. A one-way valve extending through the membrane is additionally provided, allowing exhaustion of air between the membrane and cover.

10 Yet another significant aspect is considered to be a manually operated control, such as a rotary knob, which is used to simultaneously adjust the suction level as well as rate within a sequence. In this embodiment, the suction "force" and "speed" are tied together in an inverse relationship.

15 20 As the suction force (vacuum) is increased, for example, the rate (cycle) is decreased; as the vacuum is decreased, the cycle increases.

25 These and other features and advantages of the present invention will be further understood and appreciated when considered in relation to the following detailed description of embodiments of the invention, taken in conjunction with the drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front perspective view of a breastpump assembly made in accordance with aspects of the present invention;

FIG. 2 is a side elevational view of the breastpump of FIG. 1;

30 FIG. 3 is a rear perspective view of the breastpump of FIG. 1;

FIG. 4 is a perspective view of the breastpump of FIG. 1 looking at the bottom;

-6-

FIG. 5 is a top view of the breastpump of FIG. 1 with a cover removed revealing diaphragm pumps;

FIG. 6 is an enlarged side view of the breastpump of FIG. 1 adjacent the bottom highlighting the program card insert slot;

5 FIG. 7 is a bottom perspective view of the breastpump of FIG. 1 showing battery arrangement;

FIG. 8 is a somewhat exploded assembly view of the major components of the breastpump of FIGS. 1 through 5, with a modified top cover for the diaphragm pump assembly;

10 FIG. 9 is a diagrammatic representation of the interaction of various components with the controller;

FIG. 10 is a schematic-type representation of a data storage and retrieval process that can be effected in accordance with the present invention;

15 FIGS. 11 through 14 are various methods (curves) for operating the breastpump to differing ends;

FIG. 15 is a front perspective view of another embodiment of a breastpump assembly made in accordance with aspects of the invention;

FIG. 16 is a rear perspective view of the FIG. 15 embodiment;

20 FIG. 17 is a somewhat exploded assembly view of the major components of yet another breastpump made in accordance with the present invention;

FIG. 18 is an enlarged front perspective view of the motor drive of the breastpump of FIG. 17;

FIG. 19 is a view similar to that of FIG. 18 but from a top perspective;

FIG. 20 is an enlarged assembly view of the diaphragm pump mechanism;

25 FIG. 21(a) is a cross-sectional view of the assembled diaphragm pump of FIG. 20;

FIG. 21(b) is an elevational view of the assembled diaphragm pump of FIG. 20;

FIG. 21(c) is a top view of the assembled diaphragm pump of FIG. 20;

30 FIG. 22 is a sectional view of the assembled breastpump of FIG. 17 taken through the middle of the breastpump along its long lateral axis (side to side) looking rearwardly;

FIG. 23 is a sectional view similar to that of FIG. 22 taken along a plane forwardly of that of FIG. 22; and

FIG. 24 is a sectional view similar to that of FIG. 22 taken along a plane behind the electric motor looking back to front.

5 DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The Breastpump Assembly

Referring to FIGS. 1 through 7 initially, a breastpump assembly of the present invention in one form has an aesthetically pleasing and compact design. The housing for the major components of the assembly is a casing 10 made of a rigid high impact 10 plastic. As shown, it has a generally ellipsoidal cross-section along its vertical axis, yielding a pleasing smooth curving look to the casing exterior. The casing 10 is closed at its upper end by an upper housing part 11, to which is affixed a carrying handle 12.

In this first embodiment, carrying handle 12 has a pair of cradles 15 formed in 15 opposite ends thereof. These cradles 15 are adapted to receive and support the funnel portions 16 of respective breastshields 17. These breastshields 17 (sometimes referred to themselves as breastpumps) are of the type shown and described in U.S. Patent No. 4,964,851 and 4,929,229, for instance. Further detail regarding the breastshields 17 may be obtained through reference to those patents, but will be 20 omitted herein since the inventive features in point in this application are not contingent upon the breastshield being used, so long as it is suitable to the task of milk expression.

In general, however, the breastshields 17 have the aforementioned funnel portion 16 which communicates with conduit structure connecting to a container 25 (bottle) 18. This particular breastshield 17 is adapted for both manual as well as motorized pumping. It has a collar 20 to which a manually-driven piston pump (not shown) is screw-threaded for attachment and use in one mode of operation. When an electrically operated vacuum pump is to be employed, there is a port provided inside 30 of the collar 20 which is in communication with the funnel portion, and to which a tube from the vacuum pump is releasably connected to convey vacuum to the breastshield. Again, such detail is well known, and can be gleaned from the foregoing patents, among other public sources. In operation in either mode, the widened (conical) portion of the breastshield 17 is placed on the breast for drawing vacuum

within the shield, and thereby drawing milk through a pulling force applied to the breast. Milk drawn from the breast is collected in the bottle 18.

FIGS. 15 and 16 show a modified exterior for the breastpump 10' (prime numbers being used herein to refer to similar but modified parts). In this version the 5 breastshields 17 are not cradled by the handle 12', but instead are carried in a holder 26 mounted to the back of the unit.

-The Drive Motor

Referring to FIG. 8 initially, casing 10 has a drive unit 25 mounted therein. There are, of course, any number of drives that may be used for diaphragm pumps 10 such as those used in the instant embodiment. Indeed, the type of pump (diaphragm, piston, etc.) is not necessarily significant to certain aspects of the present invention. The driving mechanism for the breastpump shown for the embodiment in point, however, is a linear drive for the diaphragm pumps consisting of a reduction drive arrangement and a 12 V DC-motor 28.

15 It will be noted that the FIG. 8 embodiment is substantially the same as that of FIGS. 1 through 7, except for a modified cover for the upper housing, which here includes the rigid shells 24 for the diaphragms 34 as part of the cover 35. The diaphragm pumps 30 will be further described hereafter.

FIG. 17 shows yet another version of a breastpump of the present invention 20 substantially the same as that of FIGS. 1 through 8, except with a modified cover 35'' and shell 24'' for the diaphragm pump 30. The breastshield holder of the FIGS. 15 and 16 embodiment has also been slightly modified. It is with respect to this FIG. 17 embodiment that the majority of the interior detail of the breastpump will be further understood.

25 Turning now to FIGS. 18, 19 and 22 through 24 in particular, the reduction gearing contains belts 27a, 27b and 27c. Power is transferred from the shaft 29 of motor 28 to belt 27a. Belt 27a is received in a channel of wheel 51, which is mounted to the drive chassis 62 on rotatable shaft 52. Shaft 52 is fixed to rotate with wheel 51. A freewheel 53 is mounted on a shaft 54 fixed to the chassis 62 to freely rotate, and 30 engages the outside of belt 27a, producing more surface engagement by the belt 27a with wheel 51.

Shaft 52 has a small toothed gear 55 mounted thereon. Belt 27b is toothed, and engages the gear 55. Toothed belt 27b furthermore engages a larger toothed gear

-9-

56 fixed to rotating shaft 57 (FIGS. 22 and 24). Part of gear 56 is small toothed gear portion 58. Belt 27c, which is also toothed, engages gear 58 as well as toothed gear 59. Gear 59 is fixedly mounted to rotating shaft 70. Fixed at each end of shaft 70 are small toothed gears 71a, 71b. Toothed belts 72a, 72b respectively engage gears 71a, 5 71b and freely rotating toothed gears 73a, 73b.

10 Diaphragm pusher (push/pull) shafts 74a, 74b are respectively clamped to belts 72a, 72b at one end. The other end engages the interior of a respective diaphragm membrane member 34 (FIG. 22, and also see FIGS. 20 and 21(a)). Here, a screw engagement with the shafts 74a, 74b was used, with a threaded nut-like element 15 37 mounted in a reinforced central area of membrane 36 (again, the diaphragm pumps 30 are described in more detail below). Both of the pusher shafts 74a, 74b move in tandem as driven by respective belts 72a, 72b.

15 Accordingly, as motor drive shaft 29 turns, belt 27a rotates shaft 52 via wheel 51. Belt 27b is in turn thereby driven off of smaller gear 55, causing rotation of shaft 57, which in turn rotates larger gear 56 and its smaller part 58, to thereby turn shaft 70 via belt 27c which couples gear part 58 with larger gear 59. This transfers the motion via gears 71a, 71b to belts 72a, 72b, imparting a linear movement to the pusher shafts 74a, 74b. A forward and then backward stroke is generated, through reversal of the 20 motor shaft 29 direction. Reduction gearing is thus obtained as desired through appropriate selection of the various gears/wheels noted above.

25 The location of the shafts 74a, 74b along the path of travel, as well as the length of the stroke, is measured by position sensing mechanism 78, which can be of any standard and well known variety. This sensing mechanism 78 uses a toothed wheel 78a mounted to the shaft 29 of motor 28, which is registered by counter 78b. Signals generated by the counter 78b are processed by the cpu of the breastpump.

30 A negative pressure, or vacuum, is generated in a pair of diaphragm pumps 30. Each diaphragm pump has a flexible membrane 34 mounted in the upper housing 11 assembled with a respective rigid shell 24 (and see FIGS. 20 and 21(a) through 21(c) described further below). The membrane and shell are in substantially airtight engagement. When the membrane 34 is pulled away from the shell 24, a vacuum is generated in the space between the shell interior and the membrane, which can be accessed through outlet port 31 formed on the shell, to which a tube 32 is connected to communicate the vacuum to a respective breastshield 17.

-10-

Power is provided either through ordinary house current via power cord 38, or electrochemical battery 39, such as a pair of 6V, 1.2Ah lead-acid type rechargeable batteries. Power cord 38 is provided on a wrap-around mount conveniently located for storage in a well in the bottom of the lower housing part 13. FIG. 7 shows wells 5 41 formed within the lower housing 13 through which the batteries 40 are inserted into receptacles formed within the casing 10, having covers 42 for the wells. FIG. 7 omits the detail of the wrap mount 40, for clarity.

-The Single Switch Inversely Controlling Vacuum and Rate

An on-off switch or knob 45 (and see FIG. 9) is provided on the casing, which 10 can be rotary or push-button to that end. It is nonetheless rotary and push-button in this embodiment since it also acts to control the amount of vacuum being applied. As the knob 45 is rotated, a signal is generated which increases or decreases the level of vacuum (suction force) to be applied, depending on which way the knob is turned. In this embodiment, as the suction force is increased, the cycle (rate) is decreased. That 15 is, the rate and force are inversely related. This is considered to have a beneficial effect. The knob is pushed in for on and off.

-The Function Indicator

Additionally visible from the exterior of the casing 10 is a LCD display 48, a 20 milk let-down button 49, and a program card slot 50 (the let-down sequence and programmable aspects will also be discussed in more detail below). Milk-let down button 49 is used to activate a pre-programmed suction sequence (embodied in components to be hereinafter described) particularly adapted for let-down and stimulate the milk ejection reflex. The slot 50 provides the interface access for programming cards used with the breastpump of this invention.

25 The display 48 provides visual indications of various functions of the pump. This could include, for example, the type of sequence then programmed, the level of suction force, the battery condition, and so forth.

-The Diaphragm Protective Covers

In this embodiment, the two diaphragm pumps 30 are in a well formed in the 30 top of the casing 10. A cover 35 (also 35' and 35'') (again, primed numbers being substantially similar to their un-primed counterparts) is provided which fits over the well and is generally flush with the upper housing part 11. The outlets 31 extend through relieved areas in the cover 35, for example, for easy access in use.

-11-

It may be noted that the shells 24 are shown formed in the cover of the embodiment of FIG. 8. The FIG. 17 embodiment has the shells 24 mounted in a removable manner in the upper housing, as through a snap fit or interference engagement, such as shown in the embodiment of FIGS. 20 and 21(a) through 21(c),
5 to allow easier access for cleaning or replacing the membranes of the pumping mechanism, and for cleaning the shells themselves (which are provided with grips 33 to these ends).

In the FIG. 17 embodiment, diaphragm member or membrane 34, which may be made of any suitably durable flexible and durable fluid-impervious material (to be
10 airtight), such as silicone with a Shore A hardness in the range of 30 to 70, is molded around its perimeter to a rigid plastic collar 85. Collar 85 has a plurality of depending anchor posts 86 with outboard flanges formed thereon, which engage with the inside lip of the respective well in the upper housing part 11 within which the collar 85 is received to snap-fit the membrane 34 in place.

15 Prophylactic (protective) disposable/cleanable covers 36 are additionally and advantageously provided, which form-fit over the diaphragms 34 and isolate them from air and other fluid from the breastshields. The covers 36, which can be made of the same material as the membranes but thinner, are likewise fluid-impervious.

Referring to FIGS. 20 and 21(a) through 21(c) in particular, each of the covers
20 36 has an upturned cuff 87 which forms an annular well around the perimeter of the cover 36. A pair of circumferential beads 88 and 89, which are slightly offset vertically from each other, are formed along the bottom area of the annular well. Uppermost bead 88 engages in an annular rim channel 90 formed along the bottom
25 outside of shell 24', for a substantially airtight engagement between the protective cover 36 and the shell.

An interior channel 93 is formed within the interior bottom of the cover 36 by a bead 91 and shoulder 92, which each run circumferentially around the cover. This interior channel 93 is received on a slightly protruding edge or rim on the collar 85 of the membrane 34. An airtight fit is thus provided between the protective cover 36 and
30 the membrane 34, which also serves to releasably fix the shell 24 in place over the membrane 34, and complete the diaphragm pump 30.

Note also that a one-way valve 95 is provided in the membrane 34, which communicates with the possible space that may form between the membrane 34 and

-12-

overlying cover 36. This valve permits any entrapped air therebetween to be exhausted, such as if the first stroke on start-up happens to be toward the shell 24, with the protective cover 36 thereafter then following the movement of the diaphragm 34 to which it will generally be in facial engagement.

5 **The Programmable Aspects**

One significant aspect of the present invention is the ability to program the breastpump with different types of suction sequences, or cycles as they are sometimes referred to herein. With reference to FIG. 9, for instance, the breastpump utilizes a microprocessor-based system indicated at 60 which is provided user input through a 10 plurality of "chip" cards 61. Each chip card contains one or more predetermined programs recorded on an EEPROM. For example, each card could contain a specific type of sequence along with a milk let-down sequence.

An EEPROM microcontroller of the type MB90562 may be used, for one example, or the Atmel 2-wire EEPROM chipcard microcontroller AT24C164 for 15 another. These provide about 16K of memory, which is considered presently sufficient.

The programs (some examples of which are described hereafter) are recorded in a conventional manner, and would be provided to the mother ready to use. The programmed chip card is inserted into the slot 50 in the back of the casing 10, where it 20 engages an interface to the microprocessor. The particular program on the selected chip card 61 is then communicated to the microprocessor 60. Microprocessor 60 is integrated with the drive unit 25 to effect operation of the drive unit in accordance with the selected program, drawing upon either the AC power source as converted via standard technology to DC (indicated at 68 in FIG. 9), or from the battery source 39.

25 The microprocessor 60 can also control power management.

Suction force (e.g., the amount of negative pressure generated) will typically also be adjustable by the user via operation of the rotary control knob 45, as noted above. A pre-set range for the suction force will nonetheless ordinarily be provided in the program as an initial setting, for adjustment by the user thereafter via the knob 45.

30 One embodiment contemplated provides a milk let-down sequence (milk ejection reflex) that can be engaged without need of a chip card for the same. The milk let-down sequence (described below) is pre-programmed in the microprocessor 60, or may otherwise be wired into the circuitry in a manner to override the then-

existing operating program. When the mother desires to engage this sequence, she presses the button 49, which produces and sends an electrical signal, as to the microprocessor 60. The let-down program is then effected.

It will be readily understood that a chip card 61 is but one way to program the 5 microprocessor 60. Other input means could be used, such as more dedicated buttons like button 49, each set to actuate a given sequence pre-programmed into the microprocessor 60. A numeric pad could be provided to input a code. The programs could be provided through an electronic data link, such as a modem, or optically, or otherwise.

10 Data can also be recorded by the microprocessor for downloading or transfer to the chip card. Data could also be directly recorded on the chip card. For instance, it is contemplated that the suckling action of a particular child could be recorded and reduced to a sequence. That sequence could then be programmed into the pump, and the mother would then have a suckling action from the pump very reminiscent of her 15 own child.

Referring now to FIG. 10, the chip card 61a with breastpump operation data thereon is then read (downloaded) at a "card station" 65, shown here as a card reader 76 linked to a computer 77. The computer 77 is used to transfer the data to one of a 20 variety of available media, such as CD, floppy disk, etc. for physical transfer to a research or data monitoring facility, here indicated at 80. The data could also simply be transferred via modem through an Internet interface.

The New Expression Methods (Cycles)

It can thus be seen that a variety of different suction cycles or sequences can now be provided with the same breastpump equipment. An example of the kind of 25 methods that such cycle could represent comprises FIGS. 11 through 15.

FIG. 11, for instance, is what is referred to by Medela, Inc. as the "Standard Classic Program". This is a method for operating a breastpump that has been developed which is considered to provide a general optimal suction curve reminiscent of an infant's normal suckling, such as provided by the 015 "CLASSIC" breastpump 30 sold by Medela, Inc. As indicated in the graph of FIG. 11, negative pressure is along the y-axis (in millimeters of mercury) and time (in seconds) along the x-axis. In this particular method, the cycles are fixed at about 47 per minute; the amount of suction is generally adjustable between about 100 to about 250 mmHg.

-14-

FIG. 12 illustrates what can be termed as a new "Sore Nipple Program" method. In comparison to FIG. 11, it will be seen that the lower end of the vacuum range is reduced to about 20 mmHg, and the overall suction cycle is extended in duration, i.e., from a low of about 25 cycles/min. to about 40. For a lower vacuum applied in this program, there is an increase in the number of cycles. In general, however, there is a slower and gentler suction compared with the "CLASSIC" program of FIG. 11.

FIG. 13 shows a new method for operating a breastpump which is considered to yield an increase in milk output. This is a program that might be applied between regular pump sessions several times a day. In this method, the breastpump is operated at a rapid cyclical rate on the order of about 120 cycles/min., preferably with a pause after a period of vacuum application; here, 10 seconds of vacuum, then a 2 second pause. The negative pressure is in the range of about 50 to about 150 mmHg. Note the detail in the inset of FIG. 13 showing the rapidity and steep slopes of the vacuum application.

What has been termed a new "Superior Program" for operating a breastpump is illustrated in FIG. 14. A vacuum range of about 100 to about 250 mmHg has been chosen, with cycles ranging from about 47 to about 78 per minute. The cycle rate and the vacuum are tied, such that as, for instance, the cycles decrease, the amount of vacuum increases, i.e., there is an inverse relationship. It will be noted that this program differs from the "CLASSIC" program above in part through a sequence that initially reaches a peak negative pressure, then smoothly starts a pressure increase (less negative) along a similar (although opposite) slope to that of the negative pressure build-up, but then slows the pressure increase briefly, before continuing on essentially the initial slope for the negative pressure release. A milk let-down sequence is also incorporated in this "Superior Program," and utilizes a vacuum range of about 50 to about 150 mmHg, with cycles ranging between about 80 to about 160 per minute.

Thus, while the invention has been described herein with relation to certain embodiments and applications, those with skill in this art will recognize changes, modifications, alterations and the like which still come within the spirit of the inventive concept, and such are intended to be included within the scope of the invention as expressed in the following claims.

The claims defining the invention are as follows:

1. A breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
- 5 a source of pressure in communication with said breastshield; and
a programmable controller having an interface for the inputting of programs, said programs instructing said controller to produce different shaped sequences of operation of said source of pressure.
- 10 2. The breastpump of claim 1 further comprising a plurality of different programs for said controller.
- 15 3. The breastpump of claim 2 wherein said programs are contained on prerecorded media, and said interface includes a media reader which reads and inputs a program to said controller.
- 20 4. The breastpump of claim 3 wherein said prerecorded media includes cards wherein each program is recorded on a separate card.
- 25 5. The breastpump of claim 2 wherein said programs are different sequences for varying at least one of vacuum force and vacuum cycle according to an application curve.
- 30 6. The breastpump of claim 1 further including a source of positive pressure in communication with said breastshield, and said programmable controller further varies said positive pressure source.
7. The breastpump of claim 6 further comprising a plurality of different programs having different sequences for varying at least one of vacuum force, positive pressure force and vacuum cycle according to an application curve.
8. The breastpump of claim 1 further including a means for generating signals indicative of breastpump operating functions, and means for recording said signals for later retrieval.
9. The breastpump of claim 2 wherein said programs are recorded in said controller, and further including a program selection mechanism associated with said breastpump.
10. The breastpump of claim 9 wherein said program selection mechanism is at least one manually operated button located on said breastpump, said button being actuatable to send a signal to said controller for selection of a program.

11. A breastpump comprising:
 a breastshield having a portion within which a woman's breast is received for the expression of milk;
 a source of vacuum in communication with said breastshield;
 5 a mechanism for operating said source of vacuum according to a first sequence having a curve with a first waveform shape; and
 a controller for operating said source of vacuum according to a second sequence having a curve with a second waveform shape which is different than said first waveform shape.

10 12. The breastpump of claim 11 wherein said controller has a preset program for said first sequence which is a milk letdown sequence.

13. The breastpump of claim 11 further comprising a plurality of different programs for said controller wherein each program has a different sequence and curve shape.

15 14. A breastpump for the expression of mother's milk, the breastpump having a mechanism for manipulating the breast to express milk therefrom,
 comprising a programmable controller for said mechanism, said controller having an interface for the inputting of programs, said programs instructing said controller to produce different pressure sequences of operation of said source of pressure.

20 15. The breastpump of claim 14 further comprising a plurality of different programs for said controller, and at least one of said programs causing a change in sequence shape beyond a change in pressure peak frequency and a change in pressure peak maximum amplitude.

25 16. The breastpump of claim 15 wherein said programs are contained on prerecorded media, and said interface comprises a media reader which reads and inputs a program to said controller.

30 17. The breastpump of claim 16 wherein each program is recorded on a separate media.

18. The breastpump of claim 14 wherein said programs are different sequences for varying at least one of vacuum force and vacuum cycle in a non-linear manner according to an application curve.

35 19. The breastpump of claim 14 wherein said mechanism further includes a source of positive pressure, and said programmable controller further varies said positive pressure source.

20. The breastpump of claim 19 further comprising a plurality of different programs having different sequences for varying at least one of vacuum force, positive pressure force and vacuum cycle according to an application curve.

40 21. The breastpump of claim 14 further including a means for generating signals indicative of breastpump operating functions, and means for recording said signals for later retrieval.

22. The breastpump of claim 15 wherein said programs are recorded in said controller, and said improvement further includes a program selection mechanism associated with said breastpump.

5 23. The breastpump of claim 22 wherein said program selection mechanism is at least one manually operated button located on said breastpump, said button being actuatable to send a signal to said controller for selection of a program.

10 24. A method for operating a breastpump comprising the steps of: recording the pressure waveform of a suckling sequence of an infant in terms of at least suction force over time, and programming a breastpump to operate in accordance with said recording.

15 25. A method for breastpumping comprising: providing a breastshield having a portion within which a woman's breast is received for the expression of milk; providing a source of vacuum in communication with the breastshield which is operated by a controller; and programming the controller to operate the source of vacuum to produce different shaped sequences of operation, wherein at least one of said sequences has a pressure slope deviating from a simple curve between pressure peaks.

20 26. The breastpumping method of claim 25 further comprising providing a plurality of different programs for the controller for varying the vacuum in accordance with the different sequences.

25 27. The breastpumping method of claim 26 wherein the programs are provided on prerecorded media, and the breastpump further comprises a media reader, wherein said programming further comprises inputting a program through the media reader to the controller.

30 28. The breastpumping method of claim 27 wherein each program is recorded on a separate card.

29. The breastpumping method of claim 26 wherein the programs are different sequences for varying at least one of vacuum force and vacuum cycle according to an application curve.

35 30. The breastpumping method of claim 25 further including providing a source of positive pressure in communication with said breastshield, and programming said controller to vary said positive pressure source.

31. The breastpumping method of claim 30 further comprising providing a plurality of different programs having different shaped sequences for varying at least one of vacuum force, positive pressure force and vacuum cycle according to an application curve.

32. The breastpump of claim 11 wherein said mechanism includes an electric motor, said motor having a reduction drive system with at least first and second belts conveying motive power to a movable member of an expandible chamber device wherein a vacuum is generated.

5 33. The breastpump of claim 32 wherein said expandible chamber device is a diaphragm pump.

10 34. The breastpump of claim 33 wherein there are two diaphragm pumps, said diaphragm pumps having a membrane which is movable relative to a shell, each said membrane being connected to a respective shaft, each said shaft being mounted to a respective belt for linear movement with said respective belt.

35. The breastpump of claim 34 wherein said respective shafts are driven in tandem.

15 36. A motor drive for a breastpump, comprising:
a motor having a rotary output;
a reduction drive system communicating with said rotary output with at least first and second belts conveying motive power from said rotary output to a movable member of an expandible chamber device wherein a vacuum is generated.

37. The motor drive of claim 36 wherein said expandible chamber device is a diaphragm pump.

20 38. The motor drive of claim 37 wherein there are two diaphragm pumps, said diaphragm pumps having a membrane which is movable relative to a shell, each said membrane being connected to a respective shaft, each said shaft being mounted to a respective belt for linear movement with said respective belt.

25 39. The motor drive of claim 38 wherein said respective shafts are driven in tandem.

30 40. A breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of pressure in communication with said breastshield; and
a user programmable controller including an input mechanism through which the user interfaces with said controller to provide program commands capable of varying the waveform shape of a curve defining one or both of an amount of pressure applied and a frequency of pressure application to said breastshield, said curve of at least one program being defined by more than a single peak pressure input.

41. A breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of pressure in communication with said breastshield; and
5 a programmable controller having an interface which receives program commands from a user that cause a desired change in the curve defining a cycle sequence for operating said source of pressure, where said program commands are capable of changing said curve by more than a change in a selected maximum pressure and a selected frequency.

10 42. A breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of pressure in communication with said breastshield; and
a programmable controller having means for a user to select programs, said
15 programs operatively instructing said controller to produce different shaped sequences of operation of said source of pressure.

16 43. A breastpump comprising:
a breastshield having a portion within which a woman's breast is received for the expression of milk;
a source of pressure in communication with said breastshield; and
20 a programmable controller having an input device through which a user can controllably vary the shape of a suction sequence from a simple curve, wherein said simple curve is established by only a pressure level input and a frequency input.

25 44. A method of operating a breastpump comprising:
providing a breastshield having a portion within which a woman's breast is received for the expression of milk;
providing a source of pressure in communication with the breastshield;
receiving from a user and through the interface commands that cause a desired
30 change in operation of the source of pressure; and
changing the shape of a curve defining a cycle sequence for operating the source of pressure in response to commands beyond simply selecting a variation in maximum pressure and frequency.

45. A method of operating a breastpump comprising:
providing a breastshield having a portion within which a woman's breast is
received for the expression of milk;
5 providing a source of pressure in communication with the breastshield;
providing a programmable controller having means for a user to input programs;
inputting programs into the programmable controller; and
instructing said controller to produce different sequences of operation of the
source of pressure in response to said inputting of the programs by the user.

46. A breastpump comprising:
10 a breastshield having a portion within which at least part of a woman's breast is
received;
a pressure source in communication with said breastshield; and
a mechanism operating said pressure source to produce at least a milk letdown
sequence and another sequence different from said letdown sequence.

15 47. The breastpump of Claim 46 wherein said mechanism has a motor drive.

48. The breastpump of Claim 47 further including a controller, said controller
including at least two pre-programmed sequences for operating said motor drive, one of
said sequences being a letdown sequence and another being a milk expression sequence.

20 49. The breastpump of Claim 47 further including a sequence selecting device,
wherein said letdown sequence is selectable by an operator.

50. A breastpump for the expression of mother's milk, the breastpump
having a mechanism for applying a cyclical pressure to the breast to express milk
therefrom, including a programmable controller for said
mechanism, said controller having an interface for the inputting of programs, said
25 programs instructing said controller to produce different shaped sequences of operation
of said source of pressure and wherein one of said sequences is a letdown sequence.

51. The breastpump of Claim 50 further comprising a plurality of different
programs for said controller, and at least one of said programs other than said letdown
sequence causes a change in sequence shape beyond a change in pressure peak frequency
30 and a change in pressure peak maximum amplitude.

52. The breastpump of Claim 51 wherein said programs are contained on
prerecorded media, and said interface comprises a media reader which reads and inputs a
program to said controller.

53. The breastpump of Claim 51 wherein said letdown sequence is a pre-recorded
35 sequence that is actuated by a switch, said switch being mounted on said breastpump for
manipulation by an operator.

54. A method for breast pumping comprising:
providing a breastshield having a portion within which at least part of a woman's
breast is received for the expression of milk;
40 providing a source of pressure in communication with the breastshield;

operating said source of pressure according to a milk letdown sequence, and then operating said source of pressure according to a milk expression sequence.

55. A method for breast pumping comprising:

providing a breastshield having a portion within which a woman's breast is

5 received for the expression of milk;

providing a source of pressure in communication with said breastshield which is operated by a controller;

10 programming said controller to operate said source of pressure to produce at least a milk letdown sequence and a milk expression sequence;

10 operating said breastpump according to said milk letdown sequence, and then operating said breastpump according to said milk expression sequence.

56. A breastpump comprising:

15 a breastshield having a portion within which a woman's breast is received for the expression of milk;

a variable source of pressure in communication with said breastshield; and

15 a controller for operating said source of pressure according to at least two different sequences, wherein said controller transitions from a first of said sequences which is a letdown sequence to a second of said two sequences.

57. The breastpump of Claim 56 further including a user interface with said controller, said interface having a selection for said letdown sequence.

58. A breastpump for the expression of mother' milk,

comprising a mechanism associated with the breastpump specifically adapted to initiate a milk letdown reflex.

59. The breastpump of Claims 46, 50, 56 or 58, wherein said letdown sequence has a vacuum pressure ranging between about 50 mmHg to about 150 mmHg, and a frequency of about 80 to about 160 cycles per minute.

60. The method of Claims 54 or 55, wherein said letdown sequence has a vacuum pressure ranging between about 50 mmHg to about 150 mmHg, and a frequency of about 80 to about 160 cycles per minute.

61. A vacuum pump for a breastpump comprising:
a source of vacuum for applying a level of vacuum force;
a motor drive for said source of vacuum;
a mechanism which alters the level of vacuum force from said source of vacuum,
and which varies a rate of vacuum application;
5 a controller, said controller providing a rate control input to said mechanism and a level control input to said mechanism such that said vacuum force is varied according to an inverse relationship with said rate, and
a single manually operated switch operatively connected to said controller, said switch providing an input to said controller over a range that simultaneously adjusts said vacuum force and said rate according to said inverse relationship.

10 62. The pump of claim 61 wherein said switch is a manually manipulated rotary knob.

15 63. The pump of claim 62 wherein rotation of said knob produces a signal which varies with the position of said knob, said knob when rotated in one direction producing a signal for increasing said rate while also decreasing said vacuum.

64. A breastpump substantially as hereinbefore described with reference to figures 1 to 14, 15 and 16, or 17 to 24 of the accompanying drawings.

65. A method for breastpumping substantially as hereinbefore described with reference to figures 1 to 14, 15 and 16, or 17 to 24 of the accompanying drawings.

66. A motor drive for a breastpump substantially as hereinbefore described with reference to figures 1 to 14, 15 and 16, or 17 to 24 of the accompanying drawings.

67. A vacuum pump for a breastpump substantially as hereinbefore described with reference to figures 1 to 14, 15 and 16, or 17 to 24 of the accompanying drawings.

Dated 4 February, 2005

Medela Holding AG

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

3531818

1/15

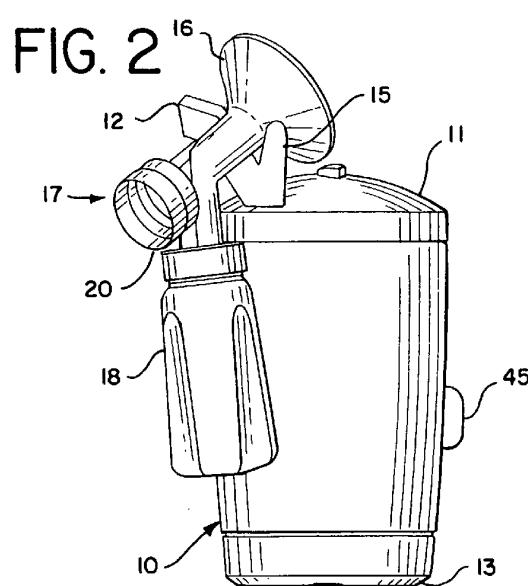
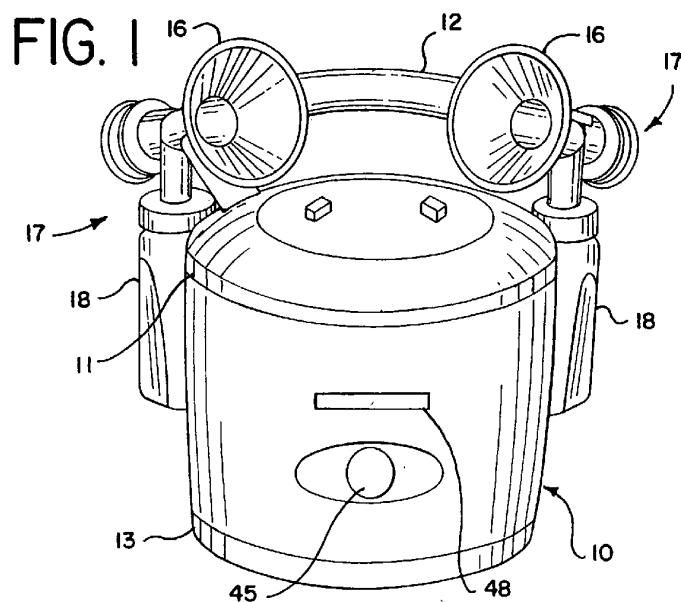


FIG. 3

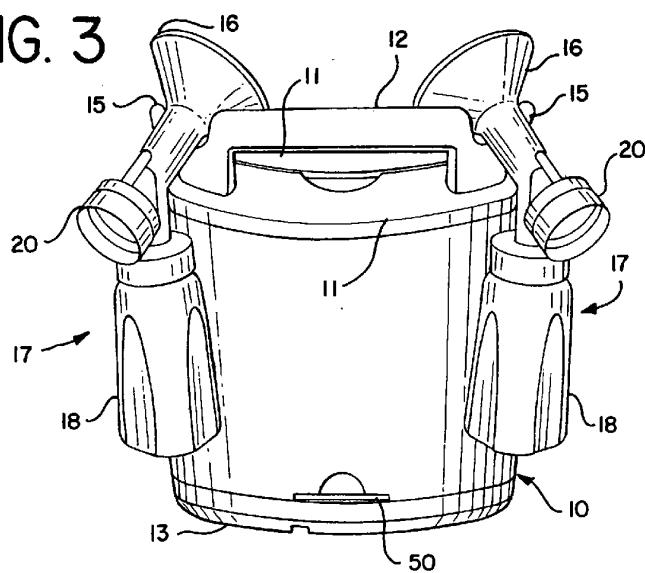
3,830,380
1974-12-16

FIG. 4


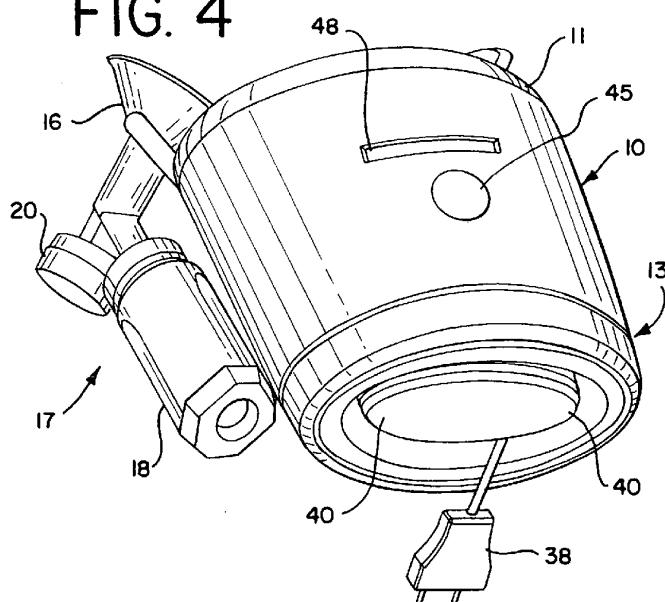
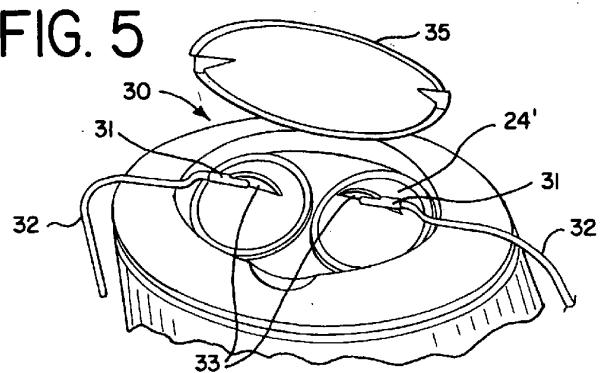
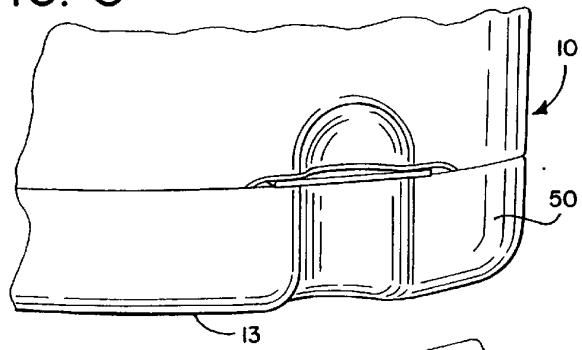
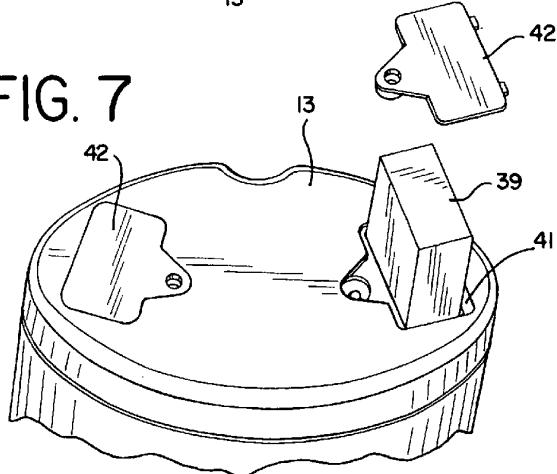


FIG. 5**FIG. 6****FIG. 7**

3 123456

4/15

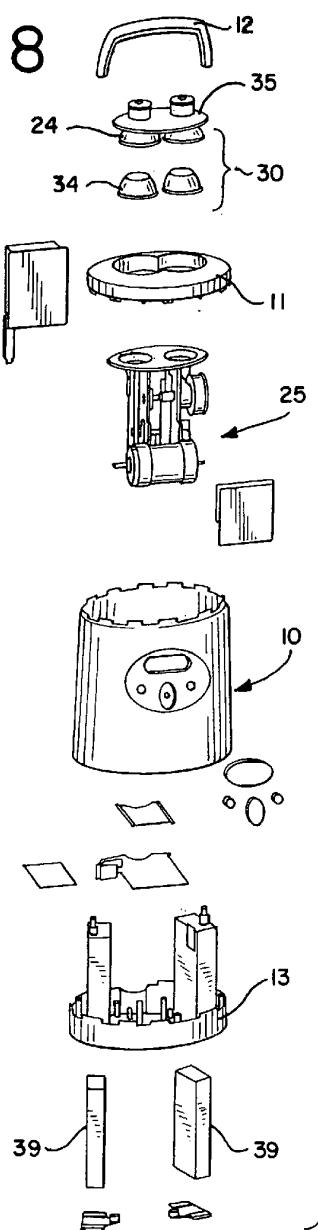FIG. 8



3000 1998

FIG. 9

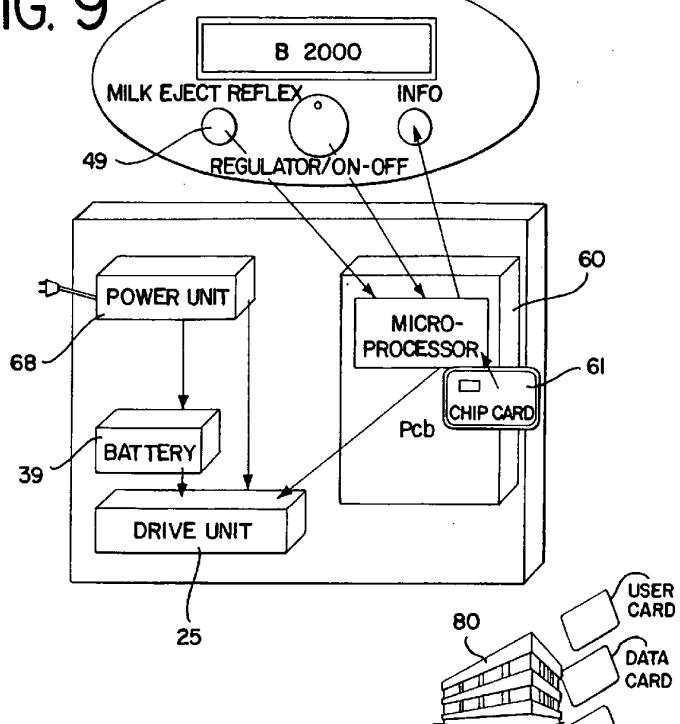


FIG. 10


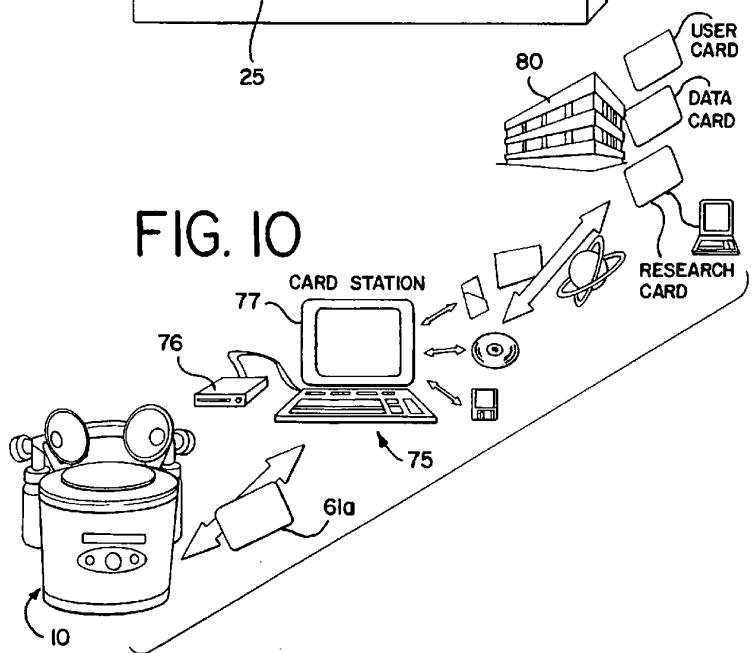


FIG. 11

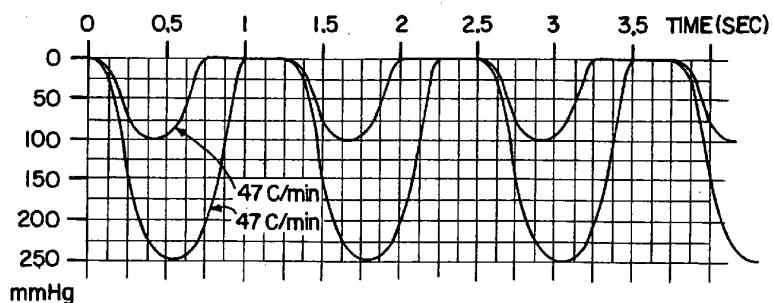STANDARD CLASSIC PROGRAM




SUCTION CURVES AND CYCLES EQUAL TO CLASSIC
 VACUUM RANGE: 100 - 250 mmHg
 CYCLES: 47/min (NOT ADJUSTABLE)

3
9
6
5
1
8
2


FIG. 12

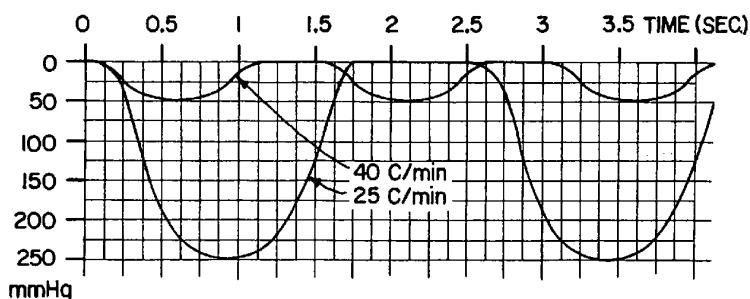SORE NIPPLE PROGRAM




EXTREMELY GENTLE AND SLOW SUCTION
 DECREASED VACUUM YIELDS GENTLER AND SLOWER SUCTION
 VACUUM RANGE: 20 - 250
 CYCLES: 25 - 40/min (CONTROLLED BY VACUUM LEVEL)

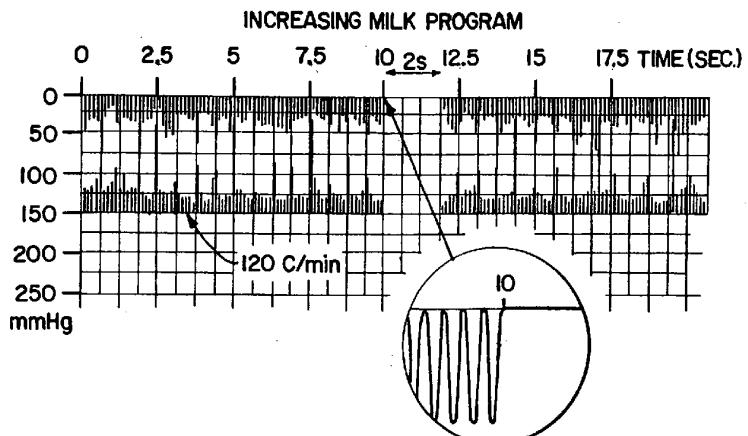FIG. 13



STIMULATION PROGRAM FOR INCREASING THE MILK PRODUCTION
IT IS USED BETWEEN THE PUMP SESSIONS A FEW TIMES A DAY
VACUUM RANGE: 50 - 150 mmHg
CYCLES: 120/min

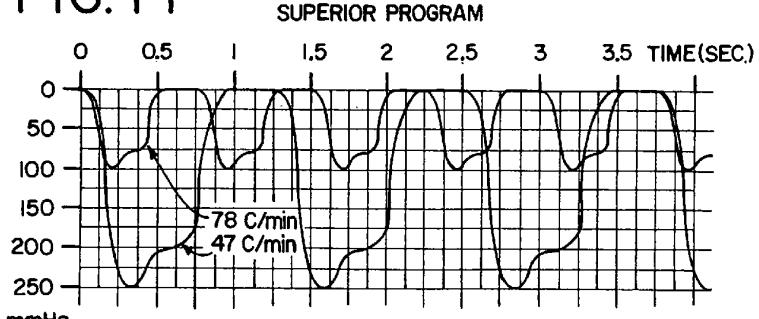FIG. 14



mmHg THIS PROGRAM WILL BE THE MAIN PUMP PROGRAM.
THE FINAL CURVE AND CYCLES HAVE TO BE
EVALUATED BY RESEARCHING.
VACUUM RANGE: 100-250 mmHg
CYCLES: 47-78/min AUTOMATICALLY
THIS PROGRAM CONTAINS ALSO THE MILK LET DOWN PROGRAM
VACUUM RANGE: 50-150 mmHg
CYCLES: 120-150/min

33333333
55555555
88888888

FIG.15

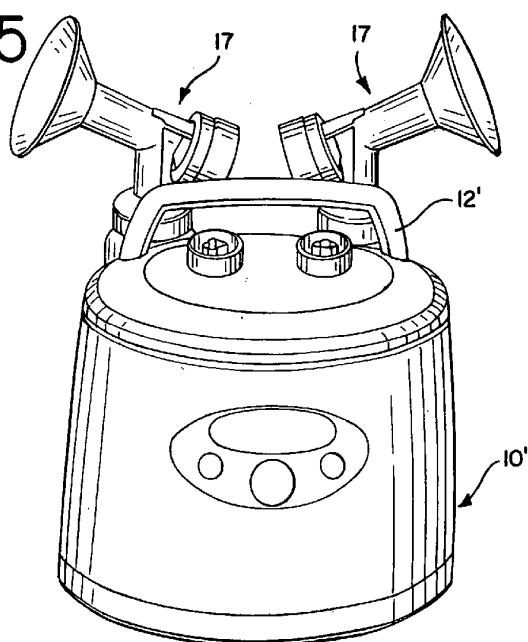


FIG.16


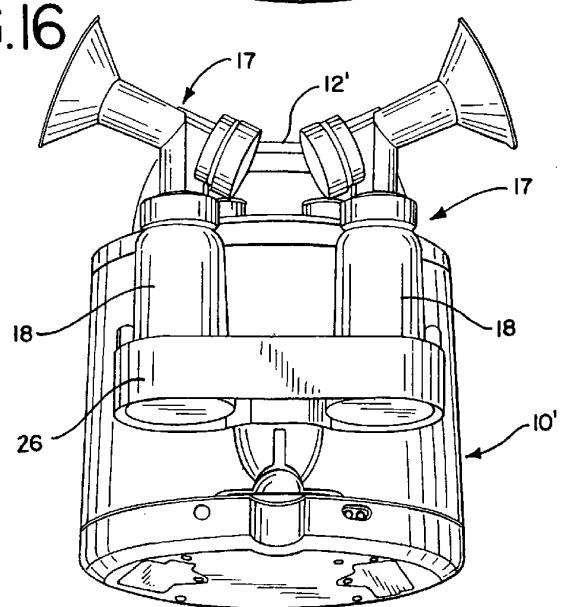


FIG. 17

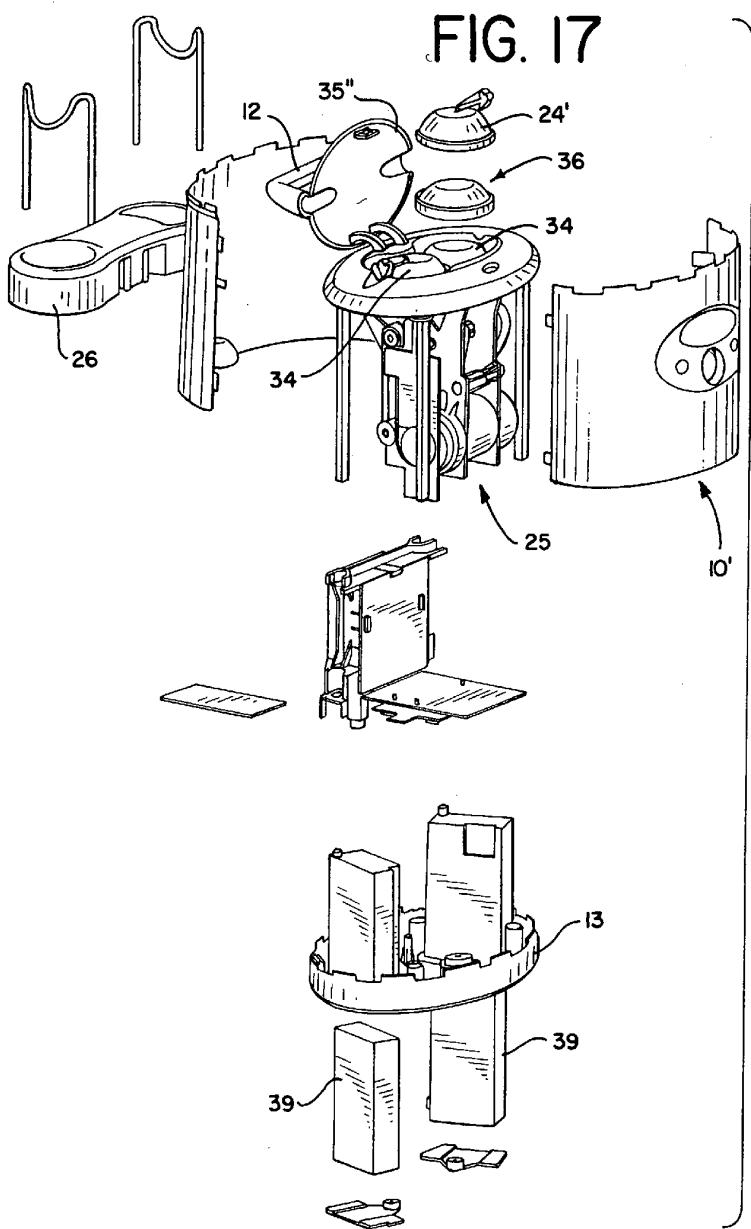

卷之三

ప్రాణికా

18
G.
E.

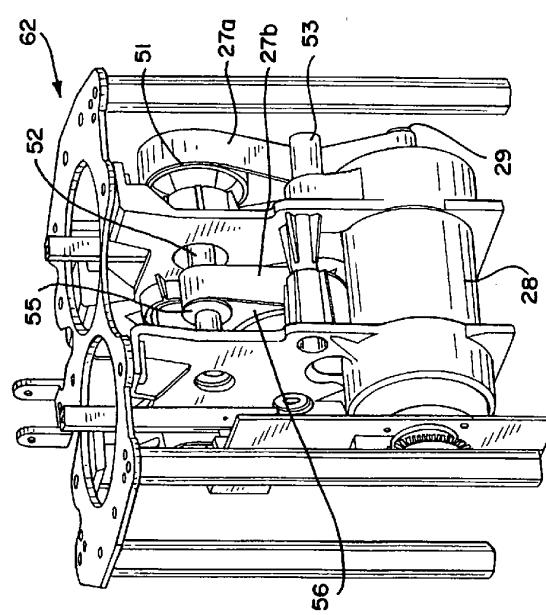


FIG.

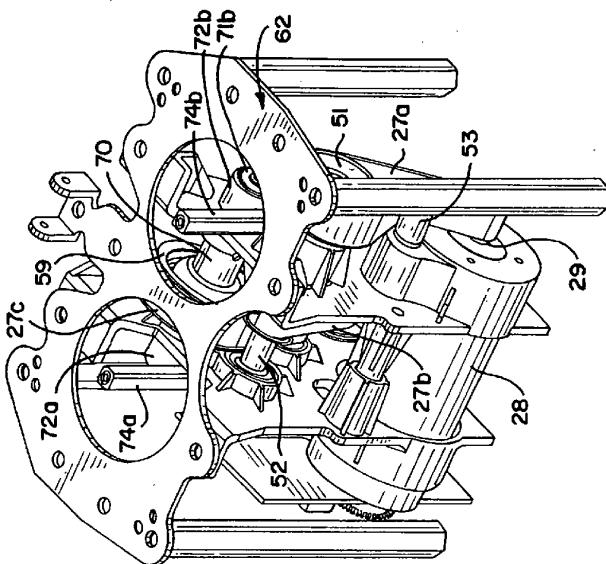


FIG. 20

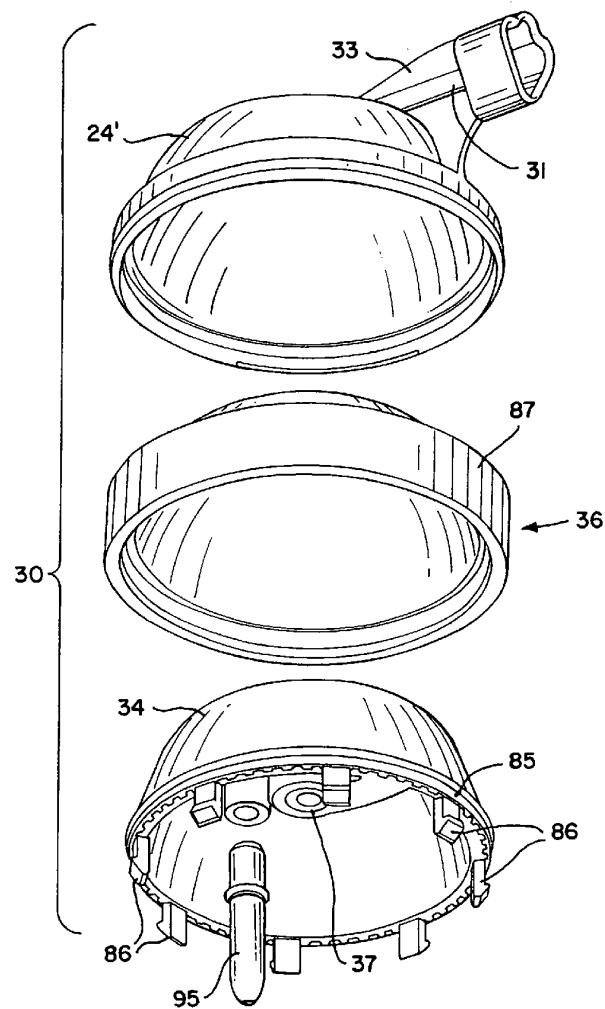


FIG. 2la

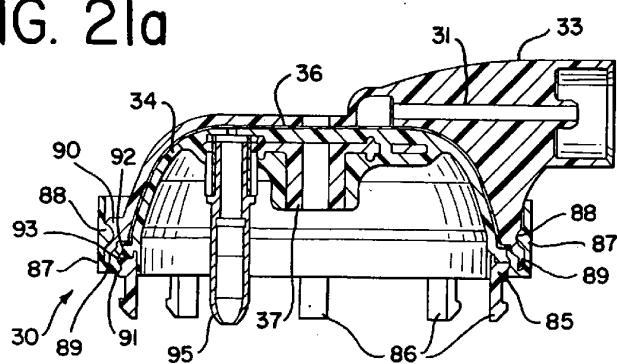


FIG. 2lb

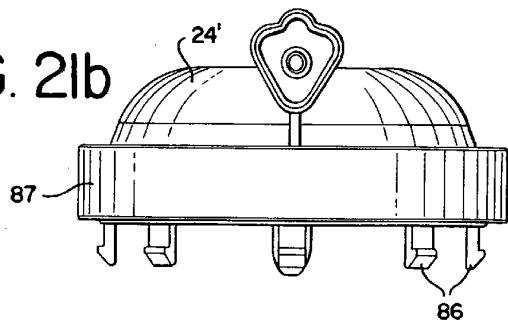


FIG. 2lc


3,637,368
March 28, 1972
Krause et al.

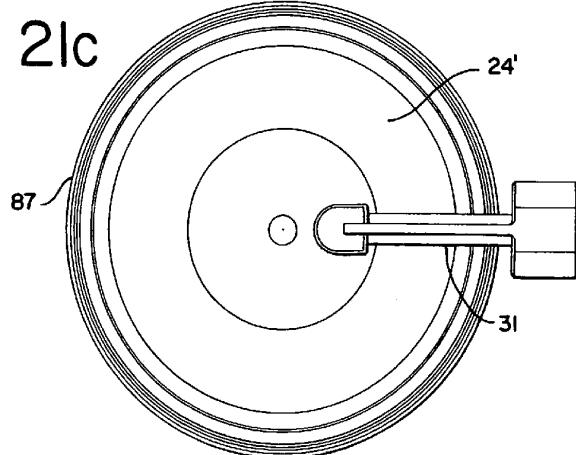FIG. 22


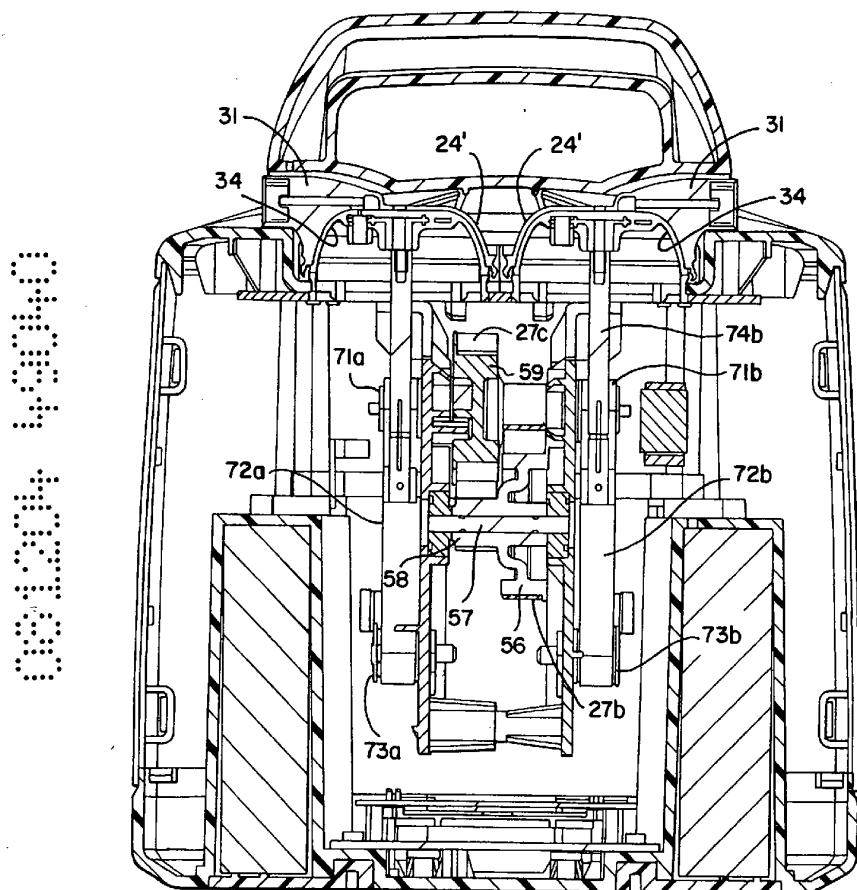


FIG. 23

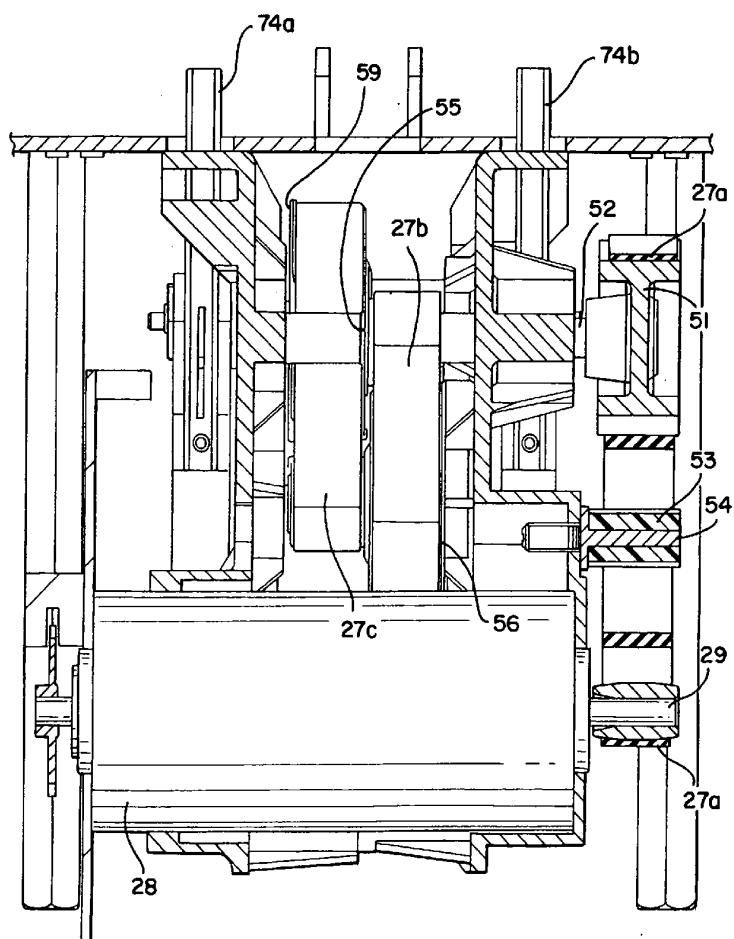GHOST IMAGES



ghost notes

15/15

FIG. 24

