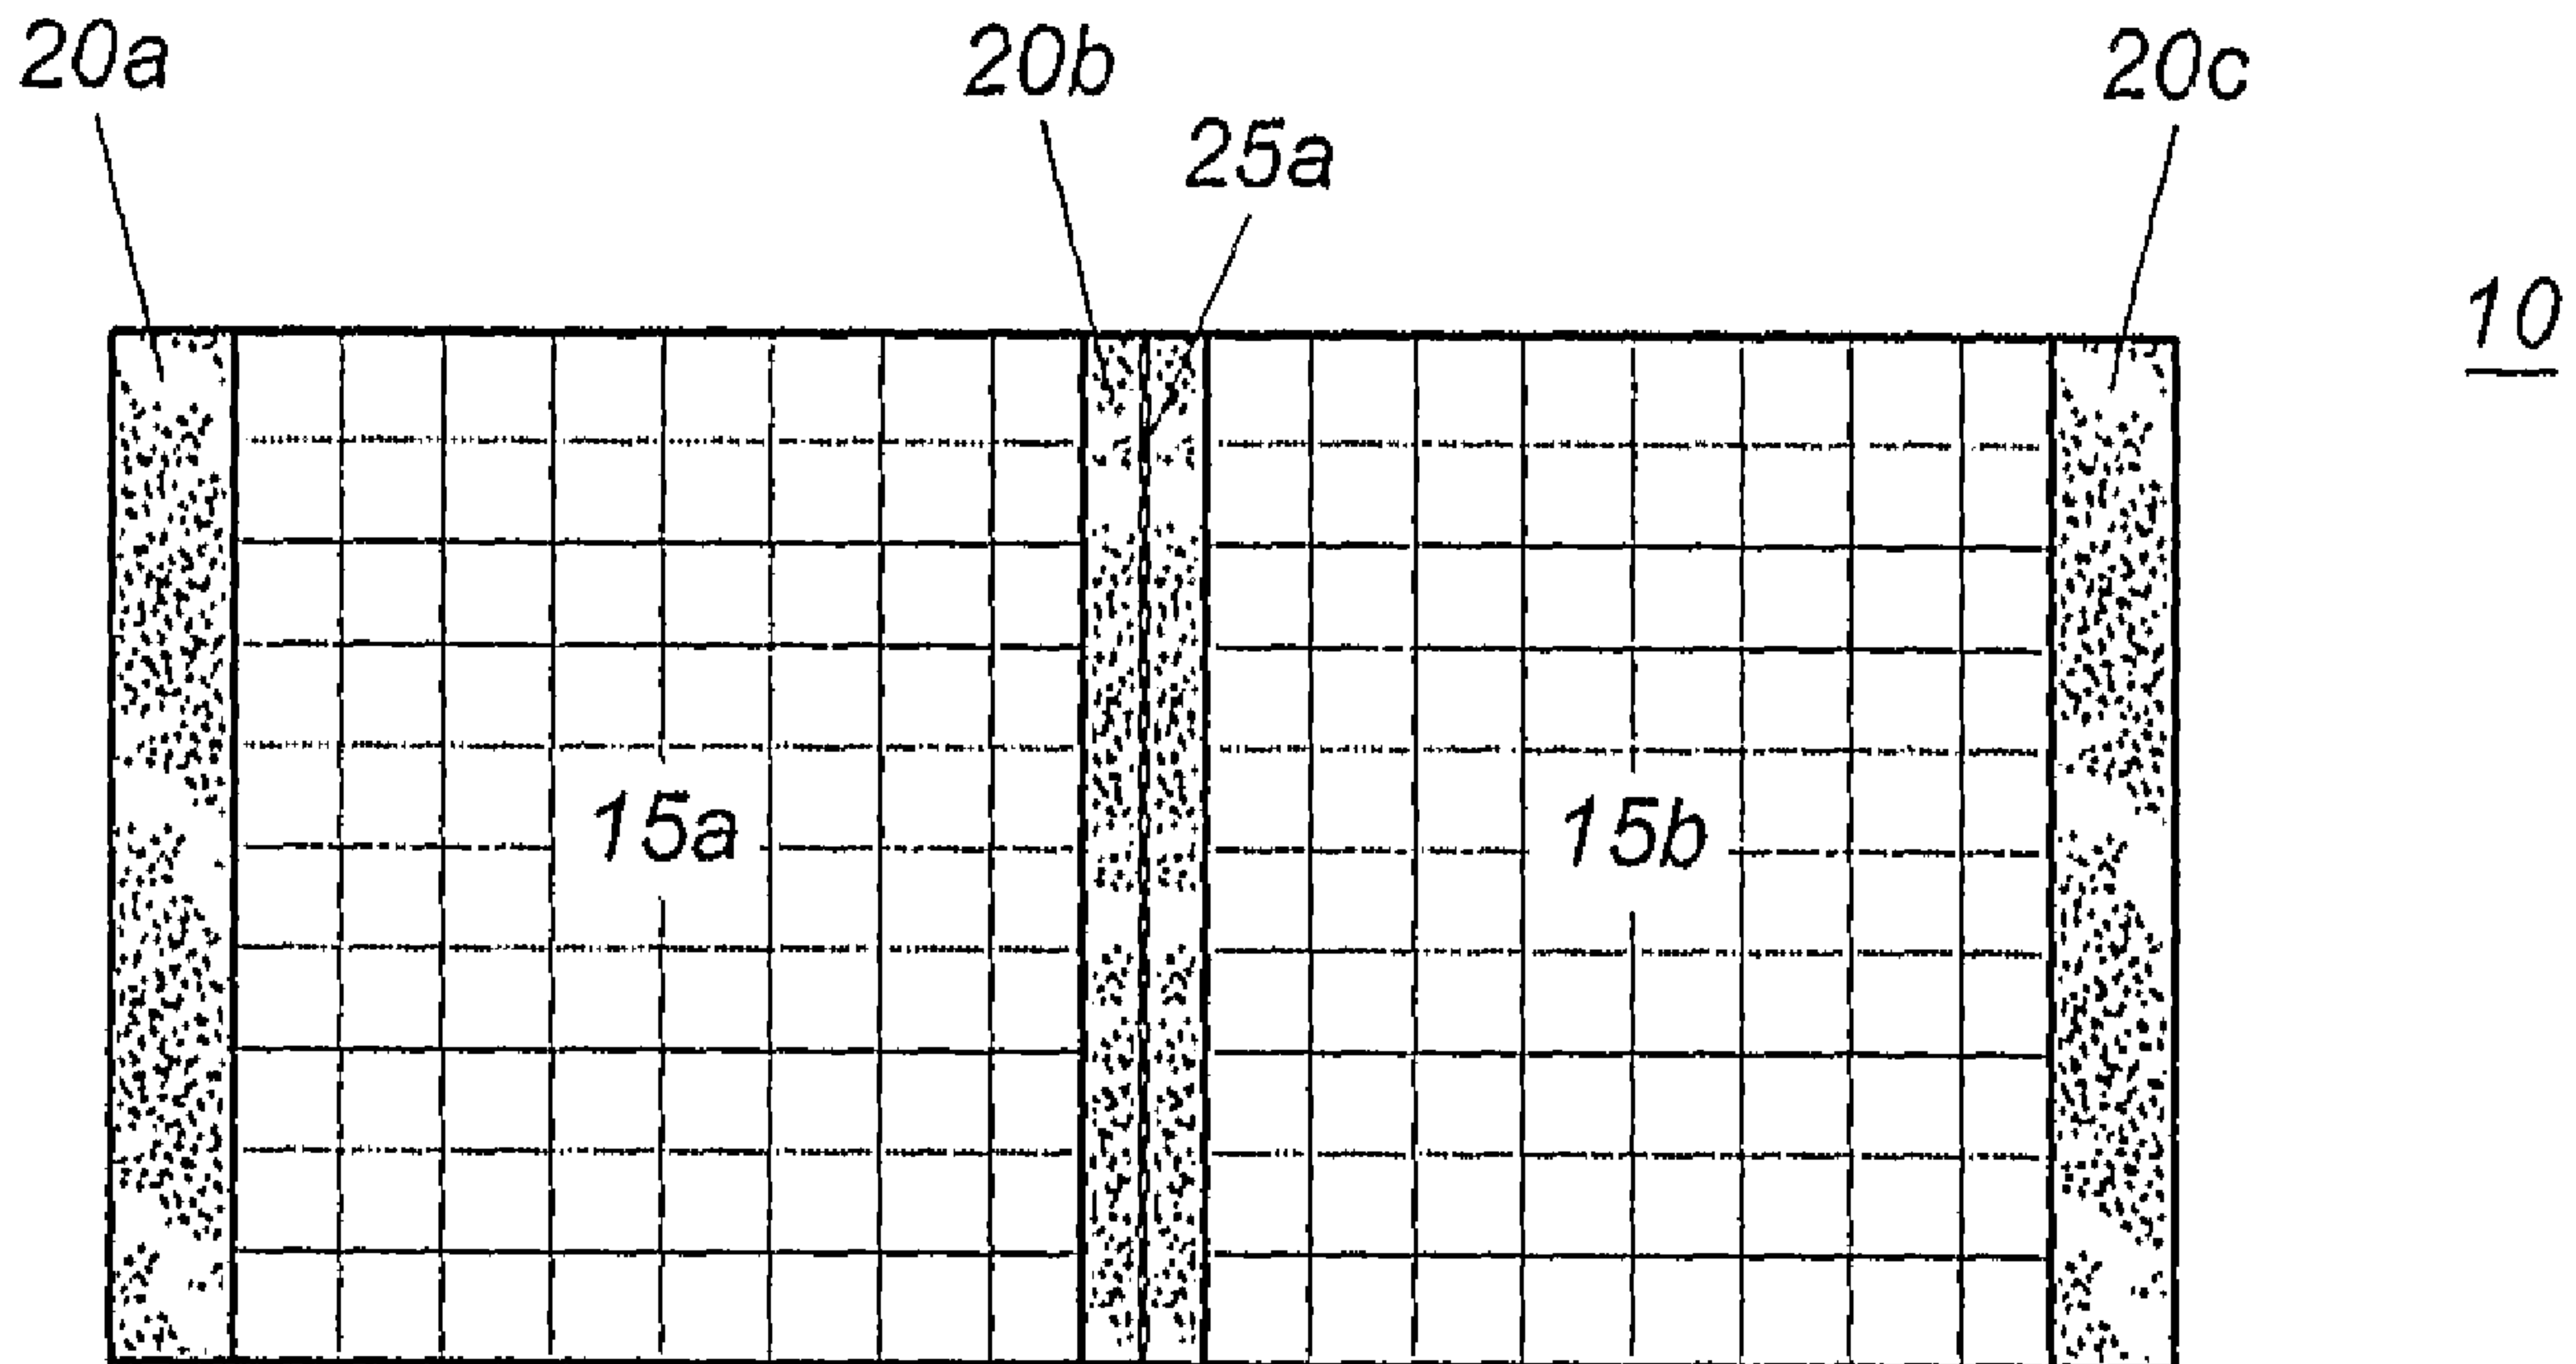




(86) Date de dépôt PCT/PCT Filing Date: 2006/07/20
(87) Date publication PCT/PCT Publication Date: 2007/02/22
(45) Date de délivrance/Issue Date: 2011/12/20
(85) Entrée phase nationale/National Entry: 2008/01/30
(86) N° demande PCT/PCT Application No.: US 2006/028218
(87) N° publication PCT/PCT Publication No.: 2007/021439
(30) Priorité/Priority: 2005/08/16 (US11/204,457)

(51) Cl.Int./Int.Cl. *B65D 81/34* (2006.01),
B65D 75/52 (2006.01)
(72) Inventeur/Inventor:
COLE, LORIN R., US
(73) Propriétaire/Owner:
GRAPHIC PACKAGING INTERNATIONAL, INC., US
(74) Agent: MACRAE & CO.

(54) Titre : EMBALLAGE ISOLE POUR PORTIONS VARIABLES
(54) Title: VARIABLE SERVING SIZE INSULATED PACKAGING



(57) Abrégé/Abstract:
A package for heating a microwave food item is provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 February 2007 (22.02.2007)

PCT

(10) International Publication Number
WO 2007/021439 A3

(51) International Patent Classification:

B65D 81/34 (2006.01) *B65D 75/52* (2006.01)

(21) International Application Number:

PCT/US2006/028218

(22) International Filing Date: 20 July 2006 (20.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/204,457 16 August 2005 (16.08.2005) US

(71) Applicant: **GRAPHIC PACKAGING INTERNATIONAL, INC.** [US/US]; 814 Livingston Court, Marietta, GA 30067 (US).

(72) Inventor (for US only): **COLE, Lorin, R.**; 8472 Samuel Drive, Larsen, WI 54947 (US).

(74) Agent: **ISAF, Louis, T.**; WOMBLE CARLYLE SANDRIDGE & RICE, PLLC., P.o. Box 7037, Atlanta, GA 30357-0037 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

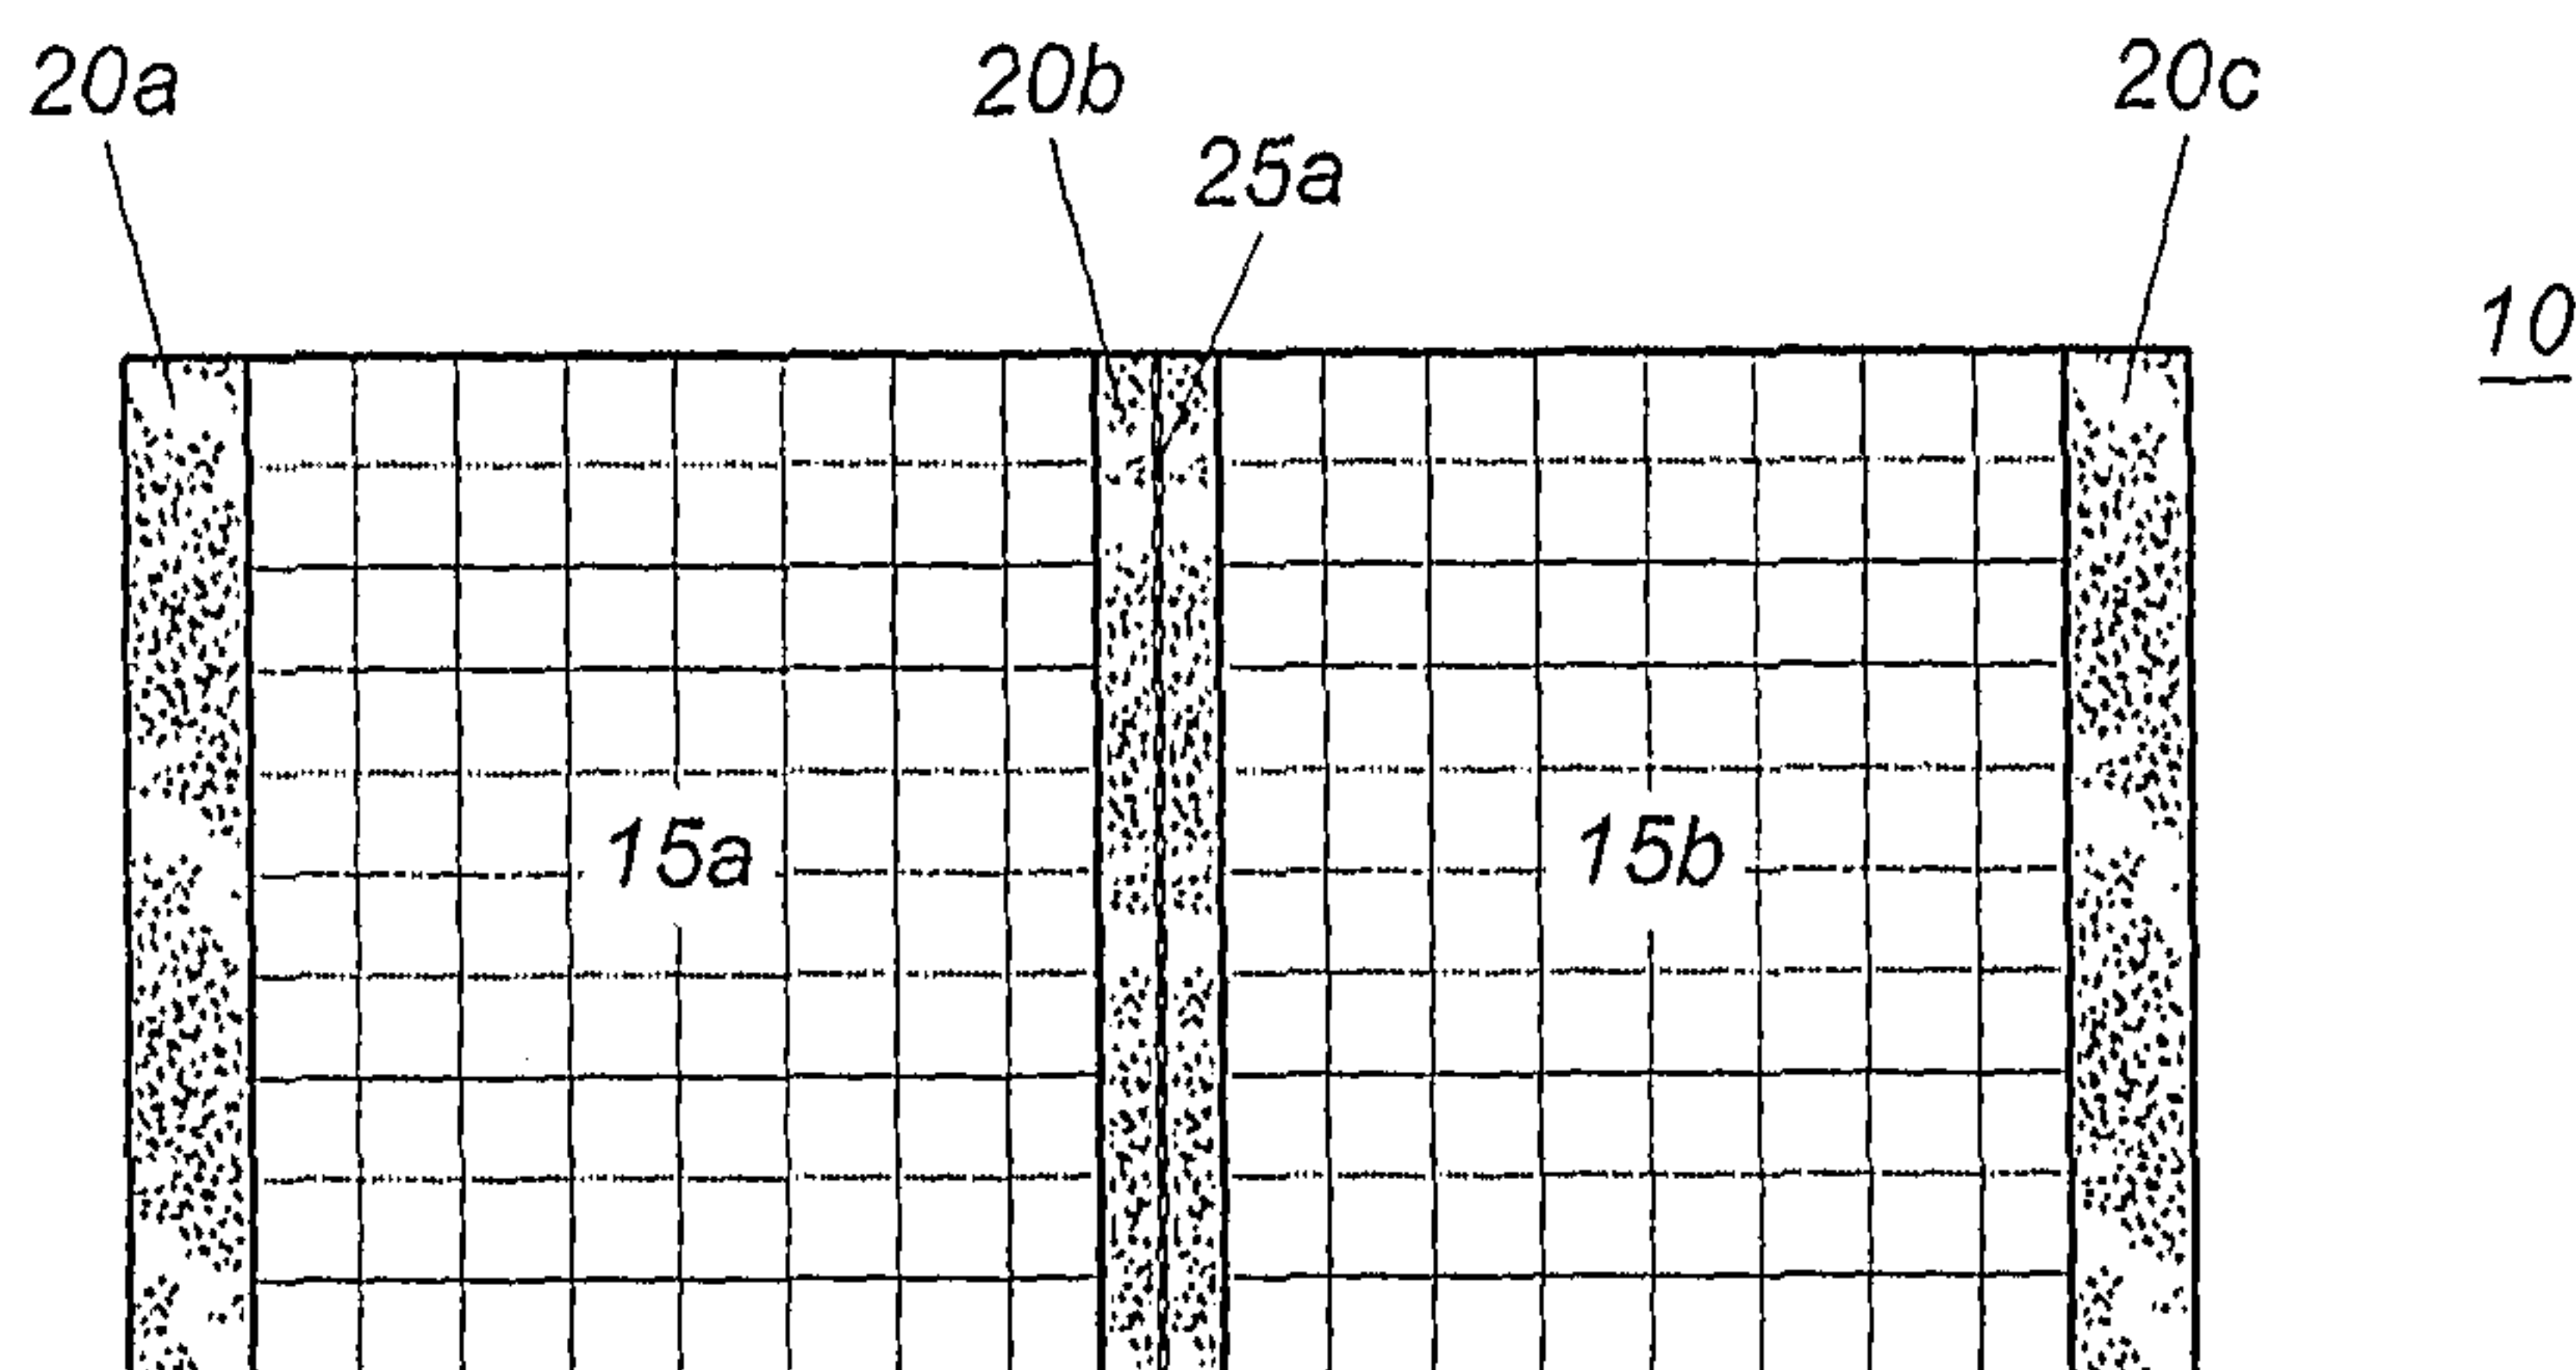
Published:

— with international search report

(88) Date of publication of the international search report:
31 May 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE SERVING SIZE INSULATED PACKAGING



(57) Abstract: A package for heating a microwave food item is provided.

WO 2007/021439 A3

VARIABLE SERVING SIZE INSULATED PACKAGING

BACKGROUND

Many frozen food items intended for heating in a microwave oven
5 are packaged in cartons or other packaging that enhance the effect of the
microwave energy. However, many of such food items are packaged in a
single carton that cannot be reused if the user wishes to consume less than
the entire amount of food in the package. In such instances, the user must
heat the entire food product, consume the desired amount, and re-heat or
10 discard the remaining product. Unfortunately, the quality of the food item
reheated in another container may be compromised.

SUMMARY

Various aspects of the present invention are directed generally to a
15 package and a method of making a package that conveniently allows a user
to determine how much of the food item to heat and consume. The package
includes a plurality of individual serving packages joined by a perforation or
other feature that allows the individual serving packages to be separated
easily.

20 According to one aspect of the present invention there is provided
a package for heating, browning, and/or crisping a food item in a microwave
oven, comprising a plurality of separably joined package segments, each
package segment including a pair of adjoining panels defining a cavity for
receiving a food item, wherein at least one of the adjoining panels comprises
25 a layer of microwave energy interactive material supported on a first
polymer film, a moisture-containing layer joined to the microwave energy
interactive material, and a second polymer film partially joined to the
moisture-containing layer, thereby defining a plurality of expandable cells
between the second polymer film and the moisture-containing layer,
30 wherein the expandable cells are adapted to inflate in response to
microwave energy.

According to a further aspect of the present invention there is

provided a package for heating a microwave food item comprising a first package segment and a second package segment separably joined to one another along a tear line, each segment including a first panel and a second panel joined to one another along respective peripheral edges to define a cavity for receiving a food item and an opening for accessing the cavity; and a removably adhered flap extending from the first panel to the second panel over the opening, wherein at least a portion of each segment is formed from a microwave energy interactive insulating material comprising a susceptor joined to a dimensionally stable substrate, and a polymer film joined to the dimensionally stable substrate in a pattern that defines a plurality of closed cells.

According to another aspect of the present invention there is provided a package comprising a first sheet and a second sheet in an opposed, facing relationship, the first sheet and the second sheet each including a layer of microwave energy interactive material supported on a polymer film, wherein the first sheet and the second sheet each include a pair of opposed edges extending in a first direction, the pair of opposed edges extending in the first direction including a first edge and a second edge opposite one another, and a pair of opposed edges extending in a second direction, the second direction being substantially perpendicular to the first direction, and the first sheet and the second sheet are joined to one another along a bond line extending in the second direction substantially from the first edge of the pair of opposed edges extending in the first direction to the second edge of the pair of opposed edges extending in the first direction the bond line being distal from the respective pairs of opposed edges extending in the second direction.

According to a still further aspect of the present invention there is provided a package comprising a first sheet and a second sheet in an opposed, facing relationship, the first sheet and the second sheet each including a layer of microwave energy interactive material supported on a first polymer film, a moisture-containing layer joined to the layer of microwave energy interactive material, and a second polymer film joined to the moisture-containing layer in a patterned configuration that defines a

plurality of closed cells between the moisture-containing layer and the second polymer film, wherein the first sheet and the second sheet each have a pair of opposed edges extending in a first direction and a pair of opposed edges extending in a second direction substantially perpendicular to the first direction, and the first sheet and the second sheet are joined to one another by an end seal along a first edge of the pair of opposed edges extending in the first direction, and a plurality of dividing seals extending in the second direction substantially between the respective pairs of opposed edges extending in the first direction, the plurality of dividing seals defining a plurality of package segments.

According to another aspect of the present invention there is provided a method of preparing a food item in a microwave oven comprising: providing a multi-serving food package including a plurality of separably joined package segments, each package segment containing a serving of the food item, each package segment comprising a pair of adjoining panels, each of the adjoining panels including a layer of microwave energy interactive material supported on a first polymer film, a moisture-containing layer joined to the layer of microwave energy interactive material, and a second polymer film partially joined to the moisture-containing layer, thereby defining a plurality of expandable cells between the second polymer film and the moisture-containing layer, wherein the expandable cells are adapted to inflate in response to microwave energy; selecting a number of servings to be heated, the number of servings corresponding to a number of package segments; and separating the selected number of package segments from the multi-serving food package.

According to yet another aspect of the present invention there is provided a method of preparing a food item in a microwave oven, the food item having a surface to be browned and/or crisped, the method comprising: providing a multi-serving food package including a plurality of package segments joined along respective lines of disruption, each package segment comprising a plurality of panels joined along respective edges to define an interior space for receiving a serving of the food item, at least one of the

adjoined panels including a layer of microwave energy interactive material on a first polymer film, the first polymer film facing the interior space of the package segment, a moisture-containing layer joined to the layer of microwave energy interactive material, and a second polymer film joined to the moisture-containing layer in a patterned configuration, thereby defining a plurality of expandable cells between the second polymer film and the moisture-containing layer; selecting a number of servings to be heated, the number of servings corresponding to a number of package segments; and separating the selected number of package segments from the multi-serving package along the respective line of disruption.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts an exemplary package that may be formed according to the present invention;

FIG. 2 depicts another exemplary package that may be formed according to the present invention;

FIG. 3 depicts yet another exemplary package that may be formed according to the present invention;

FIG. 4 depicts still another exemplary package that may be formed according to the present invention;

FIG. 5 depicts yet another exemplary package that may be formed according to the present invention;

FIG. 6 depicts another exemplary package that may be formed according to the present invention;

5 **FIG. 7** depicts yet another exemplary package that may be formed according to the present invention;

FIG. 8 depicts still another exemplary package that may be formed according to the present invention, made from an insulating microwave material;

10 **FIG. 9** illustrates an exemplary process that may be used to form a package that may be formed according to the present invention;

FIG. 10 illustrates another exemplary process that may be used to form a package that may be formed according to the present invention;

FIG. 11 is a cross-sectional view of an insulating microwave material
15 that may be used with a package according to the present invention;

FIG. 12 is a cross-sectional view of an alternative insulating microwave material that may be used with a package according to the present invention;

FIG. 13 is a perspective view of the insulating microwave material of
20 **FIG. 11**;

FIG. 14 depicts the insulating microwave material of **FIG. 13** after exposure to microwave energy;

FIG. 15 is a cross-sectional view of yet another insulating microwave material that may be used with a package according to the present invention;

25 **FIG. 16** is a cross-sectional view of still another insulating microwave material that may be used with a package according to the present invention;
and

FIG. 17 depicts an exemplary microwave energy interactive material pattern, in triplicate, that may be used with a package according to the present invention.

5

DESCRIPTION

The present invention may be best understood by referring to the following figures. For purposes of simplicity, like numerals may be used to describe like features. However, it should be understood use of like
10 numerals is not to be construed as an acknowledgement or admission that such features are equivalent in any manner.

FIGS. 1 and 2 depict exemplary packages that may be formed according to the present invention. The packages **10, 10'** include a plurality of individual servings or segments **15a, 15b,...15n**. Thus, the term
15 “package” may be used to refer to one segment or a plurality of substantially attached segments. Each segment is formed from a substantially continuous sheet of packaging material divided by seals **20a, 20b...20n** that may be formed using heat, an adhesive, or any other thermal, chemical, or mechanical technique known to those of skill in the
20 art. Within the seal, a perforation line **25a, 25b** a tear strip (not shown), or other feature for separating the segments **15a, 15b,...15n** may be provided.

As shown in **FIG. 3**, each segment **15** includes a first panel **30** and a second panel **35** joined by one or more dividing seals **20a, 20b** and one or more end seals **45a, 45b** along the periphery **40** of each panel. The first
25 panel **30** and the second panel **35** may be joined using any suitable means, for example, adhesive, thermal bonding, or mechanical fastening. One or more portions of the periphery **40** may be provided with features that allow the sealed portion, for example, end seal **45a** to be opened for removal of the food from a cavity (not shown) therein. In one aspect, at least a portion

of the package includes an end portion **50** that can be opened by grasping the first panel **30** and the second panel **35** proximate the end portion **50** and pulling them apart, thereby exposing the food item inside.

In another aspect shown in **FIG. 4**, a removably adhered flap **55** may
5 extend from the first panel **30** over an opening (not shown) to the second panel **35** for sealing the package **10**. Thus, to open such a package, the flap **55** is lifted and extended in a direction **R** away from the package **10**, thereby exposing the opening (not shown). In still another aspect shown in **FIG. 5**, such a flap **60** may extend from one portion of the first panel to
10 another portion of the first panel. As above, such a package is opened by lifting the flap in a direction **R** away from the package. In yet another aspect, the package **10** may include a perforated tear strip **65** (**FIG. 6**) or zipper **70** (**FIG. 7**) in the first panel or the second panel. With such packages, the panel is opened by tearing of the panel along the perforation,
15 or by pulling the tear strip, as needed. Other opening features are contemplated hereby.

By packaging a food item in a package formed according to the present invention, a consumer is able to determine how many portions he or she would like to consume. Thus, for example, a consumer may tear off
20 one serving, two servings, or more as desired. Further, the packaging of the present invention provides convenient apportioning between multiple consumers. Thus, for example, where two people are planning to consume the food item, each can select the number of portions to heat. Further still, by dividing the total amount of food into individual servings, those wishing
25 to monitor caloric intake are able to do so more readily. The package may provide the number of calories per serving, so the user may heat a single serving or a multiple thereof. The package may be divided into individual segments before, during, or after heating. After heating, the package may be

removed from the microwave oven. If not already separated, the package may be separated into individual segments.

If desired, the package may include features that permit each segment to be maintained in an upright configuration after opening. For example, as shown in **FIG. 8**, the package **10''** may include a first panel **30** and a second panel **35** joined along at least a portion of the periphery **40** thereof, and a third panel **75** joined to the first panel **30** along a first edge **80** and joined to the second panel **35** along a second edge **90**. When the package is opened and held in an upright position (not shown), the third panel serves as a bottom panel of the package. Such a package can be placed on a table, on the seat of a car, or in any other suitable location without toppling. The package also may include features for venting each segment.

The exemplary packages shown herein have a square or rectangle configuration and are shown to be hand-held type packages. However, it should be understood that other shapes and configurations are contemplated by the present invention. Examples of other shapes encompassed hereby include, but are not limited to, polygons, circles, ovals, cylinders, prisms, spheres, polyhedrons, and ellipsoids. The shape of the package may be determined largely by the shape of the food product, and it should be understood that different packages are contemplated for different food products, for example, sandwiches, pizzas, French fries, soft pretzels, pizza bites, cheese sticks, pastries, doughs, and so forth. Likewise, the package may include gussets, pleats, or any other feature needed or desired to accommodate a particular food item and/or portion size. Additionally, it should be understood that the present invention contemplates packages for single-serving portions and for multiple-serving portions, and is not restricted to hand-held packages. It also should be understood that various components used to form the packages of the present invention may be

interchanged. Thus, while only certain combinations are illustrated herein, numerous other combinations and configurations are contemplated hereby.

The packages of the present invention may be constructed in any suitable manner. Thus, for example, as shown in **FIG. 9**, to form a two-
5 panel package, the first panel and the second panel may be unwound from rolls of stock material. The panels may be aligned as desired, and bonded as needed to form seals along a portion of the periphery thereof. A portion of the periphery typically is left unsealed to form an opening through which a food item can be inserted. The opening then can be sealed. It should be
10 understood that the food may be inserted through an opening that differs from the opening used by the consumer to access the heated food item. Thus, in one example, the food item may be inserted through an opening formed by the first panel and the second panel, and may be removed through a perforation or tear strip in either the first panel or the second
15 panel. In another example illustrated in **FIG. 10**, the package may be formed from a single roll of stock material that is subject to a folding process to create the first and second panel. The remainder of the process may be similar to that described above.

Any of the packages or cartons described herein or contemplated
20 hereby may include features that enhance the heating or cooking of the food item. For example, any of the packages may be formed from one or more microwave energy interactive materials that promote browning and/or crisping of the food item during microwave heating. In one aspect, the interior of the package includes a microwave energy interactive material
25 that promotes browning and/or crisping of the food item during microwave heating, for example, a susceptor material. Depending on the microwave energy interactive material selected and its positioning in the packaging, the susceptor may absorb microwave energy, transmit microwave energy, or reflect microwave energy as desired for a particular food item.

A susceptor used in accordance with the present invention may comprise a microwave energy interactive material deposited on or supported by a substrate. The microwave energy interactive material may comprise an electroconductive or semiconductive material. According to
5 one aspect of the present invention, the microwave energy interactive material may comprise a metal or a metal alloy provided as a metal foil; a vacuum deposited metal or metal alloy; or a metallic ink, an organic ink, an inorganic ink, a metallic paste, an organic paste, an inorganic paste, or any combination thereof. Examples of metals and metal alloys that may be
10 suitable for use with the present invention include, but are not limited to, aluminum, chromium, copper, inconel alloys (nickel-chromium-molybdenum alloy with niobium), iron, magnesium, nickel, stainless steel, tin, titanium, tungsten, and any combination thereof.

While metals are inexpensive and easy to obtain in both vacuum
15 deposited or foil forms, metals may not be suitable for every application. For example, in high vacuum deposited thickness and in foil form, metals are opaque to visible light and may not be suitable for forming a clear microwave package or component. Further, the interactive properties of such vacuum deposited metals for heating often are limited to heating for
20 narrow ranges of heat flux and temperature. Such materials therefore may not be optimal for heating, browning, and crisping all food items. Additionally, for field management uses, metal foils and vacuum deposited coatings can be difficult to handle and design into packages, and can lead to arcing at small defects in the structure.

25 If desired, the microwave interactive energy material may comprise a metal oxide. Examples of metal oxides that may be suitable for use with the present invention include, but are not limited to, oxides of aluminum, iron, and tin, used in conjunction with an electrically conductive material where needed. Another example of a metal oxide that may be suitable for

use with the present invention is indium tin oxide (ITO). ITO can be used as a microwave energy interactive material to provide a heating effect, a shielding effect, or a combination thereof. To form the susceptor, ITO typically is sputtered onto a clear polymeric film. The sputtering process
5 typically occurs at a lower temperature than the evaporative deposition process used for metal deposition. ITO has a more uniform crystal structure and, therefore, is clear at most coating thicknesses. Additionally, ITO can be used for either heating or field management effects. ITO also may have fewer defects than metals, thereby making thick coatings of ITO
10 more suitable for field management than thick coatings of metals, such as aluminum.

Alternatively, the microwave energy interactive material may comprise a suitable electroconductive, semiconductive, or non-conductive artificial dielectric or ferroelectric. Artificial dielectrics comprise
15 conductive, subdivided material in a polymeric or other suitable matrix or binder, and may include flakes of an electroconductive metal, for example, aluminum.

The substrate used in accordance with the present invention typically comprises an electrical insulator, for example, a polymeric film. The
20 thickness of the film may typically be from about 35 gauge to about 10 mil. In one aspect, the thickness of the film is from about 40 to about 80 gauge. In another aspect, the thickness of the film is from about 45 to about 50 gauge. In still another aspect, the thickness of the film is about 48 gauge. Examples of polymeric films that may be suitable include, but are not
25 limited to, polyolefins, polyesters, polyamides, polyimides, polysulfones, polyether ketones, cellophanes, or any combination thereof. Other non-conducting substrate materials such as paper and paper laminates, metal oxides, silicates, cellulose, or any combination thereof, also may be used.

According to one aspect of the present invention, the polymeric film may comprise polyethylene terephthalate. Examples of polyethylene terephthalate film that may be suitable for use as the substrate include, but are not limited to, MELINEX[®], commercially available from DuPont
5 Teijan Films (Hopewell, Virginia), and SKYROL, commercially available from SKC, Inc. (Covington, Georgia). Polyethylene terephthalate films are used in commercially available susceptors, for example, the QWIK WAVE[®] Focus susceptor and the MICRO-RITE[®] susceptor, both available from Graphic Packaging International (Marietta, Georgia).

10 According to another aspect of the present invention, the package may include materials that provide a water barrier, oxygen barrier, or a combination thereof. Such barrier layers may be formed from a polymer film having barrier properties or from any other barrier layer or coating as desired. Suitable polymer films may include, but are not limited to,
15 ethylene vinyl alcohol, barrier nylon, polyvinylidene chloride, barrier fluoropolymer, nylon 6, nylon 66, coextruded nylon 6/EVOH/nylon 6, silicon oxide coated film, or any combination thereof.

One example of a barrier film that may be suitable for use with the present invention is CAPRAN[®] EMBLEM 1200M nylon 6, commercially
20 available from Honeywell International (Pottsville, Pennsylvania). Another example of a barrier film that may be suitable is CAPRAN[®] OXYSHIELD OBS monoaxially oriented coextruded nylon 6/ethylene vinyl alcohol (EVOH)/nylon 6, also commercially available from Honeywell International. Yet another example of a barrier film that may be suitable
25 for use with the present invention is DARTEK[®] N-201 nylon 6,6, commercially available from Enhance Packaging Technologies (Webster, New York).

Still other barrier films include silicon oxide coated films, such as those available from Sheldahl Films (Northfield, Minnesota). Thus, in one aspect, a susceptor may have a structure including a film, for example, polyethylene terephthalate, with a layer of silicon oxide coated onto the film, and ITO or other material deposited over the silicon oxide. If needed or desired, additional layers or coatings may be provided to shield the individual layers from damage during processing.

The barrier film may have an oxygen transmission rate (OTR) as measured using ASTM D3985 of less than about 20 cc/m²/day. In one aspect, the barrier film has an OTR of less than about 10 cc/m²/day. In another aspect, the barrier film has an OTR of less than about 1 cc/m²/day. In still another aspect, the barrier film has an OTR of less than about 0.5 cc/m²/day. In yet another aspect, the barrier film has an OTR of less than about 0.1 cc/m²/day.

The barrier film may have a water vapor transmission rate (WVTR) as measuring using ASTM F1249 of less than about 100 g/m²/day. In one aspect, the barrier film has a water vapor transmission rate (WVTR) as measuring using ASTM F1249 of less than about 50 g/m²/day. In another aspect, the barrier film has a WVTR of less than about 15 g/m²/day. In yet another aspect, the barrier film has a WVTR of less than about 1 g/m²/day. In still another aspect, the barrier film has a WVTR of less than about 0.1 g/m²/day. In a still further aspect, the barrier film has a WVTR of less than about 0.05 g/m²/day.

The microwave energy interactive material may be applied to the substrate in any suitable manner, and in some instances, the microwave energy interactive material is printed on, extruded onto, sputtered onto, evaporated on, or laminated to the substrate. The microwave energy interactive material may be applied to the substrate in any pattern, and using any technique, to achieve the desired heating effect of the food item.

For example, the microwave energy interactive material may be provided as a continuous or discontinuous layer or coating, circles, loops, hexagons, islands, squares, rectangles, octagons, and so forth. Examples of alternative patterns and methods that may be suitable for use with the present invention

5 are provided in U.S. Patent Nos. 6,765,182; 6,717,121; 6,677,563; 6,552,315; 6,455,827; 6,433,322; 6,414,290; 6,251,451; 6,204,492; 6,150,646; 6,114,679; 5,800,724; 5,759,422; 5,672,407; 5,628,921; 5,519,195; 5,424,517; 5,410,135; 5,354,973; 5,340,436; 5,266,386; 5,260,537; 5,221,419; 5,213,902; 5,117,078; 5,039,364; 4,963,424;

10 4,936,935; 4,890,439; 4,775,771; 4,865,921, and Re. 34,683. Although particular examples of the microwave energy interactive material are shown and described herein, it should be understood that other patterns of microwave energy interactive material are contemplated by the present invention.

15 The susceptor then may be laminated to the material that forms the package, for example, a paper or paperboard. The paperboard may have a thickness of about 8 to about 28 mils. In one aspect, the paperboard support has a thickness of about 10 to about 20 mils. In another aspect, the paperboard support has a thickness of about 13 mils.

20 If desired, the package may be coated or laminated with other materials to impart other properties, such as absorbency, repellency, opacity, color, printability, stiffness, or cushioning. Absorbent susceptors are described in U.S. Publication No. 2006/0049190 filed August 25, 2004. Additionally, the support may include graphics or indicia printed

25 thereon.

In another aspect of the present invention, the package includes an insulating microwave material. As used herein, an "insulating microwave material" refers to any arrangement of layers, such as polyester layers, susceptor layers, polymer layers, paper layers, continuous and

discontinuous adhesive layers, and patterned adhesive layers that provide an insulating effect. The package may include one or more susceptors, one or more expandable insulating cells, or a combination of susceptors and expandable insulating cells. Examples of materials that may be suitable, alone or in combination, include, but are not limited to, are QwikWave® Susceptor packaging material, QwikWave® Focus® packaging material, Micro-Rite® packaging material, MicroFlex® Q packaging material, and QuiltWave™ Susceptor packaging material, each of which is commercially available from Graphic Packaging International, Inc. For example, FIG. 8 depicts a package using an insulating microwave material with expandable cells. However, any of such materials described above or other insulating materials may be used to form all or a portion of the packages shown in FIGS. 1-8 or contemplated hereby. Examples of such materials are described in PCT Application No. PCT/US03/03779.

In one aspect of the present invention, the insulating microwave material includes at least one susceptor. By using an insulating microwave material with a susceptor, more of the sensible heat generated by the susceptor is transferred to the surface of the food product rather than to the microwave oven environment. Without the insulating material, some or all the heat generated by the susceptor may be lost via conduction to the surrounding air and other conductive media, such as the microwave oven floor or turntable. Thus, more of the sensible heat generated by the susceptor is directed to the food product and browning and crisping is enhanced. Furthermore, insulating microwave materials may retain moisture in the food item when cooking in the microwave oven, thereby improving the texture and flavor of the food item.

Various exemplary insulating materials are depicted in **FIGS. 11-16**. In each of the examples shown herein, it should be understood that the layer widths are not necessarily shown in perspective. In some instances, for example, the adhesive layers may be very thin with respect to other layers, but are nonetheless shown with some thickness for purposes of clearly illustrating the arrangement of layers.

Referring to **FIG. 11**, the material **100** may be a combination of several different layers. A susceptor, which typically includes a thin layer of microwave interactive material **105** on a first plastic film **110**, is bonded for example, by lamination with an adhesive **112**, to a dimensionally stable substrate **115**, for example, paper. The substrate **115** is bonded to a second plastic film **120** using a patterned adhesive **125** or other material, such that closed cells **130** are formed in the material **100**. The closed cells **130** are substantially resistant to vapor migration.

Optionally, an additional substrate layer **135** may be adhered by adhesive **140** or otherwise to the first plastic film **110** opposite the microwave interactive material **105**, as depicted in **FIG. 12**. The additional substrate layer **135** may be a layer of paper or any other suitable material, and may be provided to shield the food item (not shown) from any flakes of susceptor film that craze and peel away from the substrate during heating. The insulating material **100** provides a substantially flat, multi-layered sheet **150**, as shown in **FIG. 13**.

FIG. 14 depicts the exemplary insulating material **150** of **FIG. 13** after being exposed to microwave energy from a microwave oven (not shown). As the susceptor heats upon impingement by microwave energy, water vapor and other gases normally held in the substrate **115**, for example, paper, and any air trapped in the thin space between the second plastic film **120** and the substrate **115** in the closed cells **130**, expand. The expansion of water vapor and air in the closed cells **130** applies pressure on

the susceptor film **110** and the substrate **115** on one side and the second plastic film **120** on the other side of the closed cells **130**. Each side of the material **100** forming the closed cells **130** reacts simultaneously, but uniquely, to the heating and vapor expansion. The cells **130** expand or
5 inflate to form a quilted top surface **160** of pillows separated by channels (not shown) in the susceptor film **110** and substrate **115** lamination, which lofts above a bottom surface **165** formed by the second plastic film **120**. This expansion may occur within 1 to 15 seconds in an energized microwave oven, and in some instances, may occur within 2 to 10 seconds.

10 **FIGS. 15 and 16** depict alternative exemplary microwave insulating material layer configurations that may be suitable for use with any of the various packages of the present invention. Referring first to **FIG. 15**, an insulating microwave material **200** is shown with two symmetrical layer arrangements adhered together by a patterned adhesive layer. The first
15 symmetrical layer arrangement, beginning at the top of the drawings, comprises a PET film layer **205**, a metal layer **210**, an adhesive layer **215**, and a paper or paperboard layer **220**. The metal layer **210** may comprise a metal, such as aluminum, deposited along a portion or all of the PET film layer **205**. The PET film **205** and metal layer **210** together define a
20 susceptor. The adhesive layer **215** bonds the PET film **205** and the metal layer **210** to the paperboard layer **220**.

The second symmetrical layer arrangement, beginning at the bottom of the drawings, also comprises a PET film layer **225**, a metal layer **230**, an adhesive layer **235**, and a paper or paperboard layer **240**. If desired, the two
25 symmetrical arrangements may be formed by folding one layer arrangement onto itself. The layers of the second symmetrical layer arrangement are bonded together in a similar manner as the layers of the first symmetrical arrangement. A patterned adhesive layer **245** is provided between the two paper layers **220** and **240**, and defines a pattern of closed cells **250**

configured to expand when exposed to microwave energy. In one aspect, an insulating material **200** having two metal layers **210** and **230** according to the present invention generates more heat and greater cell loft.

Referring to **FIG. 16**, yet another insulating microwave material **200** is shown. The material **200** may include a PET film layer **205**, a metal layer **210**, an adhesive layer **215**, and a paper layer **220**. Additionally, the material **200** may include a clear PET film layer **225**, an adhesive **235**, and a paper layer **240**. The layers are adhered or affixed by a patterned adhesive **245** defining a plurality of closed expandable cells **250**.

It will be understood by those of skill in the art that in any of the packages contemplated hereby, the microwave insulating material may include an adhesive pattern that is selected to enhance cooking of a particular food item. For example, where the food item is a single item, for example, a sandwich, the adhesive pattern may be selected to form substantially uniformly shaped expandable cells. Where the food item is a plurality of small items, for example, French fries or tater tots, the adhesive pattern may be selected to form a plurality of different sized cells to allow the individual items to be variably contacted on their upper and side surfaces. An example of one such pattern **300** is illustrated in triplicate in **FIG. 17**. The pattern **300** includes a plurality of hexagons **305** and a plurality of circles **310** arranged in groups of concentric circles **315**. While such examples are provided herein, it will be understood that numerous patterns are contemplated hereby, and the pattern selected will depend on the heating, browning, crisping, and insulating needs of the particular food item and package.

Advantageously, the segments may be packaged and provided to a retailer or consumer in any suitable manner. In one aspect, the package may be provided to the consumer as is, that is, without any additional packaging. In another aspect, the package may be provided to the retailer

or consumer within an overwrap, for example, a plastic film package. In yet another aspect, the package may be provided to the retailer or consumer in a carton, for example, a paperboard carton. In any of such aspects, the package may be situated as a “roll” of segments, as a folded stack, as a
5 stack of one or more attached segments, or in any other suitable manner. Thus, the segments and/or package may be configured in any manner desired for aesthetic purposes, to minimize waste, or to optimize manufacturing of the package. For example, a single manufacturing line may be used to prepare cartons including two segments, four segments, and
10 so forth. This provides significant manufacturing benefits over commercially available packages and packaging methods.

Where the package is placed within a carton, the carton may include features that allow for easy dispensing of individual segments. For example, one or more sides of a carton may include a removable panel
15 through which a single segment can be removed. The segments may be attached to other segments or may be stacked as individual segments, as desired. Numerous package and carton configurations are contemplated hereby.

Accordingly, it will be readily understood by those persons skilled in
20 the art that, in view of the above detailed description of the invention, the present invention is susceptible of broad utility and application. Many adaptations of the present invention other than those herein described, as well as many variations, modifications, and equivalent arrangements will be apparent from or reasonably suggested by the present invention and the
25 above detailed description thereof, without departing from the substance or scope of the present invention.

While the present invention is described herein in detail in relation to specific aspects, it is to be understood that this detailed description is only illustrative and exemplary of the present invention and is made merely for purposes of providing a full and enabling disclosure of the present invention. The detailed description set forth herein is not intended nor is to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications, and equivalent arrangements of the present invention.

WHAT IS CLAIMED IS:

1. A package for heating, browning, and/or crisping a food item in a microwave oven, comprising:
 - a plurality of separably joined package segments, each package segment including a pair of adjoining panels defining a cavity for receiving a food item,
 - wherein at least one of the adjoining panels comprises
 - a layer of microwave energy interactive material supported on a first polymer film,
 - a moisture-containing layer joined to the microwave energy interactive material, and
 - a second polymer film partially joined to the moisture-containing layer, thereby defining a plurality of expandable cells between the second polymer film and the moisture-containing layer, wherein the expandable cells are adapted to inflate in response to microwave energy.
2. The package of claim 1, wherein each package segment is joined to at least one other package segment along a perforated line.
3. The package of claim 1, wherein each package segment is joined to at least one other package segment along a tear strip.
4. The package of any one of claims 1 to 3, further comprising an opening feature.
5. The package of claim 4, wherein the opening feature comprises a removably adhered flap extending from the first panel over an opening to the second panel.
6. The package of claim 4, wherein the opening feature comprises a tear strip in at least one of the first panel and the second panel.

7. The package of any one of claims 1 to 3, wherein the package can be opened by grasping the first panel and the second panel proximate a respective peripheral area of each and pulling them apart.
8. The package of any one of claims 1 to 7, wherein each segment comprises a barrier material.
9. The package of any one of claims 1 to 7, wherein at least one of the first polymer film and the second polymer film comprises a barrier material.
10. The package of any one of claims 1 to 9, further comprising a third panel having a first edge and a second edge, wherein
the first edge of the third panel is joined to the first panel, and
the second edge of third panel is joined to the second panel.
11. The package of claim 10, wherein the third panel serves as a base panel for supporting the package in an upright configuration.
12. The package of claim 10 or 11, wherein the first edge and the second edge of the third panel are arcuate in shape and joined to one another proximate to respective end points.
13. The package of any one of claims 1 to 12 in combination with a carton, wherein the carton comprises a plurality of walls and an opening through which one or more separably joined package segments can be removed.
14. The package of any one of claims 1 to 12 in combination with a carton, wherein
the carton comprises a plurality of walls and an opening through which one or more package segments can be removed, and
the package segments are arranged in a stacked configuration.

15. The package of any one of claims 1 to 12 in combination with a carton, wherein
- the carton comprises a plurality of walls and an opening through which one or more package segments can be removed, and
 - the package segments are arranged in a rolled configuration.
16. A package for heating a microwave food item comprising:
- a first package segment and a second package segment separably joined to one another along a tear line, each segment including
 - a first panel and a second panel joined to one another along respective peripheral edges to define a cavity for receiving a food item and an opening for accessing the cavity; and
 - a removably adhered flap extending from the first panel to the second panel over the opening,
 - wherein at least a portion of each segment is formed from a microwave energy interactive insulating material comprising
 - a susceptor joined to a dimensionally stable substrate, and
 - a polymer film joined to the dimensionally stable substrate in a pattern that defines a plurality of closed cells.
17. The package of claim 16, wherein closed cells are adapted to expand when exposed to microwave energy.
18. The package of claim 16 or 17, further comprising a third panel having a first edge and a second edge, wherein
- the first edge of the third panel is joined to the first panel, and
 - the second edge of the third panel joined to the second panel.
19. The package of claim 18, wherein the third panel serves as a base panel for supporting the package in an upright configuration.

20. The package of claim 18 or 19, wherein the first edge and the second edge of the third panel are arcuate in shape and joined to one another proximate to respective end points.

21. The package of any one of claims 16 to 20 in combination with a carton, wherein the carton comprises a plurality of walls and an opening through which one or more separably joined segments can be removed.

22. The package of any one of claims 16 to 20 in combination with a carton, wherein

the carton comprises a plurality of walls and an opening through which one or more package segments can be removed, and

the package segments are arranged in a folded stack configuration.

23. The package of any one of claims 16 to 20 in combination with a carton, wherein

the carton comprises a plurality of walls and an opening through which one or more package segments can be removed, and

the package segments are arranged in a rolled configuration.

24. A package comprising:

a first sheet and a second sheet in an opposed, facing relationship, the first sheet and the second sheet each including a layer of microwave energy interactive material supported on a polymer film, wherein

the first sheet and the second sheet each include

a pair of opposed edges extending in a first direction, the pair of opposed edges extending in the first direction including a first edge and a second edge opposite one another, and

a pair of opposed edges extending in a second direction, the second direction being substantially perpendicular to the first direction, and

the first sheet and the second sheet are joined to one another along a bond line extending in the second direction substantially from the first edge of the pair of opposed edges extending in the first direction to the second edge of

the pair of opposed edges extending in the first direction the bond line being distal from the respective pairs of opposed edges extending in the second direction.

25. The package of claim 24, wherein the bond line extending in the second direction is a first bond line of a plurality of bond lines extending in the second direction.

26. The package of claim 25, wherein at least some bond lines of the plurality of bond lines extending in the second direction are substantially parallel to one another.

27. The package of claim 25 or 26, wherein at least two bond lines of the plurality of bond lines extending in the second direction are distal from the respective pairs of opposed edges extending in the second direction.

28. The package of any one of claims 25 to 27, wherein the plurality of bond lines extending in the second direction define at least one package segment.

29. The package of any one of claims 25 to 28, wherein
the plurality of bond lines extending in the second direction include at least three bond lines extending in the second direction, and
the plurality of bond lines extending in the second direction define a plurality of package segments.

30. The package of claim 29, wherein each package segment of the plurality of package segments is defined by an adjacent pair of bond lines of the plurality of bond lines extending in the second direction.

31. The package of claim 29 or 30, wherein each package segment of the plurality of package segments includes a cavity between the first sheet and the second sheet.

32. The package of any one of claims 29 to 31, wherein each package segment of the plurality of package segments includes a flap extending from the first sheet between an adjacent pair of bond lines.

33. The package of any one of claims 29 to 31, wherein each package segment of the plurality of package segments includes a line of disruption in the first sheet that defines a removable portion.

34. The package of claim 33, wherein the removable portion is adapted to be removed to form an opening.

35. The package of any one of claims 29 to 34, wherein at least some bond lines of the plurality of bond lines extending in the second direction include a line of perforation.

36. The package of claim 35, wherein the line of perforation is adapted to facilitate separation of an adjacent pair of package segments.

37. The package of any one of claims 24 to 36, wherein the first sheet is further joined to the second sheet along a first edge of the pair of opposed edges extending in the first direction.

38. The package of claim 37, wherein the first sheet is further joined to the second sheet along a second edge of the pair of opposed edges extending in the first direction.

39. The package of any one of claims 24 to 38, wherein the layer of microwave energy interactive material is joined to a dimensionally stable substrate in an opposed, facing relationship, such that the microwave energy interactive layer is between the polymer film and the dimensionally stable substrate.

40. The package of any one of claims 24 to 38, wherein the layer of microwave energy interactive material is joined to a moisture-containing layer in an opposed, facing relationship, such that the microwave energy interactive layer is between the polymer film and the moisture-containing layer.

41. The package of claim 40, wherein
the polymer film is a first polymer film, and
a second polymer film is joined to the moisture-containing layer in a patterned configuration that defines a plurality of closed cells between the moisture-containing layer and the second polymer film.

42. The package of claim 41, wherein at least some of the closed cells inflate in response to sufficient exposure to microwave energy.

43. A package comprising:
a first sheet and a second sheet in an opposed, facing relationship, the first sheet and the second sheet each including
a layer of microwave energy interactive material supported on a first polymer film,
a moisture-containing layer joined to the layer of microwave energy interactive material, and
a second polymer film joined to the moisture-containing layer in a patterned configuration that defines a plurality of closed cells between the moisture-containing layer and the second polymer film,
wherein

the first sheet and the second sheet each have a pair of opposed edges extending in a first direction and a pair of opposed edges extending in a second direction substantially perpendicular to the first direction, and

the first sheet and the second sheet are joined to one another by
an end seal along a first edge of the pair of opposed edges extending in the first direction, and

a plurality of dividing seals extending in the second direction substantially between the respective pairs of opposed edges extending in the first

direction, the plurality of dividing seals defining a plurality of package segments.

44. A method of preparing a food item in a microwave oven comprising:
- providing a multi-serving food package including a plurality of separably joined package segments, each package segment containing a serving of the food item, each package segment comprising a pair of adjoining panels, each of the adjoining panels including
 - a layer of microwave energy interactive material supported on a first polymer film,
 - a moisture-containing layer joined to the layer of microwave energy interactive material, and
 - a second polymer film partially joined to the moisture-containing layer, thereby defining a plurality of expandable cells between the second polymer film and the moisture-containing layer, wherein the expandable cells are adapted to inflate in response to microwave energy;
 - selecting a number of servings to be heated, the number of servings corresponding to a number of package segments; and
 - separating the selected number of package segments from the multi-serving food package.

45. The method of claim 44, wherein separating the selected number of package segments from the multi-serving food package comprises separating the respective package segments along a line of perforation.

46. The method of claim 44 or 45, further comprising exposing the selected package segments to microwave energy.

47. The method of claim 46, wherein exposing the selected package segments to microwave energy causes the expandable cells to inflate.

48. The method of claim 47, wherein
the food item has a surface that is desirably browned and/or crisped,

the first polymer film of each adjoined panel faces the food item in the respective package segment, and

the inflating of the expandable cells urges the microwave energy interactive material towards the food item.

49. The method of claim 46, further comprising separating the selected package segments from one another.

50. The method of claim 49, wherein the package segments are separated from one another prior to exposing the selected number of package segments to microwave energy.

51. The method of claim 49, wherein the package segments are separated from one another after exposing the selected number of package segments to microwave energy.

52. The method of claim 46, further comprising stacking the selected package segments in a facing relationship one another in the microwave oven prior to exposing the selected number of package segments to microwave energy.

53. The method of claim 46, further comprising positioning the selected package segments in an upright configuration in the microwave oven prior to exposing the selected number of package segments to microwave energy.

54. The method of any one of claims 44 to 53, further comprising providing a carton for receiving the multi-serving food package.

55. The method of claim 54, wherein the multi-serving food package is configured as a roll of package segments within the carton.

56. The method of claim 54, wherein the multi-serving food package is configured with the package segments in a stacked configuration within the carton.

57. The method of any one of claims 54 to 56, wherein the carton comprises a plurality of walls and an opening through which the package segments can be removed.

58. A method of preparing a food item in a microwave oven, the food item having a surface to be browned and/or crisped, the method comprising:

providing a multi-serving food package including a plurality of package segments joined along respective lines of disruption, each package segment comprising a plurality of panels joined along respective edges to define an interior space for receiving a serving of the food item, at least one of the adjoined panels including

a layer of microwave energy interactive material on a first polymer film, the first polymer film facing the interior space of the package segment,

a moisture-containing layer joined to the layer of microwave energy interactive material, and

a second polymer film joined to the moisture-containing layer in a patterned configuration, thereby defining a plurality of expandable cells between the second polymer film and the moisture-containing layer;

selecting a number of servings to be heated, the number of servings corresponding to a number of package segments; and

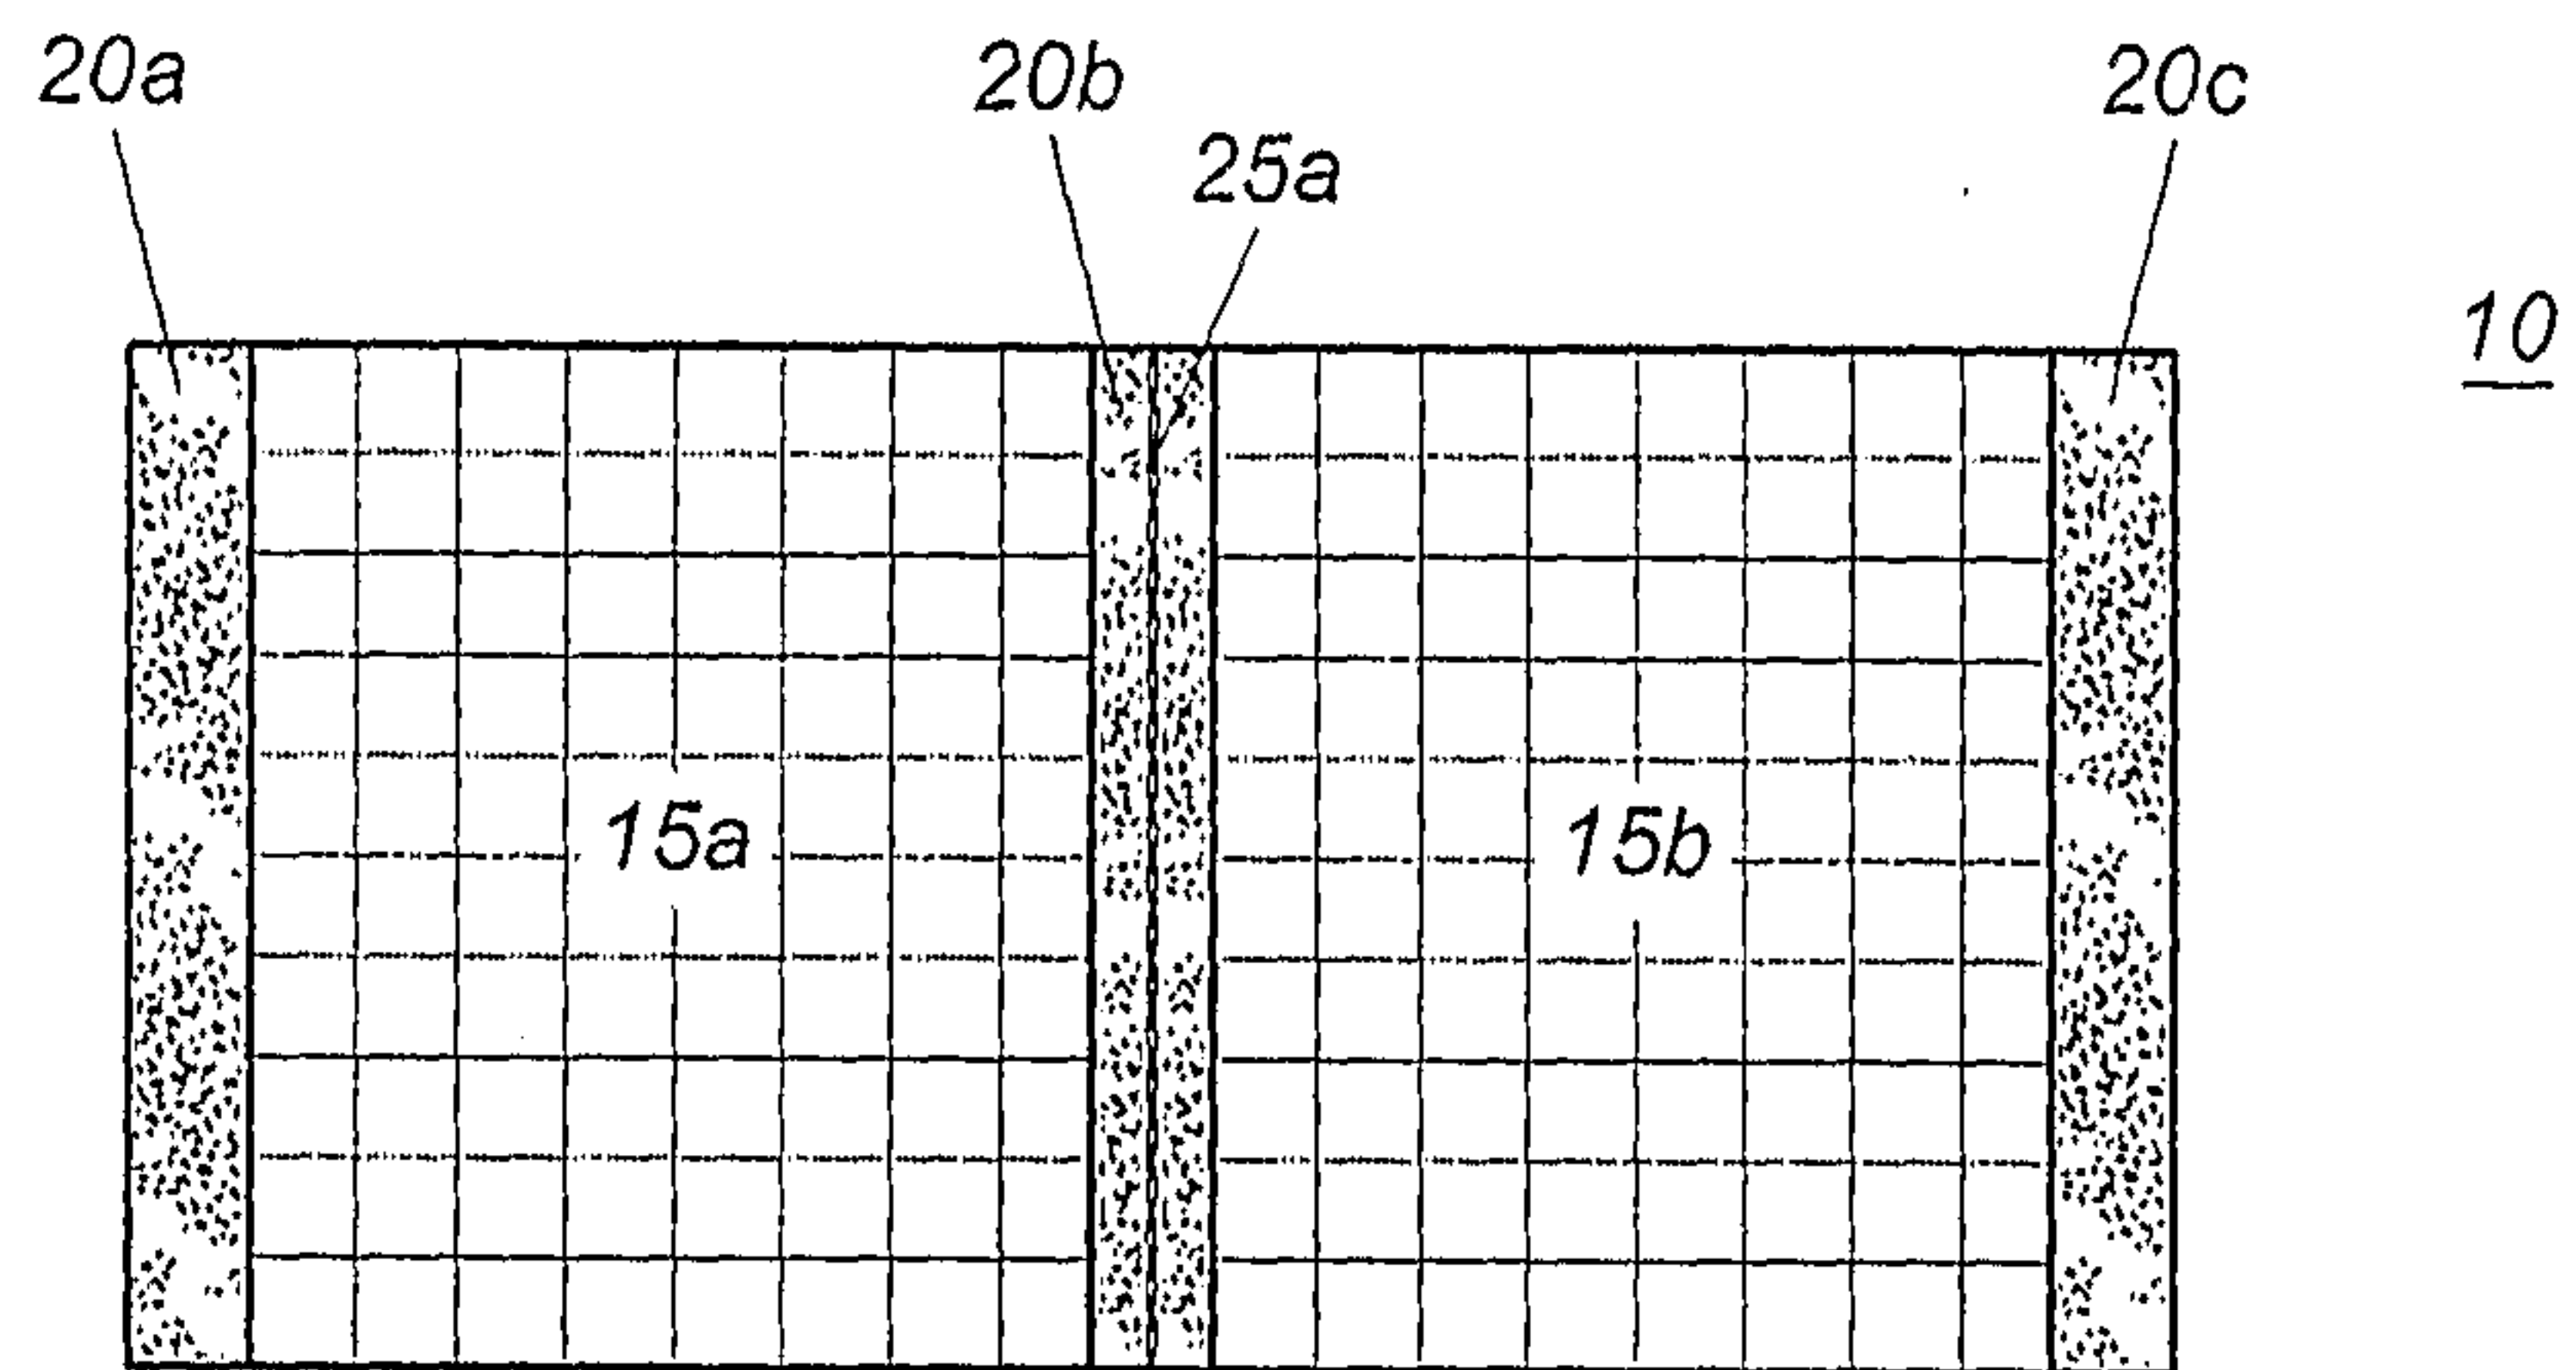
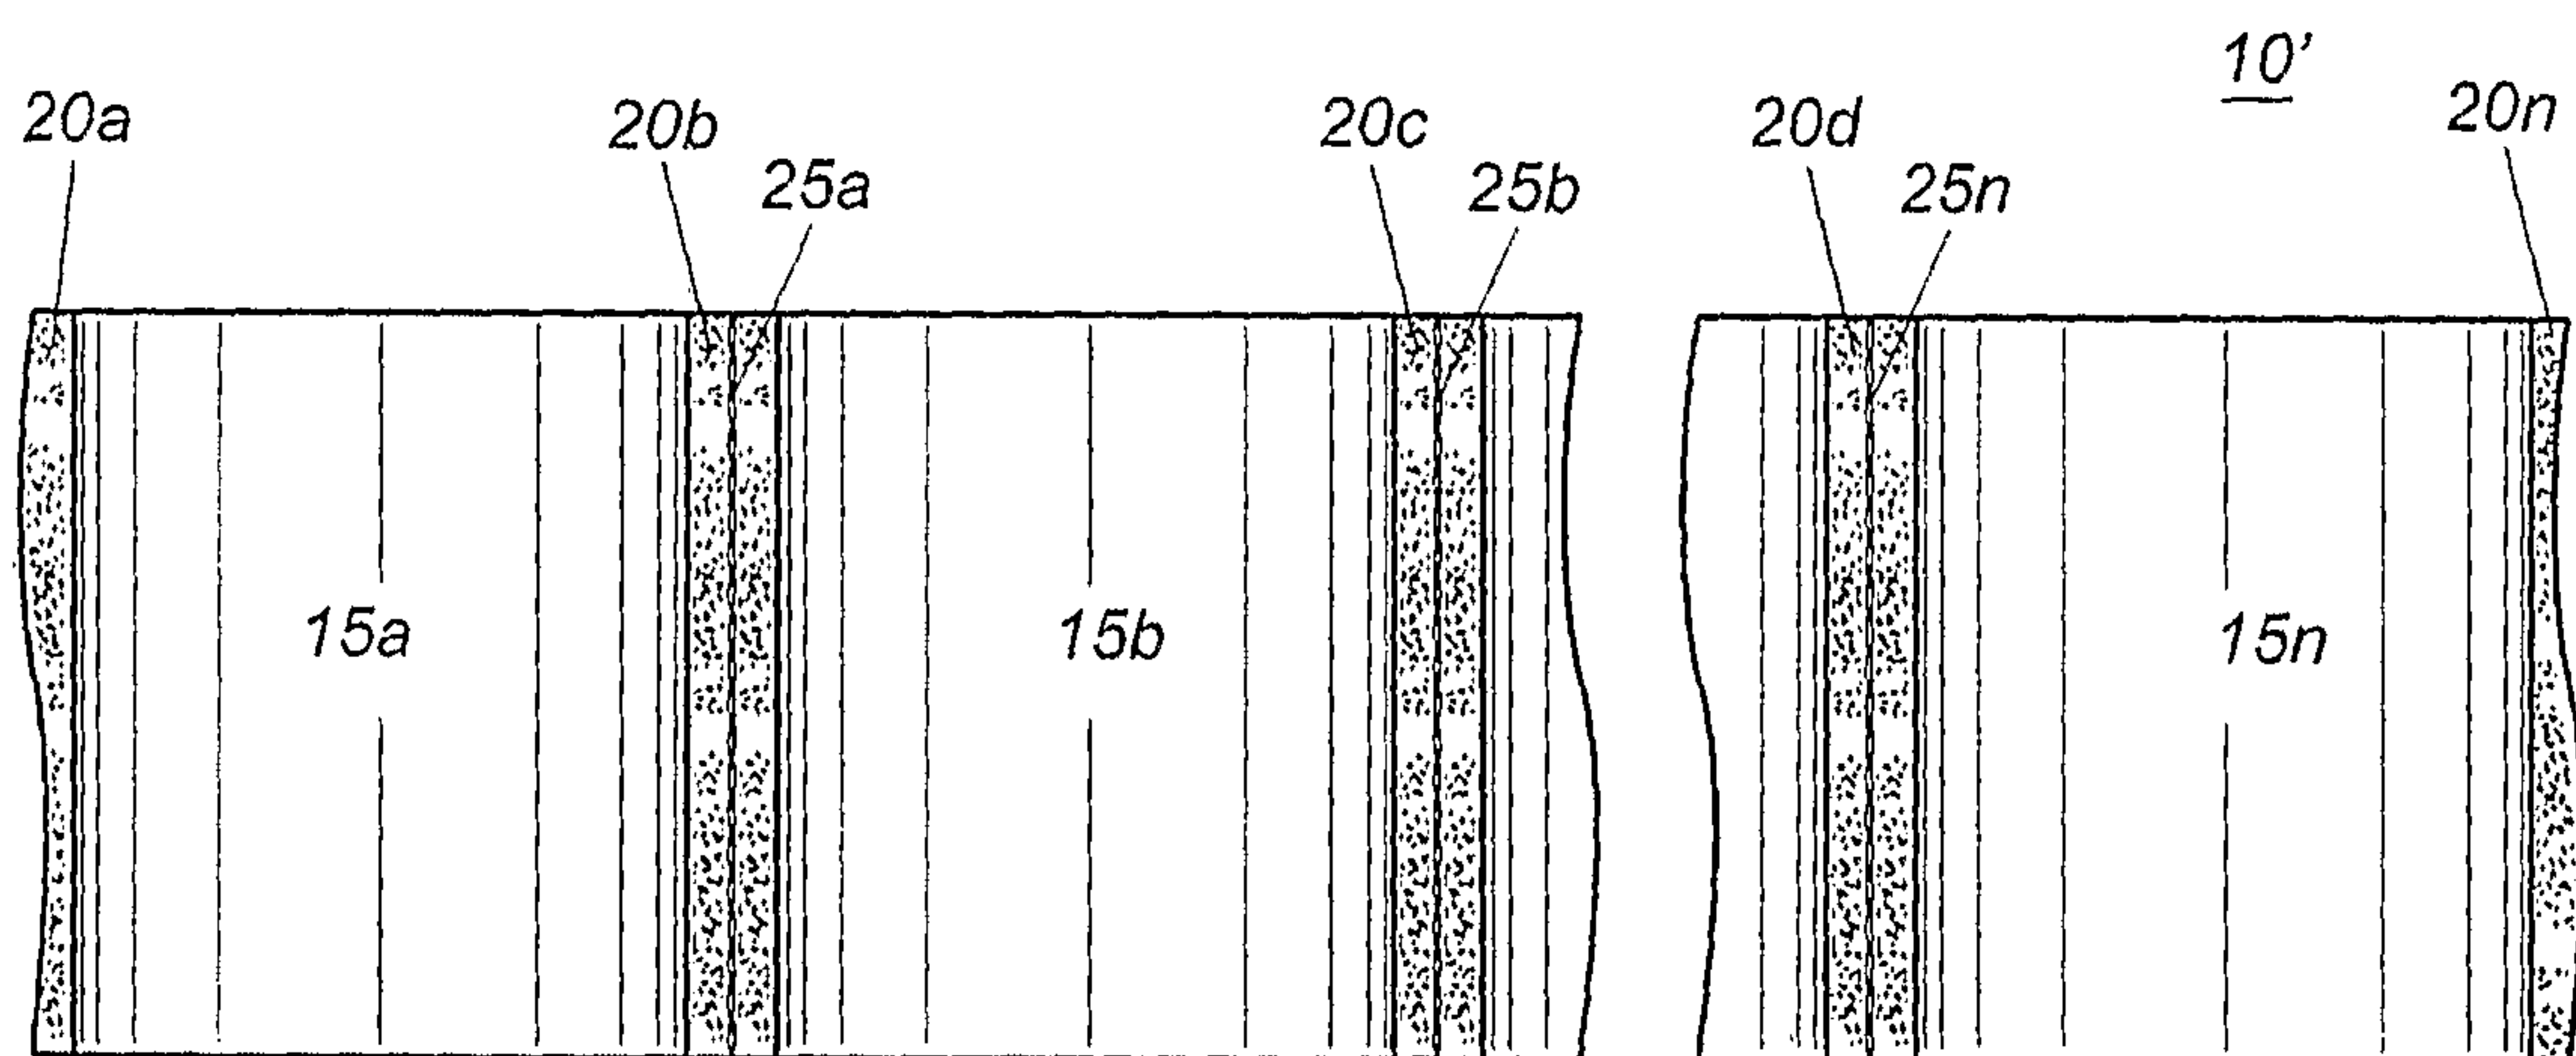
separating the selected number of package segments from the multi-serving package along the respective line of disruption.

59. The method of claim 58, further comprising exposing the selected number of package segments to microwave energy.

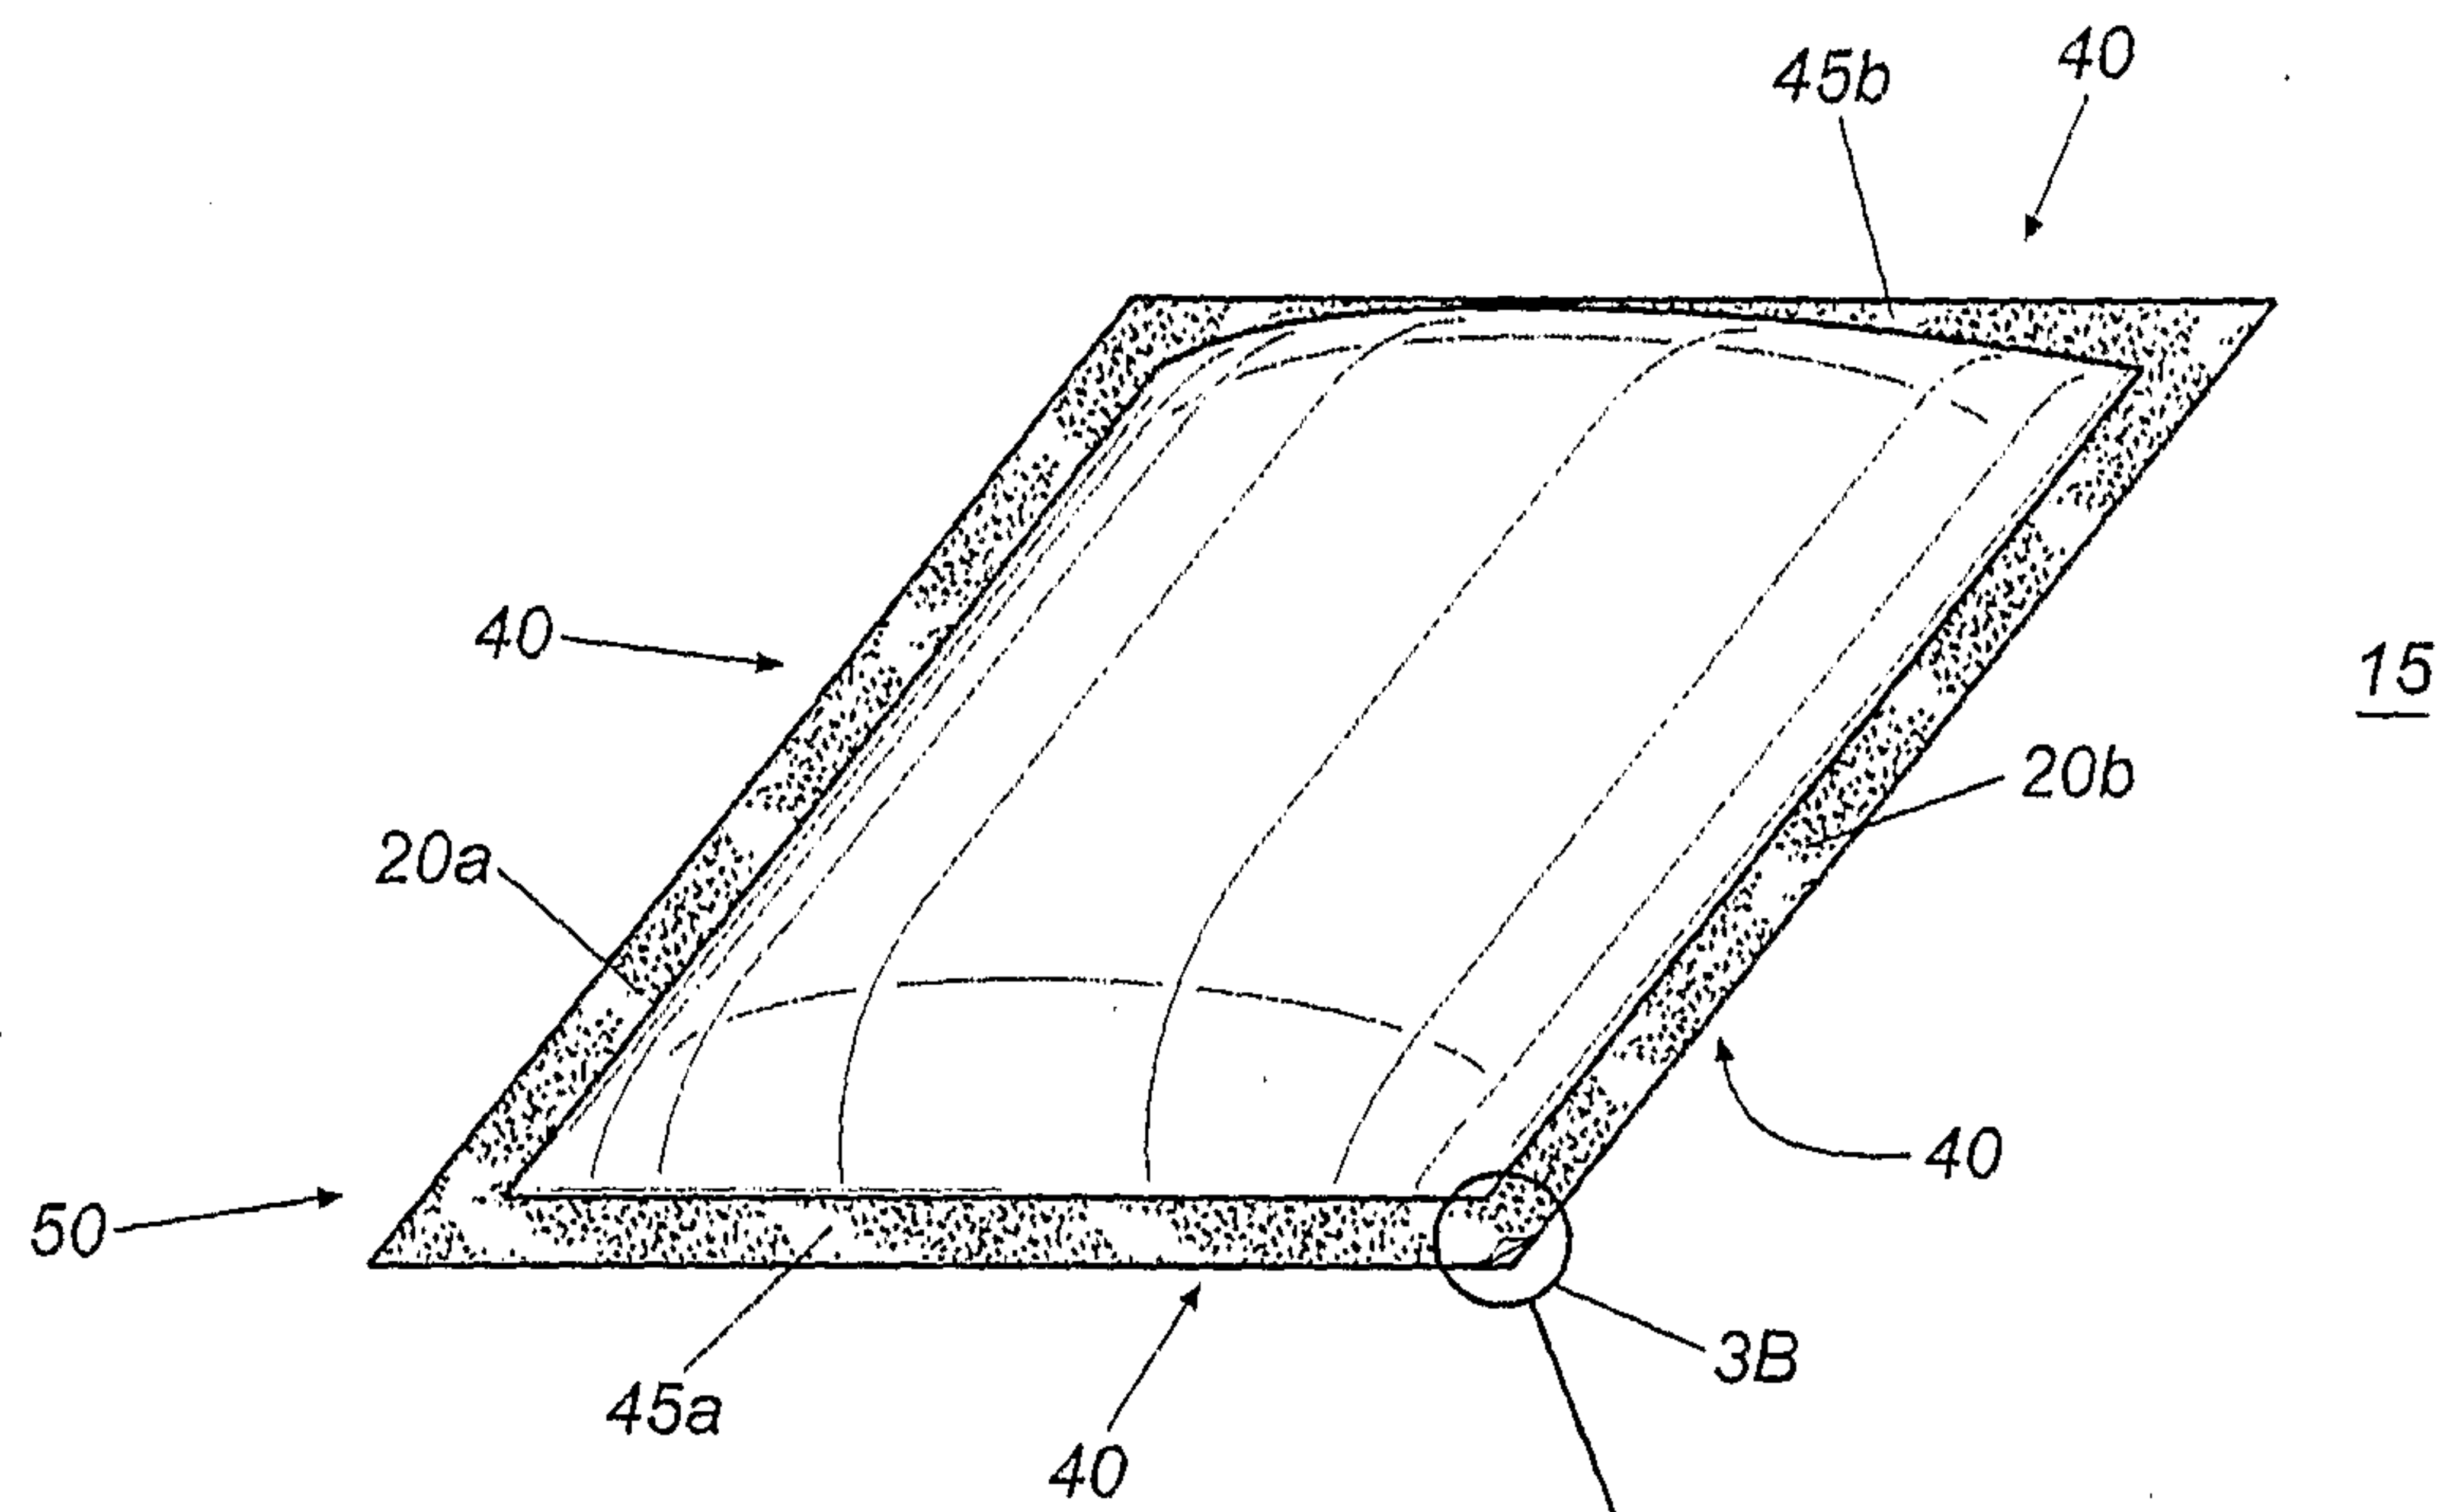
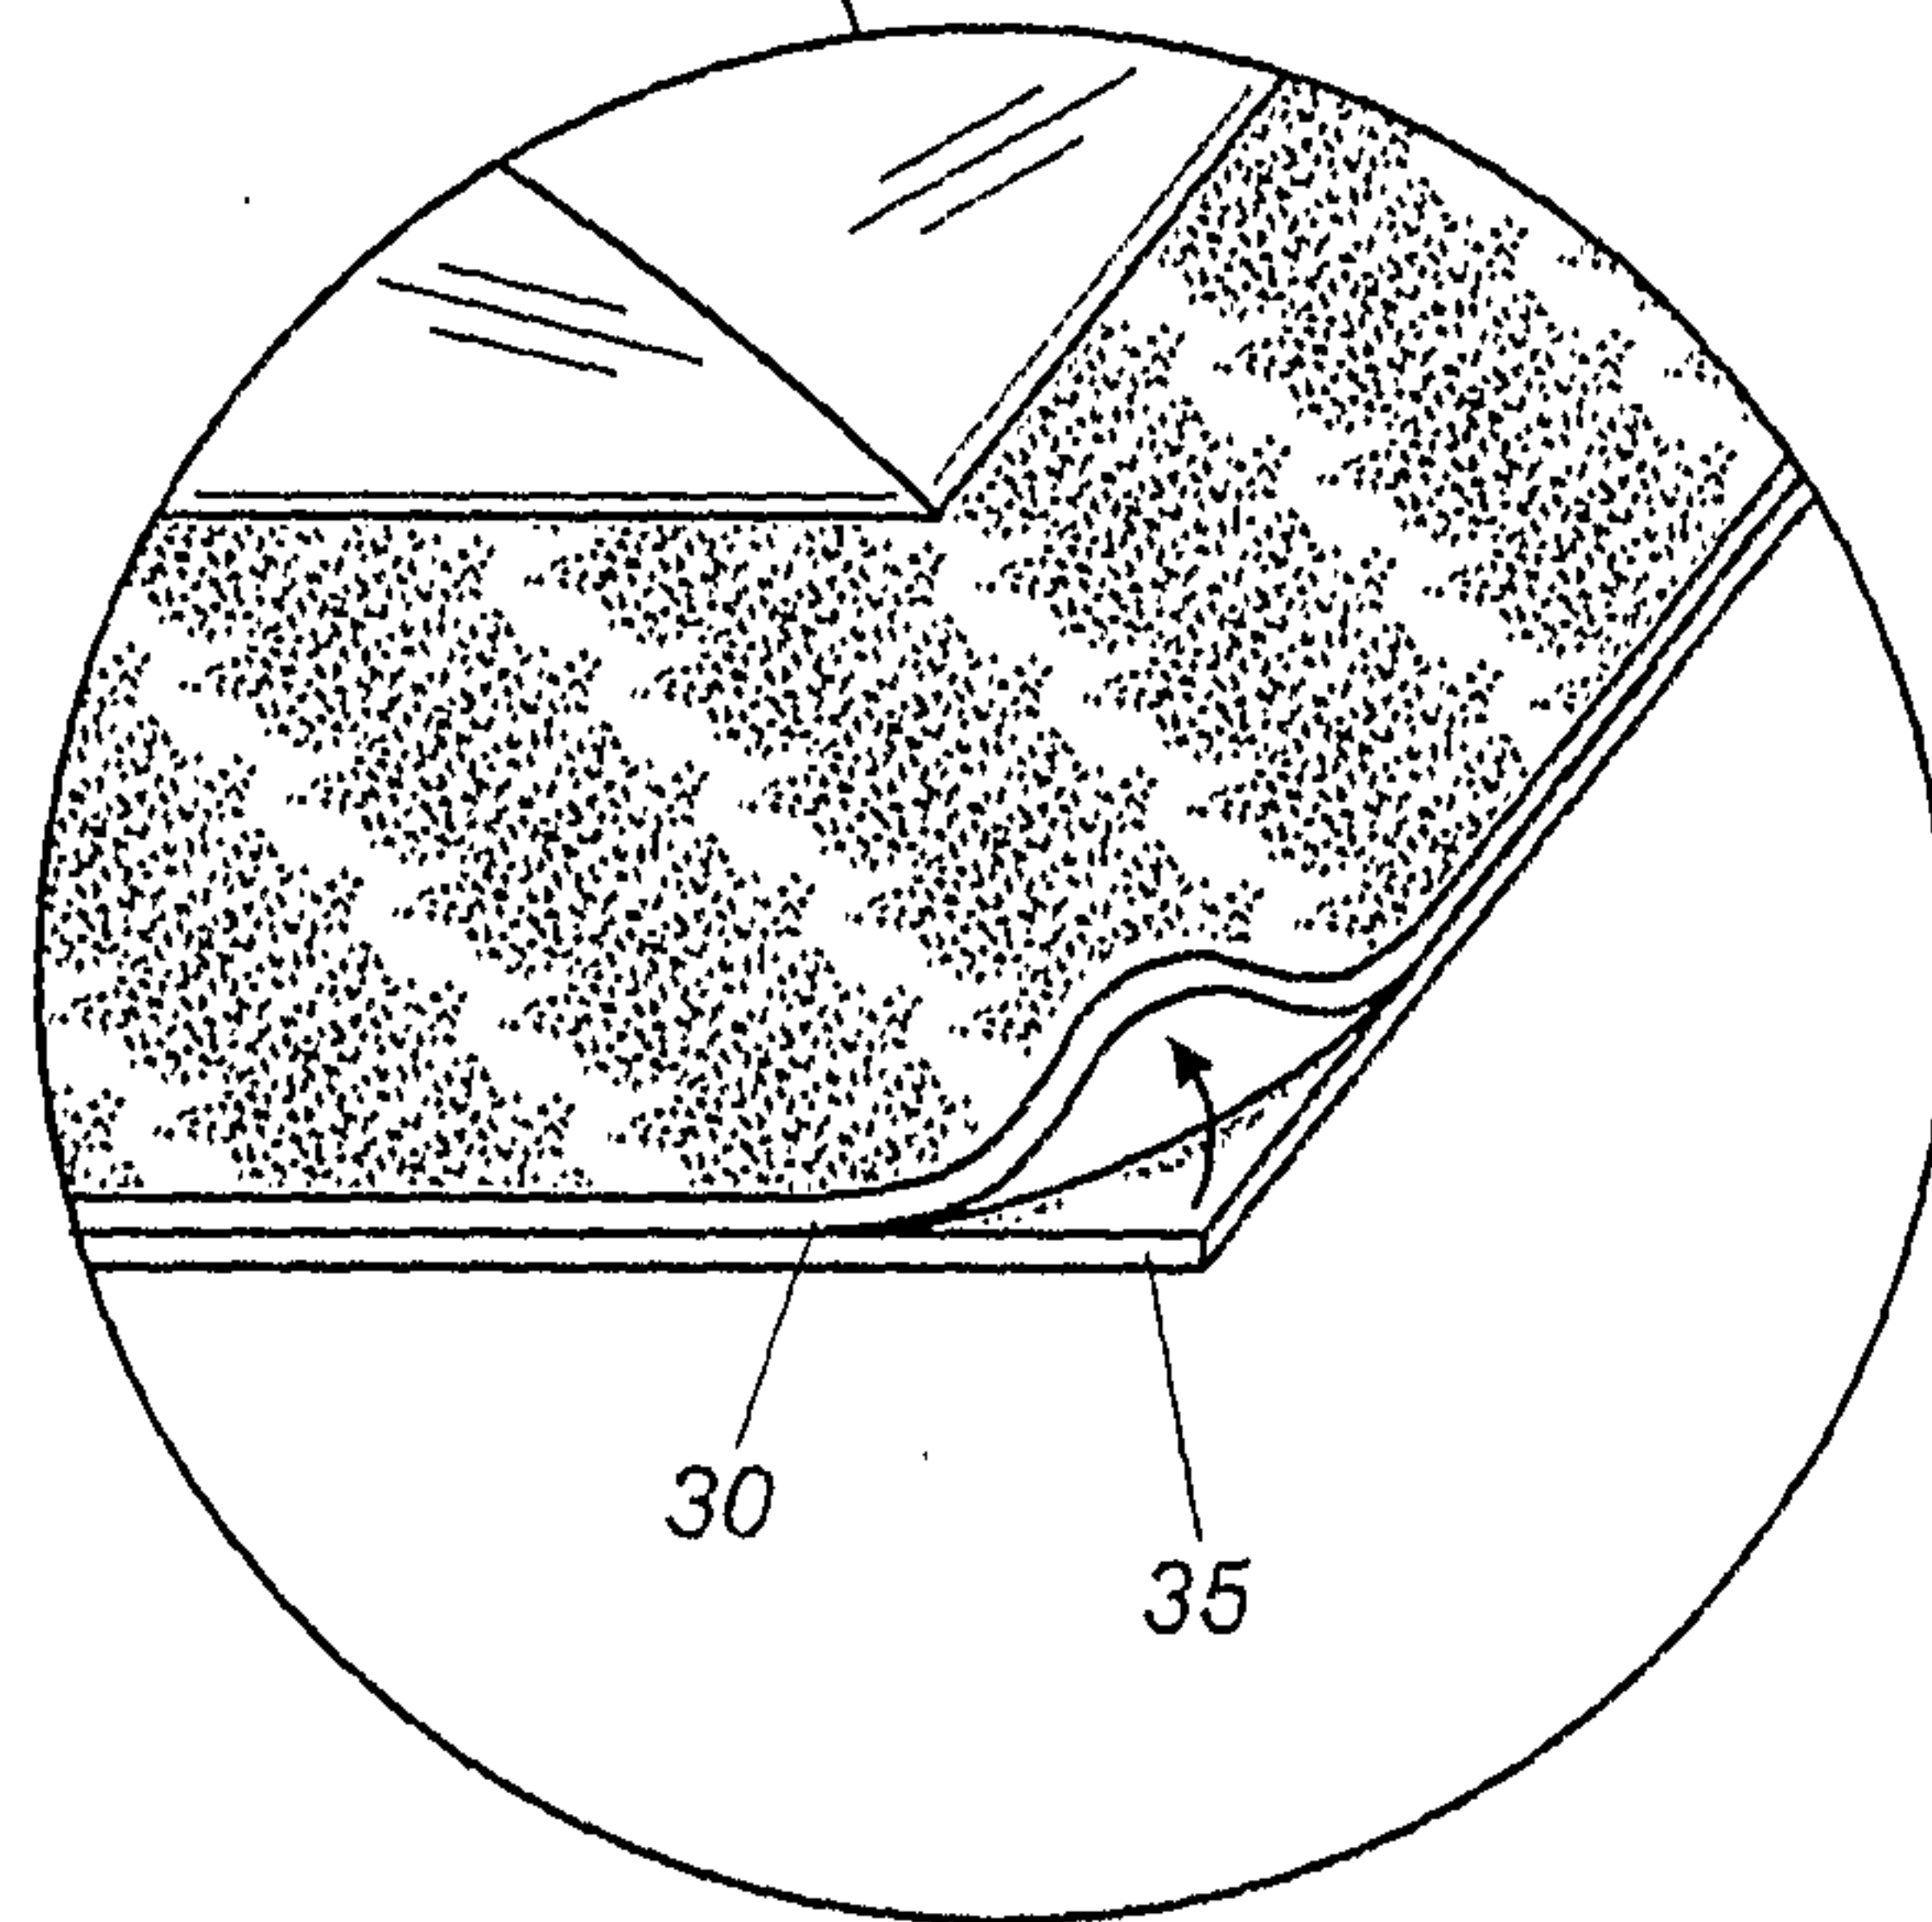
60. The method of claim 59, wherein exposing the selected number of package segments to microwave energy causes the expandable cells to inflate.

61. The method of claim 60, wherein the inflating of the expandable cells urges the microwave energy interactive material towards the interior space to brown and/or crisp the surface of the food item.
62. The method of any one of claims 58 to 61, further comprising providing a dispenser for the multi-serving food package.
63. The method of claim 62, further comprising dispensing the selected number of package segments from the dispenser.

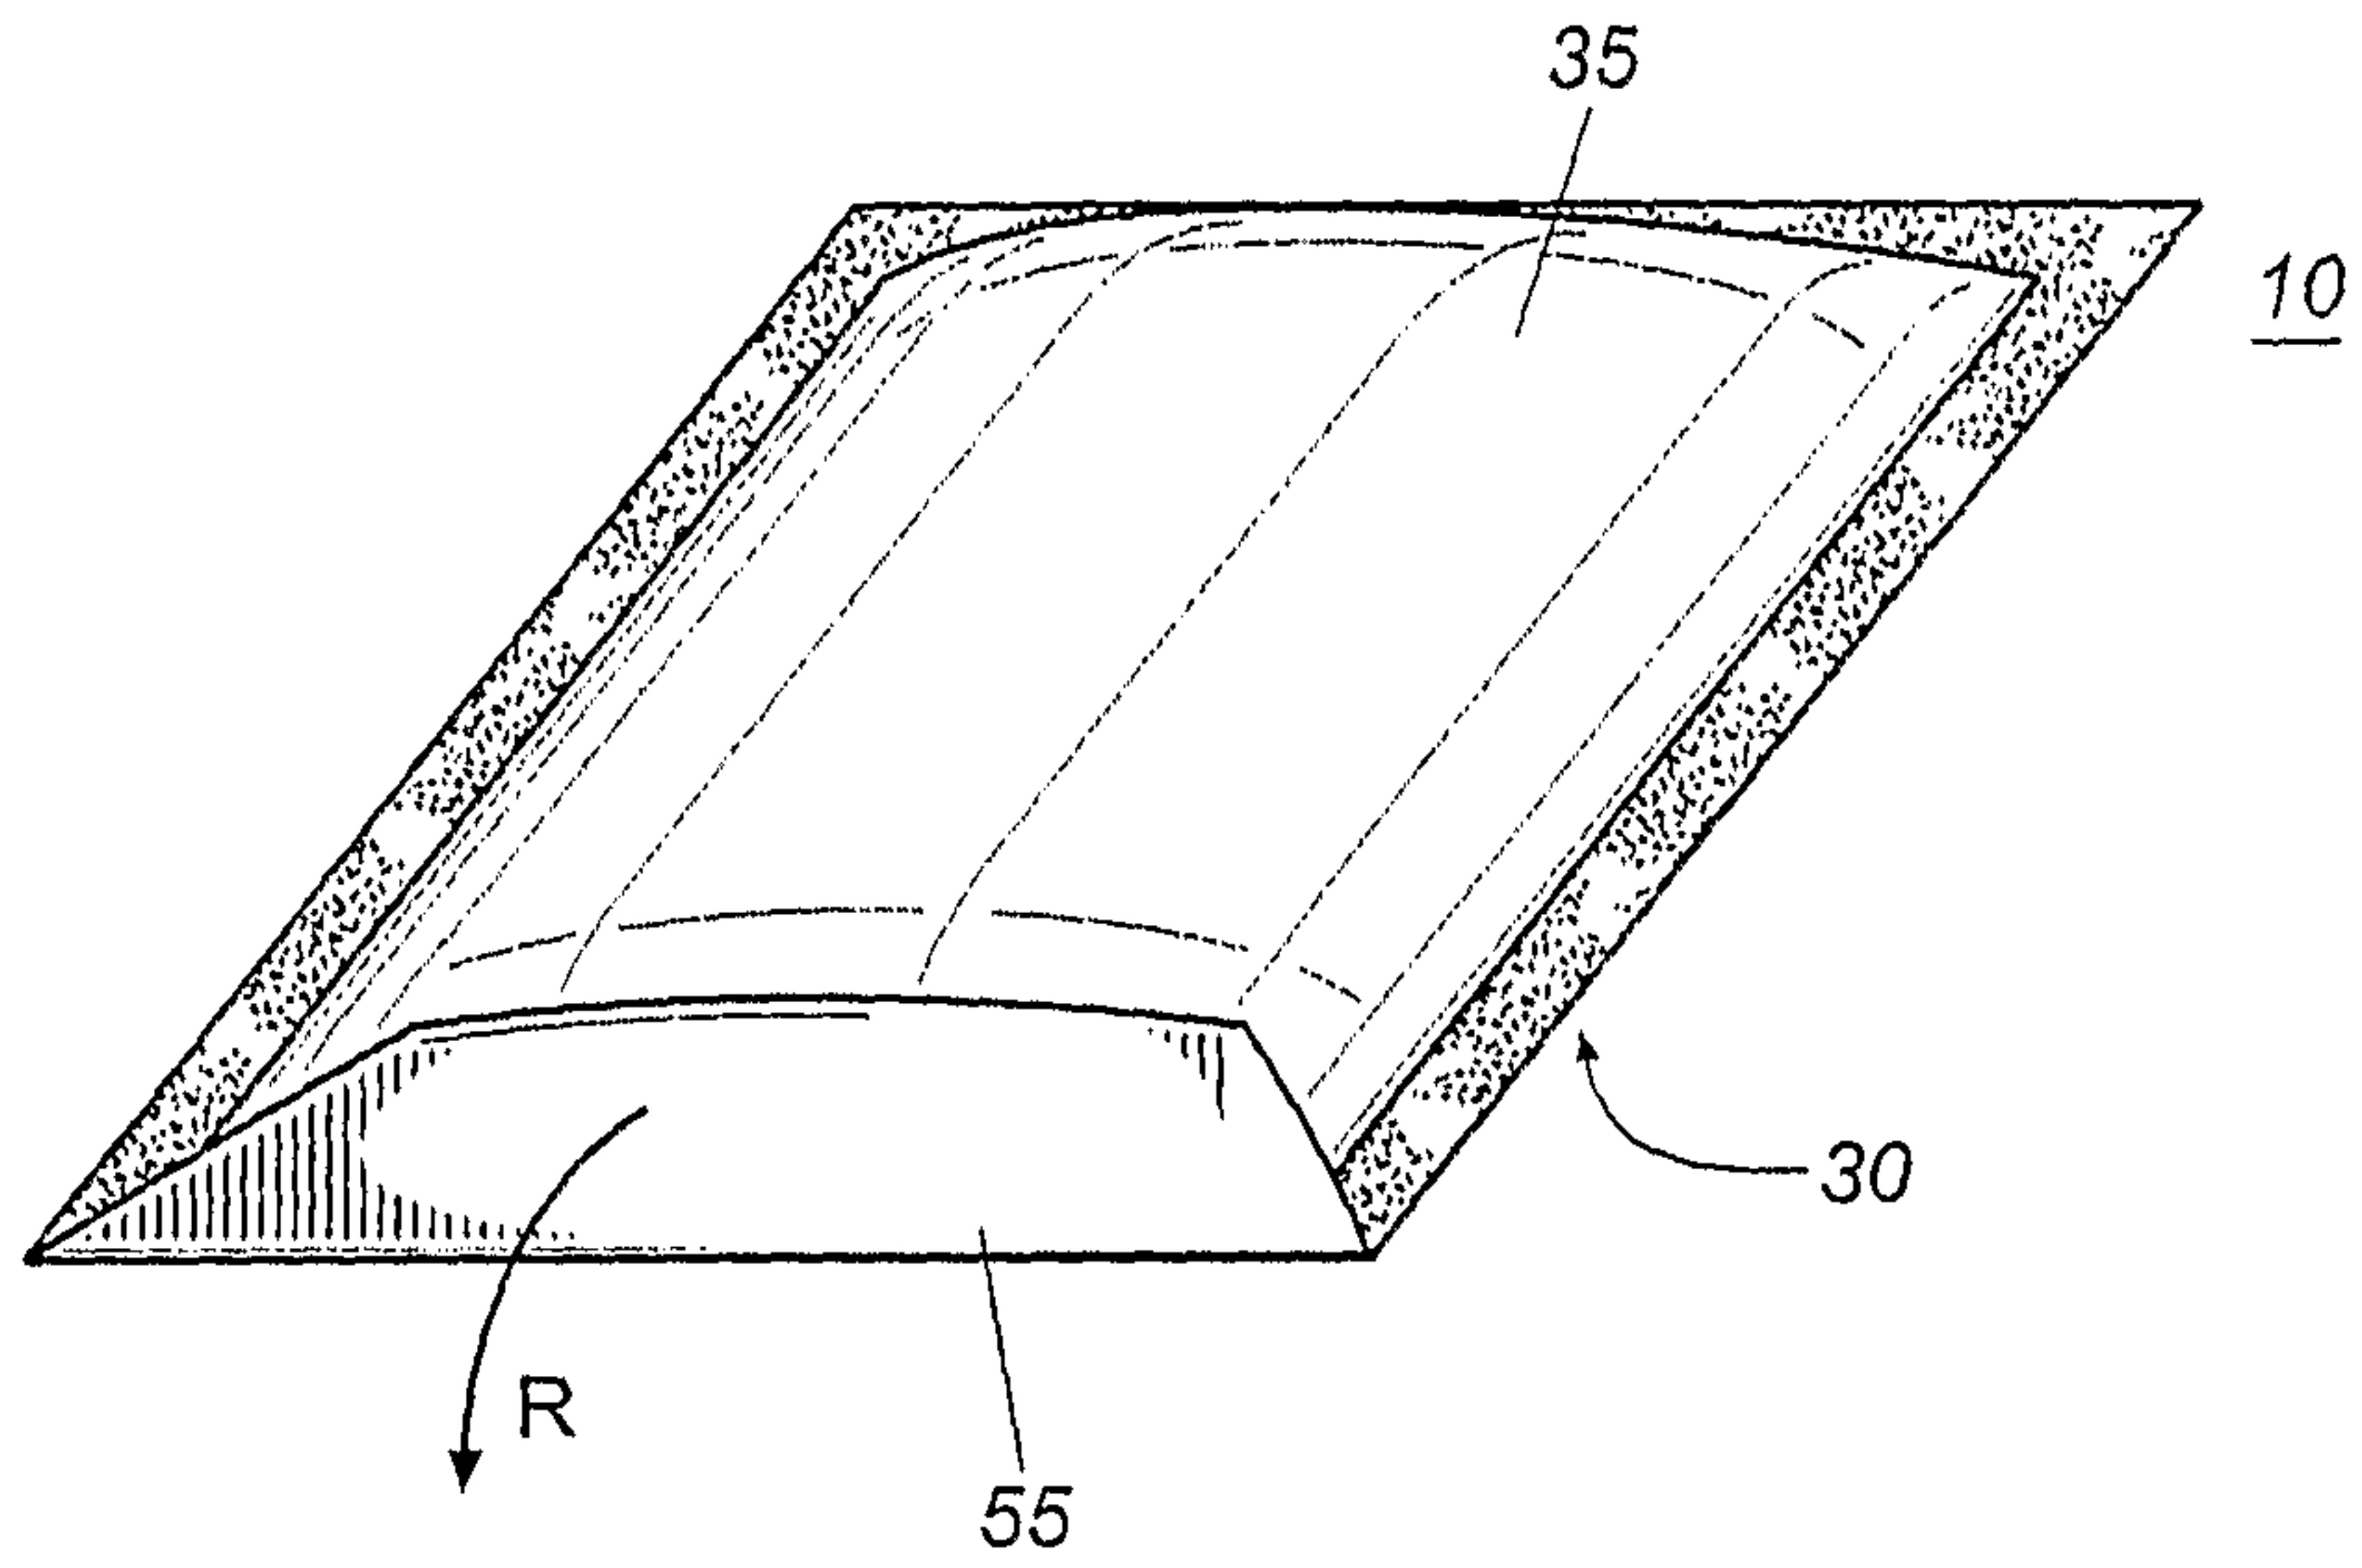
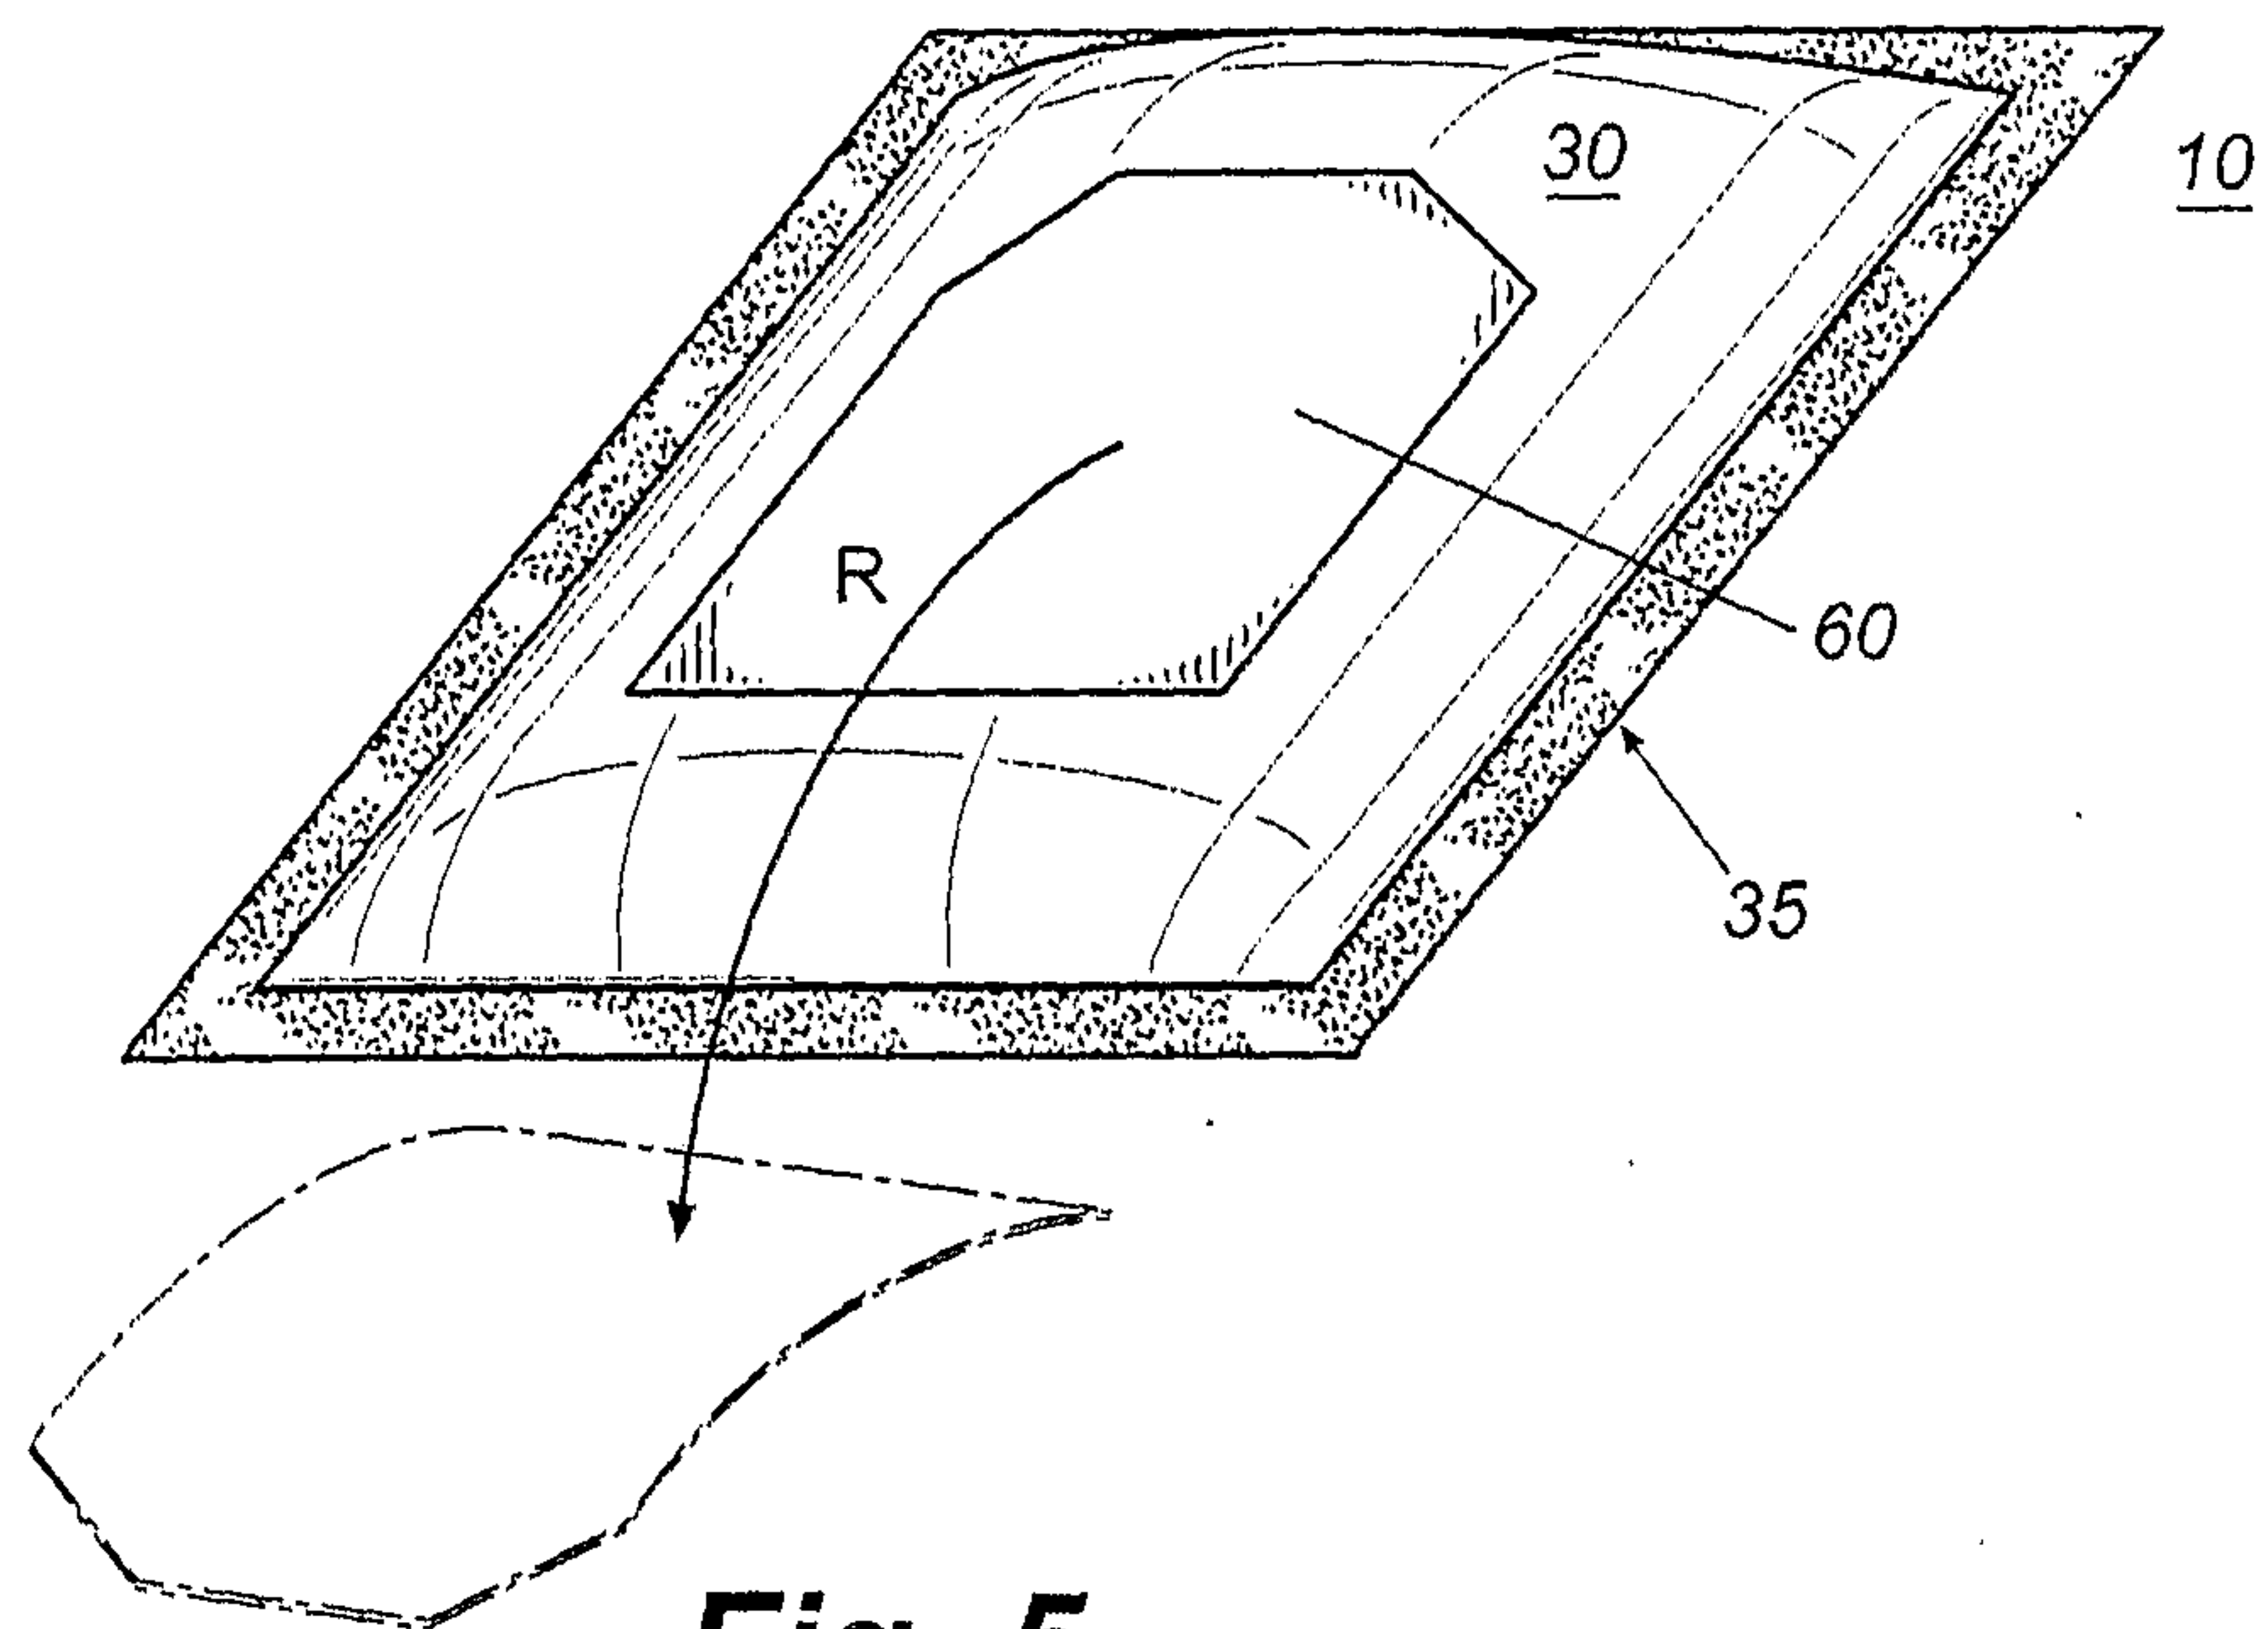
1/9

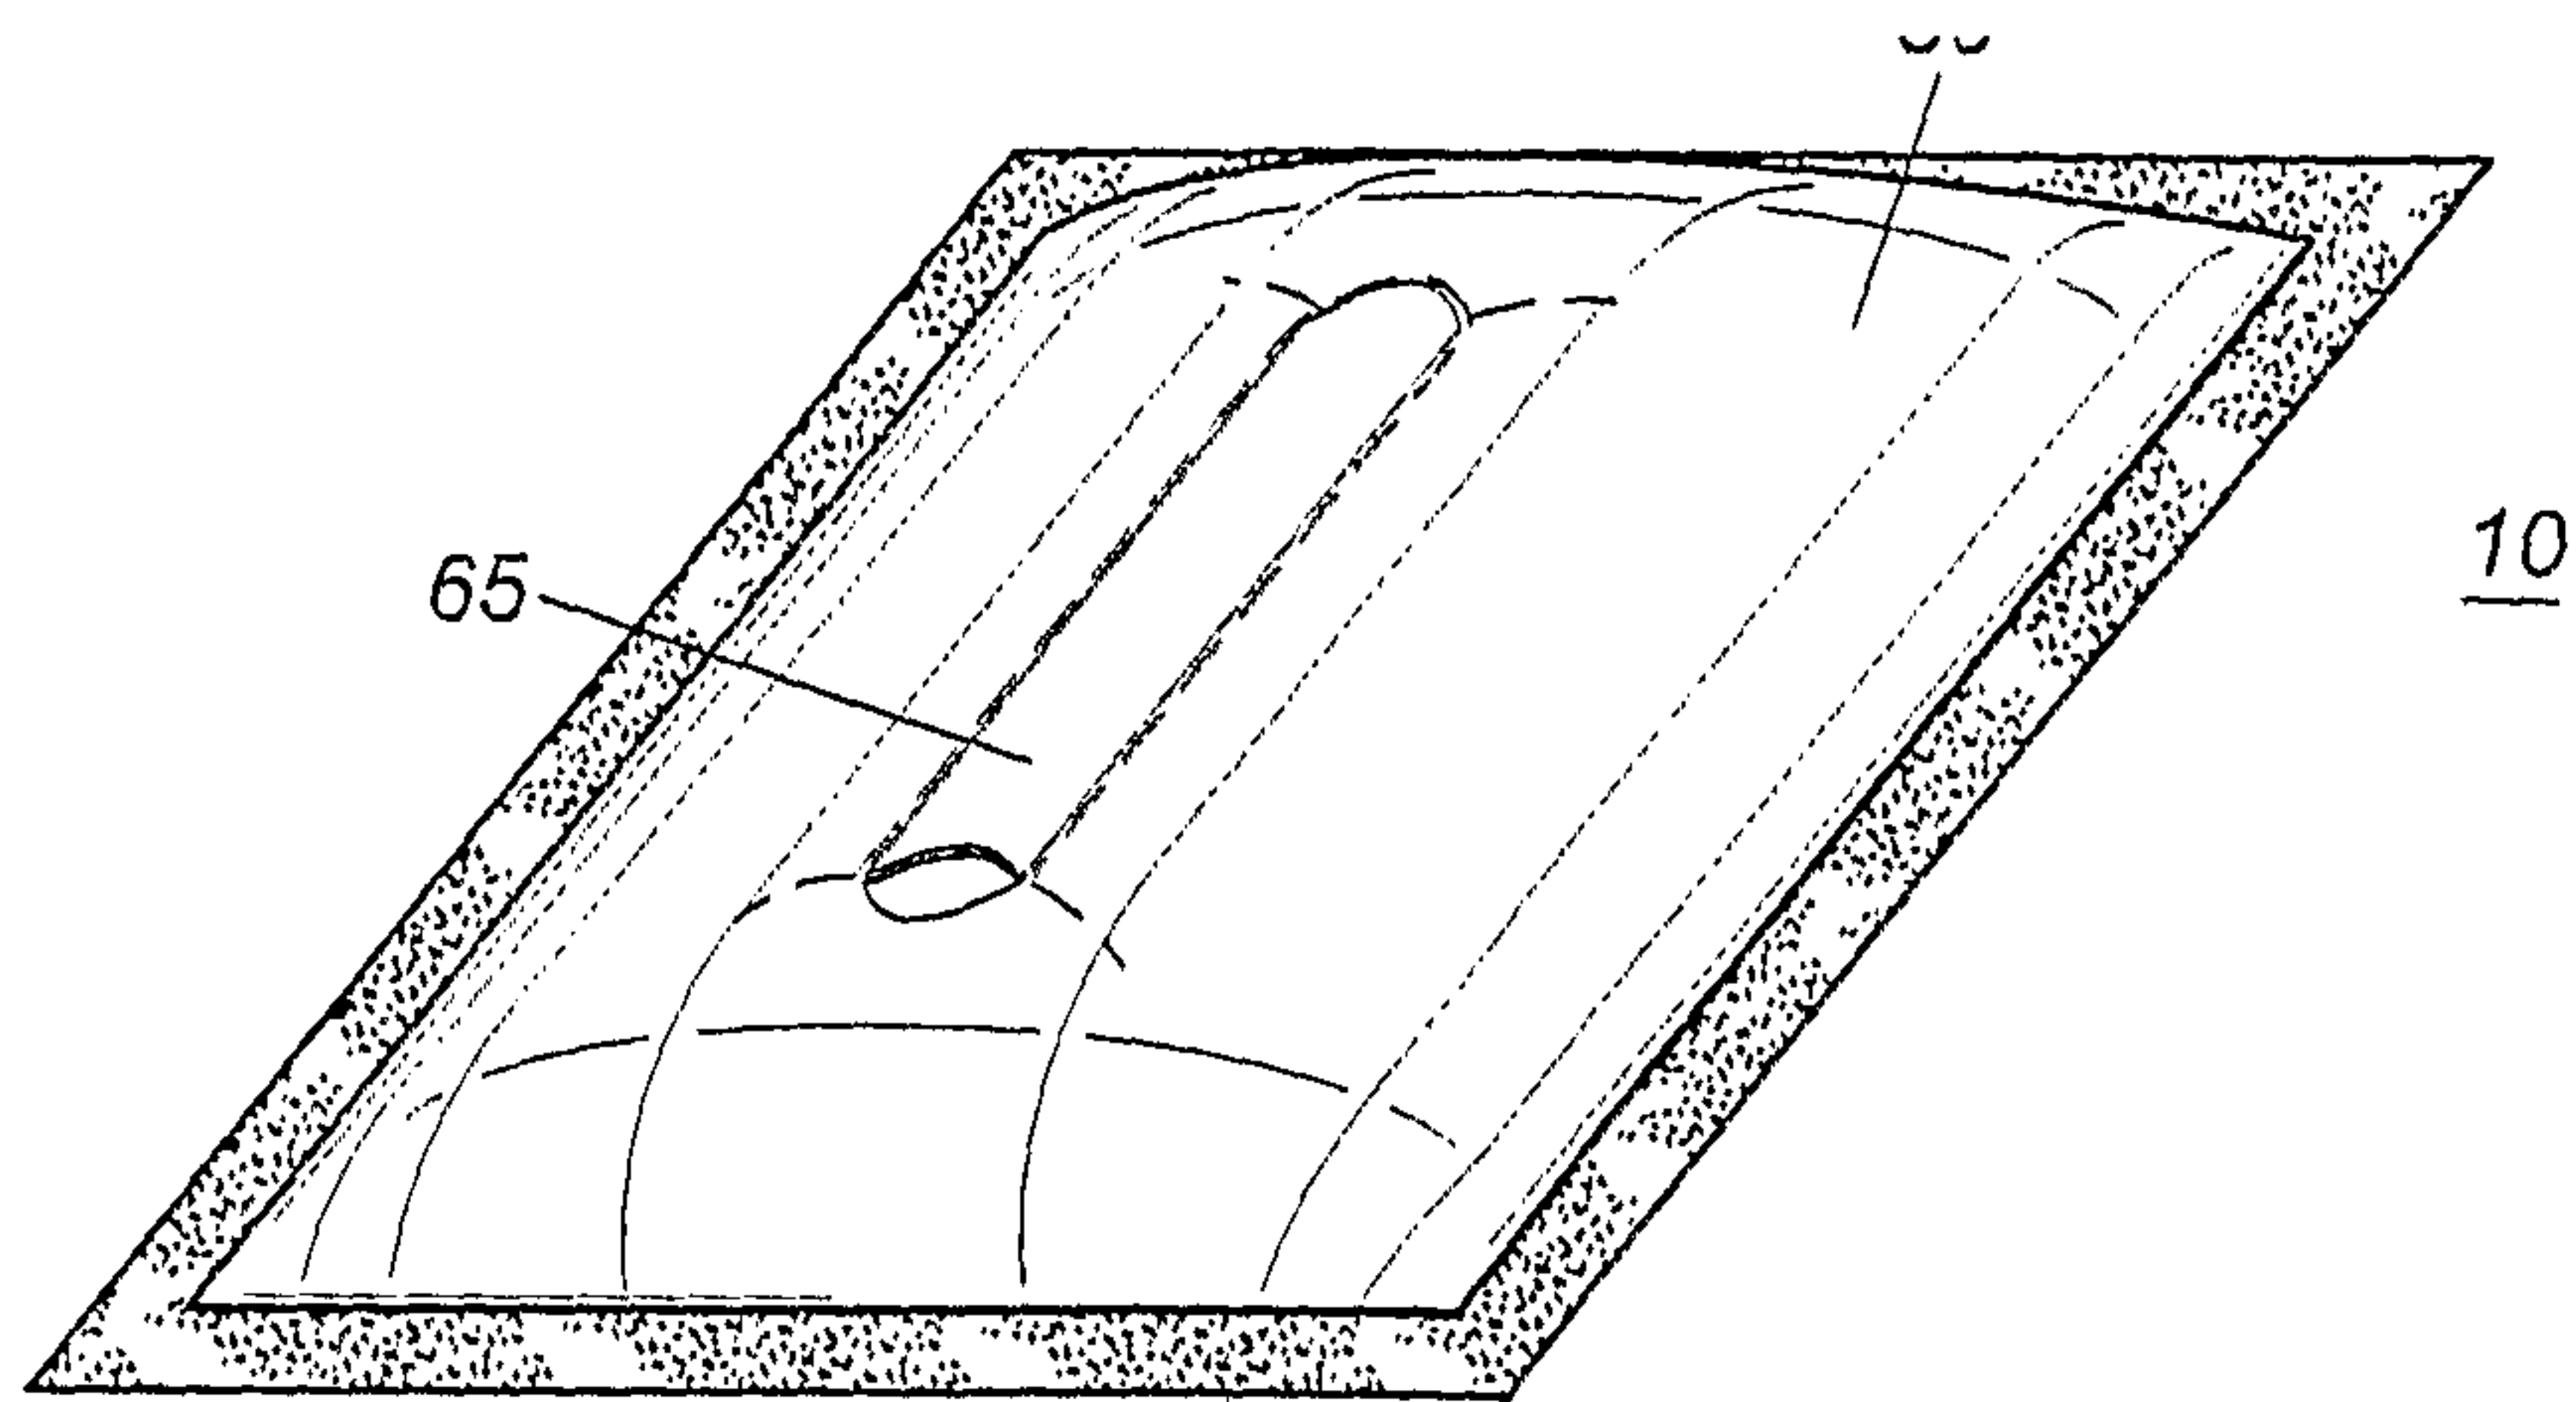
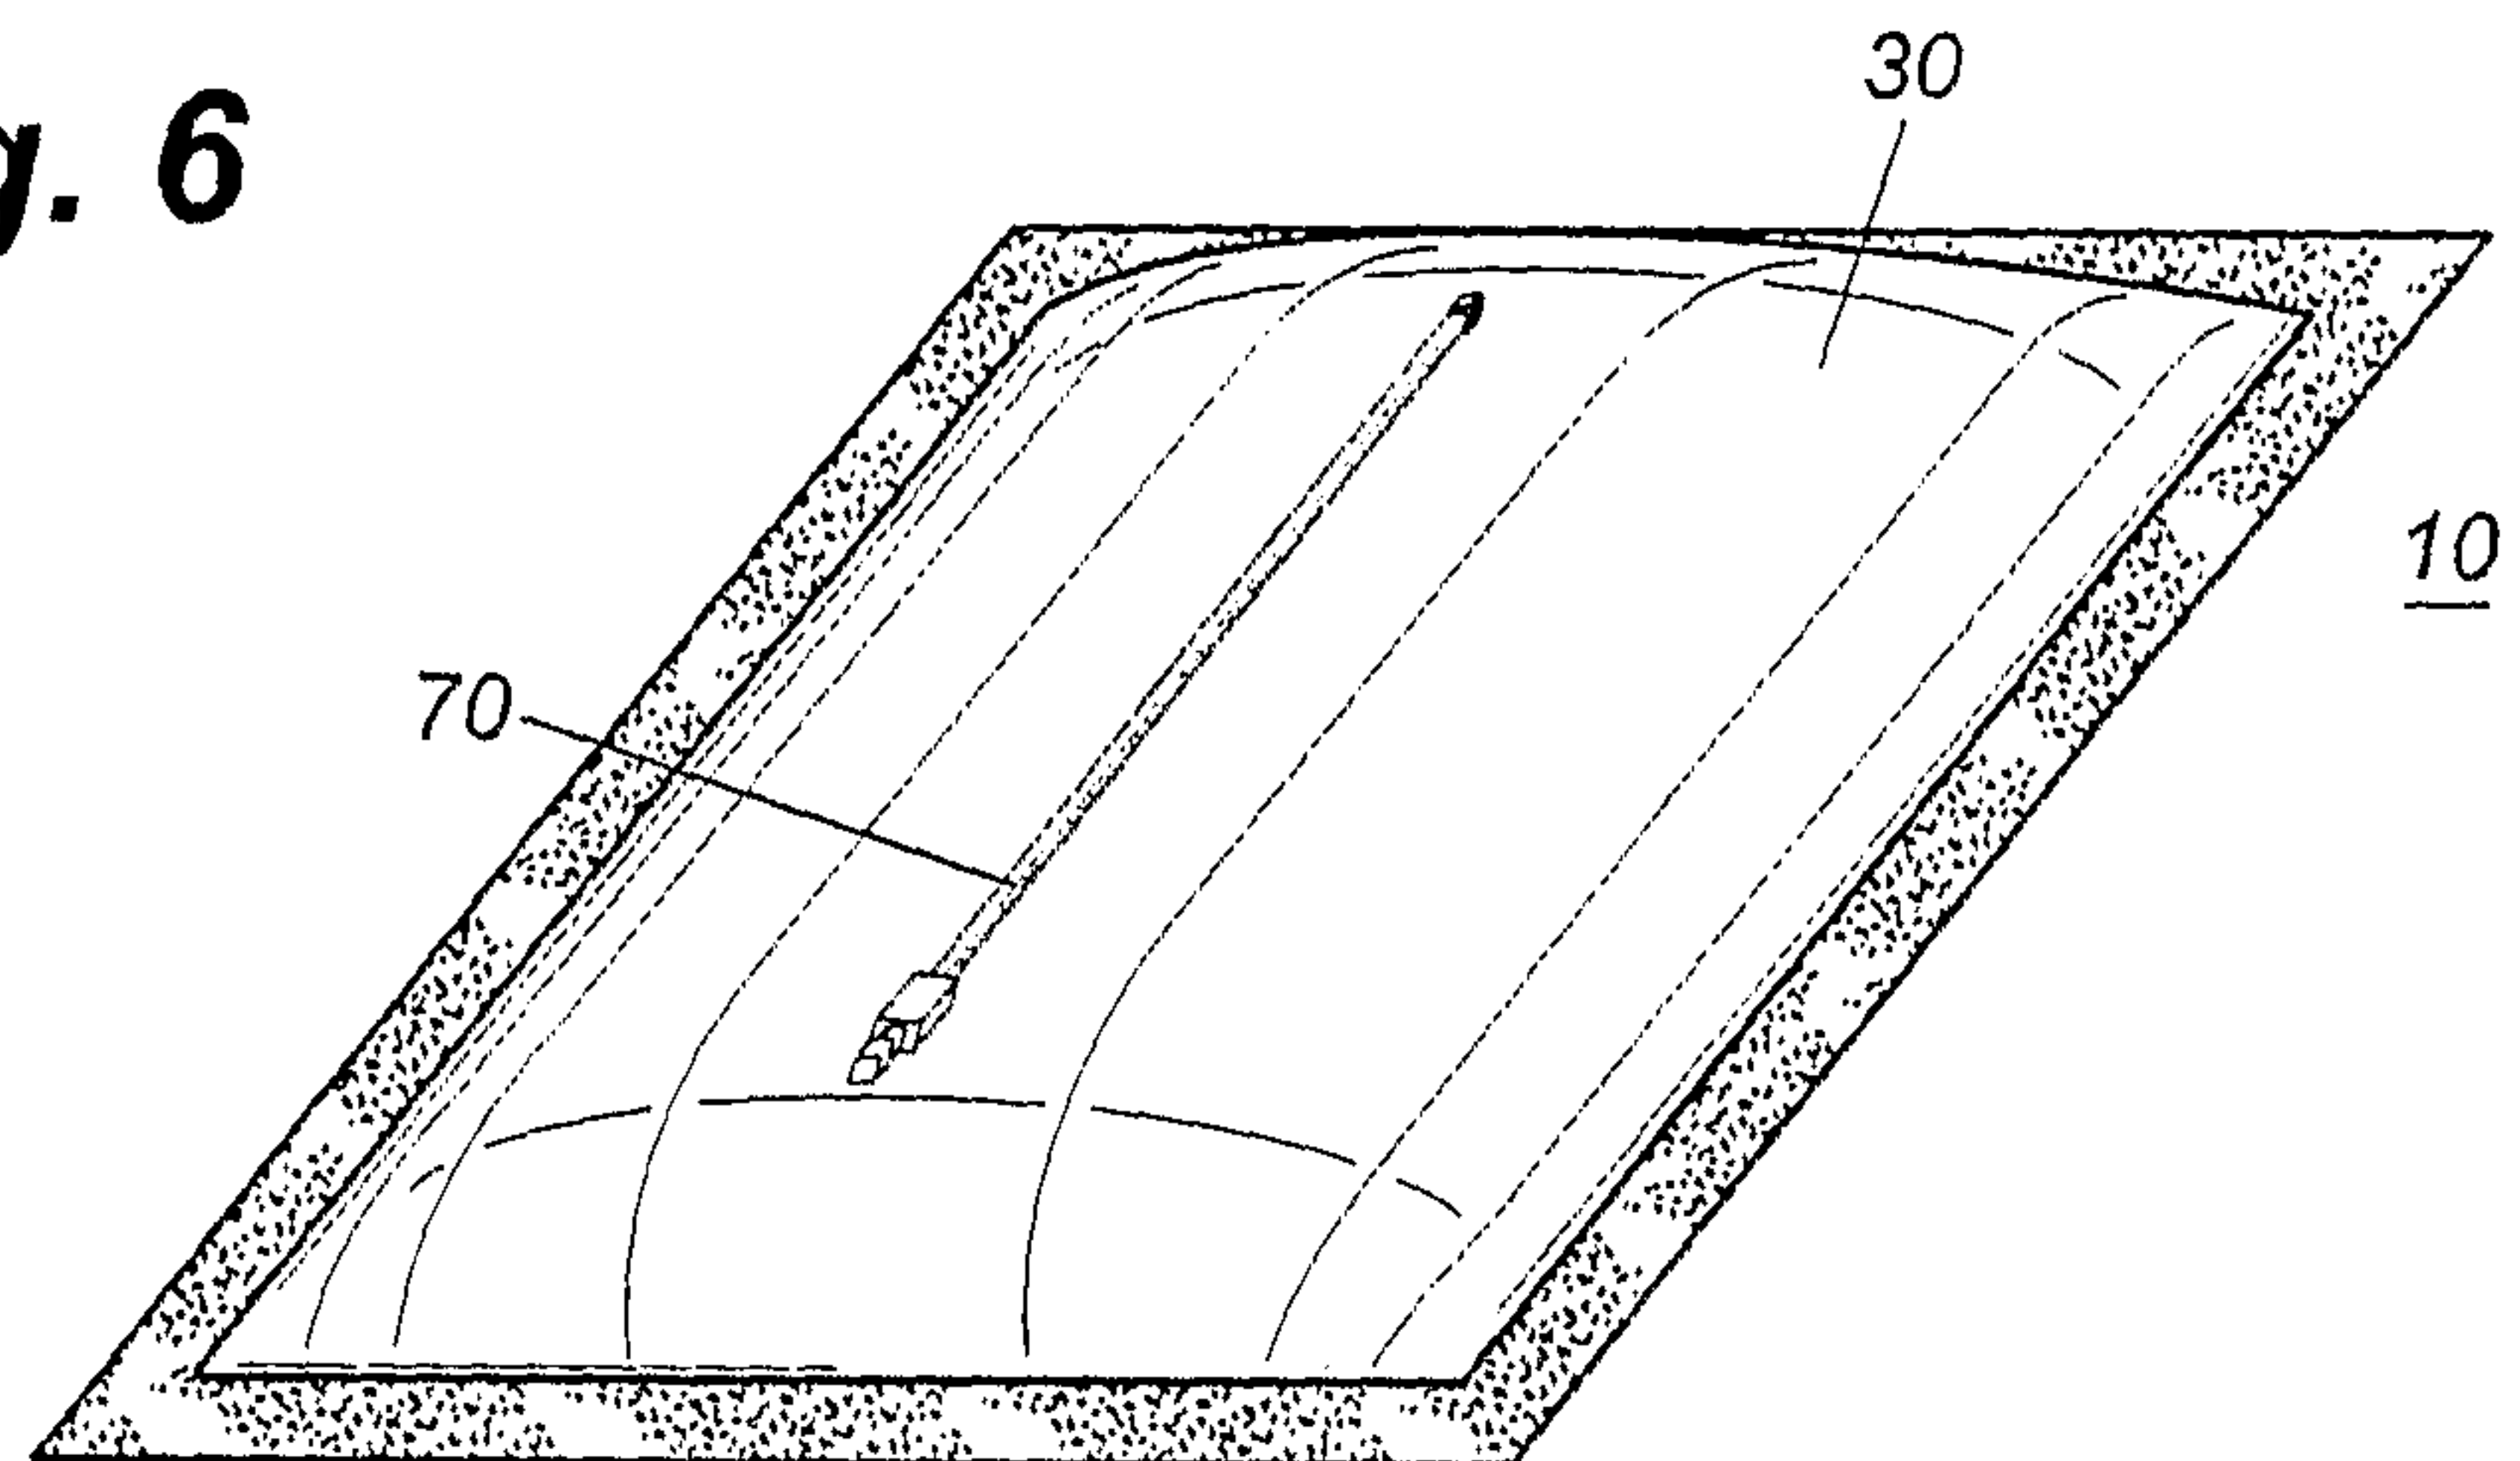
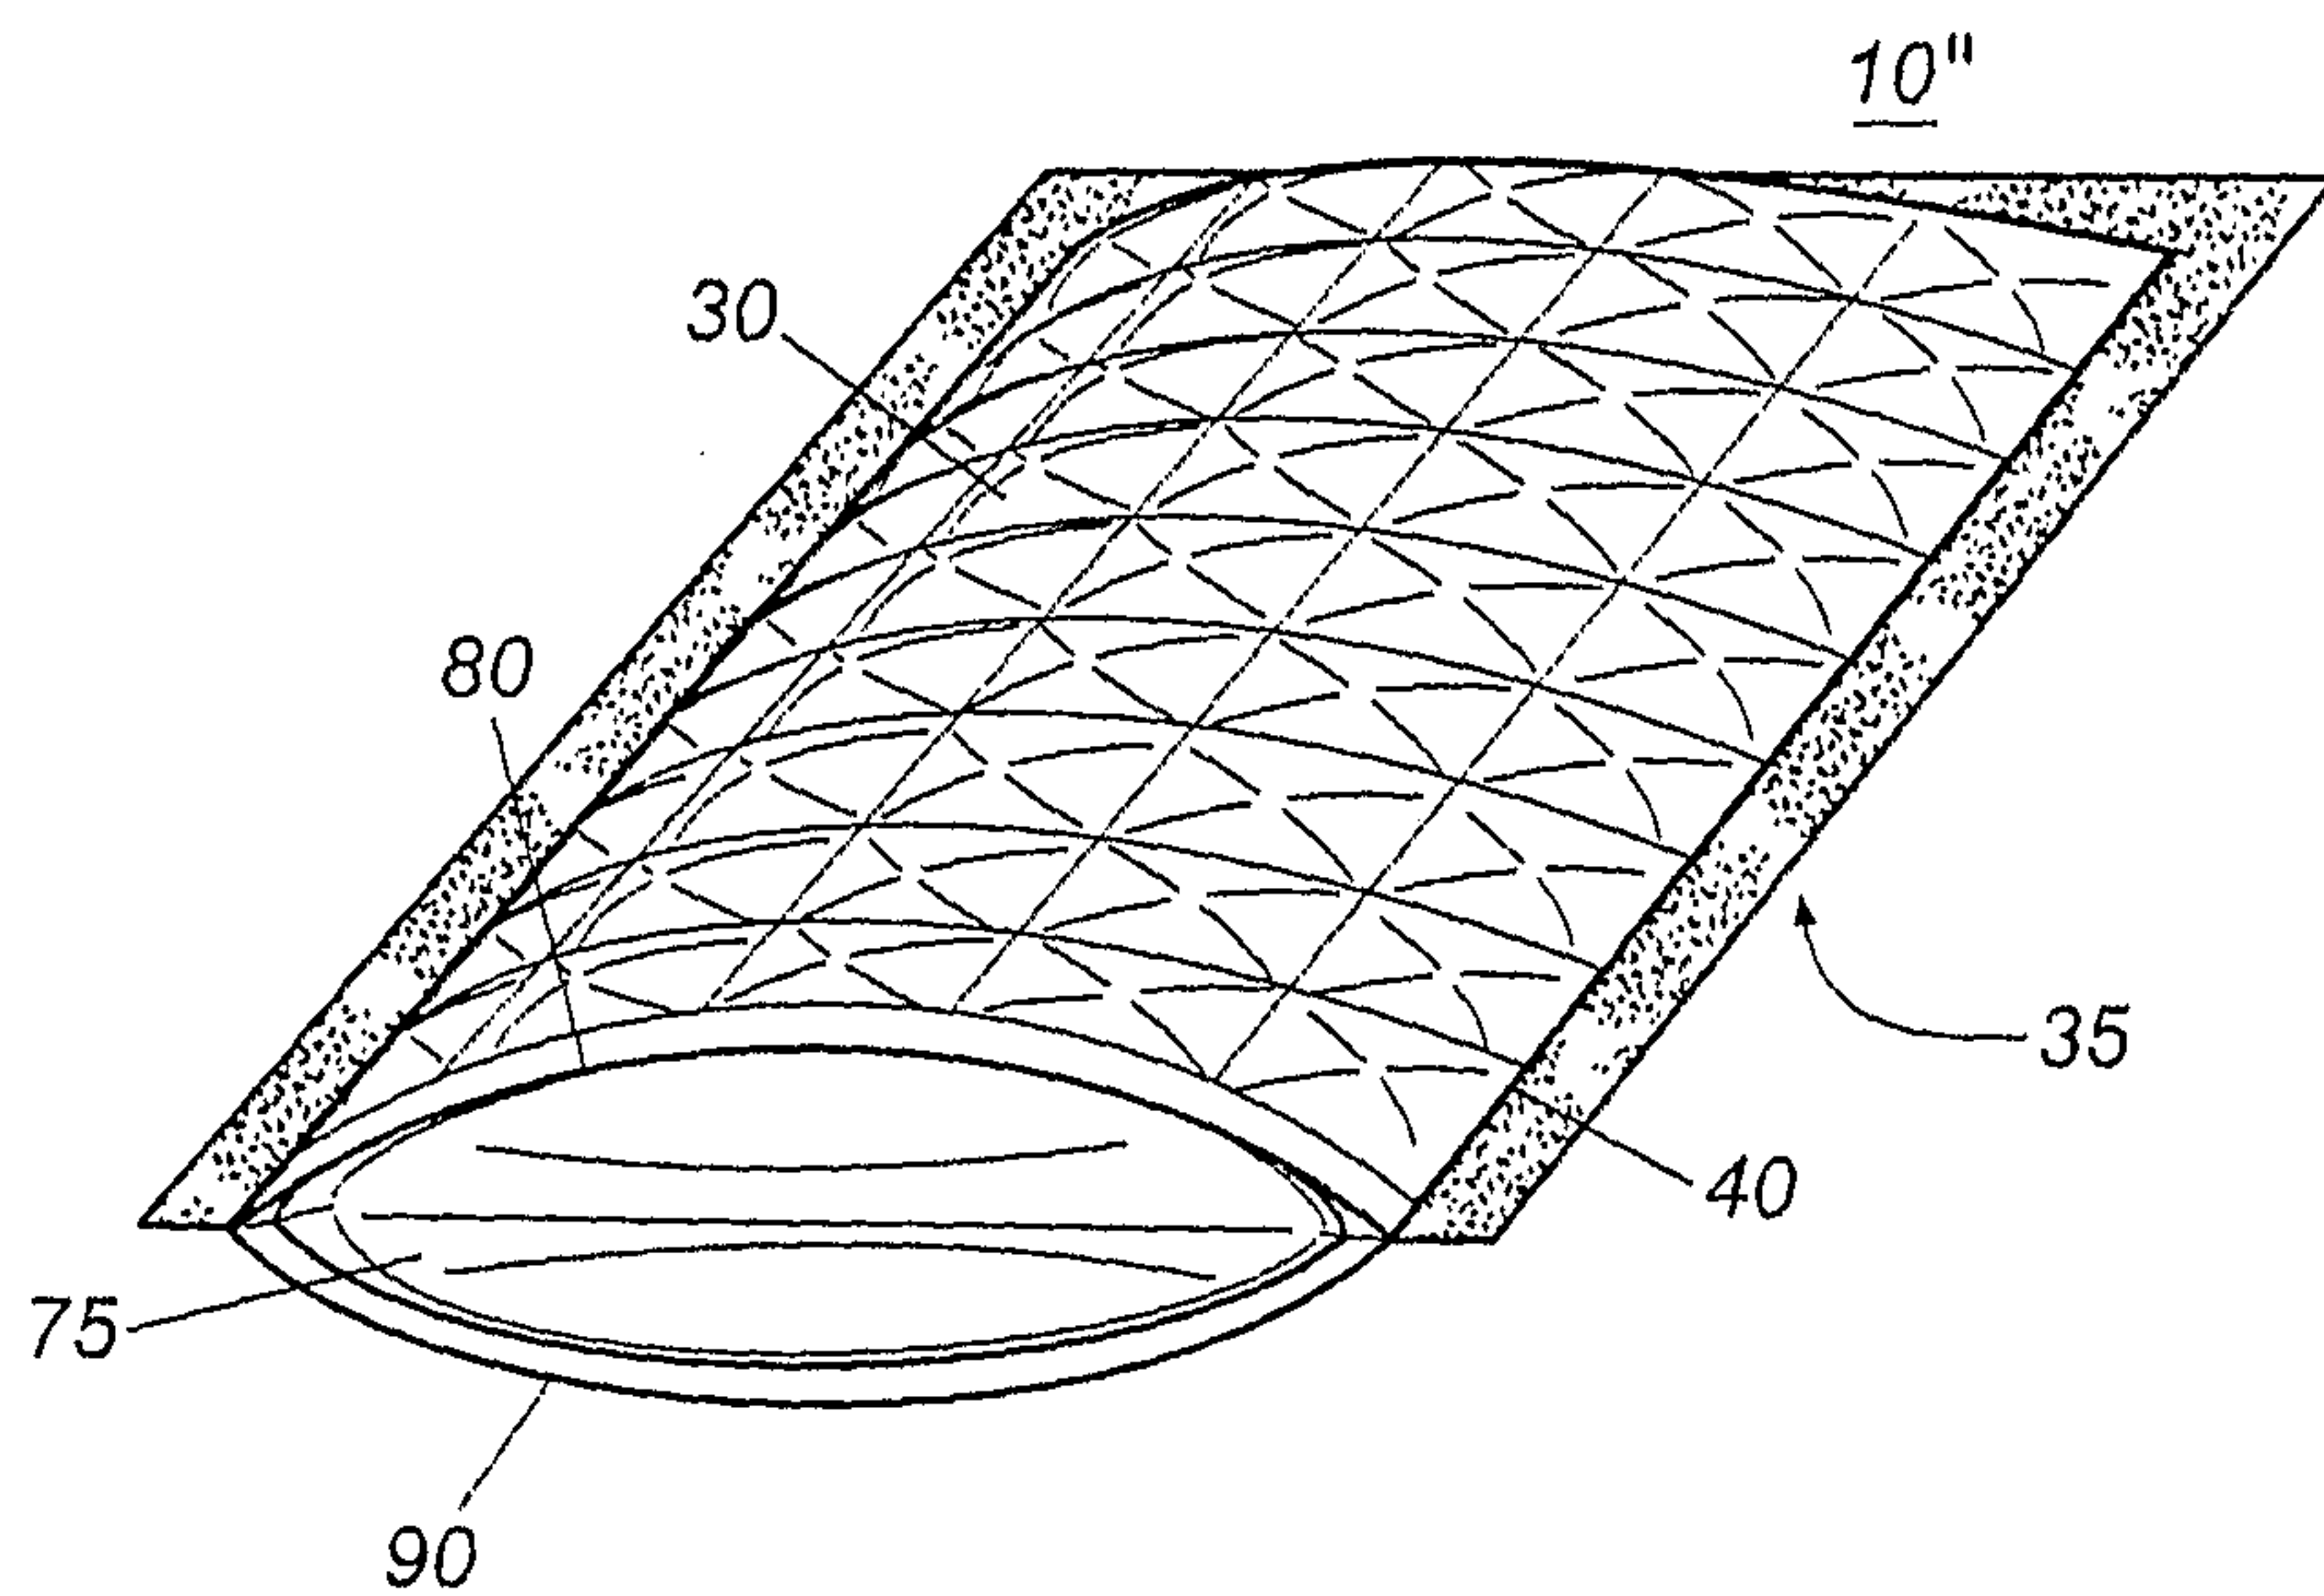
**Fig. 1****Fig. 2**

2/9

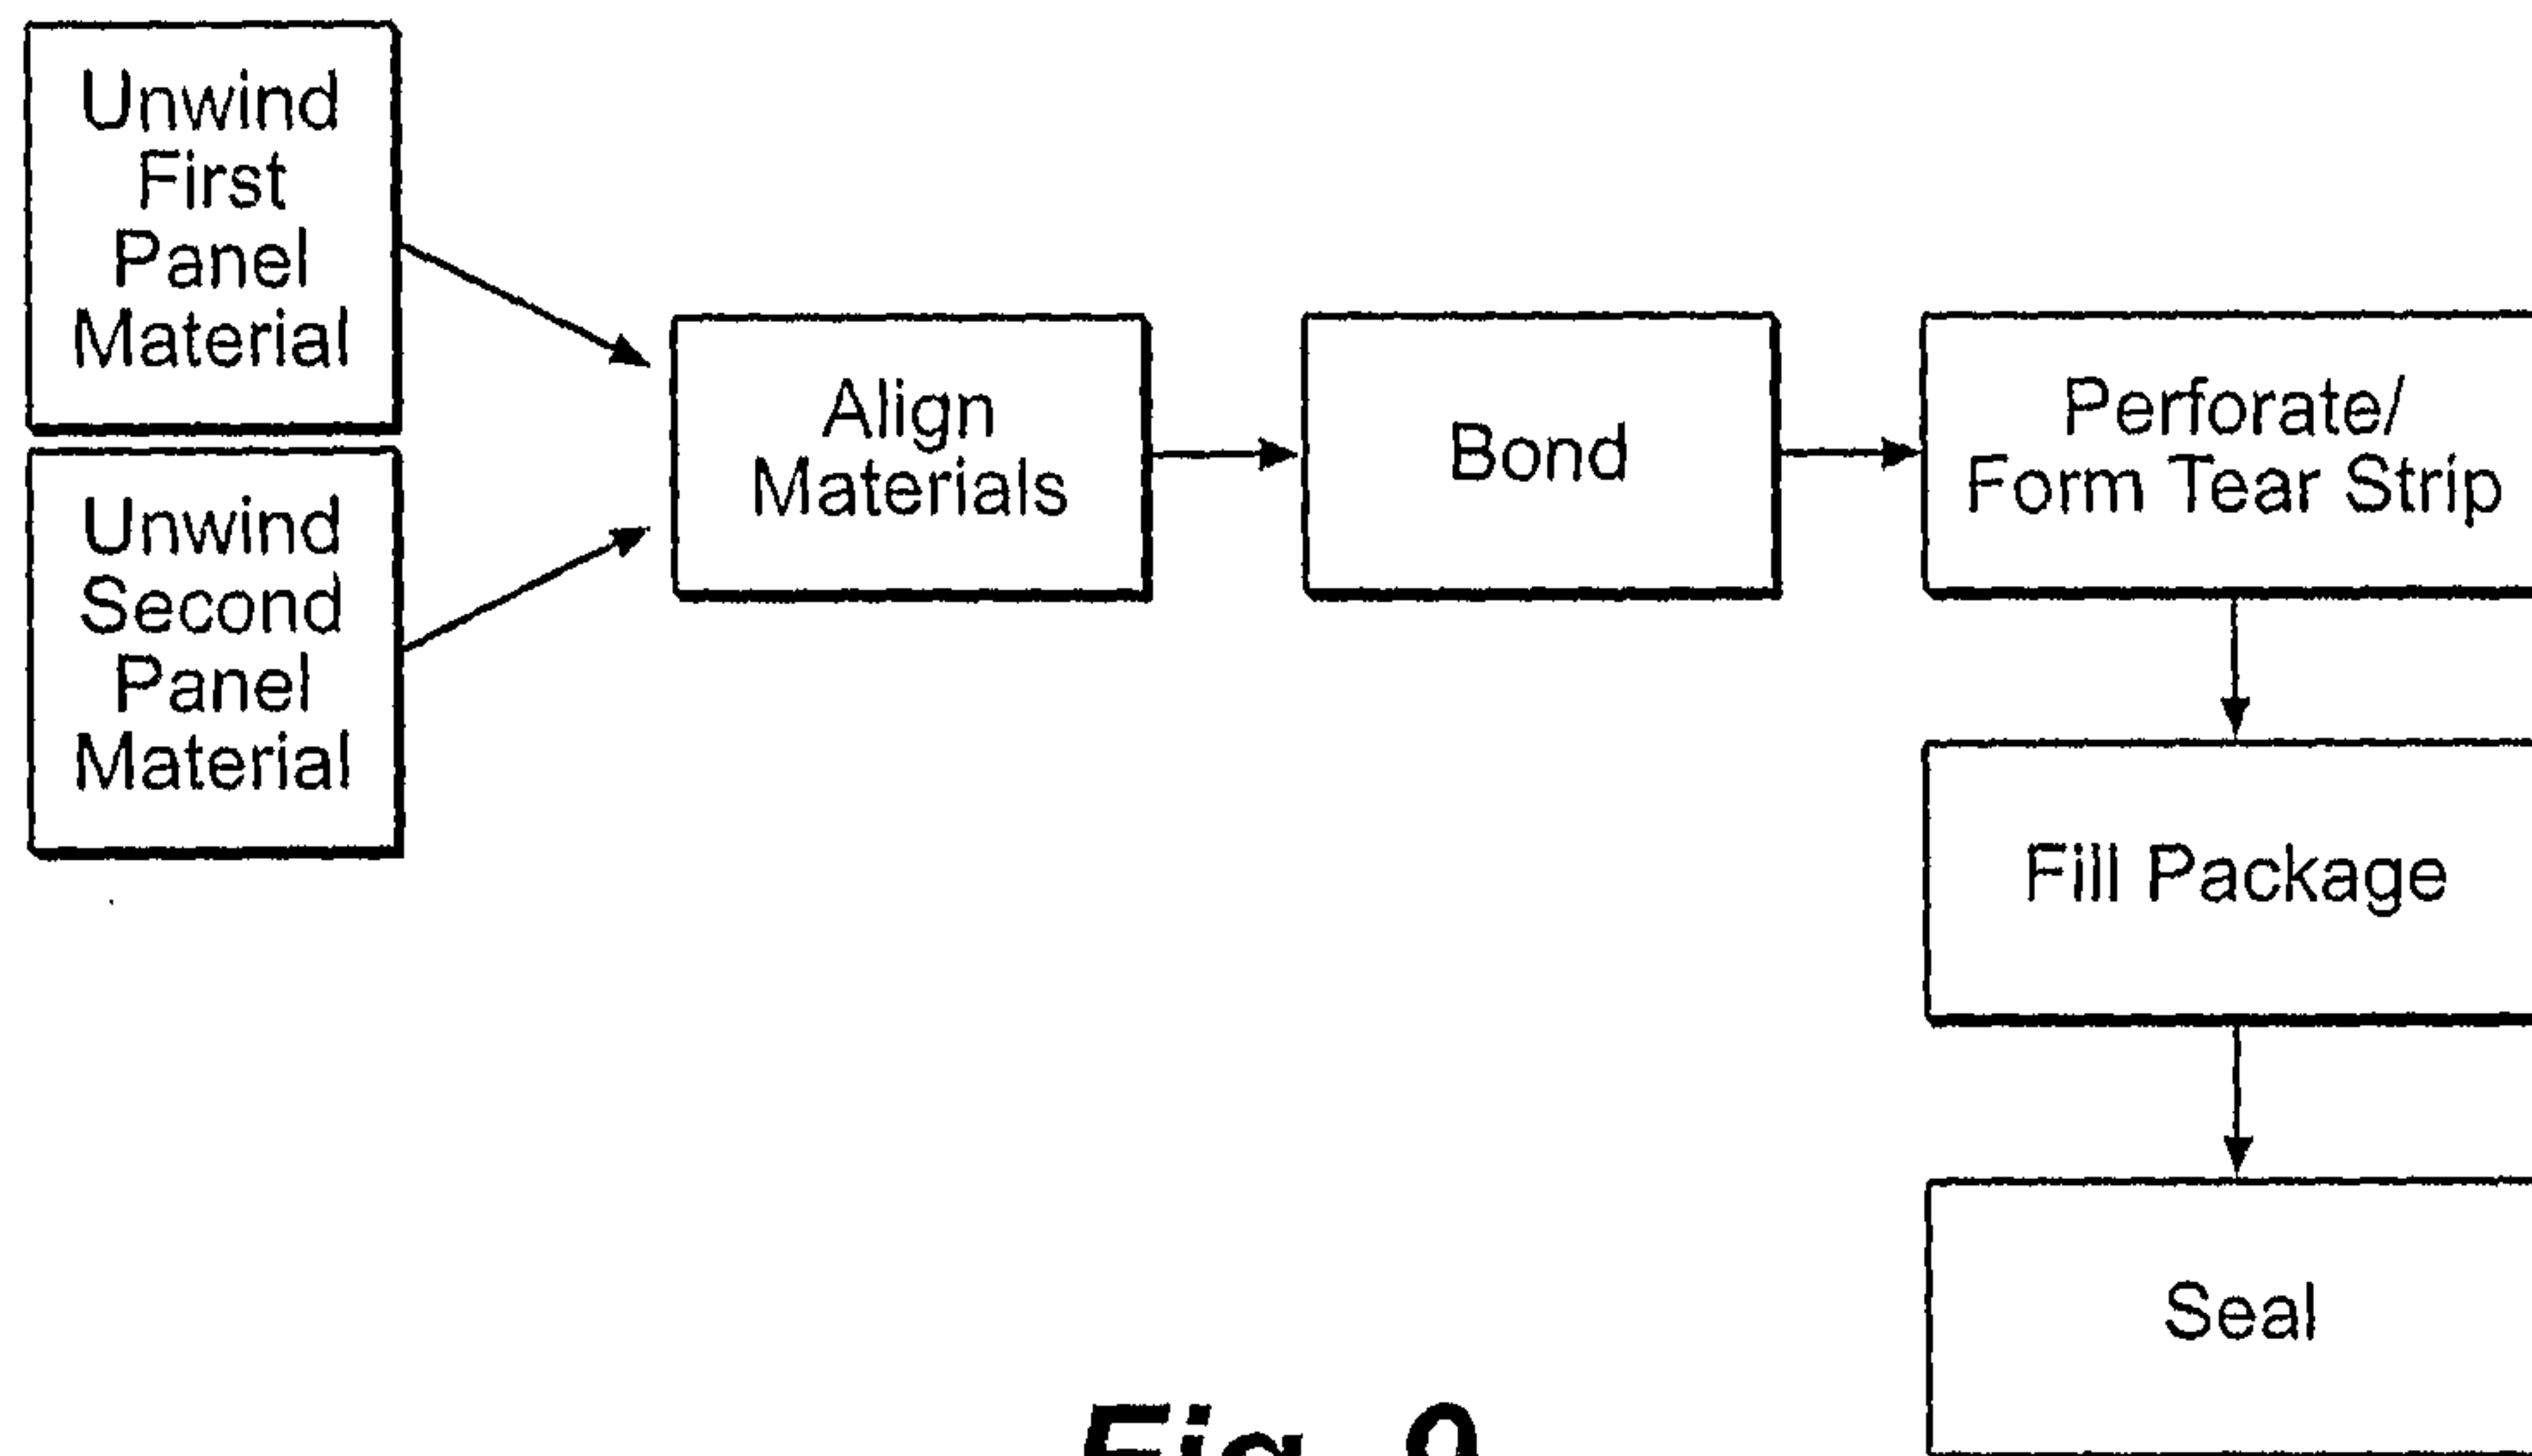
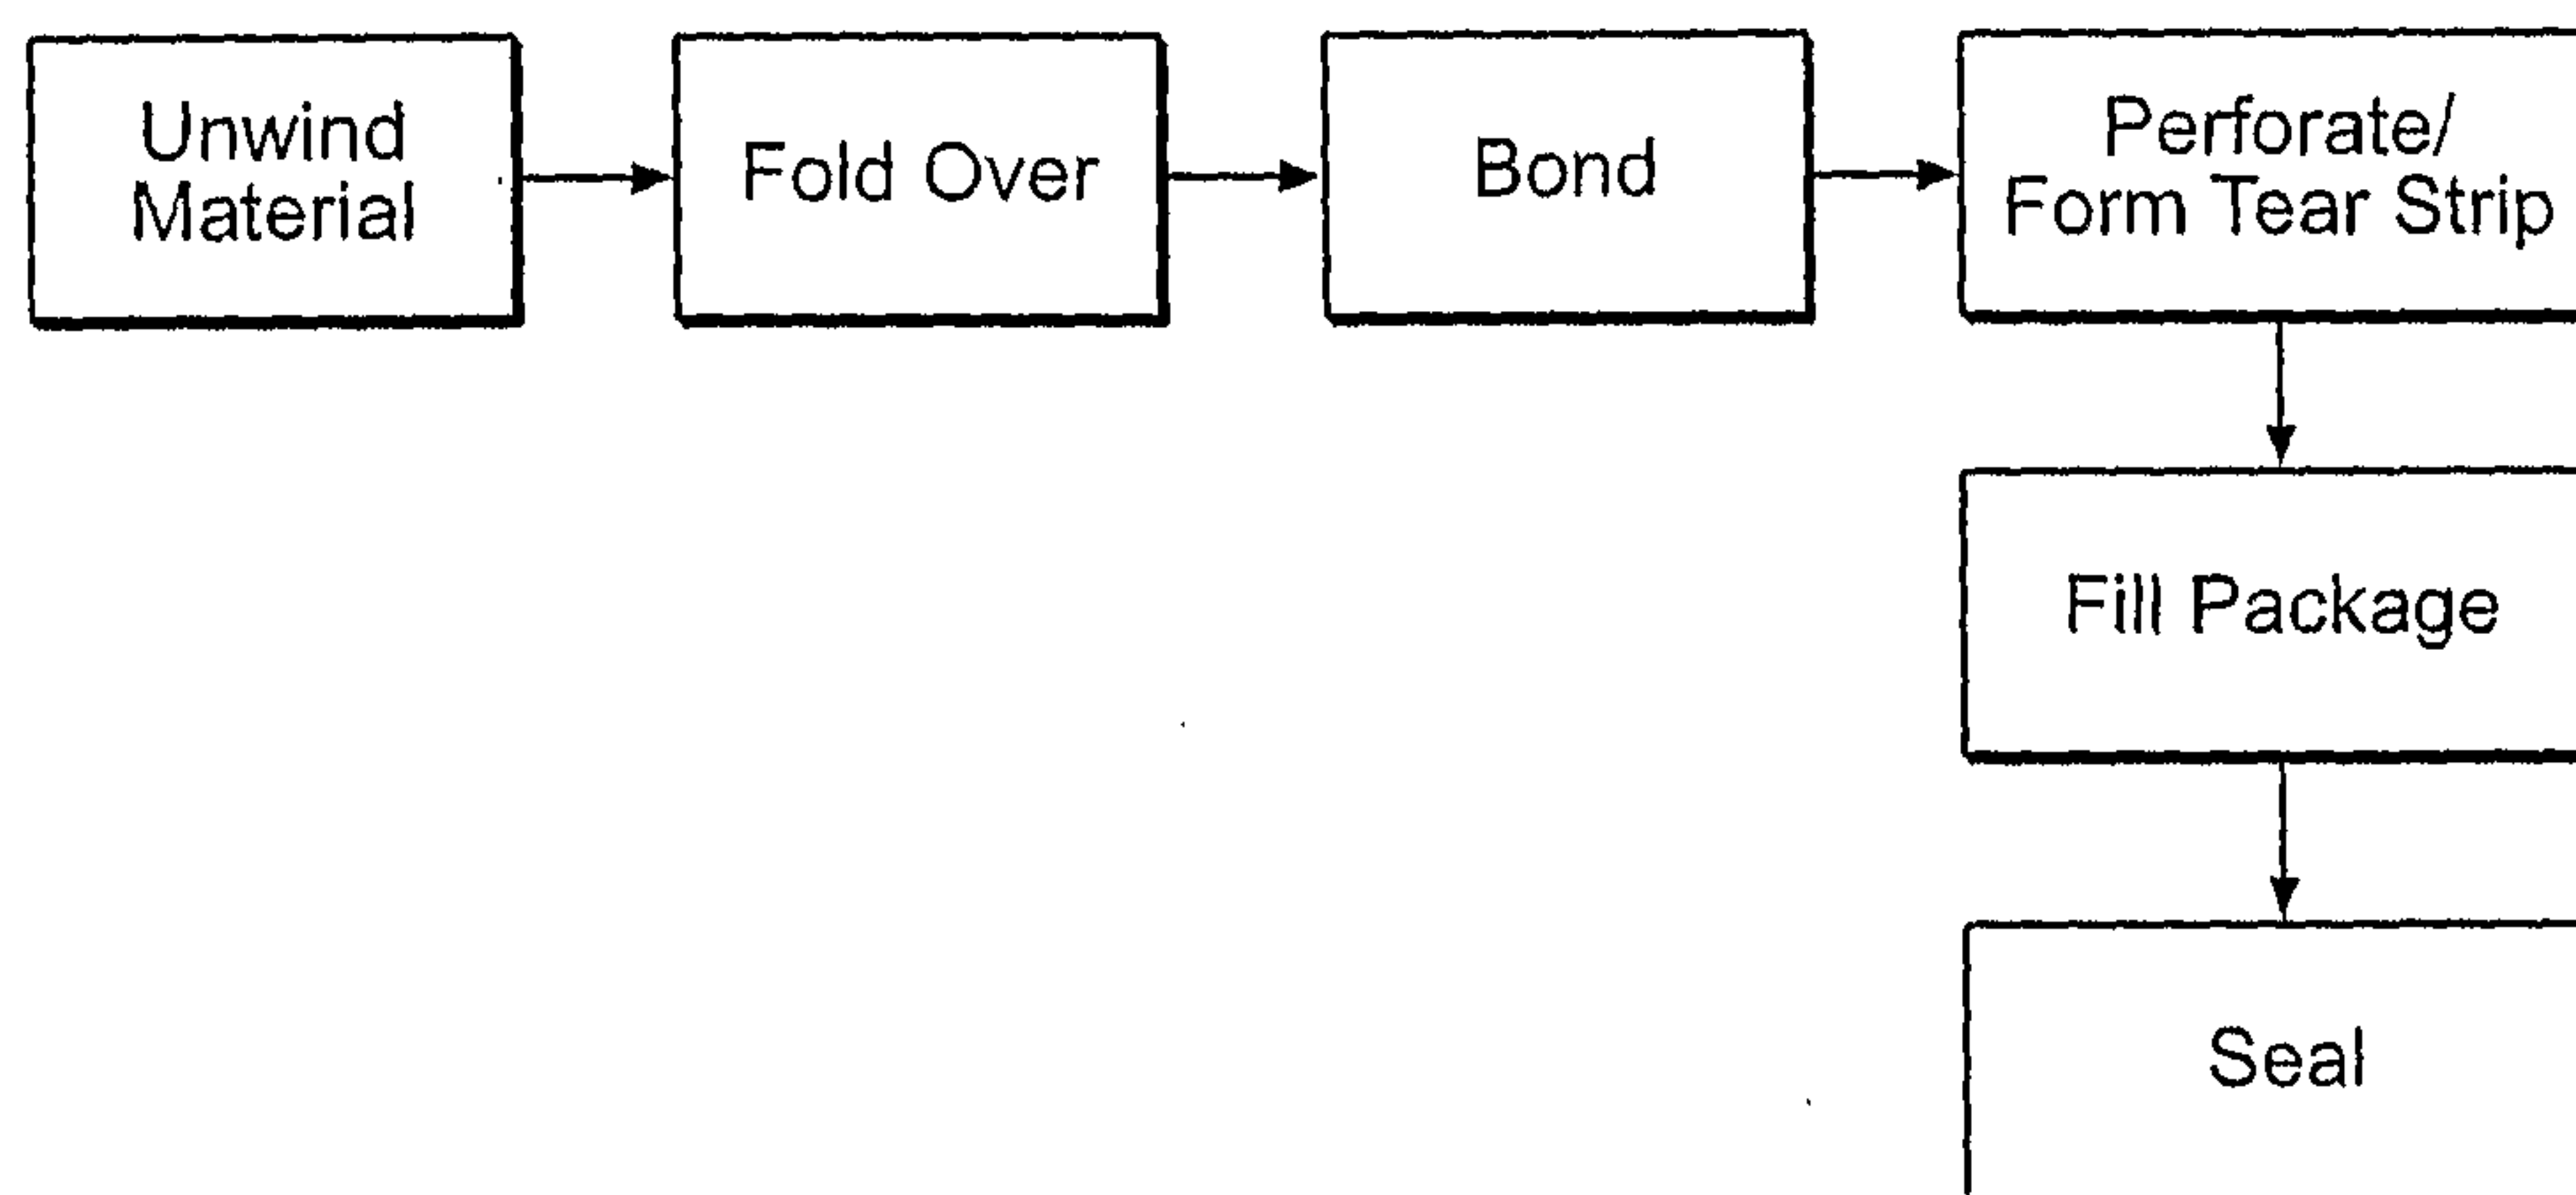
**Fig. 3A****Fig. 3B**

3/9

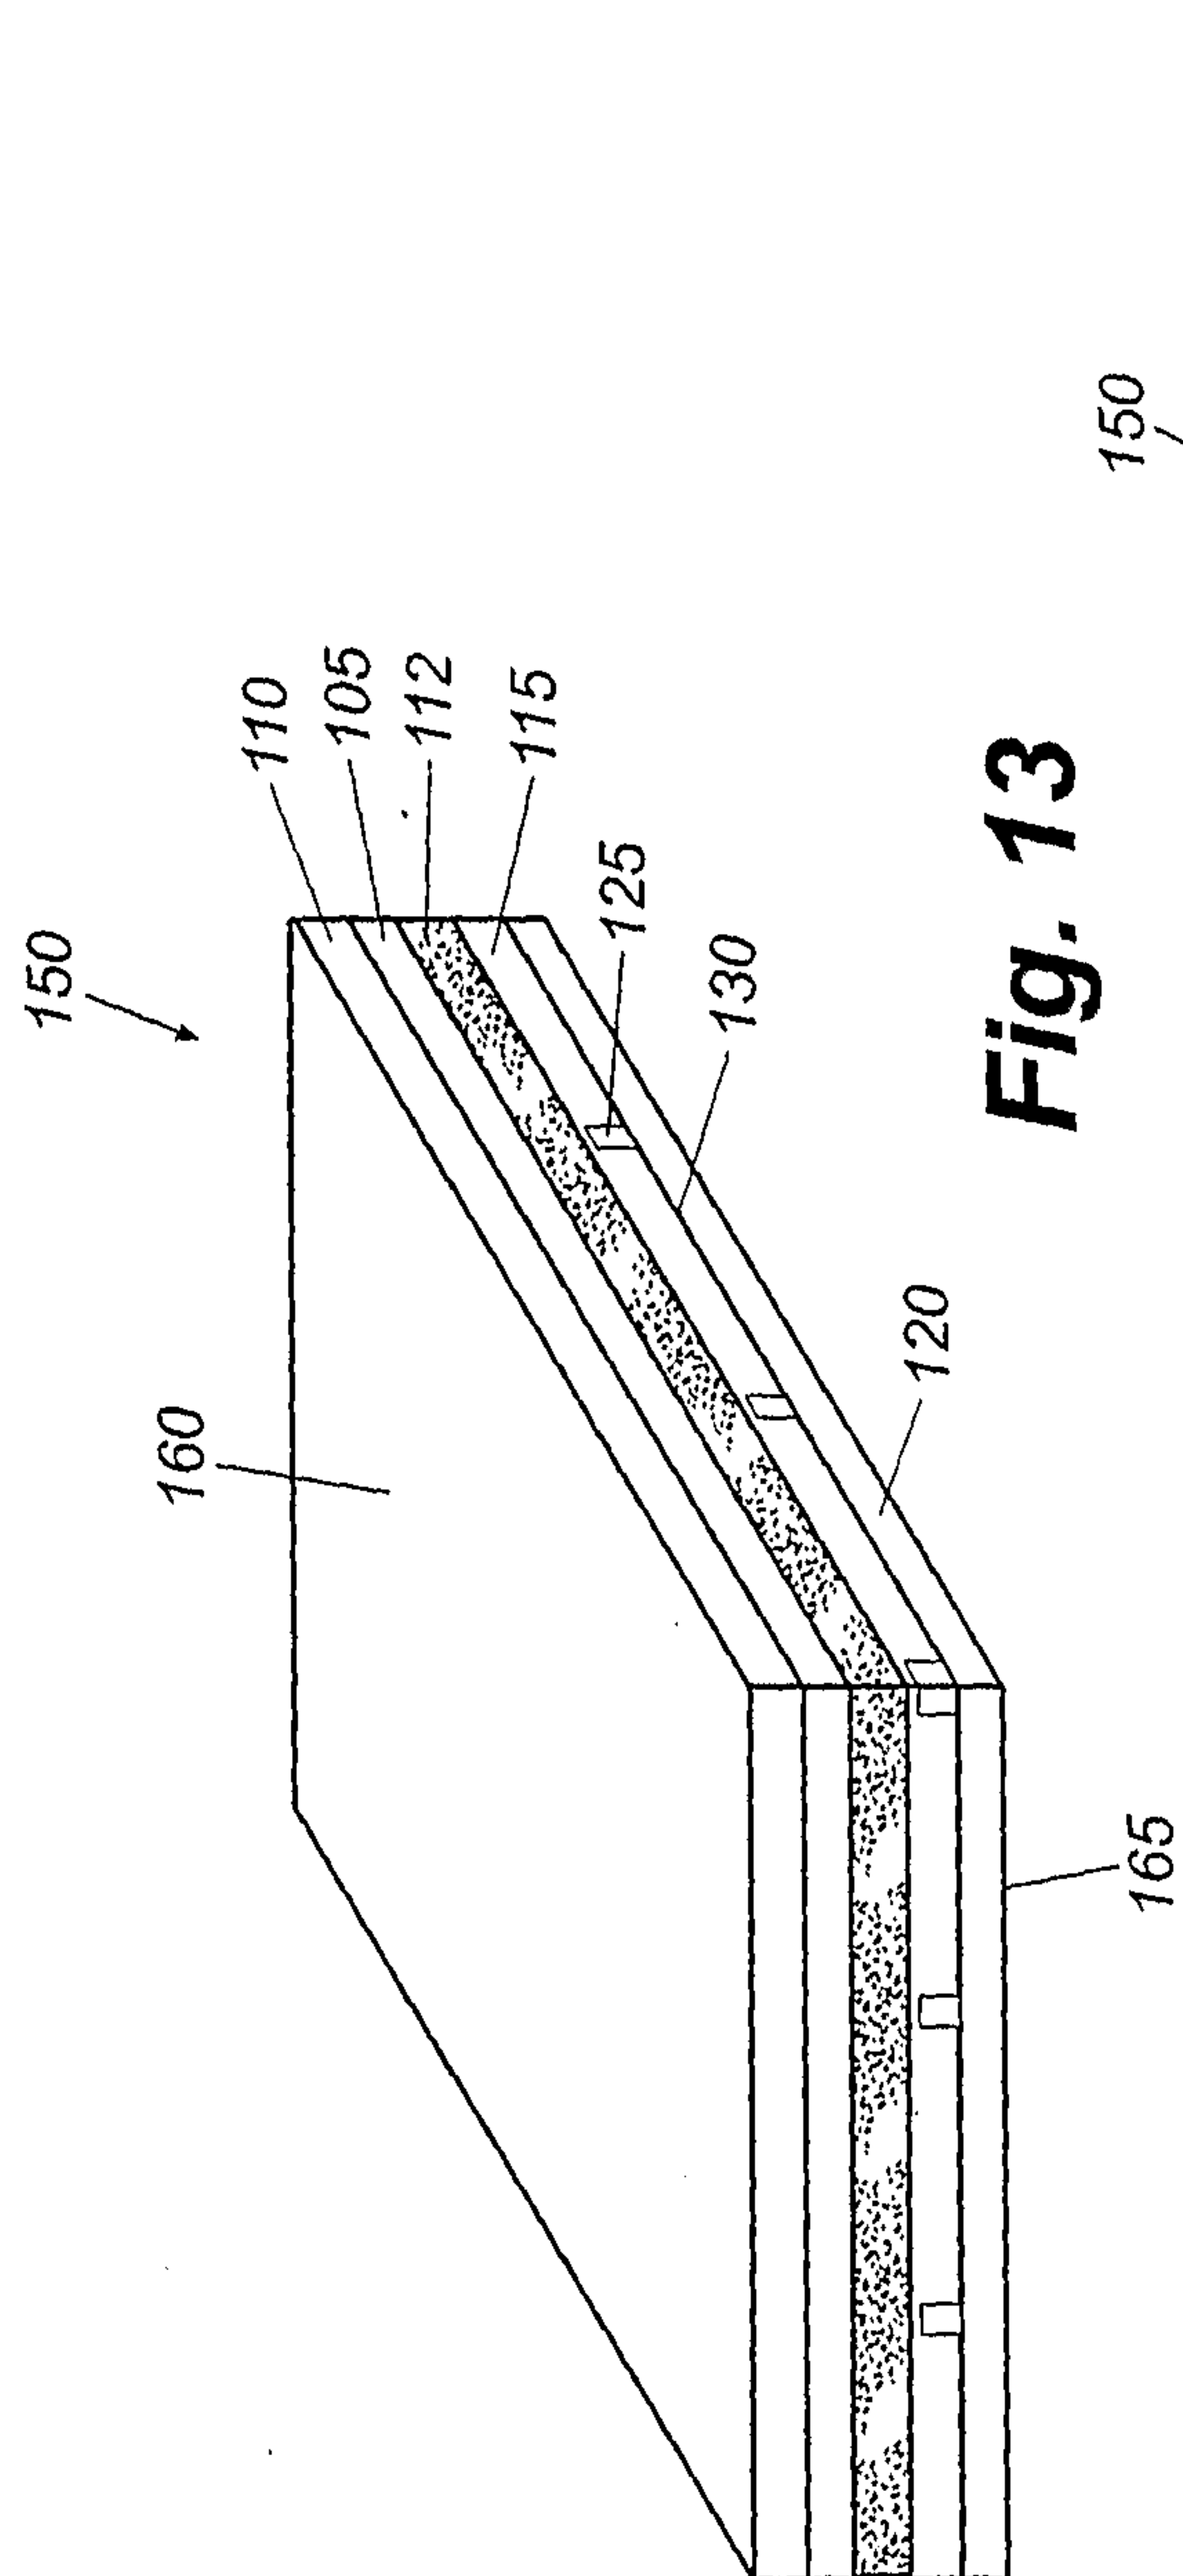
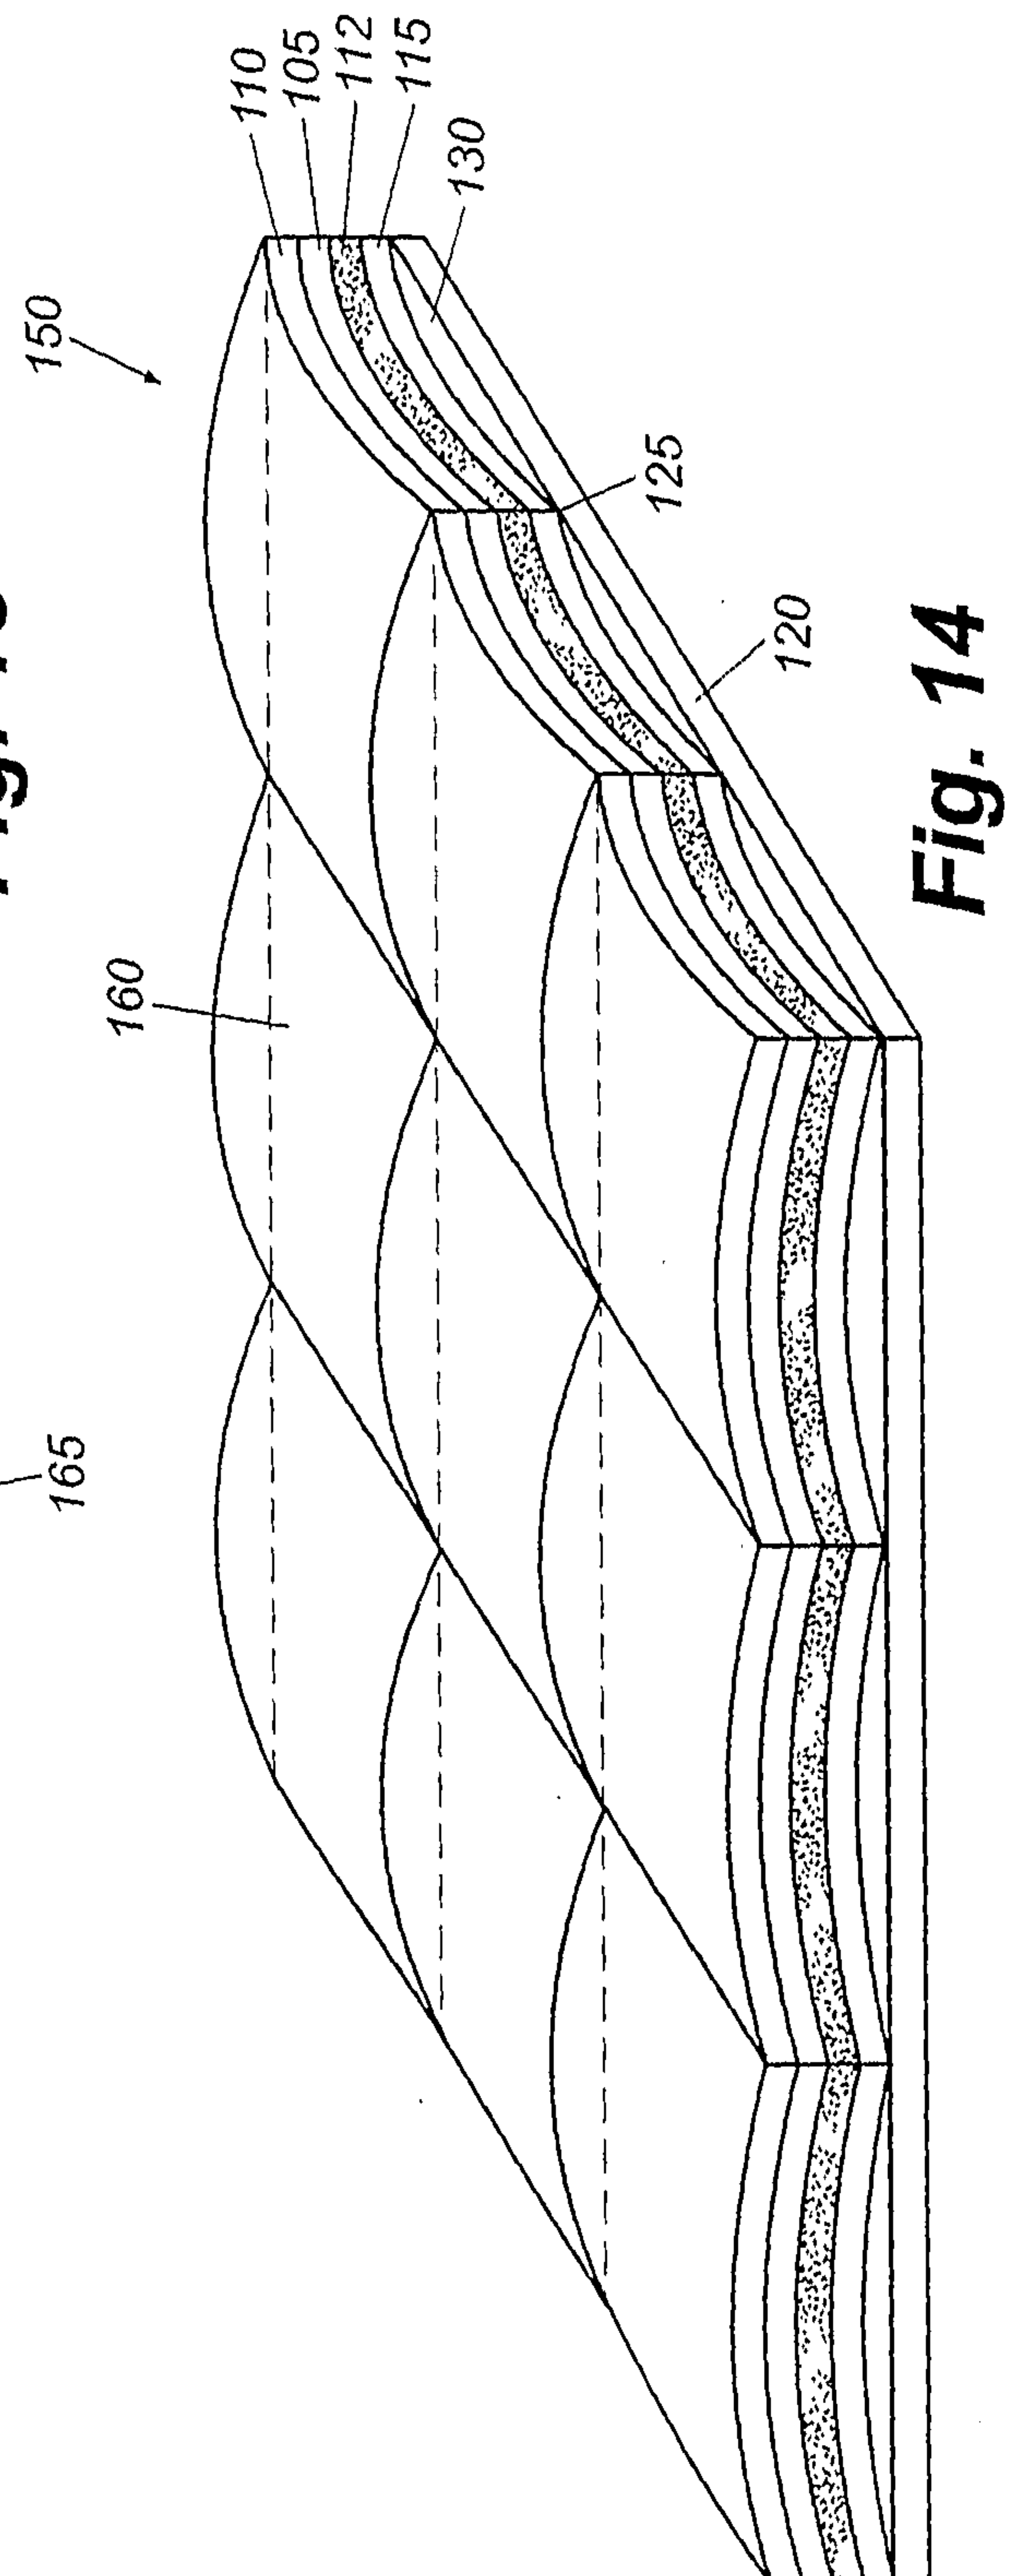
**Fig. 4****Fig. 5**

**Fig. 6****Fig. 7****Fig. 8**

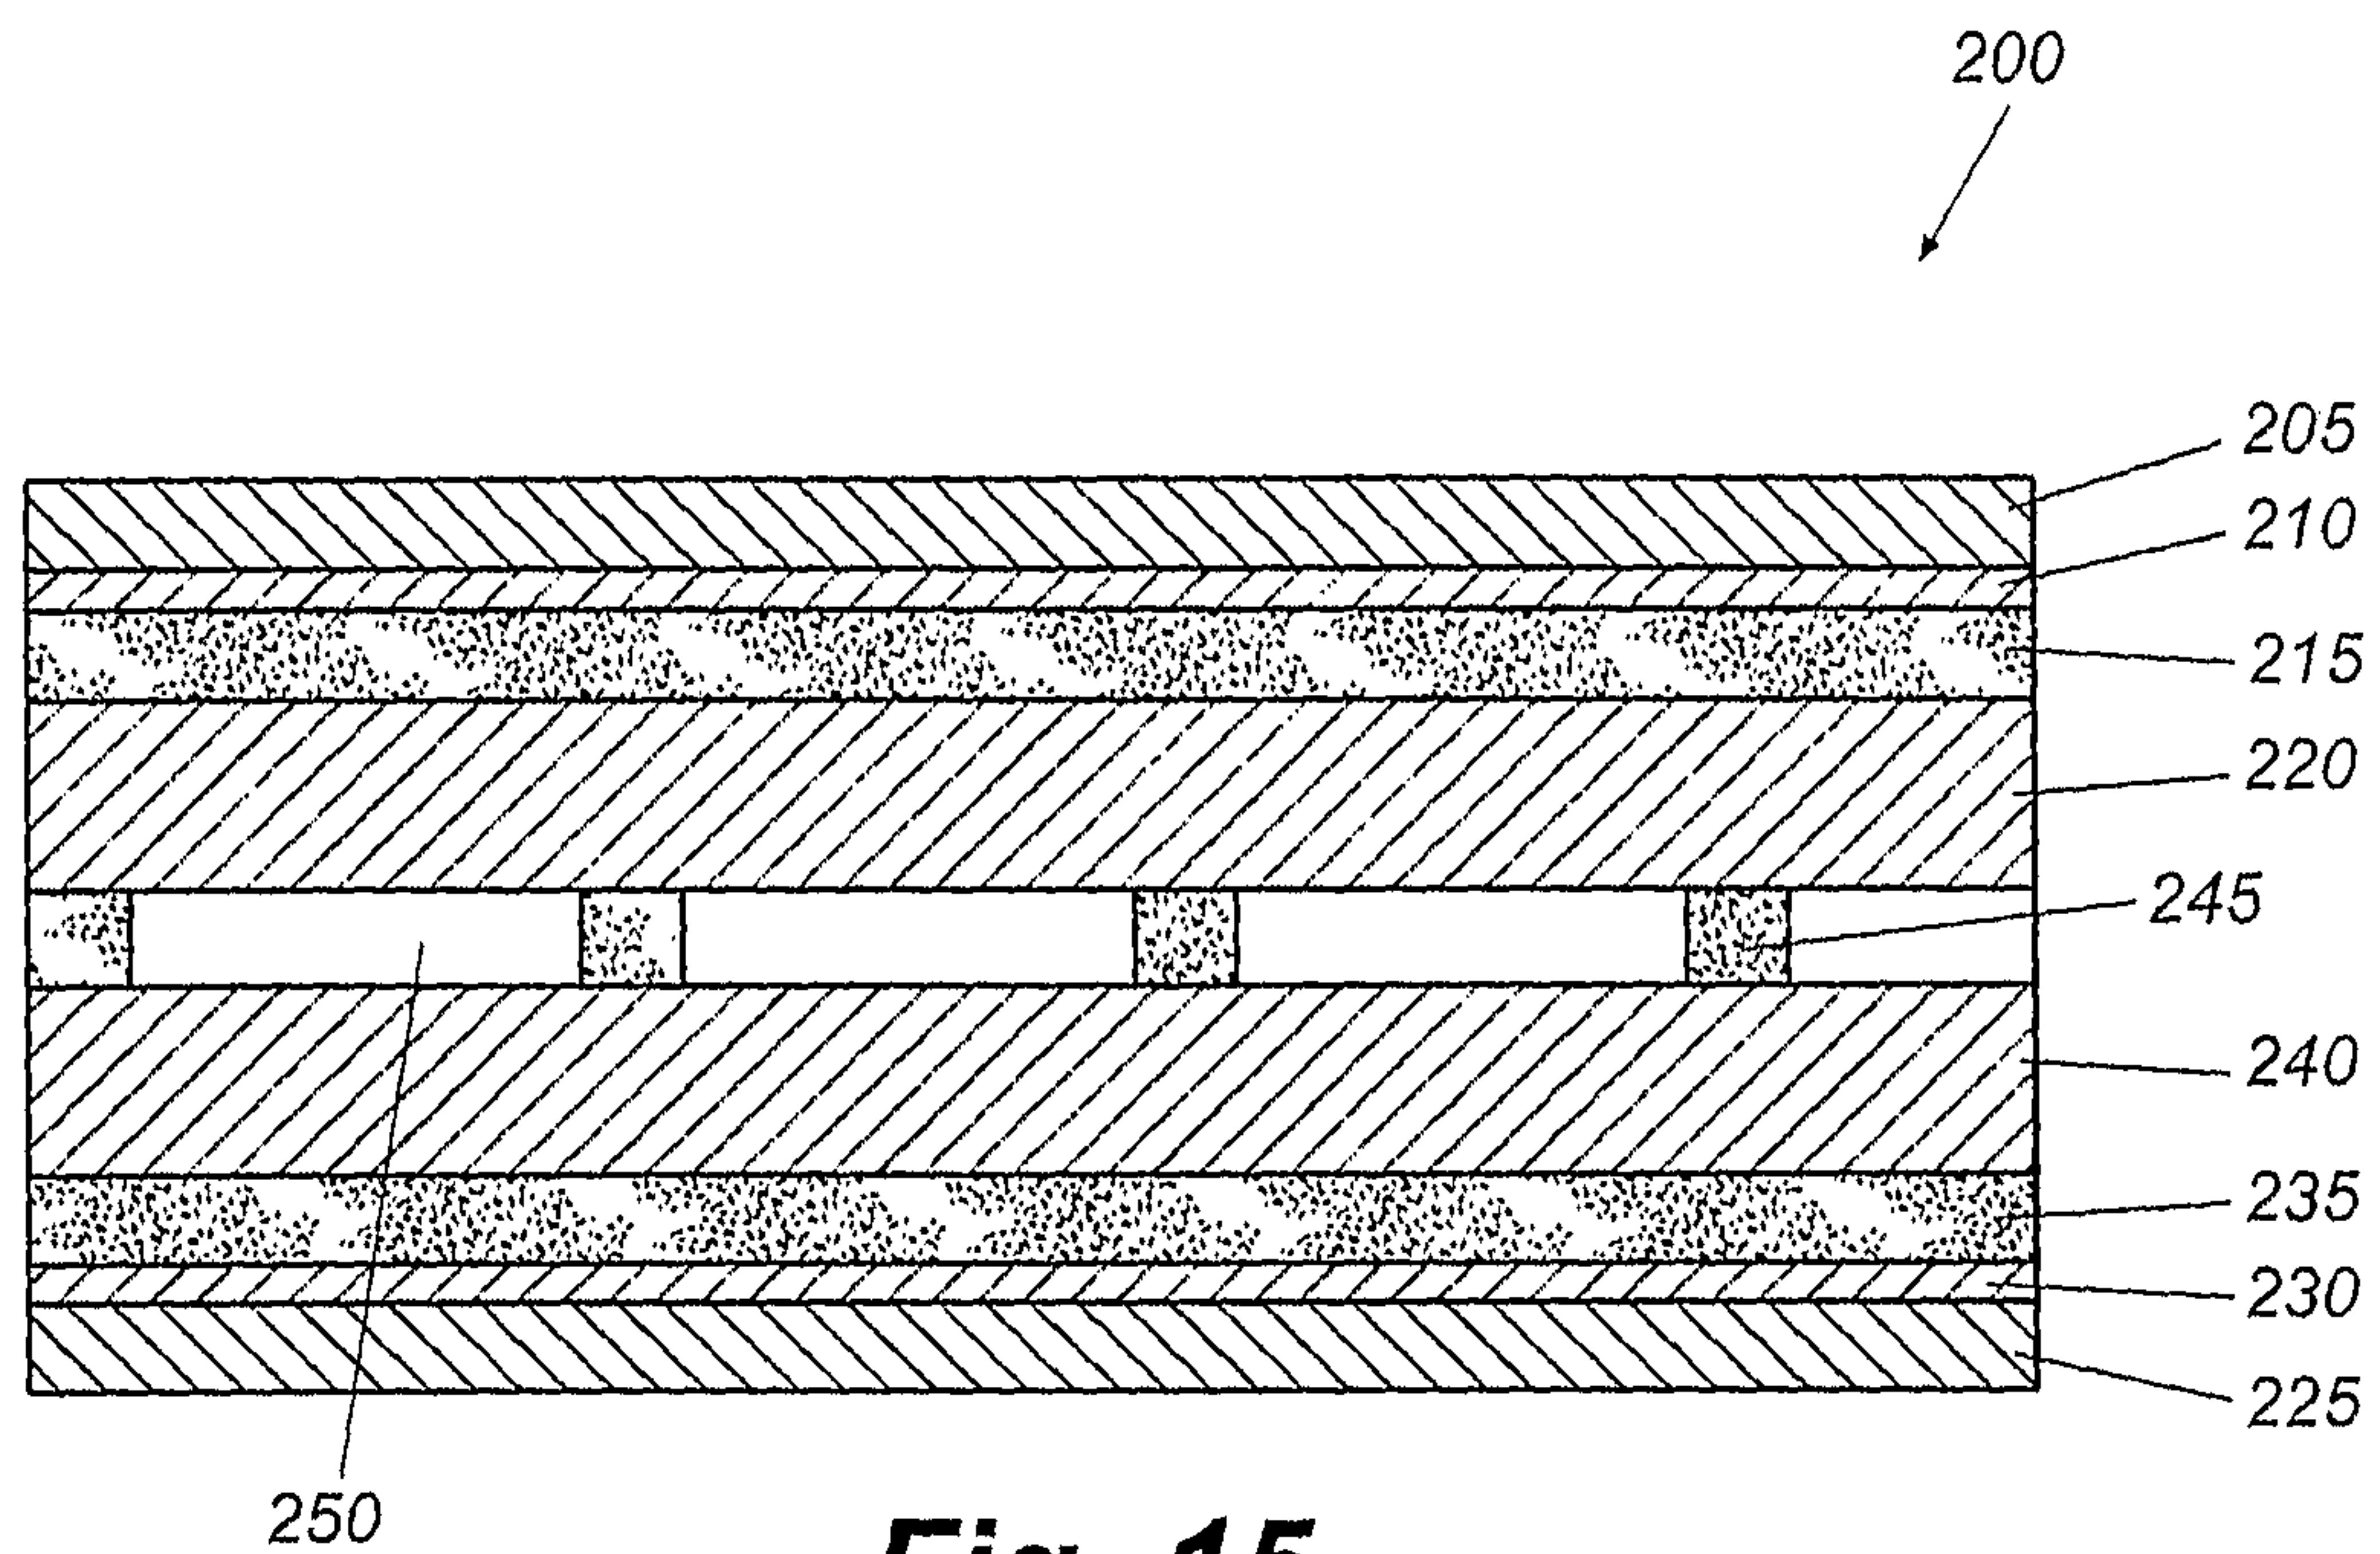
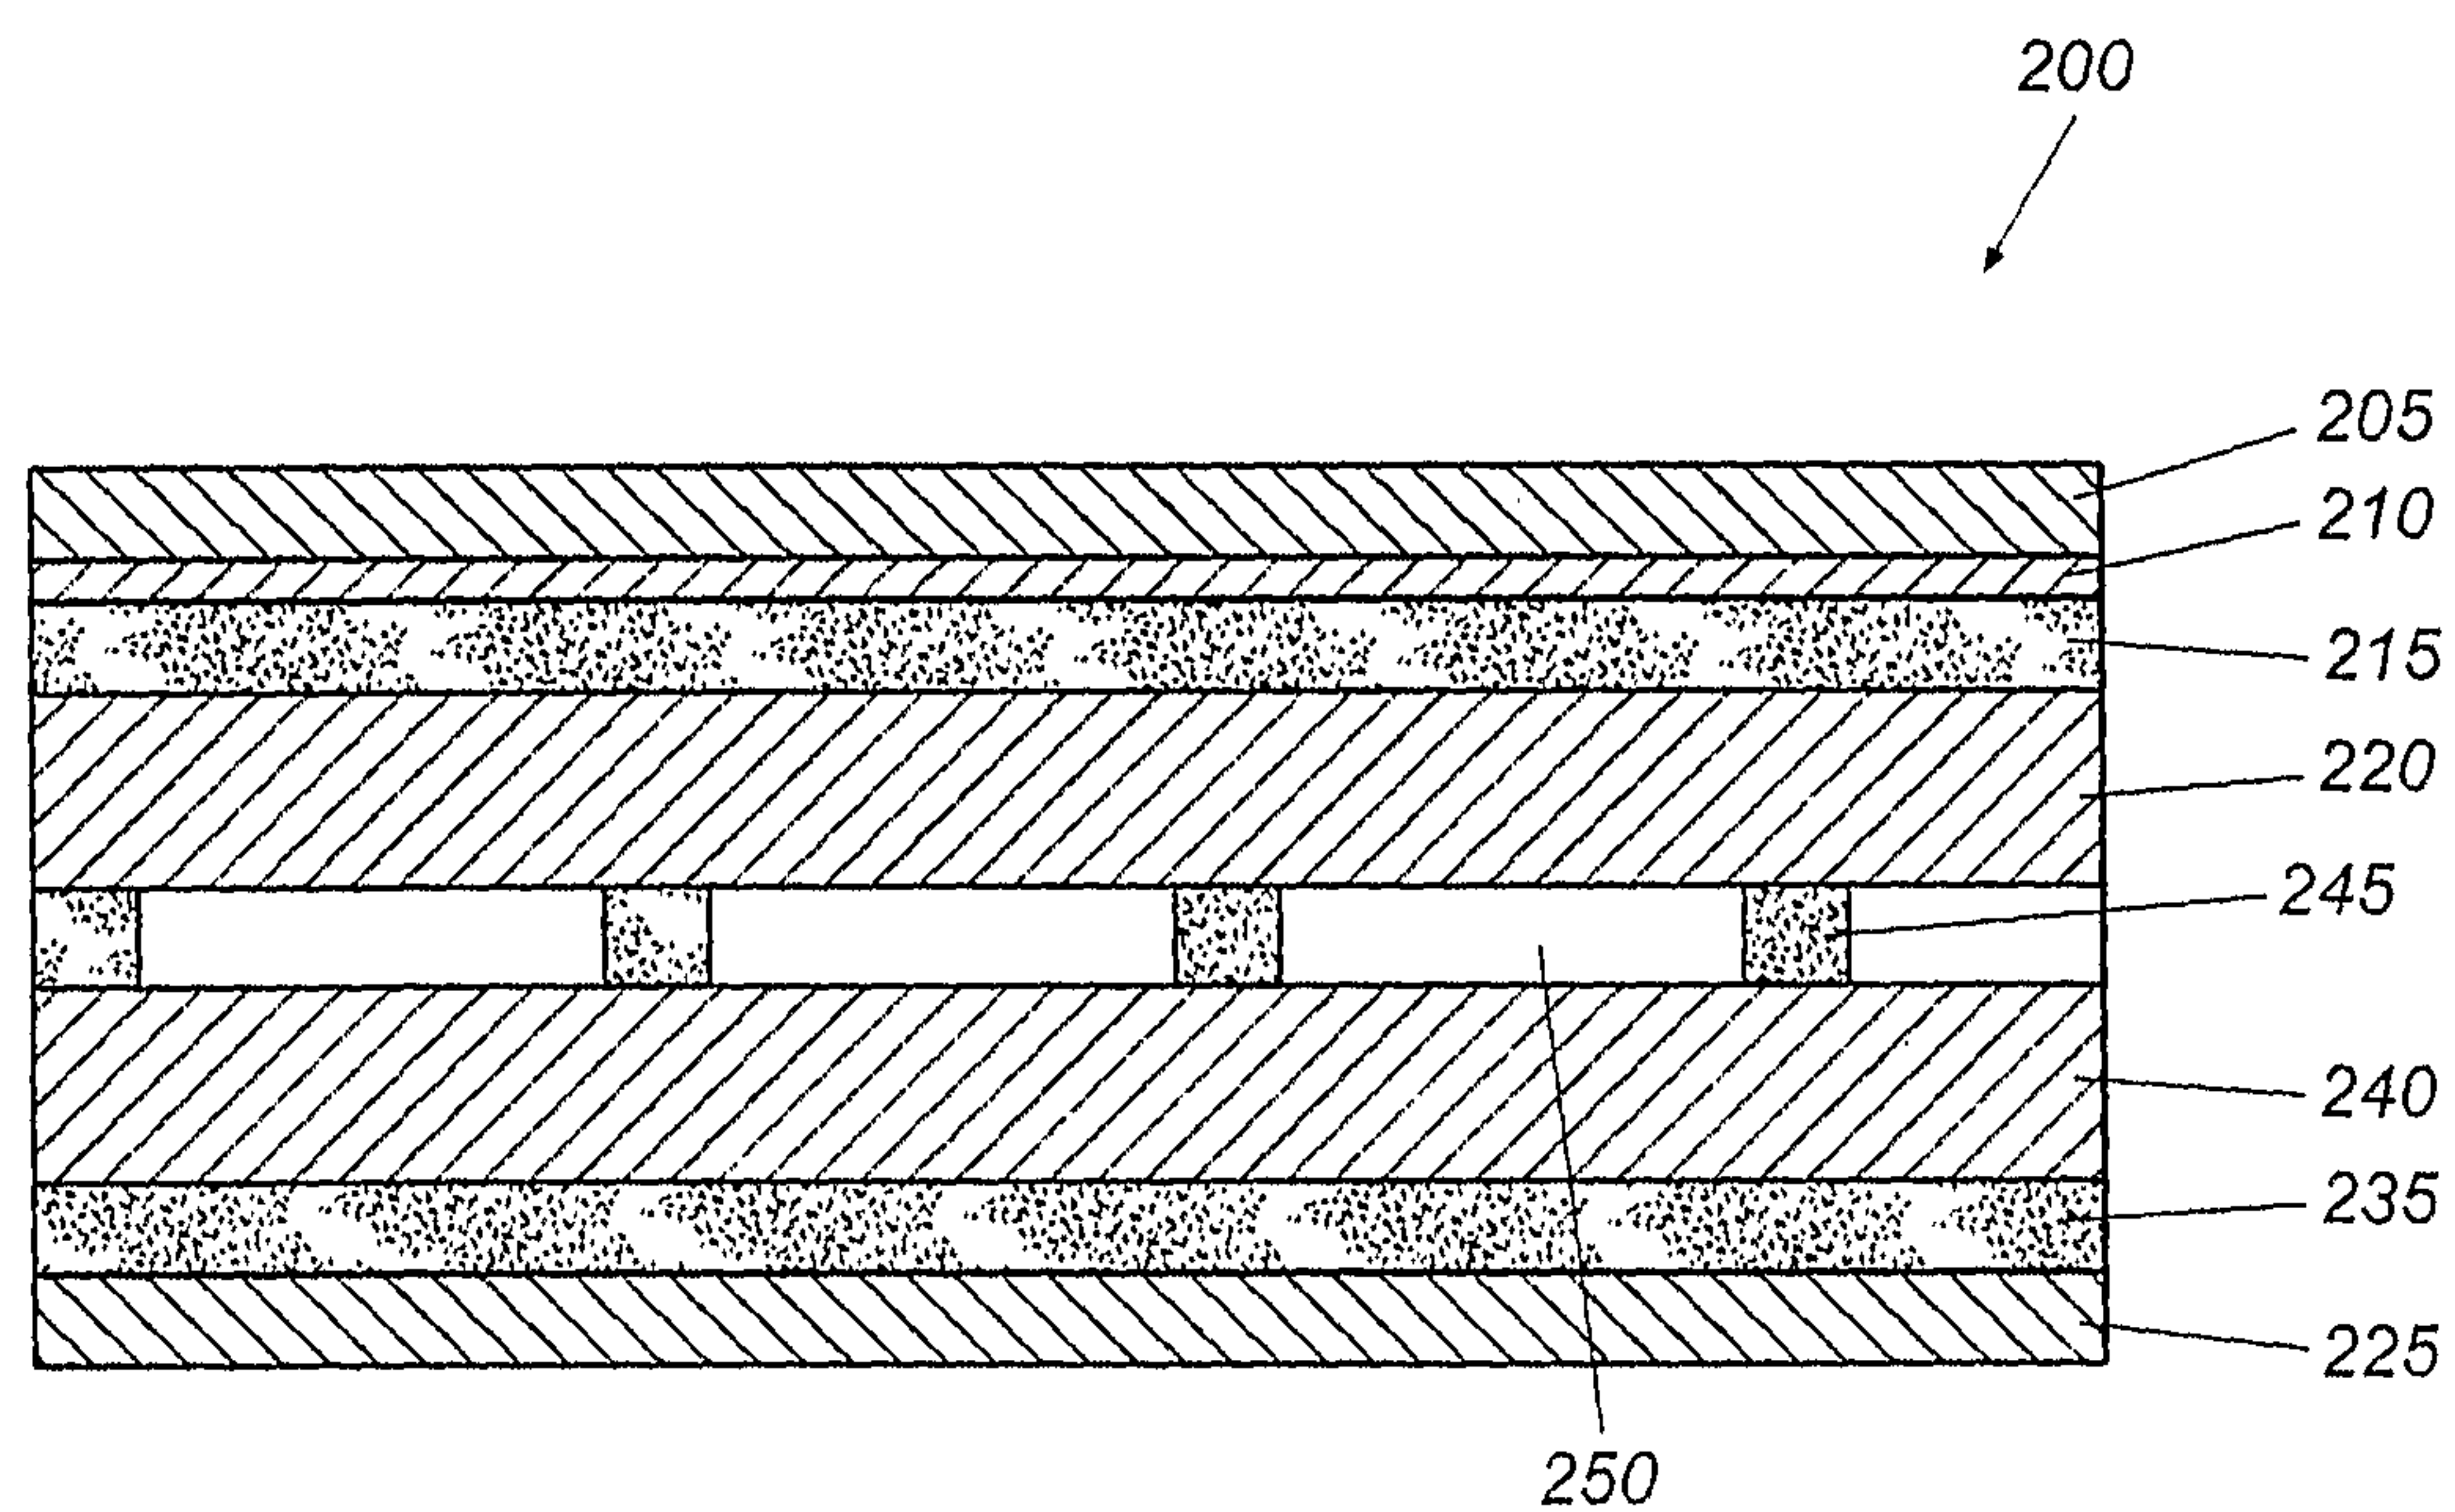
5/9

**Fig. 9****Fig. 10**

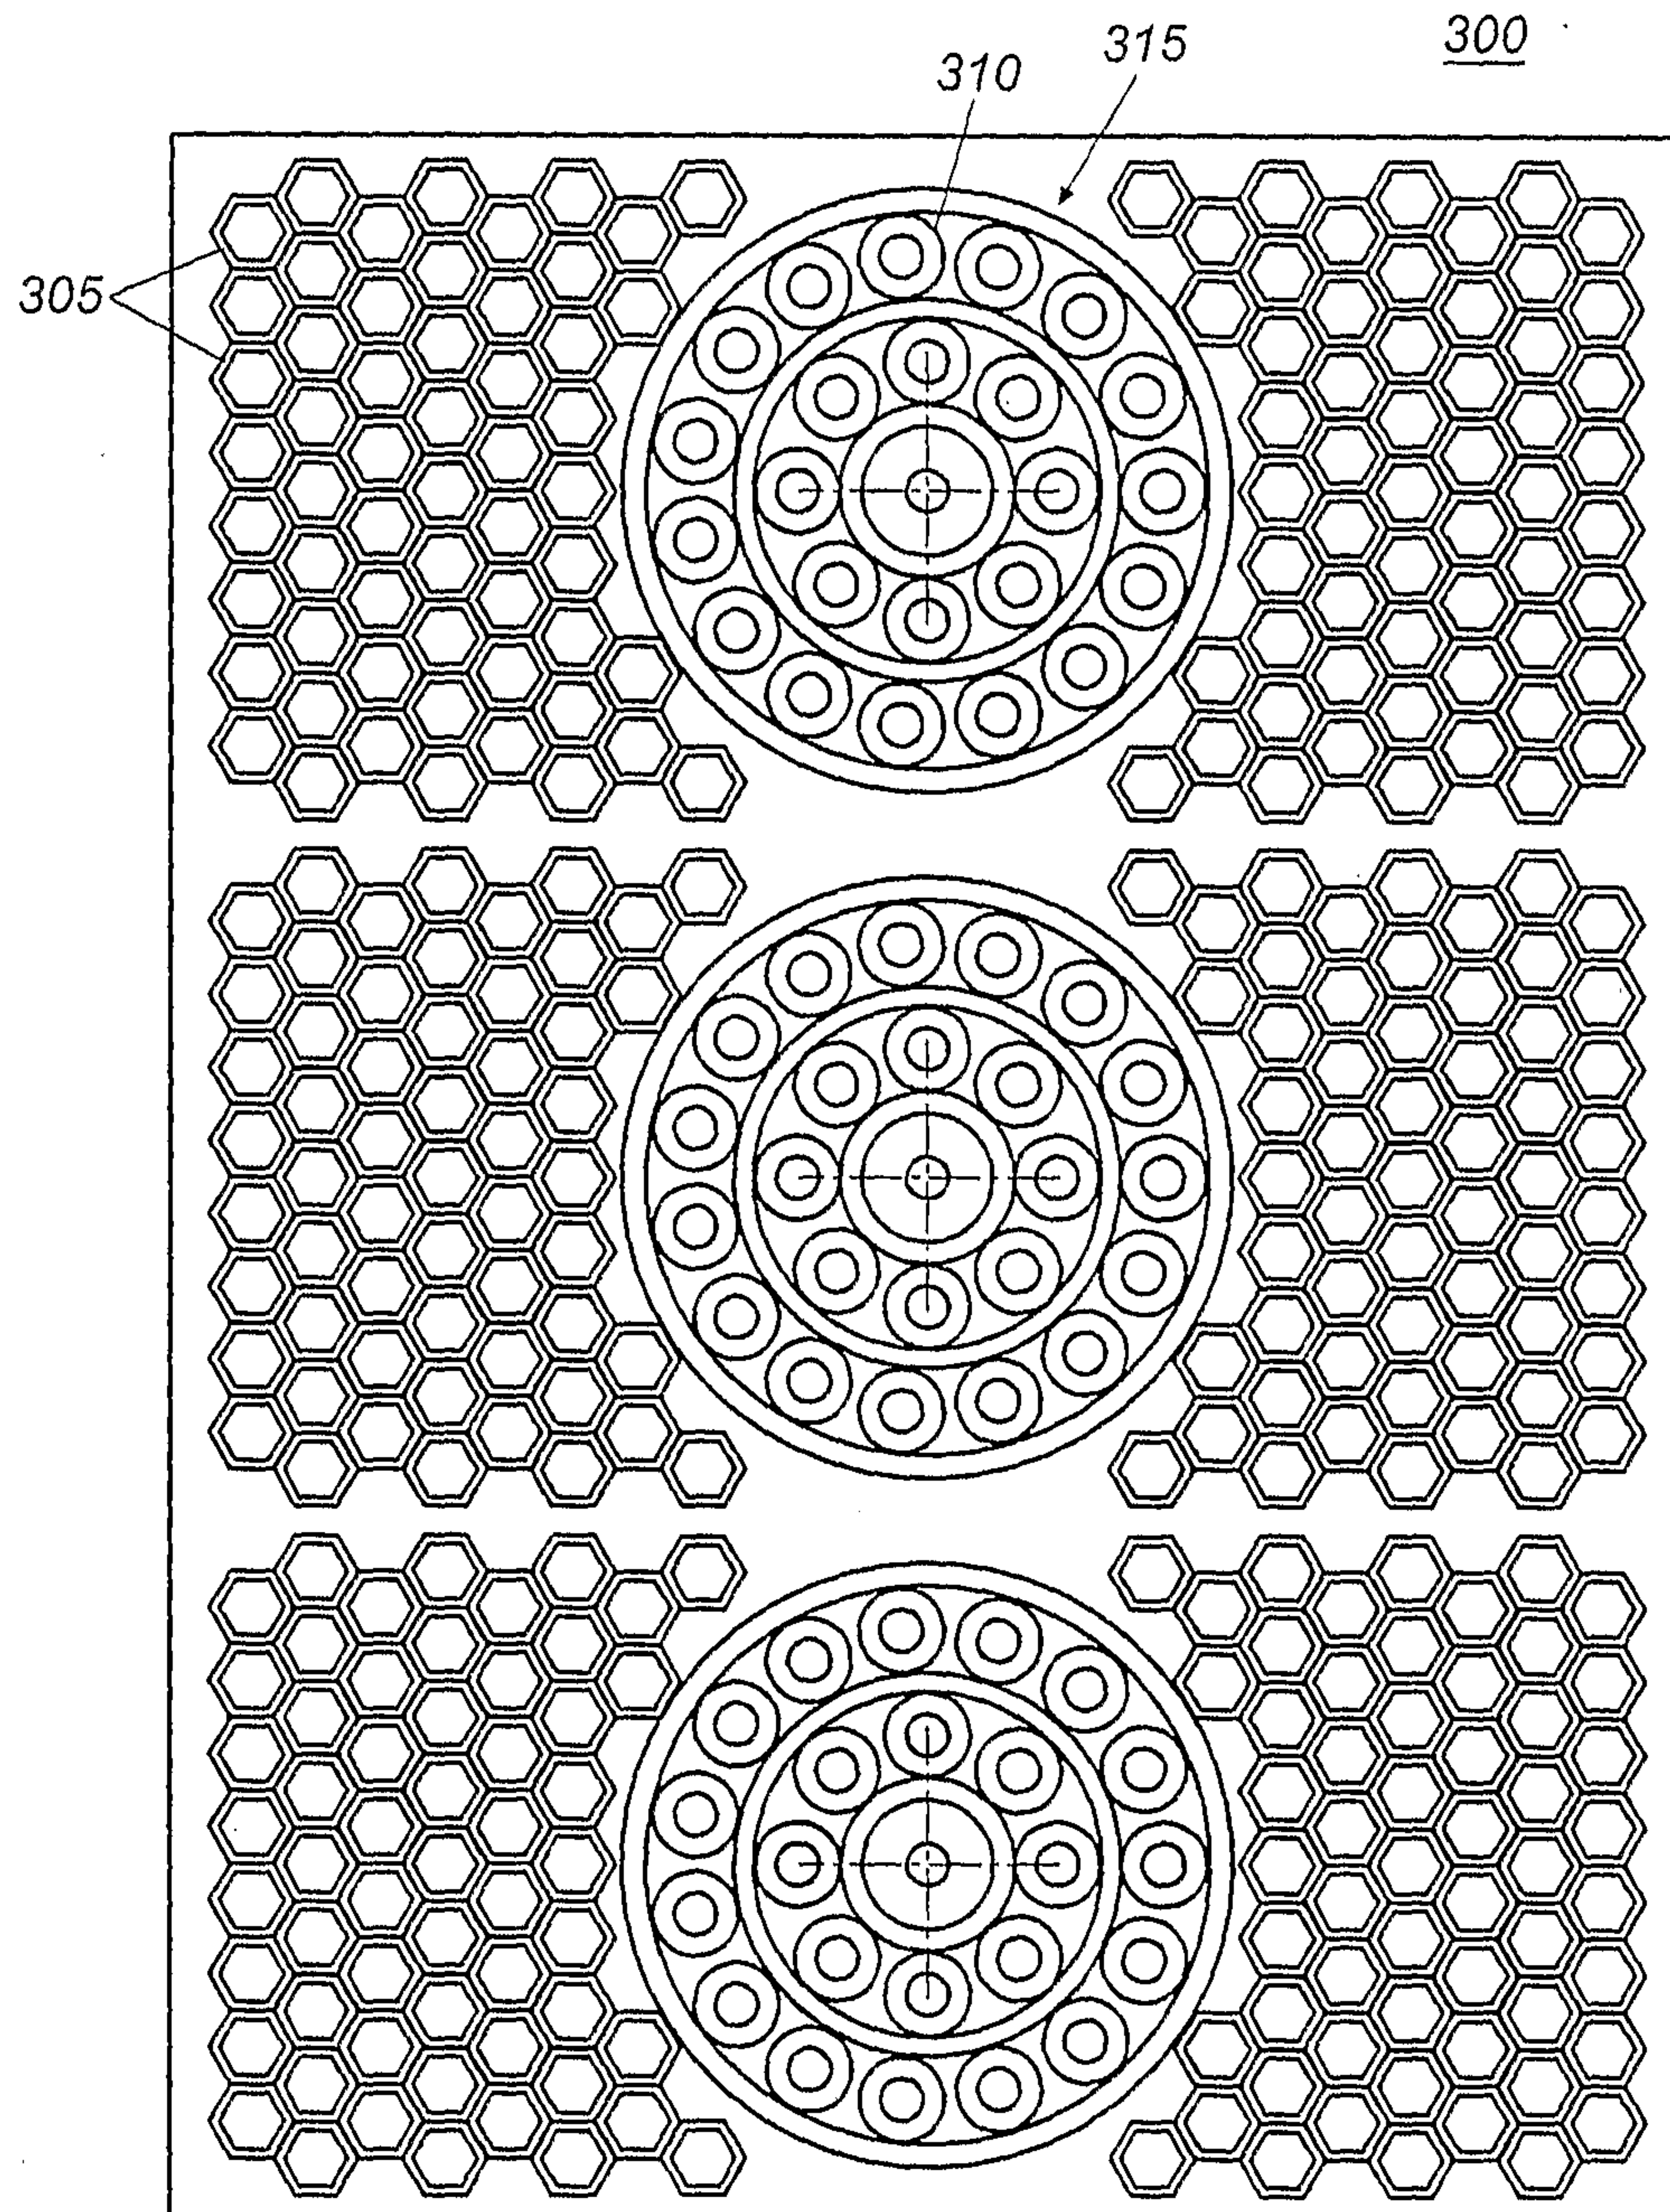
7/9

**Fig. 13****Fig. 14**

8/9

**Fig. 15****Fig. 16**

9/9

**Fig. 17**

20a

20b

20c

25a

10

