

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 January 2008 (17.01.2008)

PCT

(10) International Publication Number
WO 2008/007955 A1

(51) International Patent Classification:
G02C 7/04 (2006.01)

(21) International Application Number:
PCT/NL2007/050339

(22) International Filing Date: 10 July 2007 (10.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
06116967.8 11 July 2006 (11.07.2006) EP
11/484,361 11 July 2006 (11.07.2006) US

(71) Applicant (for all designated States except US): **PRO-CORNEA NEDERLAND B.V.** [NL/NL]; Kollergang 9, NL-6961 LZ Eerbeek (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WANDERS, Bernardus Franciscus Maria** [NL/NL]; Villa Bertha 12, NL-6986 AH Angerlo (NL).

(74) Agent: **VAN WESTENBRUGGE, Andries**; Postbus 29720, NL-2502 LS Den Haag (NL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTACT LENS

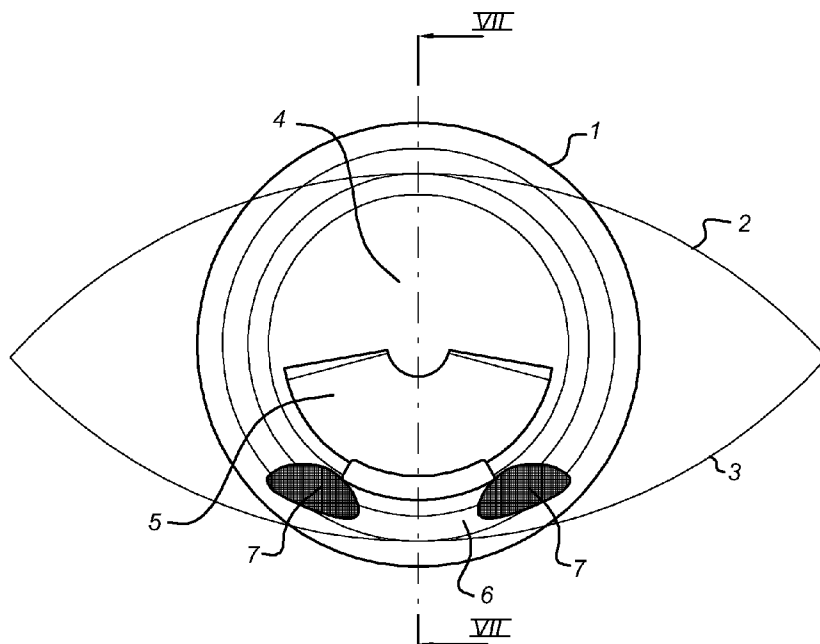

(57) Abstract: The invention relates to a contact lens comprising at least one area with an increased friction for an eyelid for providing grip to the eyelid for positioning the contact lens on an eye in use, wherein said friction area comprises micro scale undulations for providing friction between an eyelid and the contact lens.

WO 2008/007955 A1

Contact lens**5 Background**

The present invention relates to a contact lens, in particular a contact lens for which the position or the orientation on the eye is of importance.

10 In particular soft contact lenses have solved some of the problems that patients have experienced in not being able to wear rigid gas permeable (RGP) contact lenses, or in not being able to wear them for a longer period of time, because of initial discomfort.

Bifocal and multi focal soft lenses are mostly used by people reaching the 40+ age and have a need for a reading addition into their contact lenses, so called
15 presbyopic patients. Many multi focal lens designs are on the market nowadays but so far with very limited success, due to the fact that a soft lens is not moving on the eye like a RGP lens and therefore the small optic central part of the lens has to be a optical everything in one design, causing blurred vision and lost of contrast.

The most successful design for presbyopic patient is a translating bifocal
20 design. Such a design is known from patent EP0858613B1 by applicant, and is incorporated herein by reference as if fully set forth. This design is marketed as RGP and soft lens with very good results since 1996. For such a design as soft contact lens it is necessary to have a good vertical translation of the lens when the eye changes from primary (horizontal) direction of view to downward direction of view.

25 In addition, orientation stabilisation and/or translating features are incorporated into soft toric or translating bifocal contact lenses to avoid rotation onto the eye. Examples of such orientation stabilizing and/or translating features, including prism ballast which is generally a base-down prism to increase weighting effect to orient the lens and to create a ridge which should engage with the lower
30 eyelids to provide vertical translation or rotation stabilisation support, are for example mentioned in US4573775A1 (Bayshore), US4854089A1 (Morales), US5071244A1 (Ross Richard), EP0452549A1 (Woehlk), EP0858613A1

(Procornea), WO9923527A1 (Bernstein), WO0214929A1 (Novartis), WO2004011989A1 (Novartis), WO2004068214A1 (Novartis), WO2004092805A1 (Novartis), WO2004104675A2 (Novartis), WO2006013101A2 (Novartis), US2005099595A1 (Novartis) and US4324461A1 (Salvatores). All these designs
5 have in common a ridge or ramped ridge to translate the soft lens upwards when the eye changes from primary gaze to downward gaze in order to bring the correct optical part in front of the pupil.

In WO-2004/104675, a so-called soft contact lens having a special optical area for correcting presbyopia is disclosed. In order to keep this optical part correctly
10 oriented, this contact lens has a ramped ridge at its lower (during wearing) part. This ramped ridge is designed to have the lower lid of the eye keep the lens at its position while the eye ball goes down when for instance reading a book. In this way, the lower part of the lens with a presbyopia-corrective optical part moves in front of the pupil, allowing a wearer to read. The positioning of this contact lens, however, can
15 be improved.

One problem not solved by any of the above cited documents is the fact that elderly people very often have weak, loose eyelids. When the eye changes to downward gaze, ridged lens easily slips away under the eyelid without performing the necessary translation to be able to read with the lenses. Especially a lens where
20 the entire ramped ridge zone as mentioned in WO-2004/011989 (Novartis) are not beneficial since the entire ramped ridge is continuous in the first derivative and or in the second derivative giving the ridge of the lens a good change to slip under the lower eyelid.

In EP0589959, specific wave patterns are described to stabilize the lens in a
25 certain position to align a toric contact lens. These patterns are provided on the upper part of the contact lens or inclined next to the optical zone of the contact lens. The patterns are intended to rotationally stabilize the contact lens on the eye of a wearer in a certain rotational position. In particular, in this contact lens, the upper eyelid should influence the contact lens. The specific wave pattern and its location,
30 however, are not optimal for other types of contact lenses.

WO-A1-89/07281 discloses in an embodiment a contact lens comprising at least one pattern on the front surface of the lens. The pattern enabling proper

location of the lens on the eye of a wearer by engagement between the lens, the eye and the eyelid and thereby facilitating the increased transmission of gas through the lens. The pattern is arranged so as to allow the eyelid of the wearer to follow the contours of the patterns to enable the proper orientation of the lens on the eye.

5 Again, specifically the upper eyelid moves the lens. A specific type of pattern is not disclosed.

US-6.626.534 discloses a contact lens that is of generally uniform cross-section to allow proper transmission of oxygen to the eye. It contains an inner optic region and an outer radial zone. Parallel grooves are placed in the outer radial zone
10 on the anterior surface of the lens to cause the lens to align when the eye is blinked. The grooves can form a fine grating and can be placed in a superior or inferior region of the outer radial zone, or they can be placed in a ring or other configuration in this region. These parallel grooves are typically to provide rotational orientation of the lens.

15

Summary of the invention

The invention aims to improve positioning of a contact lens on the eye, and
20 maintaining this positioning during wear.

Another object of the invention is to improve the comfort of such a contact lens.

Yet another object of the invention is to provide such a contact lens which is easy to produce.

25 Another object of the invention is to improve positioning of the contact lens for older people.

Yet another object of the invention is to provide a contact lens which is able to translate on the eye of a wearer during use via the lower eyelid.

30 According to the invention at least a part of these objectives is realized with a contact lens comprising at least one area with an increased friction for an eyelid for providing grip to the eyelid for positioning the contact lens on an eye in use, wherein

said friction area comprises micro scale undulations for providing friction between an eyelid and the contact lens.

This provides the possibility of designing a contact lens which has a position behaviour which can be designed accurately, and with a behaviour which can be
5 predicted and engineered.

In an embodiment, the contact lens according to the invention comprising a central optical zone and a radially outer zone surrounding the central optical zone and having optical properties different from the central optical zone, and a ridge radially outside said outer zone.

10 In an embodiment said friction area is provided at the location of said ridge.

In an embodiment said friction area is provided in or on said ridge.

In an embodiment said friction areas are provided at the location of said ridge and at both sides of a mirror line on said contact lens.

15 In an embodiment, the contact lens is a so called soft contact lens, also referred to as hydro gel lens.

In an embodiment the friction area or areas are provided on a side of the ridge radially away from the centre of the contact lens.

In an embodiment said contact lens has an inner surface resting on an eye during wearing and an outer surface, said friction area being provided on said outer surface.

20 In an embodiment said friction area or areas comprise a two-dimensional undulation. These undulations can for instance be two-dimensional sinusoid, in an embodiment having an amplitude of about 1-5 micron and a wavelength of about 50-200 micron. This should be enough to provided a better grip or friction for an eyelid, but avoid irritation or build-up of dirt.

25 In an embodiment said contact lens has prismatic optics.

The invention further relates to a contact lens comprising a central optical zone and a radially outer zone surrounding the central optical zone, and a ramped ridge in the radially outer zone, wherein said ridge comprises at least one interruption for allowing tear moisture to flow away.

30 In an embodiment, one of said at least one interruption is provided substantially at the middle of said ridge.

The invention further relates to a contact lens comprising a central optical zone and a radially outer zone surrounding the central optical zone, and at least two elevations in the outer zone at both sides of a mirror line of said contact lens.

Various aspects of this invention described in this document may also be the
5 subject of divisional applications.

The various aspects discussed in this patent can be combined in order to provide additional advantageous advantages.

Description of the drawings

10

The invention will be further elucidated referring to embodiments shown in the drawing wherein shown in:

- Fig. 1 a first embodiment of a contact lens of the invention in an eye;
- fig. 2 a SEM picture of a machined friction area;
- 15 fig. 3 an example of a sinusoid surface;
- fig. 4 a further embodiment of a contact lens of the invention in an eye;
- fig. 5 a further embodiment of a contact lens of the invention in an eye;
- fig. 6 another embodiment of a contact lens of the invention in an eye;
- fig. 7 a cross section of a contact lens of figure 1;
- 20 fig. 8 an enlarged detail of figure 4;
- fig. 9 a cross section of fig. 4;
- fig. 10 a contact lens of the invention in side view and partial cross section;
- fig. 11 another contact lens of the invention in side view and partial cross section;
- 25 fig. 12 a detail of an embodiment of figure 11;
- fig. 13 a detail of another embodiment of figure 11;
- fig. 14 a detail of another embodiment of figure 11;

30

Detailed description of embodiments

In this description of embodiments, similar reference numbers are used to indicate similar features throughout the embodiments.

Figure 1 shows a first embodiment of a contact lens 1 on an eye with upper eyelid 2 and lower eyelid 3. Contact lens 1 has an optical zone with a central optical zone 4 and a presbyopia correcting further optical zone 5 radially outside the central optical zone.

5 Around the further optical zone 5, contact lens 1 has a ramped ridge 6 which has several friction areas 7 on the ridge below the further optical zone 5.

Figure 2 shows an example of a friction area according to the invention, in which a SEM picture is shown of a friction area which has a sinusoid surface with an amplitude of at least 2.5 μm and a wavelength of about 70 μm in both the x- and
10 y-directions. The sinusoids in this embodiment have sub- μm form accuracy with a surface finish on the order of 100 nm. These types of sinusoidal surfaces can be machined using a single point diamond tool with a commercial fast tool servo on a diamond turning machine. For example Machining could be performed with a
15 Precitech Nanoform 200 or Contamac DiaTop diamond turning machine. In these types of machines, the work piece is mounted on the spindle of the machine tool and rotates clockwise. A Fast Tool Servo system is mounted on the tool slide and is oriented so that its stroke is parallel to the z-axis, perpendicular to the face of the work piece. A single point diamond cutting tool is mounted in the fast tool servo,
20 and the height of the cutting edge is carefully set so that it cuts to the center of the work piece. To machine the surface of the work piece, the machine spindle (the C-axis) rotates the work piece clockwise, and the motion of the x-axis moves the diamond tool relative to the work piece such that the tool travels from right to left relative to the work piece, from the outer edge toward the center of rotation. The stroke of the fast tool servo is slaved to the C-axis and the x-axis, both of which
25 contain high resolution encoders that constantly read the angular orientation of the machine spindle, θ , and the distance of the diamond tool tip from the axis of rotation of the machine spindle, r . In other words, the fast tool servo is programmed so that its stroke is a function of the encoder readings, θ and r . and the tool path is three
30 Dimensional (3D) corrected.

30 A desired form of the surface machined by the fast tool servo is given by Eq. (1), where the amplitude, A , is 2.5 μm , and the wavelength, λ , is 70 μm . In Eq. (1), x and y lie in the work piece coordinate system. r and θ lie in the machine tool

coordinate system, where r corresponds to the x-axis of the machine tool and θ corresponds to the C-axis of the machine tool

$$(1) \quad z = A \sin\left(\frac{2\pi r}{\lambda}\right) \sin\left(\frac{2\pi \theta}{\lambda}\right) = A \sin\left(\frac{2\pi r \cos\theta}{\lambda}\right) \sin\left(\frac{2\pi r \sin\theta}{\lambda}\right)$$

5

To produce a desired form of the machined work piece surface, the fast tool servo preferably is programmed to account for the finite nose radius of the cutting tool.

10 Characteristics of a slip off resistance surface structure according to the invention are:

- Knurled but not rough in a sense that the structured surface could irritate the sensitive membrane at the inside of the eyelid.
- Height and width of the structure is variable to give maximum slip off resistance
- 15 • Structure could be raised or recessed
- Size and place could be anywhere on the lens, outside the optical zone.
- The size width and structure of the knurled surface could be varied for different locations. For instance at the bottom part less resistance and at a higher part (direction top of the lens) more resistance to have a controlled movement or
- 20 stabilisation.
- The structure could be in the shape of a so called Lotus texture. So it has a self cleaning micro texture to reduce deposits on the structured area.
- Structure could be manufactured either on the lens or on a optical mould insert used for cast moulding or spin casting.
- 25 • Structure could be manufactured by means of:
 - Single point diamond turning
 - Laser ablation
 - EDM (Electric Discharge Machining)
 - Micro sandblasting
- 30 • Lens could be manufactured by means of:
 - Single point diamond cutting

- Cast moulding or spin casting

The surface structure is not limited to a sinoid surface but could be of any type suitable to increase the slip-off resistance needed to help the lens translating or rotation stabilisation during the eye movement when the eye changes to downward gaze.

Characteristic of a bifocal lens with stabilisation according to the invention, additional to what already has been disclosed in EP0858613A1 (Procornea):

- Distance part continuous in the lower part circular between 1 and 2.2 mm below centre.
- At the lower part of the peripheral stabilisation a recess with a depth near to the level off the distance part to avoid the build up off a tear meniscus who could disturb the vision quality.
- The lens could be a toric lens, toric multifocal, toric bifocal.

15

Fig. 4 shows a further embodiment of a contact lens 1 on an eye with upper eyelid 2 and lower eyelid 3. Contact lens 1 has an optical zone with a central optical zone 4 and a presbyopia correcting further optical zone 5 radially outside the central optical zone.

20

At the lower portion, outside the further optical zone 5 in the outer radial area, contact lens 1 has a ramped ridge 6 which has several friction areas 7 on the ridge below the further optical zone 5.

This contact lens is further provided with two additional elevated areas 8 that preferably are dome-shaped and smoothly extend from the surface of the contact lens 1. These areas are situated on the upper half of the contact lens 1.

25

Fig. 5 shows another embodiment of a contact lens 1 according to the invention. This contact lens 1 has two ridges 9, 9' at both sides of a mirror line through contact lens 1. These two ridges extend concentrically over a least part of the circumference of the contact lens, outside the optical zone. At the lower part where the ridges start, friction areas 10, 10' are provided. The space between the two ridges 9 allows eye fluid to leave the lens and not build up in the optical areas 4, 5. In cross section, the ridges 9, 9' preferably have a smooth, continuous slope.

30

Figure 6 shows another embodiment of a contact lens 1 with a fully circumferential ridge 11. On this ridge, several friction areas 12 are provided.

Figure 7 shown a cross section through the lens of figure 6. The contact lens 1 has a concave inner surface 13 which during wearing floats on an the eye, and an outer surface 14. In this cross section the ridge 6 is indicated. In this embodiment the contact lens is not prismatic: at the optical area side of the ridge, the ridge slopes downward and the contact lens has its normal thickness. In a prismatic lens, the thickness of the contact lens would from the top of the ridge would decrease slowly until the current thickness would be reached at the other side (where numeral 1 is placed) of the lens.

In this figure 7, it is furthermore indicates that the height of the ridge is maximal at the lower side of the contact lens, and slowly decreases to about zero of the upper side (where numeral 1 is placed).

In figure 8 a detail of the ridge-part of figure 7 is shown. This ridge 6 has a smooth, continuous contour and smoothly extends from the general outer surface 14 of the contact lens 1. Clearly shown is the friction area 7 in cross section, showing the wavelets which were here made in the surface of the ridge, at a location which is radially away from the optical zone. With a so called soft contact lens which has a diameter larger then the iris of an eye, the ridge is not situated at the edge of the contact lens, but more radially towards the centre of the contact lens, as is shown in this fig. 8. Furthermore, this figure shows that the amplitude of the micro undulations is very small, in the range of about 1-5 micron, and preferably 2-3 micron. Its wavelength is about 40-200 micron, preferably 60-80 micron. The slope preferably is continuous in order to prevent dirt to build up and to avoid irritation of the eye.

Figure 9 shows a cross section of a contact lens 1 generally according to the contact lens of figure 5, which has an interruption 15 in the ridge 6 centrally below the central optical zone 4.

Figure 10 shows a contact lens according to the invention which has a ridge 6 and friction areas 16 having a two-dimensional sinusoid profile. A picture of such a profile is shown in figure 12.

Figure 11 shows a cross section through a contact lens 1 of figure 1 with a ridge 6.

In figure 11 alternative friction areas 20 and 21 are shown. Friction area 20 has a profile of substantially parallel waves which run perpendicular to the radial
5 direction, substantially in circumferential direction.

Friction area 21 has a profile which is at an angle with respect to the radial direction and the circumferential direction. This placement allows the eyelid to properly position the lens both in radial position and in height on the eye.

Figures 12-14 show various embodiments of a wave pattern according to the
10 invention and used in figure 10. In these figures, the waves are substantially parallel waves. These waves are in figure 9 below the general surface and in a fully sinusoid pattern. In figure 10 the waves are below the general surface of the contact lens, and between each wave 23 there is a flat region. In figure 11 the waves 24 extend above the general surface 14 of the contact lens 1.

15 It will also be obvious after the above that further embodiments are within the scope of protection of the appended claims being obvious combinations with prior art techniques and the disclosure of this patent.

Claims

1. Contact lens comprising at least one area with an increased friction for an eyelid for providing grip to the eyelid for positioning the contact lens on an eye in use,
5 wherein said friction area comprises micro scale undulations for providing friction between an eyelid and the contact lens.
2. Contact lens according to claim 1, comprising a central optical zone and a radially outer zone surrounding the central optical zone and having optical
10 properties different from the central optical zone, and a ridge radially outside said outer zone.
3. Contact lens according to claim 3, wherein said friction area is provided at the location of said ridge.
15
4. Contact lens according to claim 3 or 4, wherein said friction area is provided in or on said ridge.
5. Contact lens according to any one of said claims 3-4, comprising two of said
20 friction areas provided at the location of said ridge and at both sides of a mirror line on said contact lens.
6. Contact lens according to any one of the preceding claims 3-5, wherein the friction area or areas are provided on a side of the ridge radially away from the
25 centre of the contact lens.
7. Contact lens according to any one of the preceding claims, having an inner surface resting on an eye during wearing and an outer surface, said friction area being provided on said outer surface.
30
8. Contact lens according to any one of the preceding claims, wherein said friction area or areas comprise a 3D undulation, preferably a sinusoid.

9. Contact lens according to any one of the preceding claims, wherein said contact lens has prismatic optics.
- 5 10. Contact lens comprising a central optical zone and a radially outer zone surrounding the central optical zone, and a ramped ridge in the radially outer zone, wherein said ridge comprises at least one interruption for allowing tear moisture to flow away.
- 10 11. Contact lens according to claim 10, wherein one of said at least one interruption is provided substantially at the middle of said ridge.
12. Contact lens according to any one of the preceding claims, wherein said micro scale undulation have an amplitude of about 1-5 micron.
- 15 13. Contact lens according to any one of the preceding claims, wherein said micro scale undulation have an amplitude of about 2-3 micron.
14. Contact lens according to any one of the preceding claims, wherein said micro scale undulation have a wavelength of about 50-200 micron.
- 20 15. Contact lens according to any one of the preceding claims, wherein said micro scale undulation have a wavelength of about 60-80 micron.
- 25 16. Contact lens comprising a central optical zone and a radially outer zone surrounding the central optical zone, and at least two elevations in the outer zone at both sides of a mirror line of said contact lens.
- 30

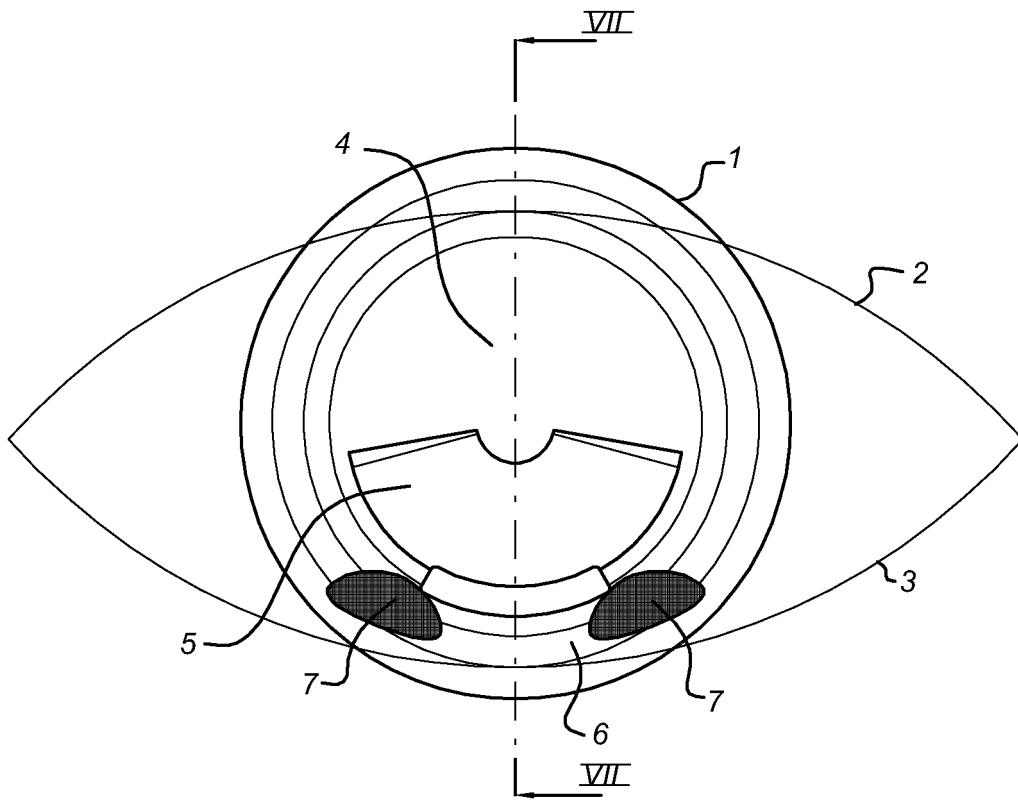


Fig 3

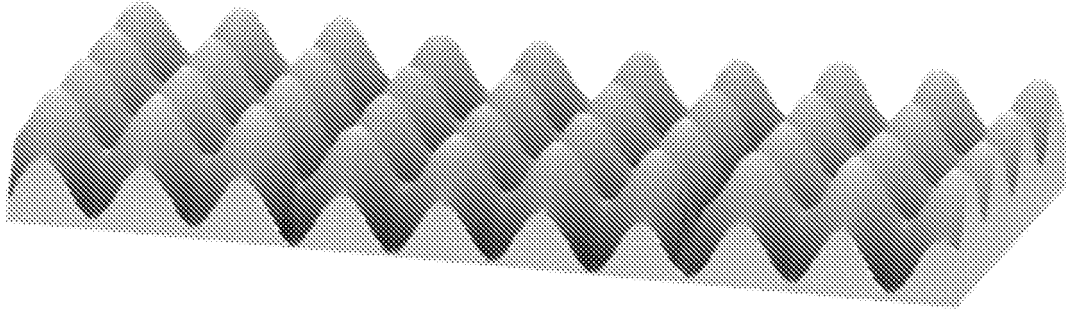


Fig 4

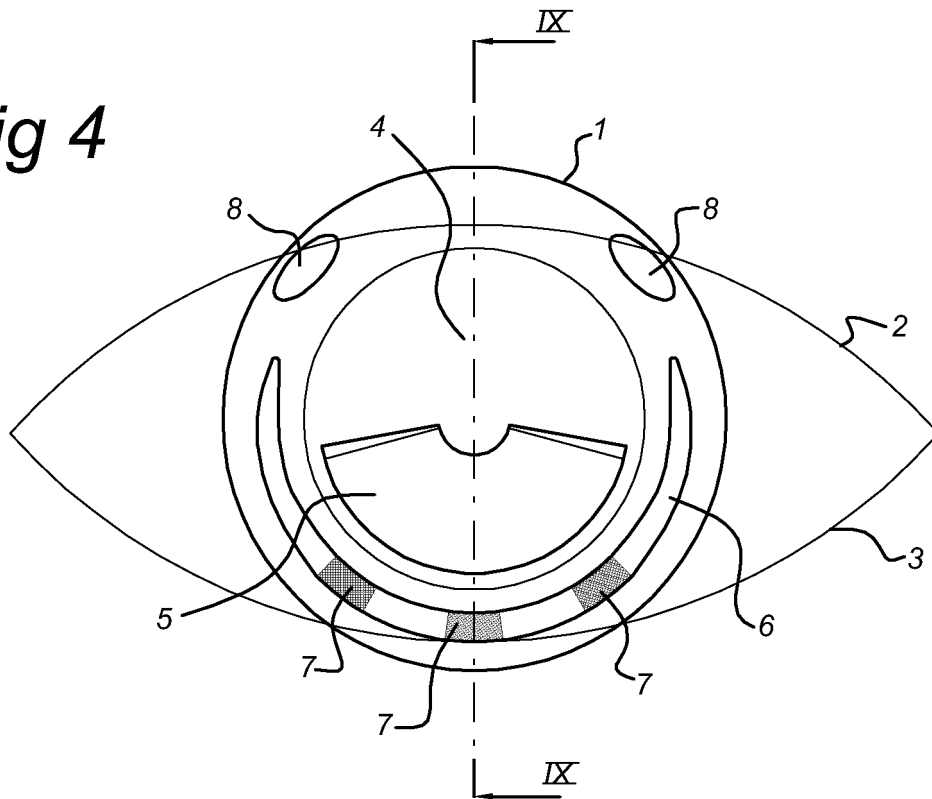


Fig 5

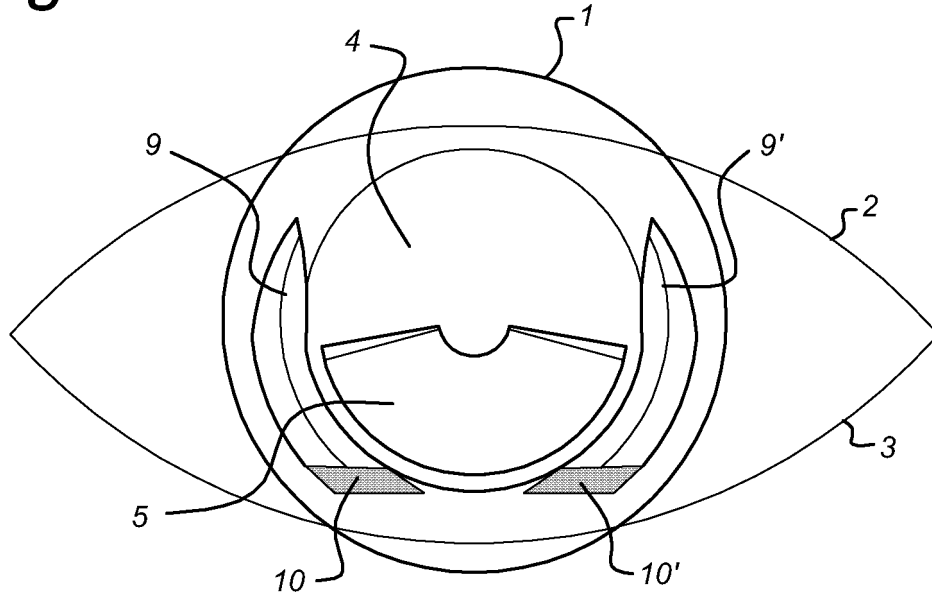


Fig 6

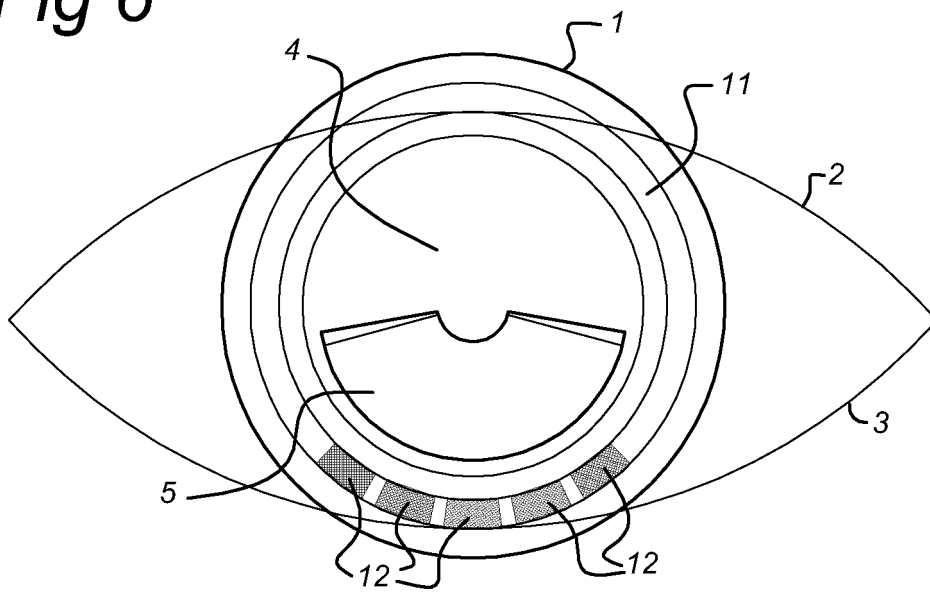


Fig 7

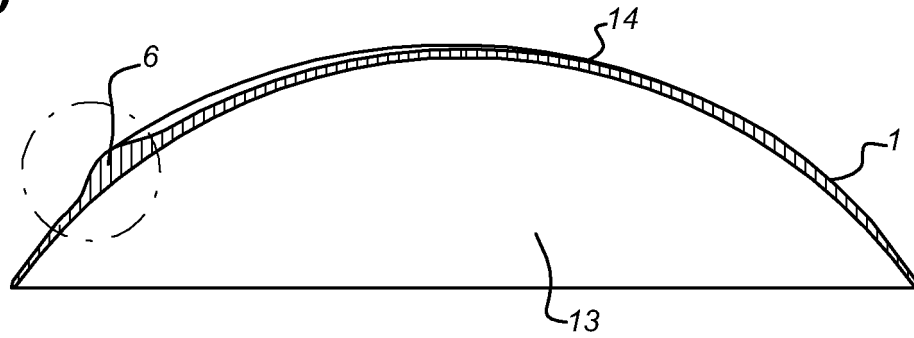


Fig 8

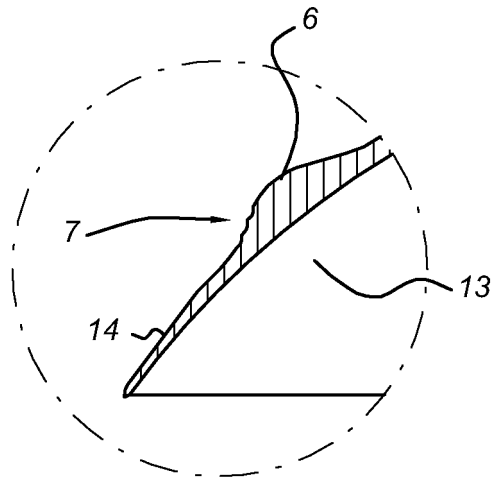


Fig 9

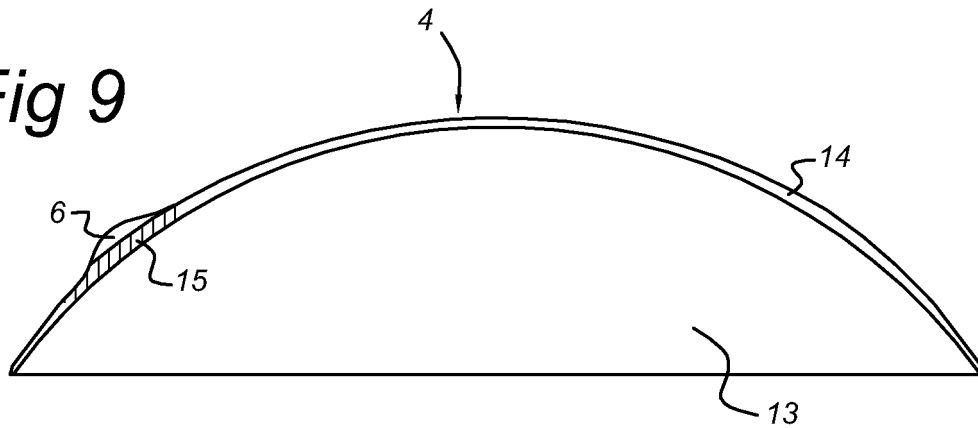


Fig 10

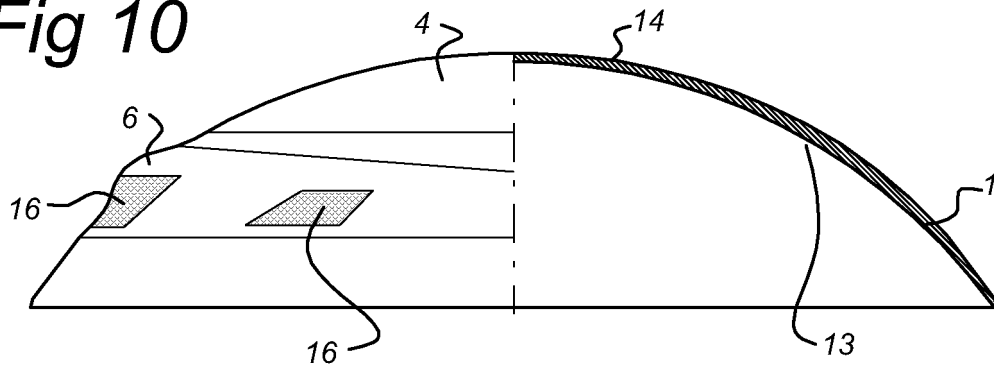


Fig 11

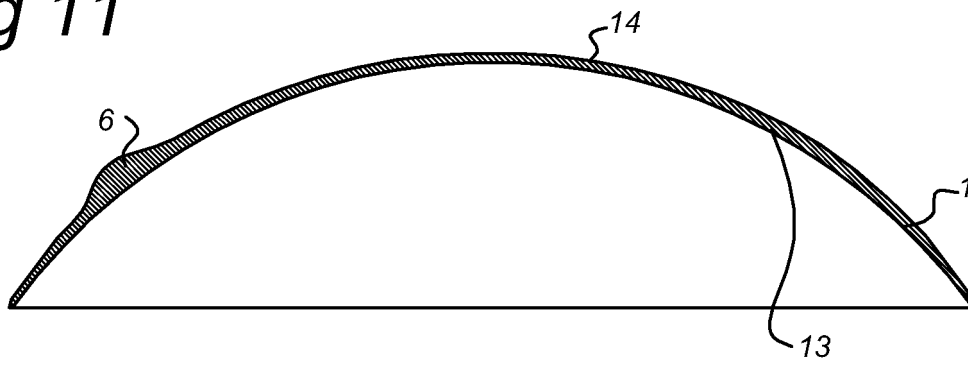


Fig 12

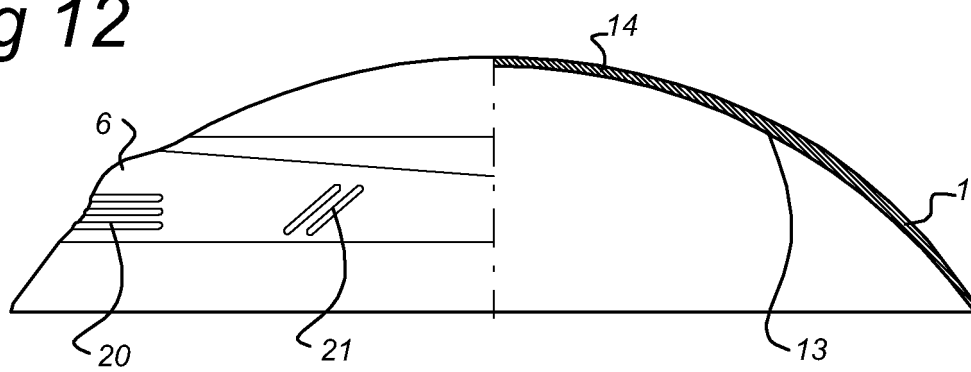


Fig 13


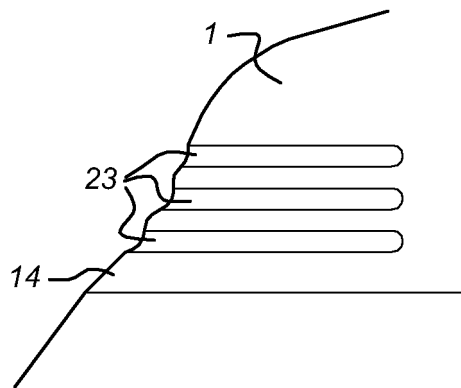


Fig 14

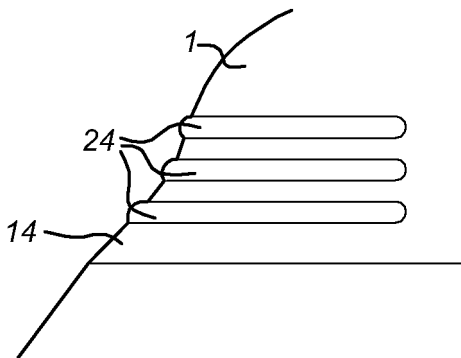

INTERNATIONAL SEARCH REPORT

International application No
PCT/NL2007/050339

A. CLASSIFICATION OF SUBJECT MATTER
INV. G02C7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 626 534 B1 (DIMARTINO ROBERT B [US]) 30 September 2003 (2003-09-30) figure 2	1-16
X	WO 89/07281 A (NEWMAN STEVE [AU]; PHILLIPS ANTHONY [AU]) 10 August 1989 (1989-08-10) figure 1	1-16
A	WO 92/22845 A (NEWMAN, STEVE) 23 December 1992 (1992-12-23) cited in the application claims	1-16
A	WO 97/16760 A (PROCORNEA HOLDING B.V; WANDERS, BERNARDUS, FRANCISCUS, MARIA) 9 May 1997 (1997-05-09) cited in the application the whole document	1-16
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

2 October 2007

Date of mailing of the international search report

17/10/2007

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Quertemont, Eric

INTERNATIONAL SEARCH REPORT

International application No
PCT/NL2007/050339

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2004/011989 A (NOVARTIS AG; NOVARTIS PHARMA GMBH; LINDACHER, JOSEPH, MICHAEL; HALL, J) 5 February 2004 (2004-02-05) cited in the application page 10, paragraph 5 - page 11, paragraph 1 -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/NL2007/050339

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6626534	B1	30-09-2003	NONE
WO 8907281	A	10-08-1989	NONE
WO 9222845	A	23-12-1992	AT 225524 T 15-10-2002 CA 2111466 A1 23-12-1992 DE 69232796 D1 07-11-2002 DE 69232796 T2 24-07-2003 DK 589959 T3 10-02-2003 EP 0589959 A1 06-04-1994 ES 2186669 T3 16-05-2003 NZ 243183 A 28-05-1996 US 5500695 A 19-03-1996
WO 9716760	A	09-05-1997	AT 182693 T 15-08-1999 AU 712352 B2 04-11-1999 AU 7343196 A 22-05-1997 BR 9611207 A 30-03-1999 DE 29680953 U1 06-11-1997 DE 69603500 D1 02-09-1999 DE 69603500 T2 18-11-1999 EP 0858613 A1 19-08-1998 ES 2135929 T3 01-11-1999 JP 11514753 T 14-12-1999 TW 433470 Y 01-05-2001 US 6092899 A 25-07-2000 US 6409339 B1 25-06-2002
WO 2004011989	A	05-02-2004	AU 2003263184 A1 16-02-2004 CA 2491460 A1 05-02-2004 EP 1527367 A1 04-05-2005 JP 2005534064 T 10-11-2005