

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 January 2009 (15.01.2009)

PCT

(10) International Publication Number
WO 2009/009733 A1

(51) International Patent Classification:
F03B 13/10 (2006.01)

(21) International Application Number:

PCT/US2008/069788

(22) International Filing Date: 11 July 2008 (11.07.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/959,184

11 July 2007 (11.07.2007)

US

(71) Applicants and

(72) Inventors: **STEELBERG, Ryan** [US/US]; 32 Blue Heron, Irvine, CA 92603 (US). **STEELBERG, Chad** [US/US]; 22 Beacon Bay, Newport Beach, CA 92660 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: A DEEP WATER POWER GENERATION SYSTEM AND APPARATUS

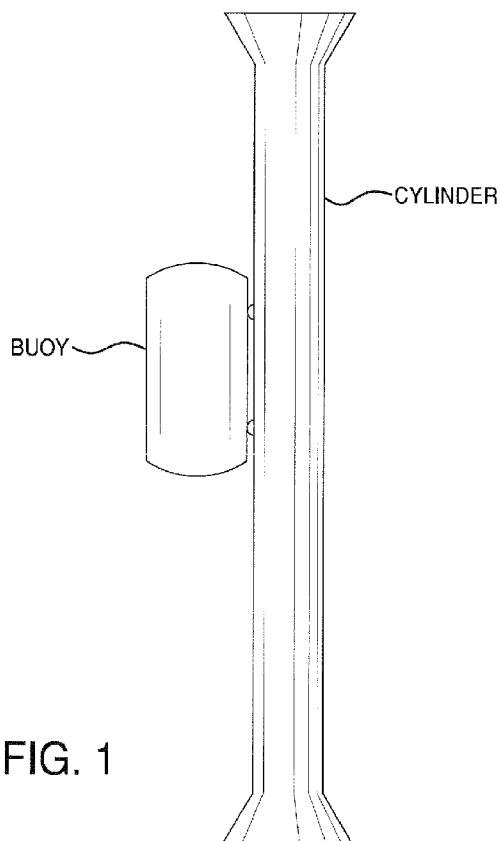


FIG. 1

(57) Abstract: A system for generation of power using an apparatus in deep water is disclosed. The system includes a ballast buoy configured to achieve a desired depth in the deep water, a substantially vertical hollow tube attached to the ballast buoy that is submerged under water when the ballast buoy achieves the desired depth in the deep water, and a converter for converting the physical environment created in the substantially vertical hollow tube by placement of the ballast buoy at the desired depth in the deep water.

WO 2009/009733 A1

A DEEP WATER POWER GENERATION SYSTEM AND APPARATUS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority under 35 U.S.C. 119(e) to United States Patent Application No. 60/959,184, entitled DEEP WATER POWER GENERATION SYSTEM AND APPARATUS, with inventors Ryan Steelberg and Chad Steelberg and filed July 11, 2007.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention is directed generally to a system and apparatus for power generation and, more particularly, to a deep water power generation system and apparatus.

Description of the Background

Generating a sufficient energy supply to run the world's ever increasingly energy hungry operation has become a goal on which many modern scientists are intensely focused. One suggested methodology by which such energy supplies could be generated in an environmentally friendly manner has consisted of the generation of power using the water power of the world's oceans. Numerous types of such energy harnessing power generators for operation with the world's oceans have been suggested. Such a sustainable alternative energy source is increasingly

attractive as the cost of oil rises and the negative effects on the world's environment of traditional energy supply systems become more apparent.

Much of the focus on power generation from the world's oceans has been on "wave energy." One design takes the wave into a funnel at the point of the shore and drives air pressure past two turbines, from which energy is supplied. It has been estimated that this method may enable the turning of a 250 kilowatt generator. A second method provides for a series of layered reservoirs following a carefully calculated slope. Essentially, such reservoirs discretize the potential energy of wave input. The energy entering each reservoir is converted to kinetic energy by falling down through the reservoir system, and its energy in turn, turns a generator. It is estimated that the operation of such a system using breakwater may generate 150 kilowatts of generator capacity. Yet another method places buoys on the system of the ocean and allows the up and down power inherent in waves (as water attempts to reach the point of lowest pressure) to turn an electric generator. Such "wave power" systems have been estimated to enable the supply of ten megawatts of power occupying only four acres of ocean space. As such, the generation of a hundred megawatts of power would occupy just 40 acres of ocean space, and would supply environmentally friendly power at a rate cheaper than fossil fuels.

And yet another alternative methodology, a large buoy system employs a series of large semi-submerged buoy sections, into which the waves strike and cause bending between the sections. This bending action moves a hydraulic piston, which pushes fluid in a linear flow that produces energy. It has been estimated that such a large buoy system occupying one square kilometer could produce 30 megawatts of power.

However, none of the aforementioned programs supply adequate energy at

modern standards to enable their widespread use. Further, certain programs, such as the deep ocean pipe, might require the creation of technologies not yet available to enable their use.

BRIEF SUMMARY OF THE INVENTION

The present invention is directed generally to a system and apparatus for power generation and, more particularly, to a deep water power generation system and apparatus.

The present invention solves problems experienced with the prior art because it provides for the clean and consistent generation of power. Those and other advantages and benefits of the present invention will become apparent from the detailed description of the invention hereinbelow.

A system for generation of power using an apparatus in deep water is disclosed. The system includes a ballast buoy configured to achieve a desired depth in the deep water, a substantially vertical hollow tube attached to the ballast buoy that is submerged under water when the ballast buoy achieves the desired depth in the deep water, and a converter for converting the physical environment created in the substantially vertical hollow tube by placement of the ballast buoy at the desired depth in the deep water.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

Understanding of the present invention will be facilitated by consideration of the following detailed description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings, in which like numerals refer to like parts, and wherein:

FIG. 1 is an embodiment of the power system and apparatus;
FIG. 2 is a schematic diagram of the ballast buoy system;
FIG. 3 is an embodiment of the power system and apparatus; and
FIG. 4 is an embodiment of the power system and apparatus.

DETAILED DESCRIPTION OF THE INVENTION

It is to be understood that the figures and descriptions of the present invention have been simplified to illustrate elements that are relevant for a clear understanding of the present invention, while eliminating, for purposes of clarity, many other elements found in typical hydrologic power generation systems. Those of ordinary skill in the art will recognize that other elements are desirable and/or required in order to implement the present invention. However, because such elements are well known in the art, and because they do not facilitate a better understanding of the present invention, a discussion of such elements is not provided herein.

The present invention takes advantage of not only the natural up and down motion of water, but additionally takes advantage of deep ocean water pressure, and does so in a manner that has a lower environmental and social impact than current methods. More specifically, the present invention has no need to place funnels, slopes, buoys, or large pipes at the surface of the water, and as such constitutes an improved social and an environmental system over the prior art. Further, the present invention allows the reuse of, for example, off-shore oil rigs that are no longer in use, but allows for such re-use without significant modification to those technologies, such as those modifications which would be required by the deep ocean pipe mechanism.

More specifically, as illustrated in Figure 1, the present invention takes advantage of ballast principals to “sink” a power generating buoy to a depth sufficient to take advantage of the increased pressure at deeper ocean levels. It will be apparent to those of ordinary skill in the pertinent art that such a ballast buoy, and the turbine which is turned by the water flow, will be such that their use will be enabled in deep ocean waters, without the formation of fissures or excessive corrosion. Corrosive effects may be minimized, in part, by the depth to which the ballast buoy is sunk, at least in that excessive temperature variations of the water are minimized at deeper ocean levels, and further due to the fact that salt content is minimal or non-existent at deeper ocean levels.

Figure 2 is a schematic diagram illustrating the ballast buoy of Figure 1. As is shown, the buoy may include one or more depth sensors, and may additionally include one or more ballast compartments, wherein, as will be apparent to those skilled in the art, water may be allowed until the depth sensor assesses that the ballast buoy has reached the desired depth level. As will be apparent to those skilled in the art, the depth sensors may be physically associated with the ballast buoy and may correspondingly automatically sense and achieve the proper depth level, or the depth sensors may merely constitute, for example, one or more pressure transducers, which may relay depth readings, with a mathematical equivalent thereof, to the surface, and entities on the surface may control the entry of water into the ballast to obtain desired depth levels.

The ballast buoy, as illustrated in Figure 3, may have mounted thereunder or therealongside a vertical, hollow cylinder. The cylinder may preferably be mounted in a sufficiently rigid manner such that the intense pressure of deep ocean waters will not bend or break the cylinder. The passing of ocean water upward (i.e., from

points of higher pressure in deeper water to points of lower pressure at more shallow water) may then generate kinetic energy through any method known to those skilled in the art, such as by forcing the movement of a drive piston. Such a piston may, for example, remain at equilibrium between two pumps attached at opposed sides of the piston and respectively extending to the top and the bottom of the aforementioned cylinder. Such a pump may be a simplistic pump, such as a hose that has a reduced internal volume when the hose is stretched, and an increased internal volume when the hose is relaxed, thereby acting as a pump. Once pumped, the pressurized water may be expelled into an accumulator that feeds a turbine. The turbine may, in turn, drive a generator, and the generated electricity may be brought to the surface by a cabling known to those skilled in the art, such as standard submarine cabling.

As further illustrated in Figure 4, the power generation system and apparatus may take advantage of pressure head differences between the vertical ends of the cylinder. By way of non-limiting example only, a cylinder having a length of 30 meters may be lowered and maintained at a deep water depth of 30 meters providing a first pressure head of $7.07 \times 10^5 \text{ N/m}^2$ and a second pressure head of $4.04 \times 10^5 \text{ N/m}^2$. By way of further non-limiting example only, a cylinder having a length of 40 meters may be lowered and maintained at a deep water depth of 60 meters providing a first pressure head of $11.09 \times 10^5 \text{ N/m}^2$ and a second pressure head of $7.07 \times 10^5 \text{ N/m}^2$.

Known methodologies that employ similar pump and pressurized seawater systems operate using water that is at significantly lower pressure than deep ocean water. Consequently, the deep ocean water of the present invention, and more precisely the pressure under which such deeper ocean water is, will allow for

significant multiples of power to generated by the present invention over those power generations made available in the prior art.

Further, the present invention lends itself to a multiple buoy system, wherein a buoy at or near the surface supports the ballast buoy at a lower level thereby reducing the need for the ballast buoy to maintain a precise proper depth. Further, one or more such buoys above the ballast buoy may be present, and such buoys may be used to generate additional power, operate to hold the aforementioned cabling, or the like. Additionally, the present invention, either using a single ballast buoy or a multiple buoy system, may lend itself to the packetization of power supply.

More specifically, to overcome the inconvenience of obtaining the electrical power generated in deep ocean water, the electricity generated may be brought to the surface in stages, or "packets" wherein such packets are stored until a sufficient amount of power is accumulated to merit bringing that power to the surface. Such storage may occur, for example, using capacitors, inductors, or other storage or energy generation mechanisms. Additionally, the operation of the present invention is simplified by the non-continuous generation of the power from deep ocean water level.

An additional alternative system would harness the intense pressure resident in deep ocean waters via a pipe dropped from the surface of the ocean water down to those deep depths. The intense pressure would then drive the water up the pipe, and the water would drive a turbine on the surface based on the water flowing up the pipe.

The disclosure herein is directed to the variations and modifications of the elements and methods of the invention disclosed that will be apparent to those skilled in the art in light of the disclosure herein. Thus, it is intended that the present

invention covers the modifications and variations of this invention, provided those modifications and variations come within the scope of the appended claims and the equivalents thereof.

CLAIMS

1. A system for generation of power using an apparatus in deep water, said system comprising:
 - a ballast buoy configured to achieve a desired depth in the deep water;
 - a substantially vertical hollow tube attached to said ballast buoy that is submerged under water when said ballast buoy achieves the desired depth in the deep water; and,
 - a converter for converting the physical environment created in said substantially vertical hollow tube by placement of said ballast buoy at said desired depth in the deep water to energy.
2. The system of Claim 1, wherein placement of said ballast buoy at the desired depth in deep water occurs at a depth sufficient to make use of the increased pressure at deeper ocean levels.
3. The system of Claim 1, wherein placement of said ballast buoy at the desired depth in deep water minimizes corrosion of the system to make use of minimal temperature variations at deeper ocean levels.
4. The system of Claim 1, wherein placement of said ballast buoy at the desired depth in deep water minimizes corrosion of the system to make use of decreased salinity at deeper ocean levels.
5. The system of Claim 1, wherein said substantially vertical hollow tube is a cylinder.

6. The system of Claim 1, wherein said substantially vertical hollow tube is coupled to said ballast buoy in a rigid manner.
7. The system of Claim 1, wherein said substantially vertical hollow tube passes the deep ocean water from points of higher pressure to points of lower pressure.
8. The system of Claim 7, wherein the higher pressure occurs in deeper water.
9. The system of Claim 7, wherein the lower pressure occurs in shallower water.
10. The system of Claim 7, wherein kinetic energy is generated from the passing water.
11. The system of Claim 10, wherein said kinetic energy is generated using a piston.
12. The system of Claim 10, wherein said kinetic energy is generated using a pump.
13. The system of Claim 12, wherein said pump includes a hose that has a reduced internal volume when the hose is stretched, and an increased internal volume when the hose is relaxed, thereby acting as a pump.

14. The system of Claim 12, wherein in the water expelled from the pump expels into an accumulator that feeds a turbine.

15. The system of Claim 14, wherein the turbine drives a generator with cabling to transmit the generated electricity.

16. The system of Claim 1, wherein said ballast buoy includes at least one depth sensor.

17. The system of Claim 1, wherein said ballast buoy includes at least one temperature sensor.

18. The system of Claim 1, wherein said ballast buoy includes at least one ballast compartment.

19. The system of Claim 1, wherein said ballast buoy includes at least one ballast compartment and said ballast buoy includes at least one depth sensor, said at least one depth sensor providing feedback that allows the ballast buoy to be lowered to the desired depth using said at least one ballast compartment.

20. The system of Claim 1, wherein at least one pressure head difference is achieved across portions of said substantially vertical hollow tube.

21. The system of Claim 1, wherein at least one pressure head difference is achieved across the vertical ends of said substantially vertical hollow tube.

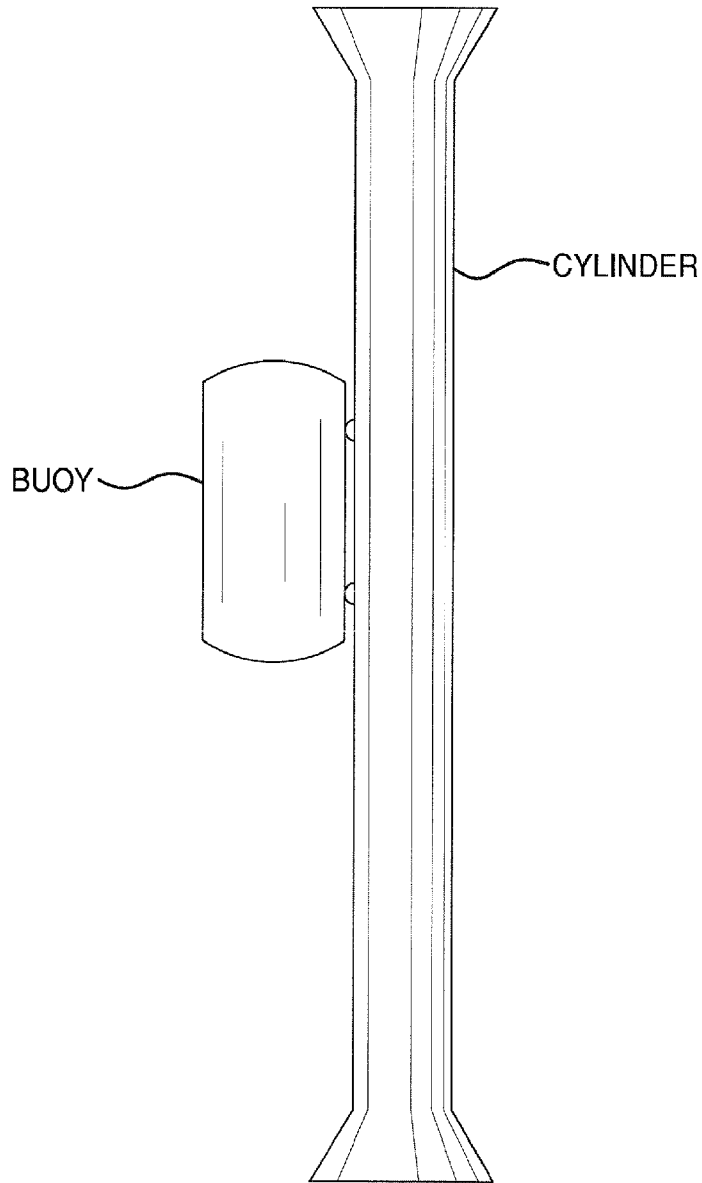


FIG. 1

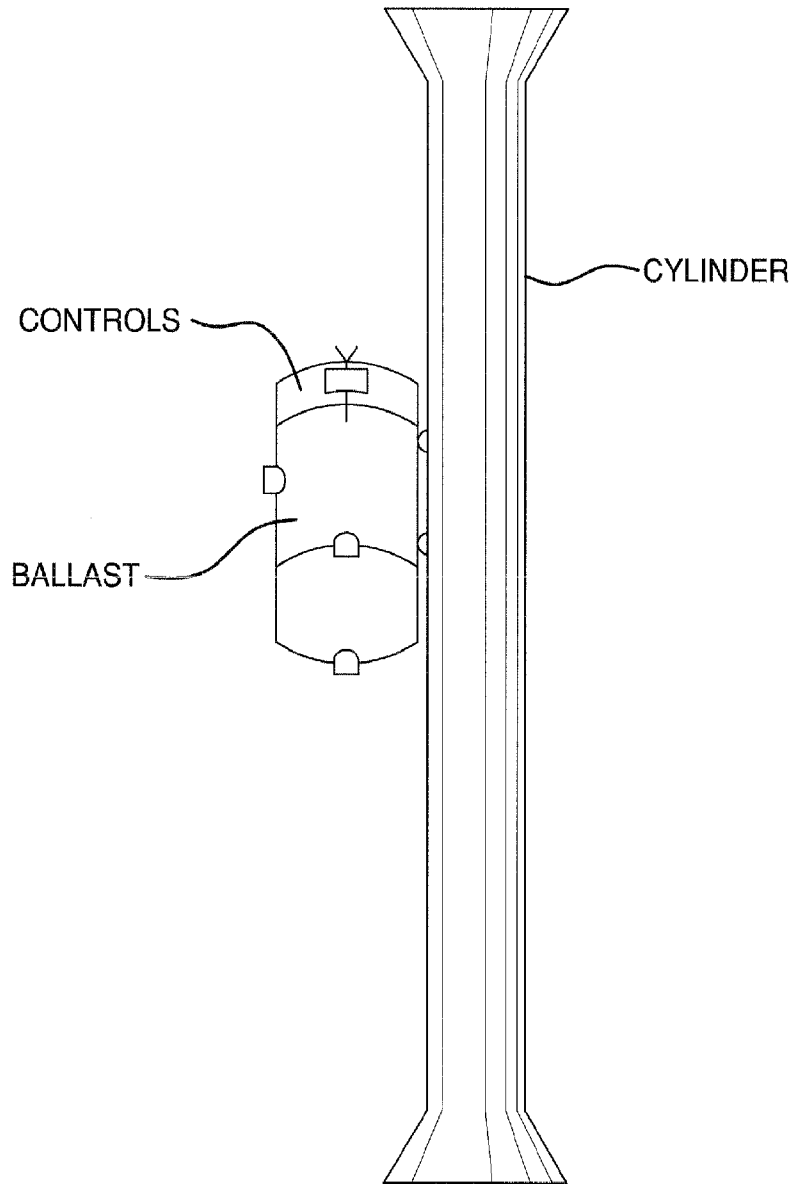


FIG. 2

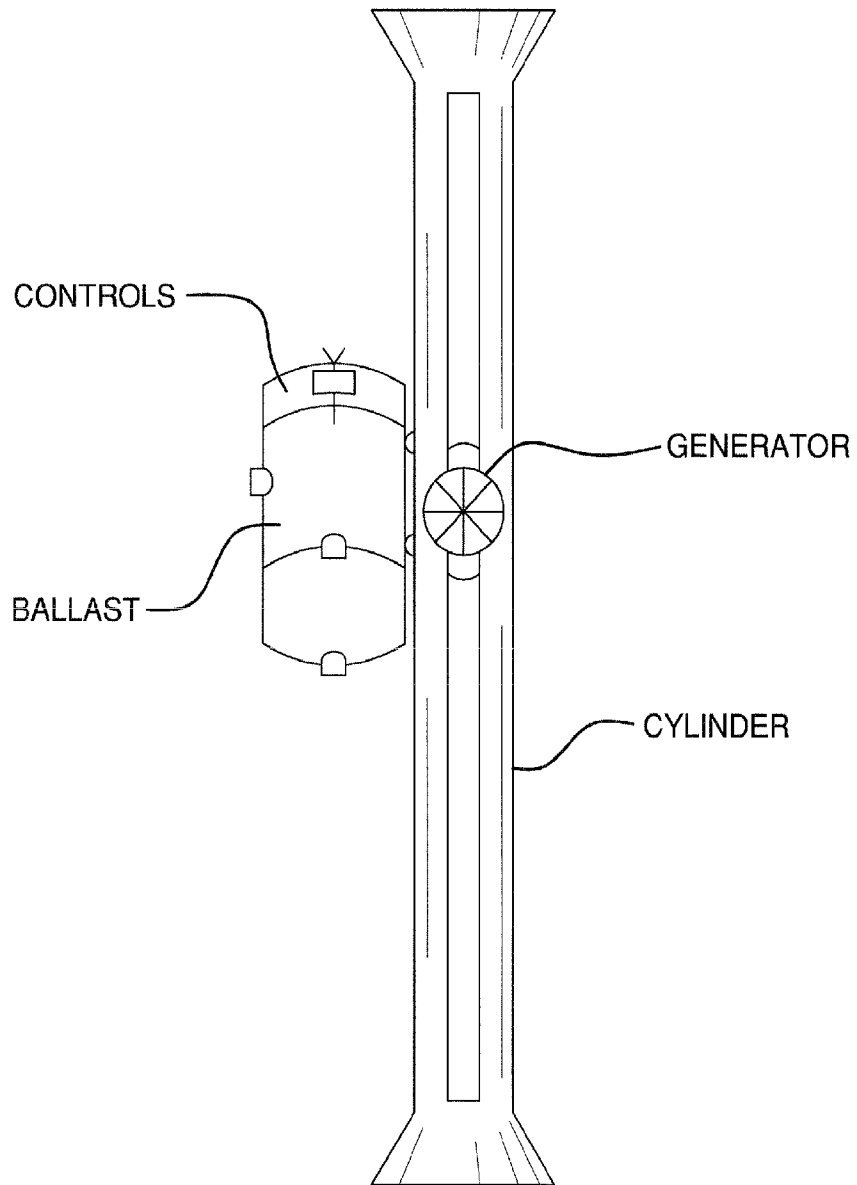


FIG. 3

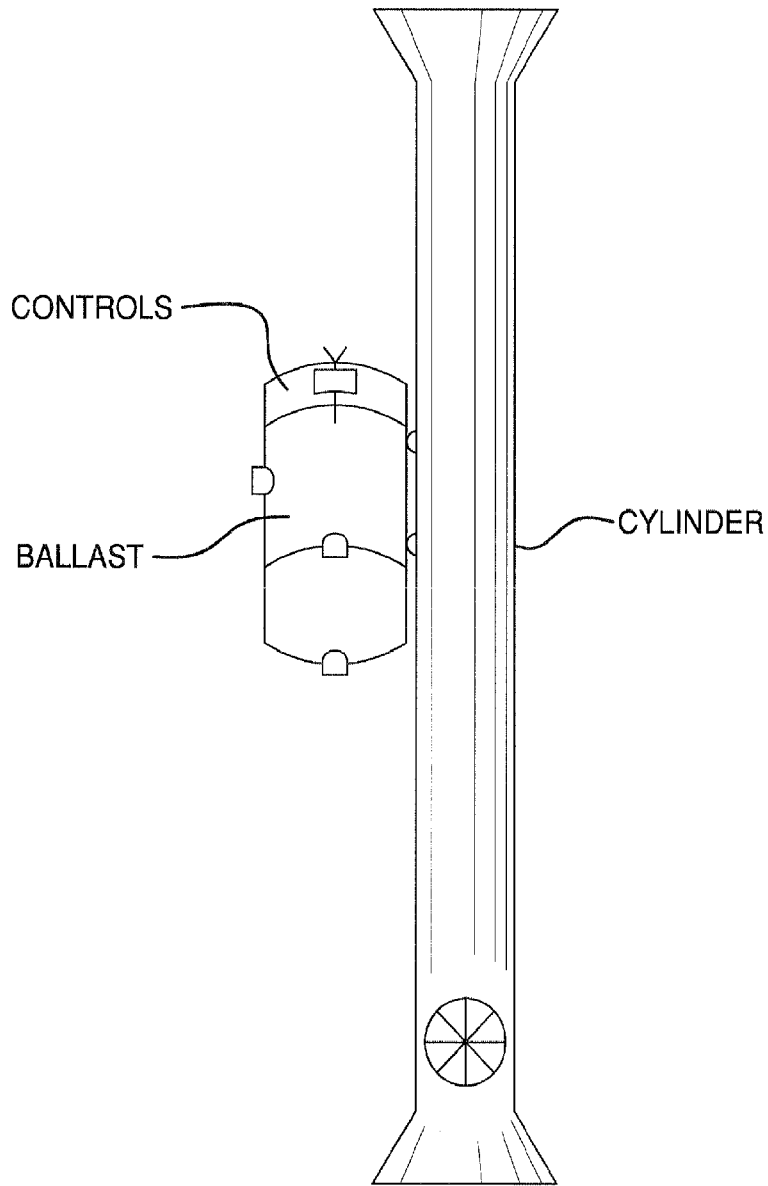


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/69788

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F03B 13/10 (2008.04)

USPC - 290/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC - 290/42

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 290/42, 43; 405/200, 205 (search terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(USPT,PGPB,EPAB,JPAB,USOCR); Google Patents; Google

Search Terms Used: ballast, buoy, "ballast buoy", power, generate, generating, pressure, temperature, sensor, converter, converting, cylindrical, tube, deeper, ocean, levels

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,321,720 A (HAVRE) 30 March 1982 (30.03.1982) entire document especially col 3, ln 53-60, col 4, ln 29-35,	1-21
Y	US 6,140,712 A (FREDRIKSSON et al.) 31 October 2000 (31.10.2000) entire document especially col 1, ln 40-49, col 2, ln 1-6, col 2, ln 10-35, col 2, ln 39-47	1-21
Y	US 5,311,064 A (KUMBATOVIC) 10 May 1994 (10.05.1994); col 6, ln 10-20	14 and 15
Y	US 6,916,219 B2 (TOKHTUEV et al.) 12 July 2005 (12.07.2005); col 4, ln 40-50, col 12, ln 43-52	16, 17 and 19

 Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 October 2008 (01.10.2008)

Date of mailing of the international search report

09 OCT 2008

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774