



(86) **Date de dépôt PCT/PCT Filing Date:** 2009/01/29
(87) **Date publication PCT/PCT Publication Date:** 2009/08/06
(45) **Date de délivrance/Issue Date:** 2016/08/02
(85) **Entrée phase nationale/National Entry:** 2010/07/28
(86) **N° demande PCT/PCT Application No.:** BR 2009/000022
(87) **N° publication PCT/PCT Publication No.:** 2009/094736
(30) **Priorités/Priorities:** 2008/01/29 (BR PI0800063-8);
2008/07/30 (BR EP 08290734.6)

(51) **Cl.Int./Int.Cl. C10B 1/04** (2006.01),
C10B 49/02 (2006.01), **C10B 53/02** (2006.01)


(72) **Inventeurs/Inventors:**
FERREIRA DE MELO, VAMBERTO, BR;
JARDIM RAAD, TULIO, BR;
MANTUANO NETTO, ROMERO, BR;
BORDET, HENRI, FR;
BORDET, REMI, FR

(73) **Propriétaire/Owner:**
V & M DO BRASIL S.A., BR

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : REACTEUR POUR LA PRODUCTION CONTINUE DE CHARBON DE BOIS**

(54) **Title: REACTOR FOR THE CONTINUOUS PRODUCTION OF CHARCOAL**

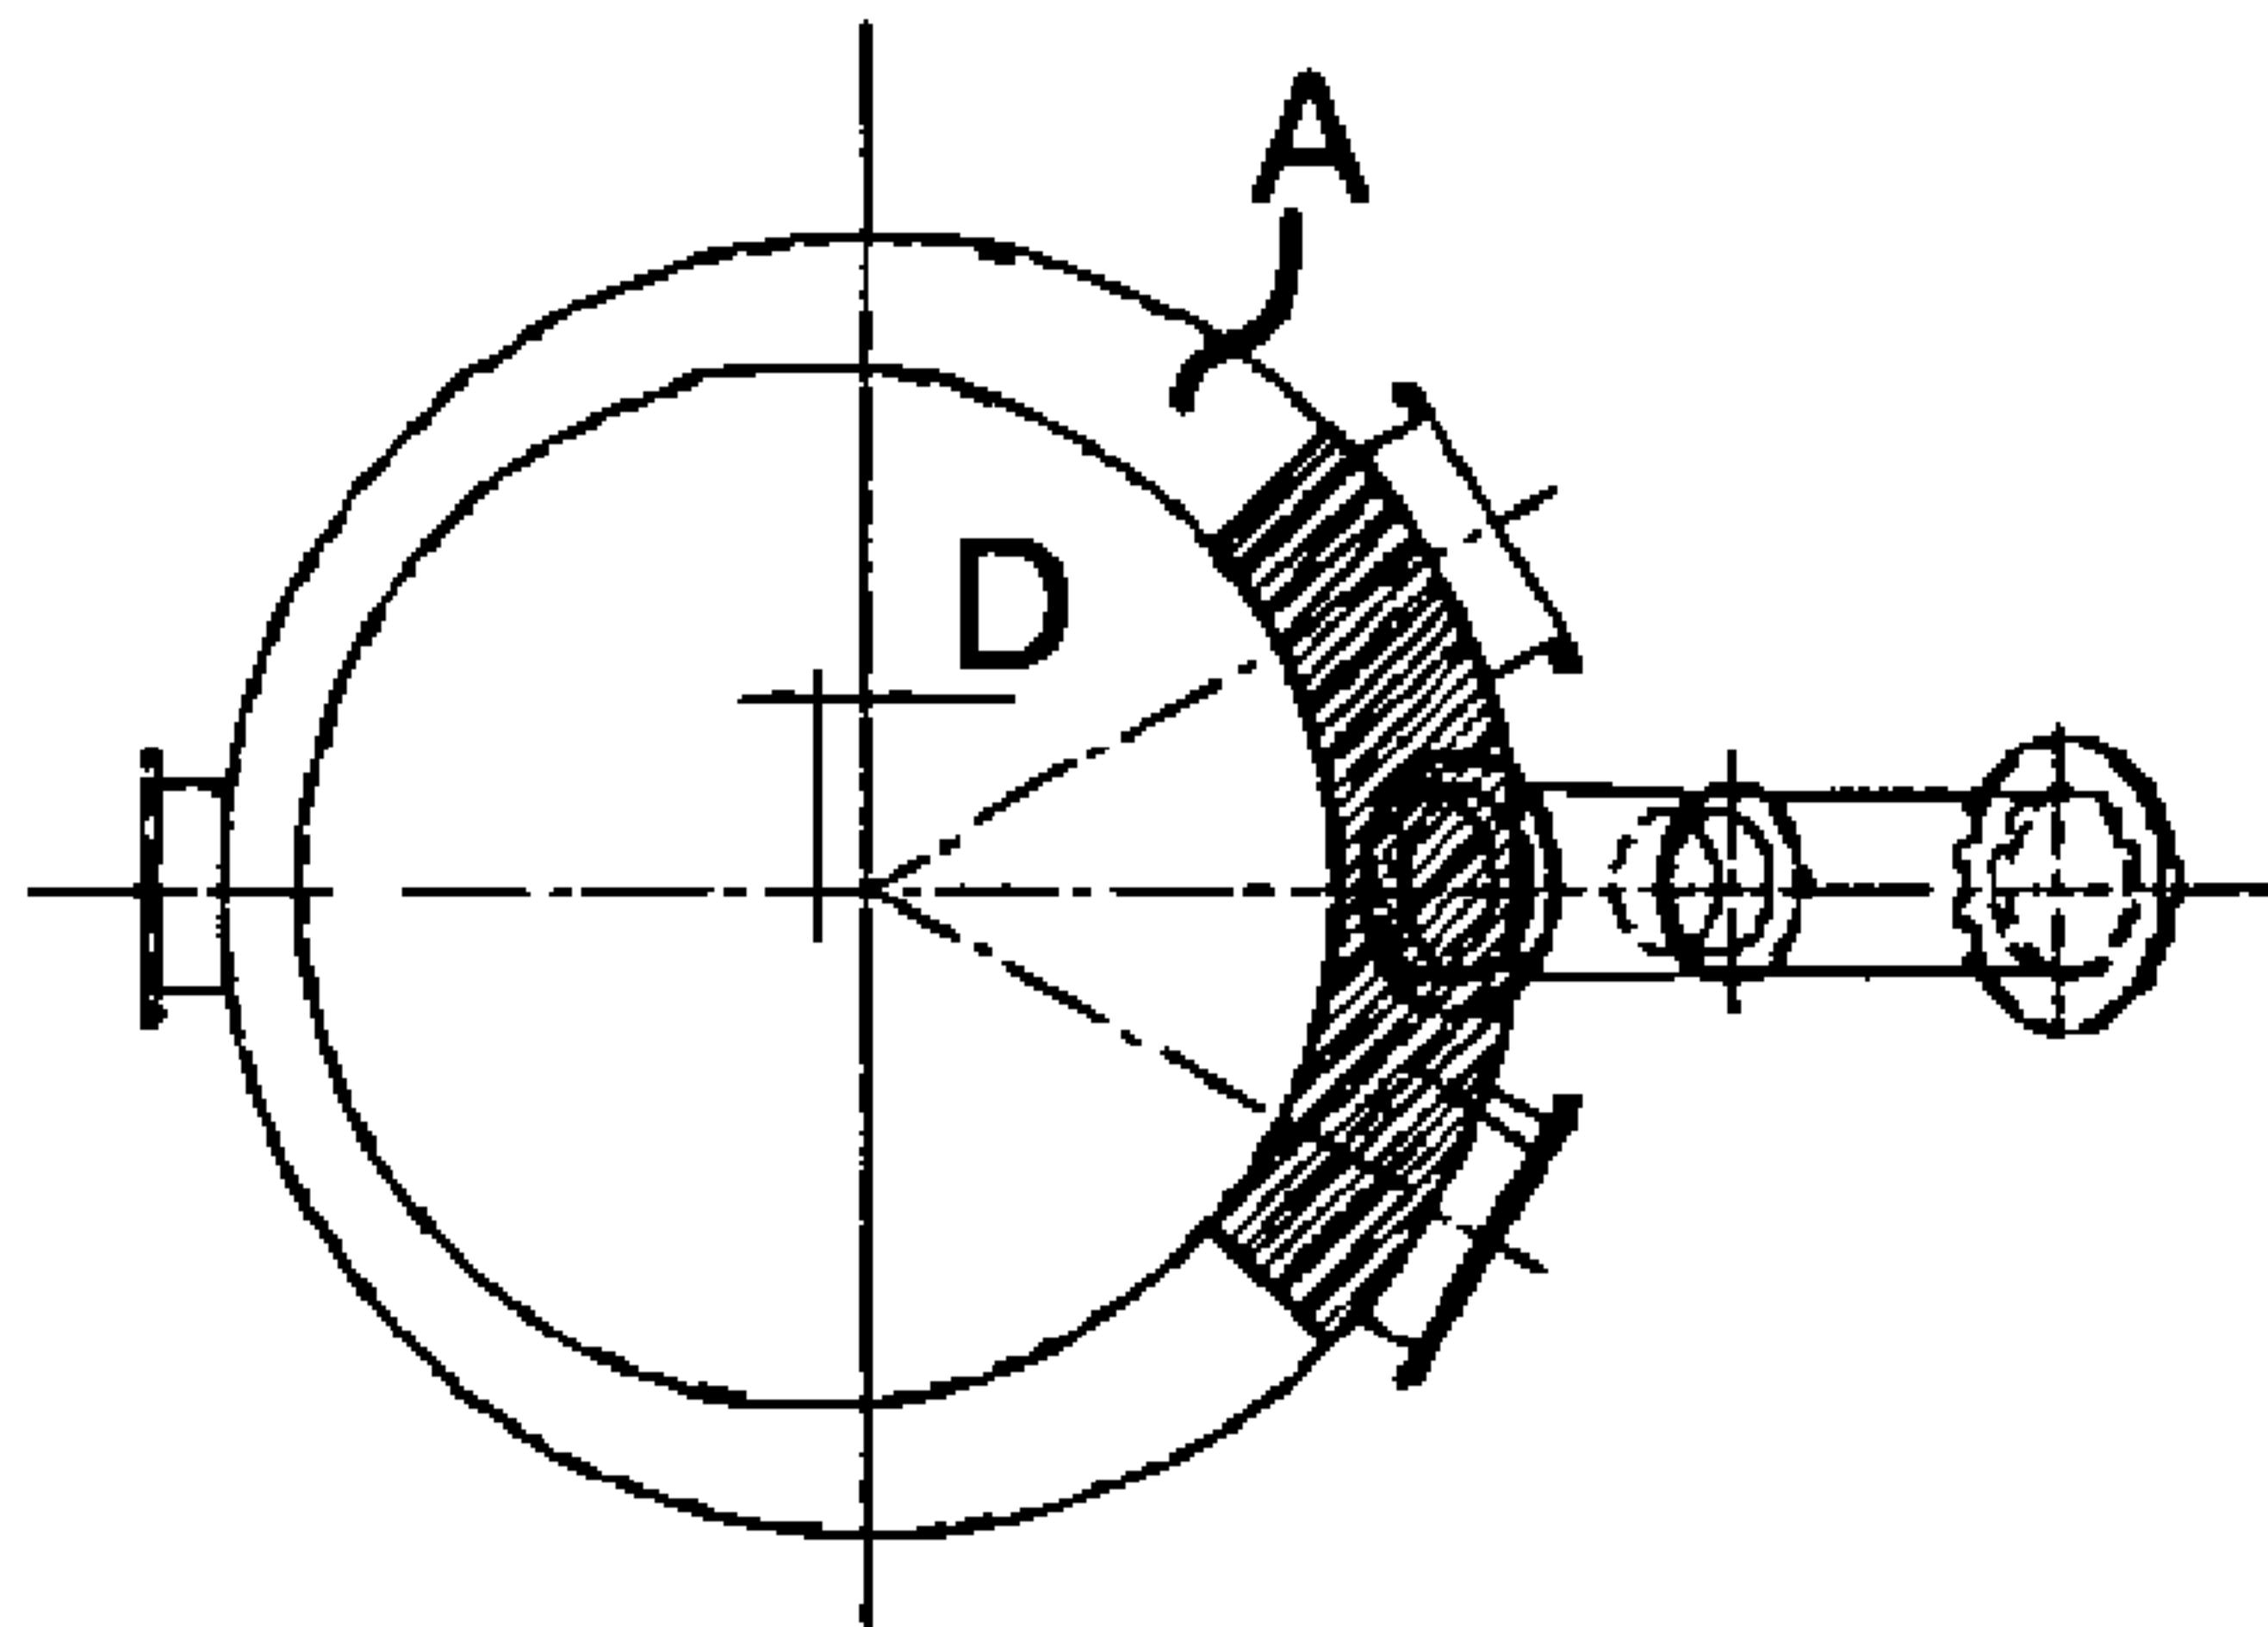

(57) **Abrégé/Abstract:**

This disclosure relates to a reactor for the continuous production of charcoal, having a substantially vertical structure, comprising, in sequence, a top charging zone, a drying zone, a carbonization zone, a cooling zone and a discharge zone, wherein the charging

(57) Abrégé(suite)/Abstract(continued):

zone has a smaller cross section than the drying zone and has an extension into the drying zone, forming an annular space around the extension, which space comprises, in the wall of the drying zone, an outlet to a gas extraction line for the recirculation of these gases into the reactor. The reactor reduces sawdust drag by the gases extracted from the preheating zone, without substantially altering the shape and the size of the reactor, which is achieved due to the fact that the charging zone is arranged eccentrically relative to the drying zone , and that the outlet to the gas extraction line of the drying zone is located substantially on the larger area section of the annular space .

ABSTRACT

This disclosure relates to a reactor for the continuous production of charcoal, having a substantially vertical structure, comprising, in sequence, a top charging zone, a drying zone, a carbonization zone, a cooling zone and a discharge zone, wherein the charging zone has a smaller cross section than the drying zone and has an extension into the drying zone, forming an annular space around the extension, which space comprises, in the wall of the drying zone, an outlet to a gas extraction line for the recirculation of these gases into the reactor. The reactor reduces sawdust drag by the gases extracted from the preheating zone, without substantially altering the shape and the size of the reactor, which is achieved due to the fact that the charging zone is arranged eccentrically relative to the drying zone, and that the outlet to the gas extraction line of the drying zone is located substantially on the larger area section of the annular space.

REACTOR FOR THE CONTINUOUS PRODUCTION OF CHARCOAL**Field of the Invention.**

The present invention relates to a reactor for the continuous production of charcoal for use in the steel and iron industry (Blast Furnaces),
5 said reactor having a substantially vertical structure and comprising, in sequence, a top charging zone, a drying zone, a carbonization zone, a cooling zone and a discharge zone, wherein the charging zone has a smaller cross section than the drying zone and has an extension into the drying zone, forming an annular space around the extension, in which space the wall of
10 the drying zone has an outlet to a gas extraction line for the recirculation of these gases into the reactor.

Prior Art

Reactors for the continuous production of charcoal are well-known, for example, from documents FR 2.416.931, US 5.584.970 and US
15 1.739.786.

FR 2.416.931 discloses a process for the continuous production of charcoal in a moving bed reactor, comprising a reduced section charging stack H, wherein the level of wood is periodically controlled to ensure that the stack is constantly charged with wood. Then a vat C with a substantially
20 larger section is provided, wherein the wood is progressively dried and then carbonized under the effect of the hot gas coming from the lower section of said vat. The pyroligneous vapors are evacuated from the vat through an extraction line and conveyed into a chamber F which connects to a lower section of the vat C, into which chamber the hot gases coming from a heat
25 exchanger E are simultaneously injected. The gas products are evacuated from a chamber D, located essentially at the same level as chamber F, and conveyed to a space connected to the heat exchanger E. Below the carbonization zone of the vat C is a compartment R for cooling the charcoal by recycling the gas extracted from said compartment through a water-cooled
30 line inside a column L and reinjecting it into the compartment.

US 5.584.970 discloses a reactor comprising a charging chamber (2), a preheating zone (3) to dry the wood, a carbonization zone (4),

an optional calcination zone (5) and a cooling zone (6). Annular chutes (28 and 38) having a conical shape are provided between the different zones, and the hot gas extracted at the outlet of the carbonization zone is circulated, mixed with (colder) exhaust gas and reinjected around the chute located
5 between the drying zone and the carbonization zone. The cooling gas that feeds the cooling zone is extracted around the lower cone and passed through a cooler. Exhaust gas containing combustible elements is extracted from the top of the preheating zone and partially transported to a combustion chamber (11), and the gas extracted from this chamber is used to preheat
10 the air in heat exchangers (16 and 17) before being discharged.

In particular in FR 2.416.931, and on a smaller scale in US 5.584.970, the charging zone has a smaller cross section than the subsequent preheating zone and partially projects into the latter, forming in this region a "double tube" structure. As also disclosed in US 1.739.786, this
15 overlapping has the function of, during the extraction of the hot gases at the top of the preheating zone, keeping the wood charge off the gas outlet, thus preventing the sawdust from being conveyed into the gas conduit, consequently avoiding clogging and the need for frequent maintenance.

Summary

20 This description relates to a reactor of the type described above, wherein the sawdust drag by the gases extracted from the preheating zone is further reduced, without substantially altering the shape and the size of the reactor.

The above is achieved, by arranging the charging zone
25 eccentrically relative to the drying zone, and the outlet to the gas extraction line of the drying zone is substantially located on the larger area section of the annular space.

The eccentricity between the charging zone and the drying zone enables a larger area to be created on the extraction side, which results in a
30 reduction of the gas flow speed and consequently in a reduction in the sawdust drag, without altering the cross sections of these two zones.

Brief Description of the Drawings

The drawings illustrate in more detail an example of an embodiment of the reactor.

Figure 1 is a simplified schematic view of the different zones of a reactor for the continuous production of charcoal, including the external equipment and the charge and discharge steps;

Figures 2A and 2B are respectively, a partial and schematic side view and a top sectional view of the double tube region formed in the transition between the charging zone and the drying zone in a prior-art reactor; and

Figures 3A and 3B are respectively, a partial and schematic side view and a top sectional view of the eccentric double tube region formed in the transition between the charging zone and the drying zone in the reactor of the present invention.

Detailed Description

As shown in figure 1, initially, the damp wood in logs is fed in and cut in a wood cutting machine 7. The wood chips are then conveyed in 21 to the dryer 8 to be dried and then charged in 22 into the reactor.

The carbonization furnace or reactor conventionally comprises the charging zone 1 at the top then, in descending order, the drying zone 2, which has a larger diameter than the charging zone 1, the carbonization zone 3, the cooling zone 4, and the discharge zone 5.

The wood descends as the charcoal is mechanically removed from the bottom through the valve openings, maintaining the continuity of the process.

During the drying in the drying zone 2 of the reactor, dampness is removed from the wood and the pyrolysis phase starts in the carbonization zone 3. The carbonization temperature of the wood chips must be between 400 and 600°C and it is a function of the desired fixed carbon content.

The temperature is reached by burning the gases sucked from the process itself and conveyed to the hot gas generator, by the continuous furnace. The temperature of the burnt gas is adjusted by dilution with cooled

gas in the heat exchanger. The wood reaches the carbonization temperature and remains at this temperature for the time necessary to attain the physical-chemical conditions of the coal.

The subsequent steps are the cooling in the cooling zone 4,
5 wherein the product reaches a temperature between 40 and 60°C, and the discharge in the discharge zone 5.

After the removal of the coal in 6, the product is sieved, weighed and stored in silos.

Figure 1 further shows the external flow of the recycling gases.
10 Part of the hot gas is extracted above the drying zone, in 23, where a portion of these gases is conveyed to a burner or Hot Gas Generator 9 (HGG), where it is burned in the presence of air at sub-stoichiometric conditions. The hot gas generated is subsequently reintroduced into the reactor to promote the carbonization of the wood. The other portion of the gases extracted in 23
15 is conveyed to a power plant 12 to generate electric power 25, and the exhaust gases from the power plant can be conveyed through 24 to the wood chip drier 8.

References 10 and 11 designate coolers.

The detail illustrated in figures 2A and 2B shows the double tube
20 region in a conventional furnace, i.e., the transition region between the charging zone 1 and the drying zone 2, wherein the cylinder that encompasses the charging zone has an extension 1' into the drying zone 2, forming an annular space around the lower end of the cylinder of the charging zone 1.

25 Figures 3A and 3B illustrate the same views as the previous figures, but showing the furnace of the present invention, wherein the double tube is eccentric relatively to the vertical axis of the furnace and the vertical geometric axes of the cylinder of the charging zone 1 and of the cylinder of the drying zone are set apart by the distance D.

30 The eccentricity measured as the distance D between the vertical geometric axis of the charging zone 1 and the vertical geometric axis of the drying zone 2 varies from 2.5 to 10.0% of the diameter of the drying

zone 2, preferably from 4.0 to 7.0%. As an example, for a reactor having a charging zone 1 with a diameter of about 2.000 mm and a drying zone 2 with a diameter of about 2500 mm, the distance D between the vertical geometric axis of the charging zone 1 and the vertical geometric axis of the drying zone 2 can be of 50 to 150 mm, preferably approximately 100 mm.

It is also possible to design the reactor with a non-circular cross section, such as ellipsoidal, "water drop" or bulge, among others. The eccentricity between the charging zone and the drying zone is determined in such cases with respect to the geometrical center of the respective cross sections.

As already mention with respect to the prior art, the hot gases that ignite inside the drying zone are extracted through line 23 (figure 3B) from the annular space A formed in the double tube region for subsequent recycling. Additionally, as already mentioned with respect to figure 1, the gas extracted through line 23 is partially directed to the HGG 9. As can be inferred from a comparison between the cross sections illustrated in figures 2B and 3B, the eccentricity promotes an increase in the cross-sectional area, reducing the gas flow speed at the extraction point and consequently also reducing the sawdust drag.

As an example, taking as a basis the hatched area in figure 2B, of 0.433 m^2 , with a gas flow speed of 2.06 m/s, a distance D of 100 mm between the axes of the charging and drying zones, as illustrated in figure 3B, results in an increase of the same area to 0.570 m^2 and in a reduction the gas flow speed to 1.57 m/s.

25

CLAIMS

1. A reactor for the continuous production of charcoal having a substantially vertical structure, comprising, in sequence, a top charging zone, a drying zone, a carbonization zone, a cooling zone and a discharge zone, wherein the charging zone has a smaller cross section than the drying zone and has an extension into the drying zone, forming an annular space around the extension, which space comprises, in the wall of the drying zone, an outlet to a gas extraction line for the recirculation of these gases into the reactor, characterized in that the charging zone is arranged eccentrically with respect to the drying zone, the outlet to the gas extraction line of the drying zone being substantially located in the larger area section of the annular space, the eccentricity measured as the distance between the vertical geometric axis of the charging zone and the vertical geometric axis of the drying zone is from 2.5 to 10.0% of the diameter of the drying zone .

2. A reactor according to claim 1, characterized by having a substantially cylindrical shape.

3. A reactor according to claim 2, characterized in that the eccentricity measured as the distance between the vertical geometric axis of the charging zone and the vertical geometric axis of the drying zone is from 4.0 to 7.0% of the diameter of the drying zone .

4. A reactor according to claim 3, characterized in that the charging zone has a diameter of about 2000 mm and the drying zone has a diameter of about 2500 mm, wherein the distance between the vertical geometric axis of the charging zone and the vertical geometric axis of the drying zone is between 50 to 150 mm.


5. A reactor according to claim 3, characterized in that the charging zone has a diameter of about 2000 mm and the drying zone has a diameter of about 2500 mm, wherein the distance between the vertical geometric axis of the charging zone and the vertical geometric axis of the drying zone is of approximately 100 mm.

6. A reactor according to claim 1, characterized by having a non-circular cross section, the eccentricity between the charging zone and

- 7 -

the drying zone being determined with respect to the geometrical center of the respective cross sections.

1/2

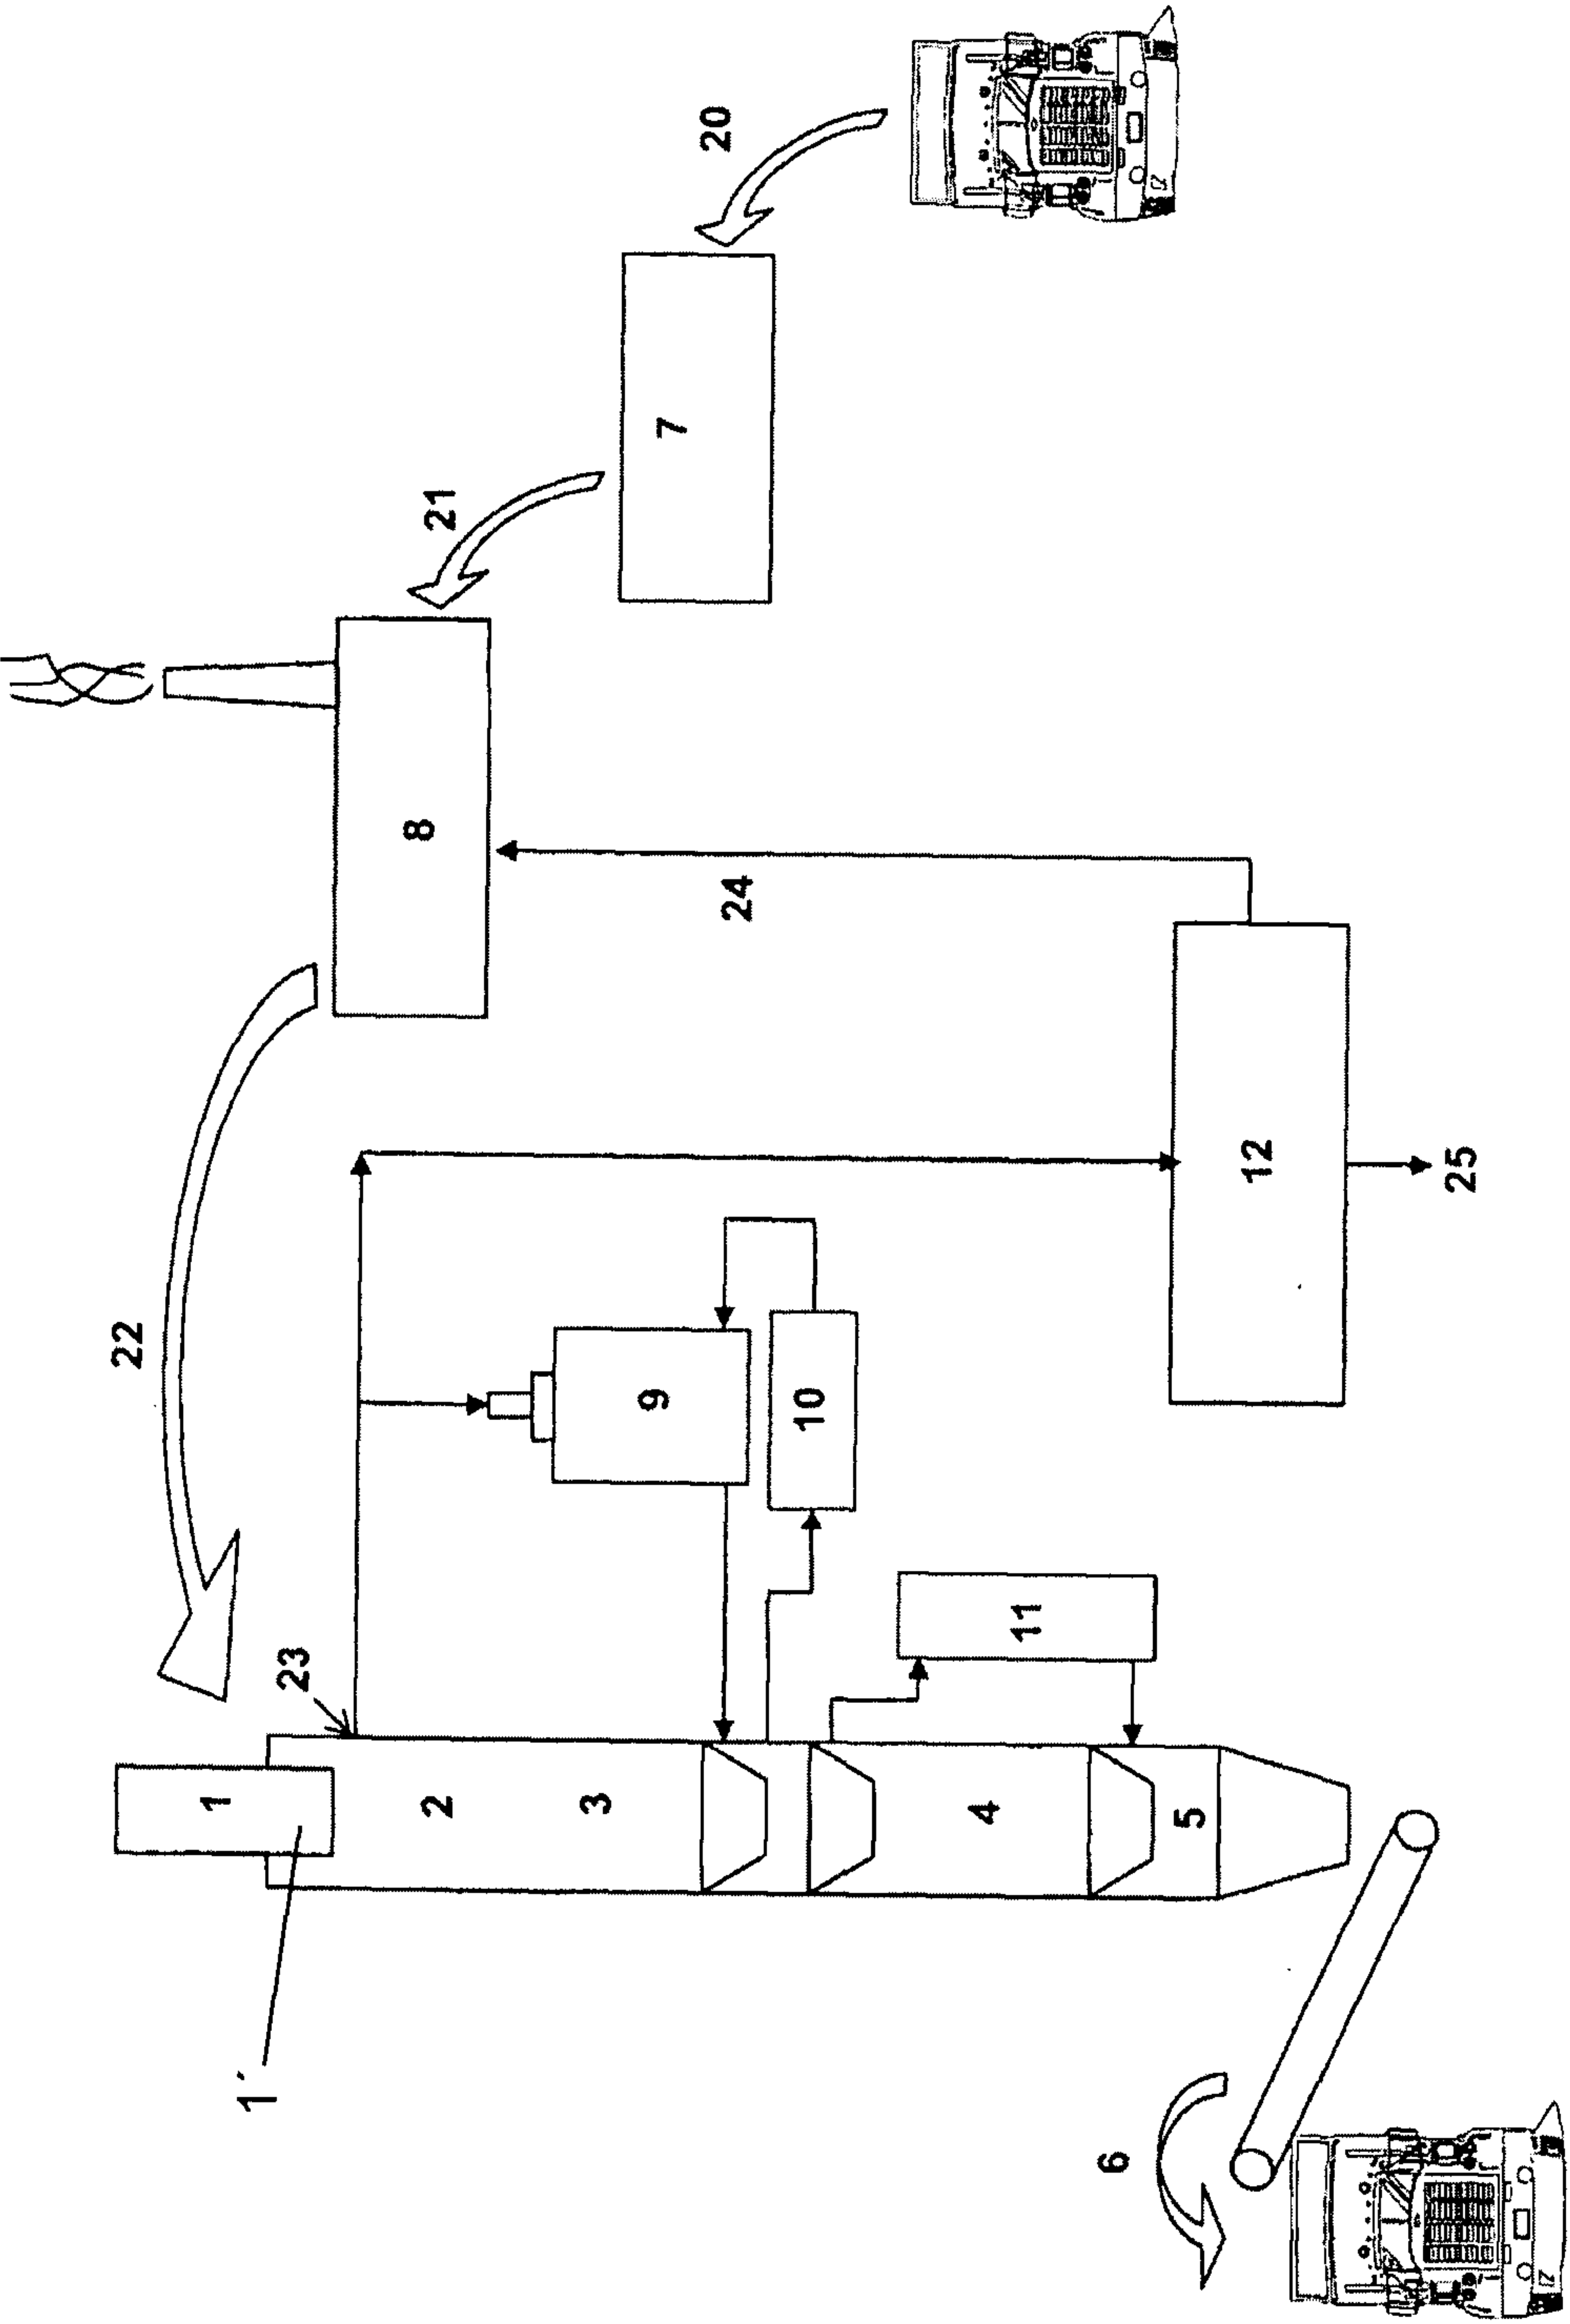

2/2

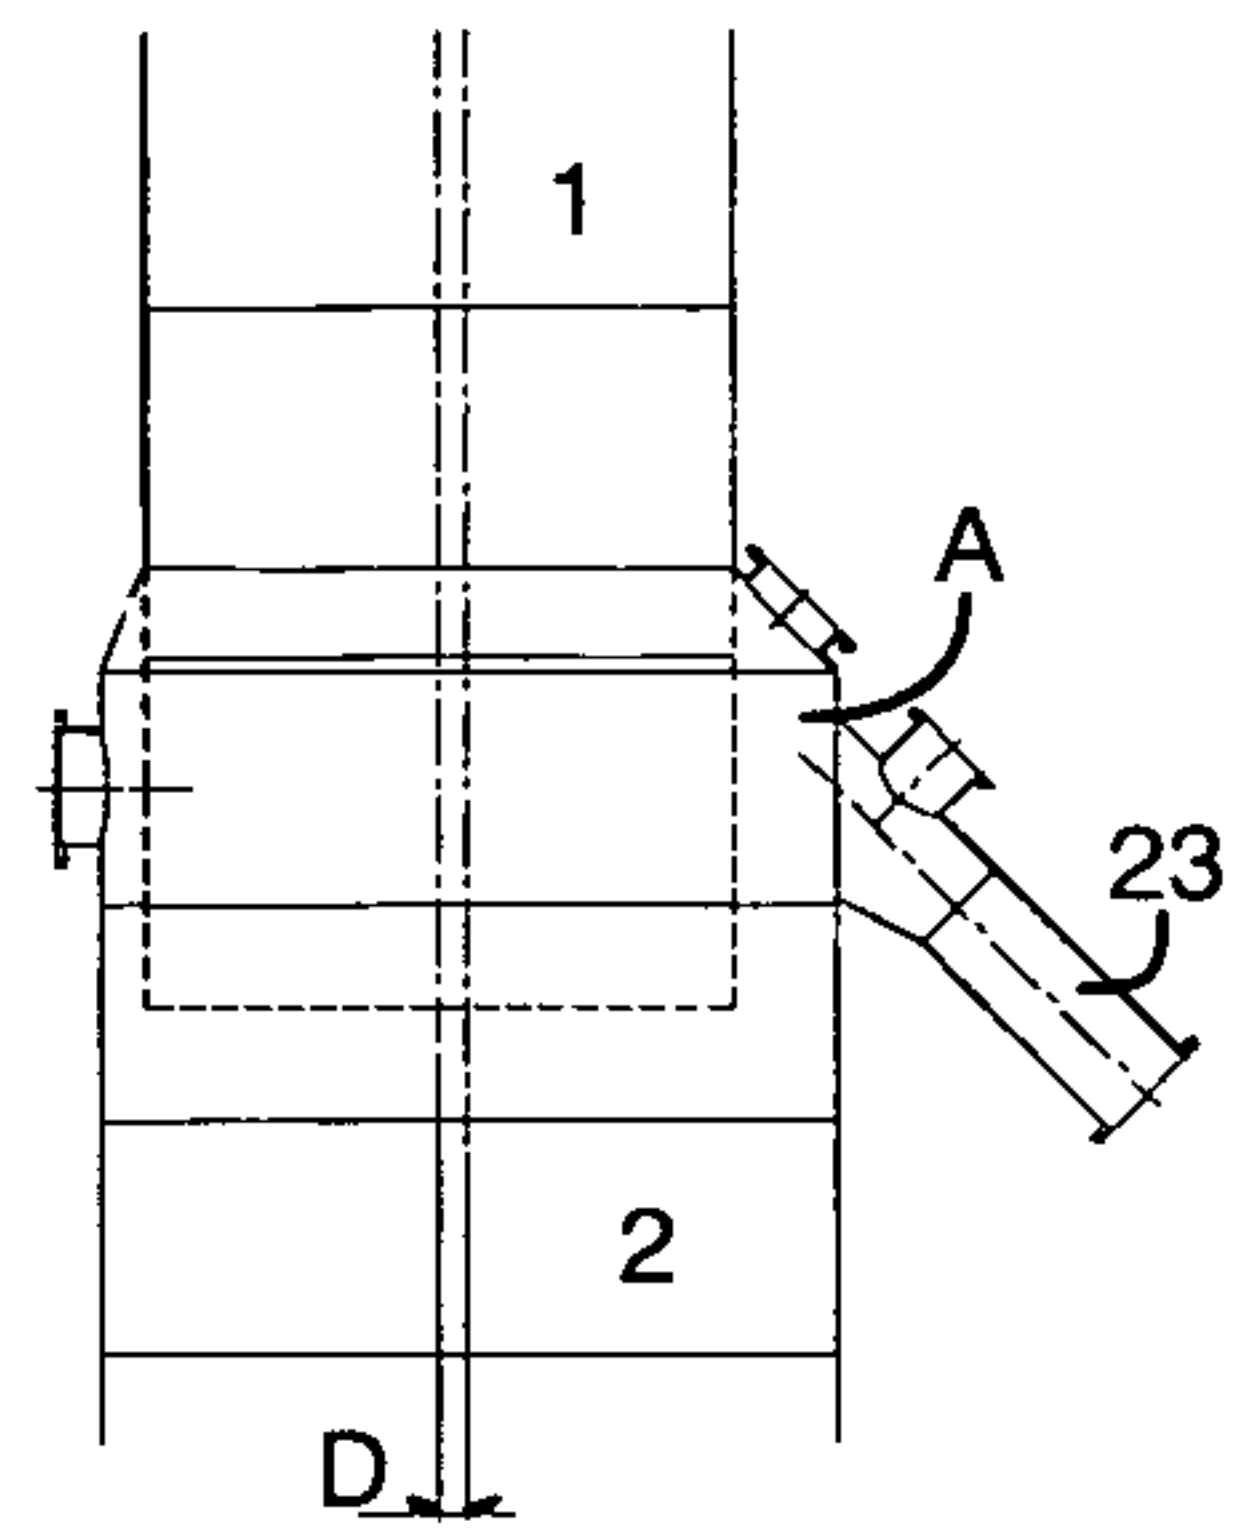


Fig. 3A

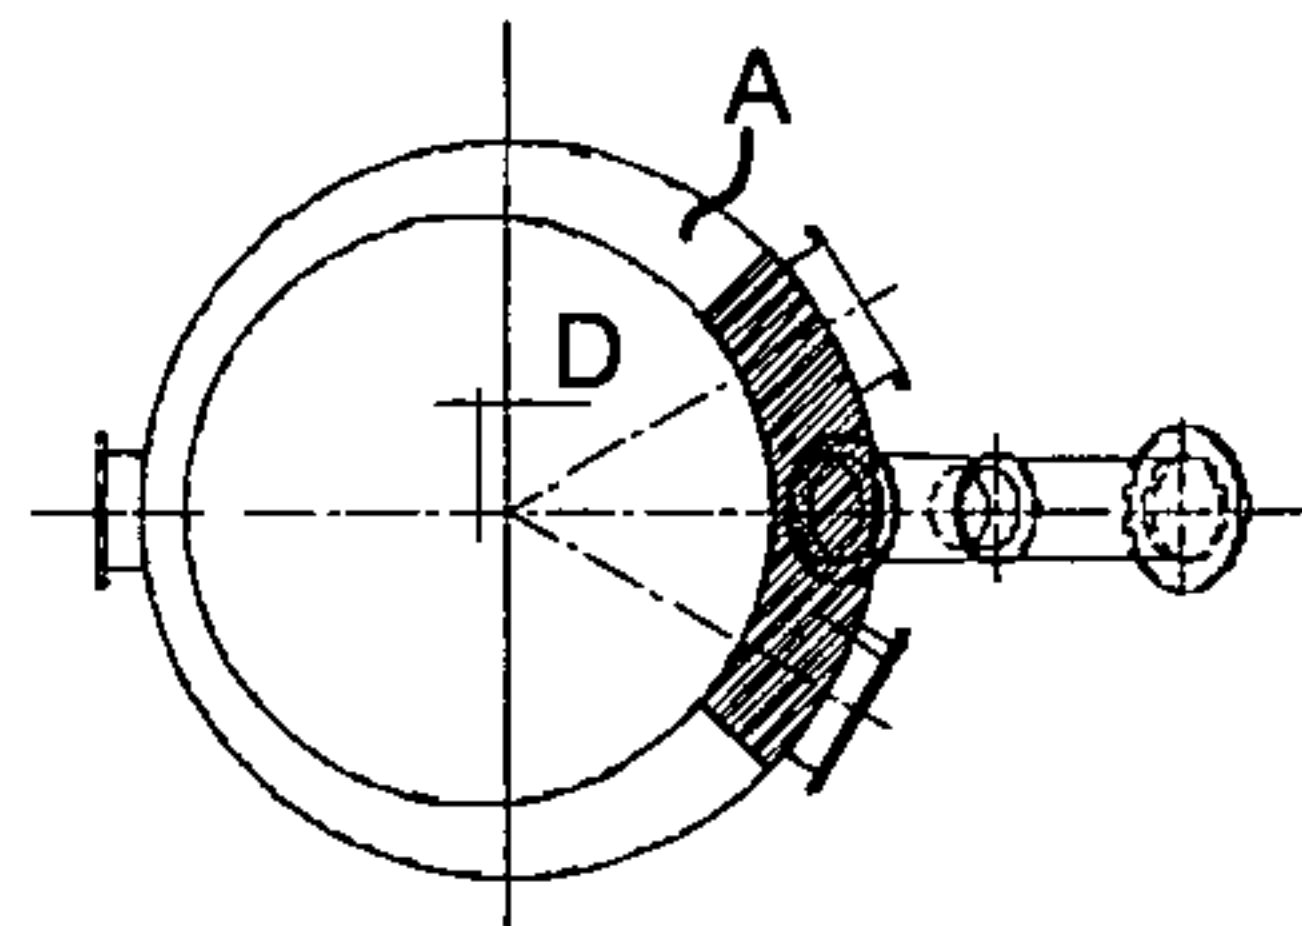


Fig. 3B

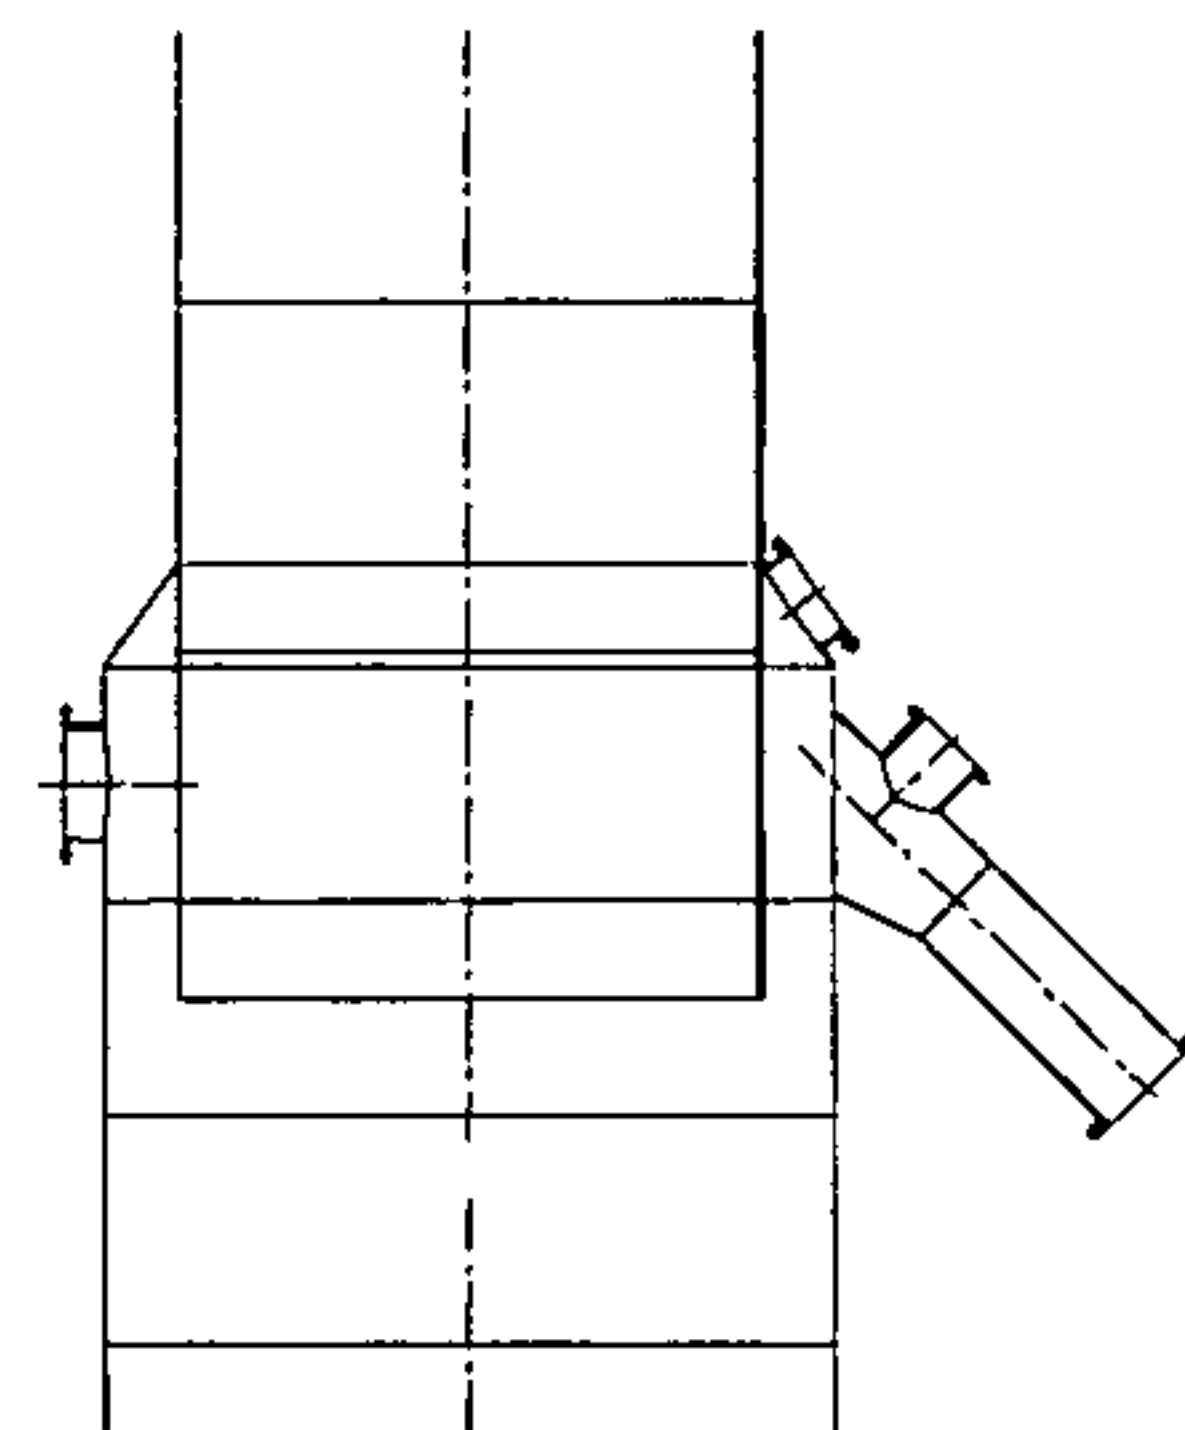


Fig. 2A

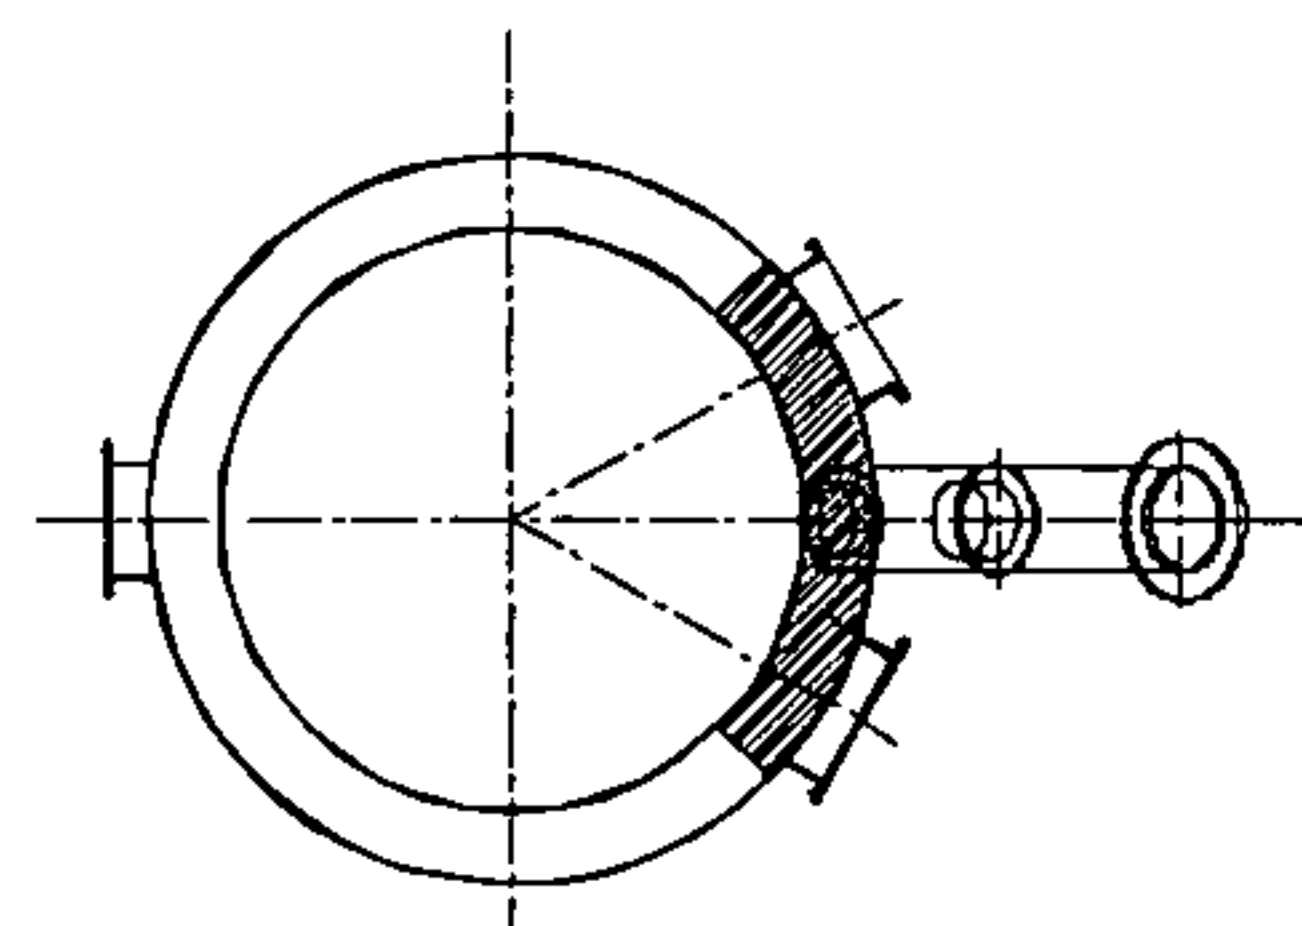


Fig. 2B

