



(51) International Patent Classification:

D01F 2/00 (2006.01) *B82Y 30/00* (2011.01)
D01D 5/16 (2006.01) *D01D 5/06* (2006.01)
D01D 1/06 (2006.01) *C08J 3/05* (2006.01)

(21) International Application Number:

PCT/FI2015/050939

(22) International Filing Date:

23 December 2015 (23.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20146148 23 December 2014 (23.12.2014) FI

(71) Applicant: **TEKNOLOGIAN TUTKIMUSKESKUS VTT OY** [FI/FI]; Vuorimiehentie 3, 02150 Espoo (FI).

(72) Inventors: **SHEN, Yingfeng**; c/o VTT, P.O. Box 1000, 02044 Vtt (FI). **HARLIN, Ali**; c/o VTT, P.O. Box 1000, 02044 Vtt (FI). **SALMELA, Juha**; c/o VTT, P.O. Box 1000, VTT 02044 (FI).

(74) Agent: **SEPPO LAINE OY**; Itämerenkatu 3 B, 00180 Helsinki (FI).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: METHOD FOR PRODUCING HIGH TENSILE STRENGTH NANOFIBER YARN

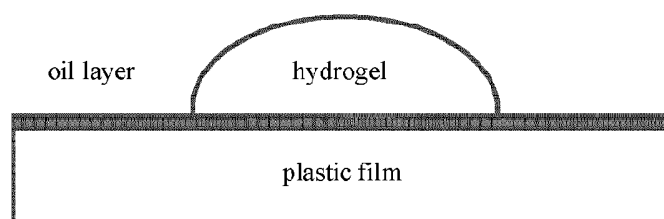


Fig. 3

(57) Abstract: The present invention relates to a process for producing high tensile strength nanofiber yarn by wet-extrusion on a slippery surface. In particular, the present invention discloses a method wherein individual nanocellulose fibers are aligned by high speed in-nozzle- alignment and on-surface-alignment, which comprise controlling the fiber width on a moving slippery surface.

METHOD FOR PRODUCING HIGH TENSILE STRENGTH NANOFIBER YARN

Field of the invention

5

The present invention relates to a method for producing high tensile strength nanofiber yarn. Particularly, the present invention provides a method for producing such nanofiber yarn at high speed.

10

Description of related art

Natural cellulose fiber has been utilized by human for thousands of years. Two major examples are paper from wood pulp and fabrics from cotton. In the last hundred years, synthetic fiber has gradually taken over due to its lower cost and excellent properties.

15 However, for sustainable usage of earth resources, natural cellulose fibers have triggered more and more attraction. Wood is one of the most abundant sources of natural fiber. It was found that wood pulp can be disintegrated into nano fibrils through simple mechanical grinding. The tensile strength of nanocellulose fibril is estimated to be 2 - 3 GPa (Walther *et al.*), rendering it five times stronger than mild steel. Theoretically, it would be possible
20 to align the nanofibers and produce long and strong fibers, surpassing that of wood and cotton (400 - 600 MPa). This would greatly extend the use of wood to a higher value market. Considering the global shortage of cotton, this could be an interesting alternative. This kind of long fiber is also different from regenerated cellulose fiber. Since no dissolution is used, the cellulose will mostly likely retain its cellulose I structure, thus more
25 closely resemble the properties of cotton. For the sake of simplicity, we call this kind of fiber as nanofiber yarn.

Three research groups have published results of producing nanofiber yarn from natural cellulose nanofibers. Long fibers were prepared by Walther *et al.* by a simple wet-
30 extrusion and acetone coagulation process of hydrogels of native cellulose nanofibrils. The resulting NFC macrofibers demonstrate mechanical properties combining stiffness (22.5 GPa) and strength (275 MPa) with toughness (work of fracture 7.9 MJ m^{-3}). Writers foresee that the properties can be increased by a further alignment of the constituent NFC nanofibrils by post drawing processes. Aside from mechanical robustness, article describes

how to achieve transparent macrofibers and to control the water sorption by hydrophobization of the surface.

Iwamoto *et al.* has published research results of wet-spun fibers made from natural
5 cellulose nanofibers. Cellulose nanofibers were prepared by TEMPO-mediated oxidation of wood pulp. The cellulose nanofiber suspension in water was spun into an acetone coagulation bath. The wood spun fibers at 100 m/min had a Young's modulus of 23.6 GPa, tensile strength of 321 MPa, and elongation at break of 2.2%. The Young's modulus of the wood spun fibers increased with an increase in the spinning rate because of the nanofiber
10 orientation effect.

Håkanson *et al.* present a process combining hydrodynamic alignment with a dispersion–gel transition that produces homogeneous and smooth filaments from a low-concentration dispersion of cellulose nanofibrils in water. The hydrodynamic alignment was
15 accomplished in a flow-focusing channel system. The preferential fibril orientation along the filament direction can be controlled by the process parameters. The specific ultimate strength is considerably higher than previously reported filaments made of cellulose nanofibrils; maximum tensile strength value is ~580 MPa and maximum Young's modulus 18.3 GPa. The strength is even in line with the strongest cellulose pulp fibers extracted
20 from wood with the same degree of fibril alignment.

WO 2010/043889 A1 relates to a method for spinning of a fibre comprising cellulose nanofibrils being aligned along the main axis of the fibre from a lyotropic suspension of cellulose nanofibrils, wherein the alignment is achieved through extension of the extruded
25 fibre and the fibre is dried under extension and the aligned nanofibrils aggregate to form a continuous structure. Similarly, also EP 2 558 624 B1 relates to a continuous method for manufacturing cellulose based fibers of cellulose nanofibrils. However, these documents do not disclose for example a method for producing high tensile strength nanofiber yarn at exceptionally high speed.

30

Cellulose has been used widely as a raw material for textile and composite reinforcement fibers. Currently chemical processes, such as dissolving and regeneration as well as cellulose derivatization are used. These methods however require chemicals and consume rather much energy. Thus, there is a need for simpler processes, which consume less

chemicals and less energy, for producing long nanocellulose fibers with good mechanical properties preferably at high speed.

Summary of the invention

5

It is an object of the present invention to utilize physical means to assemble cellulose nanofibers in order to produce high tensile strength long fibers i.e. nanofiber yarn.

10

Particularly, it is an object of the present invention to provide a method based on aligning individual nanocellulose fibers for producing high tensile strength nanofiber yarns at a high speed, which method uses less chemicals and less energy compared to traditional chemical processes.

15

These and other objects, together with the advantages thereof over known techniques are achieved by the present invention, as hereinafter described and claimed.

The method according to the present invention is mainly characterized by what is stated in the characterizing part of claim 1.

20

The present invention provides advantages over known methods, since it e.g. allows the usage of low cost raw material such as non-modified nanocellulose. Upgrading of the raw-material to TEMPO-oxidized nanocellulose furthermore improves the mechanical properties of the fibers. In addition, the present method is able to produce nanofiber yarns continuously at a high speed, because the method does not use a traditional coagulation bath.

25

Next, the present technology will be described more closely with the aid of to the appended drawings and with reference to a detailed description.

30

Brief description of the drawings

Figure 1 is a simplified schematic drawing illustrating the process concept of a wet extrusion on a slippery surface (WESS).

Figure 2 is a chart figure describing the in-nozzle-alignment of the nanocellulose fibers and showing extensional rate field in the nozzle with a jet speed of 10 m/s.

5 Figure 3 is a simplified drawing demonstrating a nanocellulose hydrogel on a slippery oil surface.

Figures 4a-4c and Figures 5a-5c are SEM-images of a produced NFC yarn(s) and TEMPO-NFC yarn(s), correspondingly. Fairly uniform fibers are formed, whereas the NFC yarns are more ribbon-like due to larger width and thickness ratio (Figures 4b and 4c).

10

Detailed description of embodiments

The present invention discloses a method for producing high tensile strength nanofiber yarn by wet-extrusion.

15

Nanofibers are defined in the art as fibers with diameters less than 100 nanometers. In textile industry, this definition is often extended to include fibers as large as 1000 nm diameter. Yarn on the other hand is a long continuous length of interlocked fibres, herein nanofibers, suitable for use e.g. in the production of textiles.

20

Particularly, the present invention is based on the combination of in-nozzle-alignment and on-surface-alignment, wherein individual nanocellulose fibers are aligned together by using high speed extrusion and simultaneous stretching technique in a wet state.

25 According to an embodiment of the invention, the method for producing high tensile strength nanofiber yarn by wet-extrusion comprises aligning individual nanocellulose fibers together and forming a nanofiber network first by in-nozzle-alignment, wherein a nanocellulose hydrogel is extruded through a nozzle at high jet speed, after which the nanofiber network is stretched by on-surface-alignment, wherein a hydrogel jet from the
30 nozzle is applied on a moving slippery surface.

According to another embodiment, the nanocellulose hydrogel is prepared from natural and non-modified nanofibrillated cellulose. However, also TEMPO-oxidized nanocellulose

may be used, which has shown further improving the properties of the fibers. One suitable source of nanocellulose is bleached birch pulp.

According to a further embodiment, the moving surface is a drum, or alike, or a belt. The surface is preferably covered with a nonporous plastic film that has been pre-coated with oil, such as a vegetable oil, or a non-immiscible fluid, in order to achieve a slippery surface. A contact angle hysteresis of less than 10° is achieved. If a porous surface is infused with lubricating fluid, even lower contact angle hysteresis ($< 2.5^\circ$) can be obtained. The produced fibers can then be removed from the drum together with the plastic film.

In “in-nozzle-alignment” individual nanocellulose fibers are aligned as shown in Figure 2, which depicts the flow of nanocellulose hydrogel from a syringe, or alike, into a smaller nozzle and the forming of an extensional flow regime by the hydrogel flow. Through the interaction of a continuous water phase and a fiber network, the network is efficiently stretched along the flow direction at high extensional rate. Such high extensional rate can be obtained by using high extrusion speed i.e. jet speed and small nozzle size.

According to one embodiment, the jet speed is between 3 and 30 m/s, preferably between 10 and 25 m/s.

According to one embodiment, the nozzle has an inner diameter between 10 and 150 μm .

In “on-surface-alignment” a hydrogel jet from the nozzle is applied on a moving slippery surface, as stated above. When surface speed is higher than jet speed, the cross-sectional area of the wet filament becomes smaller after it has landed on the surface. The stretching created by the surface also enhances the fiber alignment. On the other hand, if the surface is moving slower than the jet speed, the cross-sectional area of the wet filament becomes larger and causes accumulation of the substrate. This results in reduction of orientation of the fibers in the yarns. The previously aligned fibers maybe disturbed due to the compression and strong impact with the substrate, whereas the resulting fibers become less aligned.

Another important feature is the impingement angle of the jet. The cross-section of the jet is preferably circular due to the shape of the nozzle. The vertical component of the jet

speed directly causes a widening of the wet filament in cross direction. The horizontal component, depending on its speed relative to the moving substrate, may either contribute to the shrinking or stretching of the filament length. The resulting filament then obtains a ribbon like cross-section.

5

According to one embodiment, the hydrogel jet from the nozzle impinges on the moving surface at an impingement angle of between 90 and 20 degrees, wherein the jet is perpendicular to the surface at 90 degrees and tangential to the surface at 0 degree.

According to a preferred embodiment, the impingement angle is between 90 and 40
10 degrees, more preferably between 75 and 55 degrees.

Compression of wet filament may be useful for gaining thick filaments having a high tensile strength. Particularly, when a thin jet impinges on a slow moving substrate, a thicker filament is formed. The number of defects due to non-uniformity can be reduced.

15

According to a further embodiment, the distance between the nozzle and the moving surface is short enough for enabling that a continuous water phase remains and that the wet filament formed has high uniformity. Since the wet filament on the substrate is few millimeters, such as 10 to 20 mm, away from the impingement point, it is in a low shear
20 state. The flow of the gel is mainly driven by surface wetting, gravity, centrifugation force and shrinkage due to drying and minor water evaporation. When a high consistency hydrogel is used, the yield stress of the gel is high enough to efficiently slow down the flowing or deformation of the wet filament. As the method provides a closely packed fiber network, the disordering of the nanofibrils due to dispersion and/or lack of orientation is
25 unlikely.

30

According to a preferred embodiment, the application of oil coating on the substrate has clear benefit in controlling the wet fiber width. Oil coating is used to reduce the risk of the wet fiber adhering to the substrate and thus forming wide and thin ribbons, which are quite weak due to large amount of defects. With oil coating, the wet filament shrinks for
example from 1.5 mm down to as small as 10s of microns as it is dried. This is related to the reduced contact angle hysteresis. At the same time, the thickness to width ratio of the ribbon increases and in certain cases a close to circular cross-section can be obtained.

In order to form a highly slippery surface, the applied oil should have better wettability to the surface than the nanocellulose hydrogel, which consists of mainly water. The viscosity of the oil should also be sufficiently low in order to facilitate the lubrication.

- 5 Tensile strength of the fibers increases together with stretch ratio. This is expected assuming fibers are more aligned due to stretching on the surface. According to one embodiment, the stretching ratio (= surface speed / nozzle speed i.e. jet speed) is at least 1, thus meaning that the surface moves with at least the same speed as the jet speed.
- 10 However tensile strength can also benefit from lower than 1 stretching ratio, for example when aiming for thicker filaments. According to one embodiment, the stretching ratio is at least 0.1, preferably more than 1.

- Ideally, a high jet speed and a high stretch ratio should both exist for the best fiber alignment. The inventors of the present invention have noticed that the 3% hydrogel does not allow higher than 16 m/s jet speed before the nozzle is clogged or the pressure would be too high for the extruder. Only at lower solids, higher jet speed is achievable. When the consistency of the nanocellulose hydrogel is decreased e.g. from 3% to 1.64%, the operation window of stretch ratio is adversely shifted to the lower end. Higher stretch ratio
- 15 would simply cause fiber to break. This in turn suggests a higher consistency. Thus, a compromise has to be made between consistency, nozzle speed and stretch ratio. Other parameters, such as humidity and drying speed, should be considered secondly.
- 20

- Using the WESS (wet-extrusion on a slippery surface) process as described herein
- 25 nanofiber yarn can be produced at speed between 120 and 660 m/min, which is the highest speed reported. Such speed is similar to the capacity of current paper making and coating production line, whereby conversion of the production line to fiber making is possible and furthermore improve the economy of the present method.

- 30 According to a preferred embodiment the nanofiber yarn is produced at least at a speed of 500 m/min, such as at the speed between 550 and 700 m/min and in particular at the speed of about 660 m/min.

Additionally, a high molecular weight polymer additive may be used (added to the nanocellulose hydrogel) to ease up the extrusion, i.e. to reduce the extrusion pressure and prevent nozzle clogging. One such suitable additive is a high molecular weight polyethylene oxide.

5

The main application area for nanofibers produced by the method as hereinbefore described is the textile industry. Such nanofibers may e.g. be used as composite reinforcement fibers or as precursors for carbon fibers.

10 Next, the present invention is illustrated by the following non-limiting example. It should be understood, however, that the embodiments given in the description above and in the example are for illustrative purposes only, and that various changes and modifications are possible within the scope of the claims.

15

Example

Preparation of nanofibrillated cellulose

The nanofibrillated cellulose was prepared from bleached birch pulp. The pulp slurry was passed one time through mechanical grinding and 6 times through microfluidizer. The
20 resulting gel had a consistency of 1.64%. A 3% hydrogel was further prepared by using centrifugation to remove part of the water. TEMPO oxidized nanocellulose was also prepared from bleached birch pulp and fibrillated in microfluidizer in one pass. The solids content of the gel was 0.819%.

25 *Viscosity measurement*

The shear thinning viscosity of the TEMPO NFC was measured on a rotary rheometer (Anton Parr). Cone and plate measurement system was used. The sample was first pre-sheared at 1500/s for 60 seconds. After pre-shearing, ramping up and down did not show apparent hysteresis.

30

Preparation of slippery surface

A polyethylene film was used as the carrier substrate and tightly wrapped on a rotating drum. Sunflower oil was coated to the substrate with a brush while the drum is rotating. The final coat weight of the oil was estimated to be 1 - 3 g/m².

Wet extrusion of nanofibrillated cellulose

The schematic of the extrusion system is shown in Figure 1. A custom made syringe pump extruder was used to extrude the hydrogel through a syringe needle. The inner diameter of the needle was 108 μm and the length of the needle was 8 mm. The extruder was

5 horizontally mounted on the z-axis of a CNC machine and controlled as the 4th axis. EMC2 software was used to synchronize the x-y-z motion and the extruder. The speed of the jet coming out of the nozzle can vary between 240 - 1920 m/min. A rotating drum was driven horizontally in front of the needle by a high speed mixer. The diameter of the drum was 104 mm. By adjusting the speed of the mixer, the surface speed of the drum varied

10 between 120 - 660 m/min, which was also the speed of the fiber production.

In a typical experiment, oil coating is applied to a polyethylene film, which is attached on the rotating drum. The jet from the nozzle is then started and 10 meter of wet filament is extruded to clear up the nozzle and build up the pressure in the extruder. The nozzle then

15 starts to move linearly along the drum. After another 10 meter of fiber is formed on the drum, the jet stops and the drum continues to rotate for a few minutes till the fibers are dried. A hot air dryer can be optionally used to shorten the drying time.

Effect of jet speed on the tensile strength of NFC nanofiber yarn

20 At lower nanocellulose consistency of 1.64%, higher jet speed up to 28m/s can be achieved without clogging. The in-nozzle-alignment becomes more important than stretch ratio, as shown in Table 1. The maximum stretch ratio here is only 0.25. The tensile strength is however clearly higher, which is probably due to the higher jet speed. The lower consistency is believed to dilute the fiber network and reducing the entanglement between

25 cellulose nano fibers. Table 1 below shows the influence of nozzle speed on tensile strength with an impingement angle of 55°.

Table 1.

Sample #	Solids %	Surface speed m/s	Jet speed m/s	Stretch ratio	Equivalent diameter, μm	Tensile strength, MPa	Standard deviation, MPa
A	1.64	6	24	0.25	23.4	270	19
B	1.64	6	28	0.21	25.3	251	18

C	1.64	4	24	0.17	28.6	278	12
---	------	---	----	------	------	-----	----

* Equivalent diameter is calculated from a circle with equal cross-sectional area

Although the standard deviation of the measurement in Table 1 is rather large and does not allow strong conclusions to be made, there are two interesting observations. Comparing case A and B, a higher jet speed does not lead to higher tensile strength. It is speculated that disorder of fiber network may happen at too high shear rate, in this case the higher jet speed. This is a common phenomenon for certain thixotropic fluid that exhibits shear thinning at low shear rate and shear thickening at much higher shear rate. However, there is currently no similar observation for the rheology of nanocellulose gel in the literature. Comparing case A and C, a lower surface speed, correspondingly lower stretch ratio did not harm the tensile strength. This may actually be due to the improvement on fiber quality. Lower centrifugation force resulting from lower surface speed leads to less splashing. In fact, it is not possible to form wet fiber on the surface when the centrifugation force is too strong and the wet gel is thrown away from the rotating drum.

15

SEM

The yarn's microstructure was investigated using a Zeiss Merlin Field-Emission SEM. For cross sectional analysis the yarns were cooled with liquid nitrogen and fractured. For surface analysis the yarns were settled on sample stub with a carbon tape. In both cases the samples were coated with thin layer of platinum using a sputter coater. The SEM was operated using 2 kV of acceleration voltage using both secondary electron and InLens detectors.

20

Tensile test

Calculation of the tensile strength requires the knowledge of the cross sectional area, which was estimated from the linear density and bulk density of the nanofiber yarn. The former was calculated from the solids content of the hydrogel, extrusion speed and surface speed. The bulk density of the dry filament was assumed as 1.5 g/cm³. It was checked from the SEM cross sectional image that the estimation matches well for both NFC and TEMPO oxidized NFC. The estimation method was thus used throughout the work.

30

The strength of the nanofiber yarn was measured on a custom made tensile tester. The fiber was attached to a block of metal with double sided tape. The other end of the fiber was

pulled up at 50 micron/second using a geared stepper motor. The span of the fiber was 30 mm. The metal block was placed on a 4 digit Precisa balance and the weight is monitored at 10 Hz through serial communication with PC. The maximum force before the fiber break was then used to calculate the tensile strength.

5

Humidity control

The measurement of tensile strength was performed in a controlled climate chamber. The temperature was held constant at 22°C. The relative humidity is controlled using moistured air at different humidity level. The lowest relative humidity level that could be achieved was 14%. The highest humidity level was 90%. The tensile tester was placed inside the chamber together with the sample. The sample was stored in the chamber for at least 2 hours before each measurement.

10

Citation List

Patent literature

15

1. WO 2010/043889 A1
2. EP 2 558 624 B1

Non-Patent Literature

20

1. Walther A., Timonen J., Díez I., Laukkanen A., Ikkala O., "Multifunctional high-performance biofibers based on wet-extrusion of renewable native cellulose nanofibrils", Adv. Matter. 2011, 23, 2924-2928.
2. Iwamoto S., Isogai A., Iwata T., "Structure and Mechanical Properties of Wet-Spun Fibers made from Natural Cellulose Nanofibers", Biomacromolecules 2011, 12, 831-836.
3. Håkansson K. M. O., Fall A. B., Lundell F., Yu S., Krywka C., Roth S. V., Santoro G., Kvick M., Wittberg L. P., Wåberg L., Söderberg L. D., "Hydrodynamic alignment and assembly of nanofibrils resulting in strong cellulose filaments", Nature Communications 5, Article number 4018, 2014.

25

30

Claims

1. A method for producing a high tensile strength nanofiber yarn by wet-extrusion,
characterized in that individual nanocellulose fibers are aligned together and form a
5 nanofiber network first by in-nozzle-alignment, wherein a nanocellulose hydrogel is
extruded through a nozzle at high jet speed, after which the nanofiber network is
stretched by on-surface-alignment, wherein a hydrogel jet from the nozzle is applied on
a moving slippery surface.
- 10 2. The method according to claim 1, **characterized** by stretching the nanofiber network
along a jet flow direction through an interaction of a continuous water phase with the
nanofiber network.
3. The method according to claim 1 or 2, **characterized** in that the moving surface is a
15 drum or a belt covered with a plastic film that has been pre-coated with an oil, such as
a vegetable oil, or with a non-immiscible fluid.
4. The method according to any of the preceding claims, **characterized** by stretching the
nanofiber network at a stretching ratio of at least 0.1, preferably more than 1.
20
5. The method according to any of the preceding claims, **characterized** in that the jet
speed is between 3 and 30 m/s, preferably between 10 and 25 m/s.
6. The method according to any of the preceding claims, **characterized** in that the nozzle
25 has an inner diameter between 10 and 150 μm .
7. The method according to any of the preceding claims, **characterized** in that the
hydrogel comprises non-modified nanocellulose fibers.
- 30 8. The method according to any of the claims 1 to 6, **characterized** in that the hydrogel
comprises TEMPO-oxidized nanocellulose fibers.
9. The method according to any of the preceding claims, **characterized** in that the
produced nanofiber yarns are air dried simultaneously on the moving surface.

10. The method according to any of the preceding claims, **characterized** in that the hydrogel jet from the nozzle impinges on the moving surface at an impingement angle between 90 and 20 degrees, wherein the jet is perpendicular to the surface at 90 degrees and tangential to the surface at 0 degree.
- 5
11. The method according to claim 10, **characterized** in that the impingement angle is between 90 and 40 degrees, preferably between 75 and 55 degrees.
12. The method according to any of the preceding claims, **characterized** in that a distance
10 between the nozzle and the moving surface is such that it enables a continuous water phase and a uniform wet filament.
13. The method according to any of the preceding claims, **characterized** in that the nanofiber yarn is produced at a speed of at least 500 m/min.
- 15
14. The method according to any of the preceding claims, **characterized** in that a high molecular weight polymer additive is added to the nanocellulose hydrogel to reduce extrusion pressure and prevent nozzle clogging.
- 20
15. A nanofiber yarn, produced according to a method of any of claims 1 to 14.
16. Use of the nanofiber yarn of claim 15 as a composite reinforcement fiber and/or as a precursor for carbon fiber.

1/2

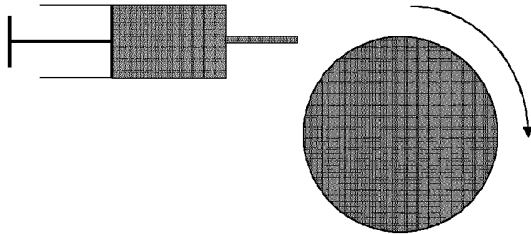


Fig. 1

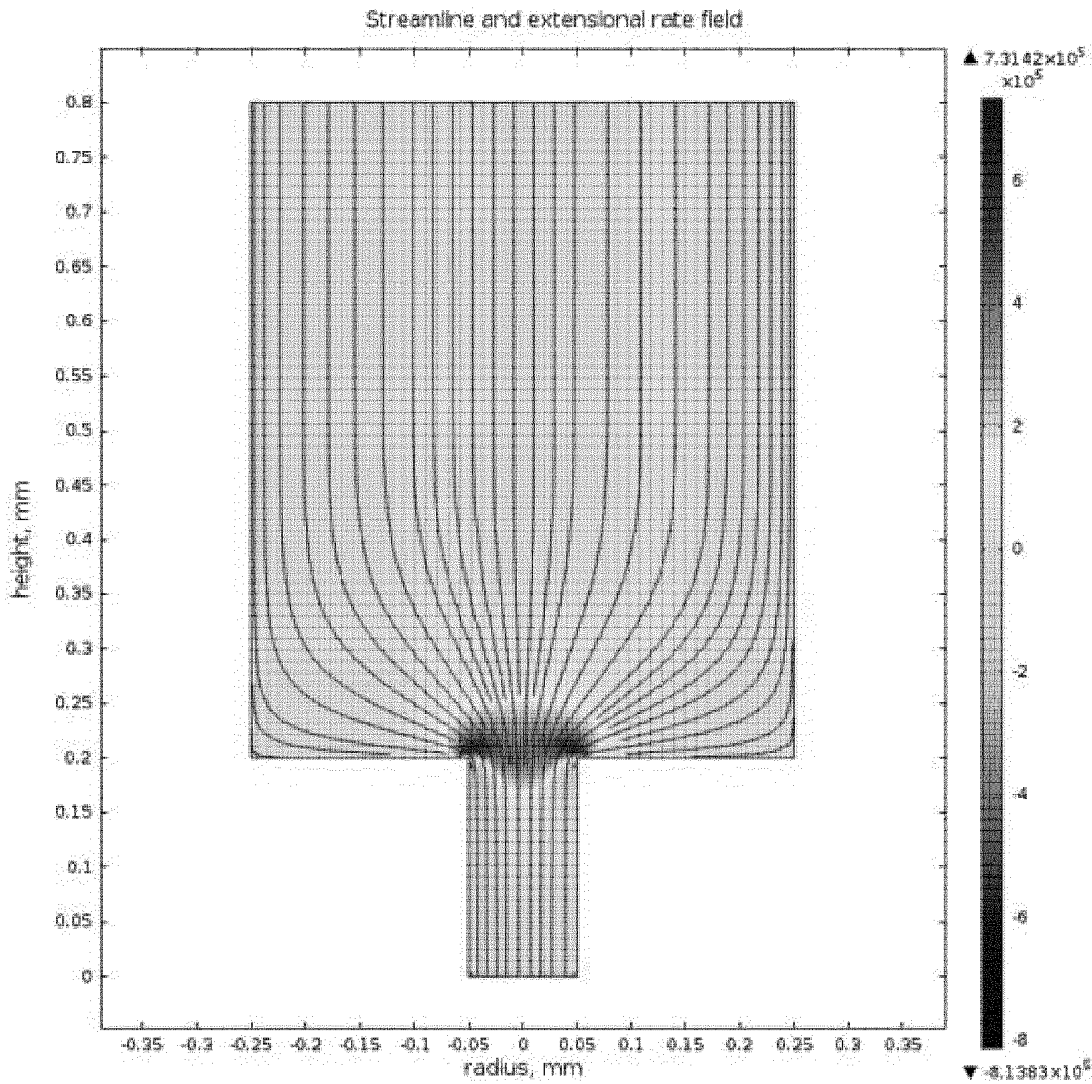


Fig. 2

2/2

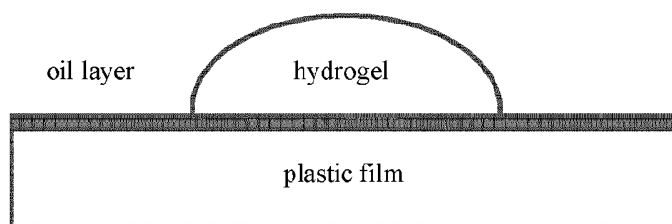


Fig. 3

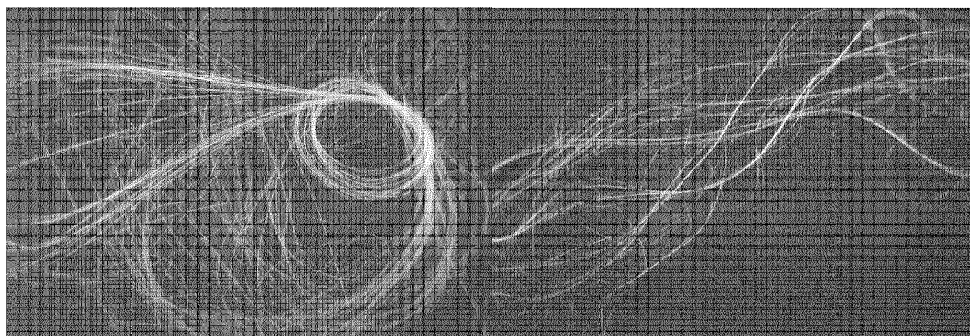


Fig. 4a

Fig. 5a

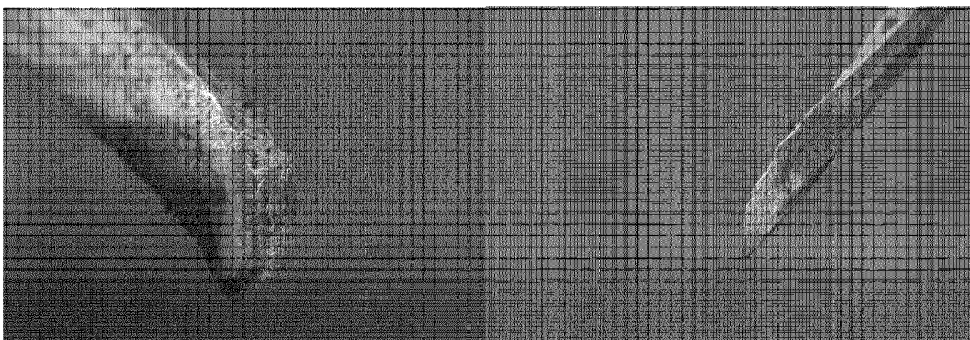


Fig. 4b

Fig. 5b

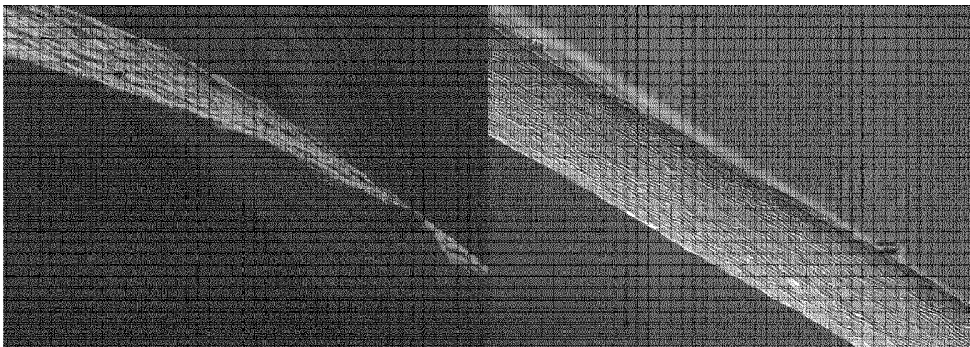


Fig. 4c

Fig. 5c

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050939

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: D01F, D01D, C08J, B82Y

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
FI, SE, NO, DKElectronic data base consulted during the international search (name of data base, and, where practicable, search terms used)
EPO-Internal, WPI**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010043889 A1 (COURT OF EDINBURGH NAPIER UNIV [GB]) 22 April 2010 (22.04.2010) example 3, table 1	1-16
X	EP 2558624 A2 (SAPPI NETHERLANDS SERVICES BV [NL]) 20 February 2013 (20.02.2013) example 3, table 1	1-16
A	JP H09157939 A (TORAY INDUSTRIES) 17 June 1997 (17.06.1997) Figure 1 & abstract [online] EPOQUENET EPODOC & WPI	
A	WO 2014065747 A1 (INNVENTIA AB [SE]) 01 May 2014 (01.05.2014) page 8, lines 1-9; page 15, lines 3-8; claims 1-17	
A	US 2014058077 A1 (LAUKKANEN ANTTI [FI] et al.) 27 February 2014 (27.02.2014) paragraphs [0037]-[0044], [0060], [0071]; claim 55	

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 20 April 2016 (20.04.2016)	Date of mailing of the international search report 22 April 2016 (22.04.2016)
Name and mailing address of the ISA/FI Finnish Patent and Registration Office P.O. Box 1160, FI-00101 HELSINKI, Finland Facsimile No. +358 9 6939 5328	Authorized officer Santeri Paavola Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050939

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Iwamoto S., Isogai A., Iwata T., "Structure and Mechanical Properties of Wet-Spun Fibers Made from Natural Cellulose Nanofibers", Biomacromolecules 2011, 12, 831-836.	
A	US 2014308862 A1 (HEINZMAN STEPHEN WAYNE [US] et al.) 16 October 2014 (16.10.2014) paragraphs [0146]-[0149], [0213]-[0217], Table 4; Fig 1; claims 1-8	

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050939

Patent document cited in search report	Publication date	Patent family members(s)	Publication date		
WO 2010043889 A1	22/04/2010	AR 073854 A1	09/12/2010		
		AU 2009305199 A1	22/04/2010		
		AU 2009305199 B2	18/09/2014		
		PI 0914529	15/12/2015		
		CA 2740545 A1	22/04/2010		
		CN 102232128 A	02/11/2011		
		CN 102232128 B	21/08/2013		
		DK 2344689 T3	28/07/2014		
		EA 201170552 A1	30/12/2011		
		EA 019328 B1	28/02/2014		
		EP 2344689 A1	20/07/2011		
		EP 2344689 B1	23/04/2014		
		ES 2487390 T3	20/08/2014		
		GB 0818763 D0	19/11/2008		
		GB 0903378 D0	08/04/2009		
		HK 1159195 A1	28/11/2014		
		HR P20140690 T1	24/10/2014		
		JP 2012505325 A	01/03/2012		
		JP 5543475 B2	09/07/2014		
		KR 20110093796 A	18/08/2011		
		PT 2344689 E	28/07/2014		
		RS 53433 B	31/12/2014		
		SI 2344689 T1	29/08/2014		
		TW 201030196 A	16/08/2010		
		TW I503457 B	11/10/2015		
		US 2011263840 A1	27/10/2011		
		US 9121111 B2	01/09/2015		
		EP 2558624 A2	20/02/2013	EP 2558624 B1	14/05/2014
				AU 2011240088 A1	06/09/2012
AU 2011240088 B2	30/10/2014				
CA 2790335 A1	20/10/2011				
CN 102812168 A	05/12/2012				
CN 102812168 B	12/11/2014				
DK 2558624 T3	18/08/2014				
EA 201290704 A1	30/05/2013				
ES 2490267 T3	03/09/2014				
GB 201006136 D0	26/05/2010				
GB 201006201 D0	02/06/2010				
JP 2013525618 A	20/06/2013				
JP 5856604 B2	10/02/2016				
KR 20130040783 A	24/04/2013				
TW 201202496 A	16/01/2012				
US 2013012695 A1	10/01/2013				

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050939

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		WO 2011128322 A2	20/10/2011
.....			
JP H09157939 A	17/06/1997	None	
.....			
WO 2014065747 A1	01/05/2014	EP 2909365 A1	26/08/2015
		US 2015292114 A1	15/10/2015
.....			
US 2014058077 A1	27/02/2014	CA 2824125 A1	16/08/2012
		CN 103403235 A	20/11/2013
		EP 2673404 A1	18/12/2013
		EP 2673405 A2	18/12/2013
		FI 20115131 A	11/08/2012
		FI 20115137 A	15/08/2012
		JP 2014508228 A	03/04/2014
		JP 2014510843 A	01/05/2014
		US 2013345416 A1	26/12/2013
		WO 2012107642 A1	16/08/2012
		WO 2012107643 A2	16/08/2012
.....			
US 2014308862 A1	16/10/2014	CA 2909453 A1	16/10/2014
		EP 2984214 A1	17/02/2016
		MX 2015014321 A	08/12/2015
		WO 2014168776 A1	16/10/2014
.....			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050939

CLASSIFICATION OF SUBJECT MATTER

IPC

D01F 2/00 (2006.01)

D01D 5/16 (2006.01)

D01D 1/06 (2006.01)

B82Y 30/00 (2011.01)

D01D 5/06 (2006.01)

C08J 3/05 (2006.01)

摘要

本发明涉及一种通过在光滑表面上湿挤出来制备高抗拉强度纳米纤维纱的方法。特别地，本发明公开一种方法，其中通过高速喷嘴内取向和表面上取向来使单独纳米纤维素纤维取向，该方法包含控制运动光滑表面上的纤维宽度。