



(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2016/12/08  
(87) Date publication PCT/PCT Publication Date: 2017/06/22  
(85) Entrée phase nationale/National Entry: 2018/05/29  
(86) N° demande PCT/PCT Application No.: IB 2016/057423  
(87) N° publication PCT/PCT Publication No.: 2017/103741  
(30) Priorité/Priority: 2015/12/16 (US62/267,987)

(51) Cl.Int./Int.Cl. *F42B 5/02* (2006.01),  
*F42B 12/06* (2006.01), *F42B 12/36* (2006.01),  
*F42B 5/03* (2006.01), *F42B 8/14* (2006.01)


(71) Demandeur/Applicant:  
RUAG AMMOTEC AG, CH

(72) Inventeurs/Inventors:  
MUSTER, MICHAEL, CH;  
WOLF, JUERGEN, CH;  
MEYER, DONALD, CH;  
SPATZ, PETER, CH

(74) Agent: CASSAN MACLEAN IP AGENCY INC.

(54) Titre : PROJECTILE A FRAGMENTATION AMELIORE ET SON PROCEDE DE FABRICATION  
(54) Title: IMPROVED FRAGMENTATION PROJECTILE AND METHOD FOR ITS MANUFACTURING

**Fig. 4**

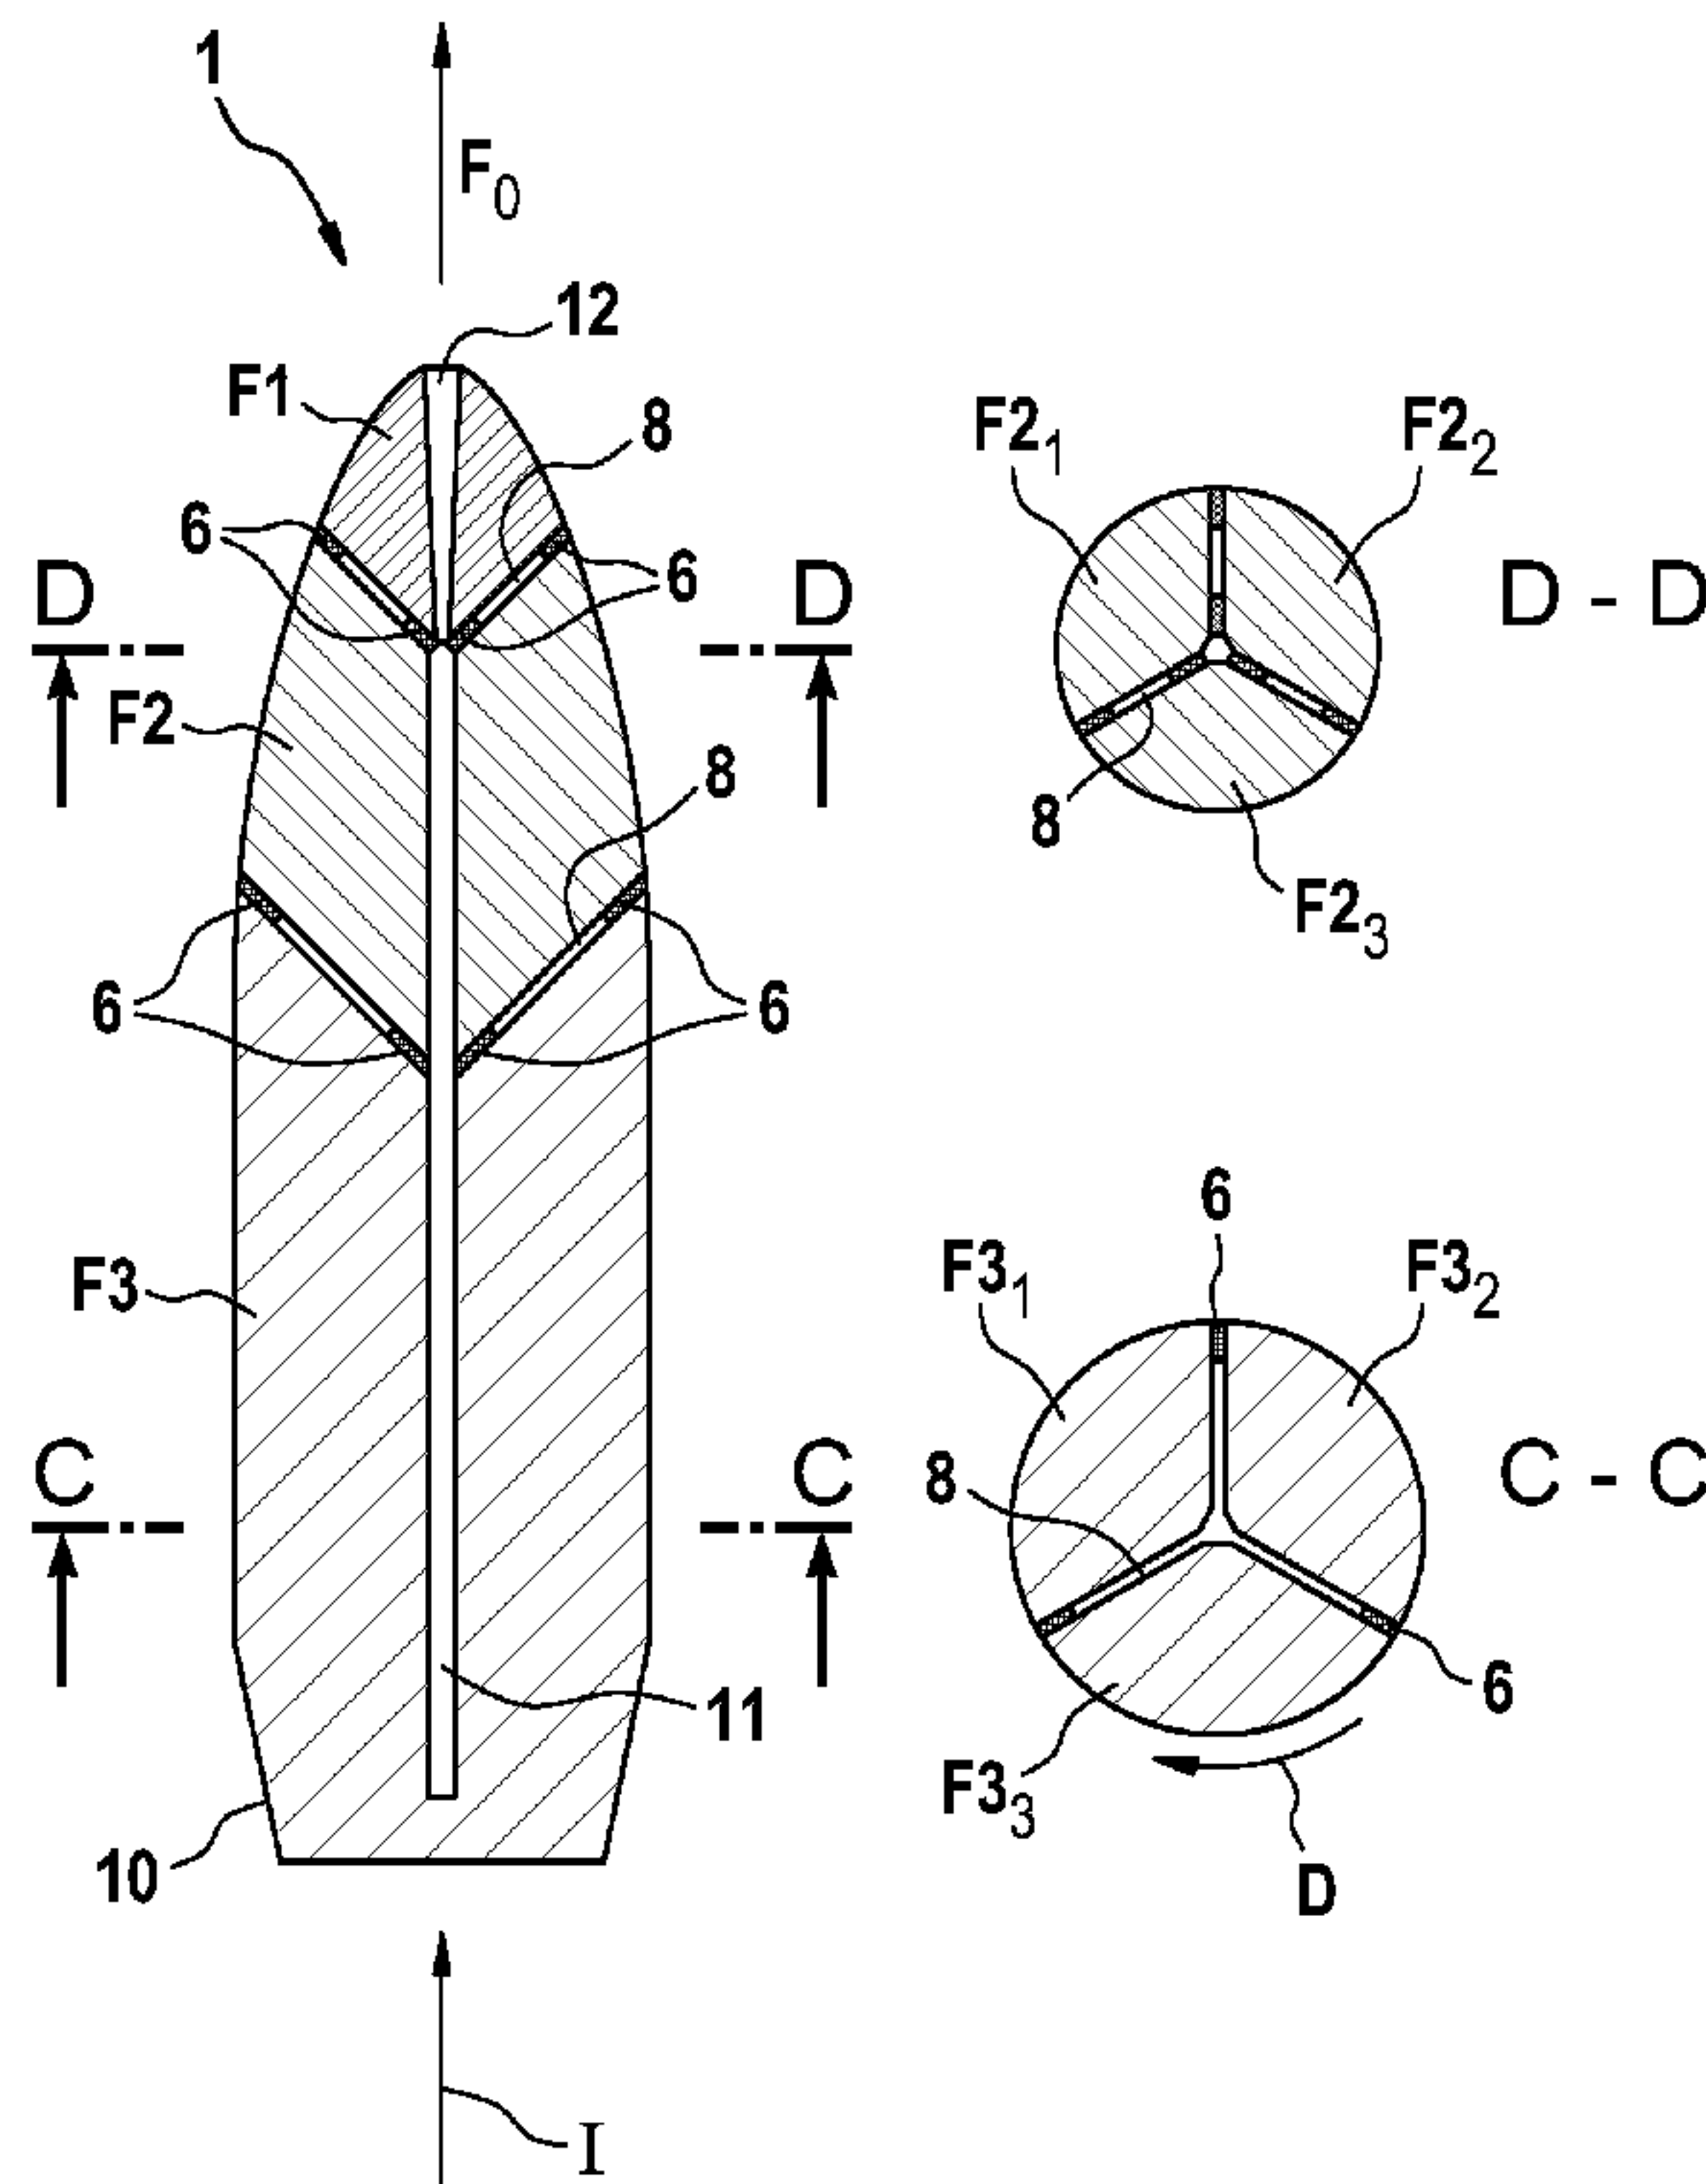

(57) **Abrégé/Abstract:**

A fragmentation projectile (1) in one aspect has a frontal cavity (12) and defined segments (F1,F2,F3) of medium to high density. The segments are nearly form fitting together to form a compact projectile (1) until its impact on the target, where it splits into defined fragments. To achieve these specific mechanical properties, Additive Manufacturing (AM) methods are applied. The projectile (1) shows excellent flight properties and at firing distance high energy dissipation with corresponding high amplitudes.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(10) International Publication Number  
**WO 2017/103741 A1**(43) International Publication Date  
22 June 2017 (22.06.2017)

## (51) International Patent Classification:

*F42B 5/02* (2006.01)      *F42B 12/36* (2006.01)  
*F42B 5/03* (2006.01)      *F42B 12/06* (2006.01)  
*F42B 8/14* (2006.01)

## (21) International Application Number:

PCT/IB2016/057423

## (22) International Filing Date:

8 December 2016 (08.12.2016)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

62/267,987 16 December 2015 (16.12.2015) US

(71) Applicant: RUAG AMMOTEC AG [CH/CH]; Uttigen-  
strasse 67, 3602 Thun (CH).(72) Inventors: MUSTER, Michael; Dählenweg 8, 3054  
Schüpfen (CH). WOLF, Juergen; Hohmadpark 5, 3604  
Thun (CH). MEYER, Donald; Les Thurlings 63, 1772  
Grolley (CH). SPATZ,, Peter; Auroraweg 24, 3185  
Schmitten (CH).(74) Agent: PPS POLYVALENT PATENT SERVICE AG;  
Bahnhofstrasse 12, 3604 Küsnacht am Rigi (CH).(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
 BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,  
 DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
 HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,  
 KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,  
 MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
 OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
 SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,  
 TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,  
 ZW.

(84) Designated States (unless otherwise indicated, for every  
 kind of regional protection available): ARIPO (BW, GH,  
 GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,  
 TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,  
 TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,  
 DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
 LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
 SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
 GW, KM, ML, MR, NE, SN, TD, TG).


## Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

## (54) Title: IMPROVED FRAGMENTATION PROJECTILE AND METHOD FOR ITS MANUFACTURING

Fig. 4

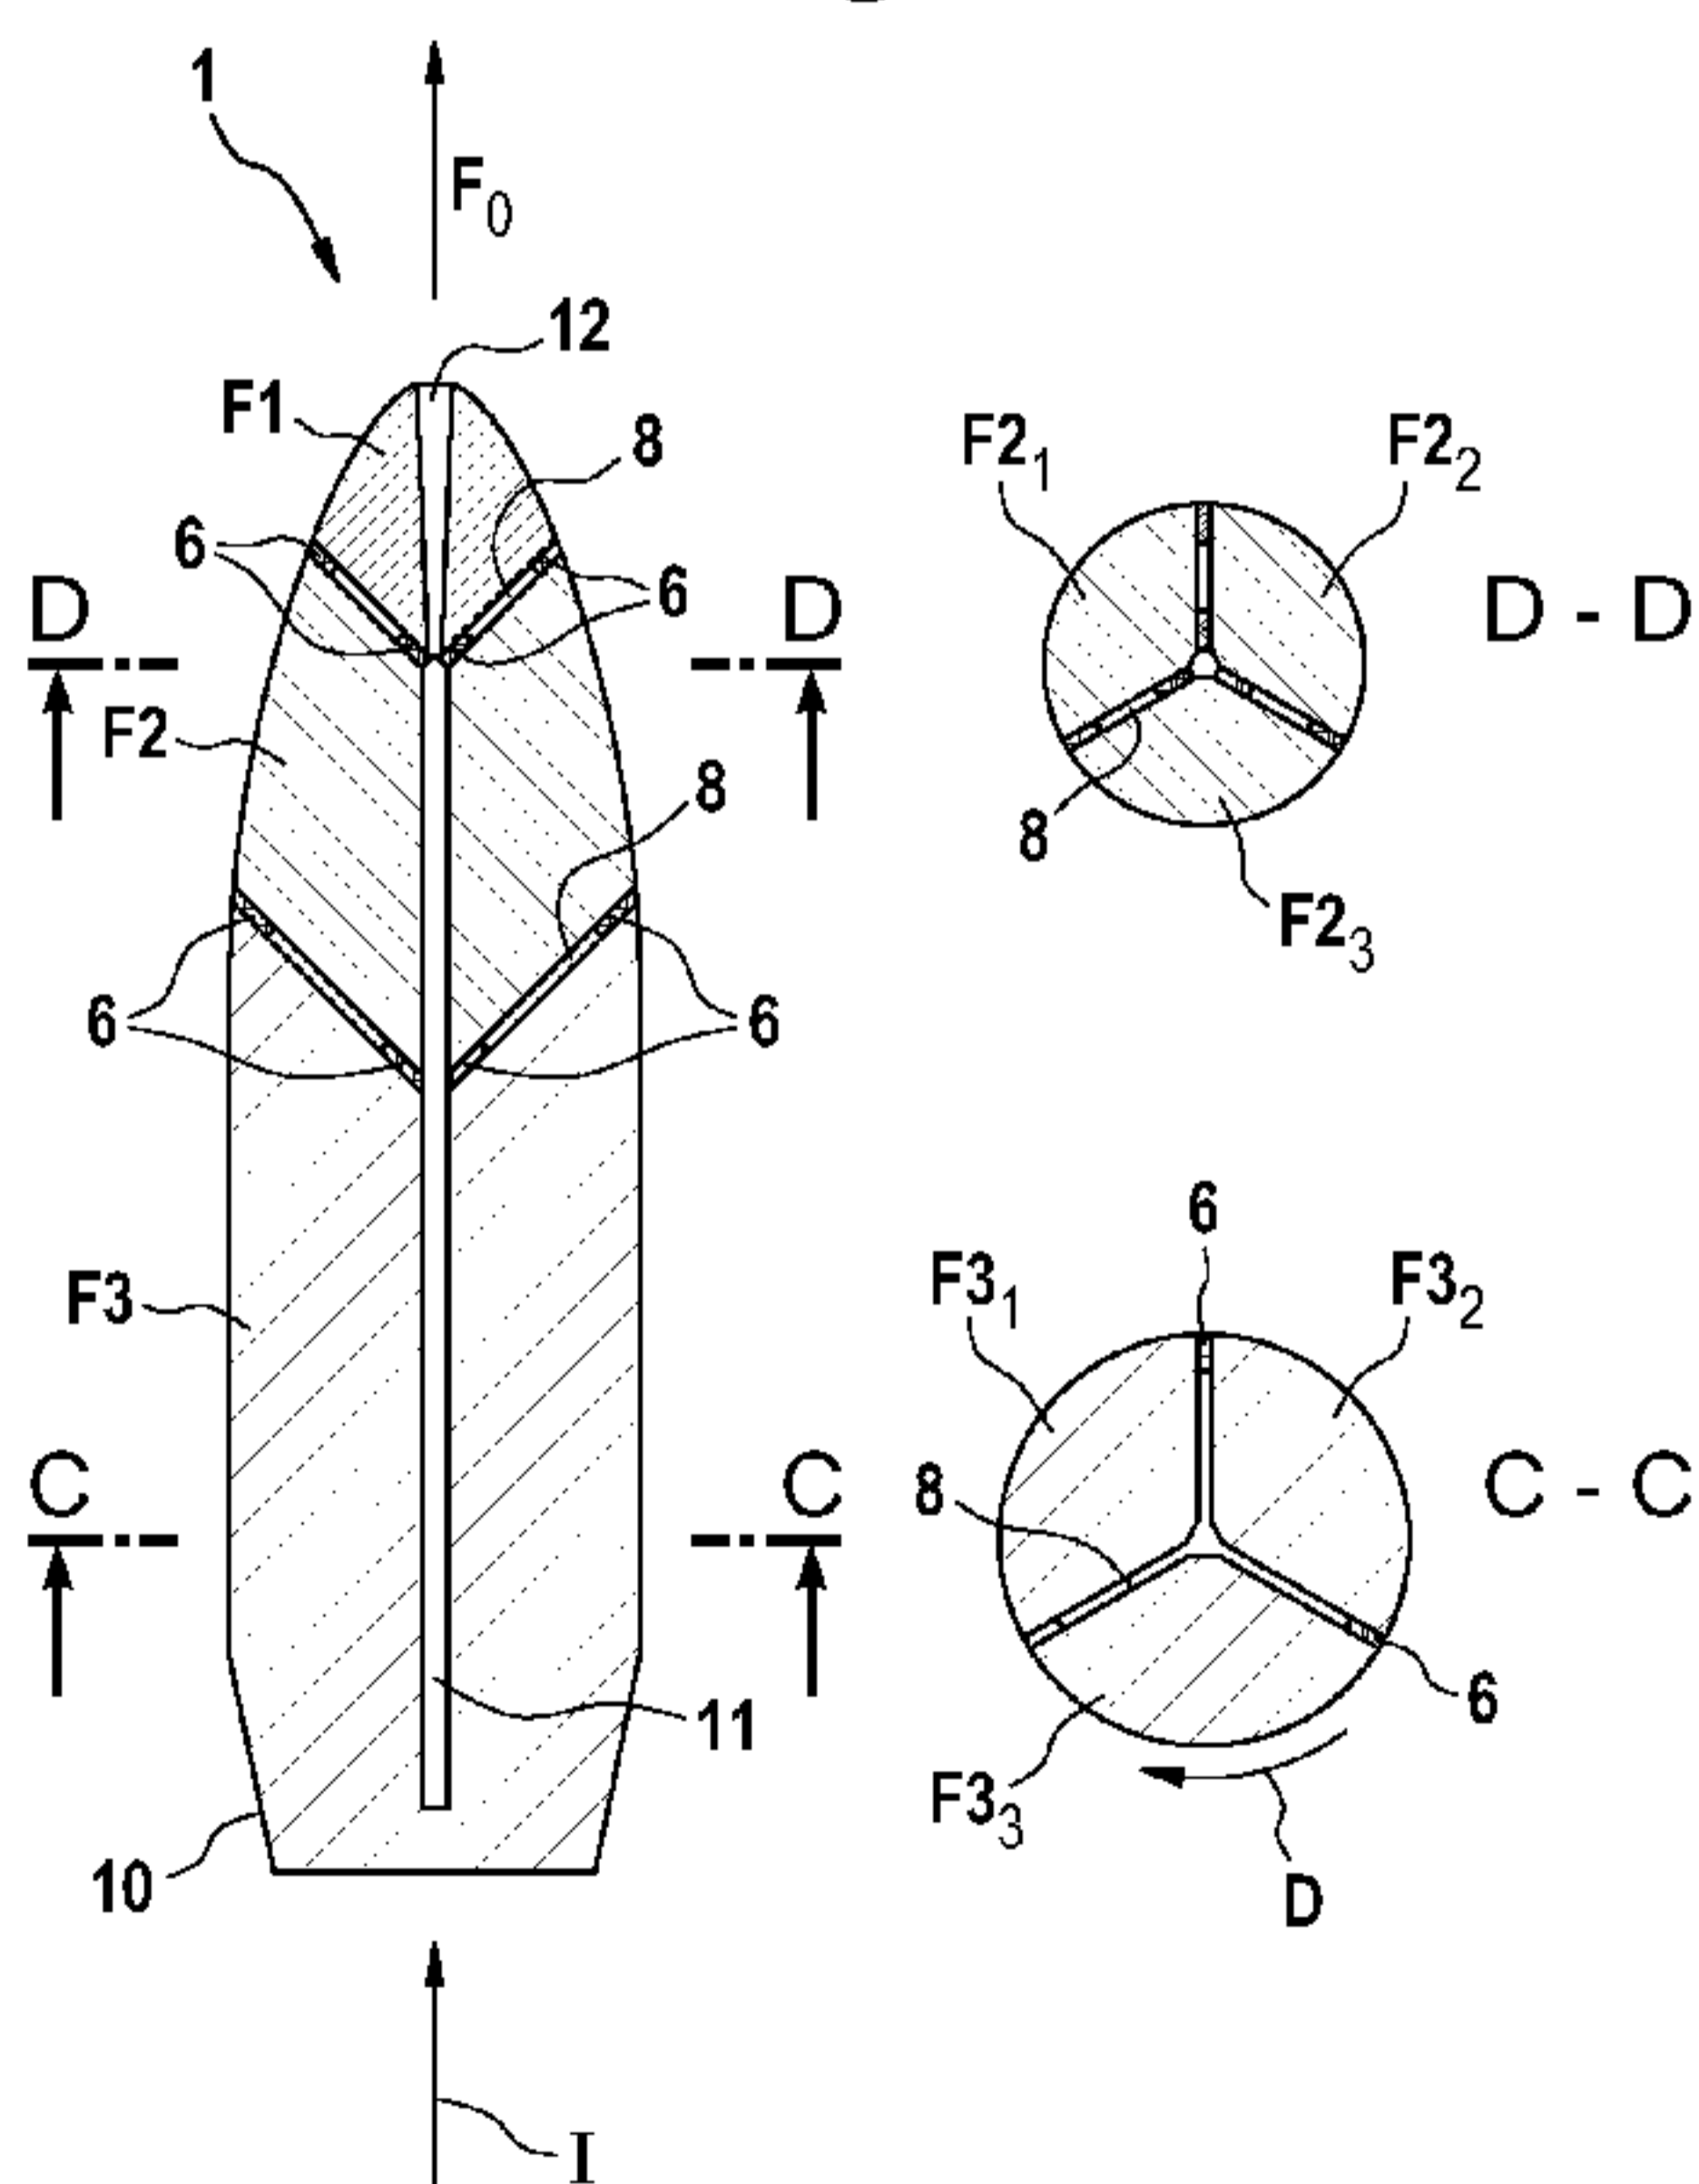

(57) Abstract: A fragmentation projectile (1) in one aspect has a frontal cavity (12) and defined segments (F1,F2,F3) of medium to high density. The segments are nearly form fitting together to form a compact projectile (1) until its impact on the target, where it splits into defined fragments. To achieve these specific mechanical properties, Additive Manufacturing (AM) methods are applied. The projectile (1) shows excellent flight properties and at firing distance high energy dissipation with corresponding high amplitudes.

**WO 2017/103741 A1** 

---

**Published:**

— *with international search report (Art. 21(3))*

Printed: 18/05/2017

DESCPAMD

PCT/IB 2016/057 423 = 02.05.2017  
IB2016057423

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 1a -

Improved Fragmentation Projectile and Method  
for its Manufacturing

---

The invention relates to a method of production of a medium  
5 to high density fragmentation projectile according to claim  
1.

Projectiles which split in a specific manner in the target  
are referred to as fragmentation projectiles. Such a pro-  
jectile is known from the EP -B1- 1 196 734 and features  
10 large recesses at its tip which are unfavorable from an  
aerodynamics point of view. The attempt is made to close  
the hole-type recesses in the tip by means of covers,  
plugs, etc. in such a manner that the aerodynamics is im-  
proved, but this leads to nonsymmetries. These nonsym-  
15 metries prove to be particularly unfavorable in soft tar-  
gets, where tumbling movements and undesired fragmentation  
effects occur which can in turn cause major injuries and/or  
collateral damage.

US -A1- 2006/0054047 discloses a multipurpose kinetic en-  
20 ergy projectile with a frontal cavity and partially nearly  
form fitting sub-projectiles of ductile heavy materials.  
The aim of this projectile is to increase the spreading ef-  
fect at the target and the penetrating power into a mono-  
block target. This object is primarily used as ship-board  
25 ammunition and in general for large caliber weapons. It  
cannot be adapted to special missions, e.g. for police ac-  
tions, hunting or underwater targets etc.

A frangible bullet with copper jacket (US -PS- 6,024,021)  
uses irregularly formed lead rods pressed together. On im-

AMENDED SHEET

02/05/2017

Printed: 18/05/2017

DESCPAMD

PCT/IB 2016/057 423 - 02.05.2017

IB2016057423

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 1b -

5 pact on soft targets the rods generate randomly formed fragments, which lose their kinetic energy shortly after impact. Such a projectile is useful only against very soft targets and would incur serious injuries, when used against humans or animals.

10 Another fragmentation projectile is known from EP -A1- 0 088 898 with a frontal cavity closed by a conical cap. Core elements are centered in a casing, which is screwed together to allow form fitting of the core elements. However the screw coupling is unstable at high accelerations and aerodynamically disadvantageous. Its use is limited to heavily armed targets.

15 Further a frangible projectile (US -PS- 4,603,637) is designed for gunnery practice. Several portions of cylindrical sections with frontal cones, are made of polymer material, and are stapled together and break apart indefinitely upon impact. Such an object cannot be used for military or police missions.

20 A subcaliber projectile with a discarding sabot is known from EP -A2- 0 989 381. A plurality of discs is arranged, one behind the other and glued together by polymer adhesives. This technology also results in fragments which are not reproducibly defined.

25 US -B1- 9,212,876 relates to a large caliber training projectile, made of one piece of steel, provided with stress riser sections to enable fragmentation. Alternatively the projectile is made of steel sections partially welded together around a central core. It is the aim of this invention to reduce Surface Danger Zone (SDZ) in training areas.

AMENDED SHEET

2

02/05/2017

Printed: 18/05/2017

DESCPAMD

PCT/IB 2016/057 425-02.05.2017

IB2016057423

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 1c -

Such a projectile results only in a minimal penetration depth of the fragments and is not usable for warheads.

5 KE-Warheads are depicted in US -B1- 8,662,001, using hydrostatic principles to generate breaking points. The resulting fragments are relatively large and are arranged around a central penetrator. The inherent relative motion of the fragments, when firing and on impact is useful to produce large damages on armed vehicles or buildings and is limited to such operations.

10 None of the cited prior art is universally adaptable to different calibers and cannot be optimized for special missions in short time. In addition prior art documents do not disclose projectiles which could be applied to stop and immobilize humans and animals without causing severe injuries.

15

It is the objective of the present invention, therefore, to create a projectile which splits in the target in a controlled manner into pre defined parts and further, if at all splitting into fragments of size, which are easily detectable.

20

A further objective of the invention is to achieve a trajectory which is to maximum extent identical with that of a full-jacketed projectile.

25 In the target, furthermore, a maximum of kinetic energy should be deposited as far as possible on the target's sur-

AMENDED SHEET

02/05/2017

face, and full penetrations of the target should be avoided if at all possible. The fragment penetration depth into soft targets should be predeterminable, especially where the ammunition is flying in the subsonic range.

No stability problems are allowed to occur on firing of the projectile. Splitting into fragments in the target is to take place suitable for the mission's purpose and in a controlled or oriented manner. The projectile should, at its impact, be able to act sensitively against a hydrodynamic axial strain. Furthermore, it should be possible, to optimize the penetration depth of the fragments according to e.g. wound-ballistics as well as according to collateral-damage criteria. Any resulting residual pieces should be as large and few as possible.

It should be possible to easily optimize the predetermined breaking points which are of importance in fragmentation projectiles. This, in accordance with the principles of modern fracture mechanics.

With a view to minimal wear in the launcher tube or weapon barrel the surface of the projectile should be suitable for optimization. In addition the surface of the projectile should be optimizable according to aerodynamic principles.

The projectile caliber according to the invention should be realizable for anything from handguns over military small-caliber weapons (ordnance) and hunting weapons right to large dimensions. By means of the projectile's mechanical properties it should be possible to easily master the tail strains on firing as well as the resulting centrifugal strains in the case of twist-stabilized projectiles, with-

out impairment of the further goals of the subject-matter of the invention.

The manufacturing process of the fragmentation projectile should enable a high precision of the projectile shape and present the least possible design barriers, so that even so far unrealized projectile shapes become possible. - The preferred manufacturing process must be able to realize topology-oriented projectile designs.

A fragmentation projectile in accordance with the invention is characterized by the features that the fragments are nearly form fitting together to form a compact projectile until its impact on the target. - The term "nearly form fitting" means that the distances between the individual fragments do not exceed 100  $\mu\text{m}$ .

Advantageous developments of the subject of the invention are discussed below.

The fragmentation projectile in accordance with an embodiment is designed in such a manner that only a minimum of form fitting connections are planned to convey the kinetic energy to the target, and not to carry out the deformation work.

Preferred - according to current perception - are fragments comprising brass or bronze and/or a lead-free alloy of both, since they cause only little wear in the launcher tube even without additional coating.

Fragmentation projectiles wherein the fragments extend around a core of tungsten or wherein central fragments are

of tungsten and/or an alloy thereof are recommended if the penetration capacity should be increased.

The manufacture of projectiles wherein the projectile comprises a steel alloy and wherein its surface is coated is inexpensive and causes no exceptional problems in the production process.

Coatings comprising tin, copper or an alloy thereof are basically wellproven in weapon systems.

A multiple, frame-like structure in accordance with another embodiment improves the desired fragmentation effect in the target.

A maximum aperture of the front cavity amounting to 0.2-times of the projectile's calibre is a fraction of what is common according to state of the art technology and guarantees an optimal aerodynamics and energy deposition in the target.

Fragments arranged in axial direction serve to achieve a good fragmentation effect.

A structure wherein the fragments are shaped in radial direction provides for fragments which transmit an optimum of energy onto the surface of a target and which penetrate the target to a relatively minor extent only.

The distances between the fragments ranging from 3  $\mu\text{m}$  to 100  $\mu\text{m}$  are aerodynamically favorable and guarantee the desired effect in the target despite few connecting points.

Composites are easier to optimize with regard to their density than metal alloys. This enables novel projectile designs.

Composite materials containing ceramics and/or polymers can readily be used for a desired shifting of the point of gravity in a projectile design.

A cavity having at least in its front area the shape of an equilateral triangle has proved to be particularly suitable since the sharp angles of an equilateral triangle result in the maximum and central notch effect for the fragmentation in the target.

A spiral-shaped layout of the cavity, triangular in its cross-section, can serve for the radial distribution of the fragments if the fragments are shaped against the projectile 's direction of twist.

Kinetic-energy projectiles, in particular dart bullets, require the release of the jacket in flight to be as reproducible as possible. This is made possible by the design wherein the tip of a dart projectile is located in the cavity.

In principle all embodiments mentioned above are suitable for pistol ammunition.

These embodiments are suitable for both police ammunition and, adapted to the desired target effect, as military small-caliber ammunition.

Analogously to police ammunition, the target effect can be aligned to nearness, a highly important aspect for flight

attendants in order to prevent serious damage to the aircraft's hull (windows, etc.); so-called marshal ammunition.

Combinations of the above fragmentation projectile embodiments can be taken advantage of in perfectly suitable hunting ammunition since perforations can be eliminated thanks to the fragmentation.

Combating targets under water with fragmentation projectiles is a particularly delicate task because the projectiles frequently split already on impacting the water surface. The subject-matter of the invention can cope also with this problem by a suitable number of integral material fitting connections. Alternatively, dart ammunition can be used whose outer body (fragments) detaches on impacting the water surface and the dart as a tail-stabilized projectile shoots through the water in a straight line.

Analogously to small-caliber ammunition, large-caliber ammunition can be designed so that the subject matter of the invention can also be applied to it.

In the case of subsonic projectiles, for example, the texture of the surface can be structured with the intention of reducing the flow resistance, cf. WO -A1- 2013/020976. The projectile's tip, furthermore, can be provided with a small vibration damper; cf. EP -A2- 2 314 980.

Using conventional manufacturing methods and equipment, the afore-described topology-oriented designs cannot be produced at all or only in connection with major disadvantages. An "Additive Manufacturing" (AM) manufacturing proc-

ess, on the other hand, is perfectly suitable for such designs.

From today's point of view producing the projectile on the basis of "Direct Metal Deposition" (DMD) with "Multipowder Feeder" and by "Laser Powder-Spray Manufacturing" (LPM) permits to increase the production rate and decrease the production costs compared with other methods.

All processes of Additive Manufacturing (AM) permit to carry out subsequent mechanical finishing if appropriate, whereby particularly advantageous appear to be the ones wherein prior to its fitting into a cartridge, the projectile is smoothed by grinding and/or barrel finishing.

For the formation of gaps according to the process wherein the radiation source or fed between the fragments to be formed is switched off for such a length of time that, of the fed or existing metal or ceramic or polymer powder, 1 to 6 grains are not melted or sintered.

In the following schematically illustrated embodiments will be shown and described. These can be produced by Additive Manufacturing (AM):

Fig. 1 shows a subsonic projectile with its cartridge and propellant whereby the projectile is segmented and splits on impact into three longitudinally parts,

Fig. 2 shows alternatively, a subsonic projectile which is segmented to split on impact into three rotationally oriented parts,

Fig. 3 shows the projectile of Fig. 1 seen from above in direction A, with its three longitudinally oriented segments,

Fig. 4 shows the schematic structure of a further development of a projectile according to Fig. 1,

Fig. 5 shows an implemented variant of a projectile according to Fig. 4 in sectional presentation, consisting of different materials,

Fig. 6 shows the energy dissipation of an inventive projectile in relation to Prior Art,

Fig. 7 shows the velocity of an inventive projectile versus Prior Art,

Fig. 8 shows fragmentation of an inventive projectile,

Fig. 9 shows fragmentation of a conventional projectile,

Fig. 10 shows a dart ammunition in schematic presentation for underwater use,

Fig. 11 shows the dart ammunition on impacting the water surface and

Fig. 12 shows the dart ammunition in the water on its way to the target.

Evident in Figs. 1 to 3 are two schematic presentations of subsonic projectiles 1, 1' with their cartridges 2, of the type intended as small-caliber ammunition for police interventions. The cartridges 2 are provided in the known manner

with a propellant charge 3, an ignition charge 4 and a fuse 5.

The presentation in Fig. 3 shows that a triangular cavity 7 follows the three segments  $F_A$ ,  $F_B$ ,  $F_C$ . The segments  $F_A$ ,  $F_B$ ,  $F_C$  are linked to each other by integral material fitting connections in the spots marked 6, so that after firing of projectile 1 until its impact on the target, they stay together as one compact body with good flight properties.

On impact on the target the segments  $F_A$ ,  $F_B$ ,  $F_C$  are torn apart and spread over a large area of the target. Such an ammunition could be fired on e.g. an escaping vehicle so that it might lose its fuel and/or the air from its tires.

Alternatively to Fig. 1, the projectile 1' according to Fig. 2 is divided into three radial segments  $F_1$ ,  $F_2$ ,  $F_3$ . During its flight, this projectile 1' is again held together by integral fitting material connecting spots 6.

An arrow in Fig. 2 points at one connecting spot 6, seen on an enlarged scale next to projectile 1'. This connecting spot 6 acts as spacer between adjacent segments  $F_1$  and  $F_2$ .

This type of projectile could also be fired in a police intervention on escaping persons, since it can transmit a maximum of energy onto a body surface and thus cause the escaper to fall.

These projectile shapes can be produced with precision by Additive Manufacturing (AM). The cavity 7 in Fig. 1 has an edge length amounting to 0.1 of the caliber, while the crevices 8 between the fragments  $F_A$ ,  $F_B$ ,  $F_C$  (see Fig. 3)

amount to 50  $\mu\text{m}$  each. The projectile in Fig. 2 features canteen-shaped crevices 8 of 10  $\mu\text{m}$  each between the segments F1, F2 and F3. These small crevices can in turn be produced easily by AM in that the radiation source is specifically and temporarily switched off during the AM process. Inversely, by returning the energy supply to the radiation source, the usually powdery materials are melted together with the fragments to be connected in the desired connecting spots 6.

The crevices between the segments can vary. Due to the high impulse on firing, for example, it is recommended to select smaller crevices in the tail section of the projectile and bigger ones in the front section. Moreover, the shapes of the segments can be combined with each other according to the principles of Fig. 1 and Fig. 2. Also, the crevices do not have to run parallel and/or the connecting spots can be distributed non-symmetrically. The latter in order to influence the direction of flight and the penetration of defined segments. In the target as well as parts of the segments split into smaller fragments. The choice of material for the fragments is nearly unlimited. As indicated in Fig. 4 by different hatches, the type of material can change either from segment to segment or also within a segment. With all its design variables the subject-matter of the invention can be adapted to the effect desired in the target. Furthermore, AM provides the possibility of developing projectiles customized for the application purpose, the strategy and the intervention doctrine, this within the shortest of time. A further benefit is that the projectile can be laid out for new tasks at short notice, for example to fight terrorism, without a need to change production methods.

The concept according to Fig. 4 shows a projectile 1 of bronze of caliber 7.62 which, on being fired, is accelerated with an impulse I and leaves a rifle barrel still as a compact projectile in flight direction  $F_0$ . The segments are again denoted as F1 to F3 and the tail 10 is strongly tapered. A triangle-shaped inner cavity 11 extends over the biggest part of the projectile's length, while a smaller cavity 12 at the front of the projectile has a break-out function at the target for the segments F1 to F3. The cross-sectional view C and view D disclose the crevices' size and ratio and show the subsequent fragmentation to segments  $F3_1$ ,  $F3_2$  and  $F3_3$ ;  $F2_1$ ,  $F2_2$  and  $F2_3$ . Segment F1 forms analogous fragments. Well apparent are the integral fitting material connections 6 between the individual elements (segments) and their dimensions in relation to the caliber.

Of particular significance is the shape of the cavities 11 and 12, in their cross-section equilateral triangles with sharp angles of  $60^\circ$ , which result in a high notch factor so that an impeccable fragmentation is ensured already by the fracture mechanics. These shapes cannot be produced by means of conventional machining equipment and tools. Corresponding processes are described below.

A real projectile shape is shown in Fig. 5; the segments in the same section are again denoted as F1 to F3, and the integral fitting material connections 6 are also indicated. It can be seen here that the angle of the crevices 8 formed between segments F2 and F3 is smaller than that formed between segments F1 and F2. This design helps to transfer the impulse I to the front point of the projectile 1 thus increasing its penetration depth.

Additionally the segments of this projectile 1 are made of different materials, i.e. metals with different physical properties like specific density, hardness, and sliding properties etc. This allows an adaptation of the projectile as to the intended efficacy at the target.

Diagram Fig. 6 shows the measured energy dissipation in Joule per cm in dependence on the penetration depth in ballistic soap at a distance of 200 m. The results of the inventive fragmentation projectile of caliber 7.62 are marked AM and shown as an uninterrupted line, whereas the results of a state of the art projectile of the same caliber are marked Prior Art and shown as an interrupted line.

It is evident that, compared with the projectile of state of the art technology, the inventive projectile marked AM displays roughly three times higher energy dissipation with corresponding amplitudes at a firing distance of 200 m. Also remarkable are the peak values of the inventive projectile at a penetration depth of 8 to 13 cm.

The trajectories of the two projectiles are shown analogously in Fig. 7. It is remarkable that the two projectiles, after an identical firing velocity  $v_0$  of 320 m/s, display such different end velocities after a distance of 200 m: AM = 294 m/s against only 244 m/s of the state of the art technology projectile.

The fragments distribution of an inventive, additive manufactured projectile AM is characterized by few large and easily removable fragments F as shown in Fig. 8.

Fig. 9, on the other hand, shows according to prior art, a multitude of small fragments S which are removable only with difficulty or not at all, being spread over a wide area.

For graphic reasons the fragments F and S in Fig. 8 and 9, respectively, are shown in one plane, whereas in reality they are radially distributed in the direction in which they entered the target.

The discussed example of a projectile, was produced as a prototype by 3D printing applying the Powder Bed Laser Beam Technology (LBM) process. It consists of: Cu 77.0%, Ni 14.7%, Sn 6.8%, P 1.5% (percent by weight) with a grain size of 53  $\mu\text{m}$  to 99%.

Figs. 10 to 12 are intended to outline a possible special application. According to Fig. 10 a projectile 1" is fired with velocity  $v$ , from above a water surface at an underwater target. An arrow or dart 13 is located in the projectile's central hollow space 9 formed by the segments F1. The projectile 1" impacts the water surface at speed  $v'$ , Fig. 11. The segments F1 are torn away on impact. Arrow 13 now penetrates the water, Fig. 12, and shoots, stabilized by its tail 14, in a straight line towards its target.

Compared with conventional design methods and their associated material-technical and equipment-technical limitations, topology-oriented designs allow basically new projectile shapes with specific and improved functions and effects.

All designs disclosed here can be manufactured without need for special tools, directly by means of Computer Aided Design (CAD) in the sense of Computer Integrated Manufacturing (CIM) and produced efficiently in small series. The overview given hereafter allows the ordinary man trained in the art, to select the production process suitable for the application on hand and to find the adequate machinery.

#### Manufacturing of projectiles according to the invention

The new design demands special kind of manufacture. At present metal 3D printing technologies are foreseen. The respective terminology is applied in many different ways, whereas different names are used by different equipment manufacturers. Norms and standardization are only on their way. Three main types of 3D printing technologies are:

1. Powder Bed Laser Beam Technology (LBM)
2. Powder Bed Electron Beam Technology (EBM)
3. Powder Spray Laser/Electron Beam Technology (LFM/EFM)

LBM renders high precision and low roughness of surfaces and is mainly used to produce complex internal cavities. - Velocity of production is slow.

EBM is faster than LBM; results in lower thermal stresses due to preheating of the powder. - The resulting texture is relatively rough and complex internal cavities are at present not possible.

LFM/EFM allows the production of large parts as well. - In particular EFM calls for production in vacuum or in Helium atmosphere; equipment and maintenance are costly. Both LFM

and EFM at present do not allow complex structures nor to influence material properties in different layers of product, and are less precise than the two foregoing methods. The further development of the conventional metallization technology (metal jet) to Direct Metal Deposition (DMD) with multi power feeder to Laser Powder-Spray Manufacturing (LPM) seems to be very promising for AM of large quantities also of small products like small calibre projectiles.

As a result of the high quantities of projectiles needed, only Additive Manufacturing (AM) seems to be appropriate. Selective Laser Melting (SLM), a method belonging to the first listed LBM, allows using a wide range of powder materials e.g. based on Iron, Nickel, Aluminum, Titanium, and also of brass and bronze alloys in an atmosphere of Argon or Nitrogen. Generally alloys with low melting point and vapor pressure may obstruct the optical devices of equipment and therefore need special care. Conventional laser systems are, due to reflections and low energy absorption, not recommended for additive manufacturing of designs with copper alloys; newly developed blue and green pulse-lasers seem to be more suitable.

Basically all methods of AM are applicable to new designs of projectiles. In other words, new manufacturing methods with improved material technology allow new designs and precise load calculations and computer simulations by using the methods of fracture mechanics. Material textures of requested properties (metallographic micrographs) could be designed and realized for special needs. It would be possible to combine or integrate different AM methods either into the same equipment or in different steps of manufacturing.

Conventional metal forming by cutting e.g. by grinding or barrel finishing (Trowalisieren<sup>®</sup>, Trade Mark of Walther Trowal GmbH & Co. KG, D-42781 Haan) can easily be added to AM.

Today's AM technologies are limited to quantities of up to 3,000 pieces, due to costs and equipment. The demand for large quantities, like those for projectiles, is expected by experts to be adequately produced at appropriate costs after the year 2025.

List of designations

---

- |       |   |
|-------|---|
| 1, 1' | Projectiles                                   |
| 1"    | Projectile for underwater target              |
| 2     | Cartridge                                     |
| 3     | Propellant charge                             |
| 4     | Ignition charge                               |
| 5     | Fuse  |
| 6     | Connecting spots                              |
| 7     | Cavity, triangular ( $\Delta$ )               |
| 8     | Crevice                                       |
| 9     | Hollow space                                  |
| 10    | Tail of 1                                     |
| 11    | Inner cavity (central, triangle shaped)       |
| 12    | Smaller cavity (front)                        |
| 13    | Dart (underwater projectile)                  |
| 14    | Tail (stabilization of underwater projectile) |

AM Additive Manufacturing / Inventive  
Projectiles

d Distance

I Impulse

F, S Fragments (in soap)

F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub> longitudinally aligned segments

Pd Penetration depth

v<sub>0</sub> Firing velocity

v Flight velocity

v' Momentary flight velocity

F<sub>0</sub> Direction of flight (after leaving the  
rifle barrel)

View C--C and D--D  
horizontal cuts

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 19' -

P a t e n t . c l a i m s

1. Process for the production of a fragmentation projectile (1-1") partially consisting of defined nearly form fitting segments ( $F_A, F_B; F1-F3$ ) of medium to high density, having connecting spots (6) between consecutive longitudinally and/or radially oriented segments ( $F_A, F_B; F1-F3$ ), whereby said segments ( $F_A, F_B; F1-F3$ ) and spots (6) are produced by additive manufacturing (AM), so that the segments ( $F_A, F_B; F1-F3$ ) are nearly form fitting and partly material fitting to keep together to form a compact projectile (1-1") until its impact on the target.
2. Process for the production of a fragmentation projectile (1-1") according to claim 1, characterized in that the projectile (1-1") is produced by "Powder Bed Laser Beam Technology" (LBM) process, whereby crevices (8) are created with the radiation source temporarily switched off for such a length of time that, of the fed or existing metal or ceramic or polymer powder, 1 to 6 grains are not melted or sintered.
3. Process for the production of a fragmentation projectile (1-1") according to claim 1 or 2, characterized in that the projectile (1-1") is produced by the "Powder Bed Laser Beam Technology" (LBM) process with a grain size of 53  $\mu\text{m}$  to 99%, consisting of Cu 77.0%, Ni 14.7%, Sn 6.8% and P 1.5% (percent by weight).

AMENDED SHEET

02/05/2017

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 20' -

4. Process for the production of a fragmentation projectile (1-1") according to claim 1, characterized in that the projectile (1-1") is produced on the basis of "Direct Metal Deposition" (DMD) with "Multipowder Feeder" and/or by "Laser Powder-Spray Manufacturing" (LPM).
- 5
5. Process for the production of a fragmentation projectile (1-1") according to one of the claims 1 to 4, characterized in that, prior to its fitting into a cartridge (2), the projectile (1-1") is smoothed by grinding and/or barrel finishing.
- 10
6. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claims 1 to 4, with defined nearly form fitting segments (F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub>; F<sub>1</sub>-F<sub>3</sub>) of medium to high density, characterized in that consecutive segments (F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub>; F<sub>1</sub>-F<sub>3</sub>) are nearly form fitting with crevices (8) ranging from 3 μm to 100 μm preferably from 8 μm to 10 μm and that with partially material fitting connecting spots (6) form a compact projectile until its impact on the target.
- 15
- 20
7. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 6, characterized by a frontal cavity (7) and spots (6) between defined segments (F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub>) and in the frontal cavity (7), whereby the segments (F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub>) are nearly form fitting together to form a compact projectile until its impact on the target.
- 25

AMENDED SHEET

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 21' -

- 8. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 7 characterized in that the cavity (7) has at least in its front area the shape of an equilateral triangle.
- 5 9. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 7, characterized in that the cavity (7) is at least in one front segment (F1) of spiral shape in opposite direction of the projectile's twist (D).
- 10 10. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 7 or 8 or 9 characterized in that the frontal cavity (7) features a maximum aperture amounting to 0,2-times of the projectile's caliber.
- 15 11. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 6, characterized in that the segments (FA,FB,FC;F1-F3) consist of brass or bronze and/or of a lead-free alloy of both.
- 20 12. Fragmentation projectile (1") produced by additive manufacturing (AM) according to claim 6, characterized in that the segments (FA,FB,FC;F1-F3) extend around a dart(13) of tungsten or that central segments are of tungsten and/or an alloy thereof.
- 25 13. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 6, characterized in that the projectile (1-1") consists of a steel alloy and that its surface is coated.

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 22' -

14. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 13, characterized in that the coating consists of tin, copper or an alloy thereof.
- 5 15. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 6, characterized in that the segments (F<sub>A</sub>, F<sub>B</sub>, F<sub>C</sub>; F1-F3) form a frame of at least two parts which frame (F<sub>A</sub>, F<sub>B</sub>) remains connected until the impact on the target and  
10 which features a decreasing resistance to fracture towards the tip (F1).
16. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 6, characterized in that at least a part of the segments consist of a composite material.  
15
17. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 16, characterized in that the composite material contains ceramics and/or polymers.
- 20 18. Fragmentation projectile (1-1") produced by additive manufacturing (AM) according to claim 7, characterized in that in the cavity (7) the tip of a dart projectile is located.
19. Use of a projectile (1-1") according to at least one  
25 of the claims 6 to 17 as pistol ammunition.
20. Use of a projectile (1-1") according to at least one of the claims 6 to 17 as police ammunition.

AMENDED SHEET

02/05/2017

Printed: 18/05/2017

CLMSPAMD

PCT/IB 2016/057 423 - 02.05.2017

B2016057423

RUAG Ammotec AG

39190 PCT  
(27.04.2017)

- 23' -

21. Use of a projectile (1-1") according to at least one of the claims 6 to 17 as military small-caliber ammunition.
- 5 22. Use of a projectile (1-1") according to at least one of the claims 6 to 17 as ammunition for hunting purposes.
23. Use of a projectile (1-1") according to at least one of the claims 6 to 16 as mortar or artillery ammunition.
- 10 24. Use of a projectile (1-1") according to claim 18 as ammunition for underwater targets.

15

AMENDED SHEET

5

02/05/2017







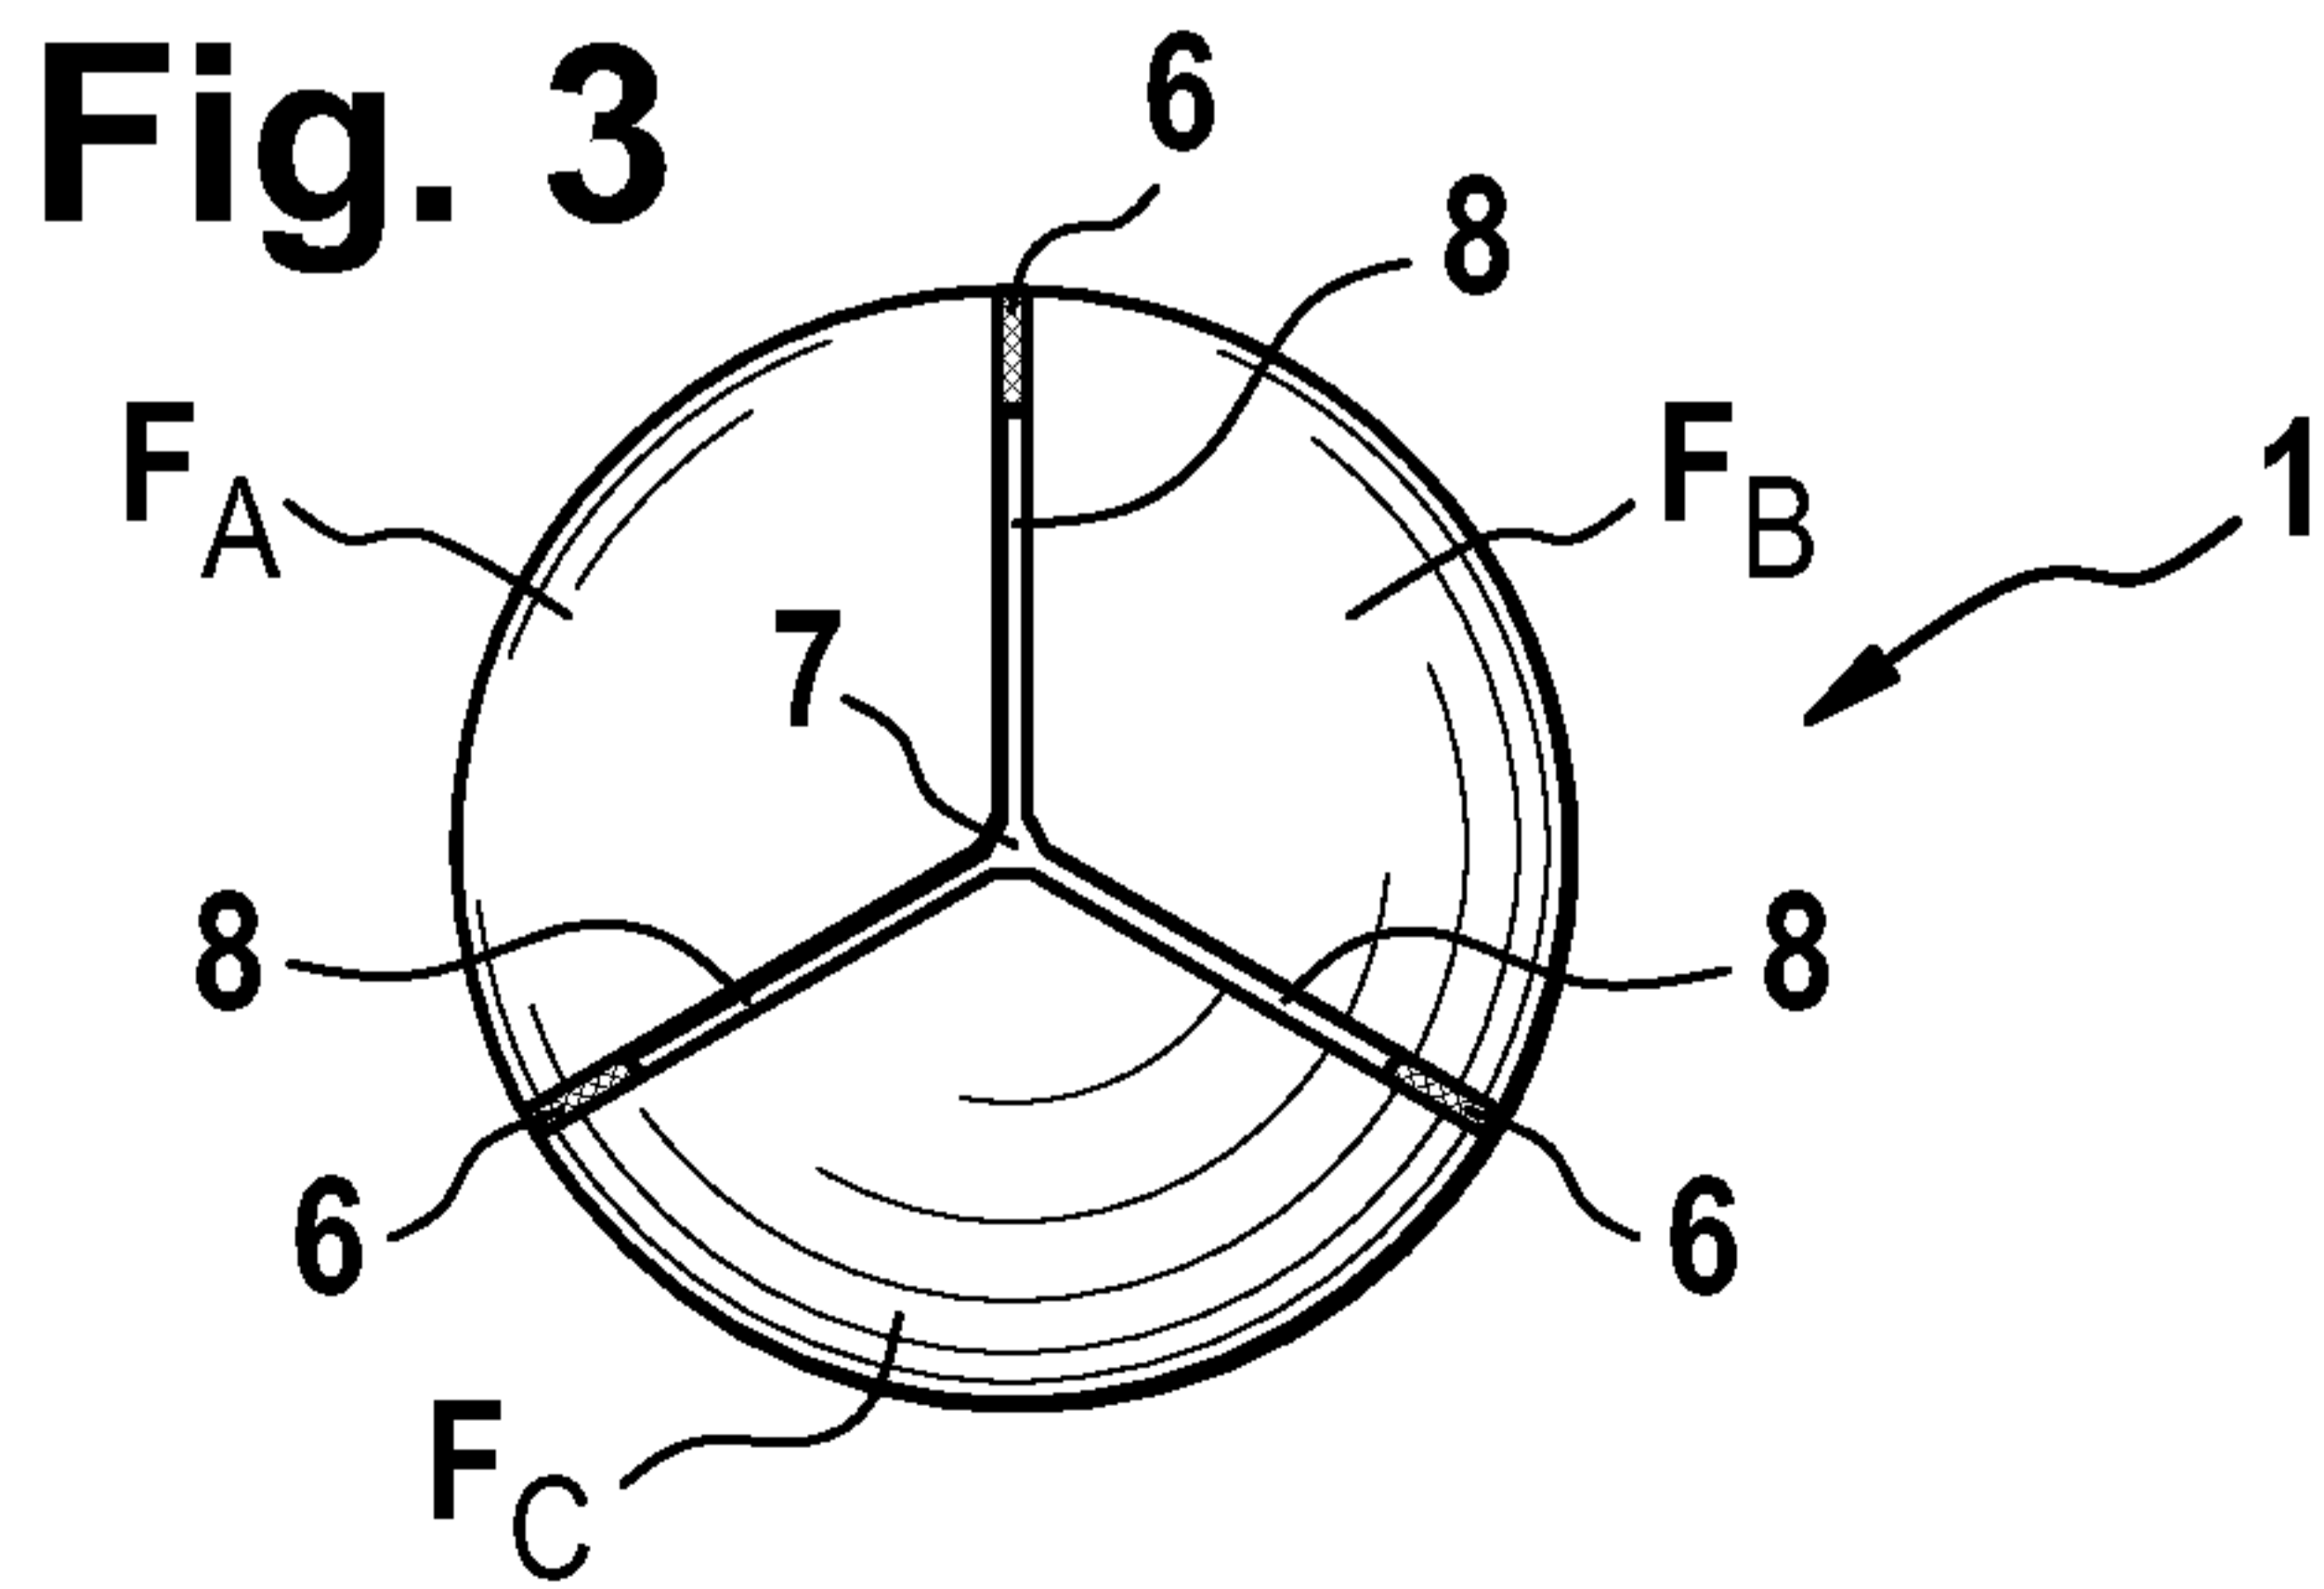


Fig. 4

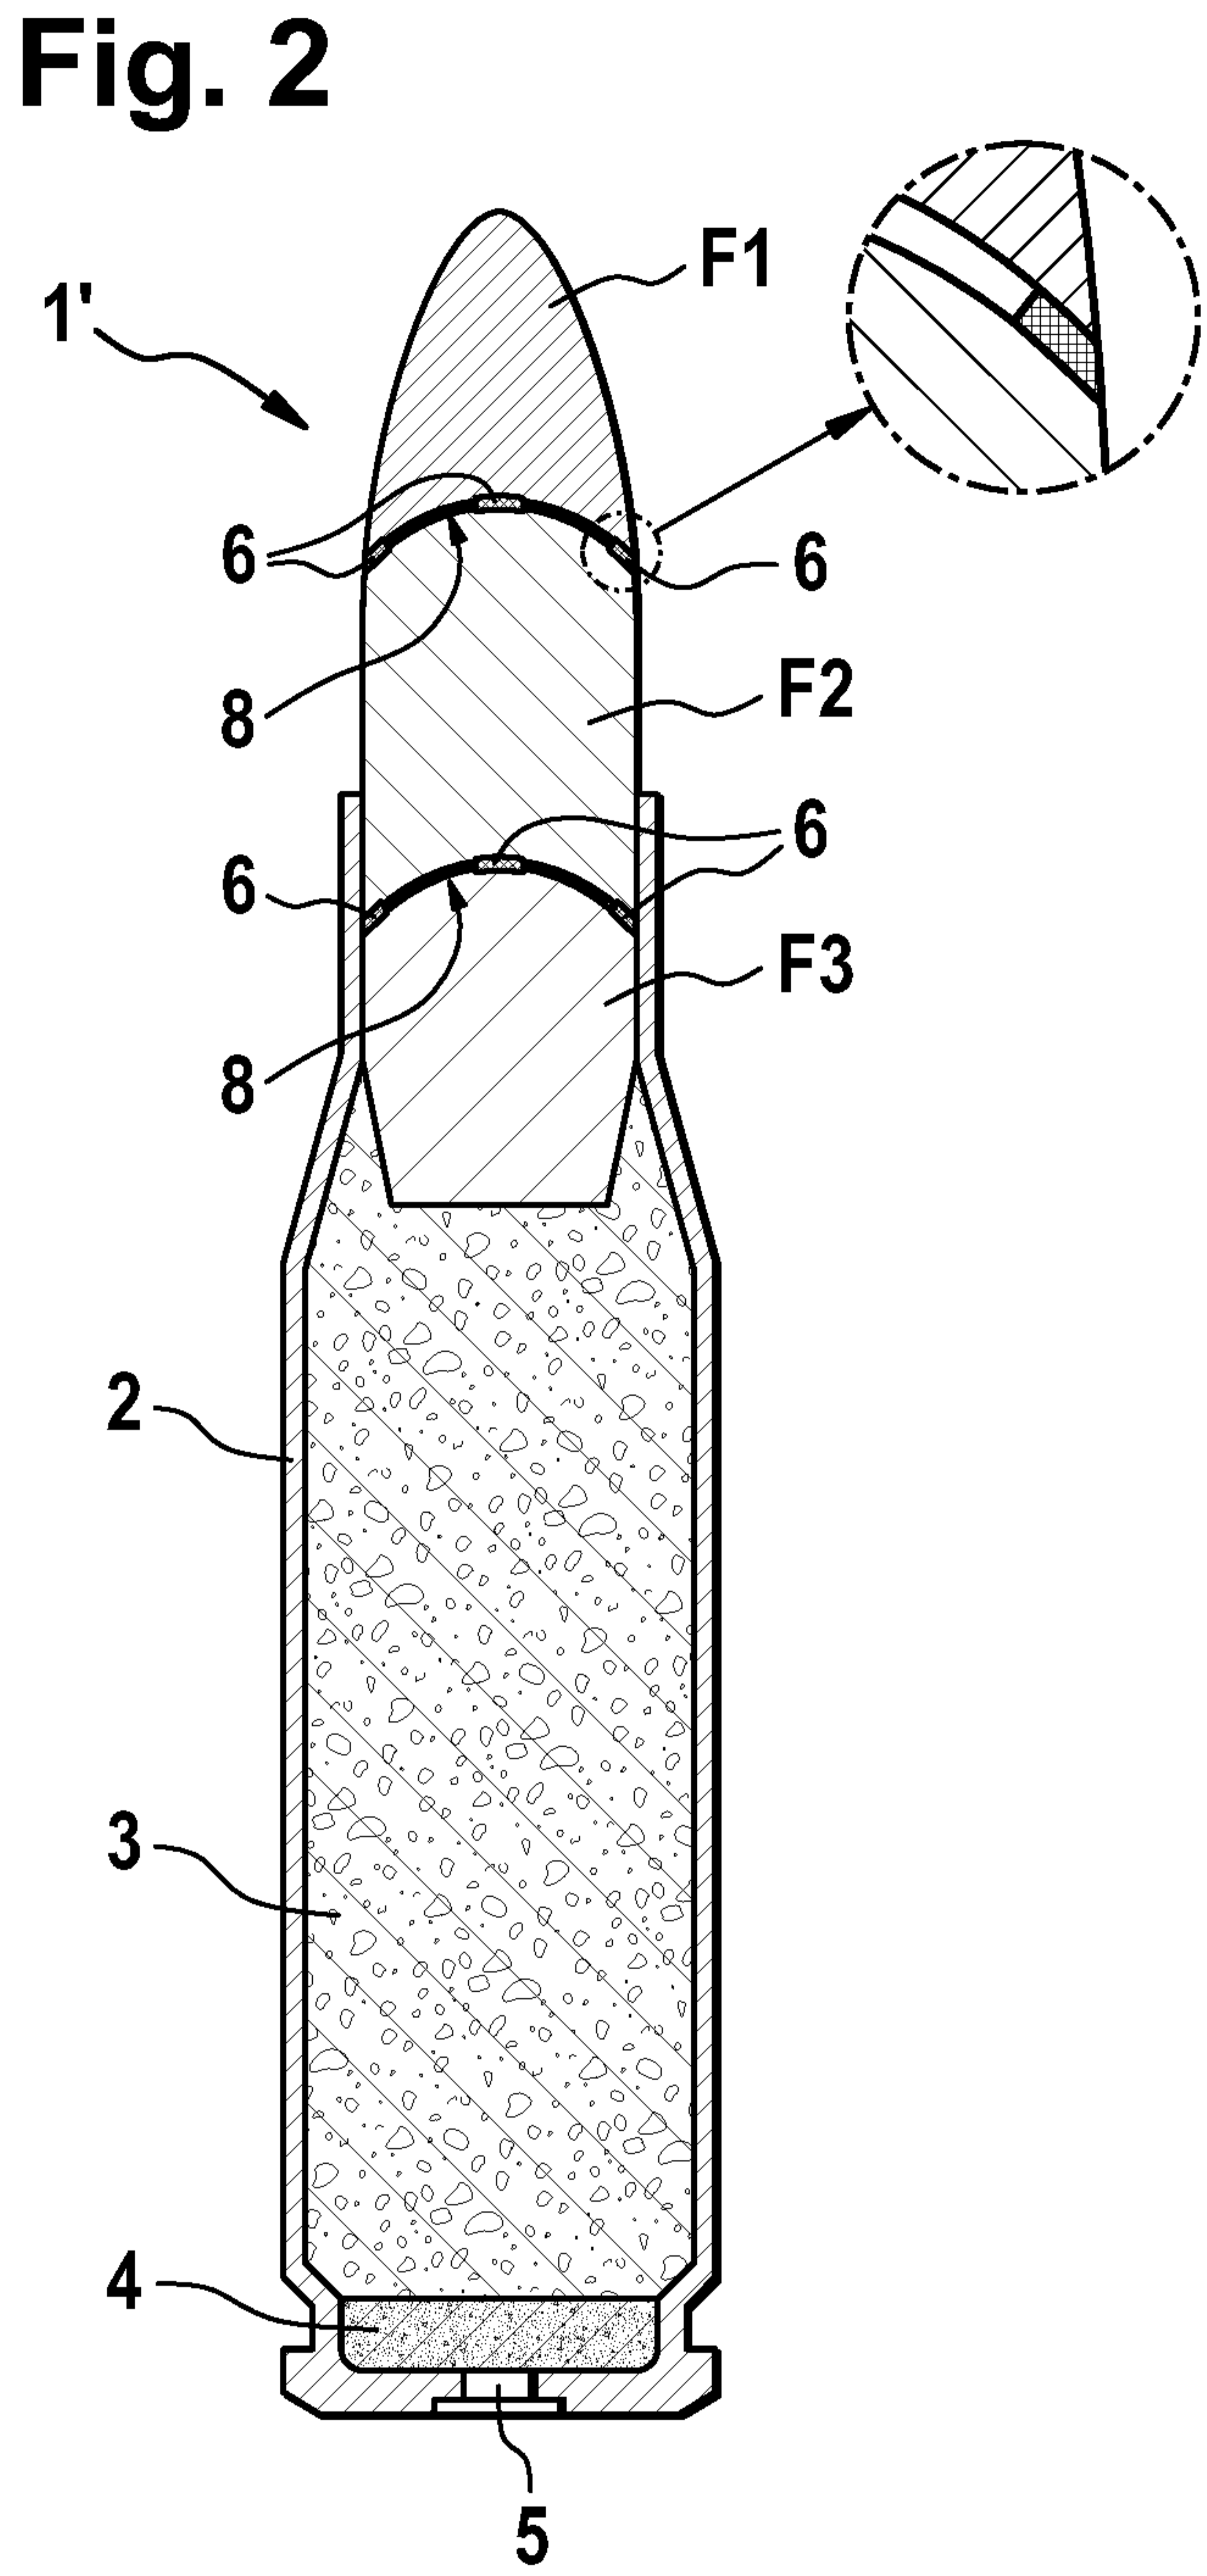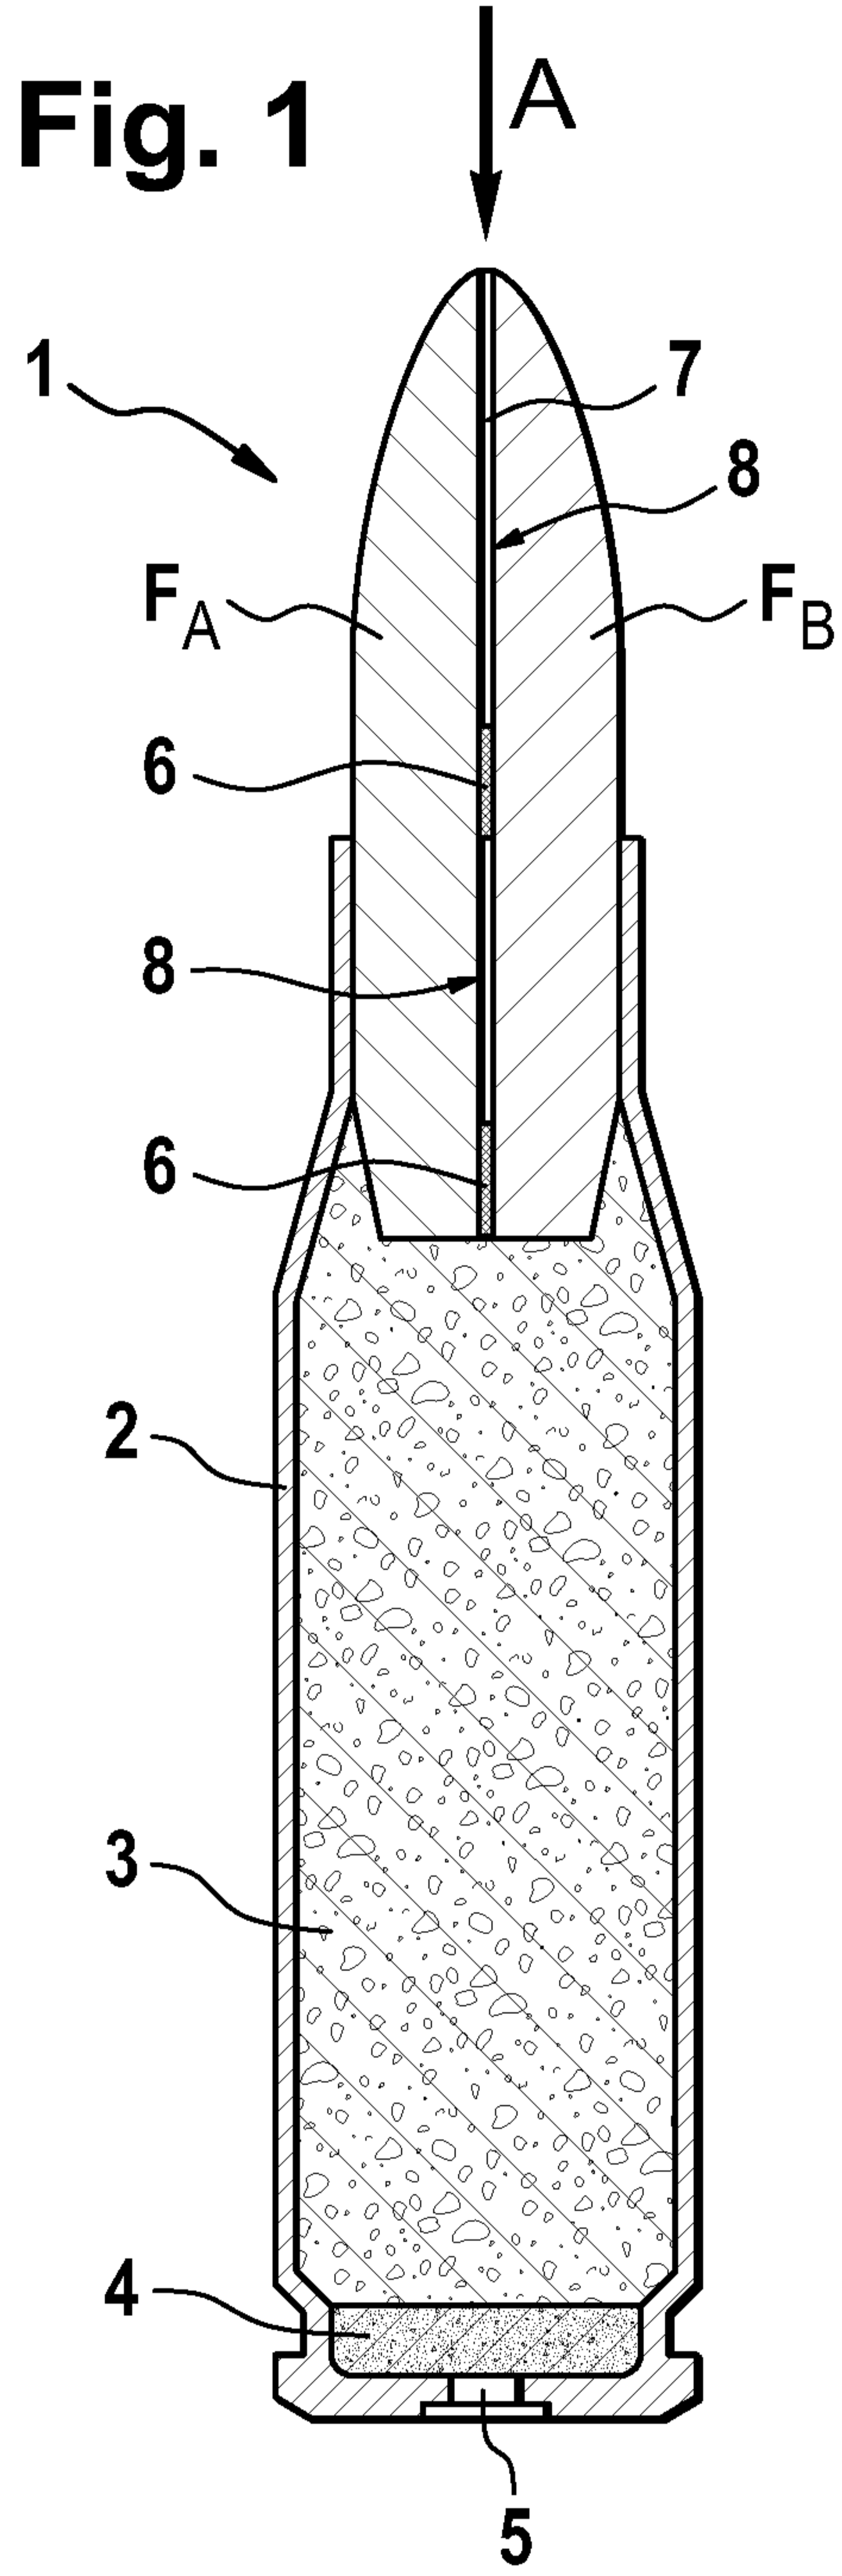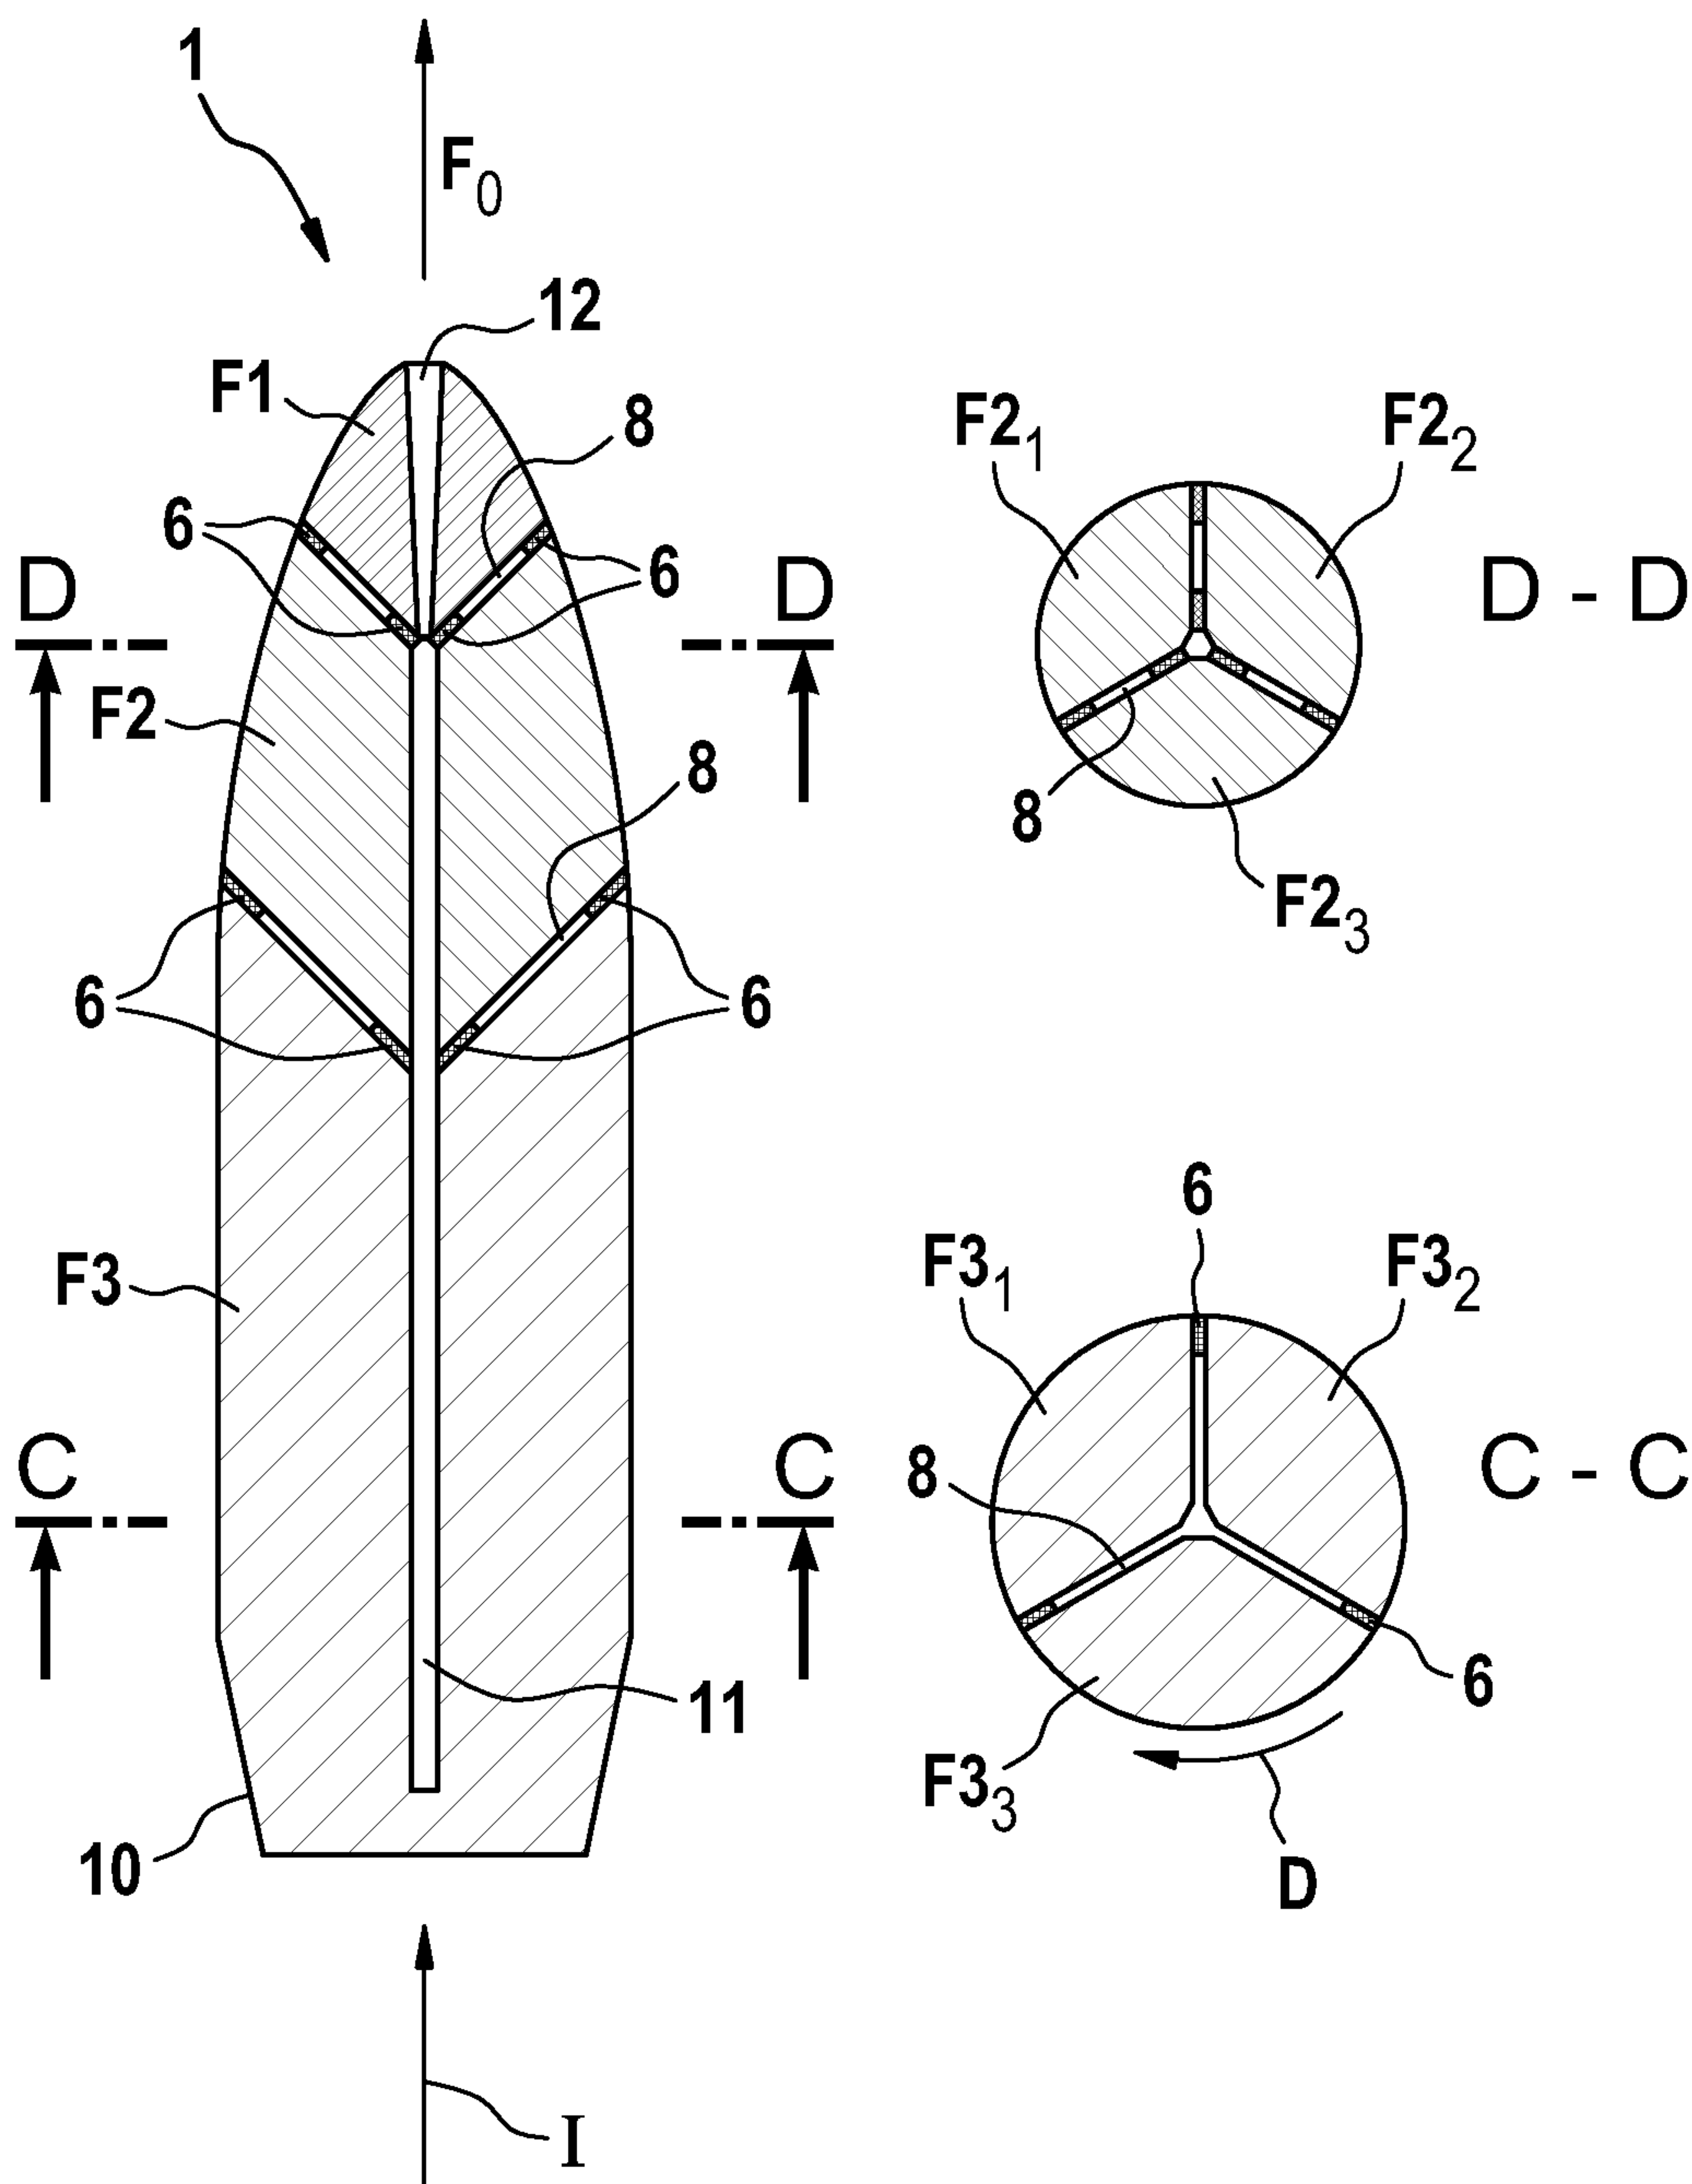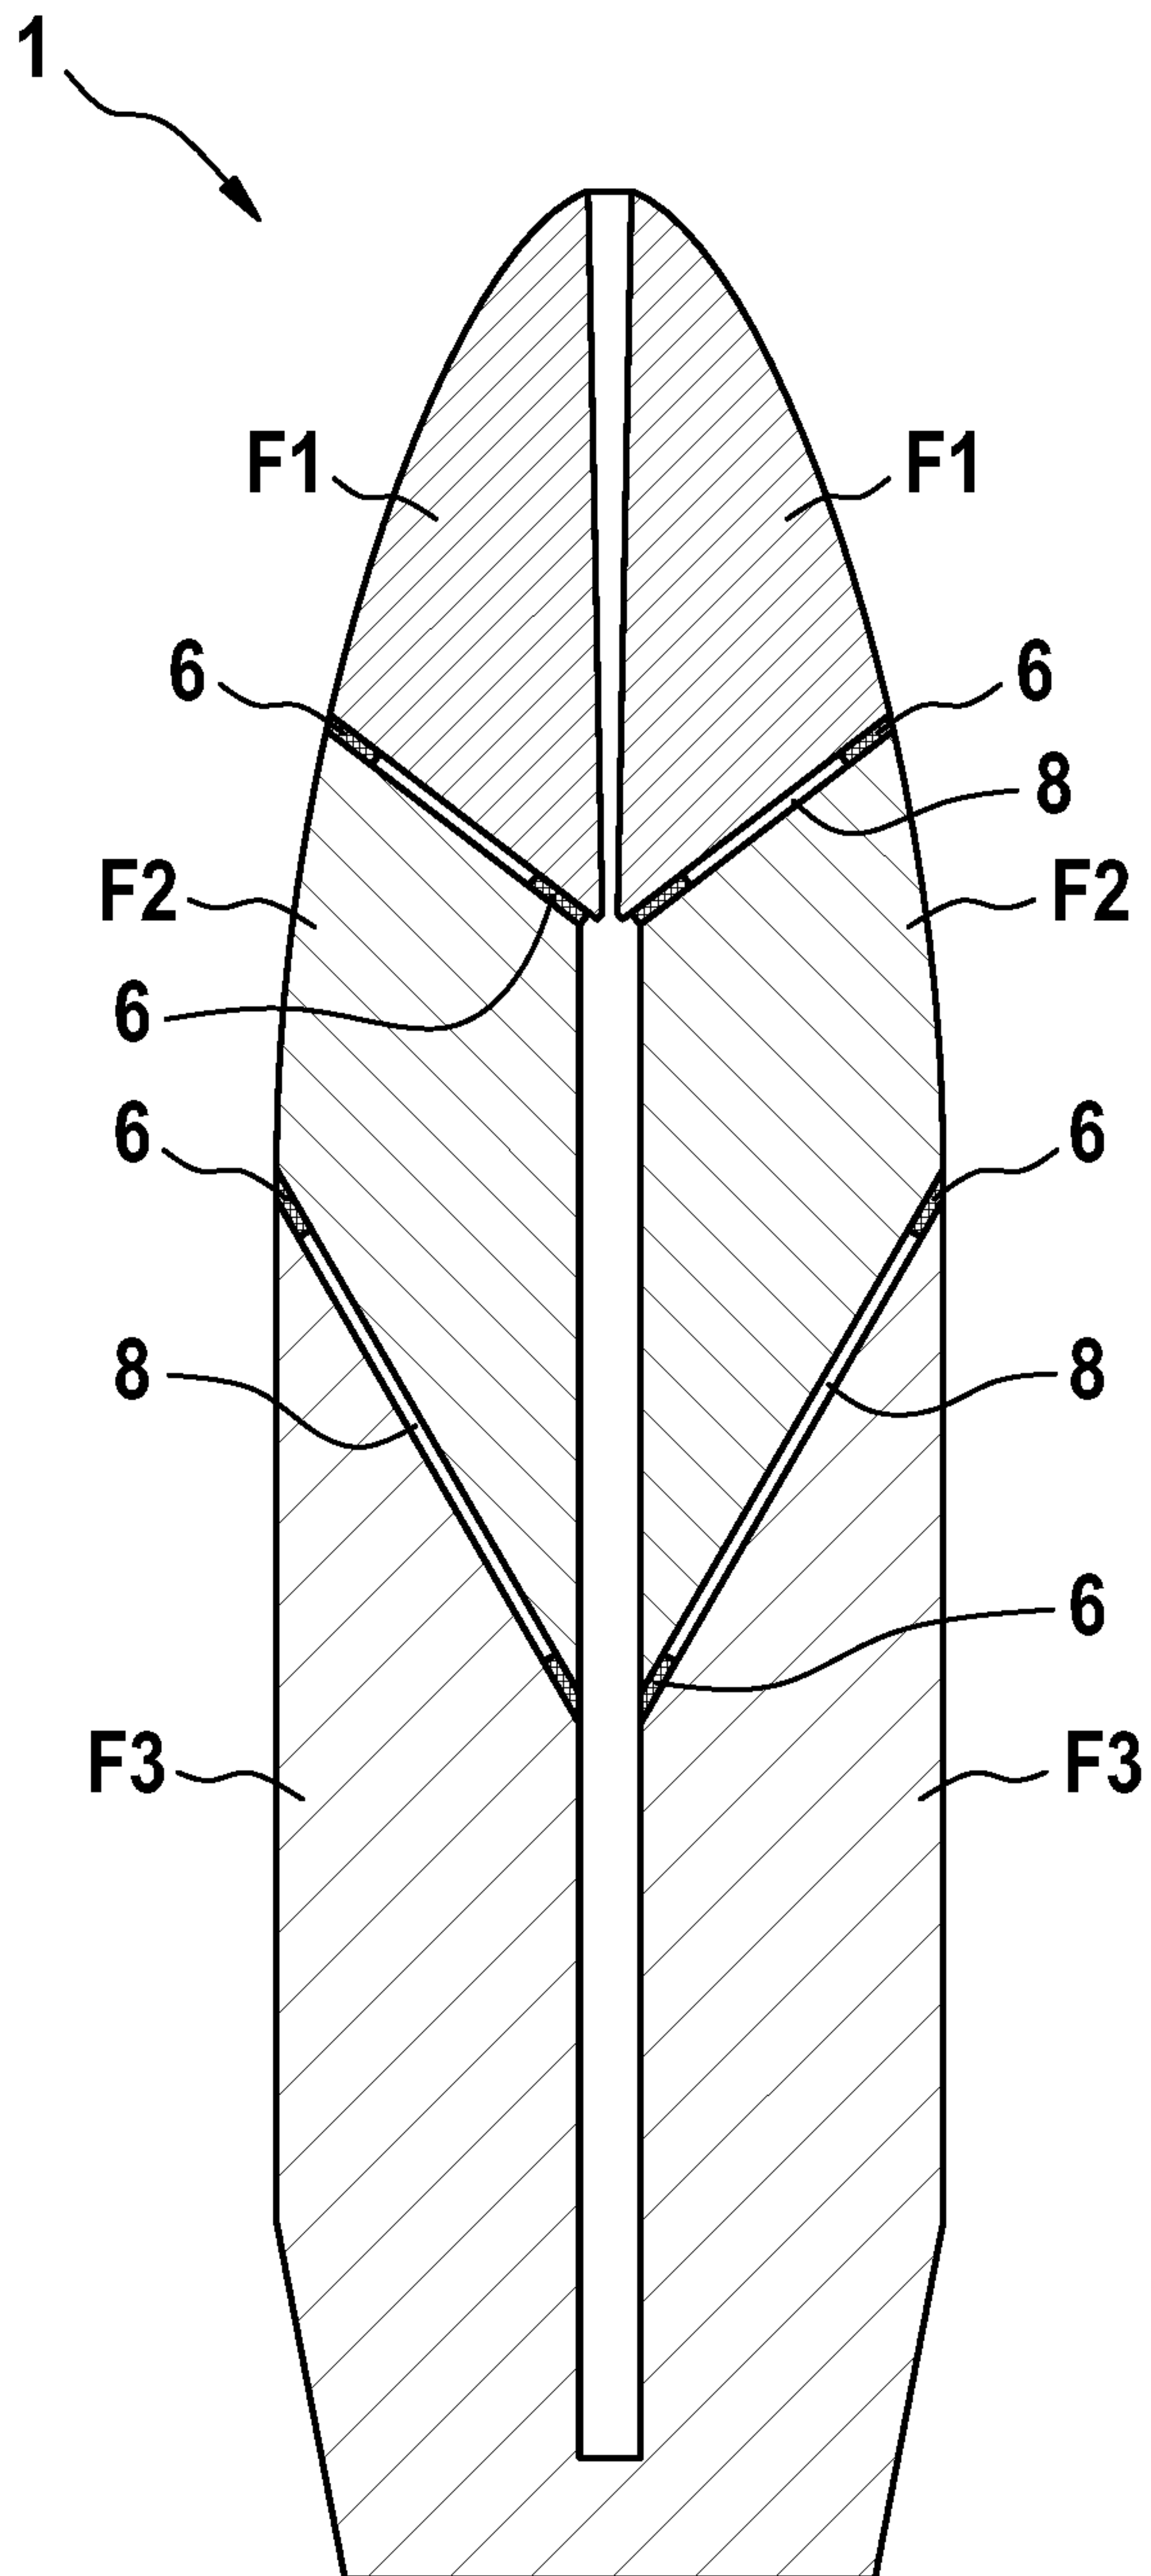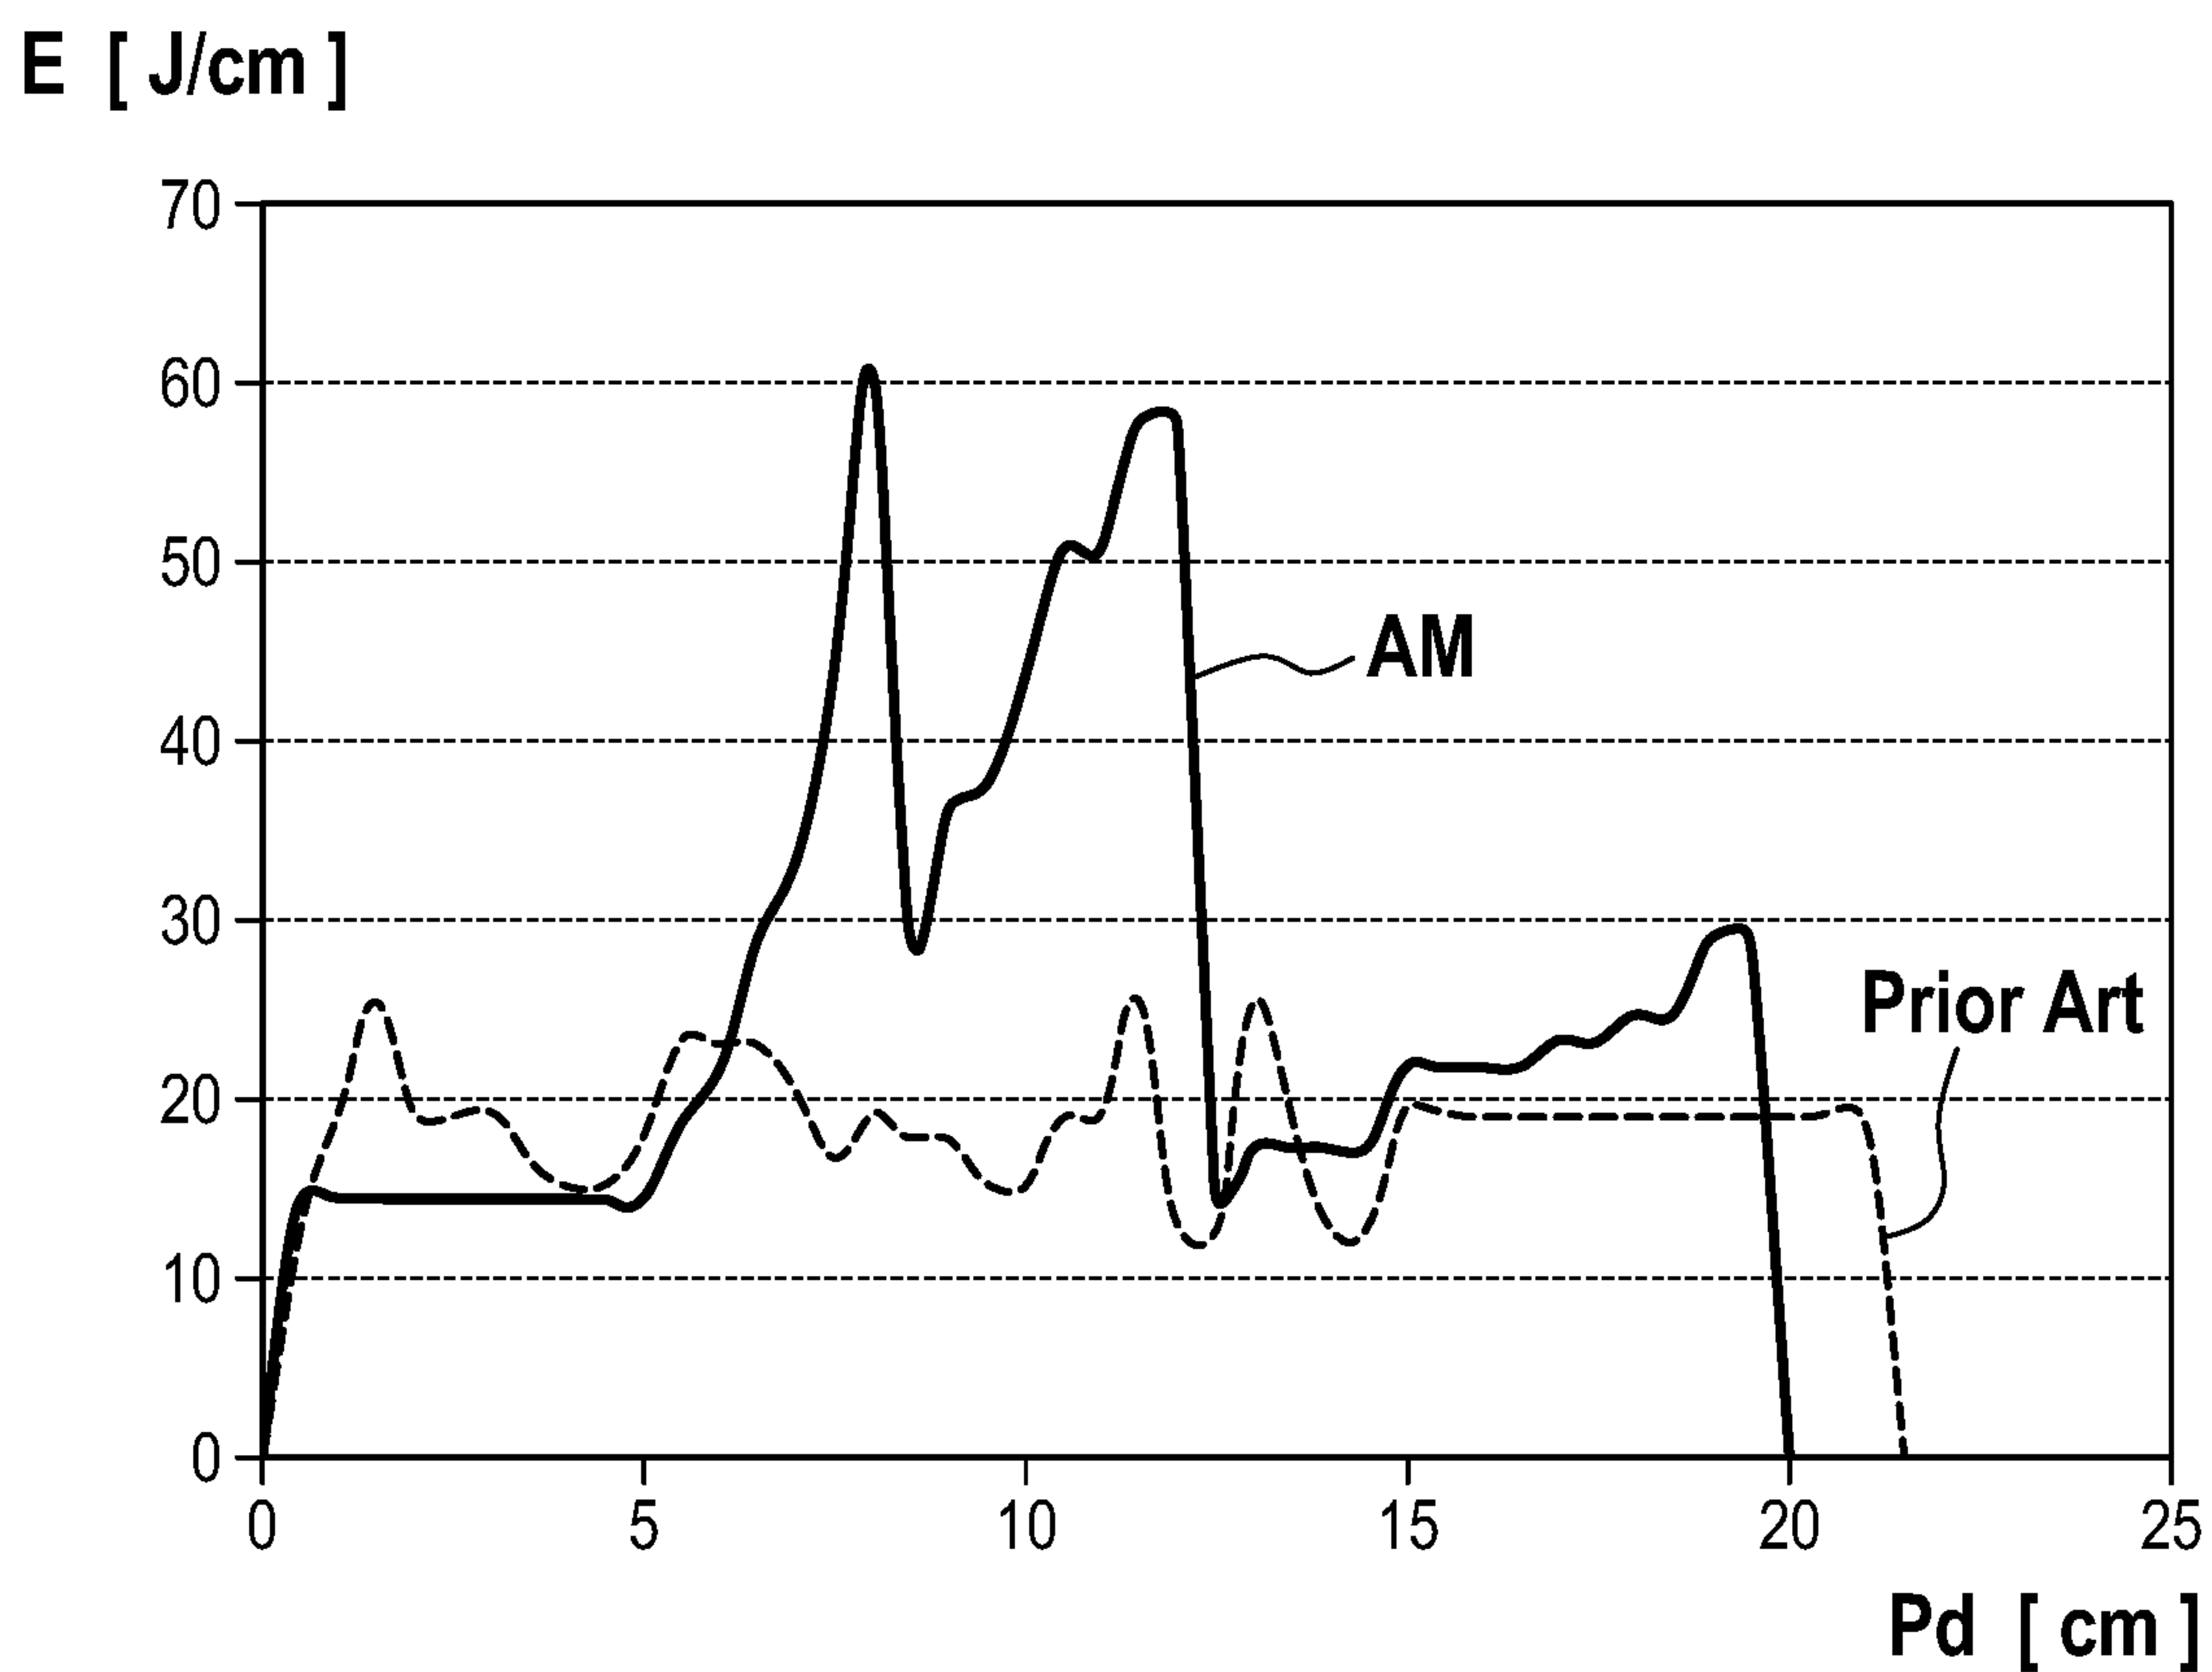


**Fig. 5**

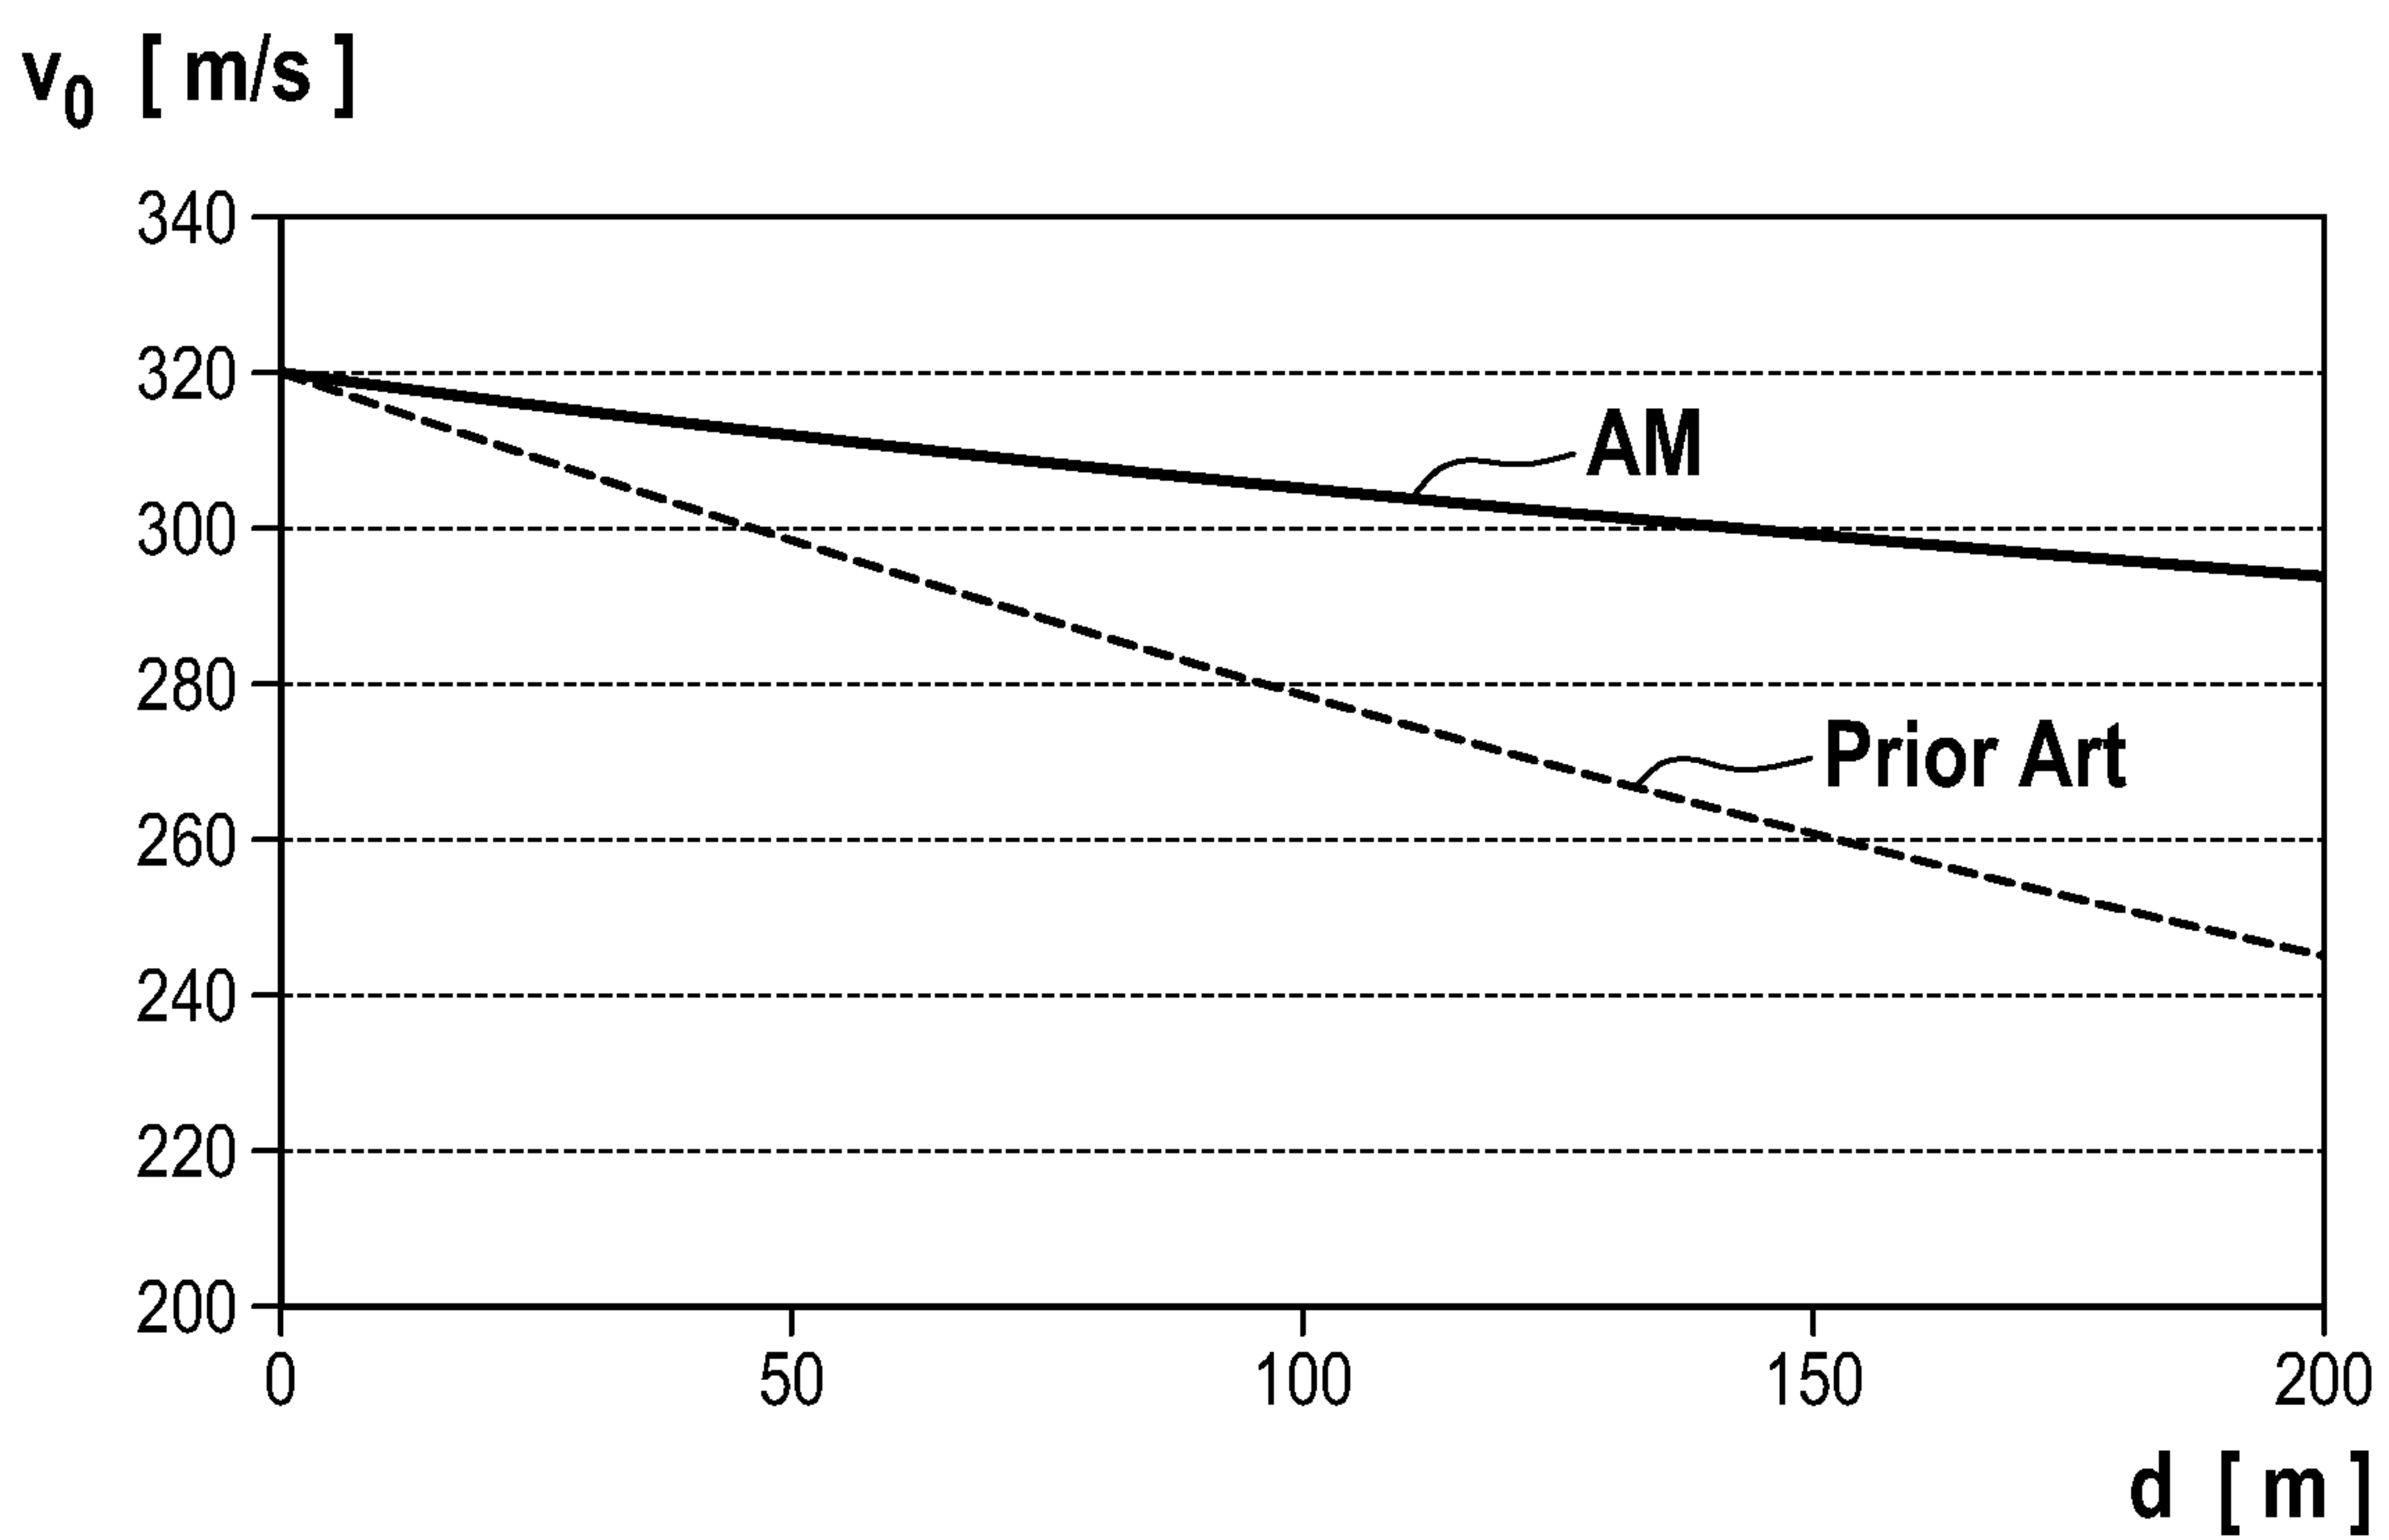


**Fig. 6****Fig. 7**


**Fig. 8**

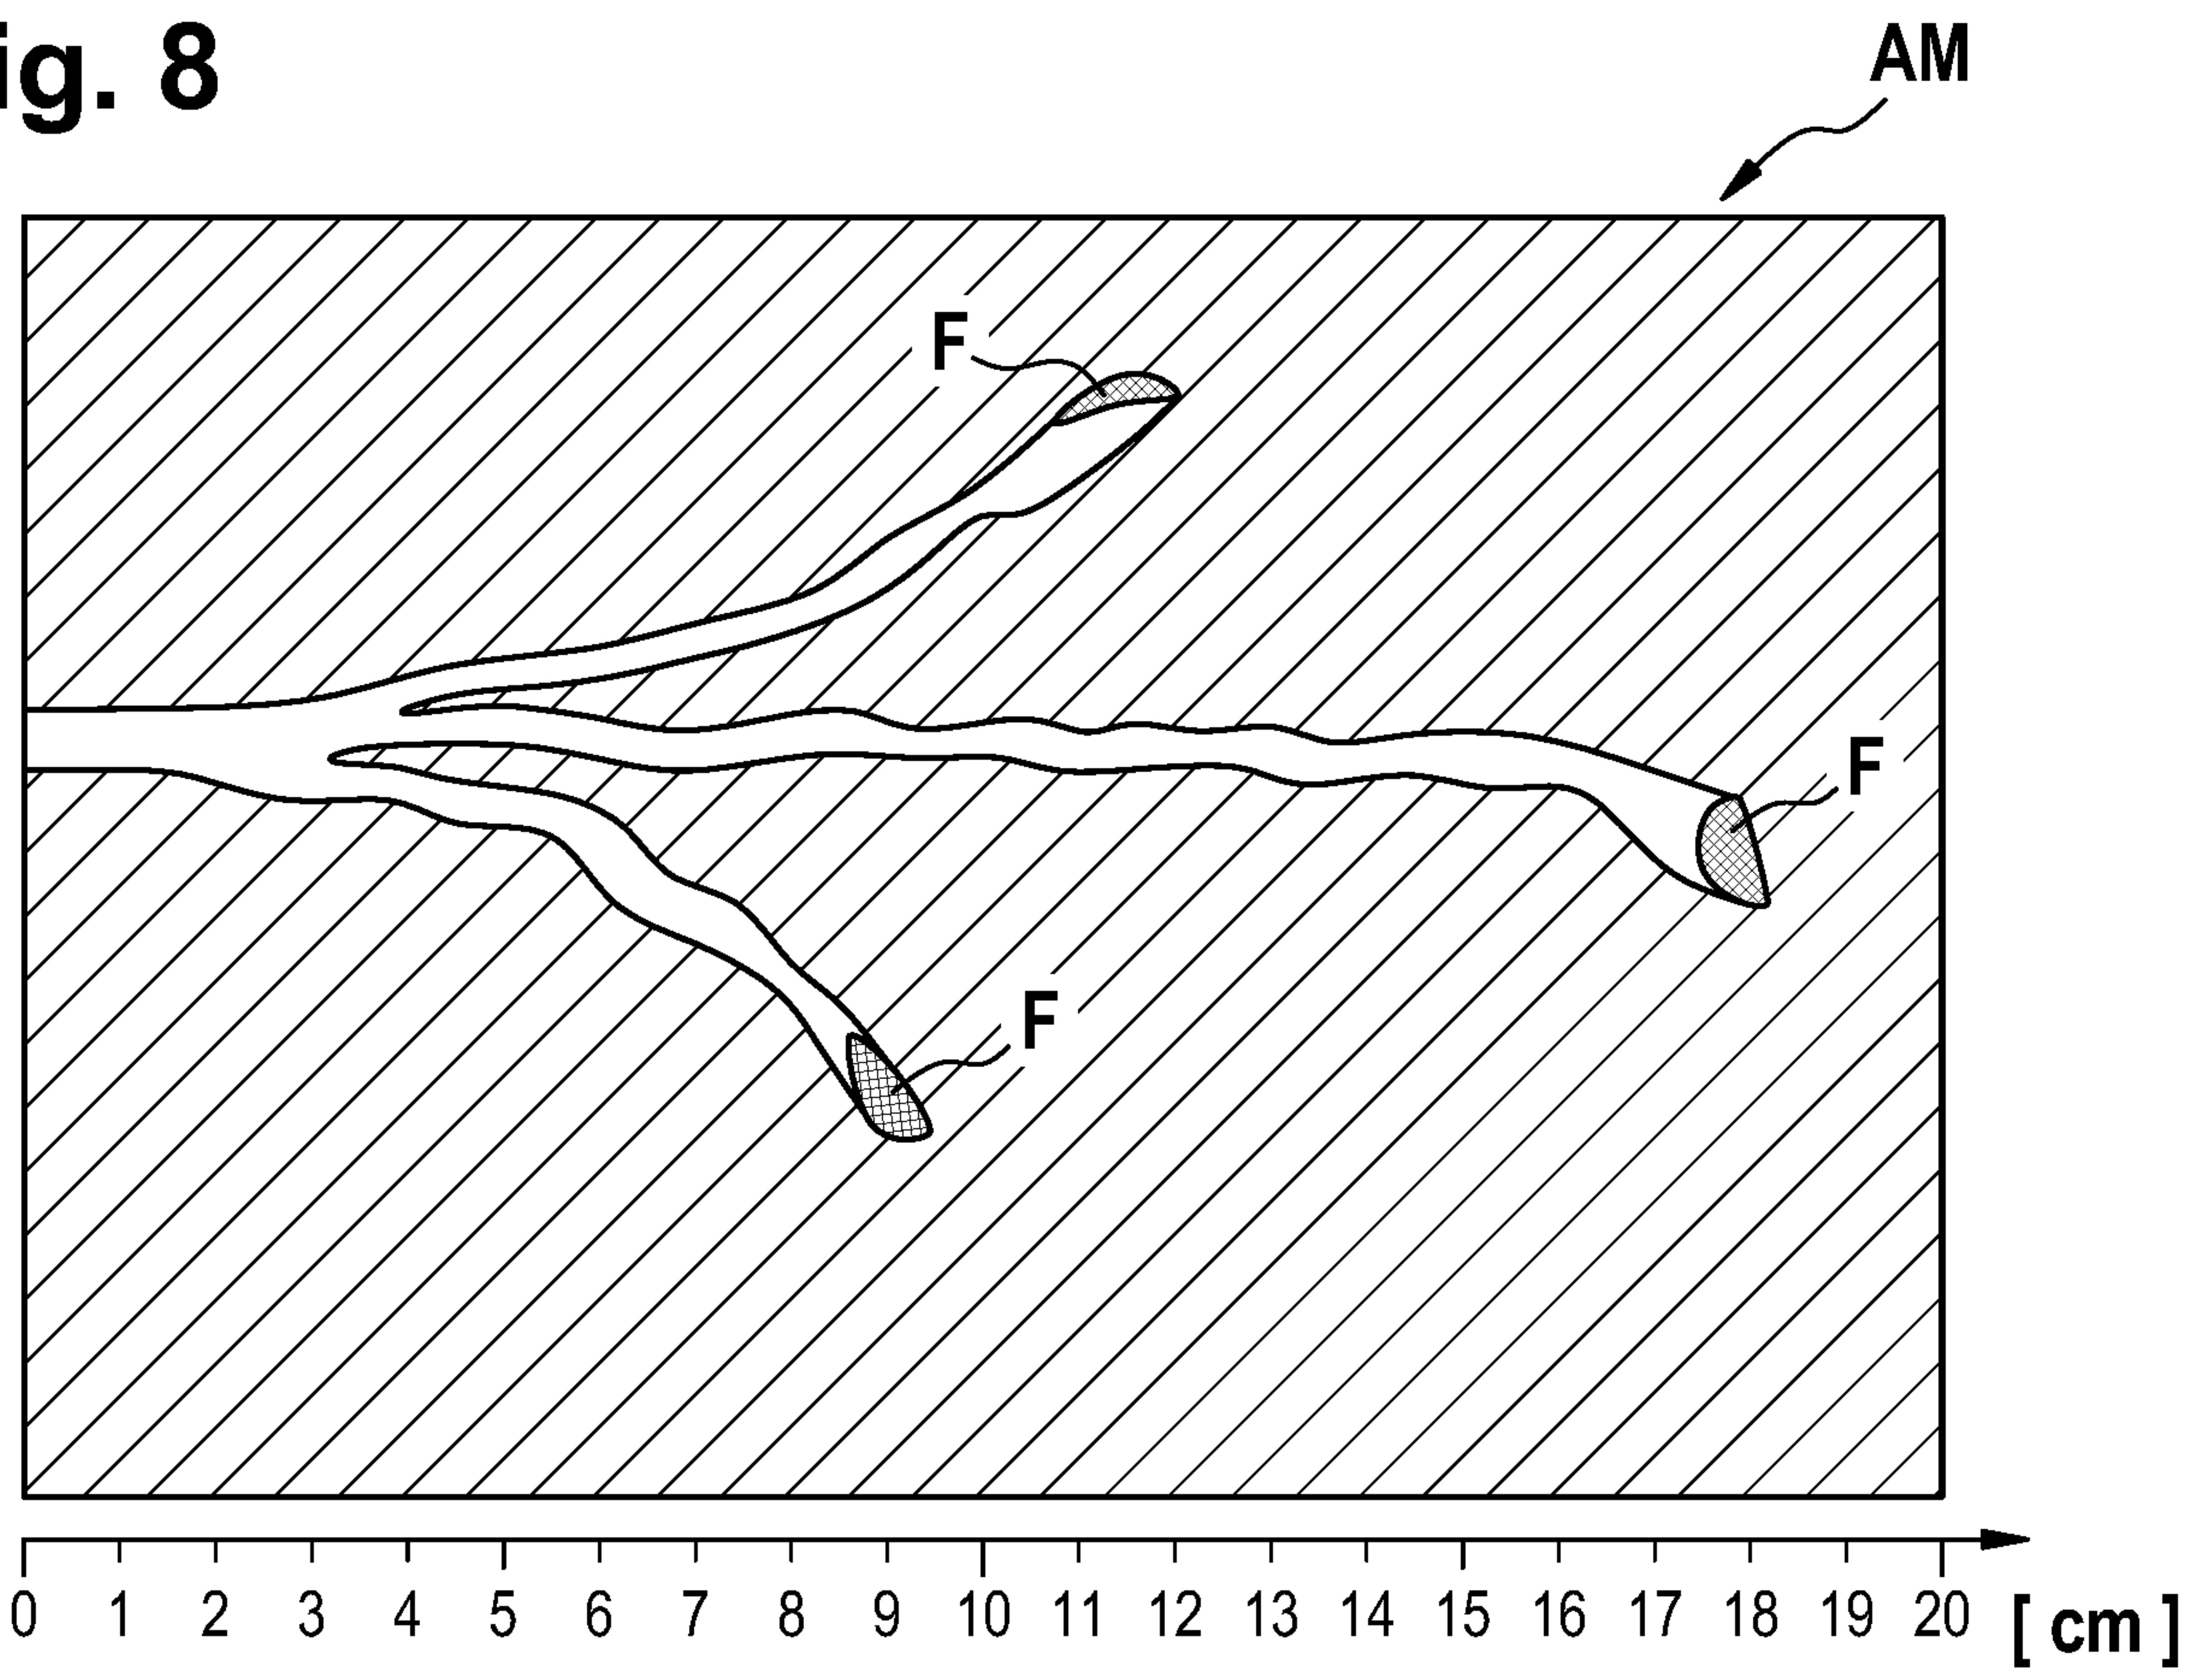


**Fig. 9**

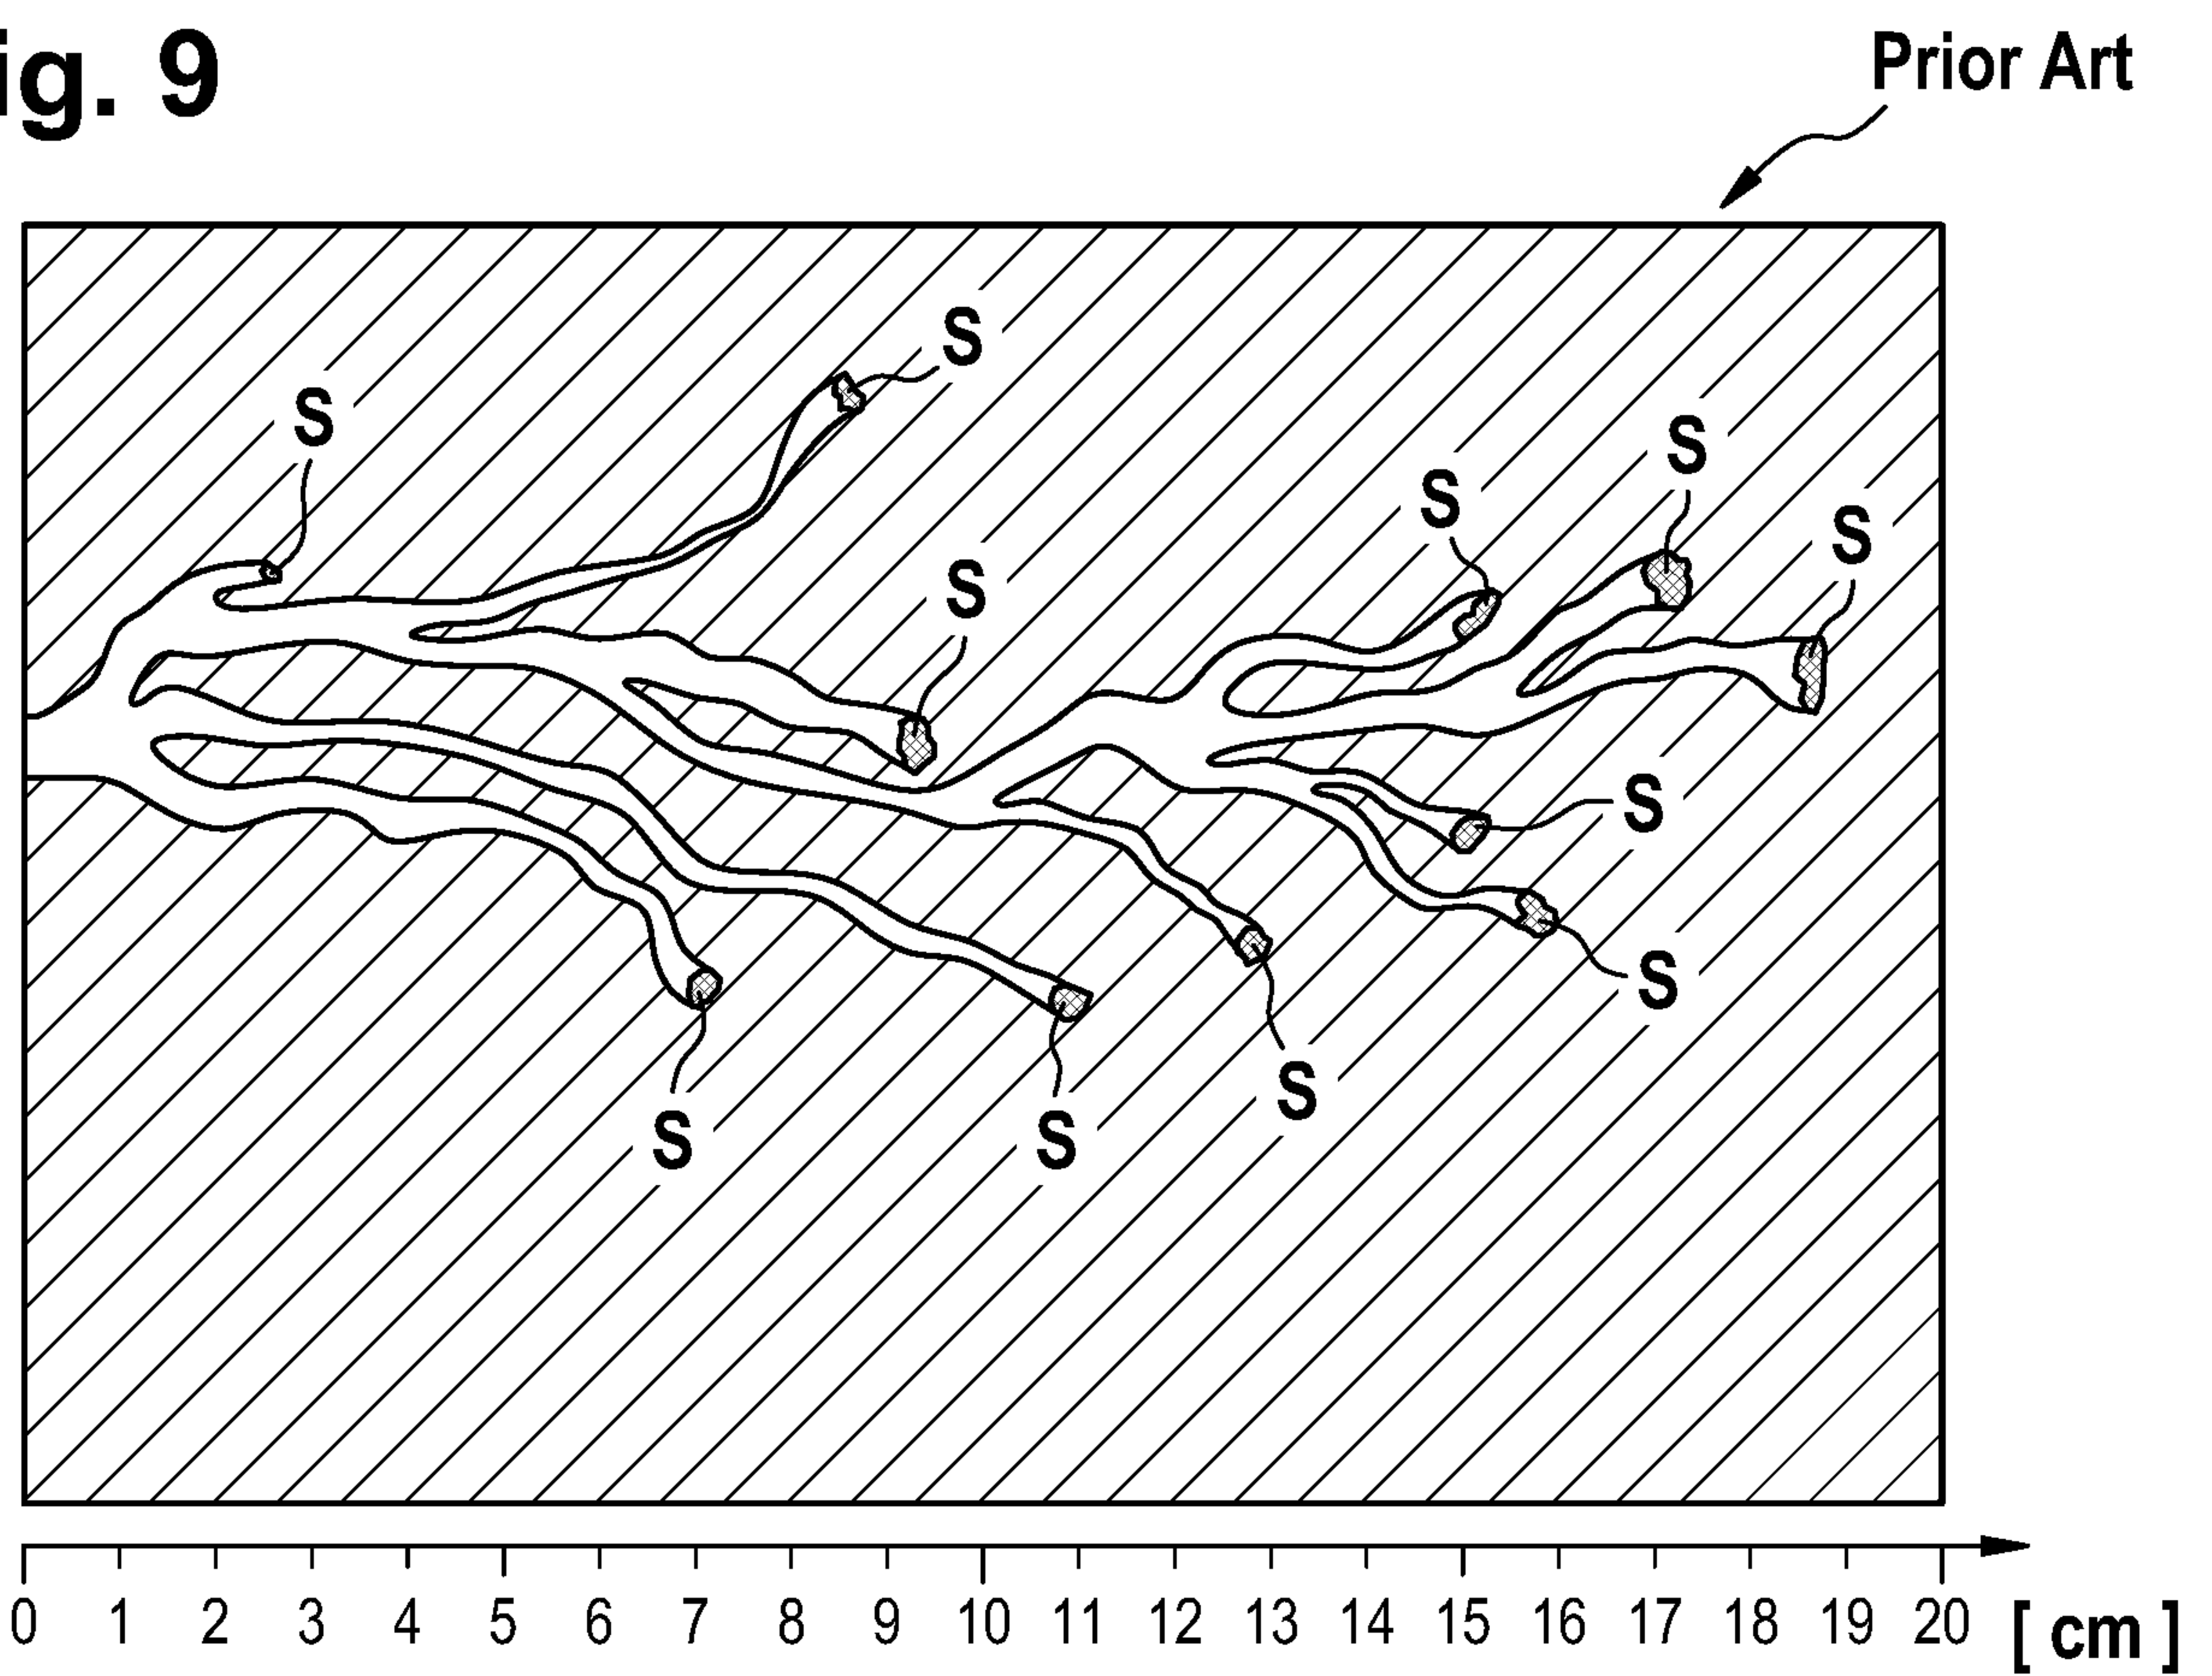


**Fig. 10**

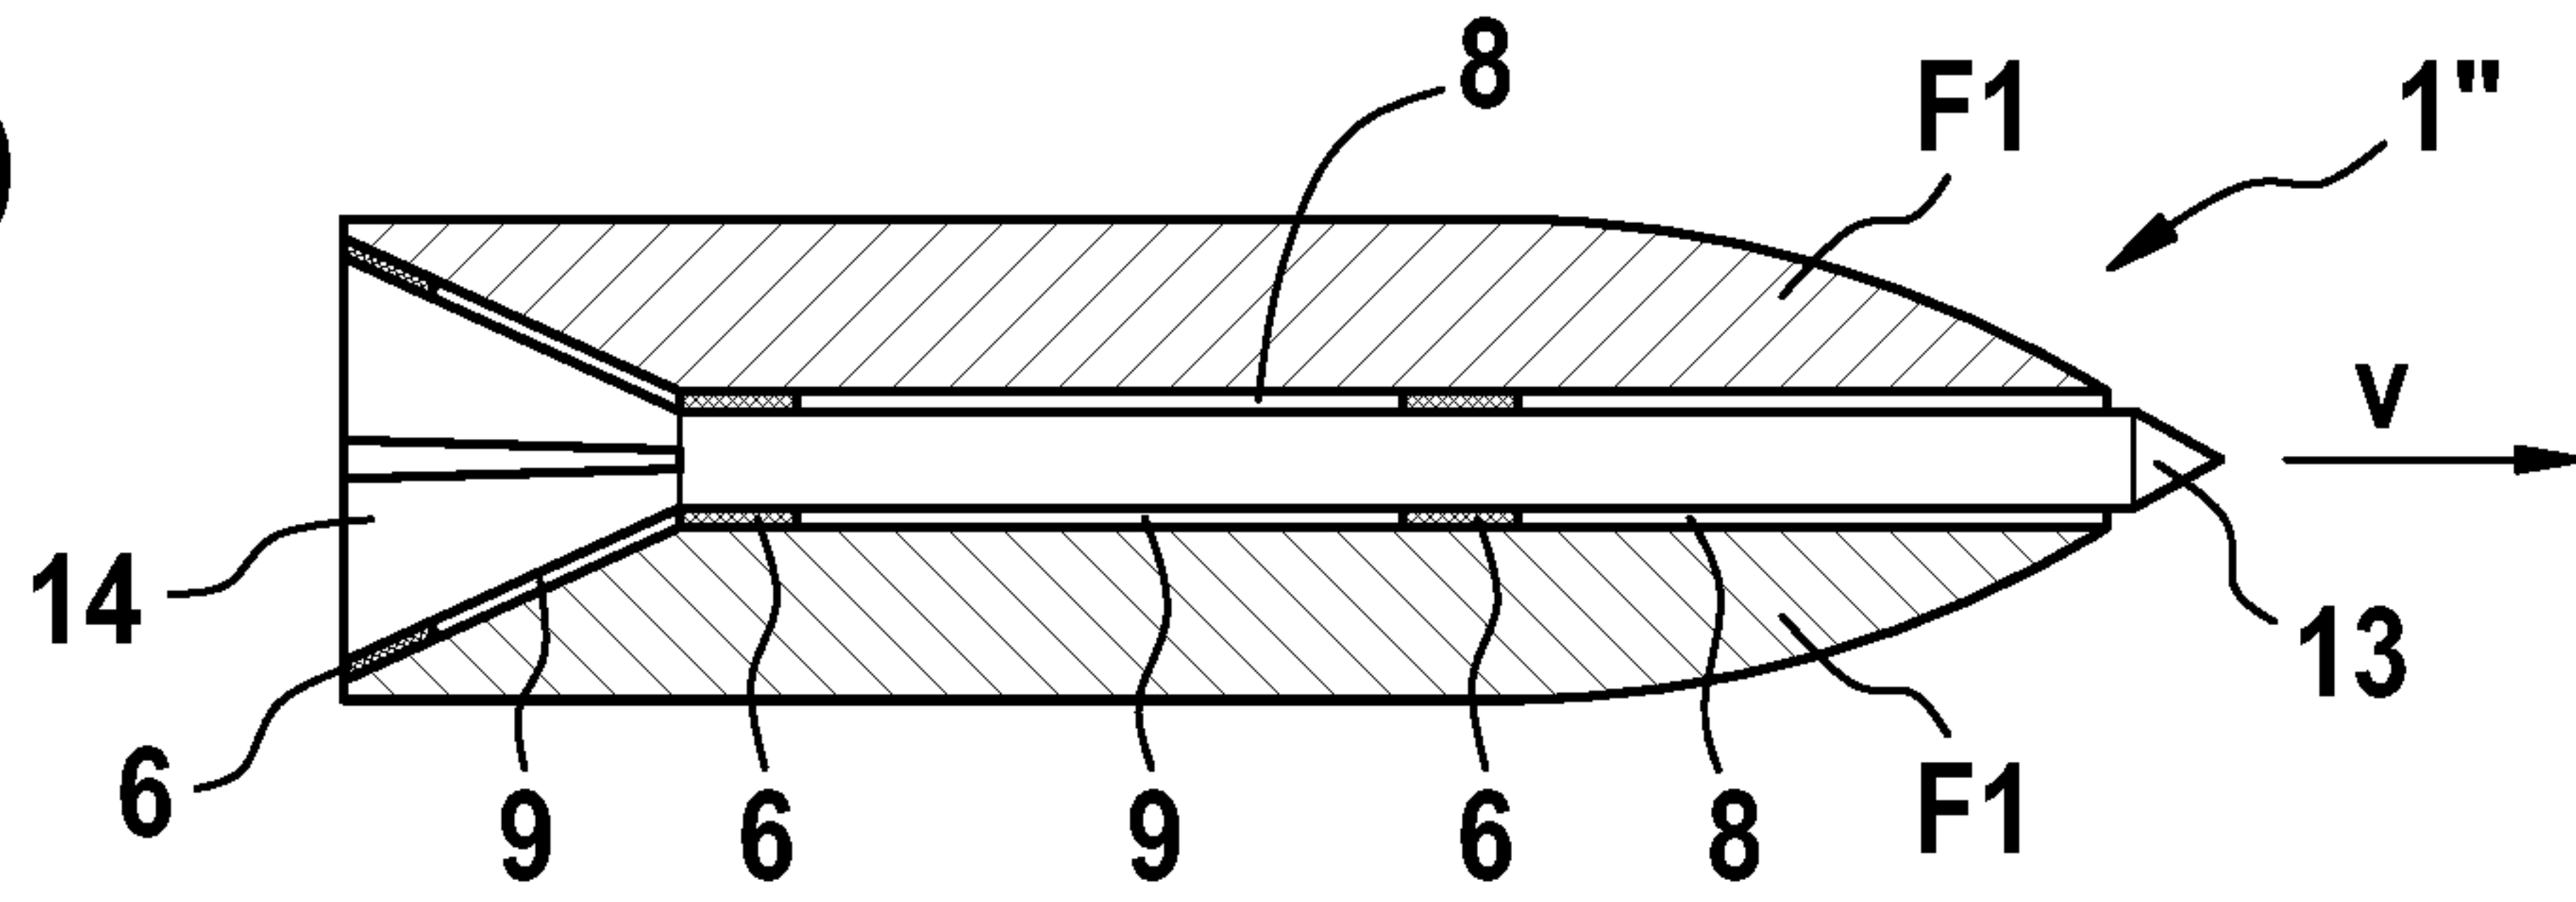

**Fig. 11**

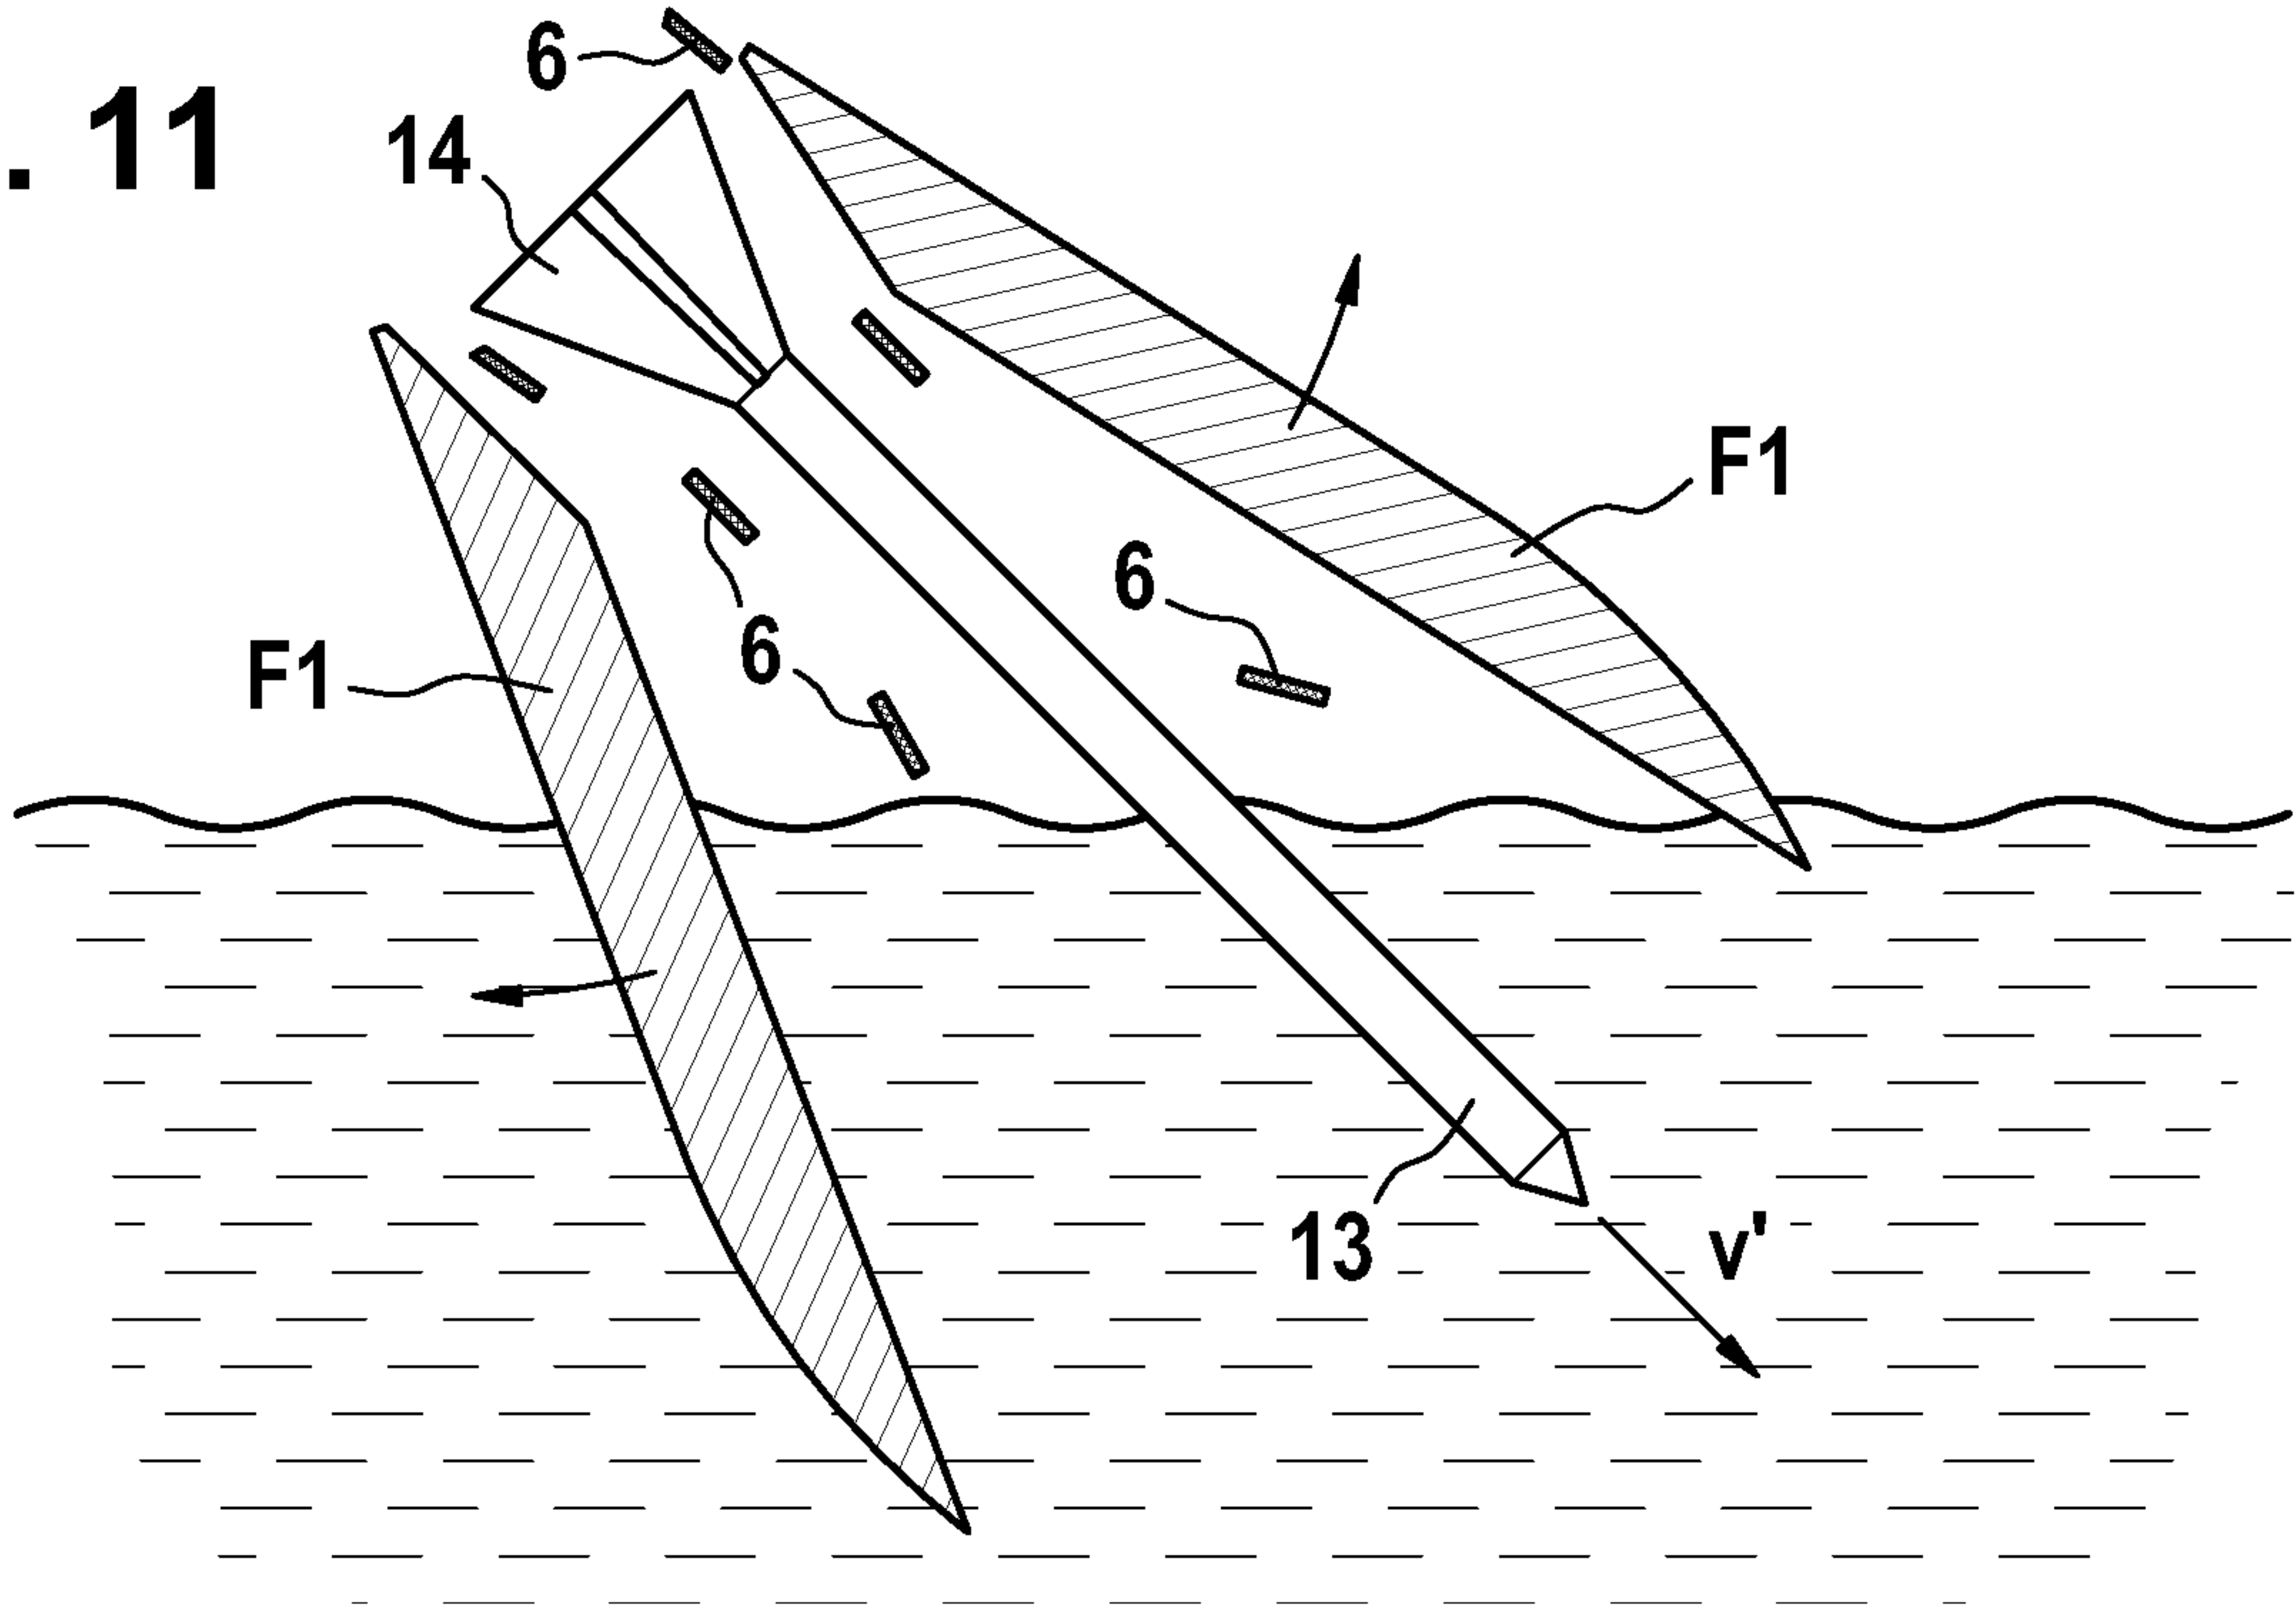

**Fig. 12**

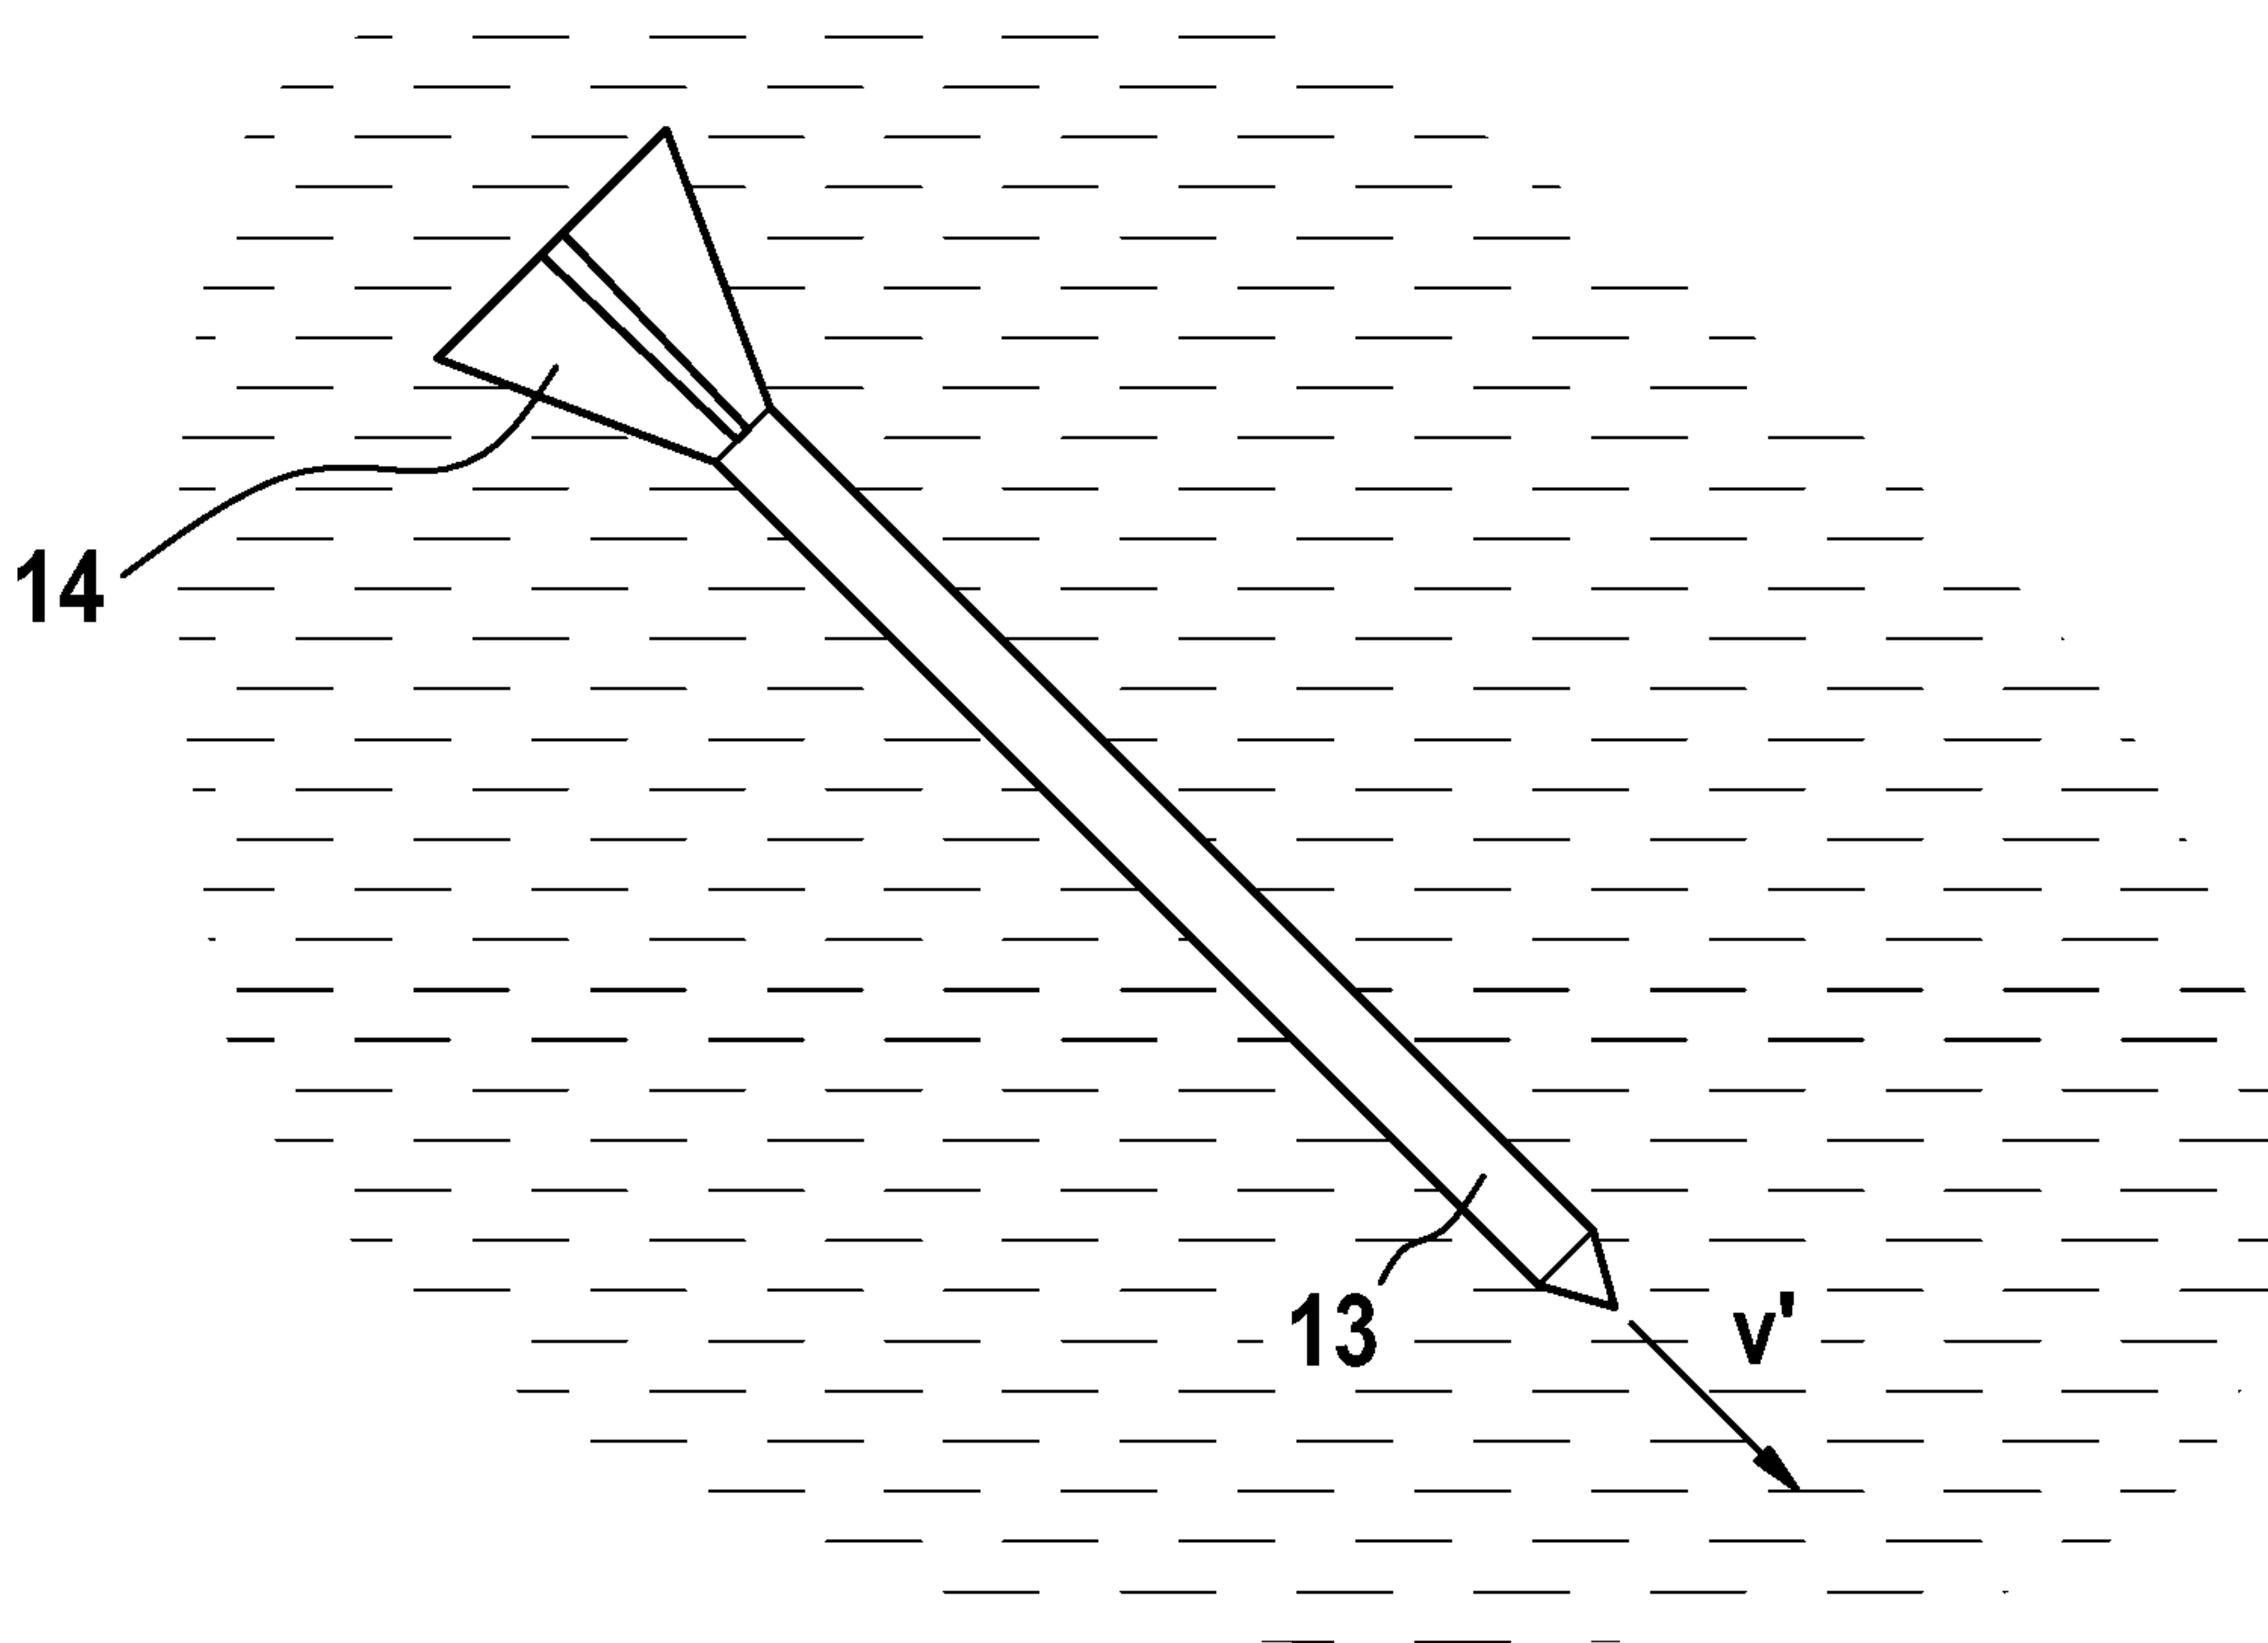

# Fig. 4

