

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 March 2009 (26.03.2009)

PCT

(10) International Publication Number
WO 2009/039385 A1

(51) International Patent Classification:
G03B 17/00 (2006.01) **H04N 5/225** (2006.01)

(21) International Application Number:
PCT/US2008/077035

(22) International Filing Date:
19 September 2008 (19.09.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/859,485 21 September 2007 (21.09.2007) US

(71) Applicant and

(72) Inventor: **CIRKER, Seth** [US/US]; 14 Covert Street, Port Washington, NY 11050 (US).

(74) Agent: **PRATT, Bryan, G.**; Rader Fishman & Grauar PLLC, 10653 S. River Front Parkway, Suite 150, South Jordan, UT 84095 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: **PRIVACY ENSURING CAMERA ENCLOSURE**

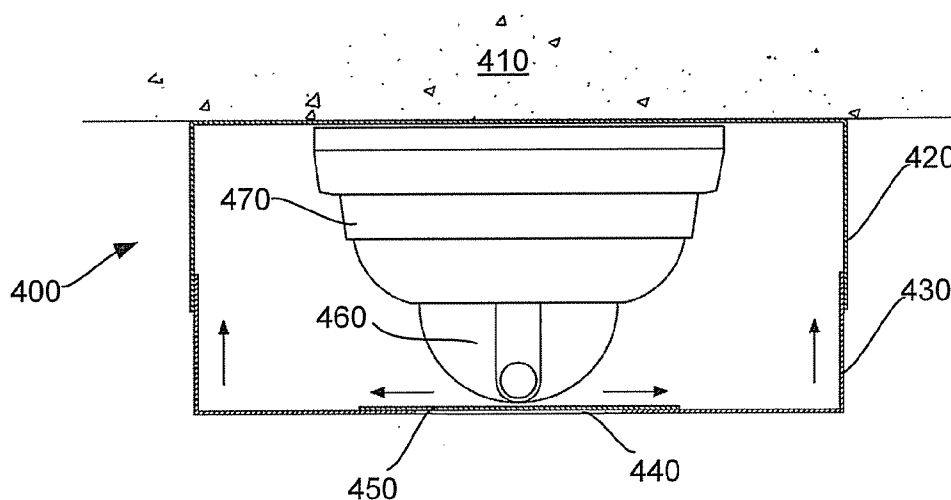


Fig. 4A

(57) Abstract: A privacy ensuring camera enclosure (110, 400, 600) with a camera enclosing configuration and a surveillance configuration wherein the camera enclosing configuration entirely surrounds a surveillance camera (120, 460, 660) such that it is visibly removed from a privacy sensitive area, thereby preserving the expected level of privacy in the privacy sensitive area; the enclosure (110, 400, 600) is configured to dynamically change from the camera enclosing configuration to the surveillance configuration in response to a heightened threat level.

Privacy Ensuring Camera Enclosure

[0001] The present application claims the benefit under 35 U.S.C. § 119(e) of U.S. Patent Application No. 11/859,485 filed September 21, 2007 titled “Privacy Ensuring Camera Enclosure,” which application is hereby incorporated by reference in its entirety.

BACKGROUND

[0002] Surveillance or monitoring apparatuses often use at least one video camera, allowing surveillance images to be viewed and/or recorded at a remote location. For example, an industrial facility, a public school, or a medical facility may have several video cameras at various locations throughout the facility, each camera being communicatively coupled to a respective video screen at one or more central security station(s).

[0003] More recently, video cameras have been developed that can be coupled to a computer hosting any number of software programs capable of converting video images received from the video cameras into a digital format, or in other words a document compatible with the Internet standard known as the world wide web (www). Further, personal communication devices such as cellular phones, pagers, and personal digital assistants (PDAs) are becoming increasingly popular commercial products, as wireless communication technology becomes widespread and affordable. Additionally, a number of cellular phone manufacturers are manufacturing and selling camera phones or other smart phones having video displays capable of displaying received images or camera capabilities capable of generating desired images. Consequently, it is possible to transmit a surveillance image from a known video camera to a personal communication device using image conversion software.

[0004] The use of the ever improving monitoring and imaging devices that may be used for security and surveillance are tempered by the concept of an individual's right to privacy. That is, there are a number of locations, such as within restrooms, changing rooms, and even classrooms, where permanently active monitoring devices are

not appropriate. However, when high risk situations such as shootings, hostage situations, or natural disasters occur, an individual's right to privacy may be superseded by a need for surveillance.

[0005] While existing monitoring systems have traditionally been adequate for their intended purposes, they have not been satisfactory in all respects. For example, and as mentioned above, when a high risk situation occurs, traditional monitoring systems do not provide a convenient way for the owner or authorities to monitor previously restricted locations.

10

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The accompanying drawings illustrate various embodiments of the principles described herein and are a part of the specification. The illustrated embodiments are merely examples and do not limit the scope of the claims.

15

[0007] FIG. 1 is a side view of a surveillance camera and housing, according to principles described herein.

[0008] FIG. 2A and FIG. 2B are frontal views of a surveillance camera and housing, according to principles described herein.

20

[0009] FIG. 3 is a cross-sectional diagram of a surveillance camera and housing, according to principles described herein.

[0010] FIG. 4A and FIG. 4B are a partially cut away side view and a bottom view, respectively, of an exemplary surveillance camera and housing in a retracted position, according to principles described herein.

25

[0011] FIG. 5A and FIG. 5B are a partially cut away side view and a bottom view, respectively, of an exemplary surveillance camera and housing in an operation configuration, according to principles described herein.

[0012] FIG. 6A and FIG. 6B are a partially cut away side view and a bottom view, respectively, of an exemplary surveillance camera and housing in a retracted position, according to principles described herein.

[0013] FIG. 7A and FIG. 7B are a partially cut away side view and a bottom view, respectively, of an exemplary surveillance camera and housing in an operation configuration, according to principles described herein.

[0014] FIG. 8 is a flow chart illustrating one exemplary method of selectively
5 monitoring a privacy sensitive area using a privacy ensuring camera enclosure, according to the principles described herein.

[0015] Throughout the drawings, identical reference numbers designate similar, but not necessarily identical, elements.

10

DETAILED DESCRIPTION

[0016] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present systems and methods. It will be apparent, however, to one skilled in the art that the
15 present apparatus, systems and methods may be practiced without these specific details. Reference in the specification to “an embodiment,” “an example” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment or example is included in at least that one embodiment, but not necessarily in other embodiments. The various instances of the phrase “in one
20 embodiment” or similar phrases in various places in the specification are not necessarily all referring to the same embodiment.

[0017] An exemplary privacy ensuring camera enclosure promotes the privacy of individuals within the privacy sensitive area, while allowing critical video surveillance to occur during times of crisis. In one exemplary embodiment, the camera enclosure
25 contains the camera behind opaque doors. In this state, the camera is not visible to the individuals within the privacy sensitive area and has no means of optically sensing activities outside the camera enclosure. During times of elevated threat, the opaque doors can be opened and the camera can be extended through the opening to acquire surveillance footage. The extended camera becomes immediately visible when extended,
30 alerting individuals that they no longer can expect privacy within the privacy sensitive area. Thus, the enclosure provides privacy for the individuals when the opaque doors are

closed while allowing the camera to be extended during times of elevated threat. By visibly retracting the camera from the room or other area under surveillance, the individuals are reassured that they are not under surveillance. The right to privacy is insured until the privacy threshold is exceeded for a particular privacy sensitive area.

5 **[0018]** In one exemplary embodiment, the camera enclosure can be part of a selectively enabled threat based information system. As detailed in 11/717,806, which is hereby incorporated by reference in its entirety, a surveillance system assigns a privacy threshold to privacy sensitive areas, receives a current threat level indicator, compares the current threat level indicator to the privacy threshold, and if the current threat level
10 indicator exceeds the privacy threshold, identifies surveillance components associated with the privacy sensitive areas and activates the identified surveillance components. In one exemplary embodiment, the privacy ensuring camera enclosure and the contained camera can be selectively activated surveillance components. Activating the surveillance camera comprises, among other things, opening the opaque doors covering the
15 surveillance camera or otherwise optically admitting the camera into the privacy sensitive area.

[0019] By way of example, a school may contain a variety of privacy sensitive areas. Cafeterias, libraries, hallways, lobbies, doors, and school grounds are areas where only minimal privacy is required or expected by individuals. However, classrooms,
20 bathrooms, locker rooms, and offices are areas where significant privacy is required for individuals to comfortably perform activities such as teaching, counseling, open discussions, dressing, etc. The intrusion of security cameras into these privacy sensitive areas, absent a significant threat, will have a negative impact on the function of the school. The use of privacy ensuring camera enclosures removes surveillance cameras
25 from the privacy sensitive area until a threat level rises above the privacy threshold value, thereby preserving the normal functioning and expectation of privacy of individuals within the privacy sensitive area.

[0020] FIG. 1 shows a side view of a surveillance camera (120) and its associated housing (110) and mount (140). The mount (140) is secured in the desired
30 location to a support member (not shown). The support member may consist of a wall, post, floor, ceiling or other suitable object. The mount (140) may be secured to the

support member by any number of appropriate means including fasteners, adhesives, bands, or other means. The mount may consist of a plurality of parts, including a stationary base, adjustable components, and an attachment point. The adjustable components may allow the camera (120) and the enclosure (110) to be pointed in the appropriate orientation and/or adjusted to optimize the camera's position. The mount may also incorporate a variety of mechanisms and actuators such as motorized pan or tilt stages.

[0021] The surveillance camera (120) is typically housed inside an enclosure (110). The enclosure (110) controls the internal environment in which the camera operates. The enclosure can be used to control temperature, humidity, and stray light. In addition, enclosures can protect the camera from a variety of environmental hazards such as dust, wind, projectiles, and vandalism. In some cases the enclosure (110) is specifically designed to hide or camouflage the camera (120). The enclosure can include power and communication connections, a sun screen to limit the amount of sunlight incident on the camera, fans, filters to allow the exchange of air within the enclosure, wipers to clean a window, and other accessories.

[0022] Typically, the enclosure includes a viewing port (130) through which the camera observes the surroundings. The viewing port (130) can comprise an aperture in the enclosure wall that is covered by glass or another transparent medium. In some cases, it may be desirable to cover or obscure the viewing port (130) to prevent the camera (120) from viewing the surroundings, thereby protecting the privacy of the individuals in a privacy sensitive area.

[0023] FIG. 2A, 2B, and 3 show a variety of methods of obscuring the viewing port (130) to restrict the view of the camera contained within the enclosure (110). FIG. 2A shows the viewing port (130) obscured by a variable pinhole mechanism (200). The variable pinhole mechanism (200) comprises a plurality of sliding metal plates that can be opened and closed by means of a mechanical or electrical actuator. When the plates are in the closed position, the orifice through which the camera views the surroundings becomes very small or nonexistent.

[0024] FIG. 2B shows a viewing port (130) covered with electrochromic glass (210). Electrochromic glass (210) changes its light transmission properties in response to

voltage and thus controls the amount of light that pass through the electrochromic glass. By applying a voltage to the electrochromic glass (210), the electrochromic glass (210) can become opaque, thereby limiting the light that that is transmitted to the camera (120).

[0025] FIG. 3 shows a cross-sectional diagram a camera (120) and enclosure (110) wherein the enclosure (110) includes a first mechanical door (300) and a second mechanical door (330) that slide on door tracks (310, 320). As shown in FIG. 3, the doors (300, 330) can be moved forward and in front of the camera to obscure the viewing port (130). When the camera is in use, the doors (300, 330) are mechanically or electrically moved along the door tracks (310, 320) to the sides of the camera (120). This allows the camera (120) to view the surroundings through the now unobscured viewing port (130).

[0026] All of these methods can be effective in obscuring the view of the camera and in factually preventing surveillance that unnecessarily intrudes on the privacy of individuals within the privacy sensitive area. However, the camera (120) remains physically present in the privacy sensitive area and continues to have a chilling effect on the private activities of the individuals. Further, the methods of obscuring the viewing port (130) are largely unobservable to the individuals. By direct observation, it can be difficult or impossible to determine if the camera is in operation or if the viewing port is obscured. Further, the viewing port may be opened without any overt visual indication to the individual that the camera is commencing surveillance operations. Thus, the described cameras and enclosures have the effect of literally intruding on the privacy of individuals even if the viewing aperture is obscured or the camera is not in operation. This intrusion can be unacceptable in environments such as classrooms, restrooms, medical areas, counseling centers, and other locations where privacy is an important behavioral prerequisite. For example, the surveillance of the interior of a restroom would an inappropriate invasion of privacy in all but the most extreme circumstances.

[0027] The need to preserve the safety of individuals can act as counterbalancing consideration when considering surveillance of a privacy sensitive area.

A wide variety of threats, such as terrorists, gunmen, or fire, can be present in areas that are typically not appropriate locations for continuous surveillance. When the threat to the individuals' safety exceeds the need for privacy, it can be appropriate to initiate surveillance of the area. Thus, there is a clear need for an apparatus that is configured to

visibly remove the inactive camera from privacy sensitive areas during normal activities, but is capable of quickly deploying a surveillance camera to mitigate a significant threat. When the threat level exceeds a certain threshold, the apparatus visibly reintroduces the camera into the area to assess the threat.

5 **[0028]** FIG. 4A and FIG. 4B illustrate one exemplary embodiment of a privacy ensuring camera enclosure. FIG. 4A shows a partial cutaway side view of the privacy ensuring camera enclosure (400). In this exemplary embodiment, the camera enclosure (400) is attached to an upper surface (410). The camera enclosure (400) consists of a base (420), a telescoping cover (430) and a plurality of sliding panels (440, 450). The base
10 (420) is attached to the upper surface (410). The base (420) can be attached by a variety of methods including fasteners or adhesive. The base (420) may also include electrical feed throughs for power and communication cables.

[0029] The telescoping cover (430) is slidably attached to the base (420) such that the telescoping cover (430) can be extended to maximize the volume within the
15 enclosure (400) or retracted to reduce the volume surrounded by the enclosure (400). FIG. 4B shows a bottom view of the enclosure (400). The telescoping cover (430) includes an aperture (480) in its bottom surface. A plurality of sliding panels (440, 450) is configured to selectively cover the aperture (480). In FIGS. 4A and 4B, the sliding panels (440, 450) are shown in a closed configuration. In the closed configuration the
20 sliding panels (440, 450) are adjacent to one another and cover the aperture (480).

[0030] In the closed position a camera (460) is entirely contained within the enclosure (400). Because the camera is visibly absent from the privacy sensitive area, the negative intrusion on the privacy of the individuals is minimized. The camera (460) is attached to the base (420) by a pedestal (470). In one exemplary embodiment, the camera
25 (460) is an off-the-shelf dome CCTV camera. The dome CCTV camera can be configured with a plurality of gimbaled stages that allow the camera to be pointed throughout a range of angles.

[0031] As indicated by the arrows in FIGS. 4A and 4B, the telescoping cover (430) can be retracted into the base (420) and the sliding panels (440, 450) opened. The
30 camera (460) then visibly protrudes out of the enclosure (400) as shown in FIGS. 5A and 5B. By sliding the telescoping cover (430) into the base (420), the height of the

enclosure (400) is reduced and the camera (460) extends out of the aperture (480). When the camera (460) is deployed in the manner described above, it enters the privacy sensitive area and can begin operation. The individuals within the privacy sensitive area can immediately ascertain that the camera (460) has entered the area and is in operation.

5 **[0032]** After the threat level has been reduced, the enclosure (400) can again be actuated to envelope the camera (460). As shown by the arrows in FIGS. 5A and 5B, the telescoping cover (430) is extended and the sliding panels (440, 450) are brought together to cover the aperture (480). The telescoping cover (430) and sliding panels (440, 450) can be actuated in a variety of fashions. In one exemplary embodiment, the
10 telescoping cover (430) and the sliding panels (440, 450) could be manually or mechanically actuated. According to another embodiment, separate electrical actuators could be used to actuate the telescoping cover (430) and sliding panels (440, 450). Alternatively, one electrical actuator with mechanical linkages could move both the telescoping cover (430) and sliding panels (440, 450).

15 **[0033]** FIGS. 6A through 7B show one exemplary embodiment of a privacy ensuring camera enclosure (600) that is configured to be mounted through a support plate (610). In one exemplary embodiment the support plate (610) may be ceiling tile, drywall attached to the ceiling of a building, plywood, or another building element. FIG. 6A shows a partial cutaway side view of the privacy ensuring camera enclosure (600). The
20 camera enclosure (600) consists of a base (620), a telescoping cover (630) and a plurality of sliding panels (640, 650). The base (620) is attached to the support plate (610) such that a large portion of the enclosure (600) resides above the support plate (610). According to this exemplary embodiment, the camera (660) is oriented within the enclosure to provide surveillance of the area below the support plate (610). In other
25 embodiments, the camera (660) and enclosure (600) could be oriented to provide surveillance of the area above the support plate (610).

[0034] The telescoping cover (630) is slidably attached to the base (620) such that the telescoping cover (630) can be extended to maximize the volume within the enclosure (600) or retracted to reduce the volume surrounded by the enclosure (600). As
30 described previously, the telescoping cover (630) can consist of an aperture (680) and a plurality of sliding panels (640, 650) configured to selectively cover the aperture (680). In

FIGS. 6A and 6B, telescoping cover is shown in its fully extended position. When the telescoping cover (630) is fully extended, the enclosure (600) encloses a volume that extends above and below the support plate (610) and entirely contains the camera (660). In the closed configuration, the sliding panels (640, 650) are adjacent to one another and
5 cover the aperture (680). The enclosure (600) has an innocuous visual appearance in its closed position and is unlikely to intrude on the privacy of individuals.

[0035] As indicated by the arrows in FIGS. 6A and 6B, the telescoping cover (630) can be retracted into the base (620) and the sliding panels (650, 640) can be opened. By sliding the telescoping cover (630) into the base (620), the height of the enclosure
10 (600) is reduced and the camera (660) extends out of the aperture (680). FIGS. 7A and 7B show the telescoping portion (630) of the enclosure (600) retracted and the camera (660) deployed into the privacy sensitive area. The camera (660) visibly protrudes out of the enclosure (400) as shown in FIGS. 7A. According to one exemplary embodiment, the telescoping cover (630) is substantially flush with the support plate (610). Because the
15 camera (660) now visibly extends into the privacy sensitive area, individuals can immediately ascertain that the camera (660) has entered the area and is in operation.

[0036] After the threat level has been reduced, the enclosure (600) can again be actuated to envelope the camera (660). As shown by the arrows in FIGS. 7A and 7B, the telescoping cover (630) is extended and the sliding panels (640, 650) are brought
20 together to cover the aperture (680). As mentioned above, the telescoping cover (430) and sliding panels (440, 450) can be actuated by a variety of mechanisms and in a variety of fashions.

[0037] FIG. 8 illustrates a method of selective surveillance within a privacy sensitive area. A privacy ensuring camera enclosure is obtained and mounted in
25 proximity to a privacy sensitive area (step 800). As mentioned above, the enclosure can be mounted in a variety of locations and orientations. By way of example and not limitation, the enclosure could be mounted on wall, ceiling, item of furniture such as a cabinet, or on a pole. Additionally, as shown in FIGS. 6A through 7B, the enclosure could be partially or completely recessed into the support structure.

[0038] A surveillance camera is then mounted within the privacy ensuring
30 camera enclosure (step 810). The surveillance camera can be any available cameras

suitable for the specific surveillance environment. The necessary connections to the surveillance camera, such as power and communication cabling, can be made. In one exemplary embodiment, no external power or connections are required. In this embodiment, a battery powered camera is wirelessly configured to transmit imagery to a remote base station.

[0039] The privacy ensuring camera enclosure is then configured in a first enclosed configuration (step 820). As discussed above, the security camera is not visible to individuals when the enclosure is in the enclosed configuration and does not significantly intrude on the perception of privacy of the individuals within the privacy sensitive area.

[0040] The privacy sensitive area is then assigned a privacy threshold value corresponding to the level of privacy that is conducive to the normal activities that occur within the area. For example, in an education setting, a library area may have a lower privacy threshold than a restroom or locker room area. Thus a correspondingly higher threat level would be required exceed the privacy threshold value of the restroom or locker room area.

[0041] The threat level is then received (step 840). The threat level may be receive from a variety of sources including but not limited to Federal, State, and Local governments such as the Homeland Security Advisory System for terrorist threats (HSAS) or the National Oceanic & Atmospheric Administration for natural disasters (NOAA). Further, manually authorized threat level sources may include, but are in no way limited to supervisors, principals, or other supervisory personnel. Additionally, the threat level can be received from panic buttons, emergency transmitters, fire alarms, or other communication devices. The inputs from these sources can be combined and/or analyzed to determine the applicability of the information to the privacy sensitive area. The combination of the threat communications as applied to the privacy sensitive area can generate a specific threat level.

[0042] If the specific threat level exceeds the privacy threshold value, the privacy ensuring enclosure can be dynamically reconfigured to a second surveillance configuration (step 850). As previously described, the telescoping cover is retracted into the base and the aperture cover can be opened to allow the camera to be deployed into the

privacy sensitive area. The camera visibly protrudes out of the enclosure and individuals can immediately ascertain that the surveillance camera is in operation.

[0043] When the specific threat level is reduced below the privacy threshold level of the privacy sensitive area, the privacy ensuring camera enclosure can be returned
5 to its first enclosed configuration (step 860), thereby removing the camera from the privacy sensitive area.

[0044] The preceding description has been presented only to illustrate and describe embodiments and examples of the principles described. This description is not intended to be exhaustive or to limit these principles to any precise form disclosed. Many
10 modifications and variations are possible in light of the above teaching.

15

20

25

30

CLAIMS

WHAT IS CLAIMED IS:

- 5 1. A privacy ensuring camera enclosure (110, 400, 600) comprising:
 a base (420, 620);
 a telescoping cover (430, 630) associated with said base (420, 620, said
telescoping cover (430, 630) defining an aperture (480, 680); and
 at least one sliding panel (440, 450, 640, 650) configured to selectively
10 cover said aperture (480, 680).
2. The privacy ensuring camera enclosure (110, 400, 600) of claim 1 wherein
a camera (120, 460, 660) is coupled to said base (420, 620) and said telescoping cover
(430, 630) is configured to selectively extend to envelop said camera (120, 460, 660).
15
3. The privacy ensuring camera enclosure (110, 400, 600) of claim 2 wherein
said at least one sliding panel (440, 450, 640, 650) is configured to cover said aperture
(480, 680) when said telescoping cover (430, 630) is extended to envelop said camera
(120, 460, 660).
20
4. The privacy ensuring camera enclosure (110, 400, 600) of claim 3 wherein
said telescoping cover (430, 630) is configured to be selectively retracted to expose said
camera (120, 460, 660).
- 25 5. The privacy ensuring camera enclosure (110, 400, 600) of claim 4, wherein
said at least one sliding panel (440, 450, 640, 650) is configured to be slidably actuated to
uncover said aperture (480, 680).
6. The privacy ensuring camera enclosure (110, 400, 600) of claim 5 wherein
30 said camera (120, 460, 660) is configured to extend through said aperture (480, 680) when
said telescoping cover (430, 630) is retracted.

7. A dynamic camera enclosure (110, 400, 600) having a first configuration and a second configuration;

said first configuration including a camera (120, 460, 660) enclosing
5 configuration; and

said second configuration including a surveillance configuration;

wherein said first configuration and said second configuration are different configurations.

10 8. The dynamic camera enclosure (110, 400, 600) of claim 7 wherein said camera enclosing configuration entirely surrounds a surveillance camera (120, 460, 660) such that said surveillance camera (120, 460, 660) is visibly removed from a privacy sensitive area.

15 9. The dynamic camera enclosure (110, 400, 600) of claim 8 wherein said surveillance configuration visibly exposes said surveillance camera (120, 460, 660) and enables said camera (120, 460, 660) to acquire surveillance information.

20 10. The dynamic camera enclosure (110, 400, 600) of claim 9 wherein said dynamic camera enclosure (110, 400, 600) is configured to be remotely actuated between said camera enclosing configuration and said surveillance configuration in response to a signal indicating a change in a threat level.

25 11. The dynamic camera enclosure (110, 400, 600) of claim 10 wherein said camera enclosing configuration comprises extending a telescoping section (430, 630) of said camera enclosure (110, 400, 600) and covering an aperture (480, 680).

30 12. The dynamic camera enclosure (110, 400, 600) of claim 11 wherein said dynamic camera enclosure (110, 400, 600) transitions from said enclosing position to said surveillance configuration by retracting said telescoping section (430, 630) and uncovering said aperture (480, 680).

13. A method for selectively monitoring a privacy sensitive area, comprising:
obtaining a privacy ensuring camera enclosure (110, 400, 600) and
mounting said privacy ensuring camera enclosure (110, 400, 600) in proximity to said
5 privacy sensitive area;

placing a surveillance camera (120, 460, 660) inside said privacy ensuring
camera enclosure (110, 400, 600);

configuring said privacy ensuring camera enclosure (110, 400, 600) in a
first enclosing configuration;

10 assigning said privacy sensitive area a privacy threshold value;

receiving a threat level;

dynamically reconfiguring said privacy ensuring camera enclosure (110,
400, 600) to a second surveillance configuration when said threat level exceeds said
privacy threshold value.

15

14. The method of claim 13 wherein said first enclosing configuration entirely
encloses said surveillance camera (120, 460, 660) such that said surveillance camera (120,
460, 660) is not visible from said privacy sensitive area.


20 15. The method of claim 14 wherein said dynamically reconfiguring said
privacy ensuring camera enclosure (110, 400, 600) to said second surveillance
configuration comprises visibly protruding said surveillance camera (120, 460, 660) into
said privacy sensitive area.

25 16. The method of claim 15 wherein said first enclosing configuration
comprises extending a telescoping section (430, 630) of said privacy ensuring camera
enclosure (110, 400, 600) and covering an aperture (480, 680).

30 17. The method of claim 16 wherein said second surveillance configuration
comprises retracting said telescoping section (430, 630) and uncovering said aperture
(480, 680).

18. The method of claim 13 further comprising returning said privacy ensuring camera enclosure (110, 400, 600) to said first enclosing configuration when said threat level is reduced below said privacy threshold value.

1/8

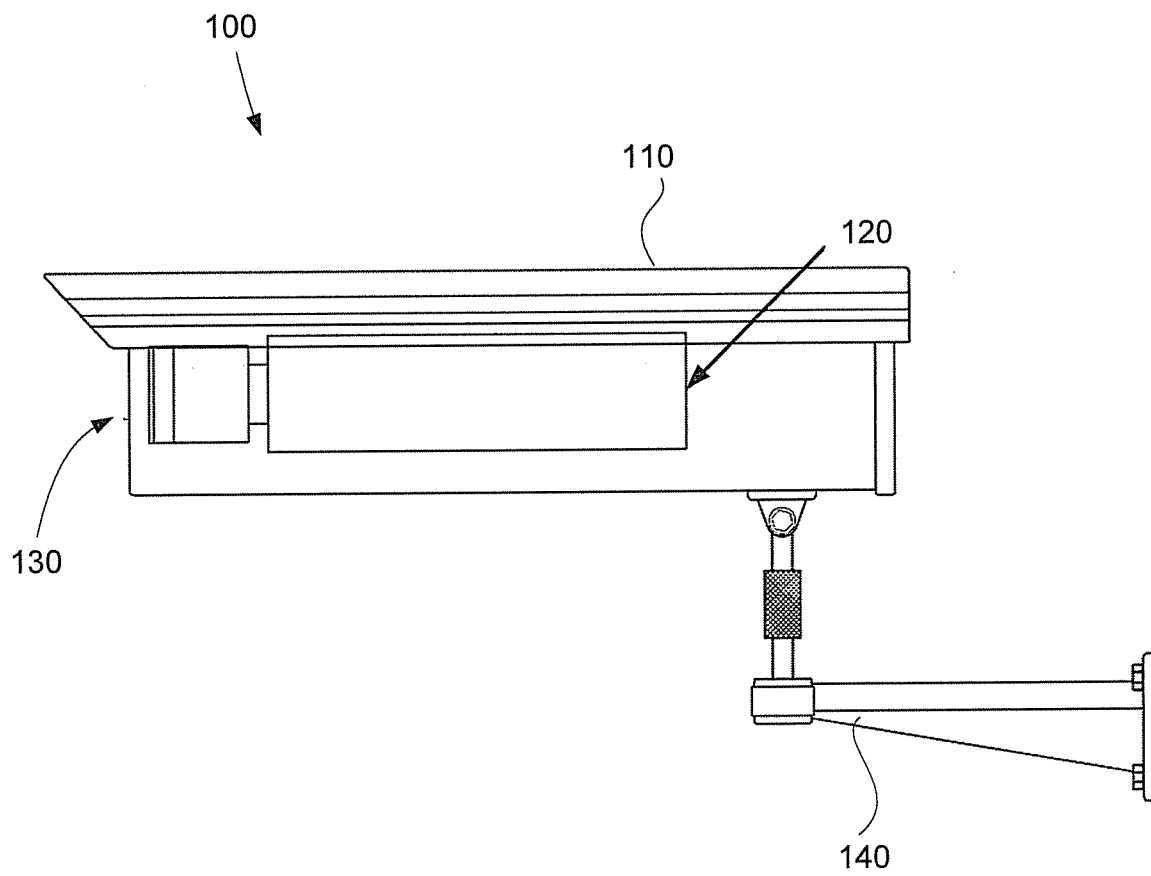***Fig. 1***

2/8

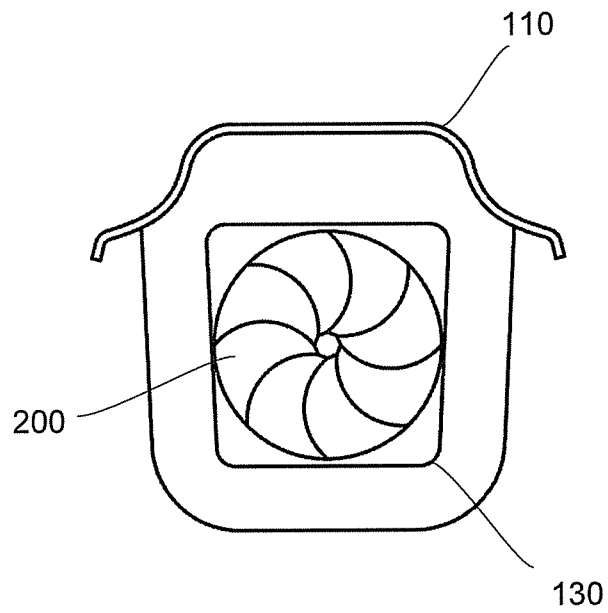


Fig. 2A

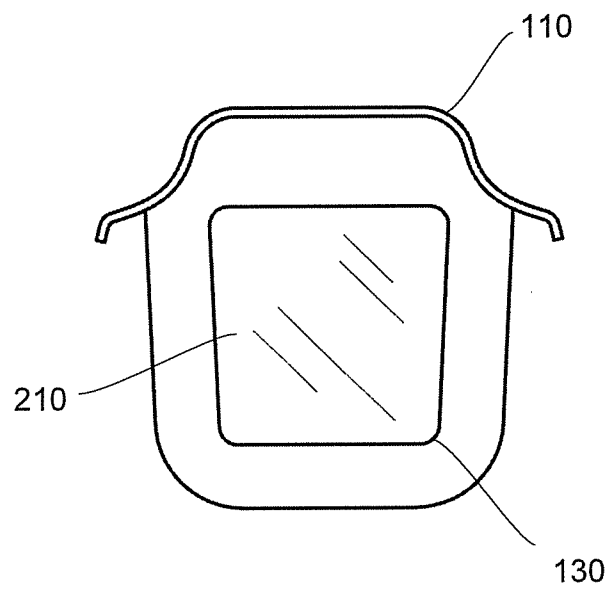


Fig. 2B

3/8

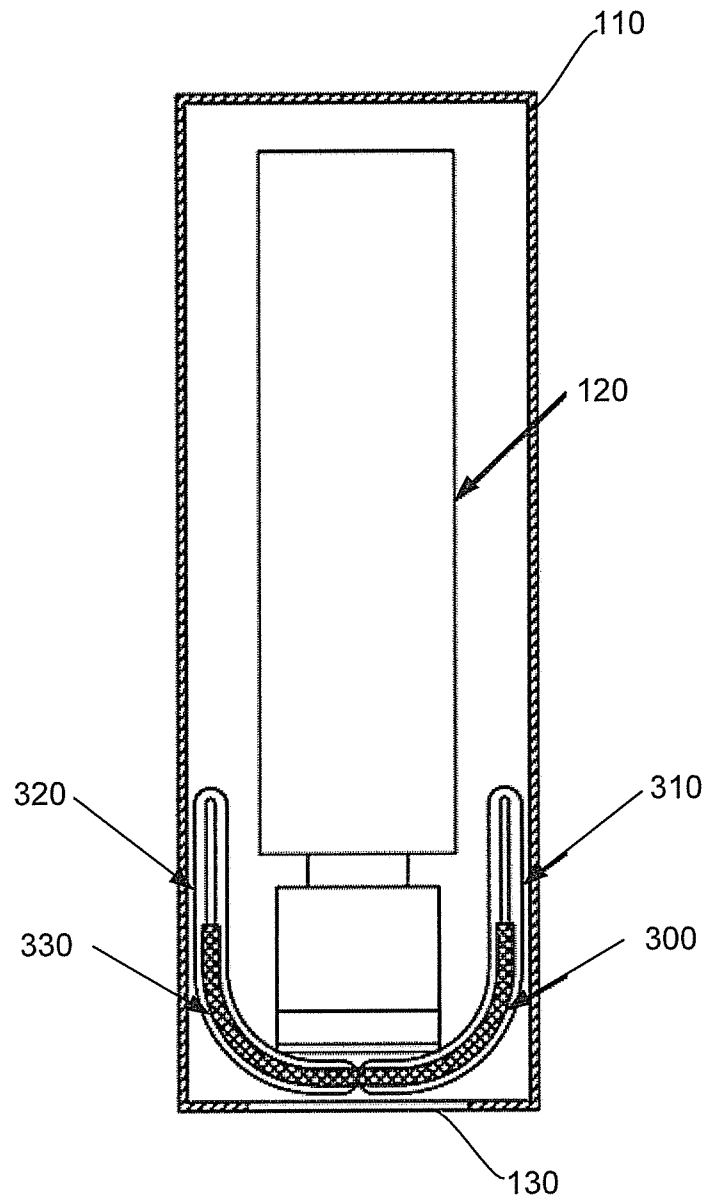


Fig. 3

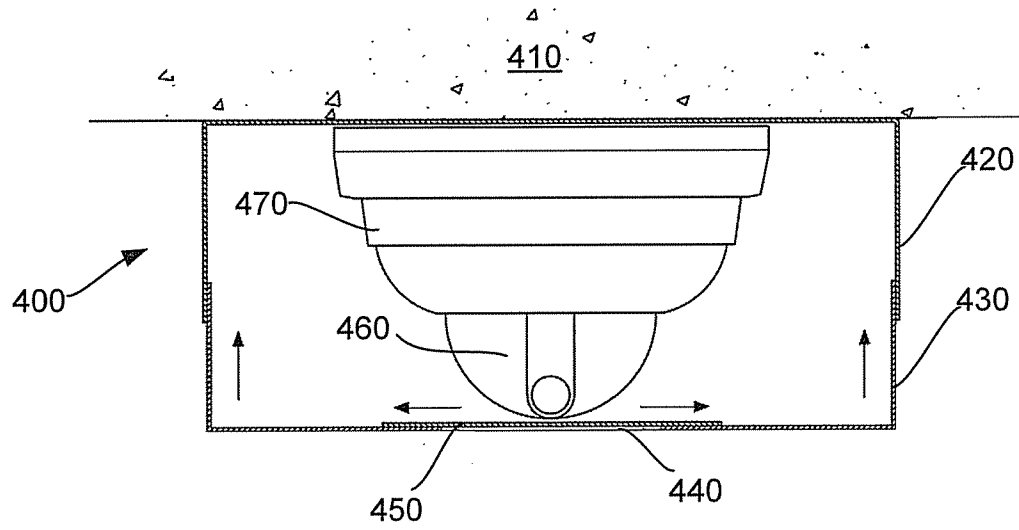


Fig. 4A

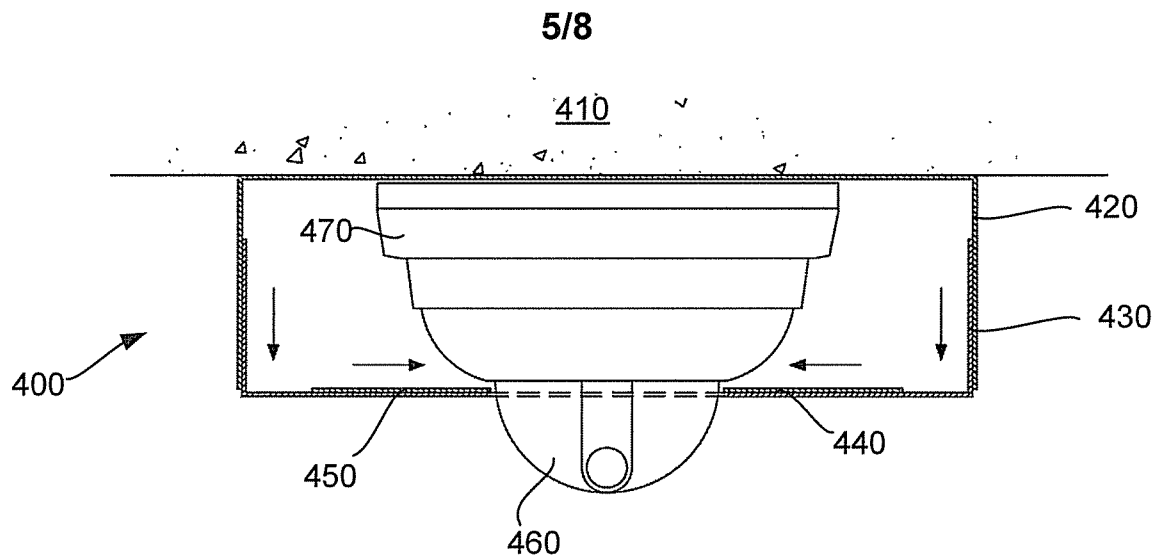


Fig. 5A

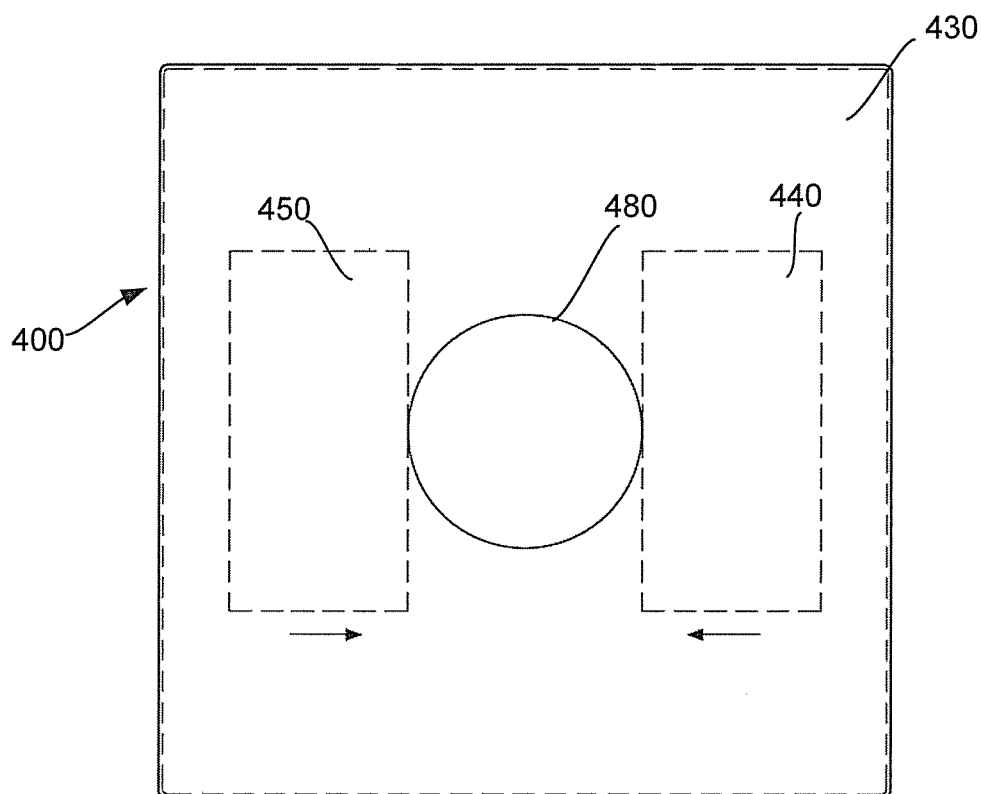


Fig. 5B

6/8

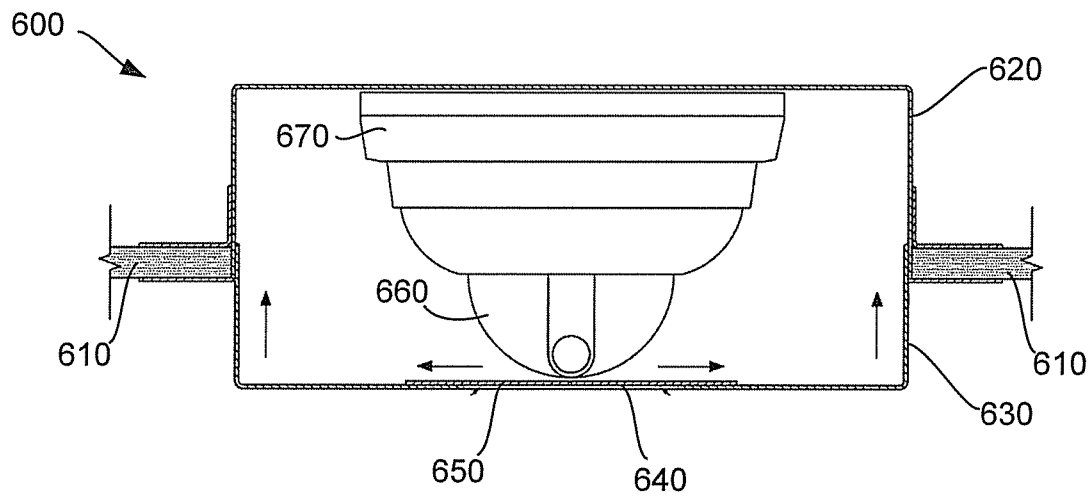


Fig. 6A

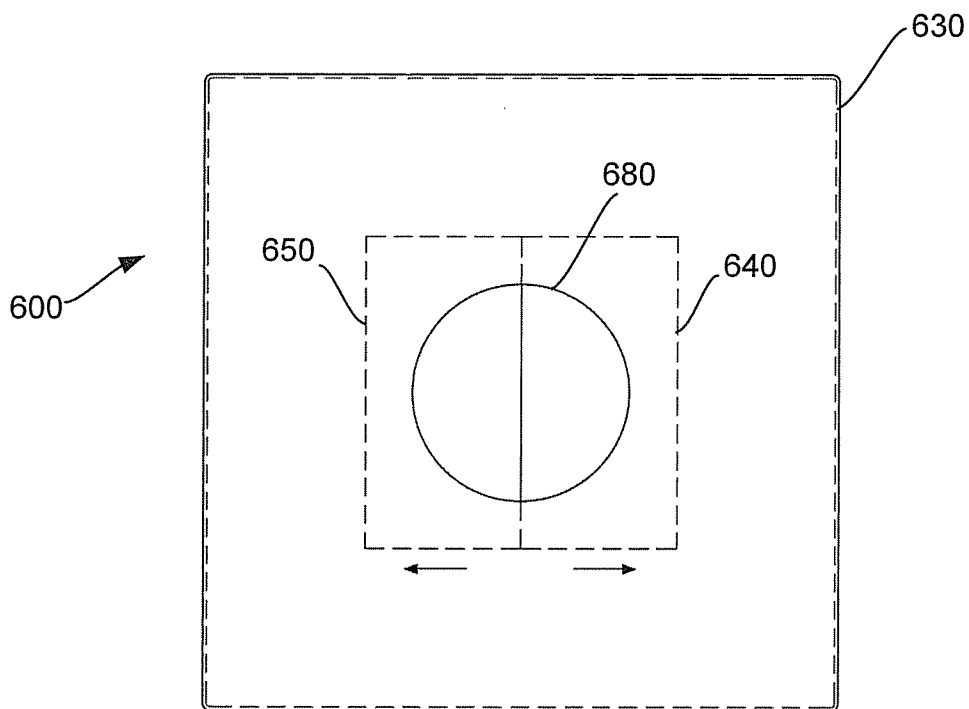


Fig. 6B

7/8

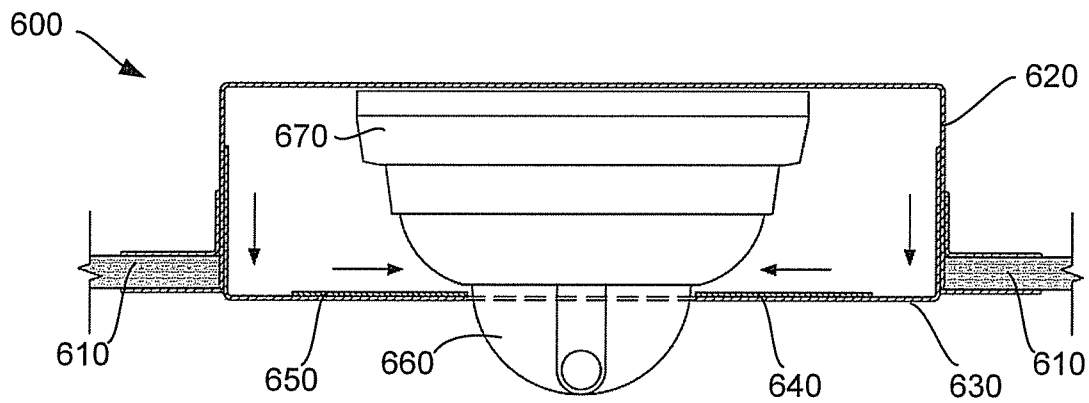


Fig. 7A

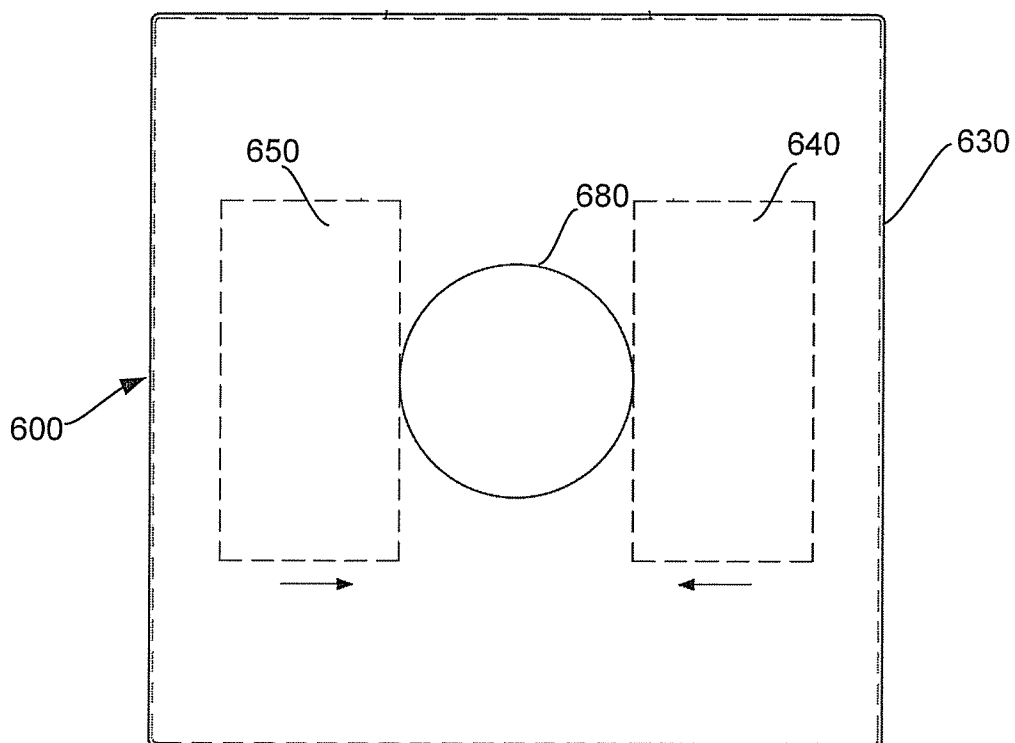
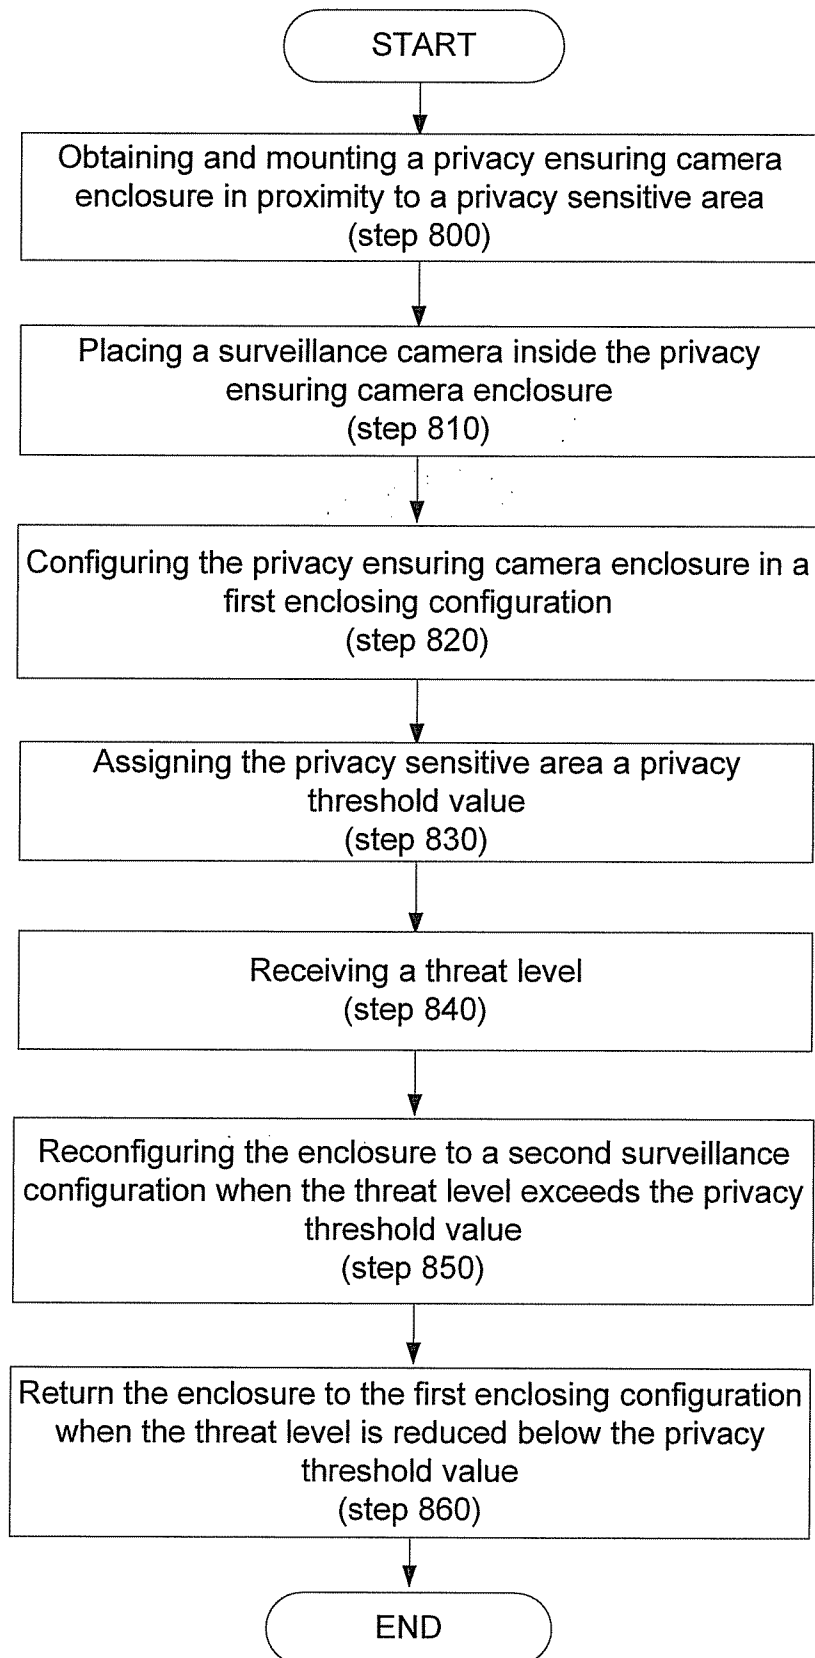


Fig. 7B

8/8

**Fig. 8**

A. CLASSIFICATION OF SUBJECT MATTER**G03B 17/00(2006.01)i, H04N 5/225(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 8: G03B, G02B, G05B, H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korea Utility Models and applications for Utility Models since 1975

Japanese Utility Models and applications for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS (KIPO internal) & keywords: "surveillance", "camera", and "telescope"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7,217,045 B2 (JONES) 15 May 2007 See abstract, column 1, line 15 - column 7, line 29, and Figures 1-8.	1-18
A	US 6,354,749 B1(PFAFFENBERGER II) 12 March 2002 See abstract, column 1, line 55 - column 5, line 47, and Figures 1-6.	1-18
A	US 6,850,025 B1(PAOLANTONIO et al.) 1 February 2005 See abstract, column 1, line 37 - column 10, line 58, and Figures 1-10.	1-18
A	US 5,610,656 A(BERNHARDT) 11 March 1997 See abstract, column 1, line 55 - column 5, line 38, and Figures 1-8.	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 FEBRUARY 2009 (26.02.2009)

Date of mailing of the international search report

26 FEBRUARY 2009 (26.02.2009)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Se Gyoung

Telephone No. 82-42-481-5518



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2008/077035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7217045	15.05.2007	CN 1801892 A GB 2421869 A	12.07.2006 05.07.2006
US 6354749	12.03.2002		None
US 6850025	1.02.2005		None
US 5610656	11.03.1997	DE 4405626 C1 DE 59508746 D1 EP 0668694 A2 EP 0668694 B1 EP 0668694 A2 EP 0668694 B1 EP 0668694 A3	02.02.1995 02.11.2000 23.08.1995 27.09.2000 23.08.1995 27.09.2000 07.01.1998