




(22) Date de dépôt/Filing Date: 2016/11/22  
(41) Mise à la disp. pub./Open to Public Insp.: 2017/05/23  
(30) Priorité/Priority: 2015/11/23 (CA2,913,423)

(51) Cl.Int./Int.Cl. *E06B 3/70* (2006.01),  
*E06B 5/00* (2006.01)  
(71) Demandeur/Applicant:  
LES PORTES ALAIN BOURASSA INC., CA  
(72) Inventeurs/Inventors:  
BOURASSA, MATHIEU, CA;  
BOURASSA, ALAIN, CA  
(74) Agent: BROUILLETTE LEGAL INC.

(54) Titre : UNE PORTE OFFRANT UNE HAUTE EFFICACITE ENERGETIQUE  
(54) Title: A DOOR WITH HIGH ENERGY EFFICIENCY

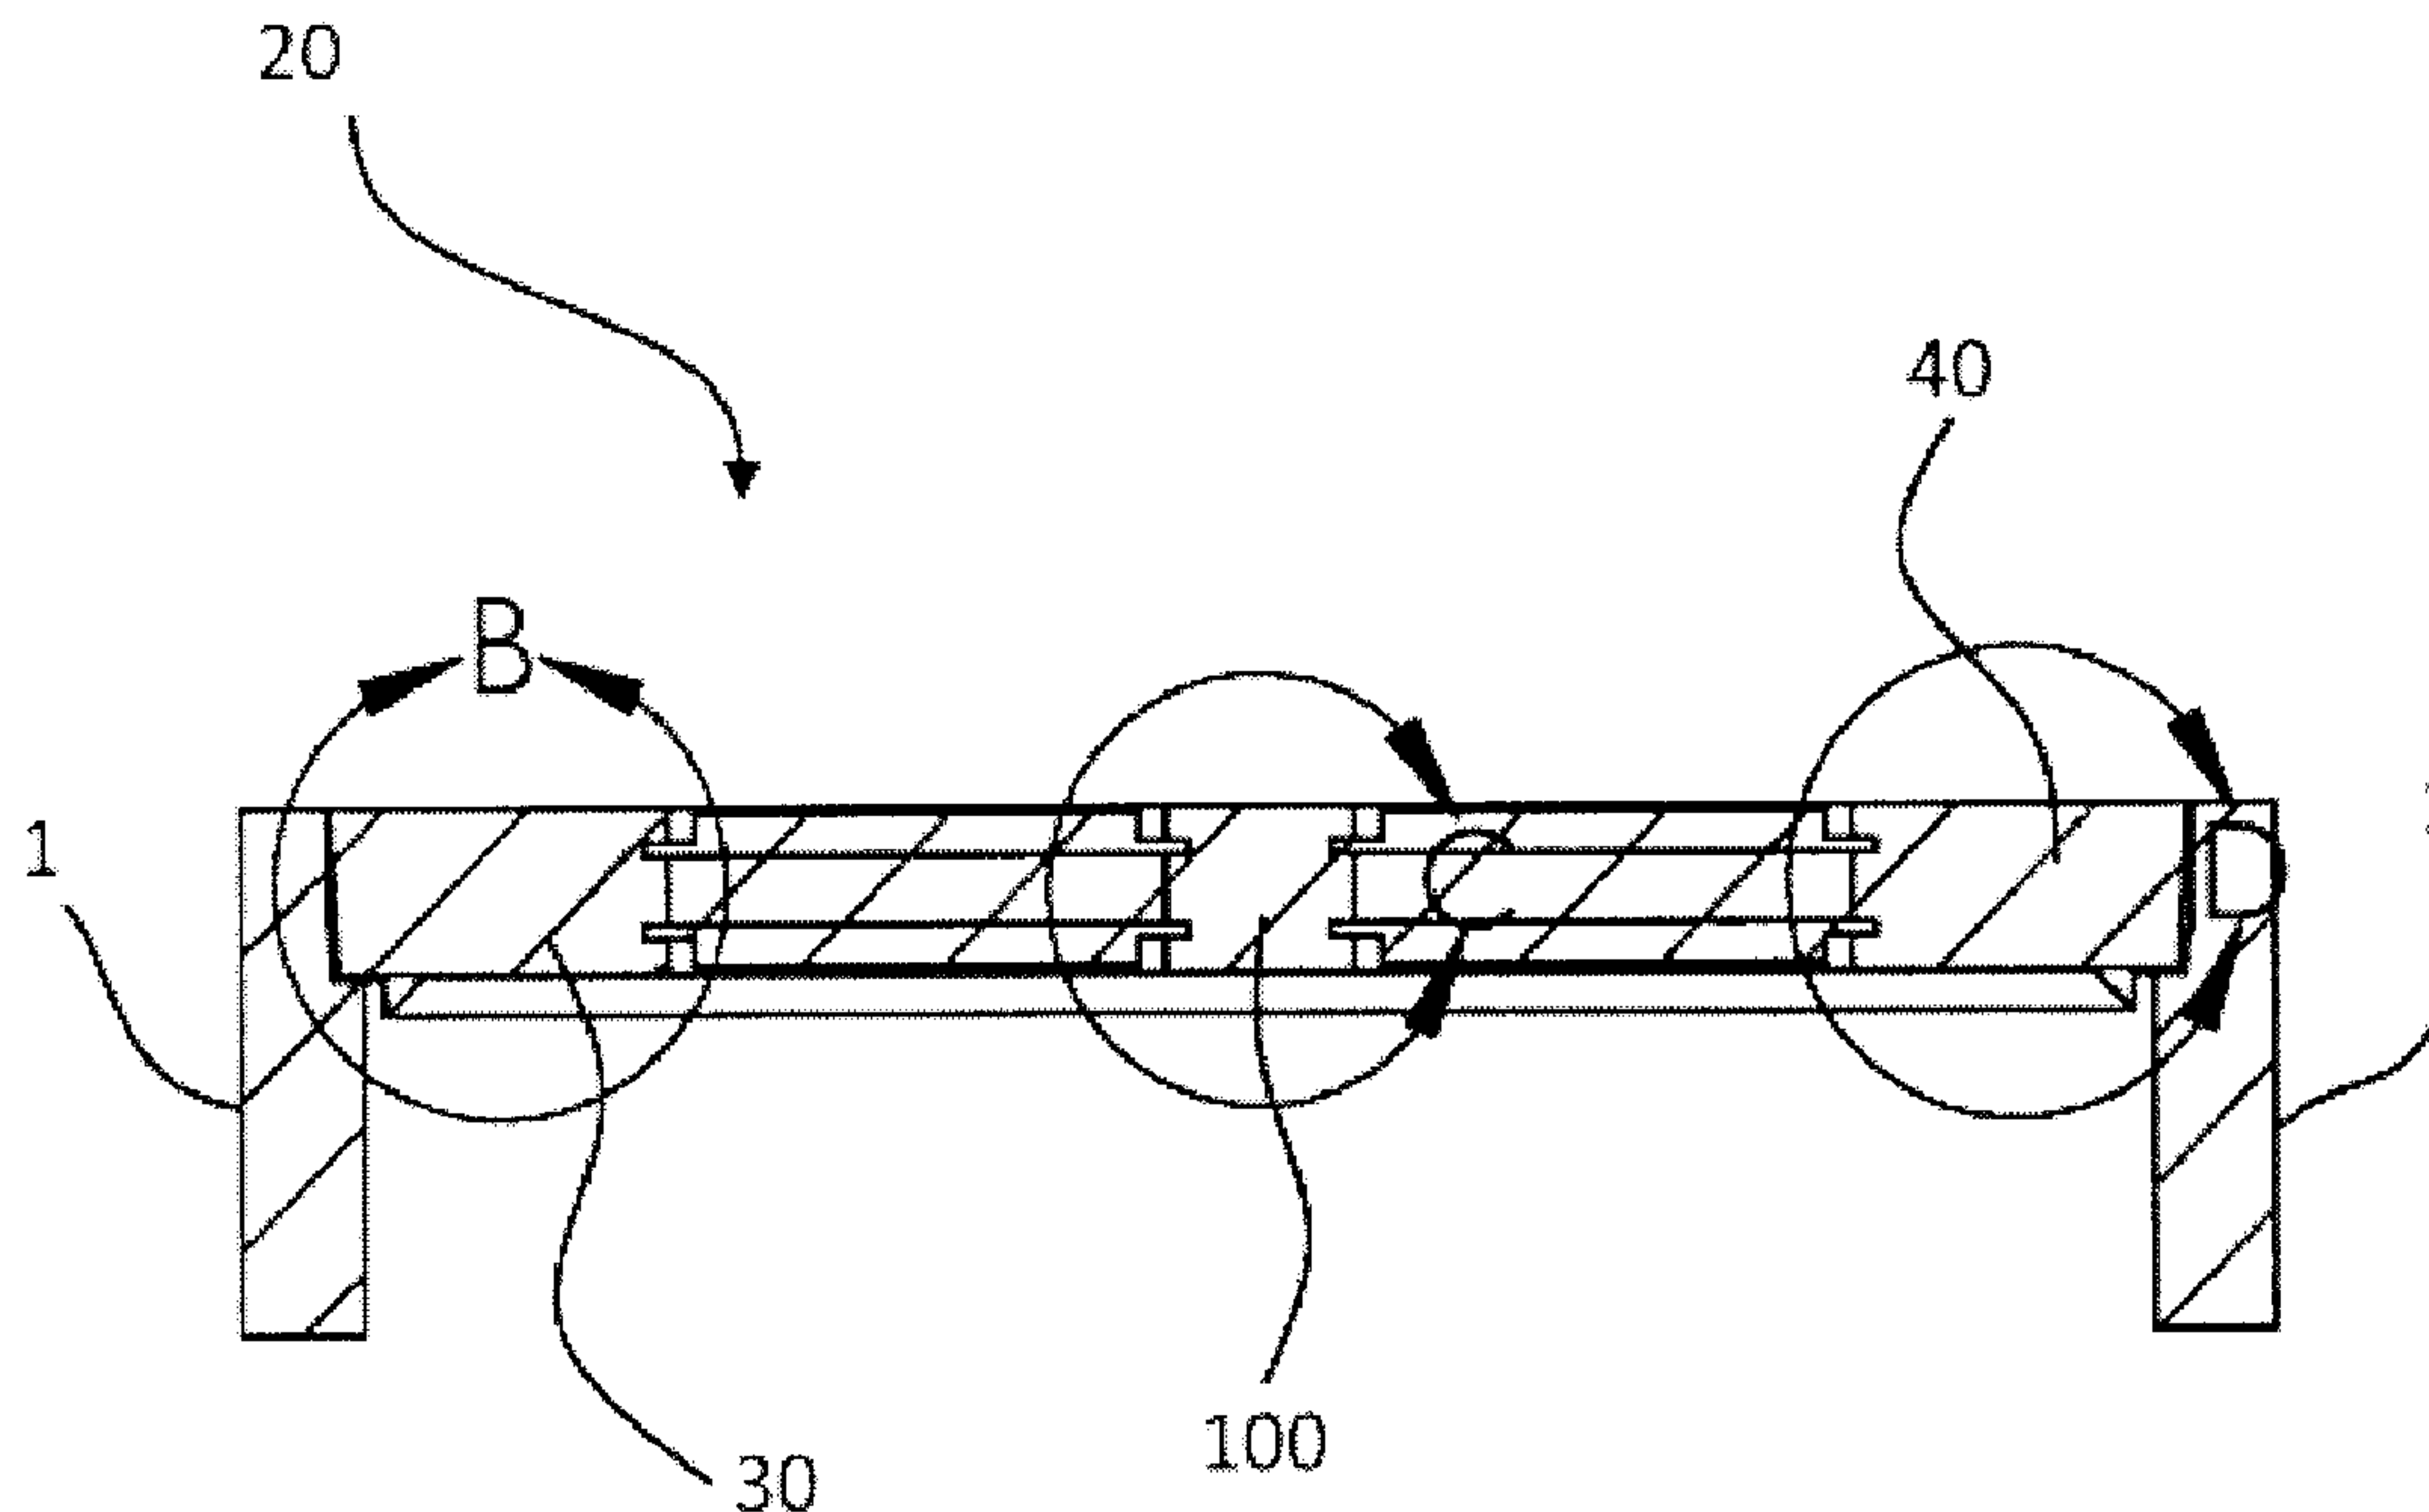

(57) Abrégé/Abstract:

The invention relates to the manufacturing of solid wood doors and consists in increasing the insulating value of a door by inserting an insulating material between the internal and external panels and in the center of the structural parts of the door. In this way, a

(57) **Abrégé(suite)/Abstract(continued):**

door with a minimum of non-insulated surfaces is achieved. By using this system, the insulating value of the assembled door is significantly increased and reach the requirements of high energy efficiency programs such as ENERGY STAR™. In addition to this, the rigidity and the durability of the solid wood door are not significantly compromised. A door with a traditional style and high thermal resistance levels is achieved.

File number: 12546-008

**A DOOR WITH HIGH ENERGY EFFICIENCY****ABSTRACT**

The invention relates to the manufacturing of solid wood doors and consists in increasing the insulating value of a door by inserting an insulating material between the internal and external panels and in the center of the structural parts of the door. In this way, a door with a minimum of non-insulated surfaces is achieved. By using this system, the insulating value of the assembled door is significantly increased and reach the requirements of high energy efficiency programs such as ENERGY STAR™. In addition to this, the rigidity and the durability of the solid wood door are not significantly compromised. A door with a traditional style and high thermal resistance levels is achieved.

File number: 12546-008

## A DOOR WITH HIGH ENERGY EFFICIENCY

### **Field of the invention**

[0001] The invention relates to the field of doors, in particular the manufacturing of solid wood slab doors.

### **5 Background**

[0002] Solid wood doors have been manufactured for many years with the same assembly principle.

[0003] In the last few years, the insulation of panels has become a standard step in the manufacturing of doors. The insulation of panels helps eliminate the problems of condensation on  
10 the interior of the panels, a location where the panels are the thinnest.

[0004] In construction, the R-value is the measurement of a material's capacity to resist heat flow from one side to the other. In simple terms, R-values measure the effectiveness of insulation and a higher number represents more effective insulation. Despite the insulation of panels, the global R value of a solid wood slab door remains relatively low.

15 [0005] In order to create a solid wood slab door with a higher R value, a system for insulating solid wood is herein provided.

### **Objectives of the invention**

[0006] The first objective of the invention is to have a solid wood slab door with a higher R value than the average solid wood slab door manufactured according to classical methods.

20 [0007] It is possible to increase the R value of the slab door by increasing its thickness; however, the R/inch value of the wood is around R-1/inch. Therefore, to reach a relatively high value, the thickness of the door is to be significantly increased, which can create structural and compatibility problems with hardware.

[0008] Another objective of the invention is to minimize the thickness of the door while  
25 significantly increasing the R value of the slab door.

File number: 12546-008

[0009] It is preferable to keep the traditional aspects of the solid wood door such as mouldings, embossed panelling, curves and other architectural elements that are added to the style of the solid wood door.

[0010] We wish to create a concept allowing for increasing the R value of any door model such  
5 that new door models may also be created with a high R value.

[0011] The structural rigidity of the assembly is to remain uncompromised.

[0012] Since the dimension of a piece of wood varies in relation to several criteria, it is important that the insulation method does not constrain the wood and that it allows the wood the freedom to change in dimension.

## 10 **Summary of the invention**

[0013] The invention aims to increase the insulating factor of a solid wood door. Instead of increasing the thickness of the panels (There is one external panel and one internal panel, both of which are two distinct parts) or the rigid insulation between the two, we have discovered a new way to increase the insulating factor of the door's structure.

15 [0014] The invention is first directed to a solid door with high energy efficiency comprising:

two vertical stiles defining the vertical edges of the door with a first stile comprising attaching elements for hingedly connecting the door to a door frame and a second stile, opposite to the first stile, optionally having a handle;

20 a top and bottom horizontal rail connecting the two vertical stiles and defining the top and bottom edges of the door;

the stiles and rails delimiting at least one panel of the door having an external and an interior surface; and

at least one insulator member embedded within each stile and each panel.

File number: 12546-008

[0015] According to a preferred embodiment, each insulator member is glued within the stiles and/or rails.

[0016] According to a preferred embodiment, a distance between an external surface of the door and any of said insulator member is inferior or equal to an inch.

5 [0017] According to a preferred embodiment, the insulator member comprises polyisocyanate, polystyrene or injected polyurethane.

[0018] According to a preferred embodiment, the at least one panel, the at least one stile, the at least one intermediary mullion and the at least one frame are made of wood.

10 [0019] According to a preferred embodiment, wherein an external and/or interior surface of the door is laminated with at least one lamination part.

[0020] According to a preferred embodiment, the insulator member is embedded between at least two separate parts affixed together to form said stile.

[0021] According to a preferred embodiment, the insulator member is embedded between at least two separate parts forming said panel.

15 [0022] According to a preferred embodiment, the door further comprises at least one intermediary mullion running the full height of the door; the intermediary mullion defining the vertical center of the door; wherein the stiles, rails and intermediary mullion delimiting said at least one panel of the door; the at least one insulator member being also embedded within each intermediary mullion.

20 [0023] According to a preferred embodiment, the insulator member is embedded between at least two separate parts affixed together to form said at least one intermediary mullion.

[0024] According to a preferred embodiment, each insulator member is glued within the at least one intermediary mullion.

25 [0025] The invention is also directed to a method for the making of a solid door with high energy efficiency properties. The door comprising at least two vertical stiles defining the vertical edges of the door with a first stile comprising attaching elements for hingedly connecting the door to a

File number: 12546-008

door frame and a second stile, opposite to the first stile, optionally having a handle; a top and bottom horizontal rail connecting the two vertical stiles and defining the top and bottom edges of the door; the stiles and rails delimiting at least one panel of the door having an external and an interior surface. The method comprises the steps of:

- 5           a)           embedding at least one first insulator member within each stile;
- b)           embedding at least one second insulator member within each panel; and
- c)           assembling the stiles, rails and panels to form the door.

[0026] According to a preferred embodiment, the method further comprises the steps of gluing the insulator member embedded within the stiles and/or panel.

- 10 [0027] According to a preferred embodiment, the method further comprises the step of laminating an external and/or interior surface of the door.

[0028] According to a preferred embodiment, the lamination is performed by way of processing with the help of a profiler or a CNC.

- 15 [0029] According to a preferred embodiment, the insulator member is embedded between at least two separate parts attached together to form said stile.

[0030] According to a preferred embodiment, the insulator member is embedded between at least two separate parts attached together to form said intermediary mullion.

[0031] According to a preferred embodiment, the insulator member is embedded between at least two separate parts attached together to form said panel.

- 20 [0032] According to a preferred embodiment, the insulator member is made by cutting from a rigid and raw piece comprising polyisocyanate, polystyrene or injected polyurethane.

[0033] According to a preferred embodiment, the manufacturing method of the at least one panel, stile and/or intermediary mullion is such that each is laminated with at least one piece of wood and processed with the help of a profiler or a CNC.

File number: 12546-008

[0034] According to a preferred embodiment, the door may further comprise at least one intermediary mullion running the full height of the door; the intermediary mullion defining the vertical center of the door; wherein the stiles, rails and intermediary mullion delimiting said at least one panel of the door; and at least one insulator member embedded within each intermediary  
5 mullion. The method then further comprising the steps of:

embedding at least one third insulator member within each intermediary mullion; and

assembling the stiles, intermediary mullion, rails and panels to form the door.

[0035] According to a preferred embodiment, the method further comprises the step of embedding the said insulator member between at least two separate parts affixed together to form  
10 said at least one intermediary mullion.

[0036] According to a preferred embodiment, each insulator member is glued within the at least one intermediary mullion.

[0037] Since the structure of the door is composed of 100% solid wood, a method for increasing the insulating factor of the solid wood was needed. We therefore decided to introduce an  
15 insulating material at the center of the piece of wood.

[0038] The goal is to introduce insulating material with the highest R/inch value in order to minimize the thickness of the door and increase as much as possible the global R value of the door.

[0039] Since we wish to conserve an appropriate level of structural rigidity for each part and each  
20 door assembly, a type of sandwich manufacturing technique is plausible, but diminishes the rigidity of the whole since the link between the piece of wood on the outside and the one on the inside is the insulating material itself. Usually the insulating materials have a limited mechanical resistance. However, we have found a way to use the sandwich principle for small dimensional parts that do not have a heavy load.

[0040] In order to conserve the rigidity of the pieces, the insulation is to be inserted in the center  
25 of the part, but it is to be non-visible and the minimal size of the wall for the wood between the

File number: 12546-008

outside of any of the surface of the part and the insulation at the center is to be around half of the total thickness of the door minus the thickness of the insulation at the center..

[0041] In order to significantly grow the R value of the part of wood, the insulation is to be around ½ inch in thickness.

5 [0042] In order to minimize the chances of delamination, it is preferable to glue the insulation in the cavity.

[0043] Several manufacturing methods may achieve the desired result:

- Create a cavity in a part, introduce the insulation and laminate the part over the cavity;
- Create a part of 3 or more layers composed of at least one insulating layer and laminate  
10 one or more pieces of wood to hide the insulation;
- Create a part of 3 or more layers composed of at least one insulating layer without laminating the sandwich assembly field (good for parts with small dimensions).

#### **Brief description of the figures**

15 [0044] The preceding description and other objectives, characteristics and advantages of the invention will be elucidated next in reference to the annexed figures in which:

[0045] Figure 1 is an elevated perspective of the assembly of the door in the preferred embodiment of the invention.

[0046] Figure 2 is the cross-section AA presented in figure 1.

[0047] Figure 3 shows detail B of the cross-section AA presented in figure 2.

20 [0048] Figure 4 shows detail C of the cross-section AA presented in figure 2.

[0049] Figure 5 shows detail D of the cross-section AA presented in figure 2.

File number: 12546-008

**Detailed description of the preferred embodiments**

[0050] A new door with high energy efficiency is described below. Although the invention is described in relation to a specified embodiment, it is understood that this preferred embodiment serves only as an example and that the invention is not limited to the features of the embodiments described and illustrated herein, but includes all variations and modifications within the scope and spirit of the disclosure.

[0051] Referring to Figures 1 and 2, a door 20 comprises two vertical stiles 30, 40 and one intermediary mullion 100 running the full height of the door 20 and defining the vertical edges of the door 20 with a first stile 30 comprising attaching elements 50 for hingedly connecting the door 20 to a door frame 1 and a second stile 40, opposite to the first stile 30, optionally having a doorknob 60. A top and bottom horizontal rail 70, 80 connecting the two vertical stiles 30, 40 and defining the top and bottom edges of the door 20. The stile 40, the intermediary mullion 100 and rails 71, 81 delimiting a panel 90 of the door 20 having an external and an interior surface.

[0052] Figure 1 shows the elevated perspective of the assembly of the door, where cross-section AA is further detailed in figure 2, which is comprised of the cross-section parts herein denoted as detail B, C and D.

[0053] Referring to figure 3 which shows detail B in figure 2, the manufacturing details of the frame 1, stile 30 and panel 91 on the side of the door hinge elements 50 are shown. This stile 30 and panel 91 section is manufactured with many parts and many materials contrary to a traditional stile and panel that are simply composed of one or several pieces of wood laminated in a single operation. The composite parts of the door 20 on the side of the door hinge elements 50 are enumerated in the table below:

| Part | Description   |
|------|---|
| 1    | Door frame;   |
| 25   | <ul style="list-style-type: none"> <li>▪ Material type : wood</li> <li>▪ Alternative material : none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.</li> </ul> |

File number: 12546-008

- 2 Internal portion of the stile;
- Material type : wood
  - Alternative material : none
  - Manufacturing method: Part laminated with several pieces of wood and  
5 processed with the help of a profiler or a CNC.
- 3 External portion of the stile;
- Material type : wood
  - Alternative material : none
  - Manufacturing method: Part laminated with several pieces of wood and  
10 processed with the help of a profiler or a CNC
- 4 Internal panel;
- Material type : wood
  - Alternative material : none
  - Manufacturing method: Part laminated with several pieces of wood and  
15 processed with the help of a profiler or a CNC.
- 5 External panel;
- Material type : wood
  - Alternative material : none
  - Manufacturing method: Part laminated with several pieces of wood and  
20 processed with the help of a profiler or a CNC.
- 6 Panel insulation;
- Material type : Polyisocyanate
  - Alternative material : Polystyrene, injected polyurethane or other rigid  
insulation materials.
  - Manufacturing method: Part cut from a rigid, crude piece.  
25
- 7 Stile insulation;
- Material type : Polyisocyanate
  - Alternative material : Polystyrene, injected polyurethane or other rigid  
insulation materials.
  - Manufacturing method: Part cut from a rigid, crude piece.  
30

File number: 12546-008

[0054] These parts are principally the external part of the stile (part 3), the stile's insulation (part 7), the internal part of the stile (part 2), the panels (parts 4 and 5) and the panel insulation (part 6).

[0055] Global R values achieved with different door types are tabulated herein:

| R value | Thickness | Insulation location         | Door type         |
|---------|-----------|-----------------------------|-------------------|
| ≈R-2    | 2 ¼"      | None                        | Other             |
| ≈R-2,5  | 2 ¼"      | Between panels              | Other             |
| ≈R-7    | 3"        | In frame and between panels | Current invention |

[0056] The doors according to the present invention provide a R-value of about R-7 which is 2.8 times higher than a similar door with insulation between the panels only, or 3.5 times higher than a door without insulation.

[0057] Referring to figure 4 showing detail C in figure 2, the detail of the manufacturing of the intermediary section of the door 20 with an intermediary mullion 100 is shown. This intermediary section of the door 20 with an intermediary mullion 100 is manufactured from several parts and several materials contrary to the traditional door part that is composed of one or more pieces of wood laminated in a single operation. The composite parts of the intermediary section of the door 20 with the intermediary mullion 100 are enumerated in the table below :

| Part | Description   |
|------|---|
| 9    | Internal intermediary mullion;  |
| 15   | <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.</li> </ul> |
| 10   | External intermediary mullion;  |
| 20   | <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> </ul>   |

File number: 12546-008

- Manufacturing method: Part laminated with several parts of wood and processed with the help of a profiler or a CNC.
- 4 Internal panels;
  - Material type: wood
  - 5
    - Alternative material: none
    - Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.
- 5 External panels;
  - Material type: wood
  - 10
    - Alternative material: none
    - Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.
- 6 Panel insulation;
  - Material type: Polyisocyanate
  - 15
    - Alternative material: Polystyrene, injected polyurethane or other rigid insulation materials.
    - Manufacturing method: Part cut from a rigid, crude piece.
- 8 Intermediary mullion insulation;
  - Material type : Polyisocyanate
  - 20
    - Alternative material: Polystyrene, injected polyurethane or other rigid insulation materials.
    - Manufacturing method: Part cut from a rigid, raw piece.
- 25 [0058] These parts are principally the external part of the intermediary mullion (part 10), the mullion insulation (part 8), the internal part of the intermediary mullion (part 9), the panels (part 4 and 5) and the panel insulations (part 6).

[0059] Referring to figure 5 showing detail D in figure 2, the manufacturing details of the the frame 1, stile 40 and panel 90 on the side of the door knob 60 are shown. This stile 40 and panel

File number: 12546-008

90 section is manufactured with several parts and several materials, contrary to a traditional stile and panel that are simply composed of one or several pieces of wood laminated in a single operation. The composite parts of the door 20 on the side of the door knob 60 are enumerated in the table below:

|    |      |  |
|----|------|--|
| 5  | Part | Description  |
| 10 | 1    | Door frame; <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.</li> </ul>      |
| 15 | 2    | Internal portion of the stile; <ul style="list-style-type: none"> <li>▪ Material type : wood</li> <li>▪ Alternative material : none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with a CNC.</li> </ul>           |
| 20 | 3    | External portion of the stile; <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with a CNC.</li> </ul>             |
| 25 | 4    | Internal panel ; <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.</li> </ul> |
| 30 | 5    | External panel; <ul style="list-style-type: none"> <li>▪ Material type: wood</li> <li>▪ Alternative material: none</li> <li>▪ Manufacturing method: Part laminated with several pieces of wood and processed with the help of a profiler or a CNC.</li> </ul>  |

File number: 12546-008

## 6 Panel insulation;

- Material type: Polyisocyanate
- Alternative material: Polystyrene, injected polyurethane or other rigid insulation materials.

5

- Manufacturing method: Part cut from a rigid, crude piece.

## 7 Stile insulation;

- Material type: Polyisocyanate
- Alternative material: Polystyrene, injected polyurethane or other rigid insulation materials.

10

- Manufacturing method: Part cut from a rigid, raw piece.

[0060] These parts are primarily the external part of the stile (part 3), the stile insulation (part 7), the internal part of the stile (part 2), the panels (parts 4 and 5) and the panel insulation (part 6).

[0061] Although the illustrated preferred embodiment of the invention has been described below, it is understood that the concepts of the invention may be incorporated and used in other  
 15 embodiments and that the annexed claims are to be interpreted to include other embodiments, with the exception of any that are limited by the prior art.

File number: 12546-008

**CLAIMS:**

1. A solid door with high energy efficiency comprising:  
  
two vertical stiles defining the vertical edges of the door with a first stile comprising  
attaching elements for hingedly connecting the door to a door frame and a second stile,  
5 opposite to the first stile, optionally having a handle;  
  
a top and bottom horizontal rail connecting the two vertical stiles and defining the top and  
bottom edges of the door;  
  
the stiles and rails delimiting at least one panel of the door having an external and an  
interior surface; and  
  
10 at least one insulator member embedded within each stile and each panel.
2. The door of claim 1, wherein each insulator member is glued within the stiles and/or rails.
3. The door of claim 1 or 2, wherein a distance between an external surface of the door and  
any of said insulator member is inferior or equal to the total thickness of the door minus the  
thickness of the insulation at the center divided by two.
- 15 4. The door of any one of claims 1 to 3, wherein the insulator member comprises  
polyisocyanate, polystyrene or polyurethane.
5. The door of any one of claims 1 to 4, wherein the at least one panel, the at least one stile,  
and the at least one frame are made of wood, the door having a R-value of about R-7.
6. The door of any one of claims 1 to 5, wherein an external and/or interior surface of the door  
20 is laminated with at least one lamination part.
7. The door of any one of claims 1 to 6, wherein said insulator member is embedded between  
at least two separate parts affixed together to form said stile.
8. The door of any one of claims 1 to 7, wherein said insulator member is embedded between  
at least two separate parts forming said panel.

File number: 12546-008

9. The door of any one of claims 1 to 8, further comprising at least one intermediary mullion running the full height of the door; the intermediary mullion defining the vertical center of the door; wherein the stiles, rails and intermediary mullion delimiting said at least one panel of the door; the at least one insulator member being also embedded within each  
5 intermediary mullion.
10. The door of claim 9, wherein said at least one insulator member is embedded between at least two separate parts affixed together to form said at least one intermediary mullion.
11. The door of claim 9 or 10, wherein each insulator member is glued within the at least one intermediary mullion.
- 10 12. A method for the making of a solid door with high energy efficiency properties, the door comprising at least two vertical stiles defining the vertical edges of the door with a first stile comprising attaching elements for hingedly connecting the door to a door frame and a second stile, opposite to the first stile, optionally having a handle; a top and bottom horizontal rail connecting the two vertical stiles and defining the top and bottom edges of  
15 the door; the stiles and rails delimiting at least one panel of the door having an external and an interior surface;
- the method comprising the steps of:
- a) embedding at least one first insulator member within each stile;
  - b) embedding at least one second insulator member within each panel; and
  - 20 c) assembling the stiles, rails and panels to form the door.
13. The method of claim 12, wherein each insulator member is glued within the stiles and/or rails.
14. The method of claim 12 or 13, further comprising the step of laminating an external and/or interior surface of the door.
- 25 15. The method of claim 14, wherein the lamination is performed by way of processing with the help of a profiler or a CNC.

File number: 12546-008

16. The method of any one of claims 12 to 15, wherein said insulator member is embedded between at least two separate parts attached together to form said stile.
17. The method of any one of claims 12 to 16, wherein said insulator member is embedded between at least two separate parts attached together to form said panel.
- 5 18. The method of any one of claims 12 to 17, wherein the insulator member is made by cutting from a rigid and raw piece comprising polyisocyanate, polystyrene or is made from injected polyurethane.
19. The method of any one of claims 12 to 18, wherein the manufacturing method of the at least one panel and/or stile is such that each is laminated with at least one piece of wood and  
10 processed with the help of a profiler or a CNC.
20. The method of claim 12, wherein the door further comprises at least one intermediary mullion running the full height of the door; the intermediary mullion defining the vertical center of the door; wherein the stiles, rails and intermediary mullion delimiting said at least one panel of the door; and at least one insulator member embedded within each  
15 intermediary mullion, the method further comprising the steps of:
- embedding at least one third insulator member within each intermediary mullion; and
- assembling the stiles, intermediary mullion, rails and panels to form the door.
21. The method of claim 20, further comprising embedding the said insulator member between at least two separate parts affixed together to form said at least one intermediary mullion.
- 20 22. The method of claim 20 or 21, wherein each insulator member is glued within the at least one intermediary mullion.
23. The method of any one of claims 20 to 22, wherein the manufacturing method of the at least one intermediary mullion is such that each is laminated with at least one piece of wood and processed with the help of a profiler or a CNC.

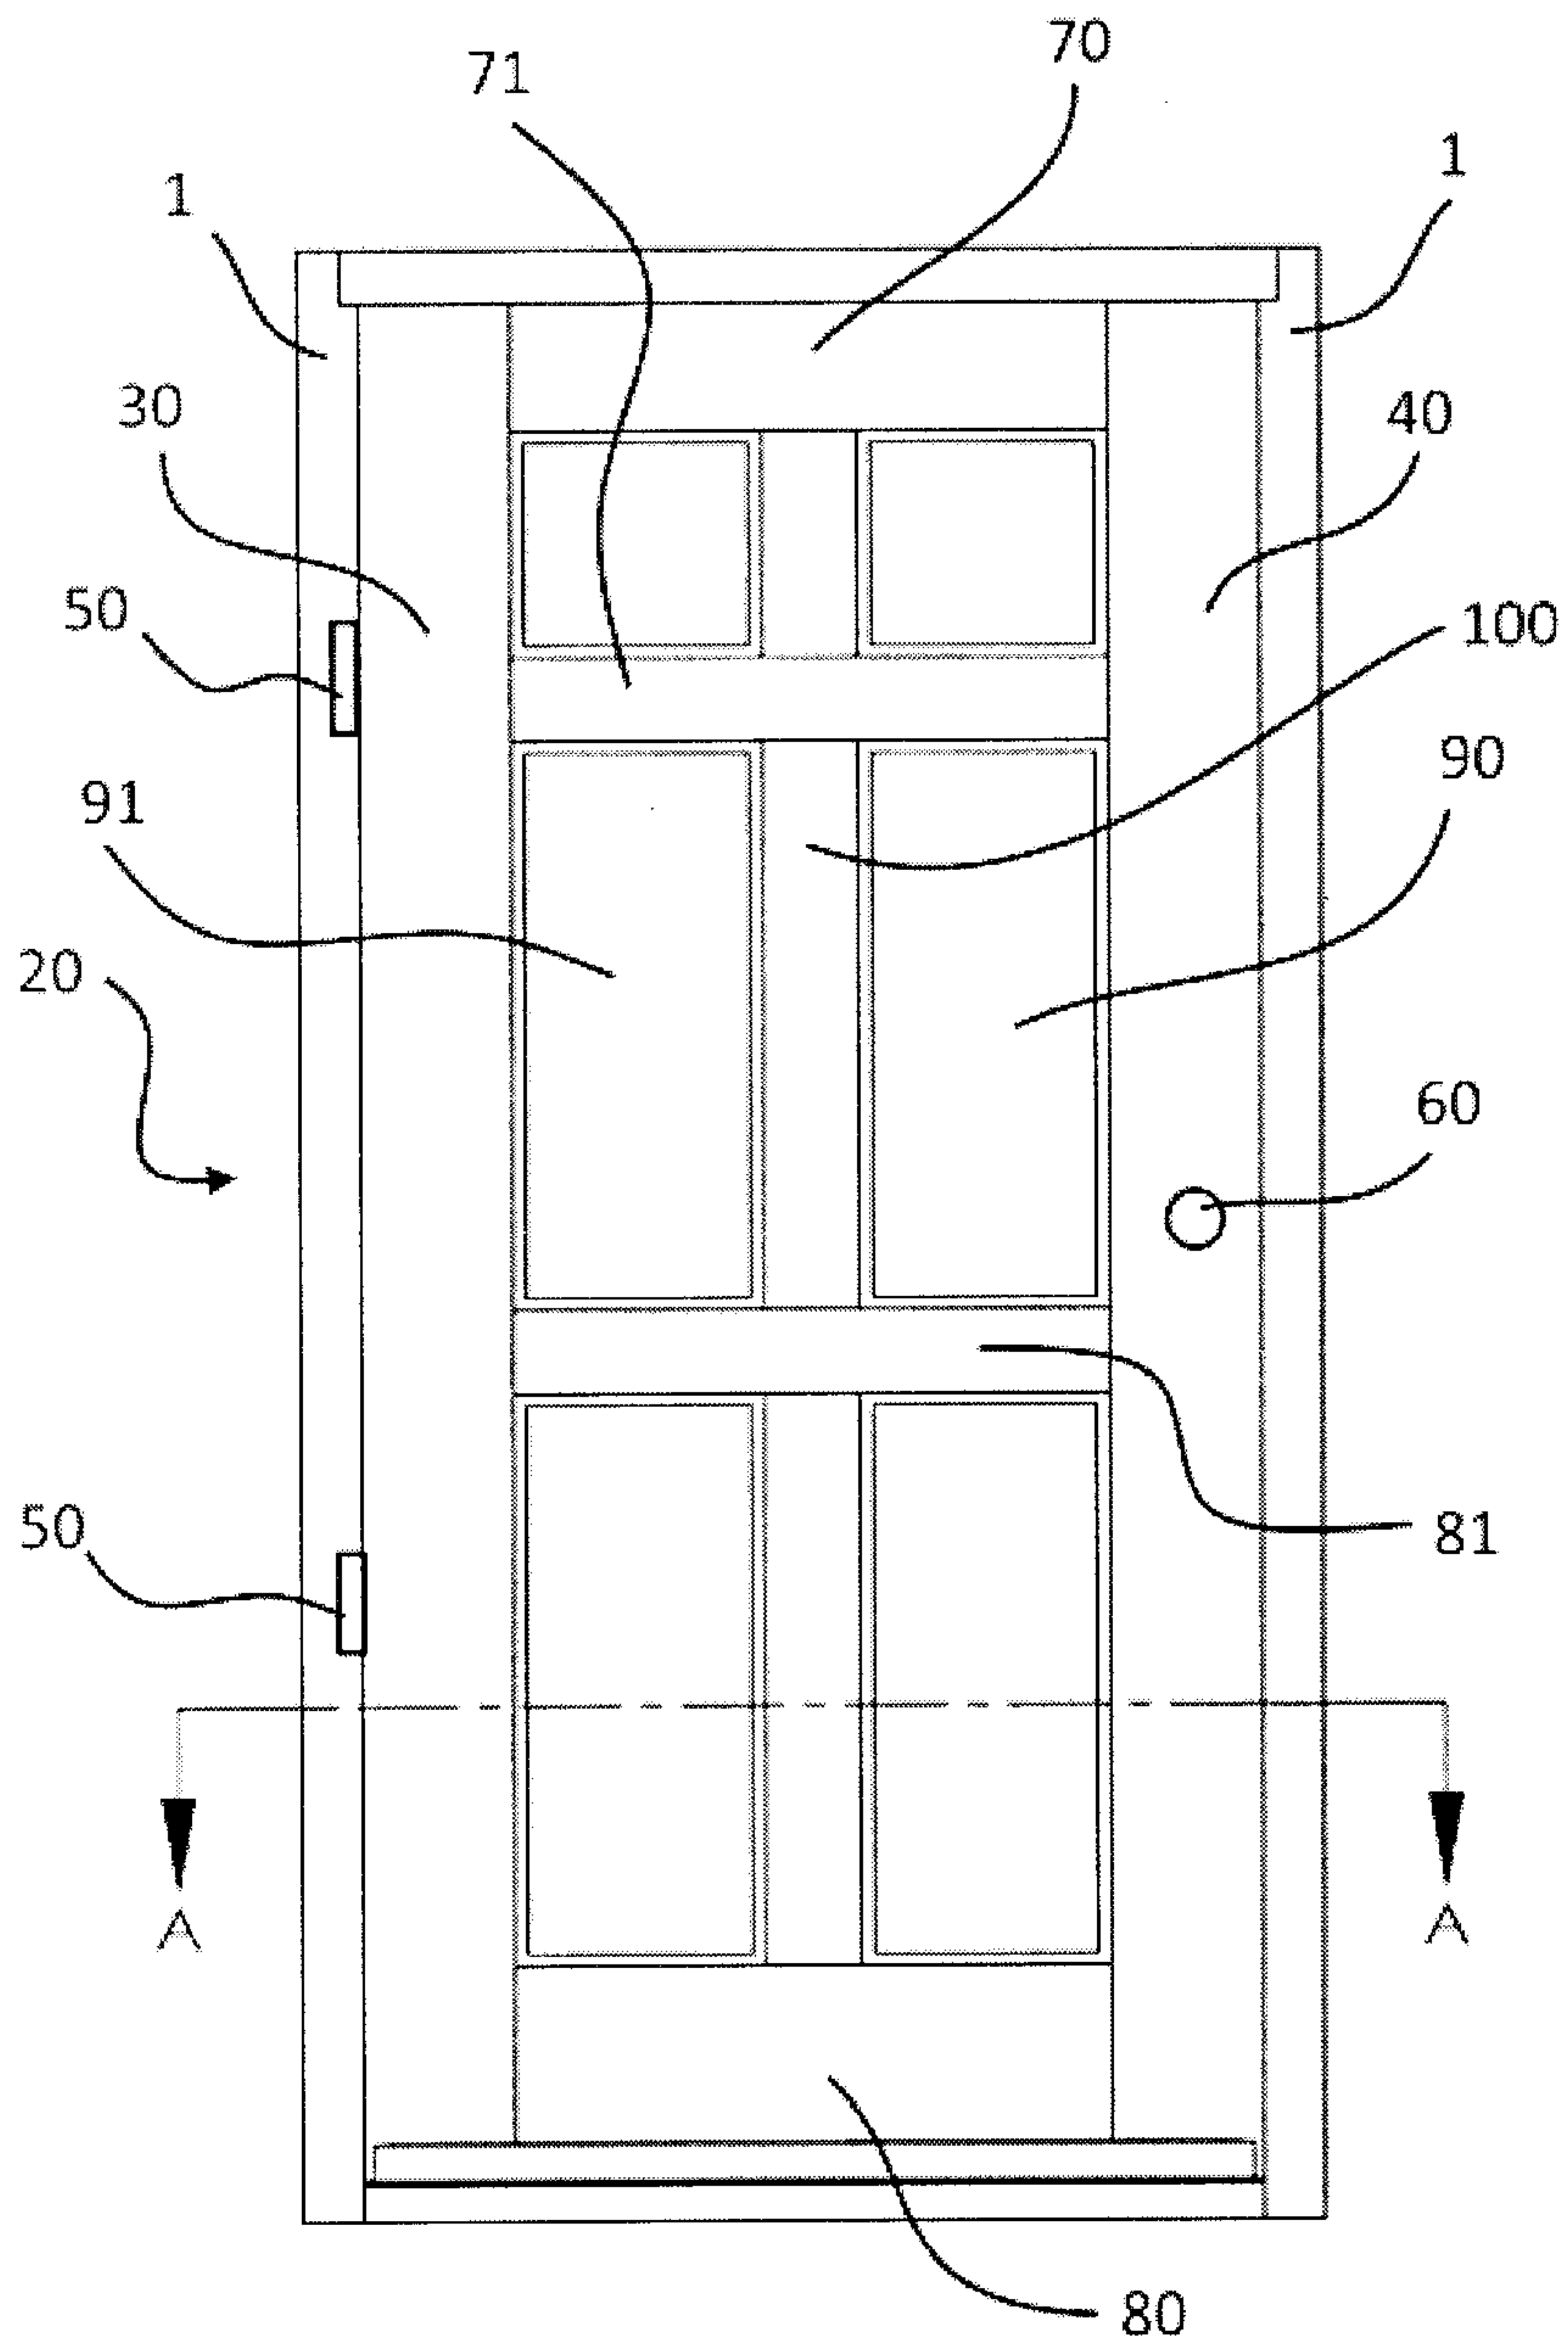


Fig. 1

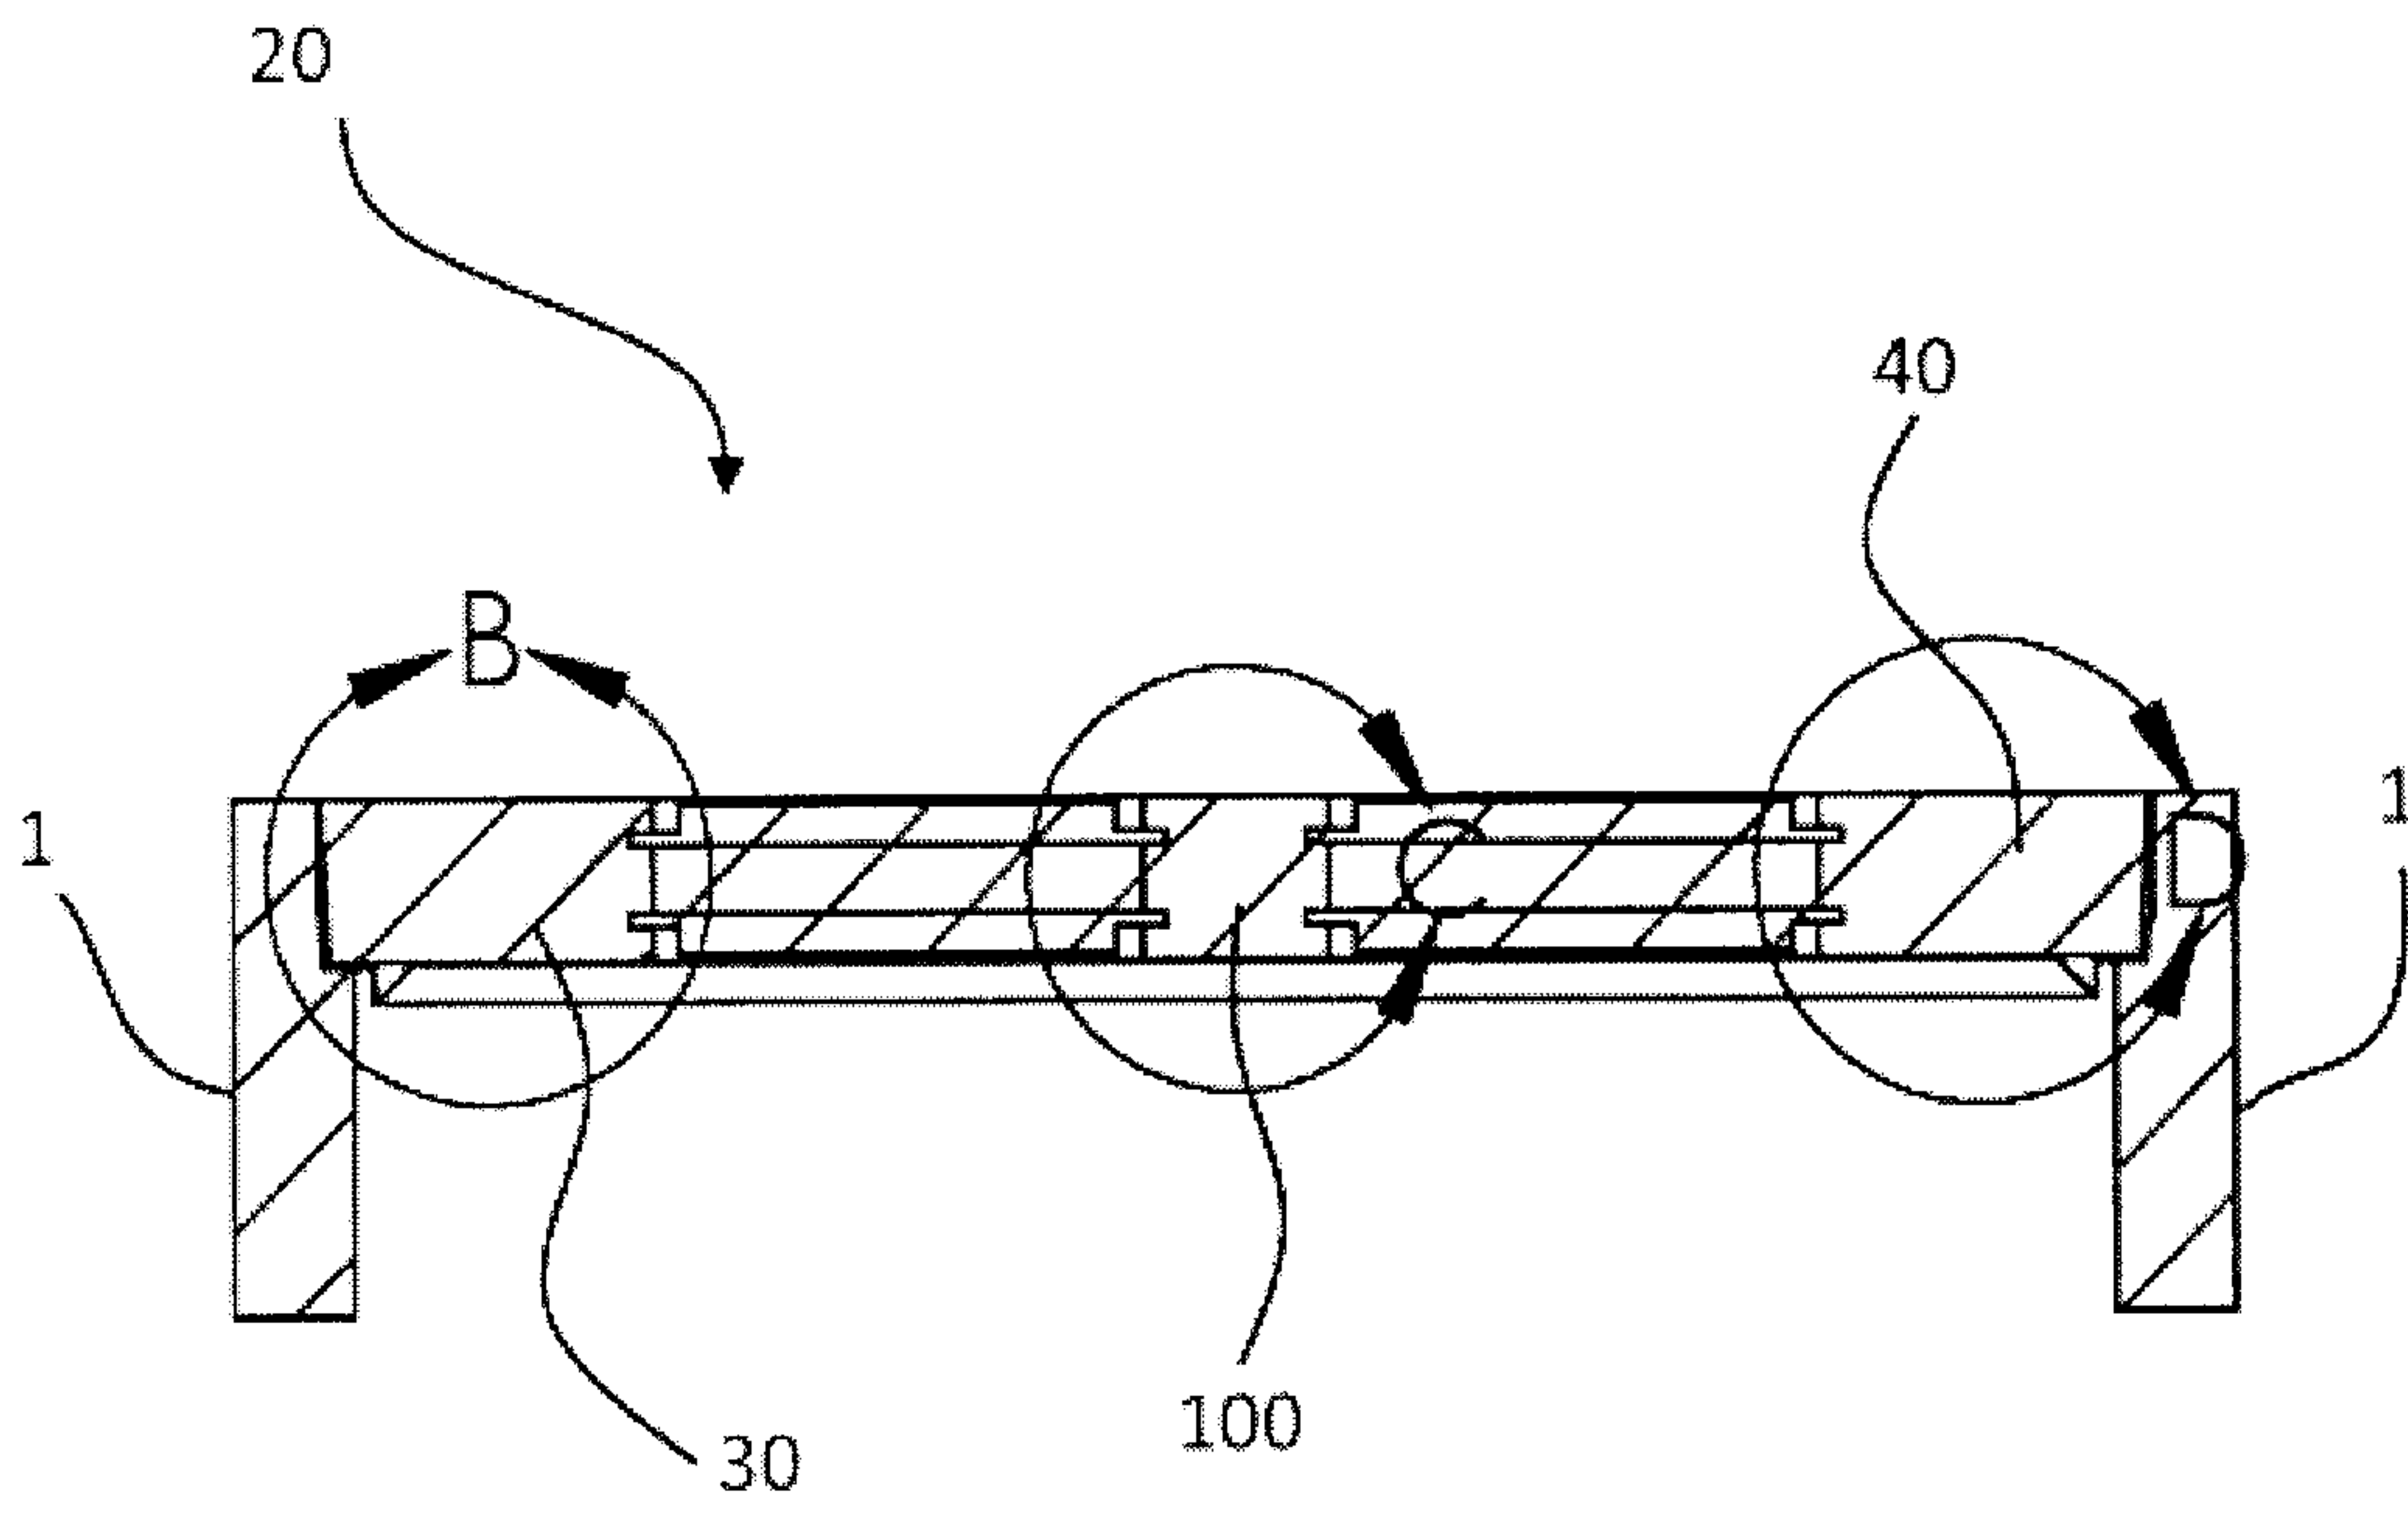


Fig. 2

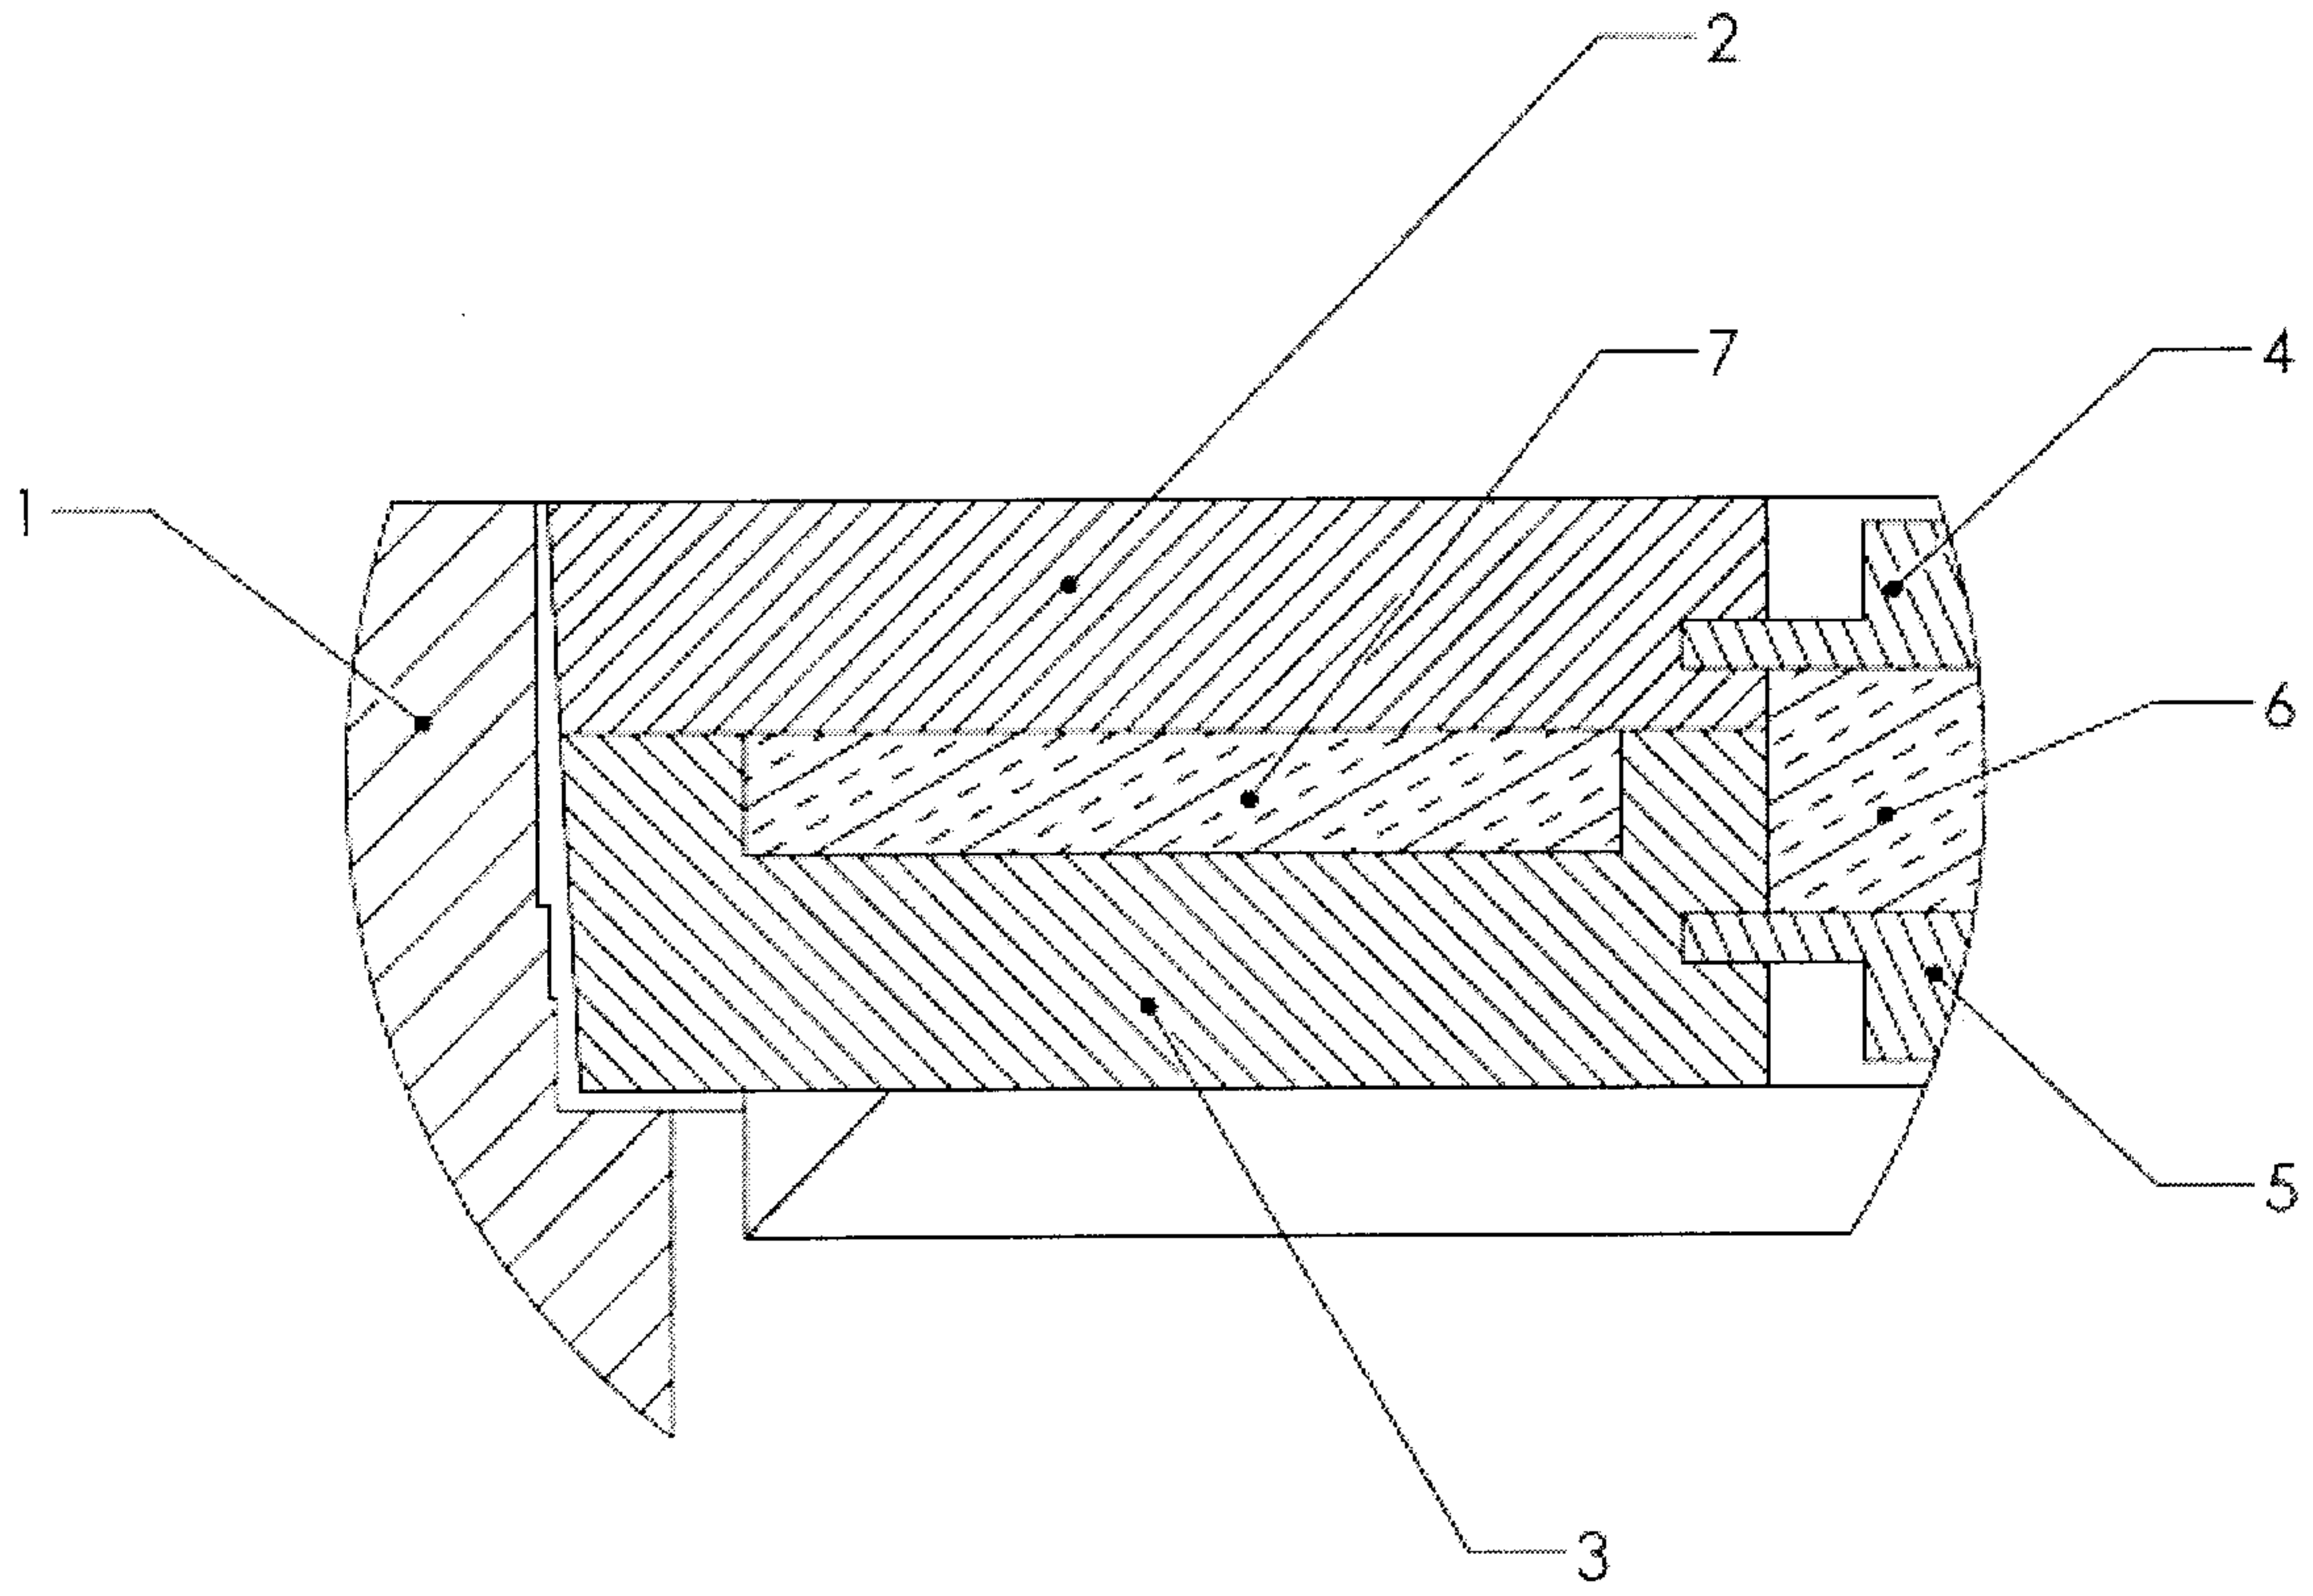


Figure 3

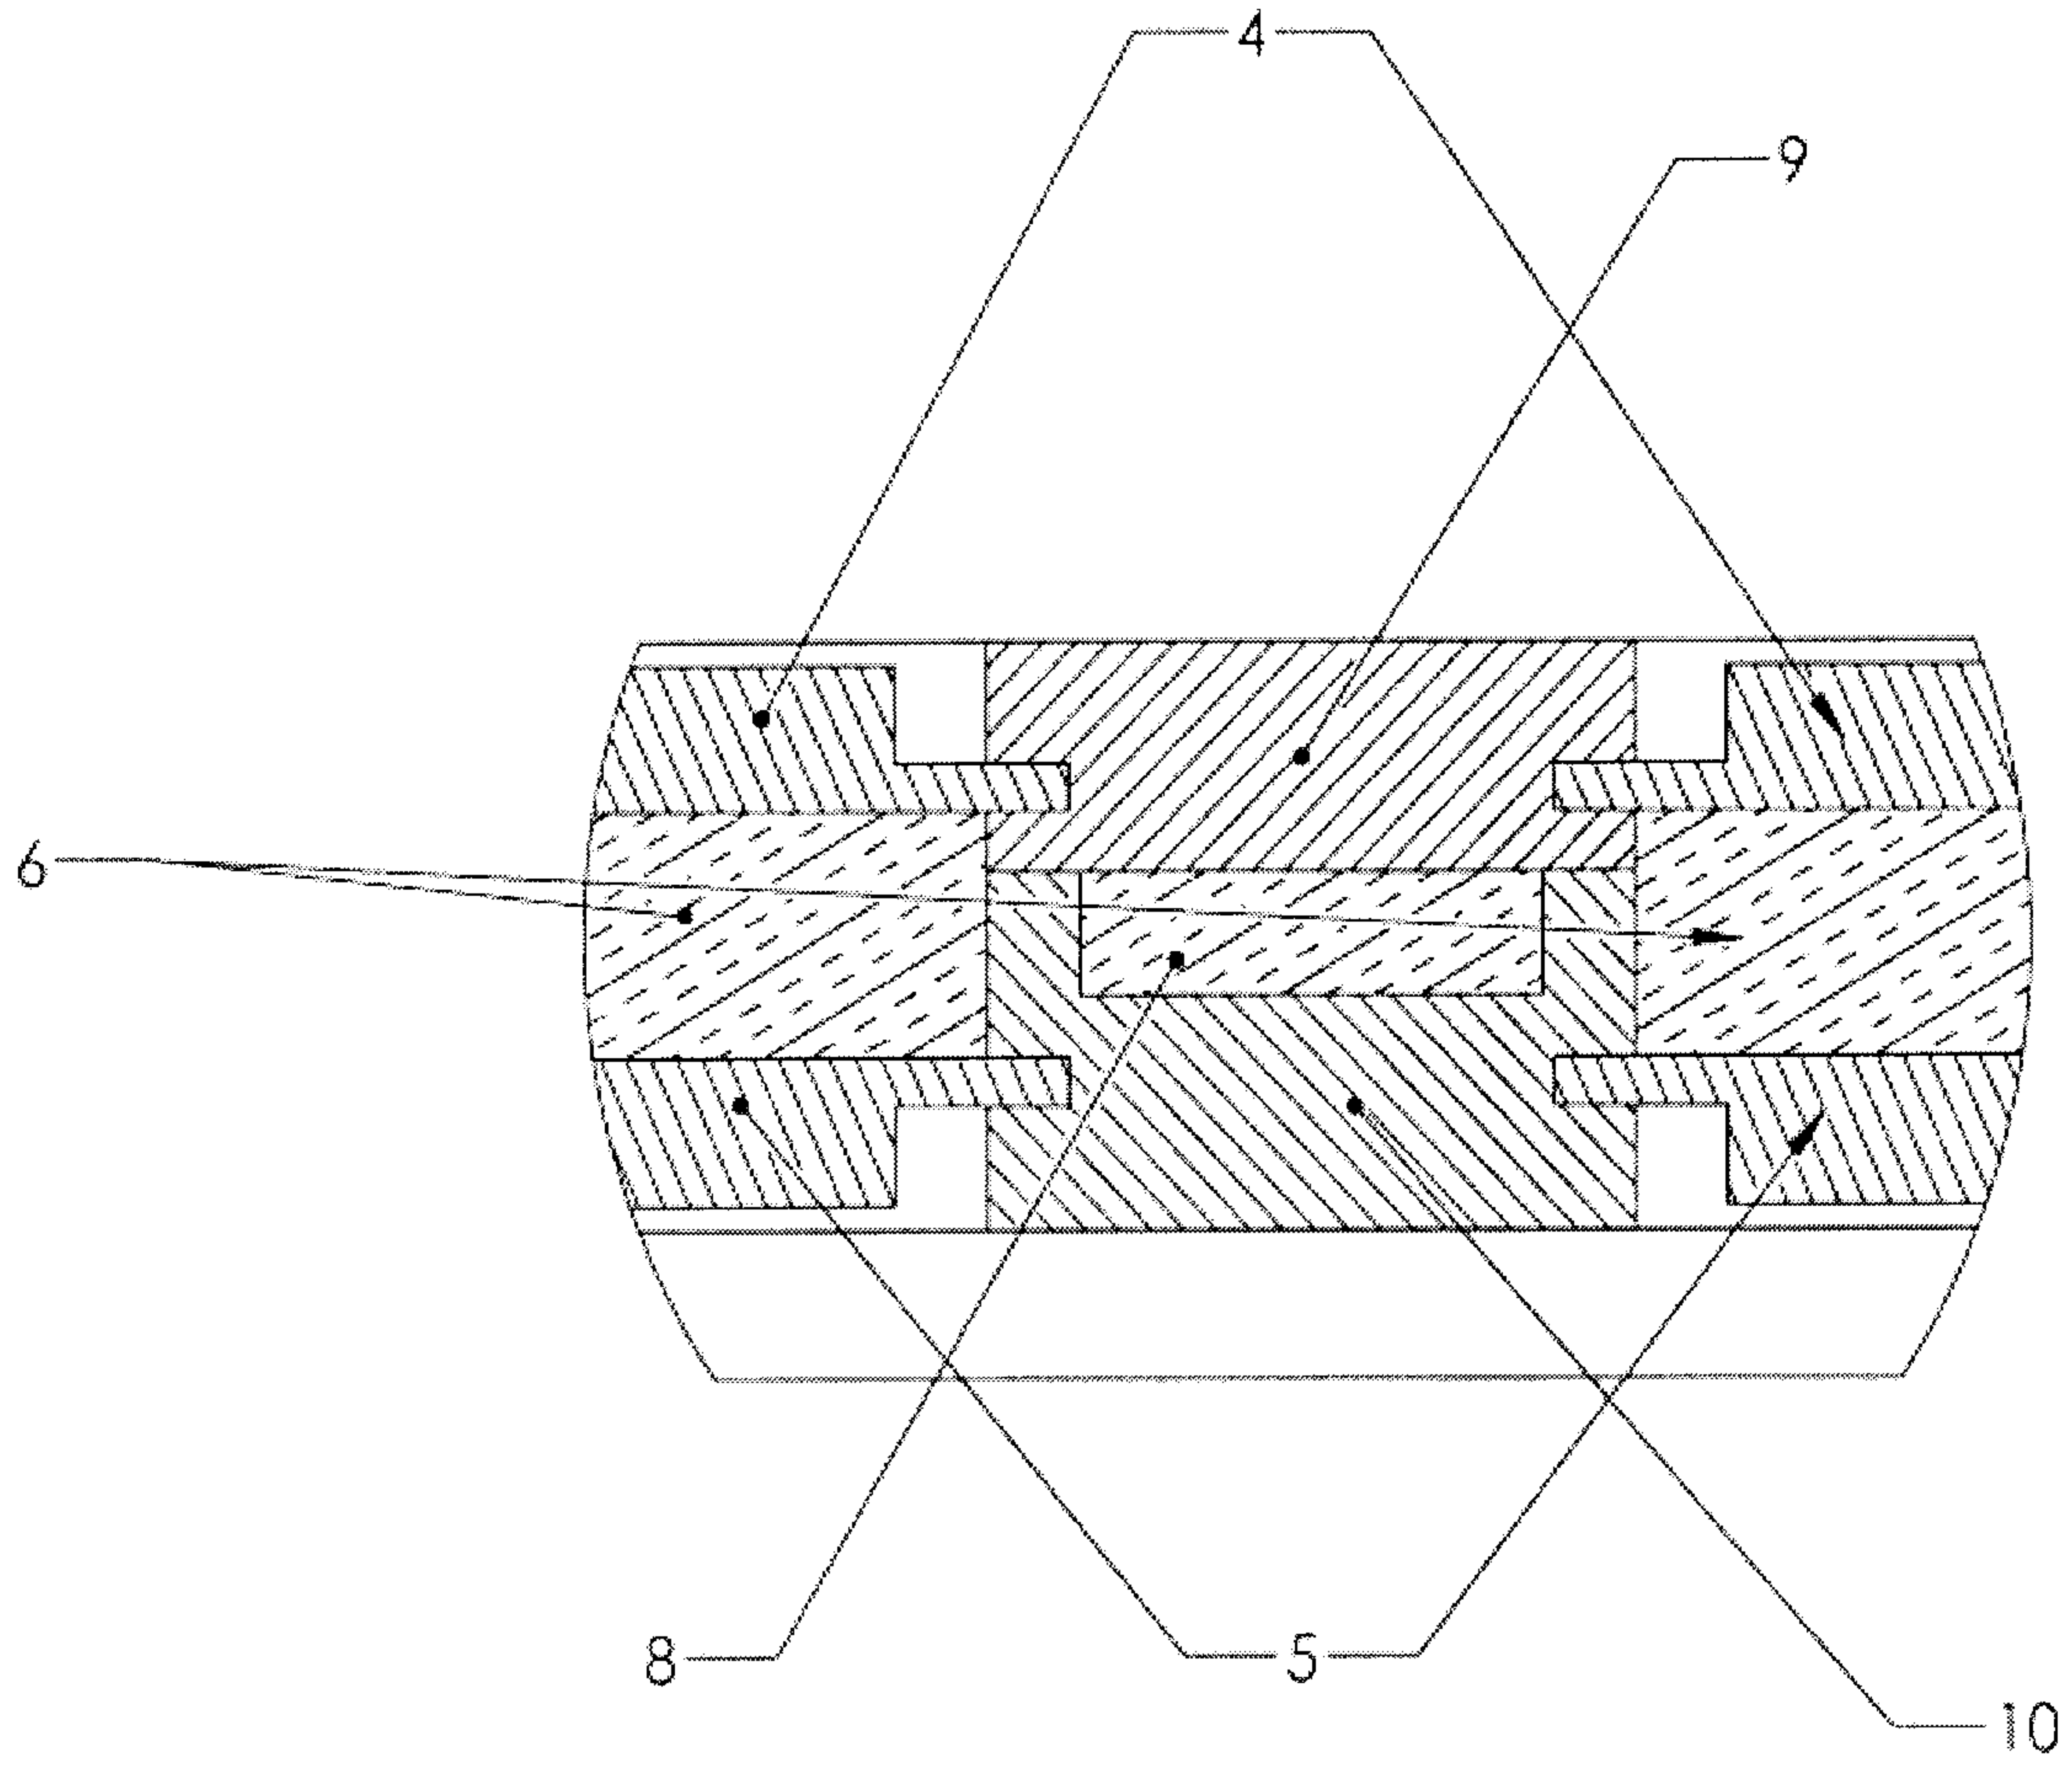


Figure 4

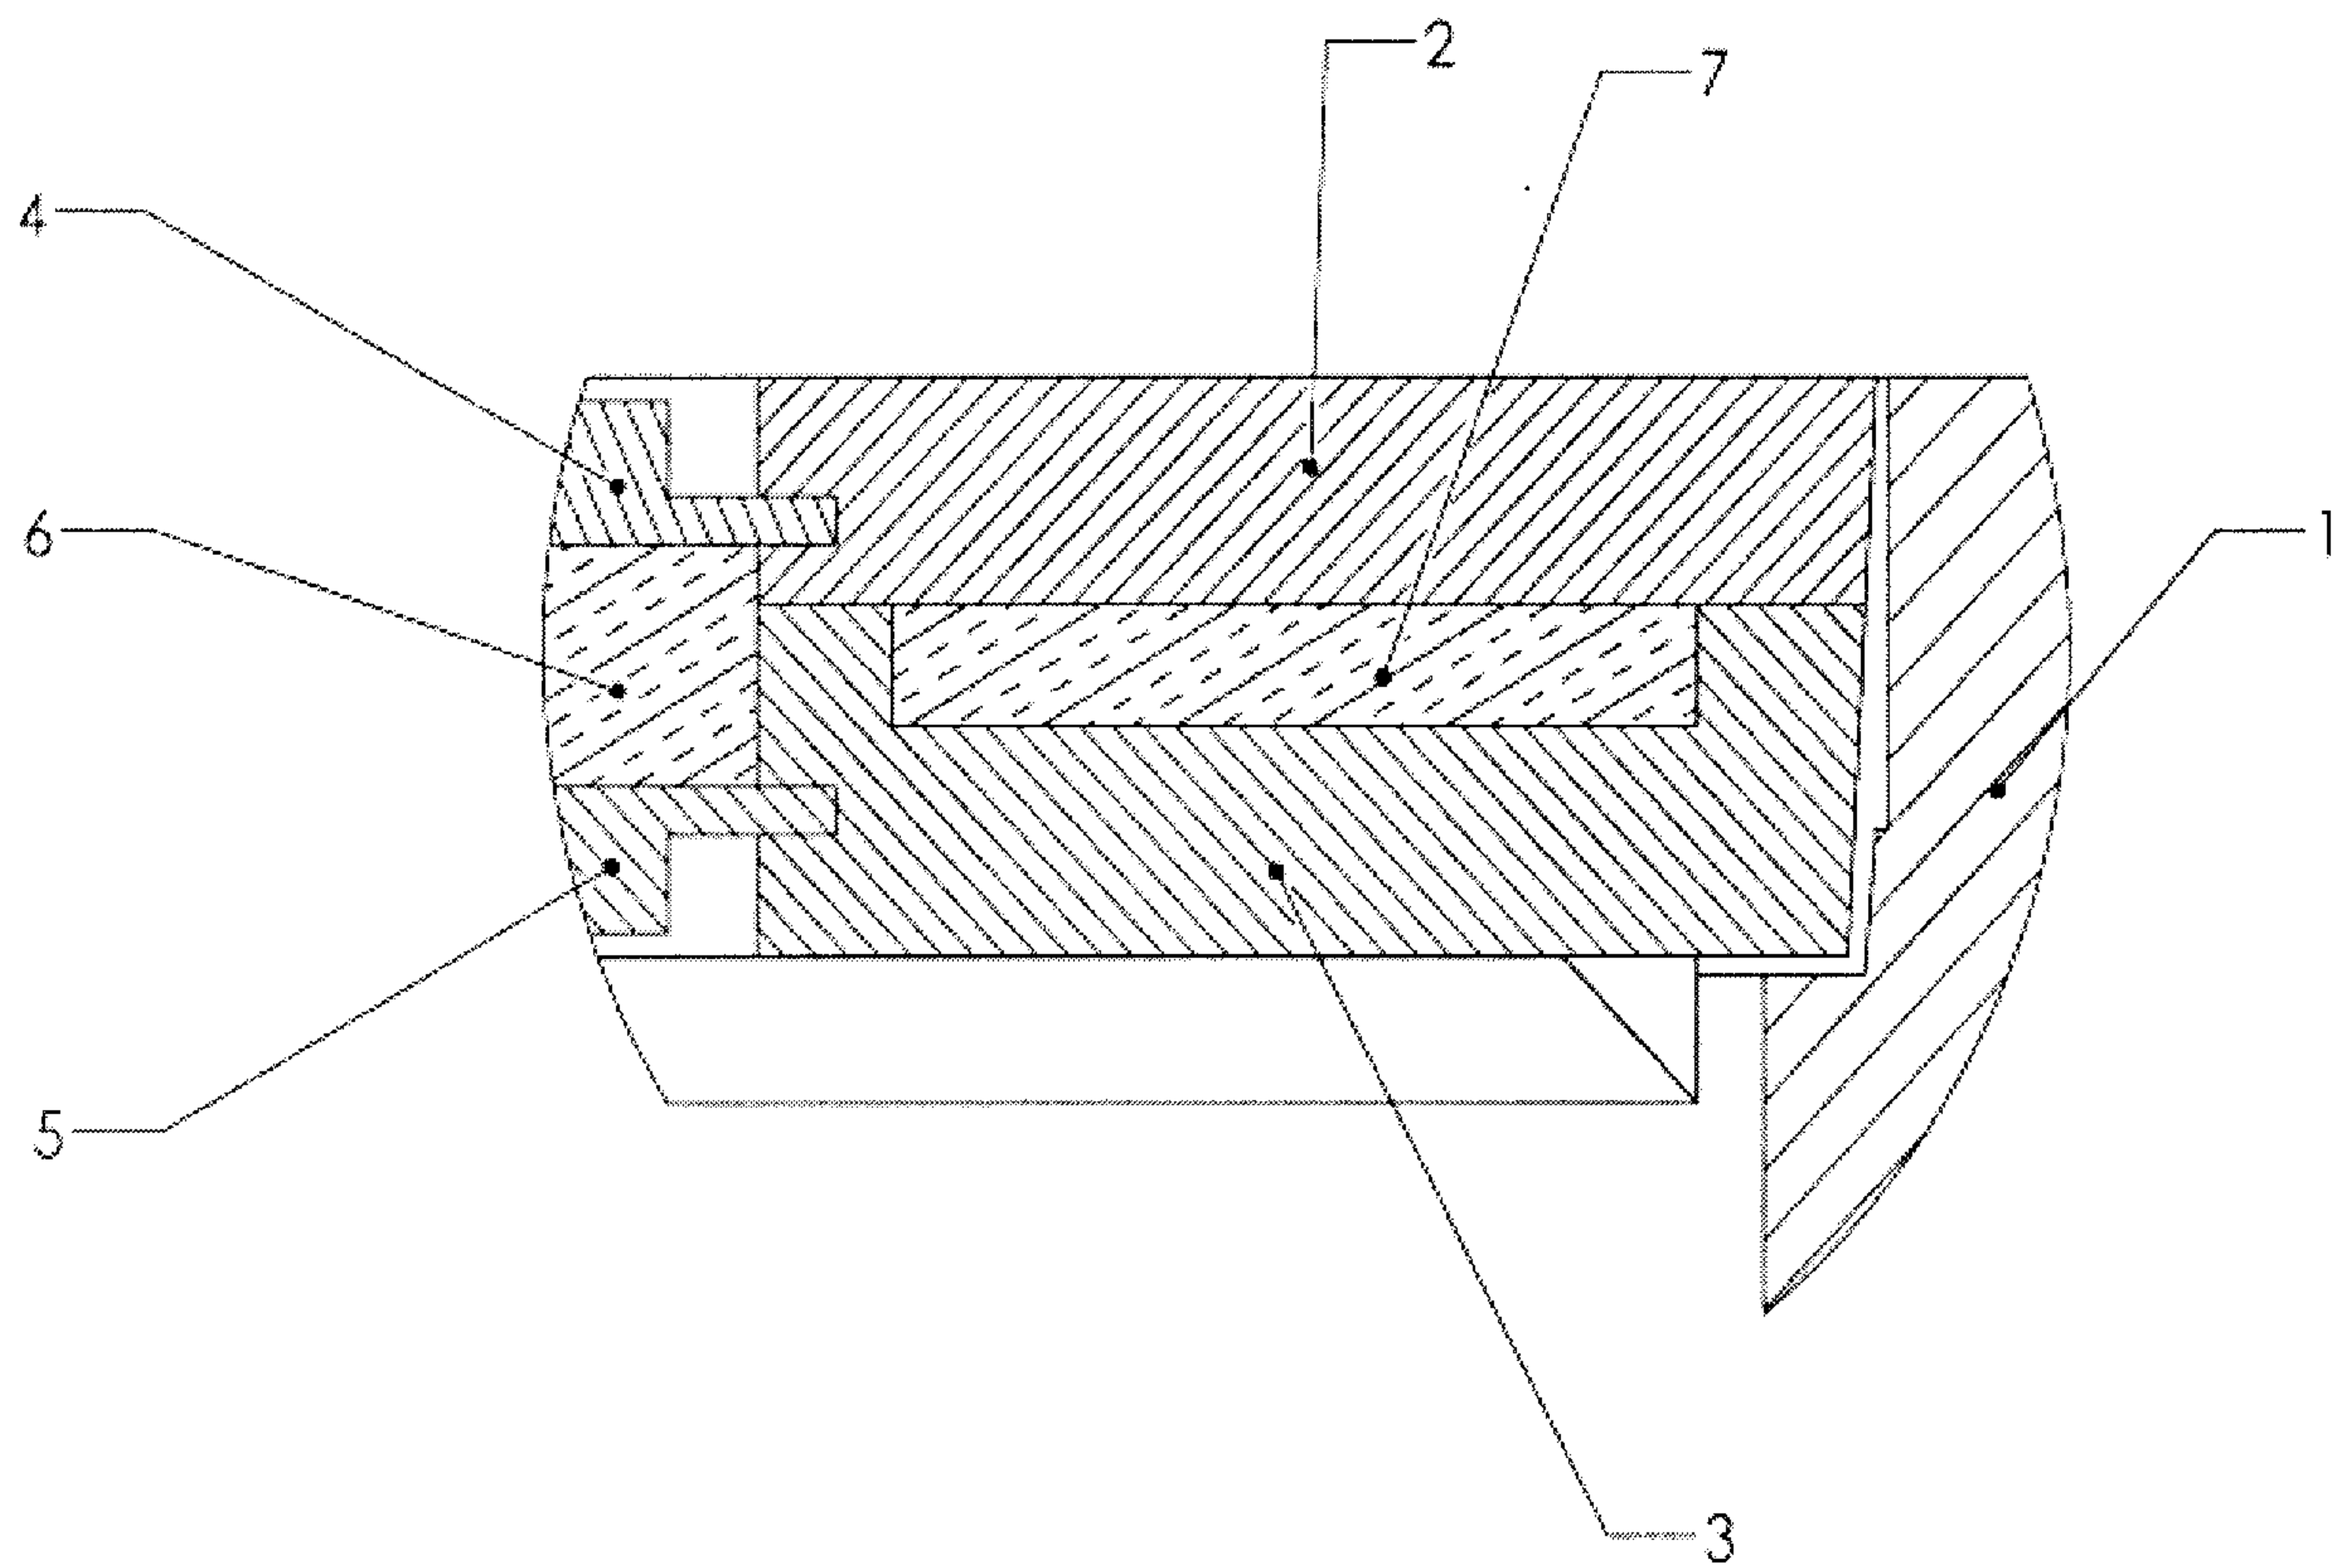


Figure 5

