



(51) International Patent Classification:

H04R 25/00 (2006.01)

(21) International Application Number:

PCT/EP2019/086814

(22) International Filing Date:

20 December 2019 (20.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

01600/18

21 December 2018 (21.12.2018) CH

(71) Applicant: MY TINNITUS HAS GONE AG [CH/CH]; c/

o Ameseder & Jud AG Bleicherweg 45, 8002 Zürich (CH).

(72) Inventor: HAEFELI, Oliver; Küsnachterstrasse 2, 8126

Zumikon (CH).

(74) Agent: E. BLUM & CO. AG; Vorderberg 11, 8044 Zürich

(CH).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DEVICE FOR PROVIDING AN AUDIO SIGNAL

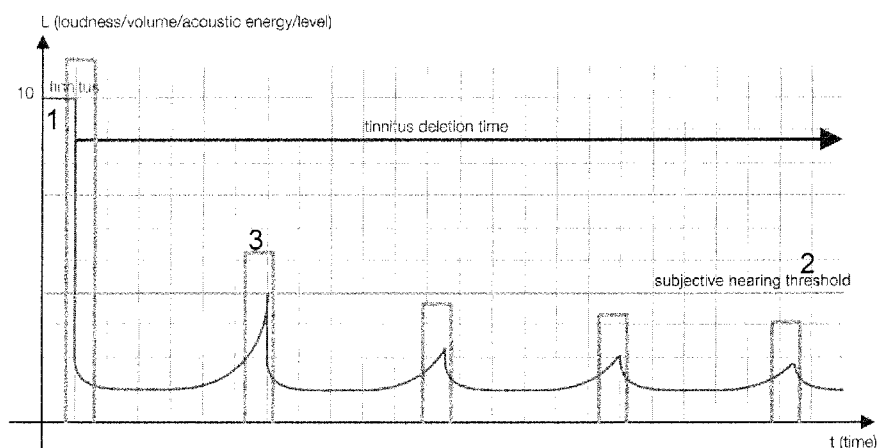


FIG 27

(57) Abstract: The present idea refers to a device for providing an audio signal for suppressing or decreasing a user's tinnitus. The device comprises an identification unit for supporting a determination of at least one parameter regarding the user's tinnitus, an adaptation unit configured to modify a received audio signal based on the at least one parameter, thereby obtaining the audio signal, or to generate the audio signal based on the at least one parameter, wherein a defined frequency spectrum of the audio signal is based on a tinnitus suppression frequency, and an audio output unit configured to play the audio signal to the user.



DEVICE FOR PROVIDING AN AUDIO SIGNAL

5

Technical Field

The invention relates to a device for providing an audio signal for suppressing or decreasing a user's tinnitus, and to a method for generating such audio signal or obtaining it by modifying a received audio signal.

15

Background Art

Tinnitus is a perception of sound by a person when no external sound is present. It may have different frequency characteristics, such as a ringing, a clicking, a hiss or a roaring, and it may be perceived in one or both ears, or in the person in general. Tinnitus is a widespread symptom affecting more than 10 % of people. Mostly it relates to subjective tinnitus which, in contrast to objective tinnitus, cannot be detected by people other than the person affected, but is a subjective perception of this person. Tinnitus may be caused by hearing loss, in particular a noise-induced hearing loss, e.g. through cochlear damage. However, tinnitus has also been associated with various neurologic, metabolic or psychiatric disorders.

There is currently no known cure for tinnitus. Despite increased research focused on tinnitus and various propositions for related therapies, tinnitus is still not fully understood and therapies mostly relate to fighting symptoms rather than cause. Such therapies include cognitive behavioral therapy, medication, hyper-

baric oxygen therapy, acupuncture and various sound therapies. Sound therapies include applying hearing aids, or masking the tinnitus by means of a masker, i.e. drowning the perceived sound of tinnitus in other sounds, such
5 that the person's attention is drawn to the other sounds in order to achieve a habituation. In another therapy, a noiser creates noise, e.g. broad-band noise, which again shall distract the person and lead to a habituation to the tinnitus. Maskers or noisers are also used in tinni-
10 tus retraining therapy (TRT) in addition to counselling of the person. Instead of a narrow-band masker or a broad-band noiser, further sounds may be used in tinnitus therapy, such as music, common environmental sounds, speech, sound of rushing water, etc. In addition, the
15 sounds may be filtered as e.g. in notched music therapy, wherein a frequency range around the tinnitus is filtered out. Another approach is Coordinated Reset (CR) Neuromodulation, in particular by Adaptive Neuromodulation (ANM): Acoustic tones are delivered with different frequencies
20 centered around a characteristic frequency of the person's tinnitus. Neuromodulation aims at reducing pathologically enhanced neural synchrony within primary auditory cortices, and hence decreasing the tinnitus perception.

25 A common feature of the described sound therapies is the massive amount of time that the affected person needs to be exposed to the sound to achieve any significant effect in decreasing the tinnitus, if at all, or at least in enhancing a quality of living with the
30 tinnitus. Such amount of time is typically in the range of several hours per day over a period of at least a year. It follows that such therapies severely interfere with the person's every-day life. Hence it is an object of the present invention to provide a device and a method
35 for effectively decreasing or suppressing a user's tinnitus.

Disclosure of the Invention

The general object to provide a device for effectively decreasing or suppressing a user's tinnitus is solved by the device according to claim 1.

According to a first aspect of the invention, the device for providing an audio signal for suppressing or decreasing a user's tinnitus comprises an identification unit for supporting a determination of at least one parameter regarding the user's tinnitus; an adaptation unit configured to modify a received audio signal according to the at least one parameter, thereby obtaining the audio signal, or to generate the audio signal according to the at least one parameter; and an audio output unit configured to play the audio signal to the user. A defined frequency spectrum, also referred to as frequency characteristic or frequency range, that is applied in / to the audio signal is dependent on a tinnitus suppression frequency.

The tinnitus suppression frequency is defined as the frequency for which tinnitus suppression or deletion occurs. This means that a sound played to the user, which sound is at the tinnitus suppression frequency or obeys to the defined frequency spectrum as detailed later, will lead to a suppression or deletion of the user's tinnitus for a time duration called the interval of tinnitus suppression. It has been found that the tinnitus suppression frequency in many users coincides with the tinnitus frequency within a tolerance of $\pm 10\%$, i.e. a dominant frequency perceived by the user in the tinnitus. Hence the tinnitus frequency may be used as a proxy for the tinnitus suppression frequency. Thus, the tinnitus suppression frequency advantageously is the tinnitus frequency throughout the following description.

In an advantageous embodiment, the audio signal has a defined frequency spectrum comprising a peak of intensity with a peak frequency being one or more of: at

the tinnitus suppression frequency, within a frequency range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency, at a frequency one or more octaves below and/or
5 above the tinnitus suppression frequency, and within a frequency range between one fourth of an octave below and one fourth of an octave above the frequency one or more octaves below and/or above the tinnitus suppression frequency.

10 It has been observed with several test users, and it is an insight of the inventor, that playing an audio signal with such frequency spectrum to a user, who perceives a subjective tinnitus, decreases or suppresses the tinnitus. "Decreasing" shall mean that a loudness of
15 the tinnitus is reduced, but still above a hearing threshold of the user, i.e. the tinnitus is still perceived but less loud. "Suppressing" shall mean that the loudness of the tinnitus is reduced to zero or at least below the hearing threshold of the user, i.e. the tinnitus is no longer perceived. After playing a finite audio
20 signal with the described frequency spectrum, the tinnitus is decreased or suppressed for an interval of tinnitus suppression, also called a tinnitus deletion time, e.g. 5 s, 10 s, 30 s, 60 s, 2 min, 3 min, 10 min, an hour
25 or even several hours for different users. Only after the interval of tinnitus deletion, the tinnitus recovers, and its loudness increases beyond the hearing threshold of the user until finally reaching again its original loudness. A huge advantage of using the device and playing
30 the audio signal with the defined frequency spectrum to the user is that such treatment is simple, does not require much effort, and achieves the effect of suppressing the tinnitus very fast, i.e. on a time-scale of minutes - compared to months in other therapy forms of therapy as
35 discussed in the background section. Still on the long-term, such use of the device may help to re-train neurons

associated with tinnitus in the user's brain, and dismantle them on an organic level, such that the cause of tinnitus is remedied.

Further it has been observed that an exact
5 form of the frequency spectrum of the audio signal is irrelevant to the effect of decreasing or suppressing the tinnitus as long as the above criteria for the peak frequency are met. This means that a sinus sound having intensity in only one frequency does the job, but also a
10 narrow-band signal within half of an octave around the tinnitus suppression frequency. Such narrow-band signal preferably has a bandwidth equal to or less than half of an octave, or preferably equal to or less than a quarter of an octave, or preferably equal to or less than an
15 eighth of an octave, or preferably equal to or less than 100 Hz. Preferably, the narrow-band signal has a bandwidth less than half of the bandwidth around the tinnitus suppression frequency provided for the locating the narrow-band signal, and preferably less than a quarter of
20 such bandwidth, and preferably less than an eighth of such bandwidth. Also an audio signal having a peak frequency which is shifted one or more octaves compared to the tinnitus suppression frequency decreases or suppresses the tinnitus for some users. A narrow-band signal
25 within half of an octave around the frequency shifted by the one or more octaves compared to the tinnitus suppression frequency may serve the purpose, too. The narrow-band signal preferably has a bandwidth equal to or less than half, or equal to or less than a quarter, or equal
30 to or less than an eighth of an octave, or preferably equal to or less than 100 Hz within the given interval. Preferably, the narrow-band signal has a bandwidth less than half of the bandwidth around the frequency shifted by one or more octaves compared to the tinnitus suppression frequency, and preferably less than a quarter of
35 such bandwidth, and preferably less than an eighth of

such bandwidth. Even an audio signal with significant intensity in other frequencies has been observed to have the tinnitus decreasing or suppressing effect, provided that the frequency spectrum of the audio signal fulfills the above criteria. Thus the audio signal may be any sound, such as e.g. music, speech or environmental noise, whose frequency spectrum has been adapted to the defined frequency spectrum, e.g. by filtering.

Following from the above observation of the interval of tinnitus suppression, audio signals for tinnitus suppression preferably comprise signals that are continuous but may also comprise signals that are intermittent or alternating with time. "Intermittent" or "alternating" shall mean that any property of the audio signal is switched on and off, or changed repeatedly with time, such as a loudness or a frequency spectrum of the audio signal. An effective time of tinnitus suppression, i.e. the duration for which the user does not perceive the tinnitus, is theoretically infinite, if an interval of intermittency or alternation is shorter than or equal to the interval of tinnitus suppression.

Another advantage of the above-described device is the ease of use. Since the device comprises an identification unit, an adaptation unit as well as an audio output unit, it may be regarded as an all-in-one solution for providing an audio signal for suppressing or decreasing a user's tinnitus. Firstly the user is supported by the identification unit in determining at least one parameter regarding his/her tinnitus. Examples for the at least one parameter are:

- the tinnitus suppression frequency, i.e. a dominant frequency or a range of frequencies of the tinnitus sound; in this case, the adaptation unit is advantageously configured to modify a received audio signal such that it follows the defined frequency spectrum, thereby obtaining the audio signal, or to generate the audio signal such that it follows the frequency spectrum

defined dependent on the tinnitus suppression frequency as described above;

- a perceived loudness of the tinnitus, i.e. a subjective measure on a scale from quiet to loud which may e.g. be measured in sones;
- a hearing threshold of the user, also known as auditory threshold which may be frequency dependent;
- the interval of tinnitus suppression, i.e. the duration of silence or non-perceivable tinnitus after one-time playing the audio signal with the defined frequency spectrum;
- a minimum necessary loudness of the audio signal in order to achieve tinnitus suppression;
- a minimum necessary duration of the audio signal in order to achieve tinnitus suppression.

Secondly the audio signal is generated, e.g. synthetically from a sound sample, or modified from the received audio signal according to the at least one parameter. This second step is preferably done automatically after the first step on the basis of the at least one parameter determined in the first step. Or in other words, modifying or generating the audio signal does not require any further user inputs, such as further parameter values, or any further user selections, such as a track selection. Hence, an adaptation unit is provided and is configured to automatically convert the at least one determined user specific parameter relating to the user's tinnitus into a parameter of the audio signal. Accordingly, the determined one or more parameters are reflected in the audio signal which is performed by the adaptation unit. Preferably, a or each determined parameter is converted in one of a frequency parameter of the audio signal, an amplitude parameter of the audio signal, or a timing parameter in the audio signal. In one example, a basic appearance of the audio signal is predefined: E.g. a time characteristic of the audio signal is predefined in that it shall be an intermittent audio signal. E.g.,

in addition, the frequency characteristic of the audio signal shall be predefined in that only the user specific tinnitus suppression frequency shall be used in form of a sinus signal. E.g. in addition, an amplitude characteristic of the audio signal shall be predefined in that only peaks of a minimum required loudness for suppressing or decreasing the user's tinnitus or below the users hearing threshold shall be used. Hence, in this example, the user specific user tinnitus suppression frequency is determined first by support of the device. In a next step, pulses of such tinnitus suppression frequency are played to the user at varying loudness by means of the device in order to identify the minimum required loudness of the audio signal for suppressing or decreasing the user's tinnitus. In another step, pulses at or above the minimum required loudness of the audio signal for suppressing or decreasing the user's tinnitus are played to the user at varying intervals in order to determine the interval of tinnitus suppression. Having measured these parameters, the basic appearance / general layout provided for the audio signal is adjusted, i.e. parameters of the audio signal are automatically set based on the measured user specific parameters. I.e. the frequency of the peaks in the audio signal is set to the tinnitus suppression frequency, the intervals between the peaks in the audio signal are set to or less than the determined user specific interval of tinnitus suppression. And the amplitude of the peaks are set to or at most + 10% of the determined minimum required loudness of the audio signal for suppressing or decreasing the user's tinnitus.

Hence, in one embodiment, an audio signal predefined in its characteristics, and preferably predefined in its frequency characteristic, its timing characteristic, and its amplitude characteristic, is finalized in its parameters by means of the one or more determined user specific tinnitus related parameters. However, in any case, the audio signal has a frequency characteristic

which is dependent on the user specific tinnitus suppression frequency.

In each determination of a tinnitus parameter, the device may use an iterative approach in sequentially offering sounds with a varying parameter to the user and requesting for feedback. E.g., in the determination of the required loudness for the audio signal, be it of peaks of an intermittent signal or the loudness of a continuous signal, test sounds with varying loudness may be played to the user for identifying the loudness at which a tinnitus suppression just can be achieved.

In a preferred embodiment, the adaptation unit is configured to modify the received audio signal according to the defined frequency spectrum and based on the at least one parameter, or is configured to modify the received audio signal according to the defined frequency spectrum based on the at least one parameter. Or the adaptation unit is configured to generate the audio signal according to the defined frequency spectrum and based on the at least one parameter, or is configured to generate the audio signal according to the defined frequency spectrum based on the at least one parameter.

It has been found that the at least one parameter may vary over time for the user. Hence the identification may support a re-determination of the at least one parameter regarding the user's tinnitus, e.g. within a regular time interval or when the user feels that the value of the at least one parameter does not fit his/her perception any longer. Such re-determined at least one parameter will then again be used as new basis for the modification or generation of the audio signal.

It is evident that such device is not only easy to use for the user, but that it also makes the audio signal played to the user better adapted to his/her current situation. Both factors typically lead to a better appreciation of the device by the user, hence a

longer use and likely a greater success in decreasing or suppressing the user's tinnitus.

From the above discussion, it is clear that the audio signal for suppressing or decreasing a user's tinnitus as well as the device for providing the audio signal may take various forms. Numerous combinations of the different features are possible to achieve the tinnitus decreasing or suppressing effect. All these combinations of the different features are understood to be comprised in the following disclosure of embodiments.

Preferably, the identification unit is configured to support a determination of the tinnitus suppression frequency. The identification unit is advantageously configured to play sounds of different frequencies to the user, to prompt an input of the user in response to the sounds of different frequencies, and to determine the tinnitus suppression frequency by evaluating the input. The determination may be done by presenting a sequence of sounds with continuously or stepwise rising or falling frequency to the user, and letting the user identify the frequency which suppresses or deletes the tinnitus, in particular which suppresses or deletes the tinnitus most effectively, e.g. to the lowest tinnitus loudness or for the longest interval of tinnitus suppression.

Alternatively, the tinnitus frequency may be taken as a proxy for the tinnitus suppression frequency as described above. In that case, the determination may be done by presenting a sequence of sounds with continuously rising or falling frequency to the user, and letting the user identify the frequency closest to the perceived tinnitus. Alternatively, the determination may be achieved by letting the user compare the tinnitus with one or two sounds of certain frequencies, and adapting the certain frequencies to the user's response.

Preferably, the identification unit is configured to support a determination of the perceived loudness of the tinnitus by playing sounds of different loudness to the user, prompting an input of the user in response to the sounds, and by determining the perceived loudness of the tinnitus by evaluating the input. This may be achieved in an analogous manner as the determination of the tinnitus frequency above.

10 In an embodiment, the at least one parameter comprises a minimum required loudness of the audio signal for suppressing or decreasing the user's tinnitus. The identification unit is configured to support a determination of the minimum required loudness. This may be done
15 in the following way: The identification unit is configured to play sounds of different loudness to the user, to prompt an input of the user dependent on the tinnitus being suppressed or decreased, and to determine the minimum required loudness by evaluating the input. Advantageously
20 the audio signal then played to the user has a loudness equal to the minimum required loudness within a tolerance of 10%. Such tolerance in particular relates to a value of the loudness measured or expressed in dB. Thus the user is not disturbed by the audio signal more than necessary.
25

Advantageously the identification unit is configured to support a regular re-determination of the minimum required loudness, in particular every week or month. Thus the value of the minimum required loudness
30 may be adapted to changed conditions and perceptions of the user over time. In particular, the adaptation unit is then configured to adapt the audio signal to the re-determined minimum required loudness.

Additionally or alternatively, the adaptation
35 unit may be configured to gradually lower the loudness of the audio signal over time starting from the minimum required loudness. Such gradual lowering of the loudness

takes into account an empirical evolution of the minimum required loudness observed in users, which shows a decrease in minimum required loudness over time. However, at some point, the loudness of the played audio signal
5 may be lower than the minimum required loudness for achieving tinnitus suppression in the user. For that case, the identification unit is advantageously configured to accept a user input regarding a re-appearance of the tinnitus. In general, the adaptation unit may be configured to increase or decrease the loudness of the audio
10 signal by a defined amount, which in particular is in a range between 1 and 5 dB, e.g. 2 dB, in response to the user input.

15 Advantageously, the identification unit is configured to support a determination of the hearing threshold by playing sounds of different loudness to the user, prompting an input of the user in response to the sounds, and by determining the hearing threshold by evaluating the input. In particular the hearing threshold may
20 be determined in dependence on the frequency, i.e. an audiogram of the user is determined.

In an embodiment, the identification unit is configured to support a determination of the interval of
25 tinnitus suppression by playing a sound with the defined frequency spectrum to the user, prompting an input of the user in response to the sound, and by determining the interval of tinnitus suppression by evaluating the input. This may be achieved by prompting the user to press a
30 button when he starts to perceive the tinnitus again after the sound has been played.

One or more of parameters as the determined tinnitus suppression frequency, tinnitus loudness, hearing threshold, and interval of tinnitus suppression are
35 preferably used to adapt the audio signal played to the user. In this way, the audio signal may be optimally fit-

ted to the user. In particular, the parameters may be determined by the user anew, and the audio signal may be adapted to the new parameters for an optimal effect of tinnitus suppression.

5 For this reason, the device comprises the adaptation unit configured to generate the audio signal according to the defined frequency range. In an embodiment, the adaptation unit generates a sinus signal on the tinnitus suppression frequency, or a narrow-band signal having the defined frequency spectrum with respect to the
10 determined tinnitus suppression frequency. In another embodiment, the audio output unit generates the audio signal receiving a frequency characteristic that has been determined by the adaptation unit based on the tinnitus
15 suppression frequency from the identification unit.

 Alternatively, the adaptation unit may be configured to modify a frequency spectrum of a received audio signal according to the defined frequency range. The received audio signal may comprise any sound or
20 noise, in particular one or more of music, speech, environmental sounds, e.g. recorded real-time in the surrounding of the user, white noise, pink noise, brown noise, and a tinnitus habituation sound. In this case, the adaptation unit may comprise a filter configured to
25 amplify frequencies within the defined frequency spectrum, and/or to attenuate frequencies outside the defined frequency spectrum. The adaptation or attenuation of frequencies by the adaptation unit is preferably at least 25 %, in particular more than 50 %. For these purposes, the
30 device may comprise a microphone configured to record the received audio signal, wherein the received audio signal is provided to the adaptation unit. Alternatively, the received audio signal may be provided to the adaptation unit from a database, in particular wherein the database
35 is stored in a memory of the device.

 The tinnitus habituation sound mentioned above is preferably adapted to draw a person's attention

to itself and away from the tinnitus, i.e. the person may be distracted from the tinnitus, and a habituation to the tinnitus may be achieved. Hence it may be advantageous to combine the effects of such tinnitus habituation sound
5 with the effect of playing an audio signal with the defined frequency spectrum according to the present invention in order to achieve an even better suppression of perceived tinnitus.

In an embodiment, the adaptation unit is configured to decrease the loudness of the audio signal over
10 time continuously or stepwise. This means the user will hear continuous sounds, e.g. music, or intermittent sounds that become quieter over time, e.g. decreasing from 80 dB to 40 dB as a default. At some point in time,
15 the acoustic energy within the audio signal, in particular in the defined frequency spectrum, will not suffice in order to decrease or suppress the tinnitus. At that time a user interaction may be useful. In particular the identification unit is configured to accept a user input,
20 e.g. a press on a button, when the user input starts to perceive again the tinnitus. Further the identification unit may be configured to re-determine the at least one parameter, in particular the loudness of the audio signal, dependent on the user input. A reasonable choice is
25 e.g. to set the loudness of the audio signal just above or e.g. 10 dB above its level when the user started to perceive the tinnitus again.

The idea of the previous embodiment may analogously be applied to other parameters, e.g. to the interval of tinnitus suppression or deletion. In such
30 embodiment, the adaptation unit may be configured to increase the interval of sounds with the defined frequency spectrum over time continuously or stepwise, e.g. as a default from an interval of 5 s or 10 s up to 60 s or
35 10 min. In reaction to a user input when the user starts to perceive again the tinnitus, the identification unit is configured to re-determine the sound interval and to

preferably set it just below the so re-determined interval of tinnitus suppression.

The defined frequency spectrum of the audio
5 signal preferably comprises a narrow-bandwidth characteristic within half of an octave around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression frequency. Good success of complete tinnitus suppression have been achieved by such
10 audio signal. Alternatively, the defined frequency spectrum may comprise a narrow-bandwidth characteristic within one fourth, or even one eighth, of an octave around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression
15 frequency. Also such forms of the frequency spectrum suffice to achieve total tinnitus suppression in most users. The narrow-band signal preferably has a bandwidth equal to or less than half of an octave, or preferably equal to or less than a quarter of an octave, or preferably equal
20 to or less than an eighth of an octave.

In an embodiment, the adaptation unit is further configured to split an acoustic energy in the defined frequency spectrum, e.g. defined by a pulse of defined length and amplitude as required to suppress the
25 user's tinnitus, to different frequencies in the defined frequency spectrum, in particular to the frequency range around the frequency one or more octaves below or above the tinnitus suppression frequency. Such feature is particularly useful if the user suffers from hearing loss,
30 i.e. his/her hearing threshold is higher than a normal hearing threshold, which may depend e.g. on frequency and age. Tinnitus is known to be often correlated with hearing loss in the sense that the tinnitus often occurs at or around the frequency of the largest hearing loss.
35 Hence it is preferable that the adaptation unit is configured to perform the split of the acoustic energy de-

pendent on the hearing threshold of the user. In an embodiment, the identification unit is configured to support a determination of the hearing threshold of the user, meaning that also the identification of the frequencies particularly affected by hearing loss is integrated in the device. Alternatively, the split of the acoustic energy may be performed according to a user's preferences, i.e. in order to generate a more agreeable user experience.

10

The defined frequency spectrum may correspond to a frequency spectrum of tinnitus, in particular of the user's tinnitus. This would lead to an optimal suppression of tinnitus. However, it has the disadvantage that the user has to listen to a tinnitus-like sound again, if it is played above the hearing threshold.

15

Alternatively, the audio signal may be a sinus signal, or be derived from a sinus signal. This comprises signals containing several frequency components in the defined frequency spectrum. In particular, the defined frequency spectrum may have zero intensity for frequencies other than the peak frequency, or outside the defined frequency spectrum.

20

Regarding the loudness of the audio signal, it is preferable that the loudness is below a perceived loudness of the tinnitus. In this way, the user is at least partly relieved from the pain of perceiving a sound at the tinnitus suppression frequency, in particular at the tinnitus frequency. More into that direction, the audio signal advantageously has a loudness equal to or below a hearing threshold of the user. Thus the user does neither perceive the audio signal on the tinnitus suppression frequency, in particular on the tinnitus frequency, nor the tinnitus itself.

25

30

35

In an embodiment, the audio signal is alternating or intermittent in time. In that case, the audio

signal may alternate in loudness between a first loudness and a second loudness. In particular the first loudness is above the hearing threshold of the user, and/or the second loudness is equal to or below the hearing threshold of the user. A quality of a change-over between first loudness and second loudness has been observed to be irrelevant for the effect of tinnitus suppression. Hence the alternating or intermitting audio signal may comprise a steep slope between the first loudness and the second loudness. In particular a duration of the slope is preferably below 0.5 s or 0.1 s, and in particular the slope has the form of a step function. Such quality of change-over is well suited for short intermittent audio pulses. Alternatively, the alternating or intermitting audio signal may comprise a shallow slope between the first loudness and the second loudness, in particular wherein a duration of the slope is above 0.5 s or 1 s. Such longer change-over is particularly suitable for modifying an audio signal received from the environment or for adapting a piece of music.

In an embodiment, the interval of alternation or intermittency of the audio signal has a random duration. Preferably, however, the interval of alternation or intermittency of the audio signal is equal to or shorter than an interval of tinnitus suppression. Examples for the interval of alternation or intermittency are 10 s, 30 s or 60 s, in particular depending on the user's determined interval of tinnitus suppression. Thus the effective time of perceived tinnitus suppression for the user is theoretically infinite. In an advantageous embodiment, the interval of alternation or intermittency is synchronized with, i.e. equal to, the interval of tinnitus suppression, such that the user is not subjected to more audio pulses than necessary.

35

In an embodiment, the audio output unit is configured to play the audio signal to an ipsilateral ear

in relation to the tinnitus, i.e. the same ear on which the user perceives the tinnitus, in particular exclusively to the ipsilateral ear. However, it may also be feasible to play the audio signal to a contralateral ear in relation to the tinnitus, in particular exclusively to the contralateral ear. All variants may show the desired effect of tinnitus suppression, but they are accepted more or less well depending on the user.

The audio output unit may further be configured to play a second audio signal with a second frequency spectrum to the user simultaneously with the sound, wherein the second frequency spectrum comprises a broader frequency range than the defined frequency spectrum. The second audio signal may comprise one or more of music, speech and environmental sounds. This means that the user may listen to such second audio signal, e.g. with a regular frequency spectrum, simultaneously which makes the use of the device more agreeable. Preferably, a loudness of the second audio signal is below the loudness of the audio signal. In the above case of an intermittent or alternating audio signal having a first and second loudness, the loudness of the second audio signal is preferably below the first loudness, and/or above the second loudness.

The second audio signal may alternatively or additionally comprise any sound, in particular one of a noise, e.g. white noise, pink noise, and brown noise, and a tinnitus habituation sound. As described above, a tinnitus habituation sound is preferably adapted to draw a person's attention to itself and away from the tinnitus, i.e. the person may be distracted from the tinnitus, and a habituation to the tinnitus may be achieved. Hence it may be advantageous to combine playing an audio signal with the defined frequency range with a tinnitus habituation sound played simultaneously in order to achieve an even better suppression of perceived tinnitus. Again, the audio signal may be played continuously or alternating.

Different embodiments of the device and the audio output unit are foreseen. In one embodiment, the audio output unit comprises a speaker or headphone configured to generate acoustic waves corresponding to the audio signal. Alternatively, the audio output unit may comprise an implant configured to generate acoustic waves corresponding to the audio signal directly in the user's hearing. Or the audio output unit may comprise a neuronal stimulator configured to generate a sensation of the audio signal in the user's brain. In the latter case actual acoustic waves may even not be necessary for suppressing the tinnitus.

The device may be a mobile device, such as an MP3 player, or a mobile phone. Such devices are part of the every-day life of the user, such that playing the audio signal may be integrated into the user's life in an agreeable way. Alternatively, the device may be a hearing aid. A user with hearing loss will have and use a hearing aid anyway. Hence it is beneficial, if playing the audio signal, or in particular modifying a received audio signal according to the defined frequency spectrum, is performed by the hearing aid without the need of owning or wearing any further devices. Preferably, the hearing aid is configured to play the audio signal in addition to its regular function of rectifying hearing loss. This means that playing the audio signal for decreasing or suppressing the tinnitus goes beyond the normal function of a hearing aid. Assume that the hearing aid levels all frequencies perceived by the user to 100 % of a regular perception of frequencies according to a standard audiogram. Then "playing the audio signal in addition to its regular function" means that frequencies in the defined frequency range are amplified to above 100 %, in particular to at least 125 %, 150 %, or 200 %. In an embodiment, the adaptation unit may be configured to generate or modify the audio signal according to the defined frequency range on

top of a regular processing of the received audio signal for rectifying hearing loss.

In an embodiment, the device is a hearing aid or any other device performing functions of a hearing aid, in particular comprising a microphone for recording sounds in surroundings of the user. The received audio signal, i.e. the audio signal that is modified based on the at least one parameter by the adaptation unit, advantageously corresponds to an amplification of sounds in the surroundings of the user, which are in particular recorded by the microphone. For such embodiment, it is further advantageous that the adaptation unit is configured to enrich the audio signal with acoustic energy in the defined frequency spectrum if an acoustic energy in the defined frequency spectrum in the received audio signal is below a threshold, in particular below the hearing threshold of the user. In this way, suppression of the tinnitus may be achieved even if the surrounding sounds do not contain acoustic energy in the defined frequency spectrum.

Further, it is advantageous that the adaptation unit is configured to limit an output loudness, i.e. a total output loudness including the audio signal, to a level below a threshold. The threshold in particular is a feedback threshold if the device is a hearing aid or an earphone comprising a microphone. In this way, a feedback loop, in particular wherein a sound played by the device is fed back into the microphone and amplified again, leading to an annoying beep sound is avoided.

Particularly in the case of a hearing aid, but also for a general device, it is beneficial to limit the loudness or the acoustic energy in the audio signal to a certain threshold in order not to hurt the user's ear. In such embodiment, the adaptation unit is further configured to limit a loudness of the audio signal, in particular to a non-hurtful level of loudness, i.e. 105 dB within a tolerance of $\pm 10\%$. Alternatively, the

adaptation unit is configured to limit an acoustic energy in the defined frequency spectrum, in particular to the non-hurtful level of acoustic energy.

In another embodiment, limiting the loudness
5 of the acoustic energy in the audio signal is performed in order to avoid undesired acoustic feedback. This may be necessary for hardware-reasons, e.g. in a hearing aid or similar devices such as a mobile phone or headphones which amplify surrounding sounds. If the loudness or the
10 acoustic energy is not limited, the audio signal played by the hearing aid may be picked up again by the in-built microphone and amplified again, which may lead to a large, disturbing and in particular hurtful signal.

In an embodiment, the loudness or acoustic
15 energy of the audio signal is not only limited, i.e. decreased for certain frequencies, but also increased for other frequencies, in particular in response to the limiting. Here again, the split of acoustic energy to the frequency range around the frequency one or more octaves
20 below or above the tinnitus suppression frequency as described before may be useful. This may be implemented in the following way: The adaptation unit is configured to split at least a part of the acoustic energy which is neglected due to the limiting to the frequency range around
25 the frequency one or more octaves below or above the tinnitus suppression frequency. This is useful, in particular in the case of a hearing aid, because the desired effect of tinnitus suppression is still achieved while the hurtful consequences of too much acoustic energy in a
30 certain frequency range are avoided.

In particular in the case of the device being a hearing aid or comprising functions of a hearing aid, which may be limited to frequencies below e.g. 6000 to 7000 Hz, i.e. a hearing aid limit frequency, due to limi-
35 tations of its hardware or software, the following embodiment may be useful: If the tinnitus suppression fre-

quency exceeds the hearing aid limit frequency, the frequency characteristic of the audio signal is absent a contribution at the tinnitus suppression frequency but instead at frequencies of the defined frequency spectrum which are one or more octaves lower than the tinnitus suppression frequency, and hence, in particular at frequencies inside the range of frequencies supported by the hardware. If the tinnitus suppression frequency is below the capability of the hardware, the suppression sound is advantageously played at the tinnitus suppression frequency, or at one or several octaves above the tinnitus suppression frequency. Preferably, the device, i.e. the adaptation unit automatically compares an identified tinnitus suppression frequency with the limit frequency of the hearing aid e.g. stored in the device.

In a different embodiment, octave-shifting of the acoustic energy in the suppression sound is useful, in case a user may have normal hearing capabilities up to a limit frequency but hearing loss and tinnitus above the limit frequency. In this case, playing a sound at the tinnitus suppression frequency is ineffective in terms of tinnitus suppression. Rather, it is preferred in this case to apply peaks in the audio signal at one or more octaves lower than the tinnitus suppression frequency, i.e. below the limit frequency. In this way, tinnitus suppression or deletion can still be achieved, even under severe hearing loss. This feature is particularly useful since studies show that the frequencies of tinnitus, of an optimum tinnitus suppression sound and of hearing loss often overlap. In reverse, this also applies to hearing loss at lower frequencies, e.g. below 100 to 200 Hz. Preferably, the device, i.e. the adaptation unit automatically compares an identified tinnitus suppression frequency with the limit frequency either stored in the device of identified by way of measurement.

In one embodiment of the present invention, the device, and specifically the adaptation unit is configured to apply the filter characteristic used for tinnitus suppression out of environmental sound. In the event that there is no environmental sound detected by the device, an artificial audio signal according to the requirements may be switched on at least for such period in time. In a different embodiment, the artificial audio signal may permanently be applied in addition to the application of the filter characteristic to environmental sound. In this case it is preferred, to either limit, i.e. clip the acoustic energy in the subject frequencies in case of environmental sound of high loudness, or to split the acoustic energy to other desired frequencies in the characteristic, e.g. an octave above or below the tinnitus suppression frequency.

In an embodiment, the identification unit may support the determination of the following parameters regarding the user's tinnitus in different steps:

1. the tinnitus suppression frequency or the tinnitus frequency, respectively, as described above; typically these frequencies are stable over time in most users;
2. the interval of tinnitus suppression; this is in particular necessary in case of an intermittent audio signal being played to the user;
3. the minimum required loudness; the order of steps 2 and 3 may be changed; also, the parameters in 2 and 3 may be re-determined after some time, e.g. after a week or after a month, in order to adapt to a changed perception by the user;
4. optionally in case of an intermittent signal, the duration of a pulse of the audio signal: Such duration is chosen to be long enough in order to achieve tinnitus suppression, and may then be optimized not to be longer than necessary in order not to be obtrusive to the user.

The sounds played to the user for determining subsequent parameters 2 to 4 are advantageously adapted to the earlier determined parameters 1 to 3.

5 A second aspect of the current invention relates to a method for generating an audio signal or modifying a received audio signal to obtain the audio signal on an electronic device according to claim 46. The audio signal, again, preferably has a defined frequency spec-
10 trum comprising a peak of intensity with a peak frequency being one or more of: at a tinnitus suppression frequency, within a frequency range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency, at a frequency one or more oc-
15 taves below or above the tinnitus suppression frequency, and within a frequency range between one fourth of an octave below and one fourth of an octave above the frequency one or more octaves below or above the tinnitus suppression frequency.

20 The method preferably comprises the steps of supporting a determination of at least one parameter regarding a user's tinnitus, modifying the received audio signal according to the at least one parameter, thereby obtaining the audio signal, or generating the audio sig-
25 nal according to the at least one parameter, and playing the audio signal to a user. In particular the method is performed on a device as discussed above, and the audio signal also preferably comprises the properties discussed above. Further the method advantageously comprises the
30 step of identifying one or more of the user's tinnitus suppression frequency, tinnitus loudness, interval of tinnitus suppression, and hearing threshold, in particular by using the device as discussed above.

35 A further aspect of the current invention relates to a computer program comprising instructions which, when the program is executed by a processor of an

electronic device, cause the electronic device to carry out the steps of the above method. Preferably, the computer program is stored on a computer-readable data carrier.

5

Preferably, a device for providing an audio signal for suppressing or decreasing a user's tinnitus comprises an audio output unit configured to play the audio signal to the user, wherein the audio signal has a defined frequency spectrum comprising a peak of intensity with a peak frequency being one or more of: at a tinnitus suppression frequency; within a frequency range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency; at a frequency one or more octaves below or above the tinnitus suppression frequency; and within a frequency range between one fourth of an octave below and one fourth of an octave above the frequency one or more octaves below or above the tinnitus suppression frequency.

Preferably, the device further comprises an identification unit for supporting a determination of the tinnitus suppression frequency.

Preferably, the identification unit is configured to play sounds of different frequencies to the user, to prompt an input of the user in response to the sounds of different frequencies, and to determine the tinnitus suppression frequency by evaluating the input.

Preferably, the device further comprises an adaptation unit configured to generate the audio signal according to the defined frequency range.

Preferably, the device further comprises an adaptation unit configured to modify a frequency spectrum of a received audio signal according to the defined frequency range.

Preferably, the adaptation unit comprises a filter configured to amplify frequencies within the defined frequency spectrum, and/or to attenuate frequencies outside the defined frequency spectrum.

5 Preferably, an adaptation or attenuation of frequencies by the adaptation unit is at least 25 %, in particular more than 50 %.

Preferably, the defined frequency spectrum comprises a narrow-bandwidth characteristic within half
10 of an octave around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression frequency.

Preferably, the defined frequency spectrum comprises a narrow-bandwidth characteristic within one
15 fourth of an octave around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression frequency.

Preferably, the defined frequency spectrum comprises a narrow-bandwidth characteristic within one
20 eighth of an octave around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression frequency.

Preferably, the defined frequency spectrum corresponds to a frequency spectrum of tinnitus, in particular
25 of the user's tinnitus.

Preferably, the audio signal is a sinus signal, or is derived from a sinus signal.

Preferably, the defined frequency spectrum has zero intensity for frequencies other than the peak
30 frequency.

Preferably, the audio signal has a loudness below or above a perceived loudness of the tinnitus.

Preferably, the identification unit is further configured to support a determination of the perceived
35 loudness of the tinnitus by playing sounds of different loudness to the user, prompting an input of the user in response to the sounds, and by determining the

perceived loudness of the tinnitus by evaluating the input.

Preferably, the audio signal has a loudness equal to or below a hearing threshold of the user.

5 Preferably, the identification unit is further configured to support a determination of the hearing threshold by playing sounds of different loudness to the user, prompting an input of the user in response to the sounds, and by determining the hearing threshold by evaluating the input.

10 Preferably, the audio signal is continuous in time.

Preferably, the audio signal is alternating or intermittent in time.

15 Preferably, the audio signal alternates in loudness between a first loudness and a second loudness, in particular wherein the first loudness is above the hearing threshold of the user, and in particular wherein the second loudness is equal to or below the hearing threshold of the user.

20 Preferably, the alternating or intermitting audio signal comprises a steep slope between the first loudness and the second loudness, in particular wherein a duration of the slope is below 0.5 s or is below 0.1 s, in particular the slope has the form of a step function.

25 Preferably, the alternating or intermitting audio signal comprises a shallow slope between the first loudness and the second loudness, in particular wherein a duration of the slope is above 0.5 s or is below 1 s.

30 Preferably, an interval of alternation or intermittency of the audio signal has a random duration.

35 Preferably, an interval of alternation or intermittency of the audio signal is equal to or shorter than an interval of tinnitus suppression, in particular wherein the interval of alternation or intermittency is in the range of 5 s, 10 s, 20 s, 30 s, 60 s, 5 min, 10 min to 1 h.

Preferably, the identification unit is further configured to support a determination of the interval of tinnitus suppression by playing a sound with the defined frequency spectrum to the user, prompting an input of the user in response to the sound, and by determining the interval of tinnitus suppression by evaluating the input.

Preferably, the interval of alternation or intermittency is synchronized with the interval of tinnitus suppression.

Preferably, the device further comprises a microphone configured to record the received audio signal, wherein the received audio signal is provided to the adaptation unit.

Preferably, the adaptation unit is configured to receive the audio signal from a database, in particular wherein the database is stored in a memory of the device.

Preferably, the received audio signal comprises one or more of music, speech, environmental sounds, white noise, pink noise, brown noise, and a tinnitus habituation sound.

Preferably, the audio output unit is further configured to play the audio signal to an ipsilateral ear in relation to the tinnitus, in particular exclusively to the ipsilateral ear.

Preferably, the audio output unit is further configured to play the audio signal to a contralateral ear in relation to the tinnitus, in particular exclusively to the contralateral ear.

Preferably, the audio output unit is further configured to play a second audio signal with a second frequency spectrum to the user simultaneously with the sound, wherein the second frequency spectrum comprises a broader frequency range than the defined frequency spectrum.

Preferably, the second audio signal comprises one or more of music, speech, environmental sounds, white noise, pink noise, brown noise, and a tinnitus habituation sound.

5 Preferably, a loudness of the second audio signal is below the loudness of the audio signal.

 Preferably, a loudness of the second audio signal is below the first loudness, in particular wherein the loudness of the second audio signal is above the second loudness.

 Preferably, the audio output unit comprises a speaker or headphone configured to generate acoustic waves corresponding to the audio signal.

 Preferably, the device is an MP3 or other
15 digital audio files player.

 Preferably, the device is a mobile phone.

 Preferably, the device is an earphone, e.g. having functionality to manually or automatically adapt a frequency content of the played audio signal.

20 Preferably, the device is a hearing aid.

 Preferably, the hearing aid is configured to play the audio signal in addition to its regular function of rectifying hearing loss.

 Preferably, the adaptation unit is configured
25 to generate or modify the audio signal according to the defined frequency range on top of a regular processing of the received audio signal for rectifying hearing loss.

 Preferably, the audio output unit comprises an implant configured to generate acoustic waves corresponding to the audio signal directly in the user's hearing.

 Preferably, the audio output unit comprises a neuronal stimulator configured to generate a sensation of the audio signal in the user's brain.

35 Preferably, in a method for generating an audio signal or modifying a received audio signal to obtain

the audio signal on an electronic device, the audio signal has a defined frequency spectrum comprising a peak of intensity with a peak frequency being one or more of: at a tinnitus suppression frequency; within a frequency
5 range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency; at a frequency one or more octaves below or above the tinnitus suppression frequency; and within a frequency range between one fourth of an octave below and
10 one fourth of an octave above the frequency one or more octaves below or above the tinnitus suppression frequency.

Preferably, the method comprises the steps of automatically generating or obtaining the audio signal,
15 and playing the audio signal to a user, in particular being performed on the device described above.

Preferably, the method further comprises the step of identifying one or more of the user's tinnitus suppression frequency, tinnitus loudness, minimum required loudness, interval of tinnitus suppression and
20 hearing threshold, in particular by using the device described above.

Preferably, a computer program comprises instructions which, when the program is executed by a processor of an electronic device, cause the electronic device to carry out the steps of the method described
25 above.

Preferably, a computer-readable data carrier has stored thereon the computer program.

30

The described embodiments similarly pertain to the device, the method, the computer program, and the computer-readable data carrier. Synergetic effects may arise from different combinations of the embodiments although they might not be described in detail.
35

Brief Description of the Drawings

The embodiments defined above and further features and advantages of the present invention can also
5 be derived from the examples of embodiments described hereinafter which are explained with reference to the attached drawings. In the drawings, the figures show:

Fig. 1 a time diagram of an empiric finding
10 of tinnitus deletion by a sound underlying a device and a method according to the following figures,

Figs. 2 and 3 time diagrams with continuous and intermittent sound, respectively, according to embodiments of the present invention,

15 Figs. 4 to 8 time diagrams of particular embodiments with continuous sound,

Figs. 9 to 14 time diagrams of particular embodiments with intermittent sound,

20 Figs. 15 to 18 time diagrams with boosted music or boosted sounds according to embodiments of the present invention,

Fig. 19 a time diagram of different transition characteristics of a sound played according to embodiments of the present invention,

25 Figs. 20 to 24 time diagrams of an influence of an interval of sound intermittency or alternation on a degree of tinnitus suppression according to embodiments of the present invention,

30 Fig. 25 a time diagram of an embodiment with continuous sound adapting to the minimum required loudness,

Figs. 26 to 28 time diagrams of embodiments with intermittent sounds adapted to the interval of tinnitus suppression, the minimum required loudness and the
35 duration, respectively,

Figs. 29 to 31 frequency spectra of embodiments related to hardware limitations and hearing loss, respectively,

Fig. 32a-c examples of frequency spectra of sounds applied according to embodiments of the present invention,

Fig. 33 a schematic view of a mobile phone according to an embodiment of the present invention,

Figs. 34 to 37 block diagrams of various components of a device according to embodiments of the present invention,

Fig. 38 a block diagram of an electronic device according to an embodiment of the present invention,

Fig. 39 a system containing a medium for downloading software according to an embodiment of the present invention,

Fig. 40 a flow chart of a method according to an embodiment of the present invention, and

Figs. 41a-c subroutines of the method as illustrated in Fig. 40.

Modes for Carrying Out the Invention

Similar or relating components in the figures are provided with the same reference numerals. A "sound" may be understood as an audio signal or a sensation of such in general. "Playing a sound" to the user may be achieved in different ways, e.g. as usually by generating acoustic waves that are transmitted to the user's ear via air, or by creating the acoustic waves directly in the user's hearing via an implant, or by creating a sensation of the sound directly in the user's brain.

Fig. 1 shows a time diagram of an empiric finding of tinnitus deletion by a sound underlying a device and a method according to the subsequent figures. In

Fig. 1 and in similar diagrams, the axis of abscissae indicates time t in arbitrary units or in seconds s , and the axis of ordinates indicates loudness L or an equivalent physical quantity such as volume or acoustic energy.

5 A first line represents the course of a perception of the tinnitus 1 of a user over time. A second line shows a subjective hearing threshold 2 of the user. A third line indicates a sound 3 played to the user, i.e. the audio signal.

10 For times $t < 10$ s, the user perceives the tinnitus 1 at a certain loudness $LT1$, which is above his/her hearing threshold 2. Both, the loudness $LT1$ of the tinnitus 1 and the hearing threshold 2 are specific for a user and may be measured, e.g. by comparison to
15 different sounds of different loudness. The tinnitus 1 is further characterized by a frequency fT or a frequency range which gives it its characteristic sound, such as a ringing, a clicking, a hiss or a roaring. The hearing threshold of a user varies with frequency in general. In
20 time diagrams such as Fig. 1, the subjective hearing threshold of a user at the frequency fT of tinnitus is indicated.

Around time $t = 10$ s, a sound 3 is played to the user with loudness $LS1$, which is above the hearing
25 threshold 2 as well. The sound 3 has a certain duration, e.g. 2 s, and a tinnitus suppression frequency equal or similar to the tinnitus frequency fT . "Similar" shall mean that a frequency spectrum of the sound 3 comprises a peak at the tinnitus suppression frequency or within a
30 frequency range of half an octave or a fourth of an octave around the tinnitus suppression frequency. Moreover, "similar" shall mean that the frequency spectrum of the sound 3 may alternatively or additionally comprise a peak at an octave-shifted tinnitus suppression frequency ob-
35 tained by shifting the tinnitus suppression frequency by one or more octaves; the peak in the frequency spectrum of the sound 3 may also fall into a frequency range of

half an octave or a fourth of an octave around an octave-shifted tinnitus suppression frequency.

It is observed that correlated with playing the sound 3, the loudness of tinnitus 1 drops significantly by a reduction 4 of tinnitus loudness. In particular it drops below the hearing threshold 2, such that it is not perceived by the user any longer. Only in the time interval between $t = 46 - 60$ s, the tinnitus 1 recovers to its original loudness LT_1 . In particular it starts to be perceived by the user again, when the loudness curve of the tinnitus 1 crosses the hearing threshold 2 at around $t = 56$ s in the example of Fig. 1. This means that the user has not perceived and not been bothered by the tinnitus 1 for a certain tinnitus deletion time 5, also called an interval of tinnitus suppression, which in the example of Fig. 1 has a duration of 46 s. The actual values of reduction 4 of tinnitus loudness and tinnitus deletion time 5 are different and characteristic for individual users. The tinnitus deletion time 5 has been observed to be in the range of 10 s, 30 s, 60 s or several minutes in test users. Such tinnitus deletion time 5 can be exploited in a device for suppressing tinnitus and a corresponding method, provided the reduction of tinnitus loudness is observed repeatedly when the playing of sound 3 is repeated. Such empirical finding is the basis of the devices for decreasing or suppressing the tinnitus and corresponding methods in the following figures.

Originally the empirical finding was made when users (number of test persons > 10) reported difficulties in measuring their tinnitus frequency f_T with reference sounds. The tinnitus stopped almost immediately, when they perceived a sound 3 or noise similar to their tinnitus frequency f_T , wherein "similar" here and in the following shall have the above-defined meaning. The effect was observed to be repeatable. It was sufficient that the loudness LS_1 of the sound was low, e.g. at or just above the hearing threshold 2, or even below. An

example of a frequency spectrum $F_t(f)$ of a sound 3 with only frequencies within a range f_r around the tinnitus frequency f_T present is given in Fig. 32a; such frequency spectrum is similar to the tinnitus frequency f_T . It is explicitly noted that the effect of reduction 4 of tinnitus loudness is related to the sound 3 having the described frequency spectrum, which is defined in relation to the tinnitus frequency f_T , not in relation to a hearing loss characteristic or similar. Sounds that evoked the same effect include sinus sounds having intensity in only one or a few distinct frequencies, tinnitus-similar sounds, i.e. sounds having a frequency spectrum corresponding to the one of the perceived tinnitus, and even external sounds, such as music or speech, filtered such that they have a peak in their frequency spectrum around the tinnitus frequency f_T .

More specifically, the above findings are true when the tinnitus frequency f_T is replaced by the tinnitus suppression frequency. While the two frequencies coincide within a tolerance of $\pm 10\%$ for most users, in general they may be different.

Moreover it was observed that the reduction 4 of tinnitus loudness also occurred when a sound 3 was played to the user that was different from the tinnitus suppression frequency, in particular the tinnitus frequency f_T , by one or more octaves, i.e. an octave shift. An example of a sound 3 which is one octave lower than the tinnitus frequency f_T is given in Fig. 32b; also such frequency spectrum is considered similar to the tinnitus frequency f_T . In one test user, there was a very good success of tinnitus reduction 4 for the user at the tinnitus frequency $f_T = 13$ kHz; at a frequency of 6.5 kHz (f_T minus one octave), there was still good success for this user; and at frequencies of 3.25 kHz and 1.6 kHz (f_T minus two or three octaves), there was partial success.

Further it was observed that the sound 3 may even have different characteristics, i.e. differing frequency spectrums, and nevertheless evoke the same effect of reduction 4 of tinnitus loudness, provided the sound 3
5 fulfills the criterion of being similar to the tinnitus suppression frequency. In particular the frequency spectrum of such sound 3 may comprise further frequencies outside the range of similarity to the tinnitus suppression frequency. The latter situation is depicted in Fig.
10 32c with a typical frequency spectrum $F_t(f)$ of an external sound, such as music, that has low intensity for high frequencies, for which tinnitus occurs in most users. Therefore frequencies in the frequency range f_r around the tinnitus suppression frequency are amplified, e.g. by
15 a bandpass filter. The factor of amplification may typically be at least 25 %, 50 %, or more than 100 %. The effect of tinnitus reduction 4 also occurred, when other external sounds were heard at the same time as the sound 3.

20 The effect observed with test users can be exploited to delete tinnitus in real time, i.e. immediately. On the other hand, the effect may also reduce tinnitus in the long term as synapses causing tinnitus may be deactivated repeatedly and over a sufficiently long
25 period of time. Thus neurons or acquired synapses corresponding to the tinnitus are re-trained not to produce any additional activity which leads to the sensation of tinnitus. In this way, the tinnitus-causing synapses may be dismantled on a biological level due to lack of need
30 or lack of use in a process inverse to an acquisition of tinnitus, and the cause of tinnitus is removed.

While Fig. 1 shows a sound 3 that has a lower loudness $LS1$ than the tinnitus, $LS1 < LT1$, alternative embodiments may have $LS1 = LT1$ or $LS1 > LT1$. However,
35 note that it may be difficult to determine an objective loudness of the tinnitus since tinnitus is a subjective phenomenon. For this purpose, it is assumed that the

loudness of the tinnitus may be determined, e.g. by the user comparing the tinnitus to sounds of a known loudness and hence known acoustic energy.

In a recent study, it has been found that
5 tinnitus suppression with an intermittent sound is particularly effective if the sound 3 in Fig. 1 is played with a loudness that is 10 dB above the initial loudness of the tinnitus 1, meaning $LS1 = LT1 + 10 \text{ dB}$. Note that this formula represents the median of an empirical study.
10 The exact values vary between users. According to the study, a continuous sound is most effective in suppressing the tinnitus if it is played at the same or a similar loudness as the tinnitus, i.e. $LS1 = LT1$ within a tolerance of $\pm 10\%$. Hence in general, it is preferred that
15 the sound 3 is played with a loudness $LS1$ that is in the range between the tinnitus loudness $LT1 - 10 \text{ dB}$ and $LT1 + 20 \text{ dB}$, in particular between $LT1$ and $LT1 + 10 \text{ dB}$. A greater sound loudness $LS1$ would be disturbing and potentially harmful to the user.

20 Fig. 2 shows a time diagram of a method with a continuous sound 3 according to an embodiment of the present invention. Also in this case, the tinnitus 1 drops by a reduction in loudness to below the subjective hearing threshold 2, when the sound 3 on or around the
25 tinnitus suppression frequency sets in. Since the sound 3 is played continuously, the tinnitus deletion time 5 is infinite. The method with continuous sound 3 may advantageously be applied with pleasant sounds, such as music, speech or environmental sounds, filtered to boost frequencies similar to the tinnitus suppression frequency,
30 e.g. by a bandpass filter. In Fig. 2, the sound 3 has a loudness $LS1$ above the hearing threshold 2. This means that there is a remaining loudness on the tinnitus suppression frequency due to the sound 3. The reduction 6 of
35 loudness at the tinnitus suppression frequency is hence partial. However, success in reducing tinnitus loudness has partly also been achieved when $LS1$ is at or below the

hearing threshold 2, see e.g. Fig. 6. In the latter case, the reduction 6 of loudness at the tinnitus suppression frequency is total. For that purpose, sinus sounds or colored noise is advantageously applied.

5 Fig. 3 shows a time diagram of a method with an intermittent sound 3 according to an embodiment of the present invention. The sound 3 again has a frequency spectrum similar to the tinnitus suppression frequency, but a duration of only 5 s, which suffices to cause the
10 tinnitus 1 to drop in loudness. In this case, the recovering tinnitus 1 reaches the hearing threshold 2 around 30 s after its deletion. Since the tinnitus deletion time 5 due to such an intermittent sound 3 may be known from measurements, the interval of sound intermittency is set
15 to the tinnitus deletion time 5, i.e. 30 s, such that the tinnitus is again suppressed when it becomes perceivable by the user. As a result, the effective tinnitus deletion time 8 may be extended, theoretically to infinity. Also the method with an intermittent sound 3 works with sounds
20 of various frequency characteristics, e.g. sinus tones or noise, provided that their frequency spectrum is similar to the tinnitus suppression frequency. Partial success may again still be achieved when reducing the sound loudness LS1 below the hearing threshold 2.

25 A first step to be performed by an electronic device for suppressing tinnitus or in a corresponding method is preferably a measurement of the user's subjective tinnitus. The measurement may relate to one or more of a tinnitus suppression frequency, in particular the
30 tinnitus frequency f_T , i.e. the dominating frequency of tinnitus, a tinnitus suppression frequency spectrum, an interval of tinnitus suppression, a tinnitus loudness LT_1 , and a hearing threshold. The measurement may be performed by comparison with reference sounds, e.g. under
35 the guidance of an audiologist or performed by the user himself/herself. Alternatively, the measurement may be a

measurement of neuronal activity related to the user's hearing.

In a second step and as described above, a sound 3 with a frequency spectrum similar to the tinnitus suppression frequency is played to the user. Thus the tinnitus 1 is stopped or reduced or suppressed. The sound 3 may be of any narrow-bandwidth sound characteristic, meaning narrower than one third of an octave, including tinnitus-similar sounds and sinus-similar sounds. This may be performed in quiet surroundings, or while other sounds are perceived at the same time. The sound 3 or a sensation of sound 3 may be achieved through a speaker, an earphone, customized hardware, a hearing aid, an implant or a device creating neuronal sensation of a sound.

Figs. 4 to 8 show time diagrams of particular embodiments of the second step with continuous sound building on the concept of Fig. 2. In Fig. 4, the loudness $LS1$ of the sound 3 is the same as the original tinnitus loudness $LT1$. The transition from zero loudness to loudness $LS1$ may be smooth, e.g. as shown, or abrupt, see also Fig. 19. Shortly after the sound 3 sets in, the tinnitus 1 is decreased by the reduction 4, and not perceived by the user any longer since its loudness is below the hearing threshold 2. However, now the user perceives the sound 3 similar to the tinnitus frequency fT with the same loudness $LS1 = LT1$ as the tinnitus 1 before. As such there is no reduction in the remaining sound loudness 7 on the tinnitus frequency fT . But the sound 3 may be more pleasant and less agonizing than the tinnitus 1.

The time diagram of Fig. 5 differs from Fig. 4 in that the sound 3 has a lower loudness $LS1$ than the original tinnitus loudness $LT1$. The effect achieved through the sound 3 is again a reduction 4 of the tinnitus loudness below the hearing threshold 2. However, due to $LS1 < LT1$ in this case, there is an effective reduction 6 of loudness on or around the tinnitus frequency fT . Thus a remaining loudness 7 on or around the tinnitus

frequency f_T is lower, such that the perceived sound is effectively decreased, and the user is at least partially relieved.

It has been found with several users that the method of Figs. 4 and 5 also work when playing a sound 3 that is not consciously perceived by the user. It may be that conscious perception is not as relevant as subconscious perception by hypothalamus. This situation is shown in Fig. 6, wherein the loudness LS_1 of the sound 3 is equal to or even below the hearing threshold 2 of the user around the tinnitus frequency f_T . Again there is a reduction 4 of tinnitus 1. Since the user does not perceive the sound 3, he/she does not hear any remaining sound at the tinnitus frequency f_T , such that the reduction 6 of loudness at the tinnitus frequency f_T is total. Such situation is beneficial for a restructuring of the synapses causing the tinnitus because it completely breaks the feedback loop creating subjective tinnitus.

Figs. 7 and 8 show advantageous modifications of the methods of Figs. 5 and 6. When the sound 3 sets in, in the beginning it is as a first loudness LS_1 , such as being equal to the tinnitus loudness LT_1 . Then the loudness of the sound 3 is reduced to a second loudness LS_2 , which is lower and played continuously. Such first sound impulse with a high loudness LS_1 may improve the effect of tinnitus suppression in some users. Due to the different levels of the second loudness LS_2 in Figs. 7 and 8, the reduction 6 in loudness at the tinnitus frequency f_T is partial in Fig. 7, and total in Fig. 8.

Figs. 9 to 14 are time diagrams of particular embodiments of methods with intermittent sound. An intermittent sound 3 is played to the user, wherein the sound peaks have a loudness LS_1 , and in between the sound peaks there is zero loudness. The frequency spectrum of the sound 3 should be similar to the tinnitus suppression frequency, in particular the tinnitus frequency f_T , as discussed above. The sound peaks have a duration of 1 s

to 2 s, which is sufficient to yield a tinnitus suppression. Depending on and as required by the user, the sound peaks may also be longer. The time between peaks ideally corresponds to the user's tinnitus deletion time 5, e.g. 10 s, 30 s, or 60 s, but may also be shorter to achieve the same effect. Provided that the time between peaks is no longer than the tinnitus deletion time, the next peak of sound 3 sets in, when or before the tinnitus 1 has recovered to a loudness equal to the hearing threshold 2. In this way, a total cancellation of cumulative sound on the tinnitus suppression frequency is achieved during the time between the sound peaks, i.e. the time 8 of no perceivable tinnitus.

The intermittent sound 3 of Fig. 9 has a loudness LS1 during peaks which is equal to the original tinnitus loudness LT1. All sound peaks have the same loudness LS1. This may e.g. be a beeping or intermittent noise with the required frequency spectrum.

In Fig. 10, only the first peak of the intermittent sound 3 has a loudness LS1 equal to the original tinnitus loudness LT1. The first peak suppresses the original tinnitus. Subsequent peaks have a loudness LS2 which is lower than LS1, but above the hearing threshold 2. In Fig. 11, which shows a similar method, the subsequent peaks have a loudness LS2 which is equal to the hearing threshold 2. In both cases, the subsequent peaks are sufficient in order to suppress the recovering tinnitus anew. The method according to Fig. 11 has the advantage that after a first sound peak with loudness LS1, which is consciously perceived by the user, the subsequent peaks with loudness LS2 are not consciously perceived by the user. Hence an every-day life of the user is not disturbed.

Figs. 12 and 13 show methods similar to Fig. 9, i.e. with an intermittent sound 3 whose peaks have equal loudness LS1, but the loudness LS1 is lower than the original tinnitus loudness LT1. As discussed in the

context of Figs. 5 to 8, a reduction of loudness at frequencies around the tinnitus frequency f_T is achieved even during the sound peaks. The method of Fig. 12 leads to periods of no cumulative sound between the peaks, whereas in Fig. 13 the tinnitus suppression is continuous since the peaks are not consciously perceived.

Fig. 14 shows a similar method as Fig. 10. However, at the same time with sound 3, also other sounds 9 are played to the user. The other sounds 9 may e.g. be music, a conversation or environmental sounds. The effect of the method is still achieved, the tinnitus 1 is suppressed. The method may, however, be more pleasant for the user, if other sounds 9 are present as well, e.g. a favorite piece of music. Besides, Fig. 14 illustrates that the method of the invention also works in noisy environments. Hence such method may easily be integrated into the every-day life of the user, which is an important prerequisite for success in practice.

In conclusion, the methods of Figs. 9 to 14 produce an immediate and prolonged reduction 6 of loudness at the tinnitus suppression frequency, in particular the tinnitus frequency f_T , i.e. the user's subjective tinnitus loudness plus sound 3 simulating the tinnitus, of up to 96 % to 100 %. A reduction of 100 % is reached, if the sound 3 has a loudness LS_1 on or below the hearing threshold 2, and if an interval of intermittency is equal to or shorter than the user's individual tinnitus deletion time 5. A reduction of 97 % to 99 % is reached, if the loudness LS_1 is below the subjective tinnitus loudness LT_1 but above the hearing threshold 2. A reduction of > 93 % is reached, if the loudness LS_1 is equal to tinnitus loudness LT_1 , depending on the duration of the intermittent peaks and the interval of intermittency.

Figs. 15 to 18 show time diagrams of methods with boosted music or boosted sounds according to embodiments of the present invention. Instead of using specifically created sounds in tinnitus suppression, such as a

sinus sound or a tinnitus-like sound as in the above methods, it is also feasible to use other sounds whose frequency spectrum is adapted. Frequencies of the other sounds are boosted, i.e. increased in intensity e.g. by
5 at least 25 %, 50 % or 100 %, in a frequency range similar to the tinnitus suppression frequency, in order to get boosted music 10 (Figs. 15 and 16) or a boosted other sound 11 (Figs. 17 and 18). This may be achieved by band-pass filtering or by any way of increasing the acoustic
10 energy at these frequencies by an analogue or digital program or apparatus. Alternatively, frequencies not fulfilling the criterion of being similar to the tinnitus suppression frequency may be attenuated or cut out, e.g. by at least 25 %, 50 % or by 100 %, in order to achieve a
15 similar effect on the user's tinnitus.

Fig. 15 represents the described method when using a continuous or permanent boost of music energy on or around the tinnitus suppression frequency. The boosted music has a first loudness LS1 at the tinnitus suppression frequency, which is smaller than the tinnitus loudness LT1, whereas an unboosted music has a second loudness LS2, which is smaller than the first loudness LS1 at the tinnitus suppression frequency. When the music that the unboosted music starts to be boosted, the tinnitus 1
25 is suppressed below the hearing threshold 2 by the reduction 4 of tinnitus loudness. The user does not perceive the tinnitus 1 any longer but only the boosted music 10. Such method represents a pleasant tinnitus method since any favorite music of the user may be used. A prerequisite is that the unboosted music already contains acoustic energy in the frequency range to-be-boosted.
30

As can be seen from Fig. 16, the method of Fig. 15, i.e. the boosting of music in the frequency range of tinnitus or at octave shifts thereof, may as
35 well be applied in an intermittent manner. During most of the time, the music is unboosted, i.e. it has normal acoustic energy in the relevant frequency range, in order

not to disturb the usual sound characteristic of the music. For short intermittent pulses, e.g. of 1 s to 2 s length, the acoustic energy in this frequency range is boosted. This leads to a suppression of tinnitus 1 below the hearing threshold 2. The pulses are advantageously
5 repeated at an interval equal to or shorter than the tinnitus deletion time 5, i.e. before the loudness of tinnitus 1 recovers to above the hearing threshold 2. In this way, the tinnitus is permanently suppressed without altering the pleasant impression of the music, i.e. its
10 usual sound characteristic, for most of the time.

In an alternative embodiment, other sounds 11 in an environment of the user are boosted in the frequency range, in particular all other sounds which is the
15 concept of Figs. 17 and 18. This might e.g. be achieved by a hearing aid which the user wears anyway for reasons of hearing loss. If the user uses a hearing aid, the boost, i.e. the increase of acoustic energy, is performed on top of a correction which the hearing aid performs in
20 that frequency range for compensating hearing loss. The boost may again be performed continuously (Fig. 17) or intermittently (Fig. 18). If a hearing aid is assumed to increase a loudness of sounds 11 in a frequency range of hearing loss up to 100 % of an original hearing level, it
25 increases the sound loudness in this frequency range above 100 % of the original hearing level according to Figs. 17 and 18, in particular to at least 125 %, 150 % or 200 %. In this way, the tinnitus method may be integrated into the user's every-day life seamlessly and
30 without any further effort or time requirements.

Fig. 19 shows a time diagram of different transition characteristics of the sound 3 played in a device or a method according to embodiments of the present invention. Two examples are given as sound 3a with an abrupt onset from zero loudness to LS1, and sound 3b with a
35 smooth transition in loudness between zero and LS1. For the purpose of the method, the effect of both transition

variants is the same: The tinnitus 1 is suppressed by the reduction 4 of tinnitus loudness below the hearing threshold 2. An abrupt transition, such as an abrupt onset of a sound or an abrupt onset of a boost, facilitates shorter sound pulses in a method with intermittent sound. Such abrupt transition may have the form of a step function, or it may comprise a slope of a short duration, such as e.g. shorter than 0.5 s or 1 s. A smooth transition, such as a fade-in and fade-out in form of a ramp, e.g. a slope of a duration longer than 0.5 s or 1 s, may be more enjoyable for the user, in particular if the frequency spectrum of music or other sound is altered or boosted. Both forms of transition shown in Fig. 19 can be combined with various of the methods according to Figs. 2 to 18.

Figs. 20 to 24 show time diagrams of an influence of an interval of sound intermittency or alternation on a degree of tinnitus suppression according to embodiments of the present invention. In Figure 20, the interval of intermittency of the sound 3, and the interval of alternation of the boosted music 10 or of the boosted other sound 11 are varied by a small amount of variation 12 around the time of tinnitus deletion 5. It is clear that such variation 12 does not inhibit the effect of tinnitus suppression as long as the interval of intermittency or alternation is shorter than or equal to the time of tinnitus deletion 5. In that case, a subsequent sound 3 or boost pulse of music 10 or of other sound 11 will always suppress the tinnitus 1 again before its loudness increases above the hearing threshold 2.

The situation of the interval of sound intermittency or alternation being shorter than the time of tinnitus deletion 5 is depicted in Fig. 21. The pulses of sound 3 with a frequency spectrum similar to the tinnitus suppression frequency suppress the tinnitus 1 before its loudness reaches the hearing threshold 2. Hence the per-

ceived tinnitus deletion time 8 is theoretically infinite. The user may have heard pulses more frequently than necessary but this is uncritical to the success of the method. As mentioned before, partial success is also
5 achieved, if the loudness LS_1 of the sound pulses is below the hearing threshold 2, such that the user does not perceive them.

Fig. 22 depicts the situation of the interval of sound intermittency or alternation being equal to the
10 time of tinnitus deletion 5. The two intervals are synchronized which also leads to a perceived infinite tinnitus deletion time. This is the optimal case since the user does not have to listen to more pulses of sound 3 or boosts of music 10 or of other sound 11 than necessary.
15 For greater efficiency of tinnitus suppression, the first pulse of sound 3 displayed at around 5 to 10 s may be louder than the subsequent pulses, in particular louder than the loudness of the tinnitus 1 by 0 to 20 dB.

However, if the interval of sound intermittency or alternation becomes longer than the time of tinnitus deletion 5, the tinnitus 1 recovers with its loudness above the hearing threshold 2 for some time as shown in Fig. 23. Such behavior is not critical to the long-term effect of the method, which is a restructuring of
25 the faulty neurons related to the tinnitus frequency f_T . But it may be disturbing for the user since he/she repeatedly perceives the tinnitus 1 for some time before it is suppressed again.

Figure 24 shows pulses of sound 3 with random
30 intervals of intermittency between them. In some cases, the user will not perceive the tinnitus 1 similar to Figs. 21 and 22, while in others, the tinnitus 1 may even reach its original loudness LT_1 before it is suppressed by a subsequent sound pulse. In this case, the user experiences a partial tinnitus deletion over time. The degree
35 of tinnitus deletion over time depends on a probability distribution of the random intervals of intermittency. A

method with such random interval of sound intermittency or alternation by boosts may be desirable because of its unpredictability, such that the user does not get used and bored by a regular interval, especially in the case
5 of boosting music.

As is understood from the above description and figures, it is a general goal of the invention to relieve a user from the tinnitus, which may be perceived as
10 painful and disturbing. An effect of the described device is that the tinnitus is suppressed or deleted in a convenient and easy-to-apply way, which leads to longer use times of the device and thus better success in tinnitus suppression. Another effect of embodiments of the device
15 is that they are not obtrusive for the user. This is true for the device itself, comprising e.g. a mobile phone, earphones or a hearing aid, as well as for its application.

The embodiments of the invention shown in
20 Figs. 25 - 28 show these advantageous effects to an even greater extent. This is achieved by tailoring the audio signal that is played to the user by means of determining at least one parameter regarding the user's tinnitus, and then modifying or generating the audio signal according
25 to the at least one parameter. Examples for the parameter have been listed above and are described in the following. In general, it is advantageous that the at least one parameter may be determined with the device by the user alone, i.e. without the help of a trained person, e.g. a
30 doctor or an audiologist, though assistance of a trained person is not excluded. Also, it is advantageous that the determination of the at least one parameter is repeated, e.g. in a regular interval of e.g. one week or month, or as soon as a change of parameters may occur. The at least
35 one re-determined parameter is then automatically taken into account by the device for modifying/generating future audio signals.

Fig. 25 shows that the sound 3 decreases in loudness over time and in particular as the loudness of the tinnitus 1 decreases. The evolution of the loudness of the sound 3 is adapted due to user feedbacks and re-determination of parameters over time. It is e.g. possible that the loudness of the sound 3 in general decreases over time according to a certain function, e.g. linearly or exponentially, e.g. by 5 dB per week, starting from an initial loudness of e.g. 90 dB. Advantageously, the user presses a button on the device as soon as he/she starts to perceive the tinnitus again. In response to this user input, the loudness of the sound 3 is increased again, e.g. by a predefined amount, e.g. 5 dB.

In general, the evolution of the loudness of the sound 3 does not have to be monotonically decreasing as in Fig. 25, but the loudness may also adapted to greater values, e.g. if the initial loudness of the sound 3 is not sufficient to suppress or delete the tinnitus. However, the advantage of the embodiment of Fig. 25 is the adaptation of the sound loudness to the minimum required loudness by measuring the latter over time.

In general, such embodiment with adapting loudness of the sound 3 has the effect that the sound is not (much) louder than necessary in order to suppress the tinnitus, i.e. the sound is played with a loudness just above the minimum suppression sound loudness. Note that the minimum suppression sound loudness may be above, at or below the hearing threshold. In this way, the sound is less disturbing or obtrusive to the user.

Fig. 26 shows the temporal evolution of the sound 3 when a different parameter, in this case the tinnitus suppression sound interval, i.e. the interval between subsequent pulses of sound 3, is adapted. For the user not to perceive the tinnitus 1, the tinnitus suppression sound interval should be shorter or at most equal to the interval of tinnitus deletion. As there may

be changes of this parameter over time in a user, the interval of tinnitus deletion is re-determined and the sound 3 is adapted to its new value.

Fig. 27 depicts the situation in which the
5 loudness of the sound 3, in this case an intermittent sound, is adapted over time. As in Fig. 25, the adaptation of the loudness is advantageously in response to a change of the minimum required loudness or a change of tinnitus loudness. In particular, the parameter minimum
10 required loudness or tinnitus loudness is re-determined after a certain time, and the sound loudness is adapted for an optimum tinnitus suppression, which at the same time is least obtrusive for the user. This embodiment may be combined with the re-determination and adaptation of
15 the interval of tinnitus deletion described above for Fig. 26.

In the embodiment of Fig. 28, the duration of the sound 3, in particular of pulses of sound, is adapted over time according to user feedback. This may be desired
20 in order to reduce the obtrusiveness or disturbance from the signal to the user. By adapting the sound duration to repeated user feedback, the sound duration preferably approaches the minimum suppression signal duration, e.g. asymptotically, for which tinnitus suppression or dele-
25 tion is still achieved. Advantageously, the adaptation of the sound duration, in particular the determination of a minimum required sound duration for tinnitus suppression, is performed after other parameters such as the tinnitus suppression frequency and the minimum required loudness
30 have been adapted.

In a similar way, an embodiment of the device offers the possibility to adapt the sound quality to the user's present preferences. Sound quality may be influenced by the type of sound 3 played, e.g. sinus sound,
35 noise, instrumental music, pulsating sound, or by a frequency characteristic. In such way, the user can choose the least obtrusive sound quality for his/her present

situation, while still achieving tinnitus suppression or deletion.

In a similar way, an embodiment of the device supports an adaptation of the transition of the intermittent or alternating sound as described with respect to
5 Fig. 19. Preferably a characteristic of the transition, such as a fade-in and/or fade-out duration, is adapted according to user feedback.

In a similar way, an embodiment of the device
10 offers the possibility to change a distribution of the acoustic energy in the sound 3 within the defined frequency spectrum. In particular, this means that the sound at the tinnitus suppression frequency, in particular the tinnitus frequency f_T , may be played with lower loudness
15 while sounds at one or more octaves distance to the tinnitus suppression frequency are played with higher loudness. An example is lowering the loudness of the sound at 8000 Hz, while increasing the loudness at 4000 Hz and/or 2000 Hz and/or 1000 Hz. In this way, the sound may be
20 made more pleasant according to user input. At the same time, this may be beneficial for the overall effect of tinnitus suppression since, in general, the tinnitus frequency f_T often correlates with hearing loss in a similar frequency range, i.e. around f_T .

25

Some features that are advantageous, in particular in the case of the device being a hearing aid or comprising functions of a hearing aid, are shown in Figs. 29 to 31.

30 Fig. 29 shows the frequency response of a certain device producing a sound, in particular a hearing aid, which is limited to frequencies below e.g. 6000 to 7000 Hz due to limitations of its hardware or software. If the tinnitus suppression frequency, in this case
35 10000 Hz is above this range and a tinnitus suppression sound shall be played at the tinnitus suppression frequency, the device does not actually play the sound, thus

the effect of tinnitus suppression is not achieved. In such case, the tinnitus suppression sound is played at frequencies of the defined frequency spectrum which are one or more octaves lower than the tinnitus suppression frequency, see above, in particular at frequencies inside the range of frequencies supported by the hardware. If the tinnitus suppression frequency is below the capability of the hardware, the suppression sound is advantageously played at one or several octaves above the tinnitus suppression frequency.

A similar situation, in which octave-shifting of the acoustic energy in the suppression sound is useful, is shown in Fig. 30. A user may have normal hearing capabilities up to 7000 Hz but hearing loss above and a tinnitus at $f_T = 10000$ Hz. In this case, playing a sound at the tinnitus suppression frequency similar to f_T is ineffective in terms of tinnitus suppression. Rather, the suppression sound is played one or more octaves lower than the tinnitus suppression frequency, e.g. at 5000 Hz. In this way, tinnitus suppression or deletion can still be achieved, even under severe hearing loss. This feature is particularly useful since studies show that the frequencies of tinnitus, of an optimum tinnitus suppression sound and of hearing loss often overlap. In reverse, this also applies to hearing loss at lower frequencies, e.g. below 100 to 200 Hz.

Fig. 31 shows a similar situation where a user has a tinnitus at $f_T = 8500$ Hz and additionally a significant hearing loss around this frequency, in particular in the range between 7000 Hz and 10000 Hz. While playing a sound at f_T may still achieve tinnitus suppression to a low degree, the required loudness of the sound for suppression may be high and in particular so high that it is damaging to the user's ear. In the displayed example, the user's hearing loss at f_T is 50 dB and the tinnitus has a loudness of 70 dB. Hence a conventional hearing aid will amplify sounds at f_T by 50 dB, and in

particular the tinnitus to $70 \text{ dB} + 50 \text{ dB} = 120 \text{ dB}$. According to studies, another 10 dB will be added for an optimally effective tinnitus suppression sound. Thus the suppression sound will be played at f_T with 130 dB . This
5 is unpleasant for the user and damaging to the ear.

A solution as depicted in Fig. 31 is playing the suppression sound at one or more octaves lower than f_T , e.g. 4250 Hz , where the hearing of the user is better or normal. An optimum loudness of the suppression sound
10 in that case is $70 \text{ dB} + 10 \text{ dB} = 80 \text{ dB}$. This is acceptable for the user, and damages to the ear are avoided.

Fig. 32a-c show examples of frequency spectra of sounds applied in methods according to embodiments of
15 the present invention. They have been discussed in the context of Fig. 1, see above.

Fig. 33 illustrates a schematic view of a mobile phone according to an embodiment of the present invention. The mobile phone 21 is a smartphone comprising a
20 display 22 which constitutes an interface 26 to the user. The mobile phone 21 i.a. contains a housing 23 and a plug 25 for earphones 24.

Figs. 34 to 37 illustrate block diagrams of components of an electronic device according to embodiments of the present invention. In Fig. 34, a software
25 engine 50 includes an identification unit 51 and an adaptation unit 52 both of which may act on an audio output unit 60. The identification unit 51 supports identifying, for example, a frequency f_T and/or a loudness of a user's
30 tinnitus. The tinnitus frequency f_T and/or loudness is input to the adaptation unit 52 which converts the tinnitus frequency f_T in a defined frequency characteristic, which in this specific embodiment is a filter characteristic, or builds a frequency characteristic based on the
35 identified tinnitus frequency f_T or loudness. Such frequency characteristic is applied by the adaptation unit 52 to an audio signal $\langle as \rangle$, which preferably is stored in

a memory of the apparatus. The filtered audio signal <as>, also called adapted audio signal <aas> is input to the audio output unit 60 for being played to the user. Playing the adapted audio signal <aas> may be initiated
5 by triggering the process of modifying audio signal <as> accordingly, or may be initiated by a user independent from the building of the adapted audio signals <aas> at any later point in time.

In the block diagram of Fig. 35, a different
10 way is illustrated for adapting audio signals <as>. Such way may be denoted as "on the fly" adaptation in that a sound modifier 61 of the audio output unit 60 is controlled by the adaptation unit 52 by means of a control signal ctrl(fT) for implementing the frequency character-
15 istic that is derived from the identified tinnitus frequency fT. The sound modifier 61 tunes the audio signal <as> while playing it accordingly such that the adapted audio signal <aas> may be played to the user by the audio output unit 60. In this embodiment, it may not be neces-
20 sary to store the adapted audio signals <aas> in the electronic device, and only the audio signal <as> may be stored as is the frequency characteristic based on the identified tinnitus frequency fT.

Figs. 34 and 35 may also be interpreted as a
25 working mode of a hearing aid. In that case, external sound <as> is recorded by a microphone and transmitted to the adaptation unit 52 (Fig. 34), or the sound modifier 61 (Fig. 35). There, the frequency spectrum of the external sound is modified, i.e. adapted according to the tinnitus frequency fT, e.g. as shown in Fig. 32c. In an embodiment, the adaptation of the external sounds according to the proposed tinnitus method is performed on top of a regular function of the hearing aid which rectifies a hearing in certain frequency ranges.

35 Alternatively, the audio signal <as> in Fig. 35 may be a generic sound, such as e.g. a sinus sound, which is generated by a sound generator or by the audio

output unit 60 itself. The generic sound <as> is then adapted according to a frequency spectrum comprised in the control signal <ctrl(fT)> which is determined by the adaptation unit 52 based on the tinnitus frequency fT or loudness as determined by the identification unit 51.

In an embodiment, the identification unit 51 supports also a determination of the tinnitus deletion time and/or a determination of the hearing threshold, e.g. depending on the frequency. In that case, the audio signal <as> may additionally be modified or adapted according to the determined tinnitus deletion time and/or the determined hearing threshold by the adaptation unit 52 (Fig. 34) or the sound modifier 61 (Fig. 35)

Fig. 36 shows another block diagram which focuses on the generation of sound samples <sosx> rather than adapted audio signals <aas>. A basic sound sample <bsos> may be stored in the device, and for supporting identification of the relevant tinnitus frequency fT, the identification unit 51 controls a sound modifier 61 of the audio output unit 60 by control signal <ctrl(ui)> for generating a sound sample <sosx> out of a basic sound sample <bsos>. The control signal <ctrl(ui)> is subject to the user input <ui> which may denote a modification such as frequency up or frequency down with respect to the most recent sound sample <sosx> played. The identification unit 51 translates such user input <ui> into the control signal <ctrl(ui)> for adjusting the sound modifier settings for, for example, generating a sound sample <sosx+1> from basic sound sample <bsos> that has a higher tone than the previous sound sample <sosx> played. In an alternate embodiment, a control signal <ctrl> makes the sound modifier 61 play sound samples <sosx> in a defined order. In another advantageous embodiment, the next sound sample <sosx+1> differs from the sound sample <sosx> in loudness such that a perceived loudness of the tinnitus may be determined. In a similar way, it is possible to determine the hearing threshold, or the tinnitus deletion

time of the user. Alternatively and in general, the tinnitus suppression frequency is determined and used instead of the tinnitus frequency f_T .

Fig. 37 illustrates another block diagram which focuses on the generation of sound samples $\langle \text{sosx} \rangle$. In this example, the apparatus holds multiple different sound samples $\langle \text{sosx} \rangle$ that can be selected for being played by the audio output unit 60 by the identification unit 51. The selection may follow a defined order of sound samples $\langle \text{sosx} \rangle$, e.g. by rising frequency, or may depend on the user input $\langle \text{ui} \rangle$ which may be translated by the identification unit 51 into the right choice of sound sample $\langle \text{sosx}(\text{ui}) \rangle$ to be played next.

Once the tinnitus frequency f_T is determined, a frequency characteristic of the one or more selected audio signals as may be adapted according to the tinnitus frequency f_T determined. Sample frequency characteristics $F_t(f)$, to be applied to an audio signal as, are shown in Fig. 32 and were described above in the context of Fig. 1.

It is appreciated, that such modification to the frequency characteristic is not limited to an adaptation in the high frequency range but may also be applicable to low or medium portions of the audible frequency range. Any such adaptation/modification applied may either increase or lower associated frequencies. By means of adapting the frequency characteristic also outside the frequency range identified, other auditory disorders may be addressed such as hearing loss. For identifying such other auditory disorders, the present apparatus may be used, for example, as a device for identifying such other auditory disorders. In a preferred embodiment, the apparatus may be adapted for executing an audiometry. In such audiometry, sound samples representing different frequencies may be played to the user via the audio output unit. The user is requested to indicate via a suitable interface - e.g. by pressing a button - the point in time

he/she hears the sound sample. Summarizing the user's responses over the audible frequency range delivers an audiogram of the user indicating his/her hearing capability in form of hearing loss. Out of such information, the present apparatus may automatically identify frequencies or frequency ranges to be adapted, and in particular to be one of amplified or attenuated. Such frequency ranges may accordingly be adapted in the frequency characteristic that will be applied to the audio signals.

Fig. 38 shows a block diagram of an electronic device according to an embodiment of the present invention, and specifically of a mobile electronic device 80, in a more hardware oriented manner than in block diagrams in Figs. 34 to 37. The electronic device includes a processing unit 81 which is connected via an internal bus 89 i.a. to a non-volatile memory 84, such as a ROM, which may be implemented, for example, in Flash technology, and to a volatile memory 86, such as a RAM, which may, for example, be implemented in DRAM technology. Reference sign 85 denotes a wireless interface such as a 4G interface for transmitting and receiving data in a wireless manner. The electronic device 80 further includes a digital/analogue converter 82 for supplying an audio output 83 with analogue audio signals. In addition, the electronic device 80 supports a user interface 87 which may be a graphical user interface including a display and some input means.

For example, the wireless interface 85 may be used for receiving audio signals from a provider. The user interface 87 may support selection and downloading of audio signals via the wireless interface 85. The audio signals may be stored in the non-volatile memory 84. In the non-volatile memory 84, a computer program element may be resident which supports identification of a frequency range of a user's auditory disorder, which allows deriving a frequency characteristic from the identified

frequency range, which applies the frequency characteristic to a selected audio signal for generating an adapted audio signal, and which finally supports playing the adapted audio signal. Such computer program element may
5 be loaded into the volatile memory 86 by the processing unit 81 for being executed.

In this context, the user interface 87 may be involved requesting for user input related to the frequency range that matches the tinnitus perception best.
10 In one embodiment, sound samples may be output to the user. Such sound samples may be stored in the non-volatile memory 84 and be output via a D/A converter 82 to the audio output 83 which may be a plug for earphones, for example. Once the frequency range is determined, the
15 processing unit 81 may store this information in one of the memories 84, 86 and may generate, in a specific embodiment, a filter characteristic based on the frequency range. The filter characteristic may be stored in any of the memories 84, 86, and be applied to an audio stream
20 representing an audio signal being loaded for being played via the components 82 and 83.

Fig. 39 shows a system 70 for downloading a computer readable element as may be used with the mobile phone 21. The system may include a server 71 including
25 storage means. Reference sign 72 indicates a transmission network, such as the internet. A mobile phone 21 receives the computer readable element, also called "app" in this context, which during transmission is represented by an electrical transmission signal <ets>.

30 Fig. 40 shows a flow chart of part of a method of the present invention. In step S1, the method is started, e.g. by pressing an icon representing the "tinnitus app" on the mobile electronic device. In step S2, the "app" supports identification of a tinnitus suppression frequency associated with an auditory disorder
35 of a user of the mobile electronic device, such as re-

ferred to in previous embodiments. Alternatively or additionally, the "app" supports a determination of one or more further quantities such as tinnitus loudness, tinnitus deletion time and hearing threshold. In step S3, a
5 frequency characteristic of an audio signal, e.g. representing a track of music, is adapted subject to the identified tinnitus suppression frequency and to the further determined quantities. In step S4, the electronic device waits for a user input to start playing the adapted audio
10 signal. If such input is received (Y), the adapted audio signal is played. If it is not received (N), the process may wait for any such input in the future.

Fig. 41a represents a flow chart of an embodiment representing step S2 of Fig. 40 in more detail. In
15 step S21 a first sound sample is selected to be played to the user. In step S22, the selected sound sample is played to the user, and in step S23 it is verified, if a user interface confirms (Y) the sound sample, or denies (N) the sound sample. In case the sound sample is denied
20 (N) in step S23, a different sound sample is selected in step S21 and the process continues. The selection of sound samples may follow a defined sequence of sound samples, or may take user input into account, or even may include modification of existing sound samples according
25 to the user input. In case the sound sample is confirmed (Y) in step S23, the frequency and/or loudness of the confirmed sound sample is handed over in step S24 to a process generating desired frequency characteristic, which may be represented by step S3 in Fig. 40.

30 In an alternate process according to Fig. 41b representing step S2 of Fig. 33 in more detail, a basic sound sample is determined to be played to the user in step S25. In step S26, the basic sound sample is played to the user, and in step S27 it is verified, if a user
35 interface confirms (Y) the sound sample, or denies (N) the sound sample. In case the sound sample is denied (N) in step S27, a setting to be applied to the basic sound

sample is selected in step S29 and is applied to the basic sound sample in step S25 for generating a sound sample different from the basic sound sample. In case the sound sample is confirmed (Y) in step S27, the frequency
5 and/or loudness of the confirmed sound sample is handed over to a process generating a desired frequency characteristic, which may be represented by step S3 in Fig. 40.

In Fig. 41c, the step S3 of Fig. 40 is explained in more detail. In this embodiment, the tinnitus
10 suppression frequency and optionally one or more further quantities, such as tinnitus loudness, tinnitus deletion time and hearing threshold, is received in step S31. In step S32, a frequency characteristic is determined based on the received tinnitus suppression frequency and fur-
15 ther quantities. In step S33, an audio signal is selected automatically, or in response to a user input. The audio signal may e.g. be a track of music stored in a memory of the electronic device, or a sound in the environment recorded by a microphone of the device. In step S34, the
20 frequency characteristic is applied to the selected audio signal, and the audio signal adapted in this way is stored in the electronic device, if desired.

While there are shown and described presently
25 preferred embodiments of the invention, it is to be distinctly understood that the invention is not limited thereto but may be otherwise variously embodied and practiced within the scope of the following claims.

Claims

1. Device for providing an audio signal for
5 suppressing or decreasing a user's tinnitus, comprising
an identification unit for supporting a de-
termination of at least one parameter regarding the
user's tinnitus,

an adaptation unit configured to modify a re-
10 ceived audio signal based on the at least one parameter,
thereby obtaining the audio signal, or to generate the
audio signal based on the at least one parameter, wherein
a defined frequency spectrum of the audio signal is based
on a tinnitus suppression frequency, and

15 an audio output unit configured to play the
audio signal to the user.

2. Device according to claim 1,
wherein the adaptation unit is configured to
20 automatically convert the at least one determined parame-
ter into a parameter of the audio signal.

3. Device according to claim 1 or claim 2,
wherein the adaptation unit is configured to
25 modify the received audio signal according to the defined
frequency spectrum based on the at least one parameter,
or is configured to generate the audio signal according
to the defined frequency spectrum based on the at least
one parameter.

30

4. Device according to any of the preceding
claims,

wherein the tinnitus suppression frequency is
the tinnitus frequency.

35

5. Device according to any of the preceding
claims,

wherein the audio signal has the defined frequency spectrum comprising a peak of intensity with a peak frequency being one or more of:

- at the tinnitus suppression frequency,
- 5 - within a frequency range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency,
- at a frequency one or more octaves below and/or above the tinnitus suppression frequency, and
- 10 - within a frequency range between one fourth of an octave below and one fourth of an octave above the frequency one or more octaves below and/or above the tinnitus suppression frequency.

15 6. Device according to any of the preceding claims,

wherein the at least one parameter comprises the tinnitus suppression frequency,

20 in particular wherein the identification unit is configured to play sounds of different frequencies to the user, to prompt an input of the user in response to the sounds of different frequencies, and to determine the tinnitus suppression frequency by evaluating the input.

25 7. Device according to any of the preceding claims,

wherein the adaptation unit comprises a filter configured to amplify frequencies within the defined frequency spectrum, and/or to attenuate frequencies outside the defined frequency spectrum,

30 in particular wherein an adaptation or attenuation of frequencies by the adaptation unit is at least 25 %, in particular more than 50 %,

35 in particular wherein the received audio signal comprises one or more of music, speech, environmental sounds, white noise, pink noise, brown noise, and a tinnitus habituation sound.

8. Device according to any of the preceding claims,

wherein the defined frequency spectrum comprises a narrow-bandwidth characteristic within half of an octave, in particular within one fourth of an octave, around the tinnitus suppression frequency and/or around the frequency one octave below the tinnitus suppression frequency.

10

9. Device according to any of the preceding claims,

wherein the at least one parameter comprises a perceived loudness of the tinnitus,

15

in particular wherein the identification unit is configured to play sounds of different loudness to the user, to prompt an input of the user in response to the sounds, and to determine the perceived loudness of the tinnitus by evaluating the input,

20

in particular wherein the audio signal has a loudness below or above the perceived loudness of the tinnitus.

10. Device according to any of the preceding claims,

25

wherein the at least one parameter comprises a minimum required loudness for the audio signal for suppressing or decreasing the user's tinnitus,

wherein the identification unit is configured to support a determination of the minimum required loudness,

30

in particular wherein the identification unit is configured to play sounds of different loudness to the user, to prompt an input of the user dependent on the tinnitus being suppressed or not, and to determine the minimum required loudness by evaluating the input,

35

in particular wherein the audio signal has a loudness equal to the minimum required loudness within a tolerance of 10% of a value of the loudness in dB.

5 11. Device according to claim 10,
 wherein the identification unit is configured to support a regular re-determination of the minimum required loudness, in particular every week or month,
 in particular wherein the adaptation unit is
10 configured to adapt the audio signal to the re-determined minimum required loudness.

 12. Device according to one of claims 10 or
11,
15 wherein the adaptation unit is configured to gradually lower the loudness of the audio signal over time starting from the minimum required loudness,
 in particular wherein the identification unit is configured to accept a user input regarding a re-ap-
20 pearance of the tinnitus, and
 in particular wherein the adaptation unit is configured to increase or decrease the loudness of the audio signal by a defined amount, which in particular is in a range between 1 and 5 dB, in response to the user
25 input.

 13. Device according to any of the preceding claims,
 wherein the audio signal has a loudness equal
30 to or below a hearing threshold of the user,
 in particular wherein the at least one parameter comprises the hearing threshold, and
 in particular wherein the identification unit is configured to play sounds of different loudness to the
35 user, to prompt an input of the user in response to the sounds, and to determine the hearing threshold by evaluating the input.

14. Device according to any of the preceding claims,

wherein the audio signal is alternating or
5 intermittent in time,

in particular wherein the audio signal alternates in loudness between a first loudness and a second loudness, and

in particular wherein the first loudness is
10 above the hearing threshold of the user, and

in particular wherein the second loudness is equal to or below the hearing threshold of the user.

15 15. Device according to any of the preceding claims,

wherein the at least one parameter comprises an interval of tinnitus suppression,

in particular wherein the identification unit is configured to play a sound with the defined frequency spectrum to the user, to prompt an input of the user in
20 response to the sound, and to determine the interval of tinnitus suppression by evaluating the input,

in particular wherein the interval of alternation or intermittency is synchronized with or shorter
25 than the interval of tinnitus suppression.

16. Device according to any of the preceding claims,

the device being a hearing aid,
30 in particular wherein the hearing aid is configured to play the audio signal in addition to its regular function of rectifying hearing loss.

17. Device according to any of the preceding
35 claims,

the device being a hearing aid, in particular comprising a microphone,

wherein the received audio signal corresponds to an amplification of sounds in surroundings of the user, in particular recorded by the microphone.

5 18. Device according to claim 17,
 wherein the adaptation unit is configured to enrich the audio signal with acoustic energy in the defined frequency spectrum if an acoustic energy in the defined frequency spectrum in the received audio signal is
10 below a threshold, in particular below the hearing threshold of the user.

 19. Device according to any of the preceding claims,
15 wherein the defined frequency spectrum corresponds to a frequency spectrum of tinnitus, in particular of the user's tinnitus.

 20. Device according to any of the preceding
20 claims,
 wherein the audio signal is a sinus signal, or is derived from a sinus signal.

 21. Device according to any of the preceding
25 claims,
 wherein the defined frequency spectrum has zero intensity for frequencies other than the peak frequency.

30 22. Device according to any of the preceding claims,
 wherein the audio signal is continuous in time.

35 23. Device according to claim 14,

wherein the alternating or intermitting audio signal comprises a steep slope between the first loudness and the second loudness,

in particular wherein a duration of the slope
5 is below 0.5 s or is below 0.1 s,

in particular the slope has the form of a step function.

24. Device according to any of claims 14 or
10 23,

wherein the alternating or intermitting audio signal comprises a shallow slope between the first loudness and the second loudness,

in particular wherein a duration of the slope
15 is above 0.5 s or is below 1 s.

25. Device according to any of claims 14 or
23 to 24,

wherein an interval of alternation or inter-
20 mittency of the audio signal has a random duration.

26. Device according to any of claims 14 or
23 to 24,

wherein an interval of alternation or inter-
25 mittency of the audio signal is equal to or shorter than an interval of tinnitus suppression,

in particular wherein the interval of alternation or intermittency is in the range 5 s to 1 h, in particular 10 s, 20 s, 30 s or 60 s.

30

27. Device according to any of the preceding claims, further comprising

a microphone configured to record the received audio signal,

35 wherein the received audio signal is provided to the adaptation unit.

28. Device according to any of the preceding claims,

wherein the adaptation unit is configured to receive the audio signal from a database,

5 in particular wherein the database is stored in a memory of the device.

29. Device according to any of the preceding claims,

10 the audio output unit further being configured to play the audio signal to an ipsilateral ear in relation to the tinnitus,

in particular exclusively to the ipsilateral ear.

15

30. Device according to any of the preceding claims,

the audio output unit further being configured to play the audio signal to a contralateral ear in relation to the tinnitus,

20

in particular exclusively to the contralateral ear.

31. Device according to any of the preceding claims,

25

the audio output unit further being configured to play a second audio signal with a second frequency spectrum to the user simultaneously with the sound,

30

wherein the second frequency spectrum comprises a broader frequency range than the defined frequency spectrum.

32. Device according to claim 31,

35

wherein the second audio signal comprises one or more of music, speech, environmental sounds, white

noise, pink noise, brown noise, and a tinnitus habituation sound.

33. Device according to any of claims 31 or
5 32,
wherein a loudness of the second audio signal
is below the loudness of the audio signal.

34. Device according to any of claims 31 to
10 33,
wherein a loudness of the second audio signal
is below the first loudness,
in particular wherein the loudness of the
second audio signal is above the second loudness.

15 35. Device according to any of the preceding
claims,
wherein the audio output unit comprises a
speaker or headphone configured to generate acoustic
20 waves corresponding to the audio signal.

36. Device according to any of the preceding
claims,
which device is an MP3 or other digital audio
25 files player.

37. Device according to any of the preceding
claims,
which device is a mobile phone.
30

38. Device according to any of the preceding
claims,
which device is an earphone.

39. Device according to claim 16,
35

wherein the adaptation unit is configured to generate or modify the audio signal according to the defined frequency spectrum on top of a regular processing of the received audio signal for rectifying hearing loss.

5

40. Device according to any of the preceding claims,

wherein the audio output unit comprises an implant configured to generate acoustic waves corresponding to the audio signal directly in the user's hearing.

10

41. Device according to any of the preceding claims,

wherein the audio output unit comprises a neuronal stimulator configured to generate a sensation of the audio signal in the user's brain.

15

42. Device according to any of the preceding claims,

20

wherein the identification unit is configured to support a re-determination of the at least one parameter regarding the user's tinnitus, and

wherein the adaptation unit is configured to adapt the audio signal to the re-determined at least one parameter.

25

43. Device according to claim 42,

wherein the identification unit is configured to initiate the re-determination after a regular time interval.

30

44. Device according to any of the preceding claims,

wherein the adaptation unit is configured to decrease the loudness of the audio signal over time continuously or stepwise,

35

in particular wherein the identification unit is configured to accept a user input when the user input starts to perceive again the tinnitus, and

in particular wherein the identification unit
5 is configured to re-determine the at least one parameter, in particular the loudness of the audio signal, dependent on the user input.

45. Device according to any of the preceding
10 claims,

wherein the adaptation unit is configured to limit an acoustic energy in the defined frequency spectrum, in particular to a non-hurtful level, in particular to 105 dB within a tolerance of +/-10 %,

15 in particular wherein the adaptation unit is further configured to limit a loudness of the audio signal, in particular to the non-hurtful level.

46. Device according to any of the preceding
20 claims,

wherein the adaptation unit is further configured to split an acoustic energy in a certain frequency range to different frequencies in the defined frequency spectrum, in particular to the frequency range
25 around the frequency one or more octaves below or above the tinnitus suppression frequency.

47. Device according to claim 46,
wherein the adaptation unit is configured to
30 perform the split of the acoustic energy dependent on a hearing threshold of the user,

in particular wherein the identification unit is configured to support a determination of the hearing threshold of the user.

35

48. Device according to any of claims 46 or
47,

wherein the adaptation unit is configured to perform the split of the acoustic energy dependent on limiting the acoustic energy in the certain frequency range, in particular to a non-hurtful level.

5

49. Device according to any of the preceding claims,

wherein the adaptation unit is configured to limit an output loudness to a level below a threshold, in particular a feedback threshold if the device is a hearing aid or an earphone comprising a microphone.

50. Method for generating an audio signal or modifying a received audio signal to obtain the audio signal on an electronic device, comprising the steps of

- supporting a determination of at least one parameter regarding a user's tinnitus,
- modifying the received audio signal based on the at least one parameter, thereby obtaining the audio signal, or generating the audio signal based on the at least one parameter, wherein a defined frequency spectrum of the audio signal is based on a tinnitus suppression frequency,
- playing the audio signal to the user.

25

51. Method according to claim 50,

wherein the audio signal has a defined frequency spectrum comprising a peak of intensity with a peak frequency being one or more of:

- at a tinnitus suppression frequency,
- within a frequency range between one fourth of an octave below and one fourth of an octave above the tinnitus suppression frequency,
- at a frequency one or more octaves below or above the tinnitus suppression frequency, and
- within a frequency range between one fourth of an octave below and one fourth of an octave above the

35

frequency one or more octaves below or above the tinnitus suppression frequency;

in particular wherein the tinnitus suppression frequency is the tinnitus frequency,

5 in particular wherein the received audio signal is modified according to the defined frequency spectrum based on at least one parameter, or generating the audio signal according to the defined frequency spectrum based on the at least one parameter,

10 in particular wherein the at least one parameter comprises one or more of the user's tinnitus suppression frequency, tinnitus loudness, minimum required loudness, interval of tinnitus suppression and hearing threshold,

15 in particular by using the device of any of the preceding claims 1 to 49.

52. Computer program comprising instructions which, when the program is executed by a processor of an electronic device, cause the electronic device to carry
20 out the steps of the method according to claim 50 or claim 51.

53. Computer-readable data carrier having
25 stored thereon the computer program of claim 52.

1/21

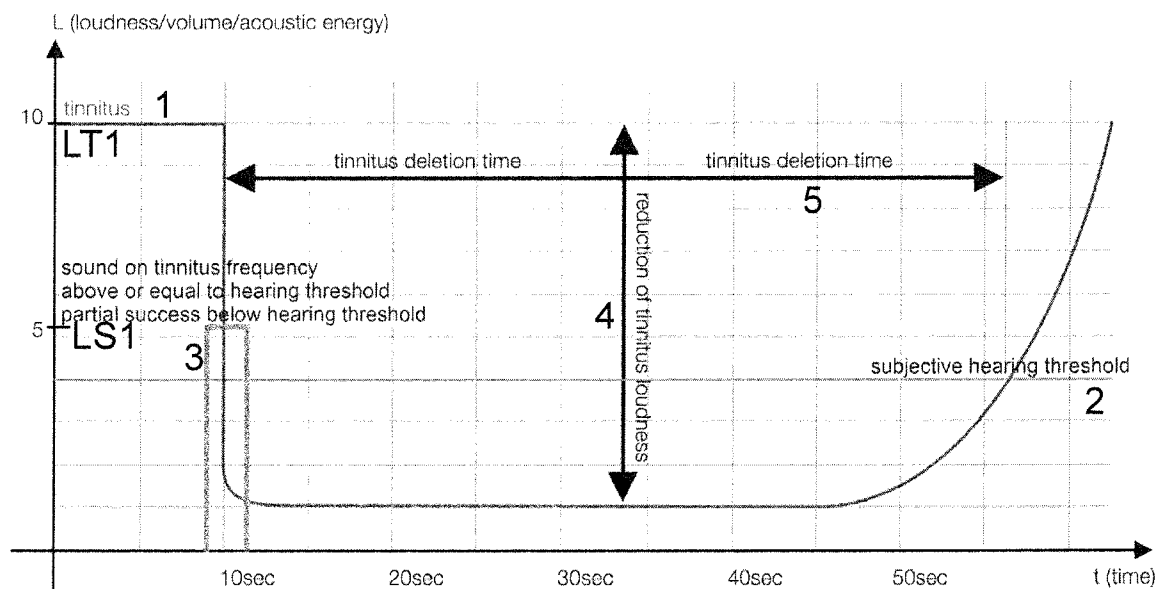


FIG 1

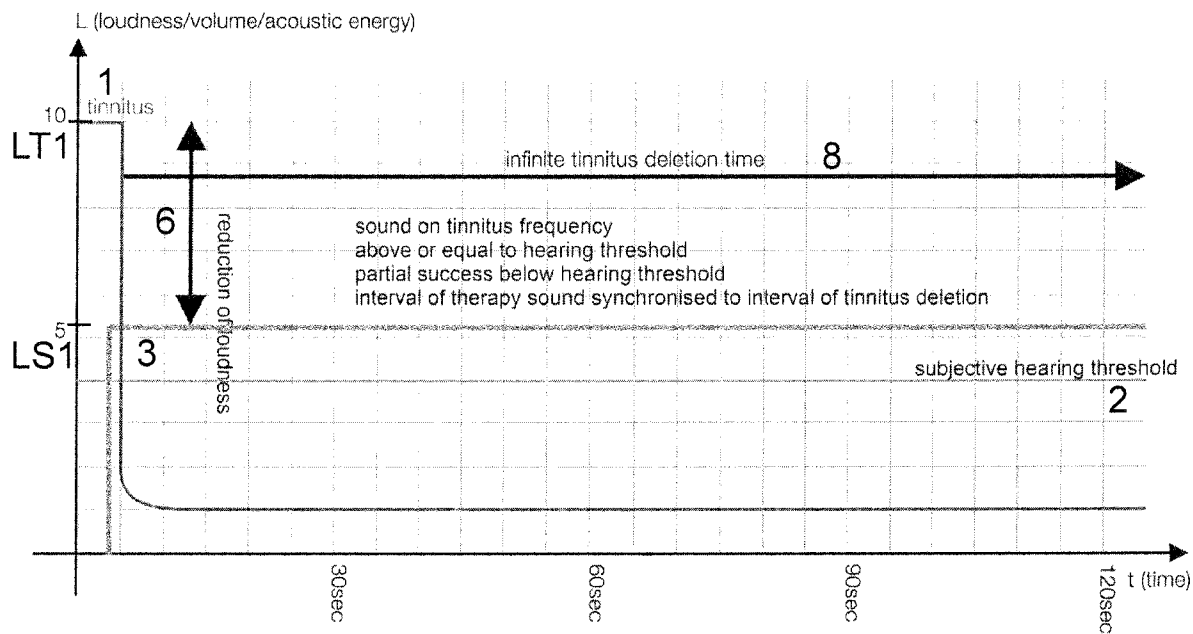


FIG 2

2/21

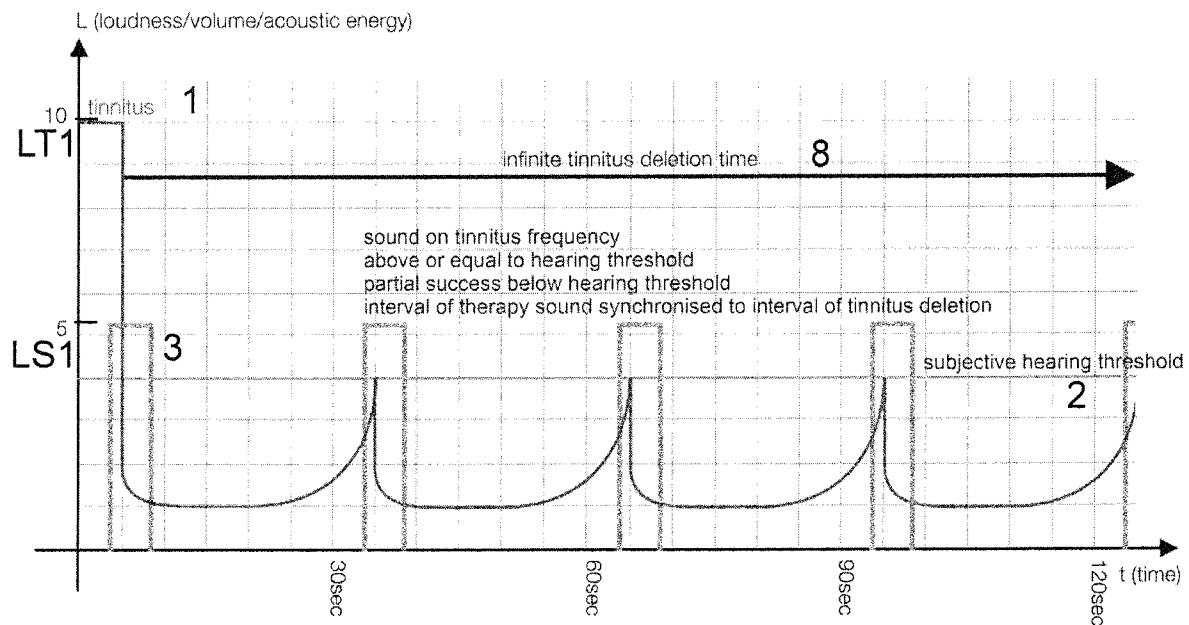


FIG 3

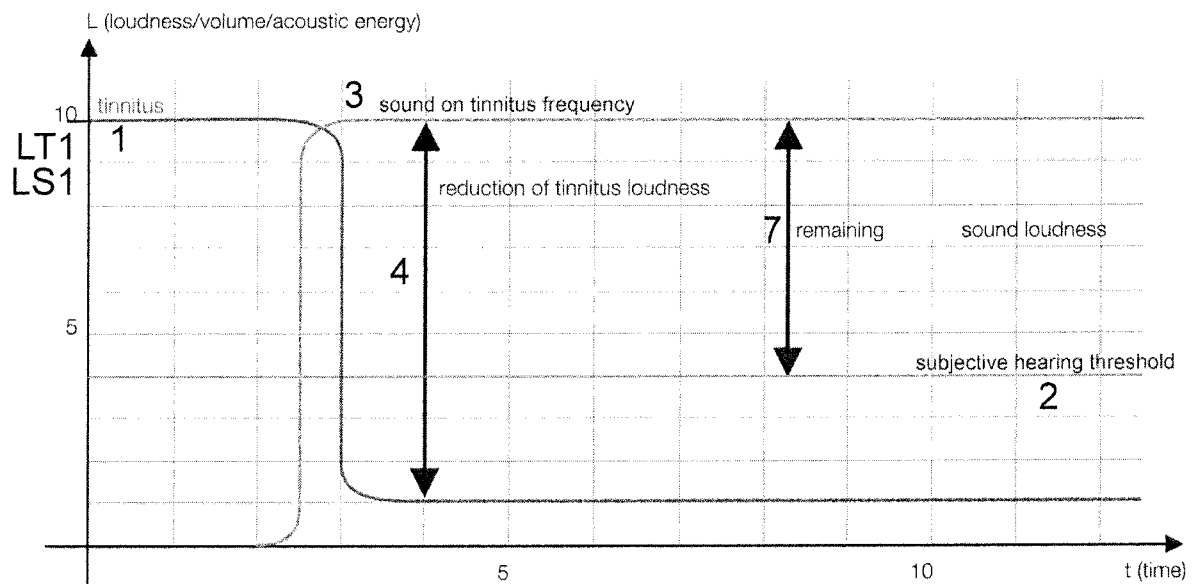


FIG 4

3/21

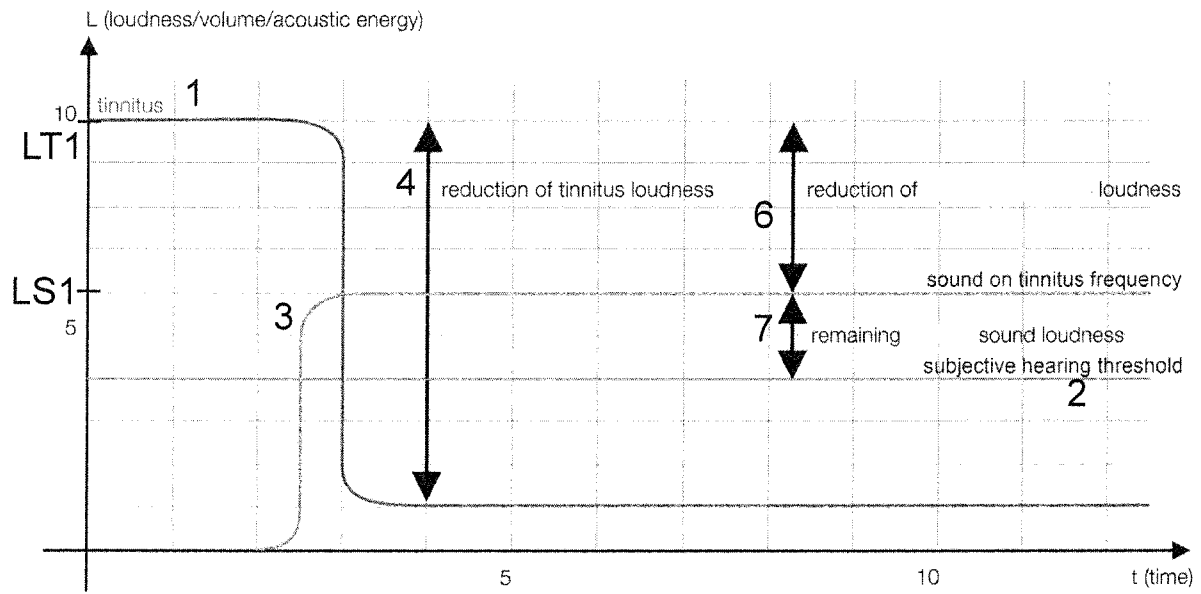


FIG 5

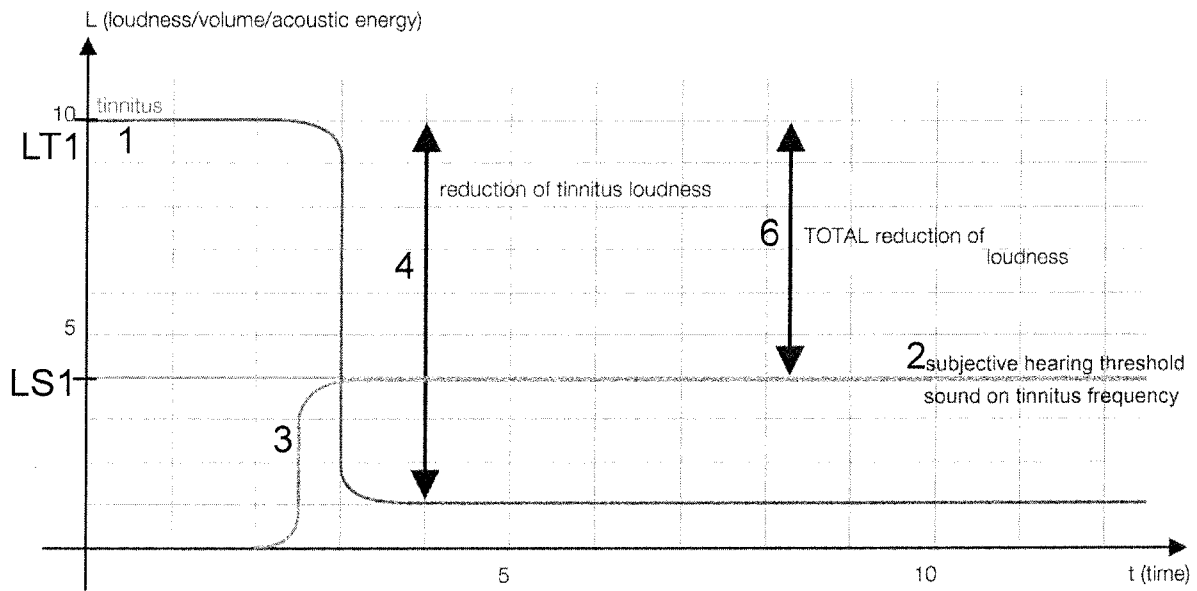


FIG 6

4/21

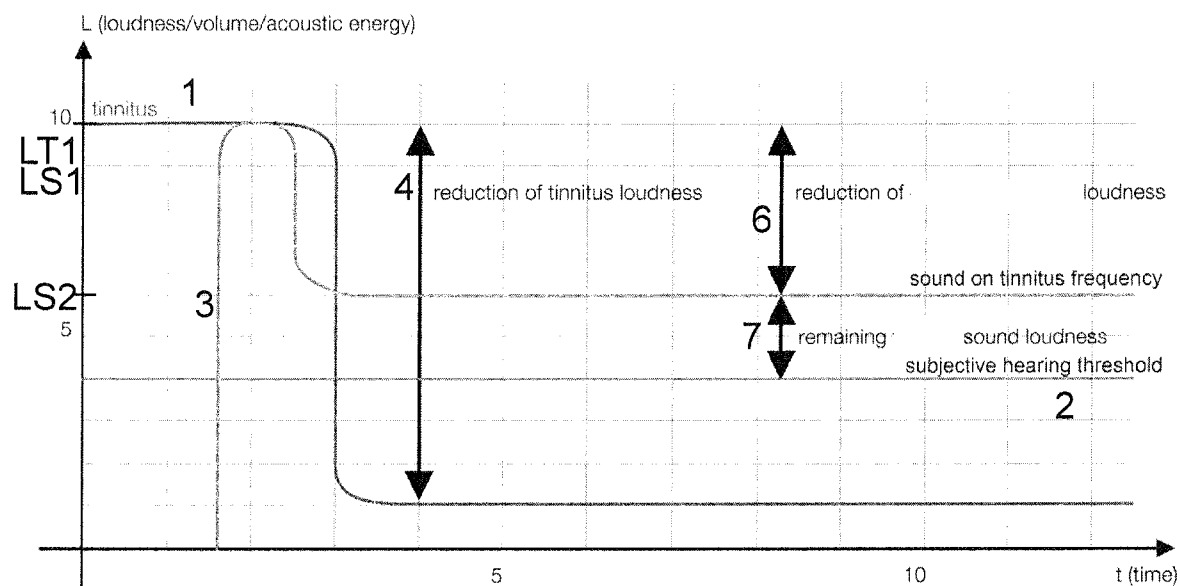


FIG 7

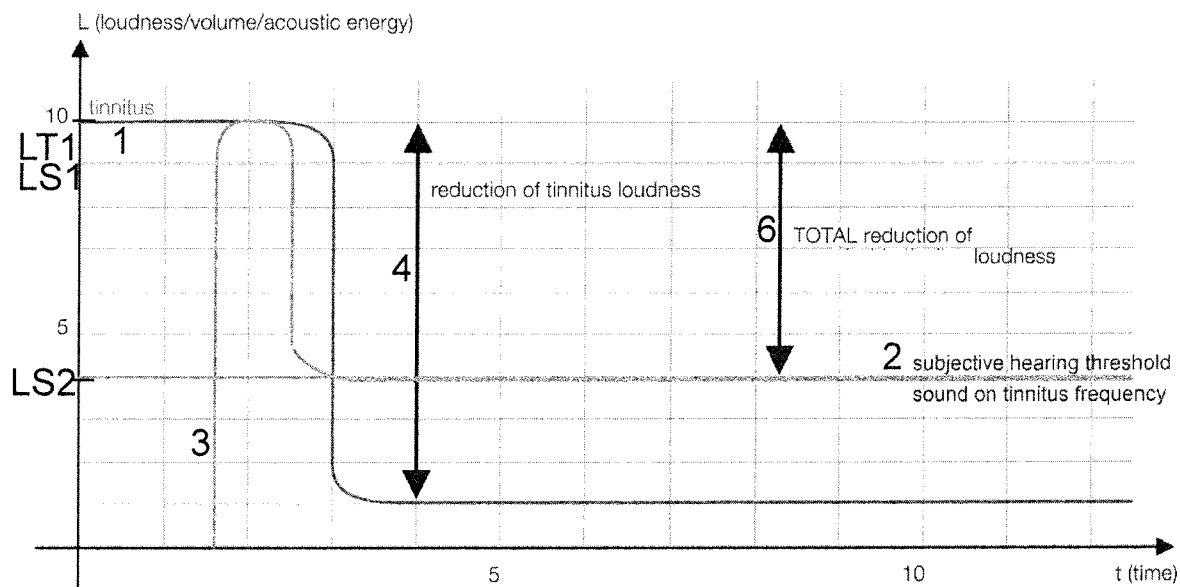


FIG 8

5/21

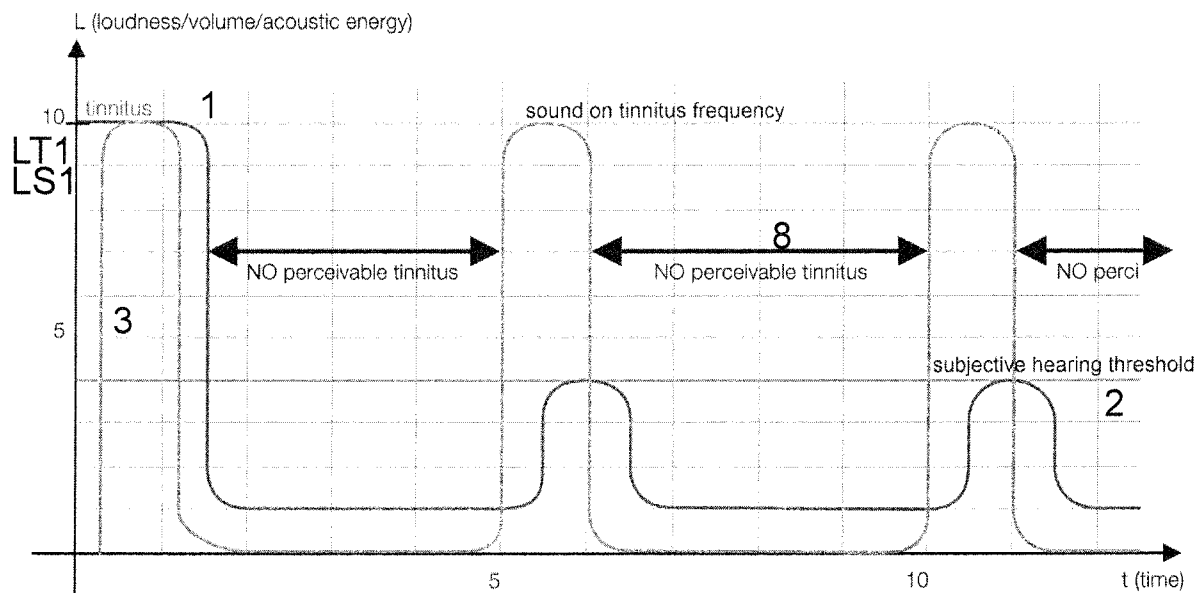


FIG 9

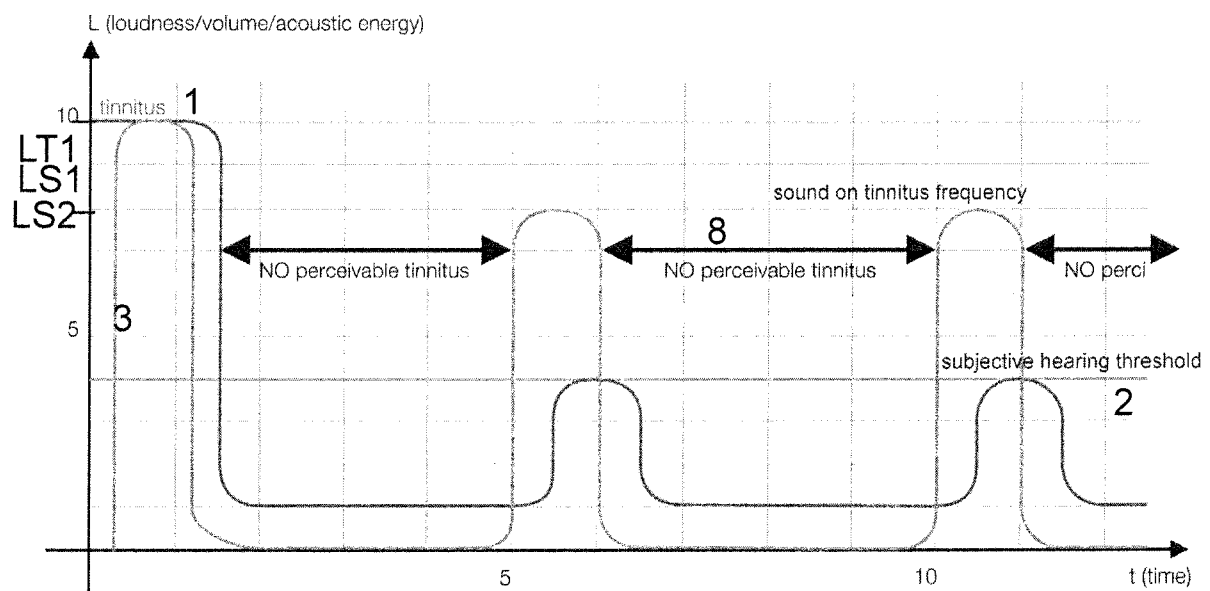


FIG 10

6/21

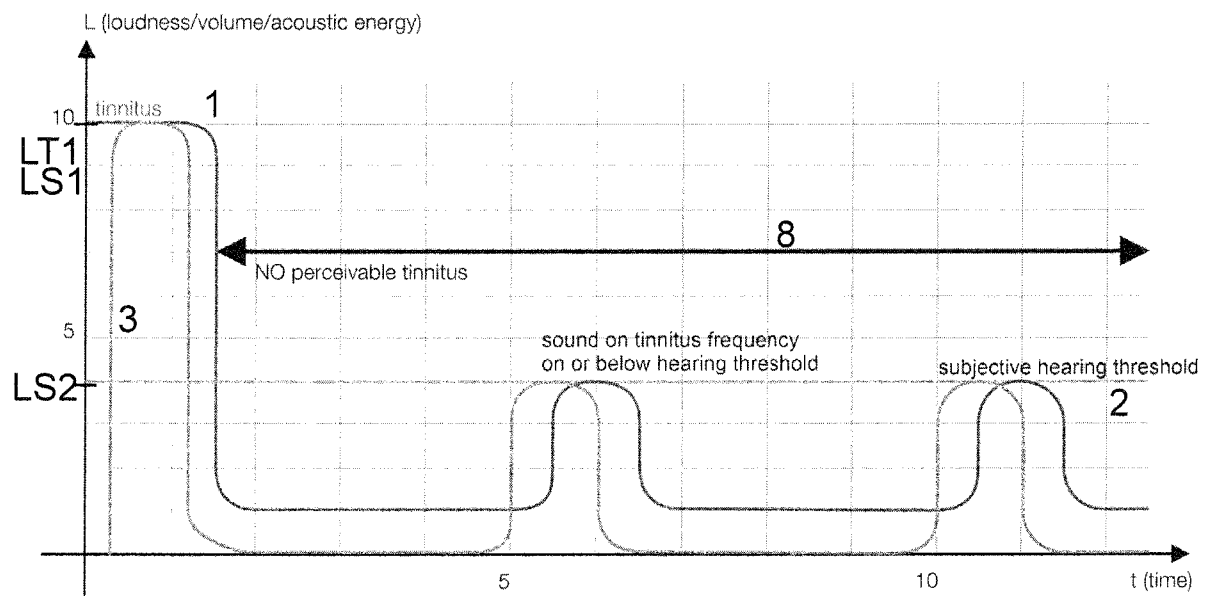


FIG 11

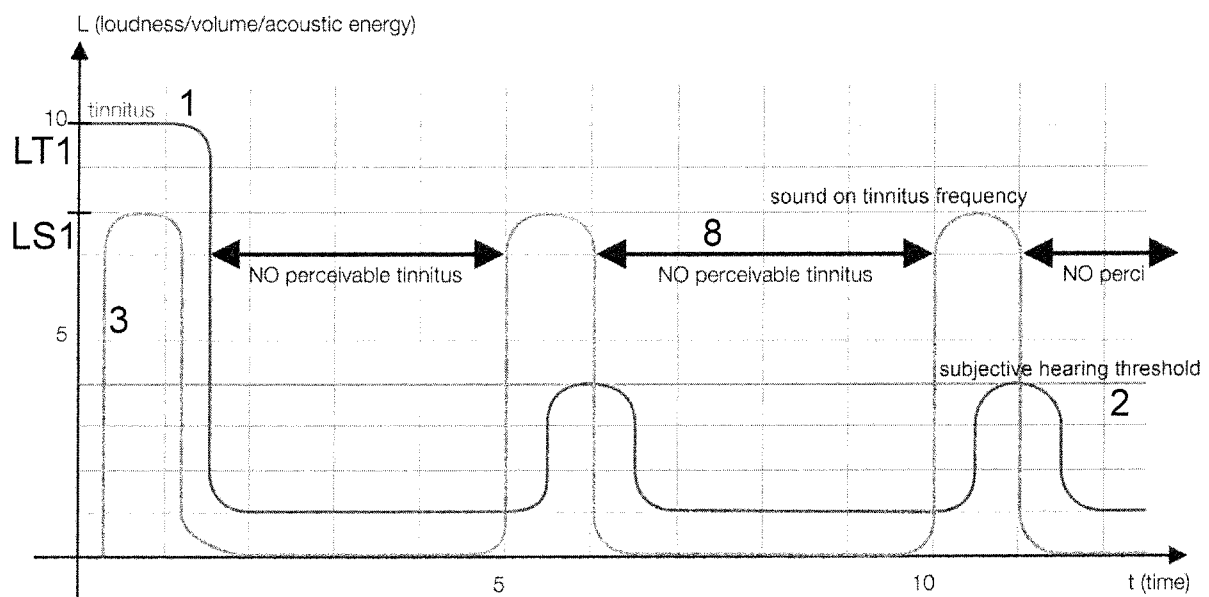


FIG 12

7/21

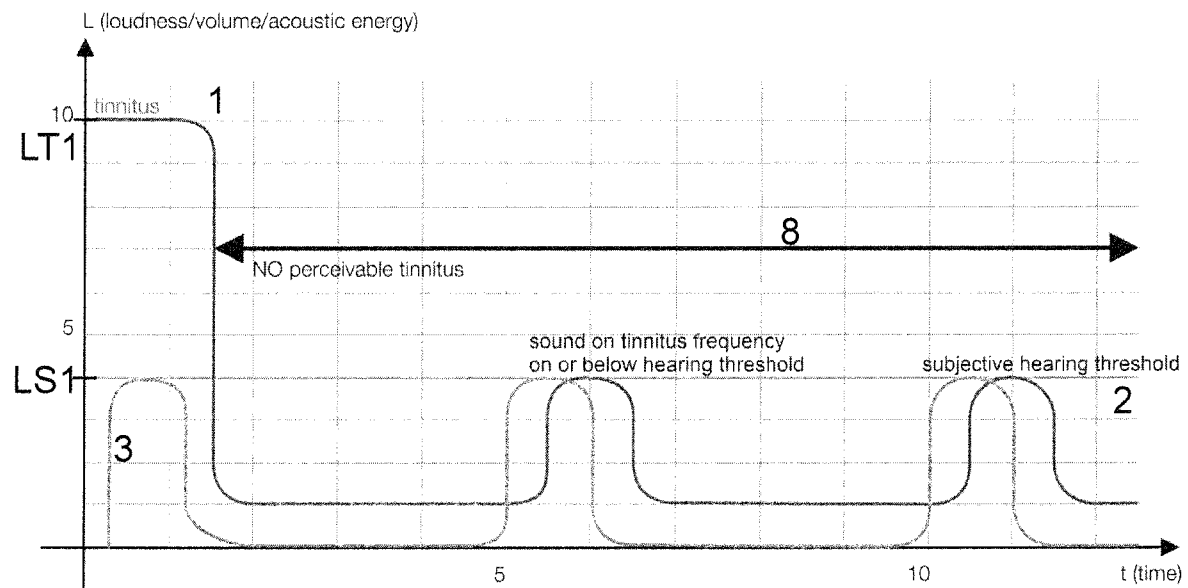


FIG 13

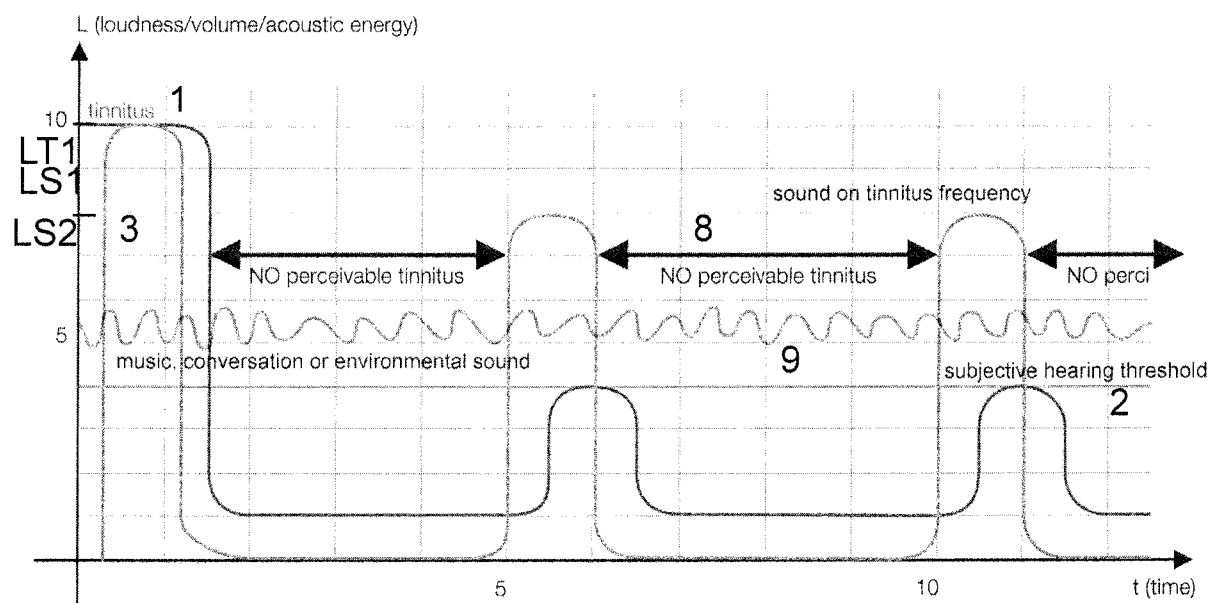


FIG 14

8/21

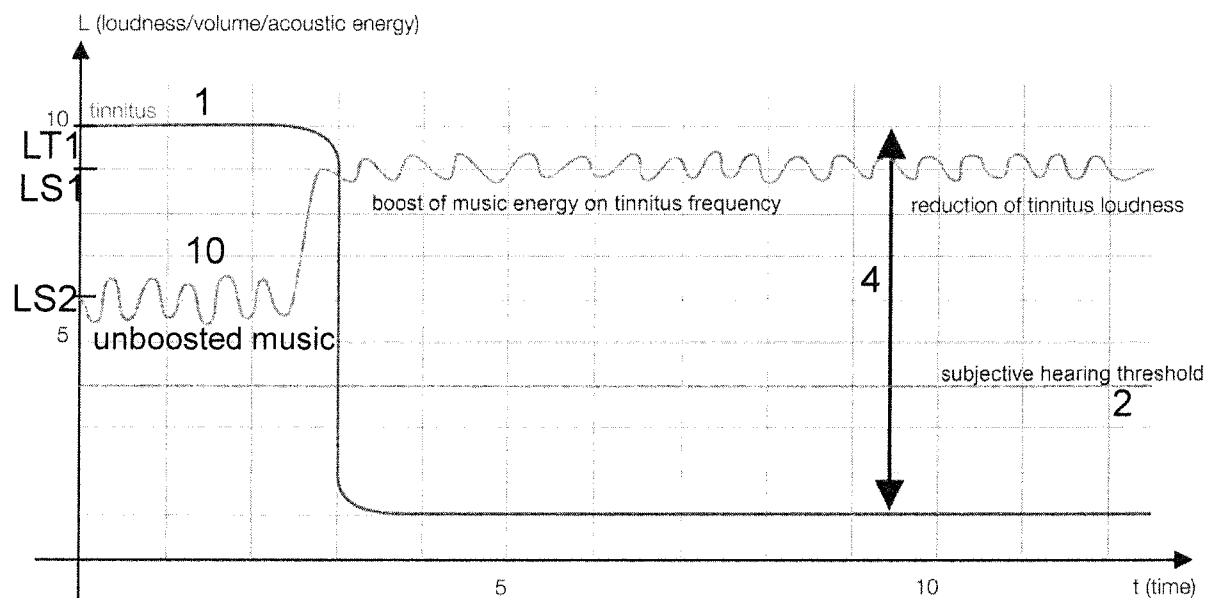


FIG 15

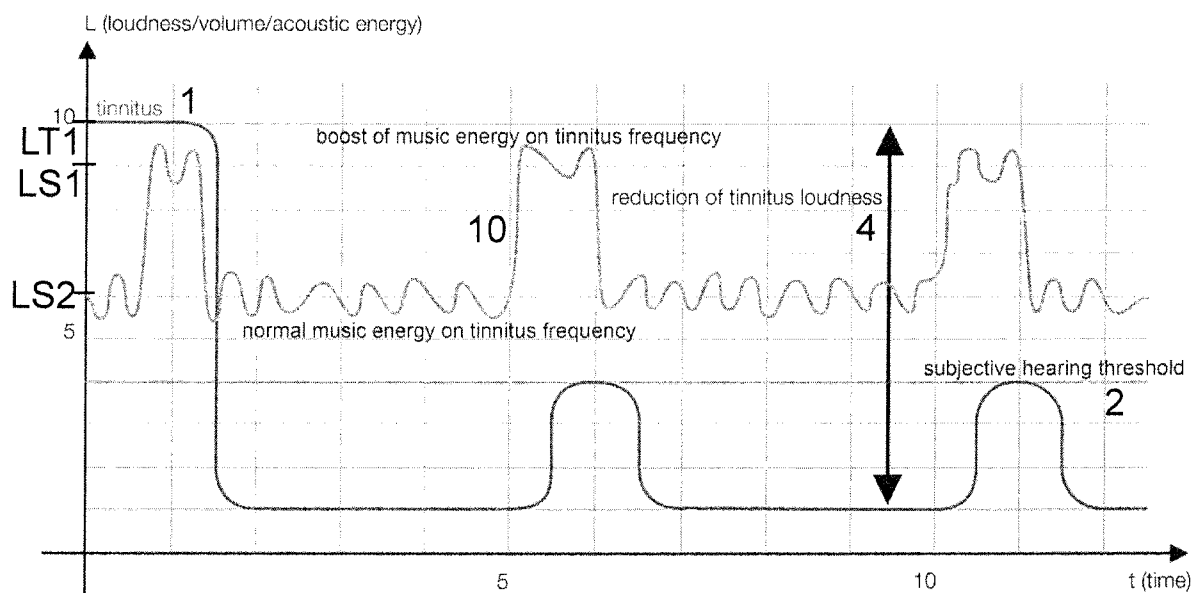


FIG 16

9/21

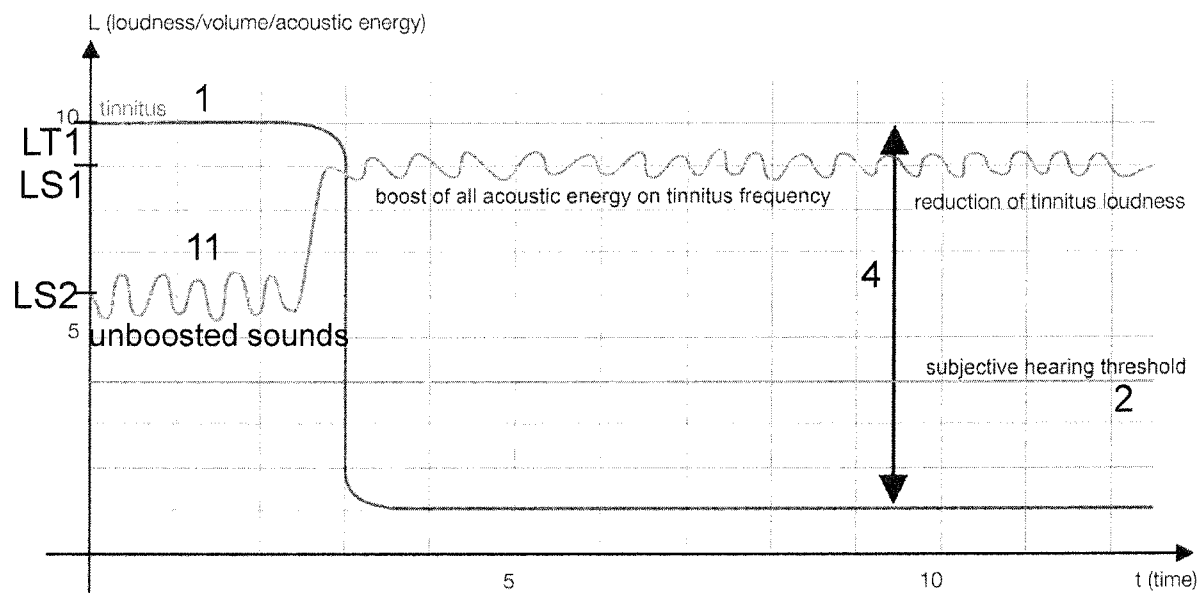


FIG 17

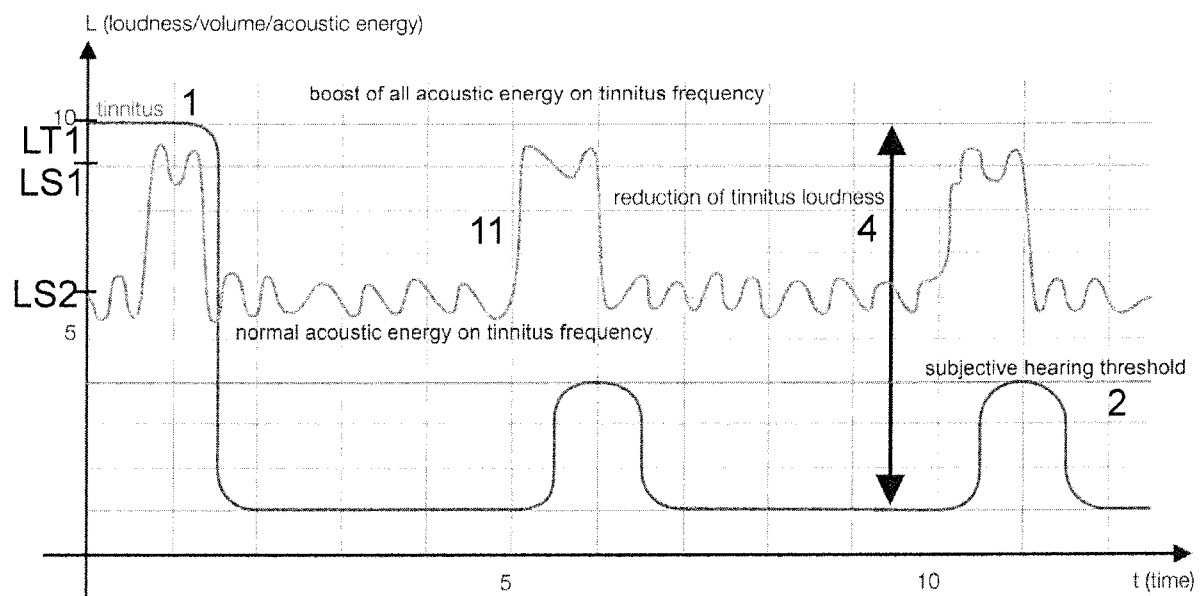


FIG 18

10/21

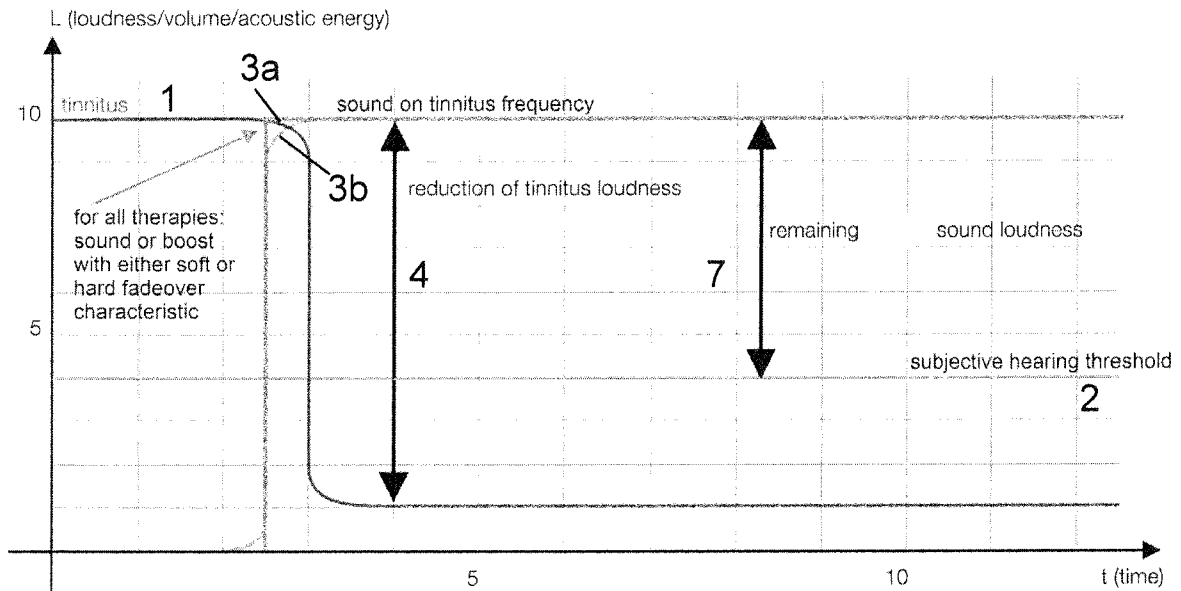


FIG 19

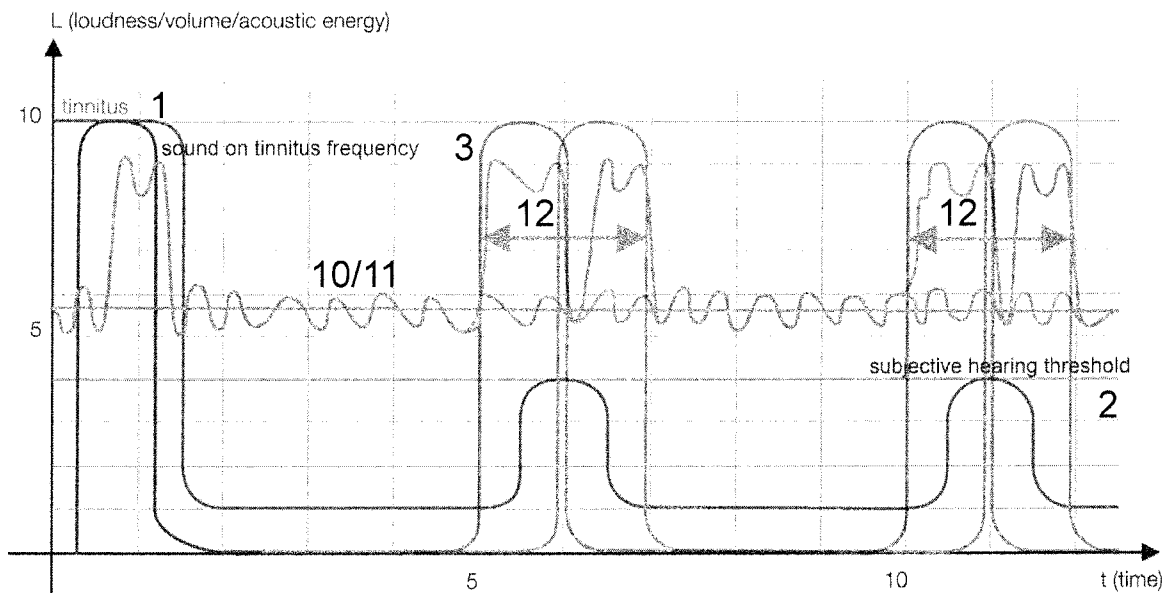


FIG 20

11/21

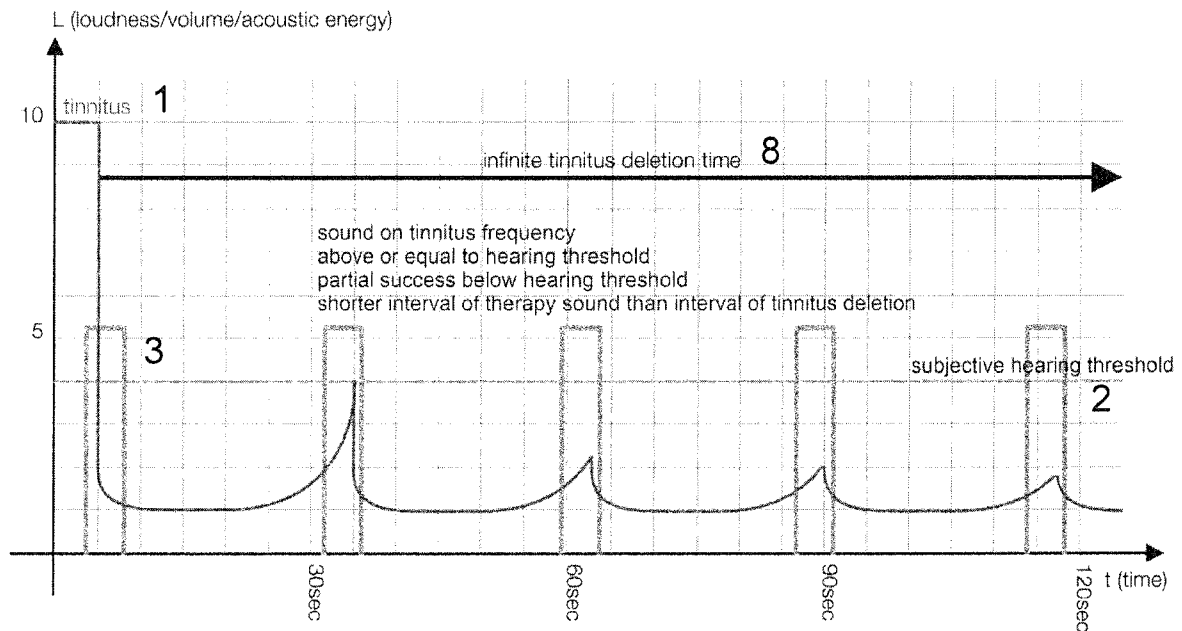


FIG 21

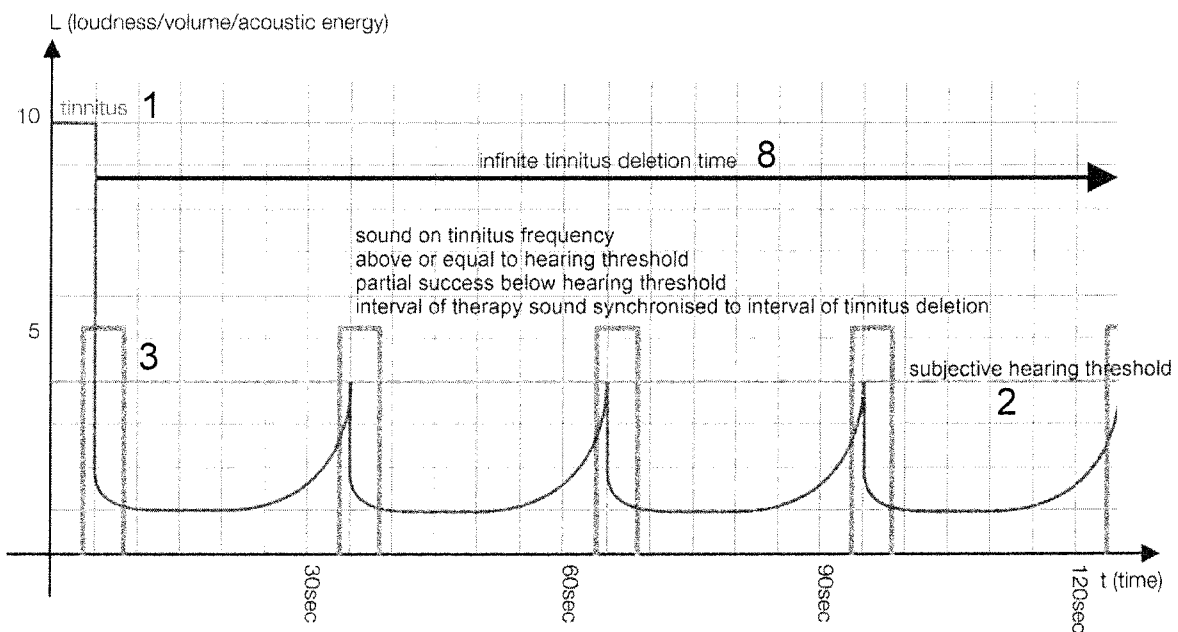


FIG 22

12/21

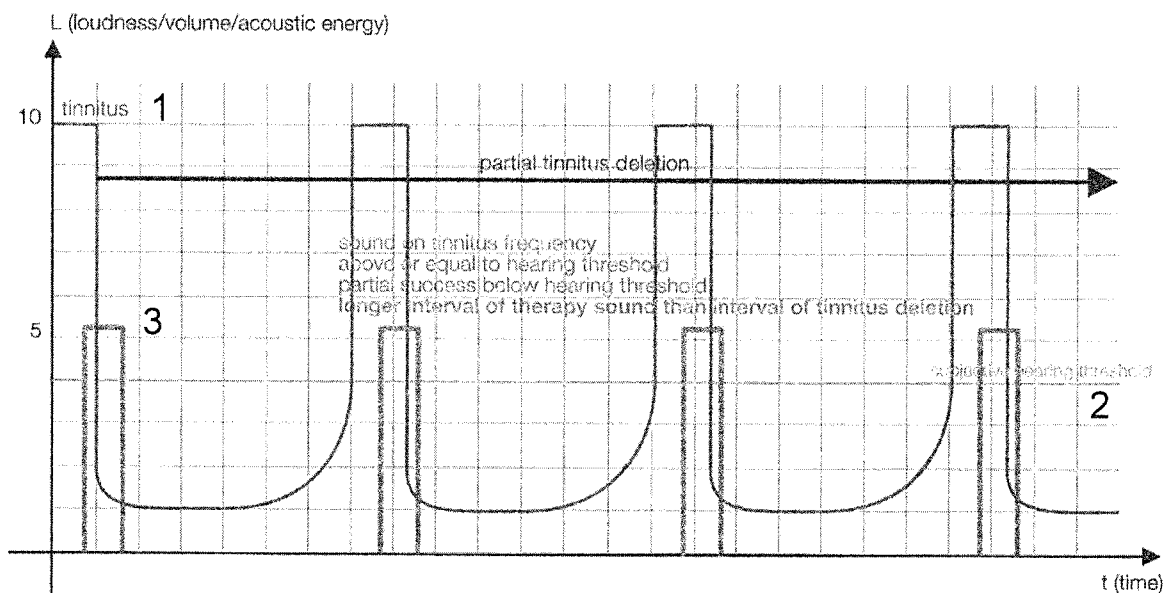


FIG 23

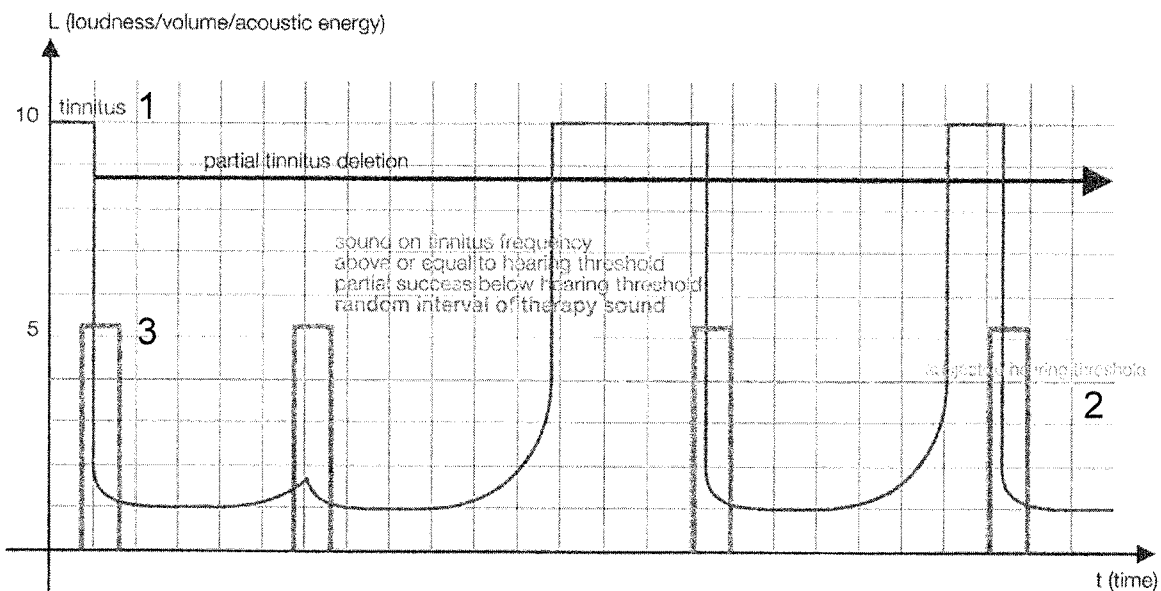


FIG 24

13/21

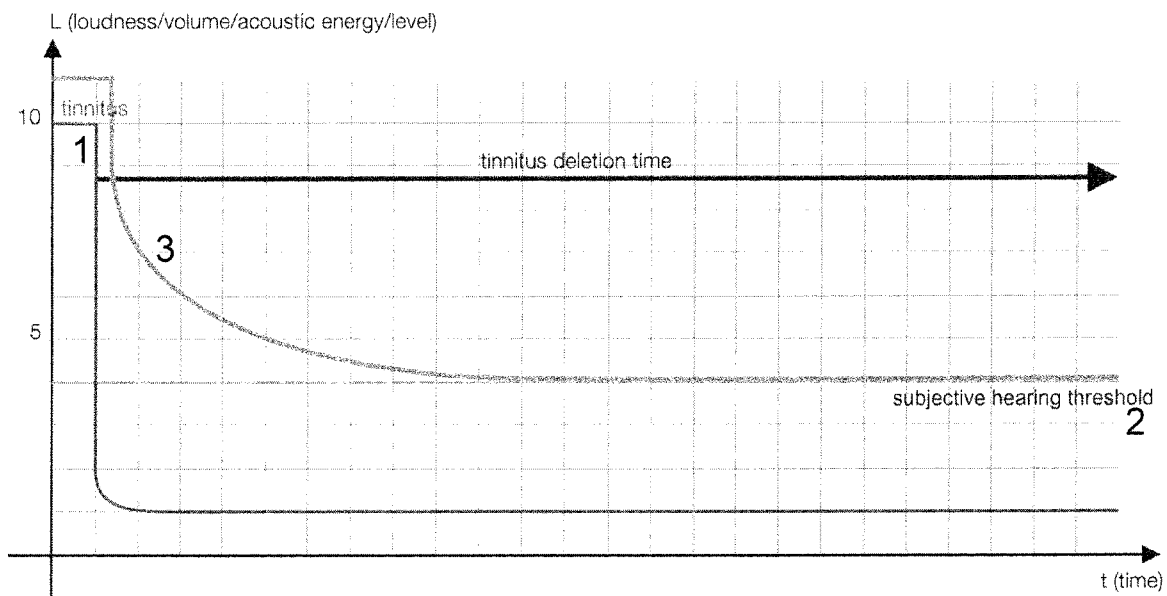


FIG 25

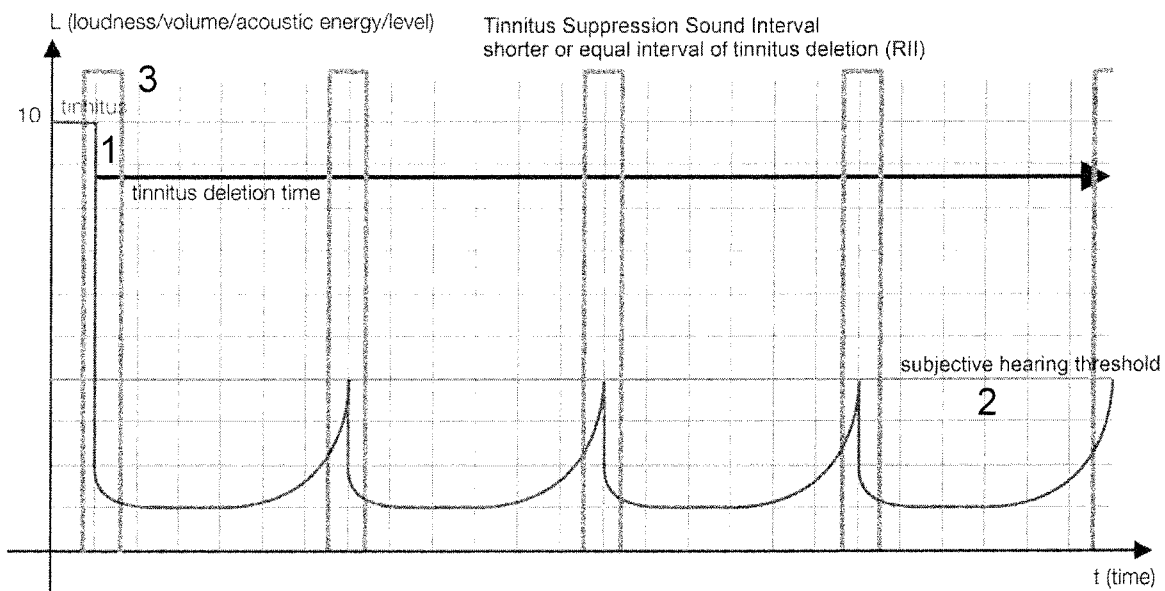


FIG 26

14/21

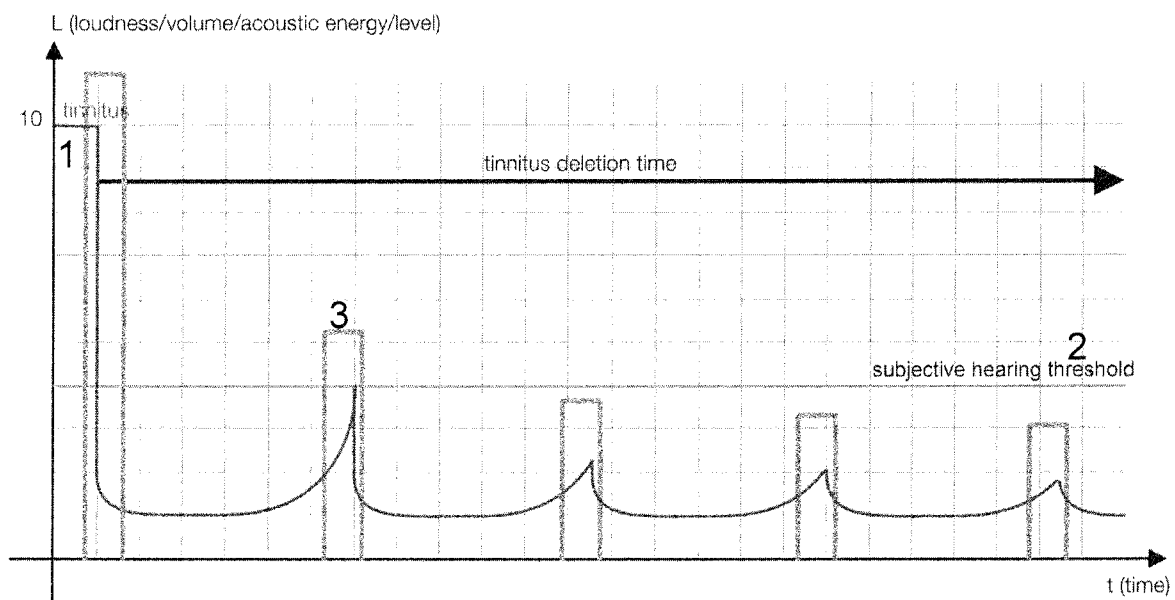


FIG 27

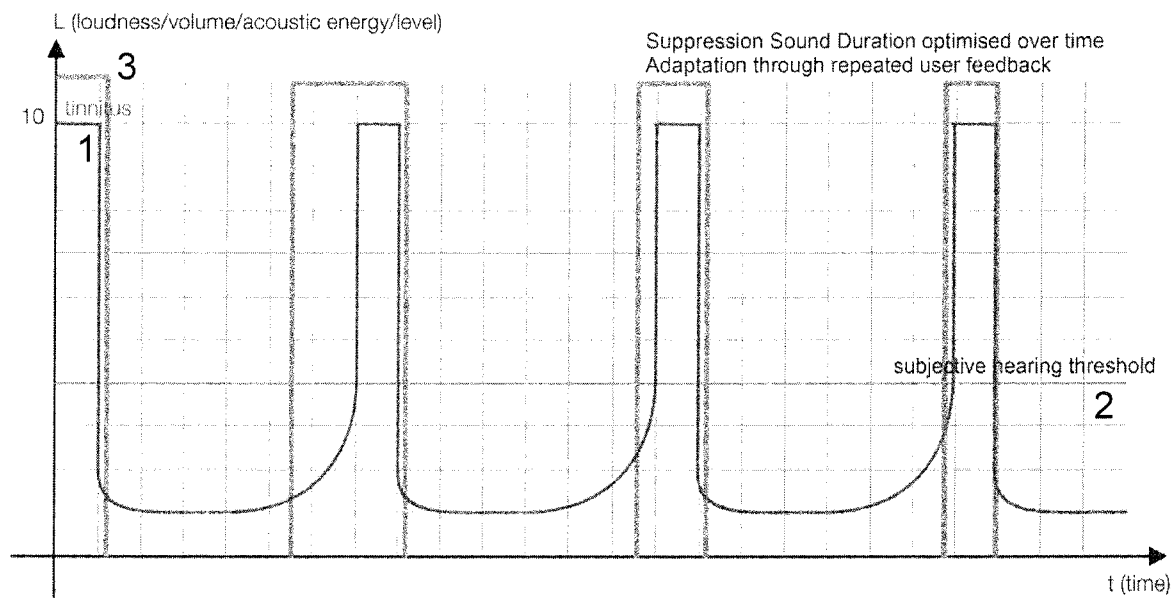


FIG 28

15/21

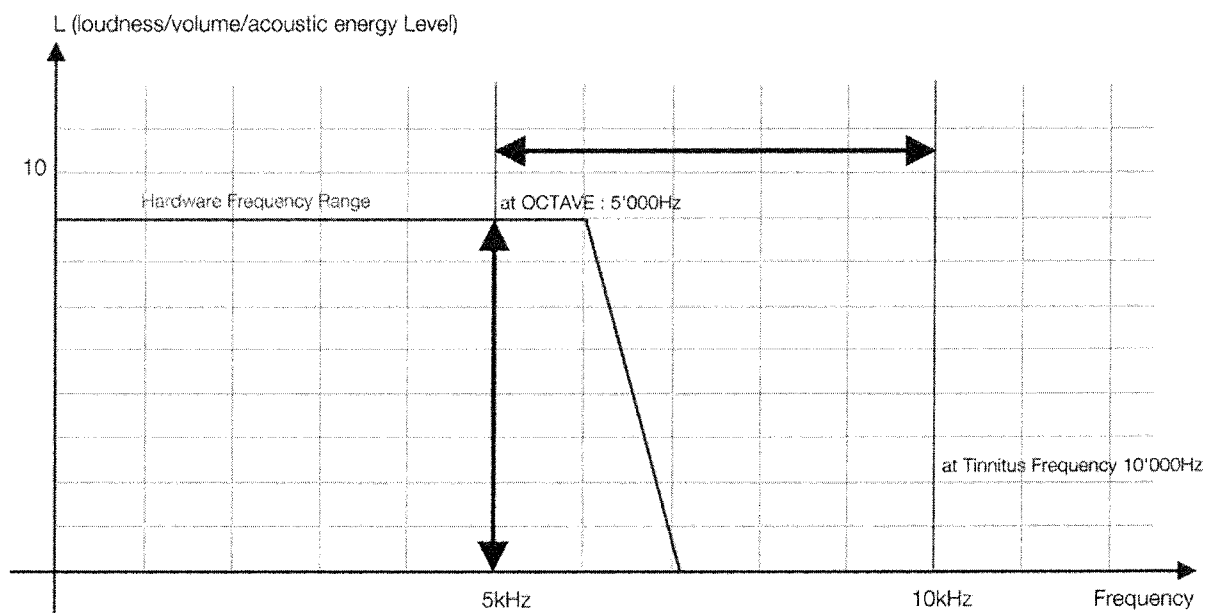


FIG 29

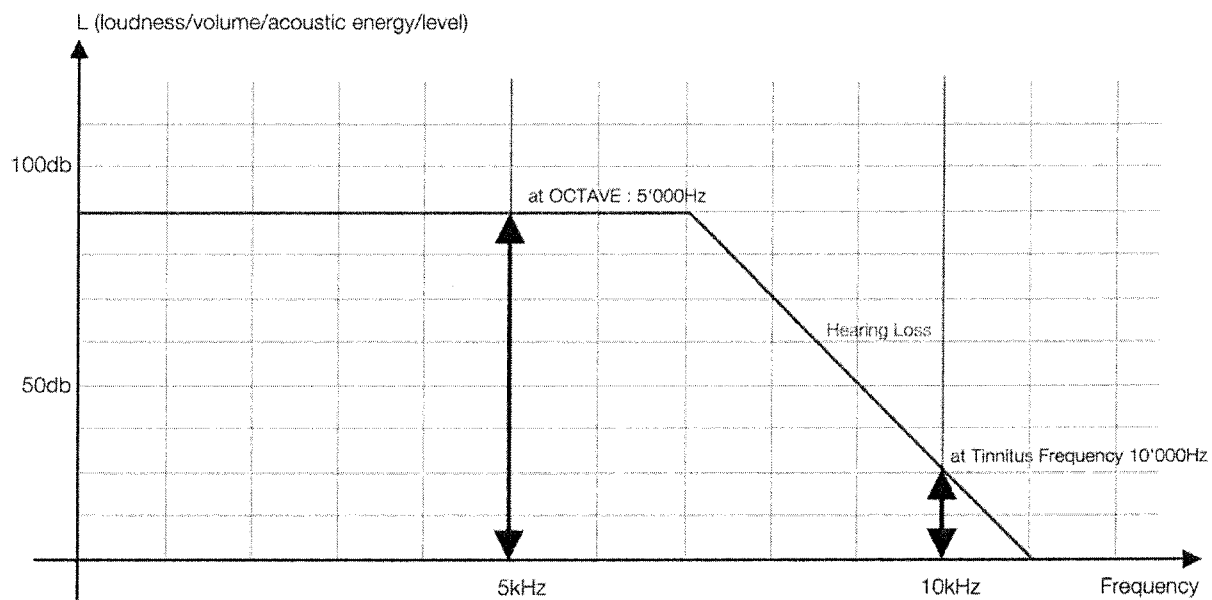


FIG 30

16/21

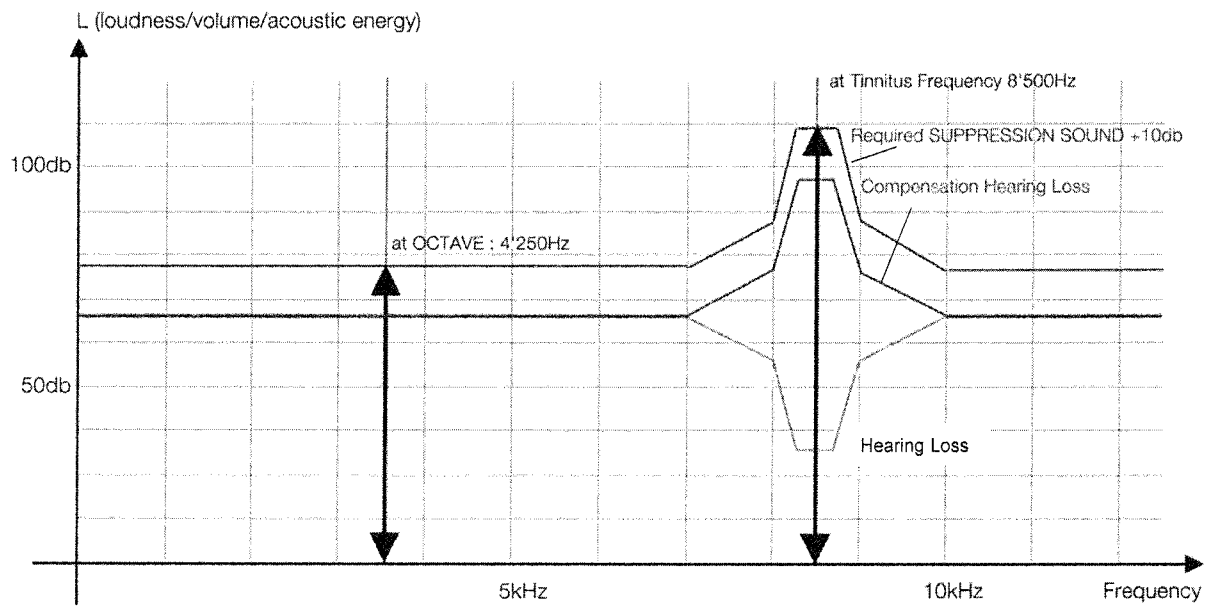


FIG 31



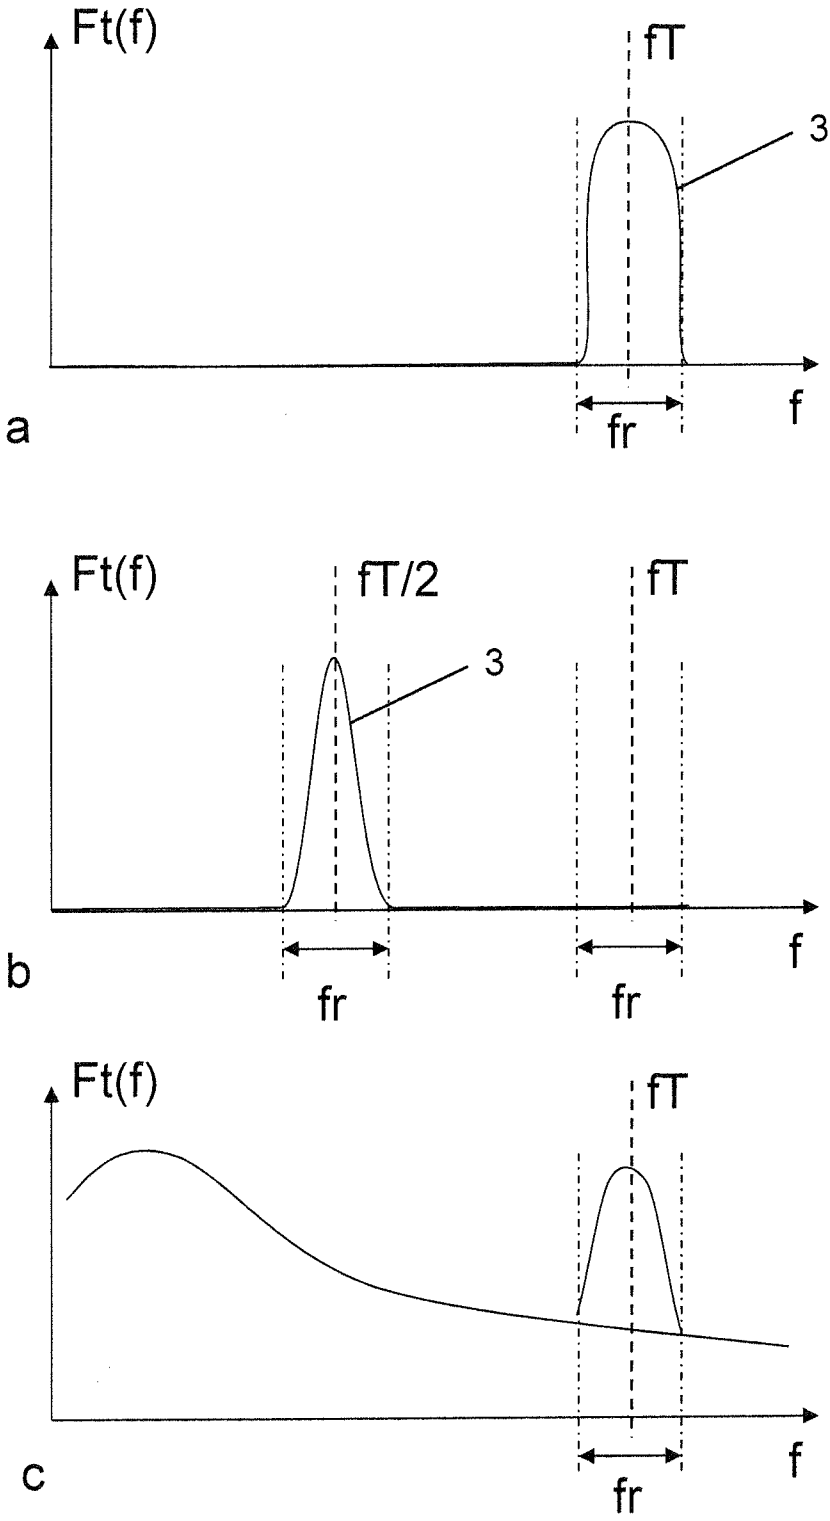


FIG 32

18/21

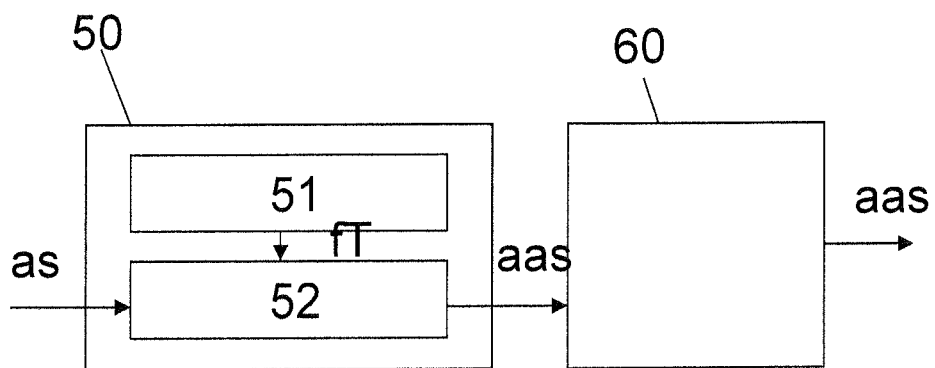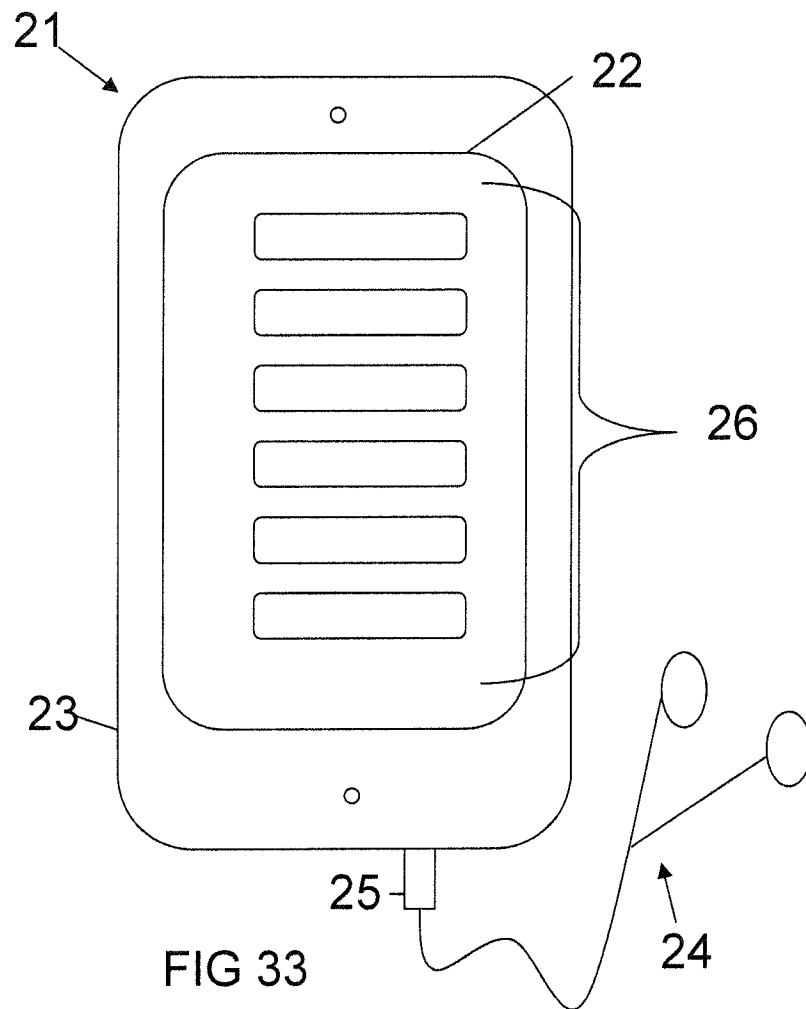

19/21

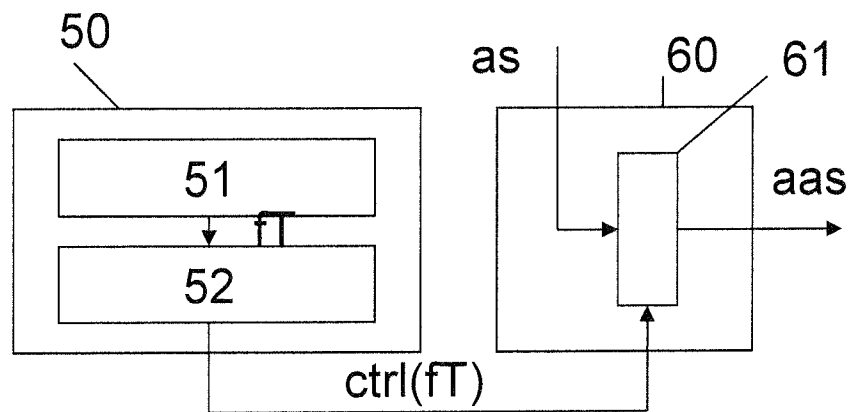


FIG 35

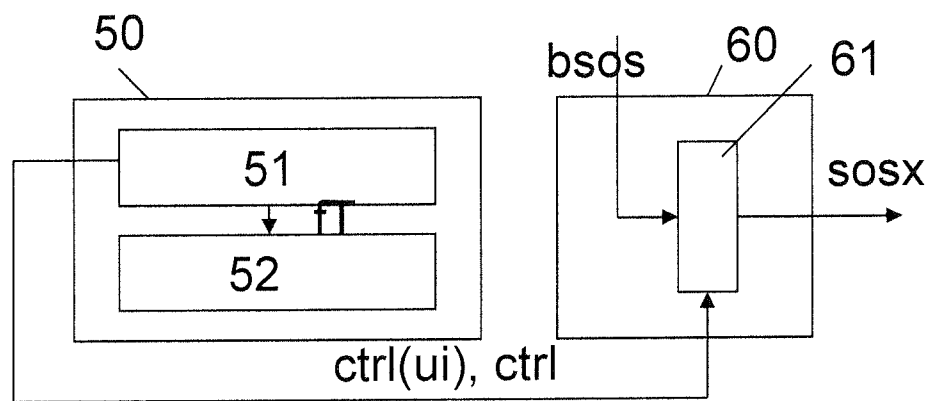


FIG 36

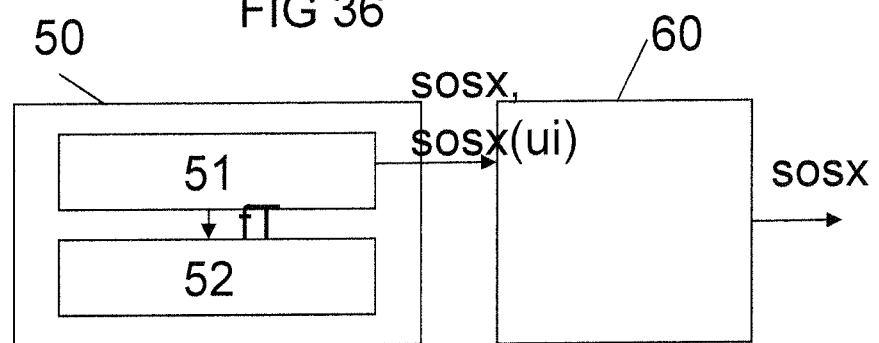


FIG 37

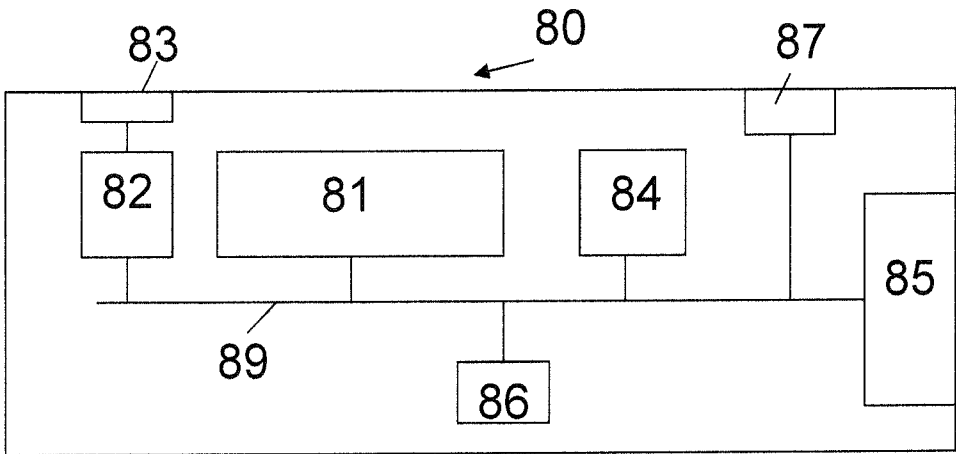


FIG 38

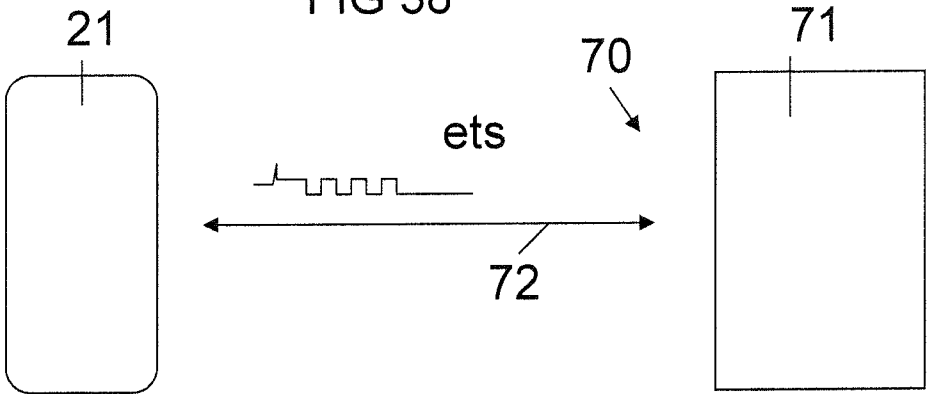


FIG 39

21/21

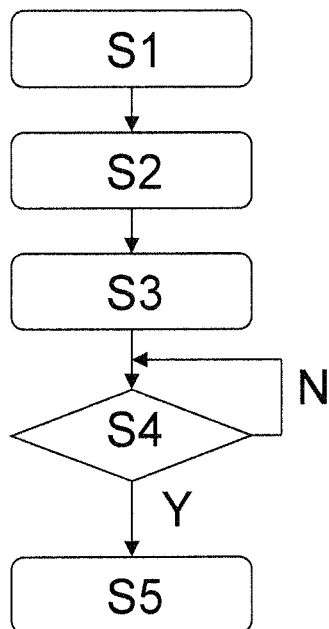


FIG 40

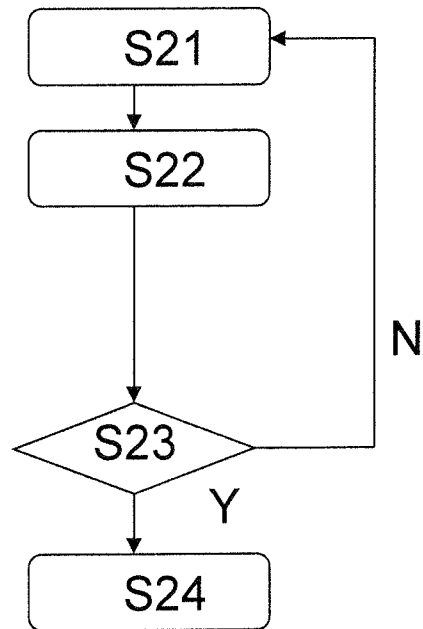


FIG 41a

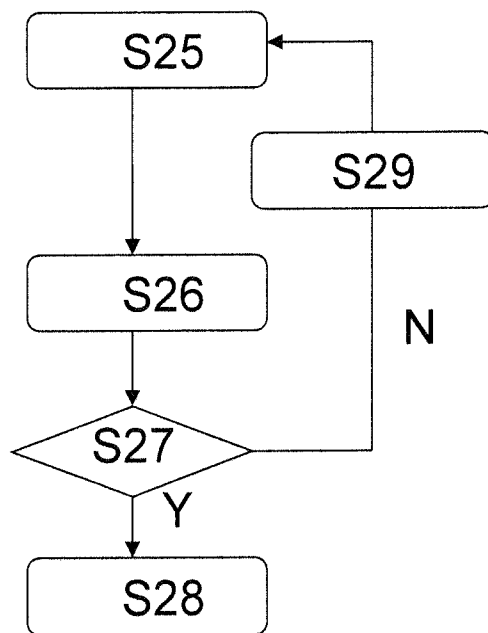


FIG 41b

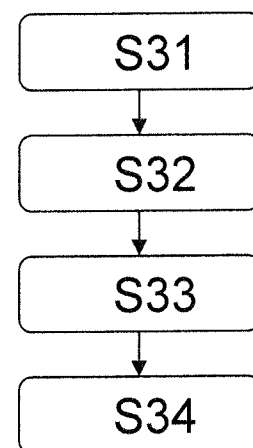


FIG 41c