



US011214405B2

(12) **United States Patent**  
**Whetsel et al.**

(10) **Patent No.:** **US 11,214,405 B2**

(45) **Date of Patent:** **\*Jan. 4, 2022**

(54) **MULTISENSORY EXAMINATION JAR FOR BOTANICAL SPECIMENS**

(71) Applicants: **Sam Whetsel**, Denver, CO (US);  
**Daniel Einhorn**, Charleston, SC (US)

(72) Inventors: **Sam Whetsel**, Denver, CO (US);  
**Daniel Einhorn**, Charleston, SC (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **16/950,512**

(22) Filed: **Nov. 17, 2020**

(65) **Prior Publication Data**

US 2021/0130045 A1 May 6, 2021

**Related U.S. Application Data**

(63) Continuation of application No. 15/910,682, filed on Mar. 2, 2018, now Pat. No. 10,836,537, which is a  
(Continued)

(51) **Int. Cl.**  
**B65D 25/54** (2006.01)  
**B65D 51/24** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **B65D 25/54** (2013.01); **B65D 51/1683** (2013.01); **B65D 51/248** (2013.01);  
(Continued)

(58) **Field of Classification Search**  
CPC .... **B65D 25/24**; **B65D 51/16**; **B65D 51/1683**;  
**B65D 51/24**; **B65D 51/248**; **B65D 85/50**;  
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,765,194 A 10/1956 Will  
3,656,840 A 4/1972 Smith et al.  
(Continued)

FOREIGN PATENT DOCUMENTS

CN 205821357 U \* 12/2016  
CN 206212767 U \* 6/2017  
(Continued)

OTHER PUBLICATIONS


Bud Bar Displays Commercial Fixtures. The Way Cannabis is Sold. 12 pp. Oct. 2020. All Plastic Fabrication Company, Fair Oaks, CA.  
(Continued)

*Primary Examiner* — Bryon P Gehman  
(74) *Attorney, Agent, or Firm* — Gregory Finch; Finch Paolino, LLC

(57) **ABSTRACT**

Embodiments of the present disclosure provide for a multisensory examination jar for botanical specimens. Embodiments of the disclosed jar may have a body portion with an integrated LED array for illuminating the contents of the jar. The jar may have a removable lid with an integrated magnifying lens, and an opening or port to enable a user to smell the contents of the jar. The opening may have a removable plug to establish a substantially air tight seal on the lid of the jar, to trap odors within the jar. The removable plug can be selectively removed to enable the user to smell the contents of the jar. The jar may have an electronics module and power source operable for wireless charging. The jar may also be configured to interface with a charging dock or base for wireless charging of integrated batteries.

**20 Claims, 6 Drawing Sheets**

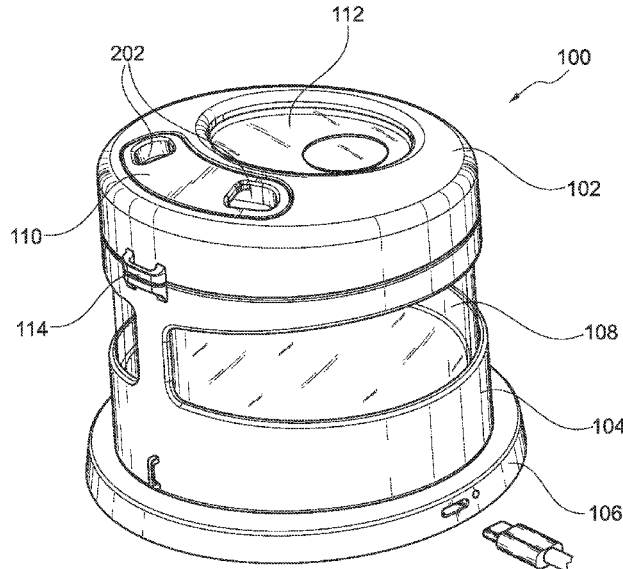

**Related U.S. Application Data**

continuation of application No. 29/607,785, filed on Jun. 16, 2017, now Pat. No. Des. 839,476.

- (51) **Int. Cl.**  
**B65D 85/50** (2006.01)  
**B65D 51/16** (2006.01)
- (52) **U.S. Cl.**  
CPC ..... *B65D 85/50* (2013.01); *B65D 2201/00* (2013.01); *B65D 2203/12* (2013.01); *B65D 2205/00* (2013.01)
- (58) **Field of Classification Search**  
CPC ..... B65D 2001/00; B65D 2201/00; B65D 2203/12; B65D 2205/00; B65D 25/54; C12M 3/00  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,230,231 A 10/1980 Burnett et al.  
4,284,200 A 8/1981 Bush et al.  
4,285,164 A \* 8/1981 Moore ..... A01G 9/16  
47/69  
D289,143 S \* 4/1987 Guillaume ..... D9/445  
4,979,332 A \* 12/1990 Nagaya ..... A01G 9/02  
47/69  
D323,674 S \* 2/1992 Winslow ..... D19/62  
5,321,908 A 6/1994 Ushimaru  
D364,093 S \* 11/1995 Weaver, Jr. .... D9/563  
5,927,007 A 7/1999 Oda et al.  
6,013,524 A 1/2000 Friars et al.  
6,463,697 B2 10/2002 Weder et al.  
6,527,121 B1 3/2003 Flynn  
D551,983 S \* 10/2007 Barbagli ..... D9/535  
D570,648 S \* 6/2008 Bodum ..... D7/509  
7,597,308 B1 10/2009 Stuck  
D607,340 S \* 1/2010 Klis ..... D9/559  
7,644,536 B2 \* 1/2010 Farhadi ..... A47F 7/0078  
47/1.01 R  
7,743,934 B2 6/2010 Martin  
D645,750 S \* 9/2011 Lee ..... D9/504  
8,166,701 B1 \* 5/2012 Duff, Sr. .... A47G 7/041  
47/39  
8,528,775 B2 9/2013 Martin  
D716,099 S \* 10/2014 Farber ..... D7/523  
8,899,443 B2 12/2014 Soibel et al.  
D737,503 S \* 8/2015 Now ..... D27/172  
9,334,086 B2 \* 5/2016 Bean ..... B65D 51/16  
D778,718 S 2/2017 Smith et al.  
9,630,747 B2 \* 4/2017 Smith ..... B65D 51/24  
D786,082 S \* 5/2017 Kachar ..... D9/549  
9,801,488 B2 10/2017 Affatato et al.

D803,287 S \* 11/2017 Whetsei ..... D16/135  
D804,093 S \* 11/2017 Chen ..... D27/195  
D814,105 S \* 3/2018 Eng ..... D27/167  
D855,449 S 8/2019 Smith et al.  
10,384,834 B2 \* 8/2019 Smith ..... A47F 7/0071  
D859,894 S 9/2019 Smith et al.  
D863,053 S 10/2019 Smith et al.  
D876,945 S 3/2020 Smith et al.  
D878,120 S 3/2020 Smith et al.  
D878,826 S 3/2020 Smith et al.  
D878,827 S 3/2020 Smith et al.  
D887,843 S 6/2020 Smith et al.  
D902,028 S 11/2020 Smith et al.  
D902,718 S 11/2020 Smith et al.  
11,001,413 B2 5/2021 Smith et al.  
2003/0234208 A1 12/2003 Huang  
2004/0211746 A1 \* 10/2004 Trude ..... B29D 22/003  
215/374  
2007/0051826 A1 3/2007 Schofield  
2008/0308559 A1 \* 12/2008 Peleg ..... B65D 11/04  
220/506  
2013/0280147 A1 10/2013 Kang  
2013/0313217 A1 11/2013 Yamamoto et al.  
2014/0069007 A1 \* 3/2014 Chen ..... A01G 9/249  
47/66.6  
2015/0166257 A1 6/2015 Trombetta  
2015/0191279 A1 \* 7/2015 Price ..... B65D 41/045  
215/350  
2015/0298136 A1 \* 10/2015 Dukat ..... A47J 42/12  
241/24.1  
2015/0313095 A1 \* 11/2015 Fenner, Jr. .... A01G 9/249  
47/84  
2016/0031605 A1 2/2016 Bean et al.  
2016/0128513 A1 \* 5/2016 Chan ..... B65D 51/24  
241/28  
2017/0275053 A1 \* 9/2017 Wartersian ..... A61J 1/03  
2018/0242529 A1 \* 8/2018 Tian ..... A01G 9/20

FOREIGN PATENT DOCUMENTS

CN 206273085 U \* 6/2017  
CN 206596415 U \* 10/2017  
CN 206776505 U \* 12/2017  
EP 0990408 B1 9/2003  
KR 200357151 Y1 7/2004  
KR 20110007691 U 8/2011  
KR 20120103019 A 9/2012

OTHER PUBLICATIONS

Safari Toys World's Best Bug Jar. Amazon.com. Viewed at [\\* cited by examiner](https://www.amazon.com/Safari-Toys-Worlds-Best-Bug/dp/B00OBIX3BY/ref=sr_1_11?dchild=1&keywords=bug+jar&qid=16028855558sr=8-11. Oct. 16, 2020.</a></p>
</div>
<div data-bbox=)

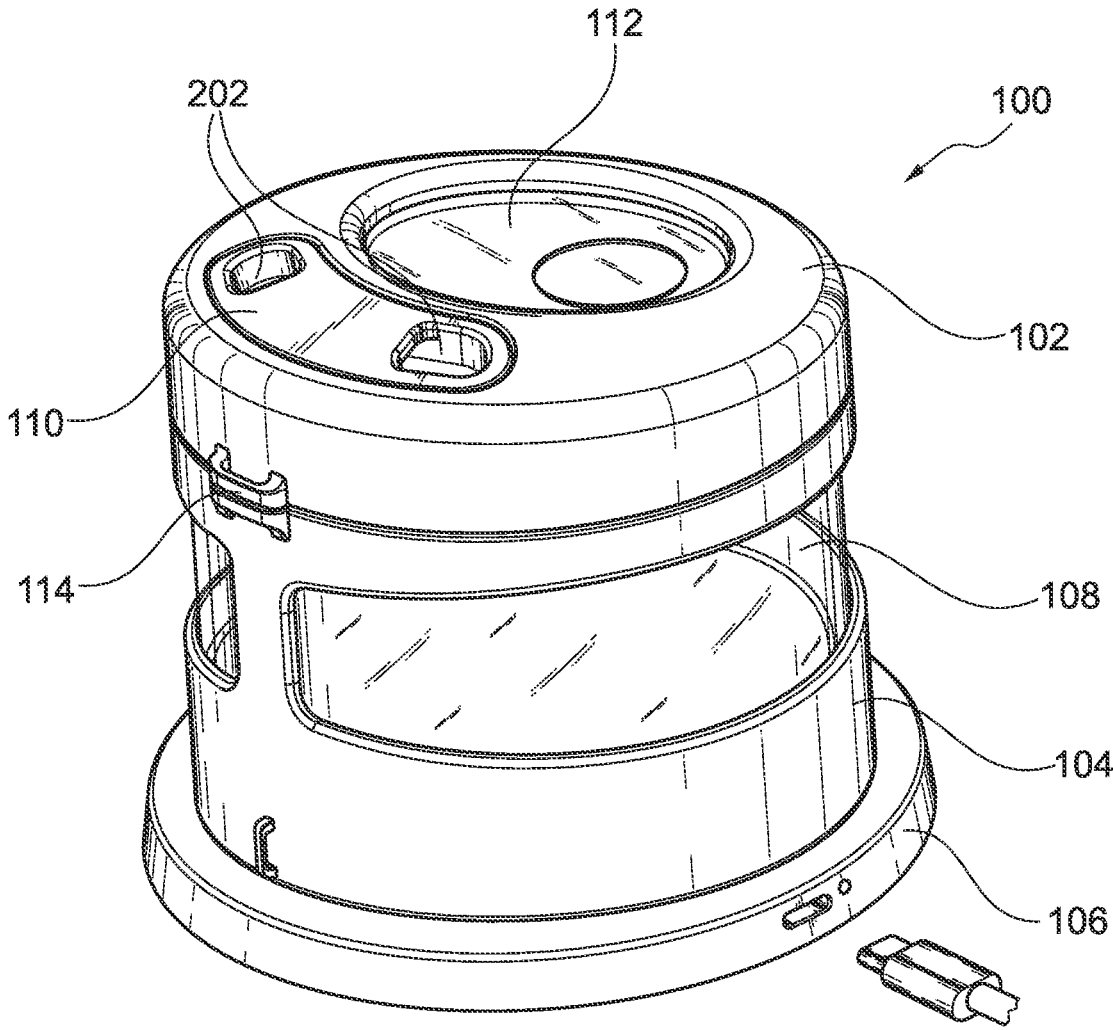


Fig. 1

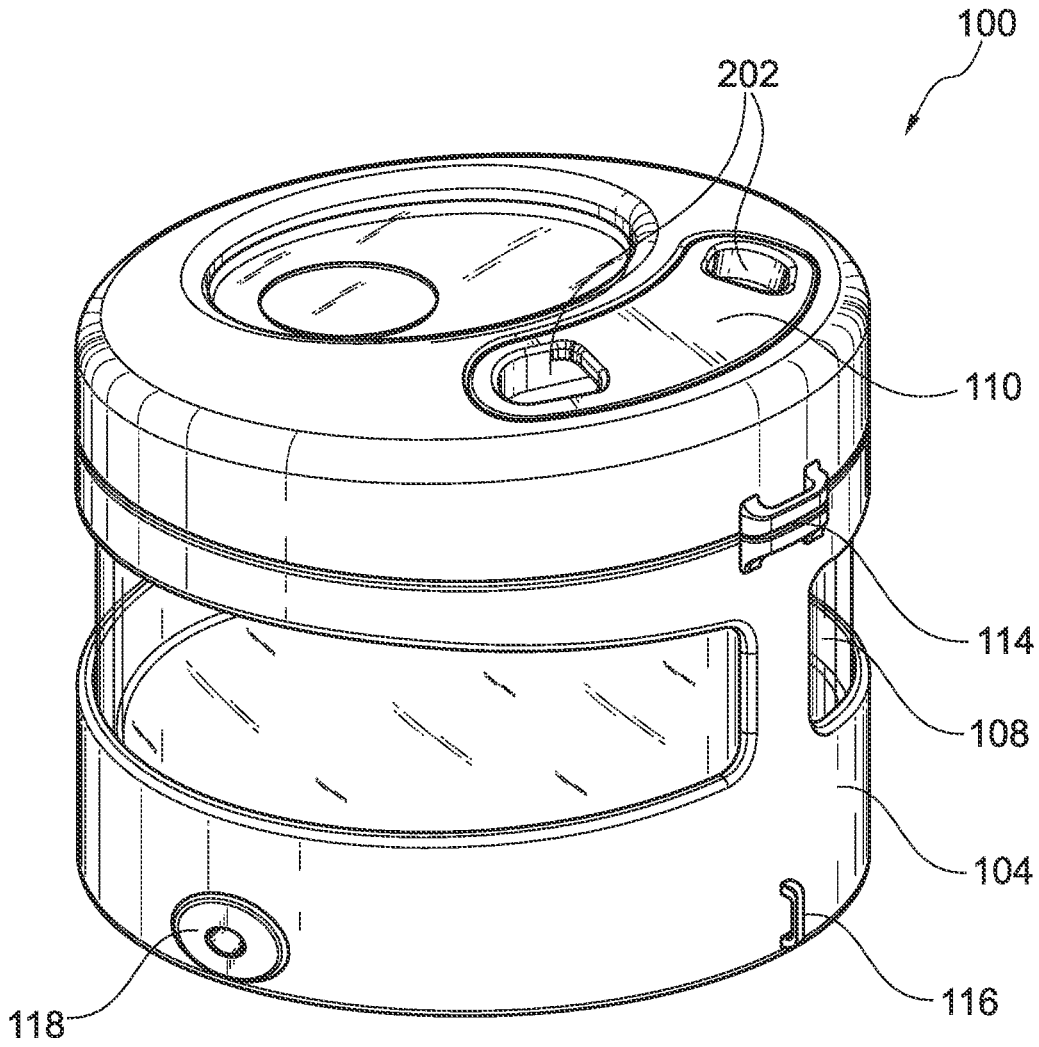


Fig. 2

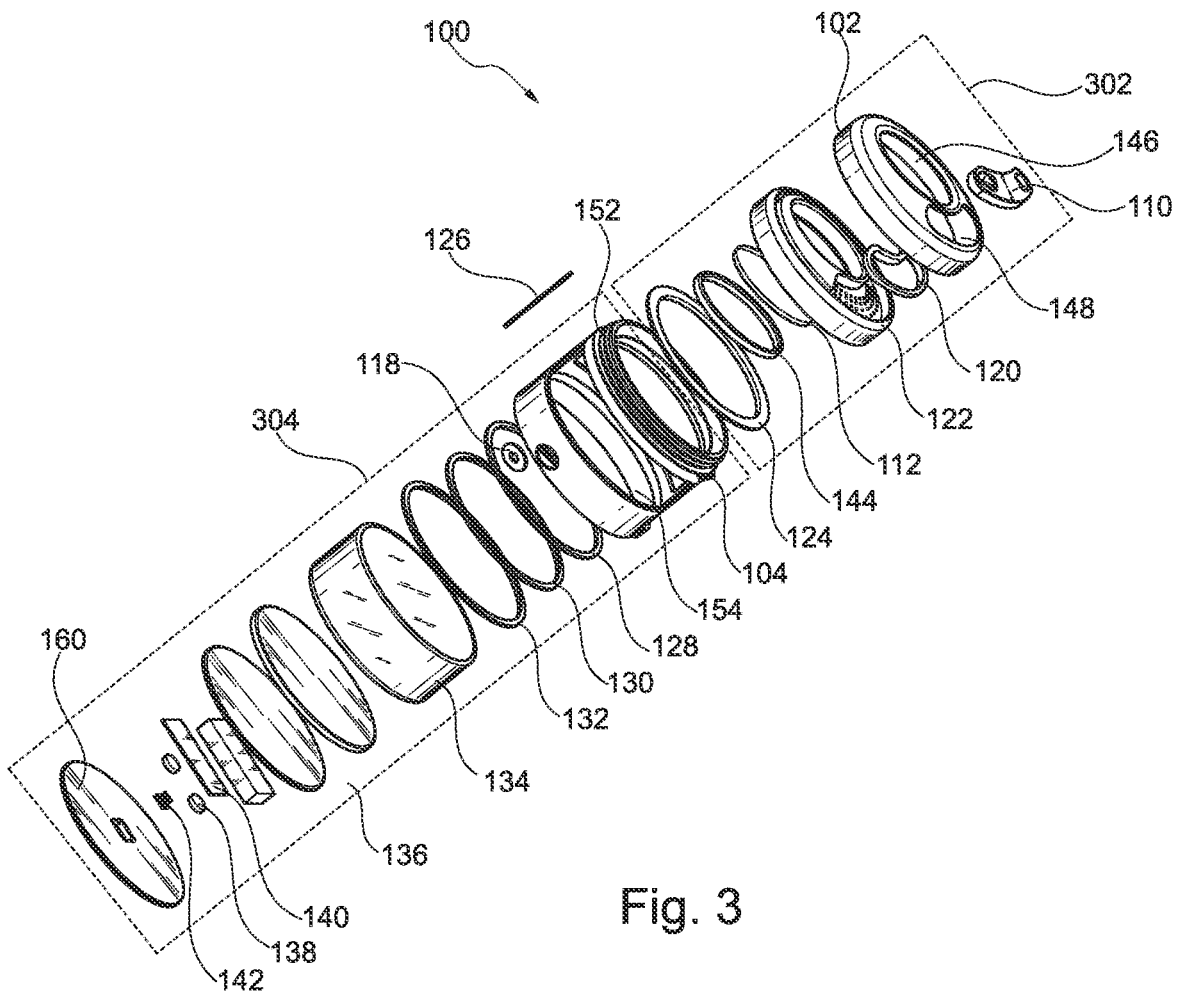


Fig. 3

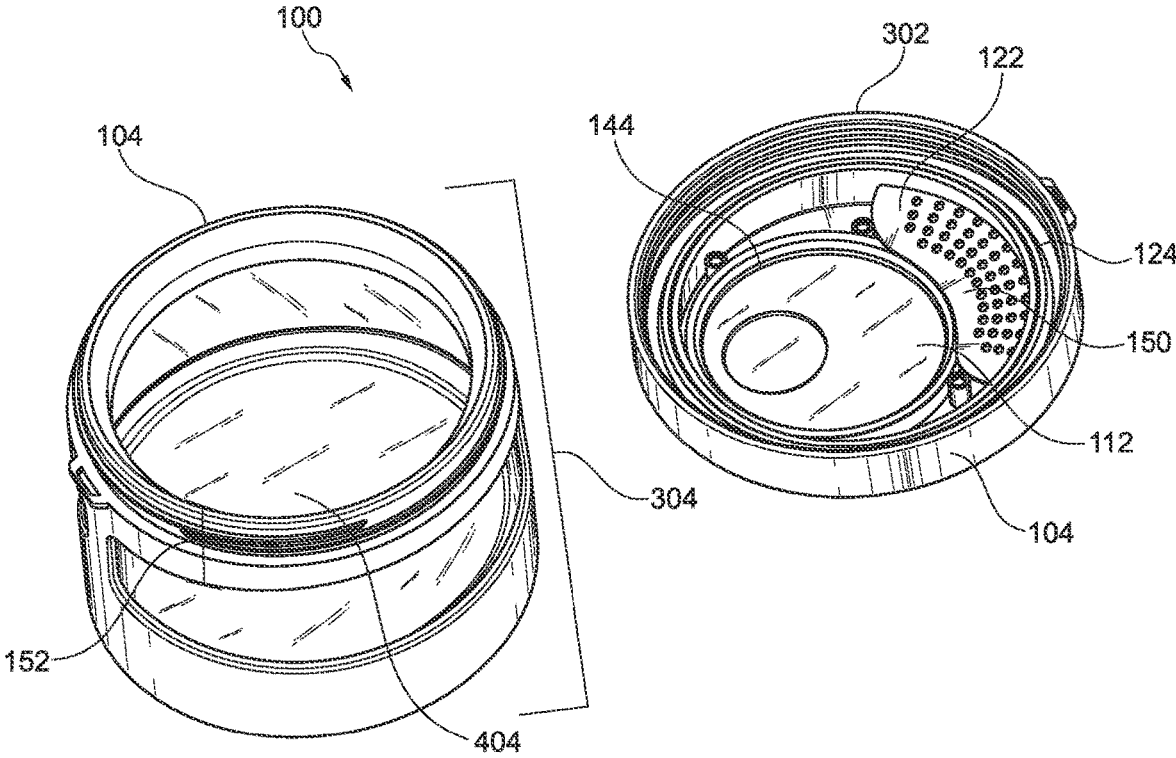


Fig. 4

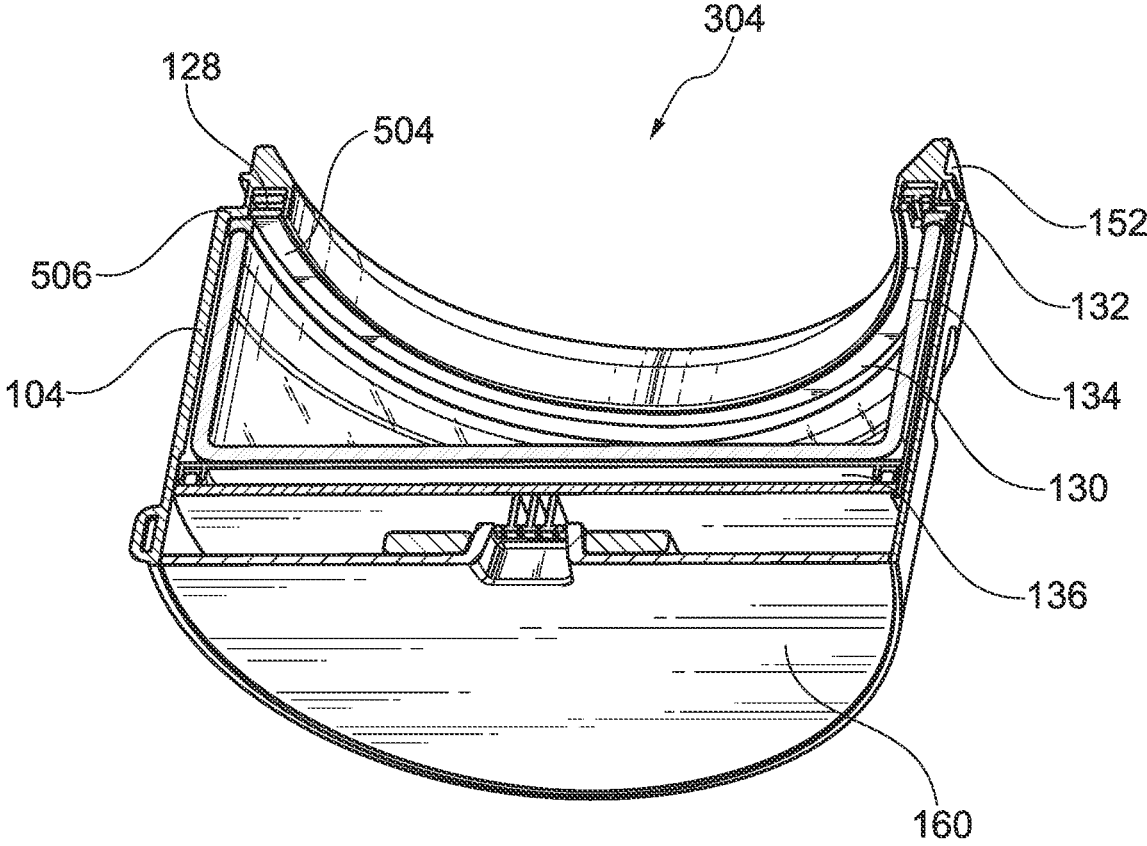


Fig. 5

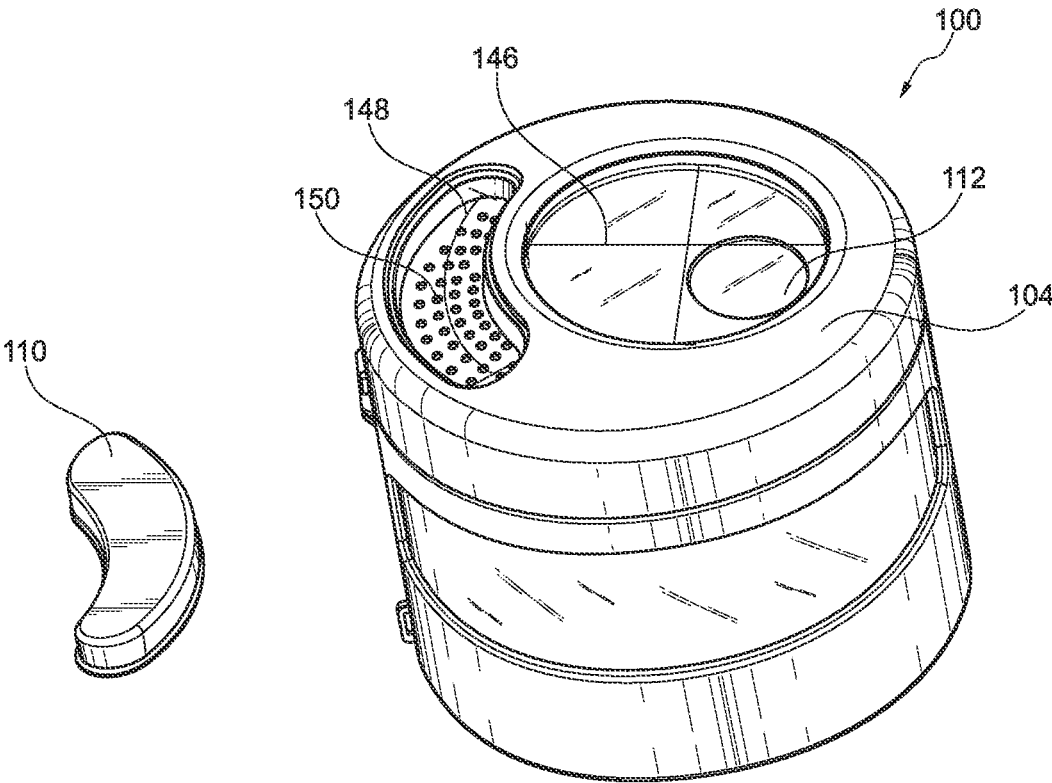


Fig. 6

## MULTISENSORY EXAMINATION JAR FOR BOTANICAL SPECIMENS

### CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 15/910,682 filed on Mar. 2, 2018, which is a continuation of U.S. Design patent application Ser. No. 29/607,785, filed on Jun. 16, 2017 entitled "LIGHTED MAGNIFIED DISPLAY JAR," the disclosures of each of which are hereby incorporated in their entirety at least by reference.

### FIELD

The present disclosure relates to the field of botanical examination and observation; in particular, a lighted magnified display jar with sealable smell port for multisensory examination of botanical specimens.

### SUMMARY

The following presents a simplified summary of some embodiments of the invention in order to provide a basic understanding of the invention. This summary is not an extensive overview of the invention. It is not intended to identify key/critical elements of the invention or to delineate the scope of the invention. Its sole purpose is to present some embodiments of the invention in a simplified form as a prelude to the more detailed description that is presented later.

An object of the present disclosure is a multisensory examination jar apparatus comprising a lid having side walls defining a circumference and a top portion extending from the side walls, the top portion comprising a circular aperture and an elongated aperture, the circular aperture having side walls defining a viewing portion and the elongated aperture having side walls defining a smell port, the lid having a magnifying lens coupled to an interior portion in alignment with the circular aperture; a smell port plug removably coupled to the elongated aperture, the smell port plug having a bottom portion and side walls, the smell port plug being configured to seal the smell port when removably coupled to the elongated aperture; a housing being selectively coupled to the lid, the housing having an upper circumference and a lower circumference with a support structure extending therebetween to define a viewing area, the housing having a jar portion defining an interior portion of the housing; an LED array disposed around an interior portion of the upper circumference of the housing; and, an electronics module being operably engaged with the LED array and a power source.

Another object of the present disclosure is a magnified display jar apparatus comprising a lid having side walls defining a circumference and a top portion extending from the side walls, the top portion having a circular aperture and an elongated aperture, the circular aperture having side walls defining a viewing portion and the elongated aperture having side walls defining an odor port, and a magnifying lens coupled to an interior portion of the lid in alignment with the circular aperture; an odor plug removably coupled to the elongated aperture, the odor plug having a bottom and side walls configured to seal the odor port when removably coupled to the elongated aperture; a housing being selectively coupled to the lid, the housing having an upper circumference and a lower circumference with a support

structure extending therebetween to define a viewing area, the housing having a jar portion defining an interior portion of the housing, the upper circumference of the housing having a channel portion disposed around an interior portion of the upper circumference; an LED array comprising a plurality of LEDs being mounted on a ring-shaped array surface, the LED array being coupled to the channel portion of the upper circumference of the housing; and, an electronics module being operably engaged with the LED array and a power source.

Yet another object of the present disclosure is a magnified display jar apparatus comprising a lid having side walls defining a circumference and a top portion extending from the side walls, the top portion having a circular aperture and an elongated aperture, the circular aperture having side walls defining a viewing portion and the elongated aperture having side walls defining an odor port, and a magnifying lens coupled to an interior portion of the lid in alignment with the circular aperture; an odor plug removably coupled to the elongated aperture, the odor plug having a bottom and side walls configured to seal the odor port when removably coupled to the elongated aperture; a housing being selectively coupled to the lid, the housing having an upper circumference and a lower circumference with a support structure extending therebetween to define a viewing area, the housing having a jar portion defining an interior portion of the housing, the upper circumference of the housing having a channel portion disposed around an interior portion of the upper circumference; an LED array comprising a plurality of LEDs being mounted on a ring-shaped array surface, the LED array being coupled to the channel portion of the upper circumference of the housing; and, an electronics module being operably engaged with the LED array and a power source.

The foregoing has outlined rather broadly the more pertinent and important features of the present invention so that the detailed description of the invention that follows may be better understood and so that the present contribution to the art can be more fully appreciated. Additional features of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and the disclosed specific methods and structures may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should be realized by those skilled in the art that such equivalent structures do not depart from the spirit and scope of the invention as set forth in the appended claims.

### BRIEF DESCRIPTION OF DRAWINGS

The above and other objects, features and advantages of the present disclosure will be more apparent from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is an isometric view of a magnified lighted display jar with sealable smell port, according to an embodiment of the present disclosure;

FIG. 2 is an isometric view of a magnified lighted display jar with sealable smell port, according to an embodiment of the present disclosure;

FIG. 3 is an exploded view of a magnified lighted display jar with sealable smell port, according to an embodiment of the present disclosure;

FIG. 4 is an isometric view of a magnified lighted display jar with sealable smell port, according to an embodiment of the present disclosure;

FIG. 5 is a cross sectional view of a magnified lighted display jar with sealable smell port, according to an embodiment of the present disclosure; and,

FIG. 6 is an isometric view of a magnified lighted display jar with sealable smell port with the lid in an open configuration, according to an embodiment of the present disclosure.

#### DETAILED DESCRIPTION

Exemplary embodiments are described herein to provide a detailed description of the present disclosure. Variations of these embodiments will be apparent to those of skill in the art. Moreover, certain terminology is used in the following description for convenience only and is not limiting. For example, the words “right,” “left,” “top,” “bottom,” “upper,” “lower,” “inner” and “outer” designate directions in the drawings to which reference is made. The word “a” is defined to mean “at least one.” The terminology includes the words above specifically mentioned, derivatives thereof, and words of similar import.

Embodiments of the present disclosure provide for a multisensory examination jar for botanical specimens; more particularly, a magnified lighted display jar for displaying, viewing, and smelling flowers and other vegetation. Embodiments of the disclosed jar may have a body portion with an integrated LED array for illuminating the contents of the jar. The jar may have a removable lid with an integrated magnifying lens, and an opening or port to enable a user to smell the contents of the jar. The opening may have a removable plug to establish a substantially air tight seal on the lid of the jar, to trap odors within the jar. The removable plug can be selectively removed to enable the user to smell the contents of the jar. The jar may have an electronics module and power source operable for wireless charging. The jar may also be configured to interface with a charging dock or base for wireless charging of integrated batteries.

Referring now to FIG. 1, an isometric view of a magnified display jar with sealable smell port **100** is shown. According to an embodiment of the present disclosure, magnified display jar **100** is configured to store flowers, or other items, in a jar portion **108**. Jar portion **108** is housed in housing **104**. A lid portion **102** interfaces with body portion **108** to contain and seal the contents of jar portion **108**. Lid portion **102** contains a magnifying lens **112** and a smell or odor port plug **110**. Smell port plug **110** may be constructed from rubber, plastic, and the like. Smell port plug **110** may have a gripping portion **202** that enables a user to remove smell port plug **110** from lid **102**. Lid **102** and housing **104** contain a security connector portion **114**. Security connector portion **114** enables a user to securely couple lid **102** and housing **104** with a cable, zip tie, locking device, or other connection means to prevent lid **102** from being removed from housing **104**. A charging dock **106** is operable to interface with a lower portion of housing **104** to enable wireless charging of an integrated battery pack.

Referring now to FIG. 2, an isometric view of magnified display jar with sealable smell port **100** is shown. According to an embodiment of the present disclosure, magnified jar **100** contains an array of light-emitting diodes (LEDs) coupled to an upper interior portion of housing **104**. A power button **118** is operably engaged with an integrated battery and is configured to turn the LED array on and off in relation to the integrated battery. Housing **104** may also have a lower security connector portion or eyelet **116**, which is configured to receive a cable, zip tie, or the like for securely connecting or locking magnified display jar **100** to a desired location.

Referring now to FIG. 3, an exploded view of magnified display jar with sealable smell port **100** is shown. According to an embodiment of the present disclosure, magnified display jar **100** is generally comprised of a lid assembly **302**, a body assembly **304**, and an electronics assembly **306**. Lid assembly **302** is generally comprised of lid **102**, smell port plug **110**, smell port gasket **120**, lid insert **122**, magnifying lens **112**, lens coupling **144**, and lid gasket **124**. Lid **102** is comprised of a circular opening defining a viewing area **146** and an elongated opening defining a smell port **148**. Smell port plug **110** is configured to be the same shape as smell port **148** such that smell port plug **110** may be mateably coupled with smell port **148**. Lid insert **122** is configured to mateably couple with lid **102**, such that lid insert **122** aligns with viewing area **146** and smell port **148**. Lid insert **122** may further comprise a smelling surface **150**. Smelling surface **150** is configured to extend between the area of smell port **148**. Smelling surface **150** contains a plurality of apertures such that air (i.e. smell) may freely flow there-through, but configured such that a user is prevented from inserting their fingers or a foreign object into the interior portion of magnified display jar **100**. Smell port gasket **120** is inserted against a perimeter of smelling surface **150** and then lid insert **122** is mateably coupled with lid **102**. Smell port gasket **120** provides a substantially air tight seal between lid insert **122** and lid **102** along the perimeter of smell port **148**. Lens **112** is coupled to an interior portion of lid insert **122** in alignment with viewing area **146**. Lens coupling **144** is configured to secure lens **112** to lens insert **122** in alignment with viewing area **146**. Lens coupling **144** may be screwed, glued, or otherwise coupled to lens insert **122** in order to secure lens **112**. Lid gasket **124** may be coupled to and disposed around a perimeter of lid insert **122** such that lid assembly **302** may establish a substantially airtight seal with body assembly **304** when coupled to body **104**. Lid insert **122** and body **104** may have complementary threaded portions such that lid assembly **302** may be screwed and unscrewed from body assembly **304**. The threaded portions of lid insert **122** and body **104** should be configured such that security connectors **114** (as shown in FIG. 1) are aligned when lid assembly **302** is coupled to body assembly **304**. The threaded portions of lid insert **122** and body **104** are a design choice to provide stability and a more air tight connection, but lid assembly **302** and body assembly **304** may be mateably coupled using any suitable mechanical means.

Body assembly **304** is generally comprised of housing **104**, LED array **128**, LED gasket **130**, jar gasket **132**, jar **134**, power switch **118**, electronics housing **136**, circuitry **140**, batteries **138**, power connector **142**, and base portion **160**, and bus **126**. Housing **104** may be comprised of an upper circumference **152**, a lower circumference **156**, and a support structure **158** extending between upper circumference **152** and lower circumference **156** to provide structural integrity of housing **104** and to define a viewing area **154** extending between an upper perimeter of lower circumference **156** and a lower perimeter of upper circumference **152**. LED array **128** comprises a plurality of LEDs disposed around LED array **128** (as shown in FIG. 5). LED array **130** is coupled to a channel portion (as shown in FIG. 5) of housing **104**. LED gasket **130** is disposed on LED array **130** to secure and conceal LED array **130** in the channel portion (as shown in FIG. 5) of housing **104**. Jar gasket **132** is disposed around an inner perimeter of housing **104** adjacent to the channel portion (as shown in FIG. 5) of housing **104**. Jar **104** is housed in an interior portion of housing **104**. Jar

gasket 132 provides an interface between jar 134 and housing 104 to ensure a secure fit between jar 134 and housing 104.

Electronics housing 136 couples to base portion 160 to contain circuitry 140, batteries 138, power connector 142. Power connector 142 interfaces with a power connector aperture in base 160 such that power connector 142 can interface with the charging dock (as shown in FIG. 1). Electronics housing 136 interfaces with a lower portion of housing 104 to securely couple jar 134 in the interior portion of housing 104. Bus 126 provides power transfer between LED array 128 and batteries 138. Power switch 118 is operably engaged with circuitry 140 to control the transfer of power from batteries 138 to LED array 128 via bus 126.

Referring now to FIG. 4, an isometric view of a magnified display jar with sealable smell port 100 is shown. According to an embodiment of the present disclosure, magnified display jar 100 is shown in an open configuration, with lid assembly 302 disconnected from housing 104. Lid gasket 124 is shown coupled to an inner portion of lid insert 122. Lens coupling 144 is shown being screwed to lid insert 122 to secure lens 112. The threaded portions of lid insert 122 and housing 104, as discussed in FIG. 3 above, are shown. The user places a desired item, such as a flower, into the interior portion 402 of body assembly 304 and secures lid assembly 302 to body assembly 304 to securely contain the item for viewing and examination via lens 112 and smell port 148 (as shown in FIG. 3).

Referring now to FIG. 5, a cross-sectional view of body assembly 304 is shown. According to an embodiment of the present disclosure, upper circumference 152 of housing 104 is comprised of channel 502 and an inner perimeter 506. LED array 128 is housed in channel 152 and LED gasket 130 is disposed on LED array 128. LED array 128 has a plurality of LEDs 504 disposed thereon. In an embodiment, LED array 128 has between four and eight LEDs 504 disposed equidistant around the circumference of LED array 128. LED gasket 130 has a plurality of apertures disposed equidistant around the circumference of LED gasket 130 in alignment with the location of LEDs 504 disposed LED array 128. Jar gasket 132 is disposed around inner perimeter 506 to secure jar 134 inside housing 104. Inner perimeter 506 is offset from channel 502 such that LEDs 504 disposed LED array 128 are not impeded by jar gasket 132 and/or jar 134.

Referring now to FIG. 6, an isometric view of a magnified display jar 100 with smell port plug 110 removed is shown. According to an embodiment of the present disclosure, magnified lighted display jar 100 is configured such that a user can visually examine and smell the contents of magnified display jar 100 simultaneously. With smell port plug 110 removed, the user may bring magnified display jar 100 adjacent to his or her face such that the user's nose is approximately centered horizontally with smell port 148. The user may then align viewing area 146 adjacent to the user's eyes, such that the user may visually examine the contents of magnified display jar 100 via lens 112, while simultaneously smell the contents of magnified display jar 100 via smell port 148. According to an embodiment, viewing area 146 is circular in shape and is off-centered in relation to the center of lid 102 (in relation to the circumference of lid 102). Smell port 148 may be elongated in shape and configured as an arc in relation to the circumference of lid 102. Smell port 148 may have an arc angle in the range of about 30 degrees to about 90 degrees, although any shape or configuration suitable to enable simultaneous viewing and smelling via lid 102 is anticipated. When the user

has concluded examining the contents of magnified lighted display jar 100 the user replaces smell port plug 110, thereby establishing a substantially air tight seal on lid 102.

Embodiments of the present disclosure provide for a multisensory examination jar for botanical specimens. The multisensory examination jar as described herein provides the following, non-exhaustive, improvements over the prior art:

Simultaneous visual and olfactory examination of botanical specimens;

Integration of full spectrum lighting, magnification lens, and olfactory examination port;

Integration of a circular LED array to prevent unobstructed illumination of the botanical specimen, regardless of the placement or configuration of the lid;

Wireless charging of integrated batteries via a removable charging dock;

Multiple security attachments for ensuring the integrity of the contained specimen, and well as physical security of the multisensory examination jar;

Unique design of lid to support optimal placement of visual and olfactory examination areas.

The present disclosure includes that contained in the appended claims as well as that of the foregoing description. Although this invention has been described in its exemplary forms with a certain degree of particularity, it is understood that the present disclosure of has been made only by way of example and numerous changes in the details of construction and combination and arrangement of parts may be employed without departing from the spirit and scope of the invention.

What is claimed is:

1. A multisensory examination jar apparatus comprising:
  - a lid comprising:
    - side walls defining a circumference of the lid,
    - a top portion having a planar surface extending from the side walls and having the circumference of the lid as defined by the side walls,
    - a circular aperture disposed in the planar surface of the top portion, the circular aperture having side walls defining a viewing portion of the lid,
    - an elongated aperture in the planar surface of the top portion, the elongated aperture having side walls defining a smell port,
    - a magnifying lens coupled to an interior portion of the planar surface of the top portion so as to be in alignment with the circular aperture, and
    - a smell port plug having a bottom portion and side walls, the smell port plug being removably coupled to the elongated aperture in the planar surface of the top portion and configured to seal the smell port when removably coupled to the elongated aperture;
  - a housing selectively coupled to the lid, the housing comprising:
    - an upper circumference,
    - a lower circumference,
    - a support structure extending between the upper circumference and the lower circumference and defining a viewing area of the housing, and
    - a jar portion defining an interior portion of the housing;
  - an LED array disposed around the upper circumference in the interior portion of the housing; and,
  - an electronics module operably engaged with the LED array and a power source.
2. The multisensory examination jar apparatus of claim 1 further comprising a lid insert coupled to the interior portion

of the lid, the lid insert having a surface portion extending across the smell port, the surface portion comprising a plurality of apertures.

3. The multisensory examination jar apparatus of claim 2 wherein the lid insert is configured to selectively couple the lid to the upper circumference of the housing.

4. The multisensory examination jar apparatus of claim 2 wherein the smell port plug is configured such that, when removably coupled to the elongated aperture, the bottom portion of the smell port plug sits flush with the surface portion of the lid insert and the side walls of the smell port plug are flush with the side walls of the elongated aperture defining the smell port.

5. The multisensory examination jar apparatus of claim 2 wherein the magnifying lens is coupled to the lid insert.

6. The multisensory examination jar apparatus of claim 1 further comprising an inductive charging dock selectively engaged with the power source.

7. The multisensory examination jar apparatus of claim 1 further comprising a security connector portion disposed between a lower surface of the lid and an upper surface of the housing.

8. The multisensory examination jar apparatus of claim 1 wherein the lid is configured such that the viewing portion and the smell port are substantially aligned such that a user can simultaneously view and smell an item being housed in the interior portion of the housing.

9. The multisensory examination jar apparatus of claim 1 wherein the smell port plug comprises a gripping portion.

10. The multisensory examination jar apparatus of claim 1 wherein the viewing area is circular in shape and is off-centered in relation to a central portion of the planar surface of the top portion of the lid with respect to the circumference of the lid defined by the side walls.

11. A multisensory examination jar apparatus comprising:  
 a lid having side walls defining a circumference and a top portion extending from the side walls and defining a planar surface,  
 a circular aperture disposed in the planar surface of the top portion of the lid, the circular aperture having side walls defining a viewing portion of the lid,  
 an elongated aperture disposed in the planar surface of the top portion of the lid, the elongated aperture having side walls defining a smell port,  
 a magnifying lens coupled to an interior portion of the lid so as to be in alignment with the circular aperture disposed in the planar surface of the top portion of the lid;  
 a smell port plug removably coupled to the elongated aperture, the smell port plug having a bottom portion and side walls, and being configured to seal the smell port when removably coupled to the elongated aperture;  
 a housing selectively coupled to the lid, the housing comprising:  
 an upper circumference and a lower circumference with a support structure extending therebetween to define a viewing area of the multisensory examination jar apparatus,  
 a jar portion defining an interior portion of the housing, a channel portion disposed around the upper circumference of the housing in the interior portion of the housing;  
 an LED array comprising a plurality of LEDs mounted on a ring-shaped array surface, the LED array being

coupled to the channel portion around the upper circumference of the housing in the interior portion of the housing;

a LED gasket disposed on the LED array and coupled to the channel portion around the upper circumference of the housing, the LED gasket having a plurality of apertures configured to align with the plurality of LEDs mounted on the ring-shaped array surface in the LED array; and,

an electronics module operably engaged with the LED array and a power source.

12. The multisensory examination jar apparatus of claim 11 further comprising a security connector portion disposed on a lower surface of the lid and an upper surface of the housing.

13. The multisensory examination jar apparatus of claim 11 further comprising a lid insert coupled to the interior portion of the lid, the lid insert having a surface portion comprising a plurality of apertures and extending across the smell port, and wherein the smell port plug is configured such that, when removably coupled to the elongated aperture in the planar surface in the top portion of the lid, the bottom portion of the smell port plug sits flush with the surface portion of the lid insert and the side walls of the smell port plug are flush with the elongated aperture defining the side walls of the smell port.

14. The multisensory examination jar apparatus of claim 13 wherein the lid insert is configured to selectively couple the lid to the upper circumference of the housing.

15. The multisensory examination jar apparatus of claim 11 wherein the lid is configured such that the viewing portion and the smell port in the top portion of the lid are substantially aligned such that a user can simultaneously view and smell an item housed in the interior portion of the housing.

16. A multisensory examination jar apparatus comprising:  
 a lid comprising:  
 side walls defining a circumference of the lid,  
 a top portion having a planar surface extending from the side walls and having a circumference substantially corresponding to the circumference of the lid as defined by the side walls,  
 a circular aperture disposed in the planar surface of the top portion, the circular aperture having side walls defining a viewing portion in the top portion of the lid,  
 an elongated aperture disposed in the planar surface of the top portion, the elongated aperture having side walls defining a smell port in the top portion of the lid, and  
 a magnifying lens coupled to an interior portion of the lid so as to be in alignment with the circular aperture disposed in the planar surface of the top portion of the lid,  
 a lid insert coupled to the interior portion of the lid, the lid insert having a surface portion comprising a plurality of apertures that extends across the smell port, and  
 a smell port plug having a bottom portion and side walls, the smell port plug being removably coupled to the elongated aperture in the planar surface, and being configured to seal the smell port when removably coupled to the elongated aperture;  
 a housing selectively coupled to the lid, the housing comprising:  
 an upper circumference,  
 a lower circumference,

9

a support structure extending between the upper circumference and the lower circumference and defining a viewing area of the multisensory examination jar apparatus,  
 a jar portion defining an interior portion of the housing,  
 and  
 a channel portion disposed around the upper circumference of the housing in the interior portion of the housing;  
 an LED array comprising a plurality of LEDs mounted on a ring-shaped array surface, the LED array being coupled to the channel portion around the upper circumference of the housing; and,  
 an electronics module operably engaged with the LED array and a power source.

17. The multisensory examination jar apparatus of claim 16 further comprising a security connector portion between a lower surface of the lid and an upper surface of the housing.

10

18. The multisensory examination jar apparatus of claim 16 wherein the smell port plug is configured such that, when removably coupled to the elongated aperture, the bottom portion of the smell port plug sits flush with the surface portion of the lid insert and the side walls of the smell port plug are flush with the side walls of the elongated aperture defining the smell port.

19. The multisensory examination jar apparatus of claim 16 wherein the viewing portion and the smell port are substantially aligned in the planar surface of the top portion of the lid so as to enable a user to simultaneously view and smell an item being housed in the interior portion of the housing.

20. The multisensory examination jar apparatus of claim 16 wherein the lid insert is configured to selectively couple the lid to the upper circumference of the housing.

\* \* \* \* \*