



(86) Date de dépôt PCT/PCT Filing Date: 1993/02/26

(87) Date publication PCT/PCT Publication Date: 1993/09/16

(45) Date de délivrance/Issue Date: 2003/12/09

(85) Entrée phase nationale/National Entry: 1994/08/22

(86) N° demande PCT/PCT Application No.: US 1993/001754

(87) N° publication PCT/PCT Publication No.: 1993/018225

(30) Priorité/Priority: 1992/03/02 (844,108) US

(51) Cl.Int.⁵/Int.Cl.⁵ D06N 7/00, B05D 7/14, B05D 1/06


(72) Inventeur/Inventor:
CHITOURAS, COSTA G., US

(73) Propriétaire/Owner:
CHITOURAS, COSTA G., US

(74) Agent: OGILVY RENAULT

(54) Titre : METHODE ET APPAREIL POUR ACCROITRE LA DENSITE DES PARTICULES SUR UN SUBSTRAT

(54) Title: METHOD AND APPARATUS FOR INCREASING THE DENSITY OF PARTICULATES ON A SUBSTRATE

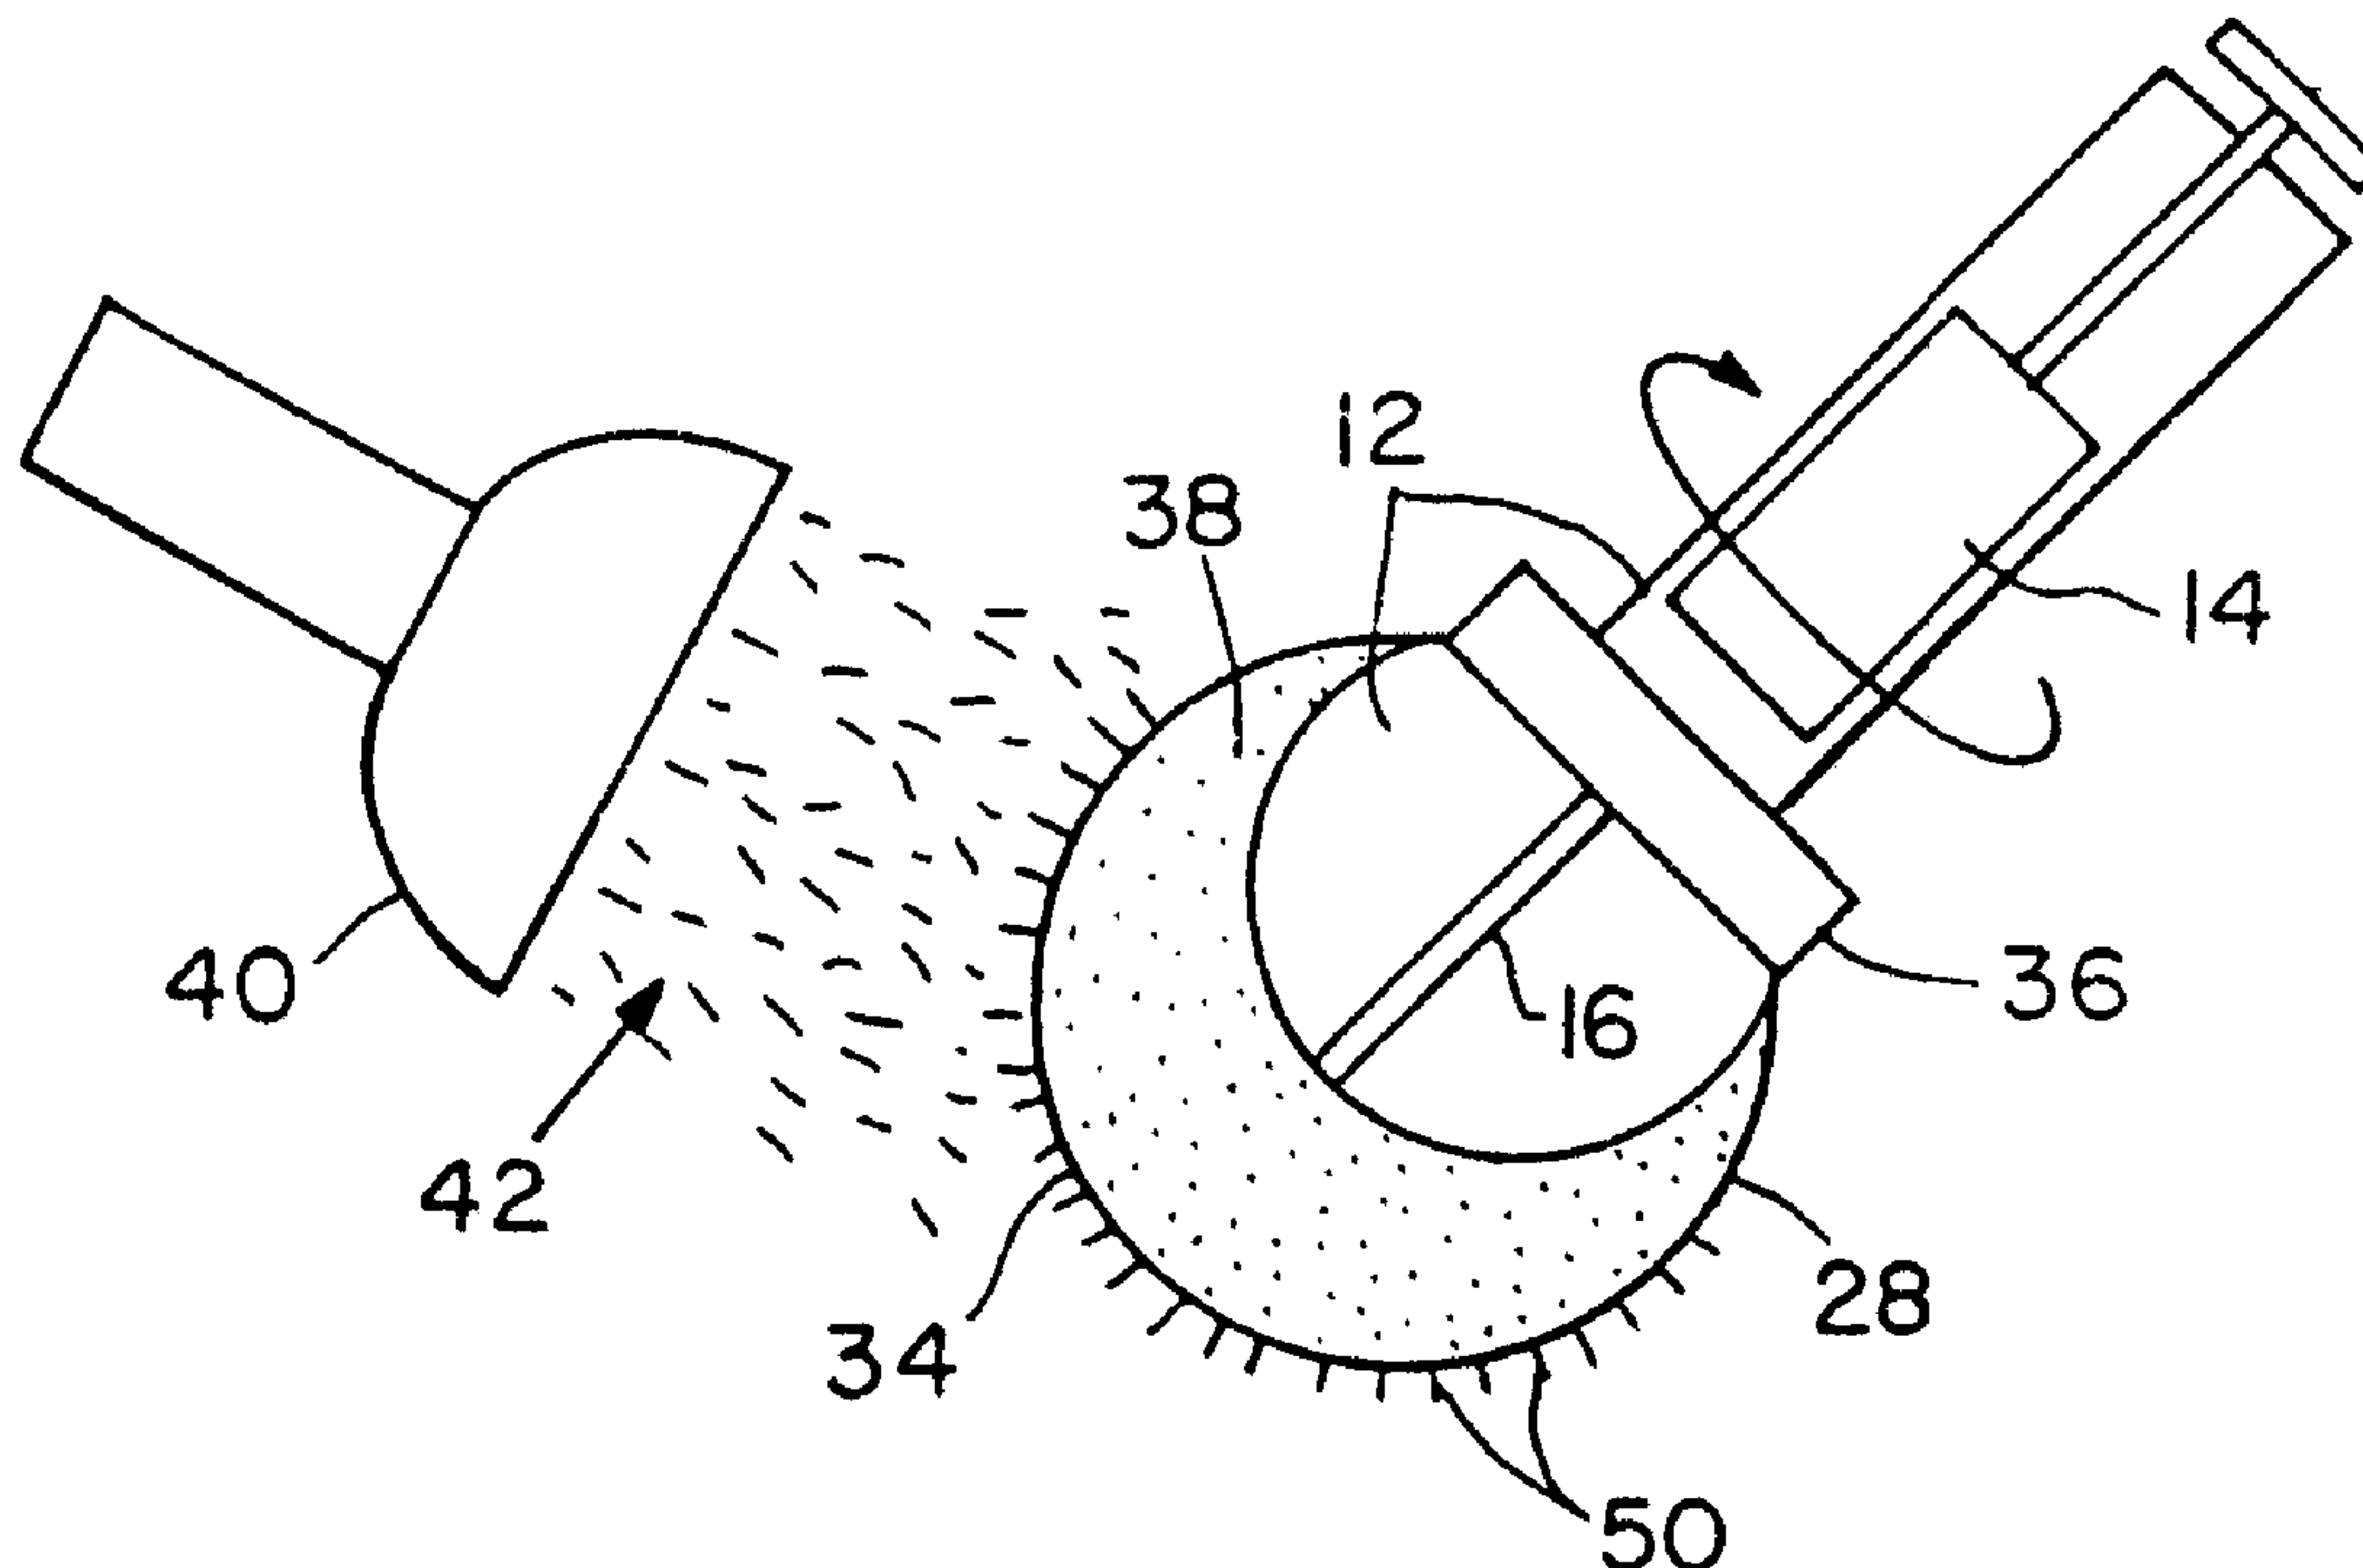

(57) Abrégé/Abstract:

A method and apparatus is disclosed for significantly increasing the density of particulates on a substrate. The method includes disposing a particulate material, such as fibers or abrasive material, onto a surface of the substrate, whereby the particles adhere to the substrate. The substrate is then exposed to conditions sufficient to cause the surface area, on which the particulate material is disposed, to diminish significantly, thereby significantly increasing the density of the particulate material. The apparatus includes a support on which the substrate is disposed; means for disposing the particulate material in the substrate and means for causing the surface on which the particulate material is disposed to significantly diminish.





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁵ :D06Q 1/06, B01D 35/10
B05D 1/16

A1

(11) International Publication Number:

WO 93/18225

(43) International Publication Date:

16 September 1993 (16.09.93)

(21) International Application Number: PCT/US93/01754

(22) International Filing Date: 26 February 1993 (26.02.93)

(30) Priority data:

844,108

2 March 1992 (02.03.92)


US

(71)(72) Applicant and Inventor: CHITOURAS, Costa, G. [US/
US]; 10 Packard Avenue, Somerville, MA 02144 (US).(74) Agents: BROOK, David, E. et al.; Hamilton, Brook, Smith
& Reynolds, Two Militia Drive, Lexington, MA 02173
(US).(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CZ,
DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG,
MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK,
UA, European patent (AT, BE, CH, DE, DK, ES, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD,
TG).

Published

2130673
With international search report...Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

(54) Title: METHOD AND APPARATUS FOR INCREASING THE DENSITY OF PARTICULATES ON A SUBSTRATE

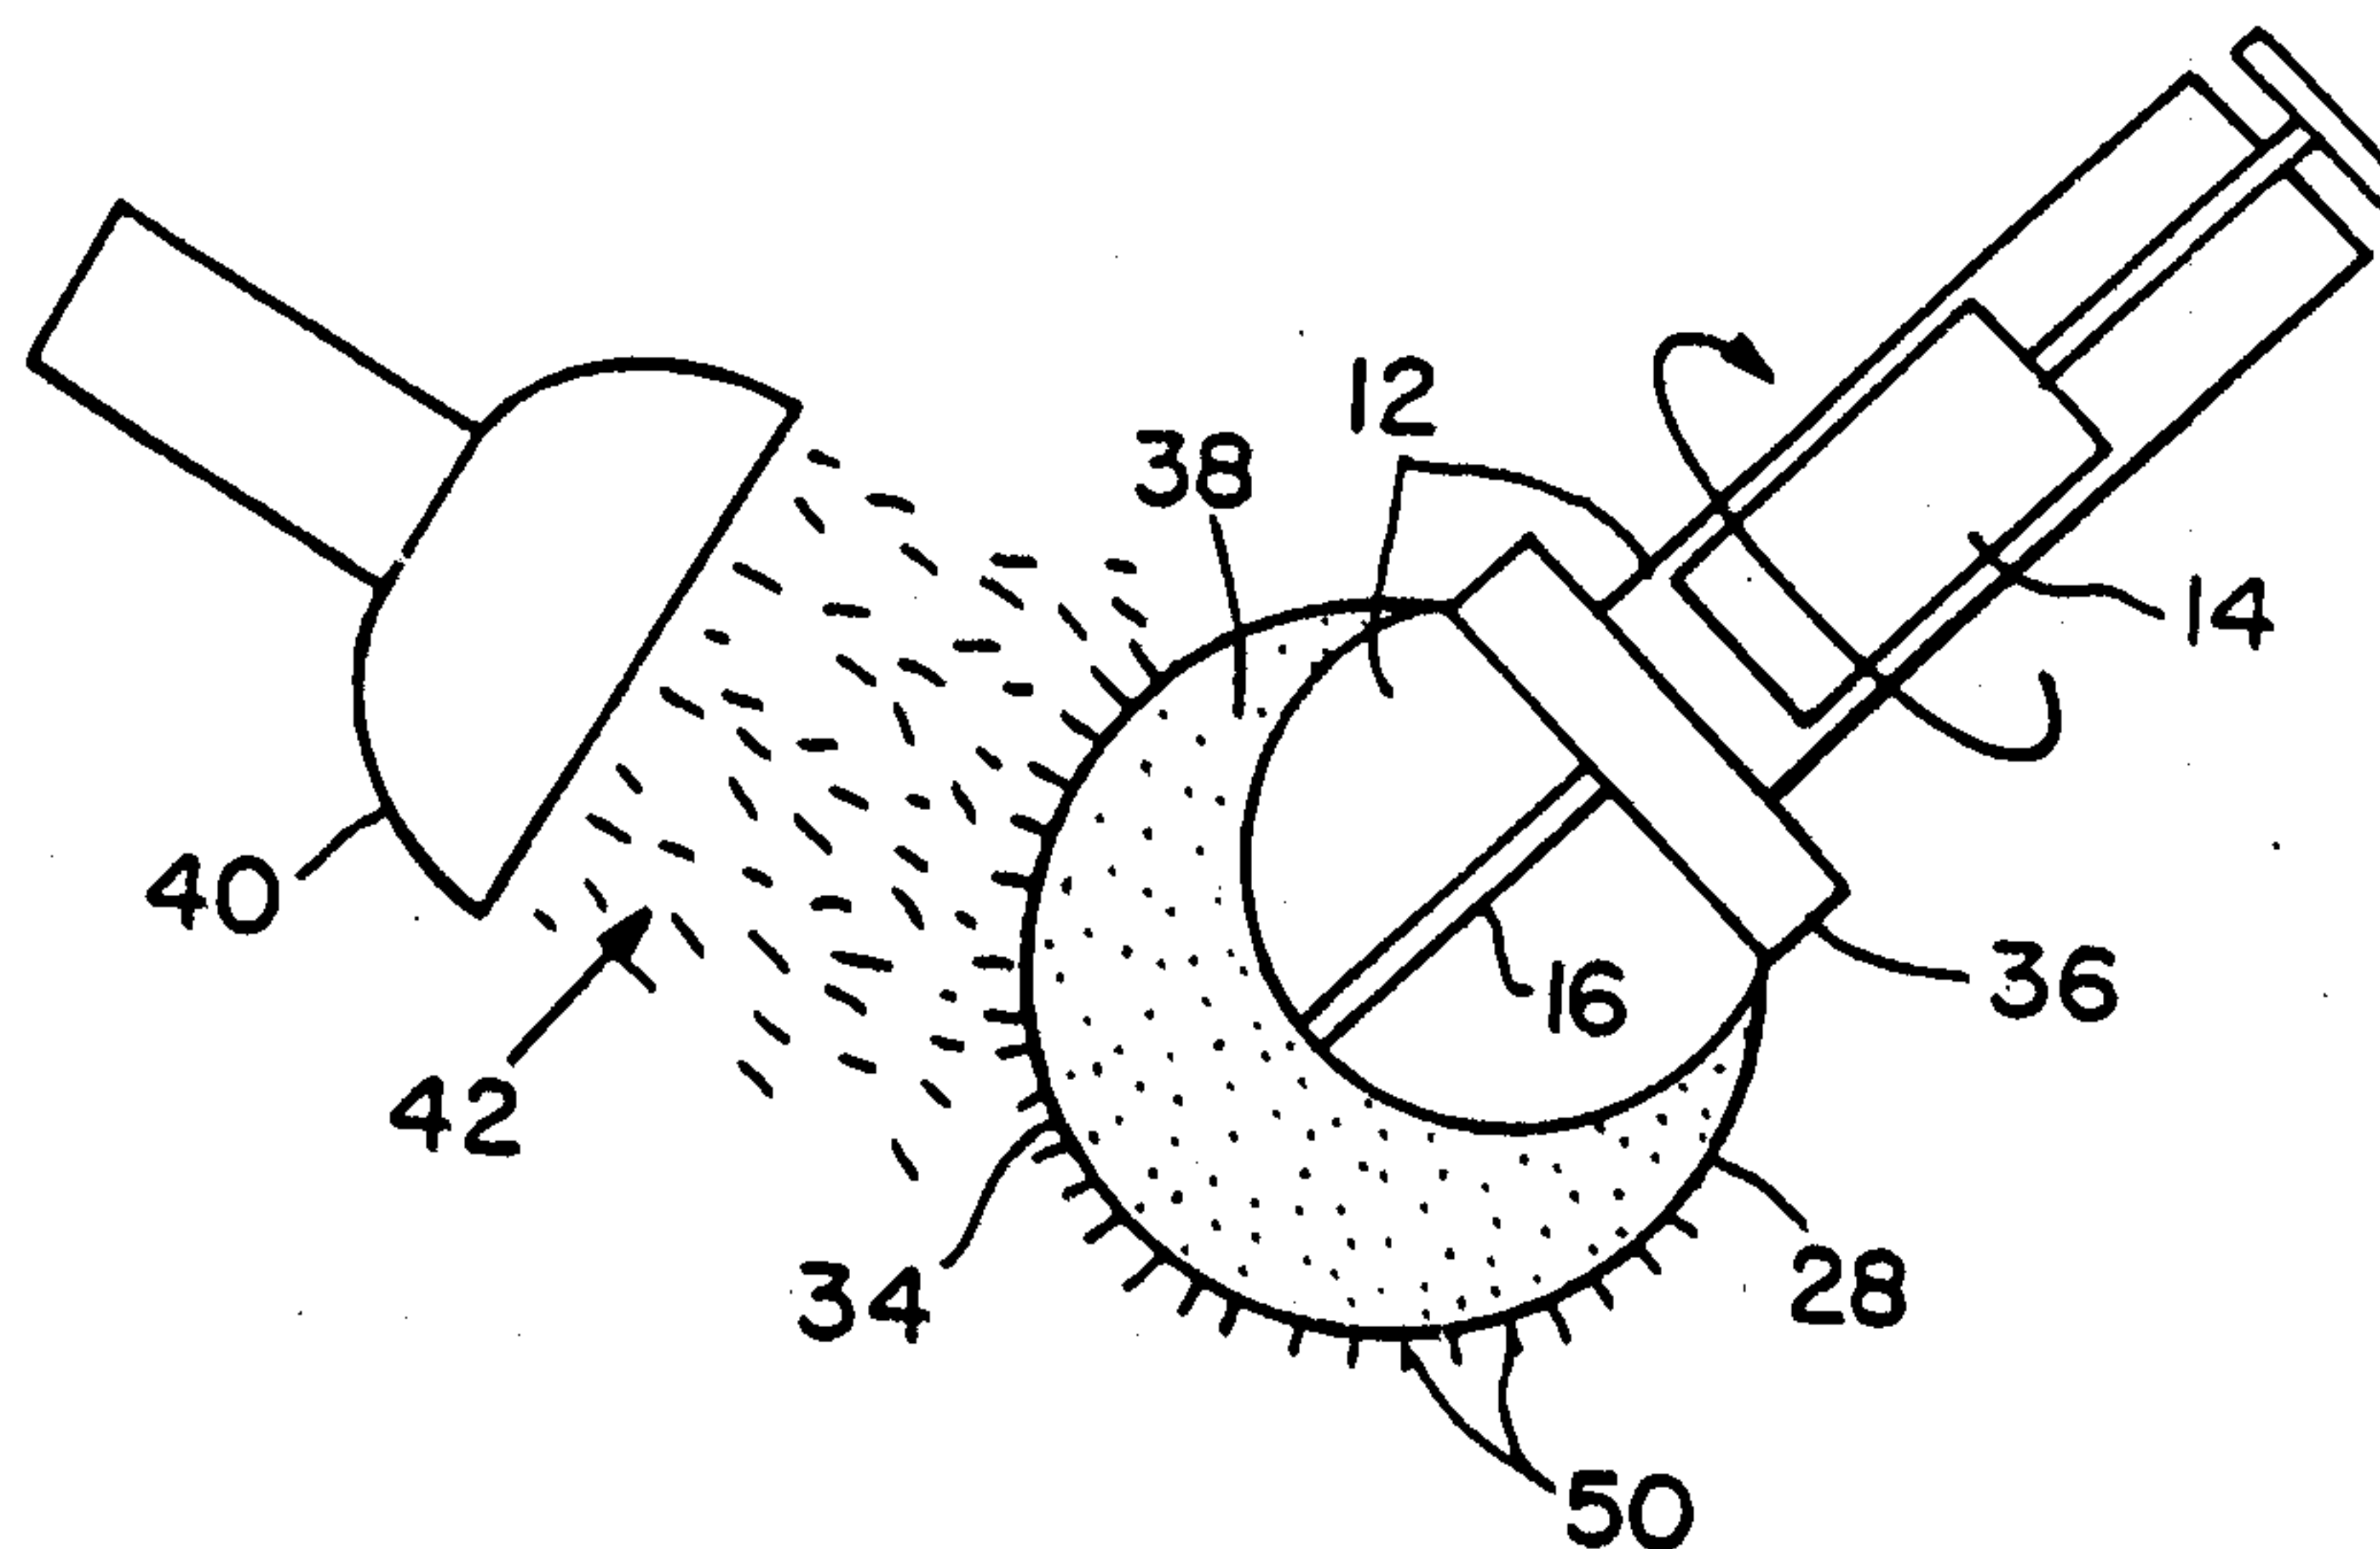

(57) Abstract

A method and apparatus is disclosed for significantly increasing the density of particulates on a substrate. The method includes disposing a particulate material, such as fibers or abrasive material, onto a surface of the substrate, whereby the particles adhere to the substrate. The substrate is then exposed to conditions sufficient to cause the surface area, on which the particulate material is disposed, to diminish significantly, thereby significantly increasing the density of the particulate material. The apparatus includes a support on which the substrate is disposed; means for disposing the particulate material in the substrate and means for causing the surface on which the particulate material is disposed to significantly diminish.

-1-

METHOD AND SYSTEM FOR SIGNIFICANTLY INCREASING THE
DENSITY OF PARTICULATES ON A SUBSTRATE

Background of the Invention

Many products include a substrate which are coated
5 with a particulate substance, such as fibers or granules
adhering to a surface of the substrate. For example,
common forms of such fibers are often referred to as
flock, whereas particles, in general, may be abrasive
particles, such as are used in sandpaper. Because flock
10 usually has the largest length-to-width ratio of commonly
applied particulate materials and is usually made of
flexible materials, with a typical length between about
3/4 to 2 mm and a denier of between about one and eighteen
denier, it is usually the most difficult particulate
15 substance to deposit at high density levels.

With regard to flocked products, for example, the
highest density of fibers on commercially available
products, generally do not exceed about four ounces of
flock per square yard. It is rarely possible to exceed
20 about fifteen or so percent of the theoretical flock
density possible for a given flock length and denier, i.e.
where maximum theoretical flock density on the surface
exists when the substrate is essentially packed with
straight fibers, each fiber touching adjacent fibers along
25 its whole length.

There are several problems associated with limited
particulate density. For example, multiple applications
of a weight or a frictional shuffling action, as on a
flocked carpet, or on any of the commonly available carpet
30 structures, often bends the fibers at the base where the
fibers enter the adhesive layer or base structure, tending

2130673

-2-

to break the fibers without actually abrading or wearing them away throughout their lengths.

In contrast, the same weight or shuffling action on a high-density surface bends the fibers, but not at their
5 bases, since the close proximity of adjacent fibers "support" each other, causing the weight or abrasive force to wear the top ends of the fibers, allowing the whole length of the fibers to wear, thus presenting a great deal of material to resist the abrading action. The ratio of
10 the abrasion resistance of two flocked surfaces, one in which the fibers are systematically abraded along their whole length verses the cutting of fibers at the base and carried away, is many times the ratio of the flock density. Hence, even the highest density flocked
15 substrates commonly available generally do not offer adequate abrasion resistant surfaces for use in many applications.

In another embodiment, the utility of filters having flocked components is also limited by the density and
20 arrangement of fibers of the flock. For example, a relatively low density of fibers can significantly diminish the efficiency of filtration. Also, flock is generally uniformly distributed on substrates, thereby limiting, for example, the design of filters or the
25 esthetic design of automobile cabin interiors which employ flocked components.

Therefore, there is a need for a method of significantly increasing or varying the density of a particulate substance adhering to a substrate and for
30 articles which are formed by such a method.

2130673

-3-

Summary of the Invention

The present invention relates to a method for significantly increasing the density of a particulate substance adhering to a substrate. The invention also
5 relates to articles which are formed by such a method.

The method includes disposing a particulate substance onto a substrate, which, during exposure of the substrate to sufficient conditions, significantly diminishes in surface area. The substrate is then exposed to conditions
10 sufficient to significantly diminish the surface area of the substrate, thereby significantly increasing the density of the particulate substance on the substrate.

The system includes means for disposing the particulate substance onto a substrate which, during
15 exposure of the substrate to sufficient conditions, significantly diminishes in surface area, the particulate substance adhering to the substrate. Suitable means expose the substrate to conditions sufficient to significantly diminish the surface area of the substrate,
20 thereby significantly increasing the density of the particulate substance on the substrate.

This invention has many advantages. For example, the density of a particulate material, such as flock, can be significantly increased over the density of the material
25 as it is disposed onto the substrate. Also, the method can include distention of a substantially resilient substrate, whereby the surface area of the substrate can be significantly diminished by allowing the substrate to assume a relaxed position. Further, the substrate can be
30 distended asymmetrically, whereby a continuous gradient of particulate density can be formed on the substrate when

2130673

-4-

the substrate is allowed to relax, thereby causing the substrate surface to significantly diminish. In addition, articles, such as filters, can be formed which include flocked substrates having continuous gradients of flock density across surfaces of substrate components of the filter.

It is not always necessary that the total surface of a product have a higher flock density than can be attained by an otherwise high-quality flocking operation.

Specifically, one may desire that certain portions of a flocked substrate have higher density than other portions, either for increased abrasion resistance, esthetics, tactile qualities or clean ability, to name a few possible reasons. Expansion of the principles and teachings described in the above example of covering a tennis ball may be used to make possible normal, as well as high-density flocking, on the same item, that is, providing a variable density of flock deposition on a single substrate.

Variation of flock density could be desirable, for example, in a door panel liner, inasmuch as it would concentrate the highest density flocked portions where there is maximum wear and abrasion, namely, at the handpull and the kickplate regions of a car door.

Subsequently, the flocked membrane can be assembled to a suitable substrate, as, for example, a molded plastic door panel.

Another application of this invention, beneficially utilizing both the characteristics of high density and variable density flocking, is the production of a high performance air or other, general purpose, fluid filter.

2130673

-5-

Such a filter would be designed to remove the larger particles at the input side, i.e. have relatively large openings to trap the larger particles and allow smaller particles to penetrate this initial surface area but be
5 trapped further inside a more dense filter area, having progressively smaller openings. Such a design provides a low resistance to the flow of air or other fluids while removing the majority of particles, from large to small, and retaining a low-clog, long-life filter design by not
10 requiring the input side of the filter to consist of small cell structures to capture all the particles, whether large or small. Depending on the distribution of the size of the contaminants in the fluid, the filter density may be designed to maximize the lifetime of the filter by
15 adjusting the filter density profile to match the expected contaminant profile, so that the whole filter, more or less, reaches its contaminated saturation level at approximately the same time.

Brief Description of the Figures

20 Figure 1 is a schematic illustration of one embodiment of the invention, including a rotating mandrel and plunger partially immersed in a liquid latex bath.

Figure 2 is a schematic illustration of the embodiment illustrated in Figure 1, wherein the mandrel is
25 immersed in a coagulant for liquid latex.

Figure 3 is a schematic illustration of the embodiment illustrated in Figure 1, wherein the mandrel and rubber substrate are immersed in a liquid flock adhesive.

2130673

-7-

Figure 11 is a section view of the flocked substrate illustrated in Figure 10, taken along line XI-XI.

Figure 12 is a section view of a filter of the present invention, including eight of the flocked
5 substrates illustrated in Figure 11 in a stacked arrangement.

Figure 13 is a perspective view of another embodiment of a filter of the invention.

Detailed Description of the Invention

10 The above features and other details of the method and apparatus of the invention will now be more particularly described with reference to the accompanying drawings and pointed out in the claims. The same number
15 present in different figures represents the same item. It will be understood that the particular embodiments of the invention are shown by way of illustration and not as limitations of the invention. The principle features of this invention can be employed in various embodiments without departing from the scope of the invention.

20 In one embodiment of the present invention, system 10, shown in Figure 1, includes mandrel 12, which incorporates inflation/suction plunger 14 and defines conduit 16. Mandrel 12 is partially immersed in liquid latex bath 18, which is contained in trough 20. An
25 example of a suitable latex is Vultex 1-V-10 latex, commercially available from General Latex and Chemical Corp. Mandrel 12 is slowly rotated so that liquid latex layer 22 is deposited onto mandrel 12.

Mandrel 12, with liquid latex layer 22 disposed
30 thereon, is transported to trough 24, shown in Figure 2,

2130673 -

-18-

particular material disposed on the surface and which adheres to the surface will thereby significantly increase in density.

