



- (51) **International Patent Classification:**
G06T 19/00 (2011.01)
- (21) **International Application Number:**
PCT/US2014/023873
- (22) **International Filing Date:**
12 March 2014 (12.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/804,543 14 March 2013 (14.03.2013) US
- (71) **Applicant:** MICROSOFT CORPORATION [US/US];
One Microsoft Way, Redmond, Washington 98052-6399 (US).
- (72) **Inventors:** AGUERA Y ARCAS, Blaise; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). UNGER, Markus; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). BARNETT, Donald A; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). SINHA, Sudipta Narayan; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). PYLVAEN-AEINEN, Timo Pekka; c/o Microsoft Corporation, LCA -

International Patents (8/1172), Redmond, Washington 98052-6399 (US). MESSER, Christopher Stephen; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). STOLLNITZ, Eric Joel; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US). KOPF, Johannes Peter; c/o Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US).

- (74) **Agent:** COOPER, William; Cooper Legal Group LLC, Microsoft Corporation, LCA - International Patents (8/1172), Redmond, Washington 98052-6399 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

- (54) **Title:** TRANSLATED VIEW NAVIGATION FOR VISUALIZATIONS

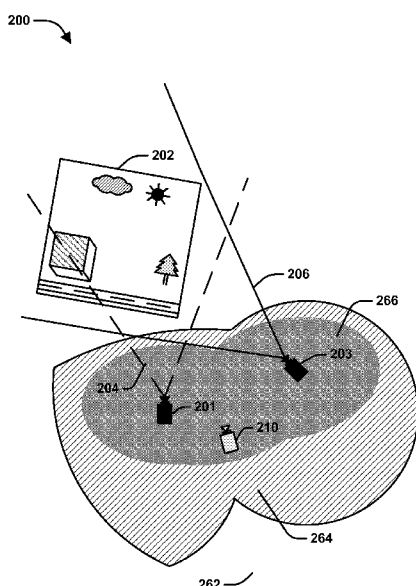


FIG. 2A

(57) **Abstract:** Among other things, one or more techniques and/or systems are provided for defining transition zones for navigating a visualization. The visualization may be constructed from geometry of a scene and one or more texture images depicted the scene from various viewpoints. A transition zone may correspond to portions of the visualization that do not have a one-to-one correspondence with a single texture image, but are generated from textured geometry (e.g., a projection of texture imagery onto the geometry). Because a translated view may have visual error (e.g., a portion of the translated view is not correctly represented by the textured geometry), one or more transition zones, specifying translated view experiences (e.g., unrestricted view navigation, restricted view navigation, etc.), may be defined. For example, a snapback force may be applied when a current view corresponds to a transition zone having a relatively higher error.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

TRANSLATED VIEW NAVIGATION FOR VISUALIZATIONS

BACKGROUND

[0001] Many users may create image data using various devices, such as digital
5 cameras, tablets, mobile devices, smart phones, etc. For example, a user may capture an
image of a beach using a mobile phone while on vacation. The user may upload the image
to an image sharing website, and may share the image with other users. In an example of
image data, one or more images may be used (e.g., stitched together) to generate a
visualization of a scene depicted by the one or more images. In one example, the
10 visualization may comprise a panorama, a spin-movie, a multi-dimensional rendering, etc.
A visualization interface, such as an immersive viewer, may allow a user to visually
navigate within the visualization to explore the scene represented by the visualization.

SUMMARY

[0002] This summary is provided to introduce a selection of concepts in a simplified
15 form that are further described below in the detailed description. This summary is not
intended to identify key factors or essential features of the claimed subject matter, nor is it
intended to be used to limit the scope of the claimed subject matter.

[0003] Among other things one or more systems and/or techniques for defining
transition zones for navigating a visualization of a scene are provided herein. That is, a
20 visualization may be constructed from one or more texture images depicting a scene from
various viewpoints (e.g., a panorama visualization of a renovated basement may be
stitched together from one or more images depicting the renovated basement from various
viewpoints). In an example, during navigation within the visualization, a current view of
the scene may be derived from a single texture image (e.g., where the texture image
25 depicts the entire current view). In another example, a current view of the scene may be
derived from multiple texture images (e.g., a first texture image, depicting a first portion
of the current view, and a second texture image, depicting a second portion of the current
view, may be projected onto a geometry to create textured geometry representing the
scene, such that a current view may be derived from the textured geometry). A geometry
30 may comprise a multi-dimensional representation of a surface of the scene or a portion
thereof. In an example, respective texture images of the scene may have corresponding
geometry (e.g., a first texture image has a first local geometry, a second texture image has
a second local geometry, etc.), and the scene may be represented by a geometry (e.g., a
global geometry derived from at least one local geometry). In another example, one or

more texture images may share a geometry (e.g., a first texture image and a second texture image may share a first local geometry derived by a stereo matching technique).

[0004] In an example, a user may have the ability to “look around” and/or explore the renovated basement by navigating within the visualization. One or more transition zones
5 may be defined for visually navigating the visualization. For example, a first texture image and a second texture image are projected onto a geometry of a scene (e.g., a local geometry of a portion of the scene depicted by the first and second texture images) to create a textured geometry of the scene. A transition space may be derived from the textured geometry. The transition space may correspond to transitional navigation of the
10 scene between the first texture image and the second texture image (e.g., a current view of the scene that does not have a one-to-one correspondence with a single texture image, but is derived from multiple texture images). In an example where a first texture image depicts a gaming area and a sitting area of the renovated basement and a second texture image depicts the sitting area and a hallway area of the renovated basement, a transition space
15 may correspond to a current view that comprises half of the some of the gaming area, the entire sitting area, and some of the hallway area. Thus, the current view may correspond to a translated view derived from the first texture image and the second texture image.

[0005] An error basin may be determined for the transition space based upon a visual error measurement. For example, an inaccurate geometry measurement, a resolution
20 fallout measurement, a pixel occlusion measure, a color different measurement, and/or other measurements or image features may be used to identify the visual error measurement. The error basin may correspond to error estimations that visual errors may arise when displaying a current view based upon geometry and/or texture information within the transition space. The error basin may be used to define one or more transitional
25 zones for navigating the visualization. In an example, a first transition zone is defined within the transition space based upon one or more first translated views being below an error threshold within the error basin. The first transition zone may specify a first translated view experience for the one or more first translated views. For example, a user may be allowed to freely navigate between the one or more first translated views because
30 such views may be generated with relatively lower error (e.g., relatively low pixel occlusion, relatively low resolution fallout, etc.). In another example, a second transition zone is defined within the transition space based upon one or more second translated views being above the error threshold within the error basin. The second transition zone may specify a second translated view experience for the one or more second translated

views. For example, a user may have restricted navigation between the one or more second translated views because such views may be generated with relatively higher error (e.g., a current view may be transitioned back to the first transition zone during a navigation pause). In this way, an interactive navigation experience of the scene (e.g.,
5 represented by the visualization) may be provided. During navigation within the visualization, the user experience may be dynamically defined based upon such transition zones.

[0006] To the accomplishment of the foregoing and related ends, the following description and annexed drawings set forth certain illustrative aspects and
10 implementations. These are indicative of but a few of the various ways in which one or more aspects may be employed. Other aspects, advantages, and novel features of the disclosure will become apparent from the following detailed description when considered in conjunction with the annexed drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 [0007] Fig. 1 is a flow diagram illustrating an exemplary method of defining transition zones for navigating a visualization.

[0008] Fig. 2A is an illustration of an example of a first texture image and a second texture image depicting a scene.

[0009] Fig. 2B is a component block diagram illustrating an exemplary system for
20 defining transition zones for navigating a visualization.

[0010] Fig. 3A is an illustration of an example of a first graph.

[0011] Fig. 3B is an illustration of an example of a second graph.

[0012] Fig. 3C is an illustration of an example of a third graph.

[0013] Fig. 4 is an illustration of an example of unrestricted navigation movement for a
25 current view of a visualization.

[0014] Fig. 5 is an illustration of an example of unrestricted navigation movement for one or more first translated views of a visualization.

[0015] Fig. 6 is an illustration of an example of restricted navigation movement for one or more second translated views of a visualization.

30 [0016] Fig. 7 is a component block diagram illustrating an exemplary system for generating a confidence mask and/or for generating a color relationship.

[0017] Fig. 8 is a flow diagram illustrating an exemplary method of filling an untextured visualization portion of a visualization.

[0018] Fig. 9 is an illustration of an exemplary computing device-readable medium wherein processor-executable instructions configured to embody one or more of the provisions set forth herein may be comprised.

[0019] Fig. 10 illustrates an exemplary computing environment wherein one or more of
5 the provisions set forth herein may be implemented.

DETAILED DESCRIPTION

[0020] The claimed subject matter is now described with reference to the drawings, wherein like reference numerals are generally used to refer to like elements throughout. In the following description, for purposes of explanation, numerous specific details are set
10 forth in order to provide an understanding of the claimed subject matter. It may be evident, however, that the claimed subject matter may be practiced without these specific details. In other instances, structures and devices are illustrated in block diagram form in order to facilitate describing the claimed subject matter.

[0021] An embodiment of defining transition zones for navigating a visualization is
15 illustrated by an exemplary method 100 of Fig. 1. At 102, the method starts. In an example, a visualization interface may generate a visualization by rendering a scene using imagery (e.g., texture images depicting a scene of a renovated kitchen from various viewpoints) and geometry (e.g., a representation of a multi-dimensional surface of the scene). The geometry may comprise global geometry (e.g., a representation of the entire
20 scene as viewed by texture images depicting the scene) or local geometry (e.g., a representation of a portion of the scene, which may correspond to portions of the scene viewed by one or more texture images). The visualization interface may allow a user to navigate within the visualization to explore the scene (e.g., a user may navigate around the visualization in three-dimensions to see various views of the scene). In an example, a
25 current view, provided by the visualization interface, may correspond to a single texture image, such that the current view is derived from the single texture image (e.g., the current view and the single texture image have a one-to-one correspondence). In another example, a current view may correspond to a view that is not entirely depicted by a single texture image, and thus one or more texture images may be projected onto a geometry to create
30 textured geometry that may be used to derive the current view (e.g., a first portion of the current view is depicted by a first texture image and a second portion of the current view is depicted by a second texture image). A lack of image data, inaccurate geometry, moving objects within the scene during image capture, and/or other issues can result in a relatively unsatisfactory user experience when navigating the visualization (e.g., seam lines,

resolution fallout, blurring, etc. may occur when a current view corresponds to textured geometry as opposed to a single texture image).

[0022] Accordingly, one or more transition zones for navigating the visualization may be defined. A transition zone may specify a translated view experience that may define
5 how a user may navigate within the visualization (e.g., navigation may be relatively restricted when a current view is derived from a transition zone having a relatively higher error, which may otherwise result in poor visual quality for the current view). At 104, a first texture image and a second texture image (e.g., a panorama image, a photo image, a computer generated image, an orthographic image from an aerial viewpoint, etc.) are
10 projected onto a geometry of a scene to create textured geometry of the scene (e.g., projected onto a global geometry or a local geometry shared by the first texture image and the second texture image). For example, the geometry may correspond to a multi-dimensional surface of a renovated kitchen. The first texture image, the second texture image, and/or other texture images may depict the renovated kitchen from various views.
15 Because the geometry may initially lack texture information, such as color information, the first texture image and the second texture image may be projected onto the geometry to texture the geometry (e.g., assign color values to geometry pixels of the geometry). In an example, the textured geometry may be used to generate a current view of the scene represented by the textured geometry (e.g., the first texture image may depict a first
20 portion of the current view and the second texture image may depict a second portion of the current view, such that the current view can be constructed from the projection of both the first texture image and the second texture image onto the geometry).

[0023] At 106, an error basin for a transition space between the first texture image and the second texture image may be determined based upon a visual error measurement. The
25 error basin may correspond to estimated error that may occur when generating translated views between the first texture image and the second texture image (e.g., a translated view that is derived from the textured geometry as opposed to a single texture image). In an example, the error basin may be derived from image features extracted from the first texture image and/or the second texture image. In another example, the error basin may be
30 derived from an inaccurate geometry measurement (e.g., the textured geometry used to create the translated view may have inaccuracies based upon a lack of dimensional information used to construct the geometry), a resolution fallout measurement (e.g., areas of relatively low resolution due to a lack of data), a pixel occlusion measurement (e.g., a geometry pixel of the geometry may not be depicted by either the first texture image or the

second texture image, and thus the geometry pixel may not have an accurate color value), a color difference measurement (e.g., the first texture image may provide a first color for a region of the scene based upon a person standing in that region, while the second texture image may provide a second color for the region based upon the person having moved out of the region), or other visual error measurements.

[0024] In an example, the error basin may indicate that translated views that are relatively close to the first texture image or the second texture image may have relatively lower error. For example where the first texture image depicts a northern wall of a renovated kitchen, a translated view, corresponding to a slightly offset view of the northern wall, may have a relatively lower visual error because the first texture image may adequately depict the slightly offset view of the northern wall. In another example, the error basin may specify that translated views that are relatively further away from the first texture image and the second texture image may have relatively higher error. For example where the first texture image depicts the northern wall and the second texture image depicts a southern wall, a translated view, corresponding to an eastern wall, may have a relatively higher visual error because the eastern wall may not be adequately depicted by the first texture image and/or the second texture image.

[0025] In some embodiments, a graph may be generated (e.g., Figs. 3A-3C). The graph may represent one or more texture images available to texture the geometry, and may be navigated when generating a current view to display through the visualization interface. For example, the graph comprises a first node representing the first texture image, a second node representing the second texture image, and/or other nodes representing other texture images. In an example, when a current view corresponds to the first node, then the current view is generated based upon the first texture image. The graph may comprise a transitional edge between the first node and the second node. The transitional edge may correspond to the transition space between the first texture image and the second texture image (e.g., points along the transitional edge may correspond to translated views derived from the textured geometry textured by the first texture image and/or the second texture image). In an example of determining the error basin, a first image feature of a first rendered view (e.g., derived from the textured geometry) of the scene at a first point along the transitional edge may be obtained. A second image feature of a second rendered view (e.g., derived from the textured geometry) of the scene at a second point along the transitional edge may be obtained. A visual error measurement may be determined based

upon comparing the first image feature of the first rendered view to the second image feature of the second rendered view (e.g., a color similarity comparison).

[0026] One or more transition zones within the transition space may be defined. It may be appreciated that in one example, the transition space may correspond to a multi-
5 dimensional space that may represent translated views between a plurality of texture images, and that merely a transitional space between the first texture image and the second texture image is described for simplicity. At 108, a first transition zone may be defined within the transition space based upon one or more first translated views being below an error threshold within the error basin. The first transition zone may define a first translated
10 view experience for the one or more first translated views (e.g., a user may freely navigate within the one or more first translated views through the visualization using unrestricted navigation movement). In an example, a first translated view may correspond to a stove area of the renovated kitchen. The first translated view may have a relatively lower error within the error basin because the first texture image depicts a substantial portion of the
15 stove area, and thus the first translated view may be accurately generated from the first texture image and/or other texture images (e.g., the textured geometry).

[0027] At 110, a second transition zone may be defined within the transition space based upon one or more second translated views being above the error threshold within the error basin. The second transition zone may define a second translated view experience for the
20 one or more second translated views. The second translated view experience may specify restricted navigation movement for the one or more second translated views within the second transition zone. In an example, the restricted navigation movement may correspond to a snapback force from a current view position to a current view derived from at least one of the first texture image, the second texture image, or the first transition zone. For
25 example, the user may attempt to navigate the visualization towards a ceiling of the renovated kitchen, which may be derived from a second translated view within the second transition zone. When a user pauses navigational movement, a snapback force (e.g., a subtle transitional pull) may be applied to transition the current view from the ceiling towards an area depicted by a texture image (e.g., the stove area depicted by the first
30 texture image) or the first transitional zone. In this way, an interactive navigation experience of the scene, through the visualization, may be provided by one or more current views (e.g., a view of the scene currently provided by the visualization interface), such that navigation within the visualization may be defined based upon one or more transition zones. At 112, the method ends.

[0028] Fig. 2A illustrates an example 200 of a first texture image 204 and a second texture image 206 depicting a scene 202. In an example, the scene 202 corresponds to an outdoor location comprising a building, a cloud, a sun, a tree, and a road. The first texture image 204 of the scene 202 may be captured from a first viewpoint. For example, a first camera 201 may capture a photo depicting the cloud, the sun, the tree, and a portion of the building. The second texture image 206 of the scene 202 may be captured from a second viewpoint. For example, a second camera 203 (e.g., which may be the first camera moved to a different location) may capture a photo depicting the entire scene 202. The first texture image 204, the second texture image 206, and/or other texture images may be used to create a visualization comprising a multi-dimensional representation of the scene 202 that may be navigated in multiple dimensions (e.g., a user may interact with the visualization to explore the scene 202 in three-dimensional space).

[0029] Fig. 2B illustrates an example of a system 250 configured for defining transition zones for navigating a visualization 276. The system 200 may comprise an error estimation component 258 and/or a zone definition component 274. In an example, a geometry 252 may comprise a multi-dimensional representation of a surface of a scene, such as the scene 202 illustrated in a Fig. 2A. One or more textured images may be used to texture (e.g., assign color values to geometry pixels) the geometry 252 to create textured geometry. The textured geometry may be used to create one or more current views of a visualization representing the scene 202. For example, a first texture image 204 may depict the scene 202 from a first viewpoint, and a second texture image 206 may depict the scene from a second viewpoint. A current view of the scene 202 (e.g., viewed through the visualization 276) may directly correspond to the first texture image 204 (e.g., a current view of a cloud, a sun, a tree, and a portion of a building), directly correspond to the second texture image 206 (e.g., a current view of the cloud, the sun, the tree, and a rooftop and a couple of side portions of the building), or may correspond to a translated view derived from the textured geometry. Because the translated view may not directly correspond to a single texture image, the translated view may have a degree of visual error when displayed to a user. Accordingly, navigation between one or more translated views may be defined based upon one or more transition zones defined based upon an error basin 272.

[0030] The error estimation component 258 may be configured to determine the error basin 272 for a transition space between the first texture image 204 and the second texture image 206. In particular, the error estimation component 258 is configured to project the

first texture image 204 and the second texture image 206 onto the geometry 252 to create textured geometry. The transition space may correspond to a portion of the textured geometry that is not entirely depicted by either the first texture image 204 nor entirely depicted by the second texture image 206. The error estimate component 258 may
5 determine the error basin 272 for the transition space based upon a visual error measurement (e.g., a visual error between features of translated views between the first texture image and the second texture image; an accurate geometry measurement; a resolution fallout measurement; a pixel occlusion measurement; a color difference measurement; etc.).

10 **[0031]** The zone definition component 274 may be configured to define one or more transition zones for navigating the visualization 276 based upon the error basin 272, as illustrated in example 200 of Fig. 2A. It may be appreciated that in one example, navigation of the visualization 276 may correspond to multi-dimensional navigation, such as three-dimensional navigation, and that merely one-dimensional and/or two-dimensional
15 navigation are illustrated for simplicity. It may be appreciated that in one example, a transition zone may represent multi-dimensional navigation, such as three-dimensional navigation within the visualization 276, and that merely a two-dimensional transition zone is illustrated for simplicity. In an example, the zone definition component 274 may define a first transition zone 266 within which a virtual camera 210 may transition through the
20 scene as a rendering viewpoint to generate one or more current views of the scene. The first transition zone 266 may be defined based upon one or more first translated views being below an error threshold within the error basin 272 (e.g., a first translated view of the cloud, the tree, the sun, and the building (e.g., where a first side 207 of the building was facing the first camera 201 and the second camera 203 that respectively acquired the
25 first texture image 204 and the second texture image 206) may have a relatively lower visual error because both the first texture image 204 and the second texture image 206 depict the first translated view). The first transition zone 266 may specify a first translated view experience (e.g., unrestricted multi-dimensional navigation movement (e.g., as 'viewed' through virtual camera 210)). For example, a user may freely navigate and/or
30 pause within the first transition zone 266 while exploring the visualization 276.

[0032] The zone definition component 274 may define a second transition zone 264 within which the virtual camera 210 may transition through the scene as a rendering viewpoint to generate one or more current views of the scene. The second transition zone 264 may be defined based upon one or more second translated views being above the error

threshold within the error basin 272 (e.g., a second translated view comprising a second side 209 of the building may have a relatively higher visual error because the second side 209 of the building is merely depicted by the second texture image 206 and/or was not directly facing the second camera 203 that acquired the second texture image 206). The

5 second transition zone 264 may specify a second translated view experience (e.g., restricted multi-dimensional navigation movement). For example, a user may navigate within the second transition zone 264. However, responsive to a navigation pause, a current view position within the second transition zone 264 may be transitioned back to a current view associated with the first texture image 204, the second texture image 206,

10 and/or the first transition zone 266. It will be appreciated that the zone definition component 274 may define one or more additional transition zones, such as a third transition zone 262 defining a third translated view experience (e.g., a snapback force may be applied during active navigation and/or a navigation pause (e.g., a 'view' through virtual camera 210 may be not be available)). In an example, the third transition zone may

15 be associated with a relatively strong snapback force, for example, because a backside of the building is merely depicted by the second texture image 206 and/or there may be a relatively sparse amount of data available for the backside of the building because the backside of the building may be materially occluded by the first side 207 of the building when the second texture image 206 was acquired by the second camera 203 (e.g., given

20 the orientation of the second camera 203 to the building when the second texture image 206 was acquired). Accordingly, there may be a relatively high degree of error associated with the third transition zone 262 as interpolation, filling, etc. may be employed to populate the third transition zone 262. Given the relatively high degree of error, sparse data available and/or limited user experience resulting therefrom in the third transition

25 zone 262, user navigation within the third transition zone 262 may be substantially constrained, for example.

[0033] Figs. 3A-3C illustrate examples of graphs generated by a graph component 302. In some embodiments, the graph component 302 is configured to generate a first graph 304 based upon one or more texture images depicting a scene from various viewpoints, as

30 illustrated by example 300 of Fig. 3A. The first graph 304 comprises one or more nodes (e.g., a first node, a second node, a third node, and a fourth node) connected by one or more transitional edges. A node represents a texture image, and a transitional edge represents transition space between two texture images. Because the one or more nodes do not overlap (e.g., a first texture image, represented by the first node, depicts a first portion

of a scene that does not overlap with a second portion of the scene depicted by a second texture image represented by the second node), transitional space along the one or more transitional edges may have relatively higher error (e.g., error resulting from occlusion because portions of the scene are not depicted by the one or more texture images). Thus, an error basin may have relatively higher error estimates for transitional space corresponding to the non-overlapping portions.

[0034] In some embodiments, the graph component 302 is configured to generate a second graph 334 based upon one or more texture images depicting a scene from various viewpoints, as illustrated by example 330 of Fig. 3B. The second graph 334 comprises one or more nodes connected by one or more transitional edges, where a node represents a texture image. Because at least some of the nodes overlap (e.g., a first texture image depicts a stove area and a refrigerator area of a renovated kitchen, and a second texture image depicts the stove area and an island area of the renovated kitchen), transitional space corresponding to overlapping portions may have relatively lower error because multiple texture images may depict portions of the scene. Transitional space corresponding to non-overlapping portions 336 may have relatively higher error because some portions of the scene may not be depicted or may be merely depicted by a single texture image. Thus, an error basin may have relatively higher error estimates for transitional space corresponding to non-overlapping portions 336 and relatively lower error estimates for transitional space corresponding to overlapping portions.

[0035] In some embodiments, the graph component 302 is configured to generate a third graph 364 based upon one or more texture images depicting a scene from various viewpoints, as illustrated by example 360 of Fig. 3C. The third graph 336 comprises one or more nodes connected by one or more transitional edges, where a node represents a texture image. Because the one or more nodes overlap, transitional space along the one or more transitional edges may have relatively lower error because multiple texture images may depict portions of the scene. Thus, an error basin may have relatively lower error estimates for transitional space corresponding to the overlapping portions.

[0036] Fig. 4 illustrates an example 400 of unrestricted navigation movement for a current view of a visualization. In an example, the visualization corresponds to a visualization 276 of a scene depicting a building and outdoor space, as illustrated in example 250 of Fig. 2B. The visualization 276 may have been derived from one or more texture images, such as a first texture image 204 and a second texture image 206 of Fig. 2B. In an example, a user may navigate to a current view 402 depicting a cloud and a

portion of a sun. The current view 402 may correspond to the first texture image 204 of the scene. Because the current view 402 corresponds to the first texture image 204, the user may be allowed to freely navigate from the current view 402 to a new view that also corresponds to the first texture image 204 without a snapback force and/or other
5 restrictions.

[0037] Fig. 5 illustrates an example 500 of unrestricted navigation movement for one or more first translated views of a visualization. In an example, the visualization corresponds to a visualization 276 of a scene depicting a building and outdoor space, as illustrated in example 250 of Fig. 2B. One or more transition zones may have been defined for a
10 transition space of the visualization 276. For example, a first transition zone 266 may specify that a first transition view experience, such as unrestricted navigation movement, is to be used when a user navigates within the first transition zone 266. For example, a user may navigate to a current view 502 depicting a tree and a street from a northwestern facing viewpoint. The current view 502 may correspond to a translated view within the
15 first transition zone 266. For example, the first texture image 204 may depict the tree from a northern facing viewpoint and the second texture image 206 may depict the tree from an western facing viewpoint, such that both the first texture image 204 and the second texture image 206 are used to create the current view 502 depicting the tree from the northwestern facing viewpoint (e.g., the first texture image 204 and the second texture image 206 may
20 be projected onto a geometry representing a three-dimensional surface of the tree). Because the current view 502 is within the first transition zone 266, the user may be allowed to freely navigate from the current view 502 to a new view within the first transition zone 266 without a snapback force and/or other restrictions.

[0038] Fig. 6 illustrates an example 600 of restricted navigation movement for one or
25 more second translated views of a visualization. In an example, the visualization corresponds to a visualization 276 of a scene depicting a building and outdoor space, as illustrated in example 250 of Fig. 2B. One or more transition zones may have been defined for a transition space of the visualization 276. For example, a second transition zone 264 may specify that a second transition view experience, such as restricted navigation
30 movement (e.g., a snapback force and/or other view movement restrictions may be applied during navigation and/or during a navigation pause), is to be used when a user navigates within the second transition zone 264. For example, a user may navigate to a current view 602 depicting a building. The current view 602 may correspond to a translated view within the second transition zone 264. Because the current view 602 is within the second

transition zone 264, the user may be allowed to navigate within the second transition zone 264. Responsive to a navigation pause, a snapback force may “pull” the current view 602 to a new view (e.g., a view corresponding to a first transition zone 266 or a view derived from a texture image). That is, the user may visually explore the scene within the second transition zone 264, but when the user pauses on a particular view, the snapback force may translate the view to a new view corresponding to a first texture image 204, a second texture image 206, or the first transition zone 266 of Fig. 2B. It will be appreciated that navigation movement may be even further constrained in a transition zone corresponding to third transition zone 262 as illustrated in Fig. 2B, for example.

10 **[0039]** Fig. 7 illustrates an example of a system 700 configured for generating a confidence mask and/or for generating a color relationship. The system 700 comprises a color model component 706 and/or a confidence mask component 710. The color model component 706 may be configured to generate a first color model 707 for a day texture image 702 depicting a scene during daylight hours (e.g., the day texture image 702 may depict a cloud and a relatively well light view of a building and street). The color model component 706 may be configured to generate a second color model 708 for a night texture image 704 depicting the scene during nighttime hours (e.g., the night texture image 704 may depict a shadowy building and street). The color model component 706 may be configured to establish a color relationship 709 between the day texture image 702 and the night texture image 704 based upon the first color model 707 and the second color model 708. The color model component 706 may be configured to blend color from the first texture image 702 and/or the second texture image 704 to create a current translated view of the scene. The current translated view may be displayed through a visualization interface.

25 **[0040]** The confidence mask component 710 may be configured to generate a confidence mask comprising one or more pixel confidences. In an example, the confidence mask is generated based upon image features, inaccurate geometry measurements, resolution fallout measurements, pixel occlusion measurements, color difference measurements, and/or other image information. In an example, a first pixel confidence may be generated for a first geometry pixel of a geometry representing a multi-dimensional surface of a scene. The first pixel confidence may specify a confidence that an object (e.g., a portion of a cloud corresponding to the first geometry pixel) is represented in both a first texture image 702 and a second texture image 704. Responsive to the first pixel confidence being below a confidence threshold, the confidence mask

component 710 may determine that the first geometry pixel corresponds to a transient occluder 712 (e.g., the cloud may be present in the first texture image 702, but not in the second texture image 704). In an example, the confidence mask component 710 may modify the first geometry pixel based upon a blending technique, an inpaint technique, a shading technique, a fadeout technique, and/or other techniques to compensate for the transient occluder 712.

[0041] An embodiment of filling an untextured visualization portion of a visualization is illustrated by an exemplary method 800 of Fig. 8. At 802, the method starts. At 804, one or more texture images may be projected onto a geometry a scene to create a textured geometry of the scene. For example, the geometry may represent a multi-dimensional surface of the scene depicted by the one or more texture images. The one or more texture images may be projected onto the geometry to assign texture, such as color values, to geometry pixels of the geometry. Because the one or more texture images may not depict every portion of the scene (e.g., a rooftop of a building may not be depicted or “seen by” by one or more textured images depicting the building and an outdoor space), the textured geometry may comprise an untextured geometry portion that is not depicted by at least one texture image.

[0042] At 806, a visualization of the scene may be generated based upon the textured geometry. The visualization may comprise an untextured visualization portion corresponding to the untextured geometry portion (e.g., the untextured visualization portion may correspond to a portion of the scene for which relatively minimal to no image data is available). At 808, the untextured visualization portion may be filled (e.g., textured or inpainted). In an example, low resolution imagery, depicting the portion of the scene corresponding to the untextured visualization portion, may be used to inpaint the untextured visualization portion with relatively low resolution image information. In another example, a neighboring pixel region may be expanded to visually cover at least a portion of the untextured visualization portion (e.g., multiple neighboring pixel regions may be expanded to visually cover all or substantially all of the untextured visualization portion). In another example, a circular (e.g., or other shaped) image transition window may be displayed (e.g., to visually cover at least a portion of the untextured visualization portion). The circular image transition window may be configured to transition a current view of the scene to a texture image (e.g., a texture image depicting the neighboring pixel region). In one example, the circular image transition window may be displayed while the visualization is in an overview mode (e.g., a zoomed out state). In another example, the

circular image transition window may be displayed during other modes, such as regular viewing modes, to indicate where additional imagery of the scene (e.g., the texture image) may be available (e.g., a user may be able to jump from a first street side bubble to a second street side bubble utilizing the circular image transition window).

5 **[0043]** Still another embodiment involves a computer-readable medium comprising processor-executable instructions configured to implement one or more of the techniques presented herein. An example embodiment of a computer-readable medium or a computer-readable device that is devised in these ways is illustrated in Fig. 9, wherein the implementation 900 comprises a computer-readable medium 908, such as a CD-R, DVD-
10 R, flash drive, a platter of a hard disk drive, etc., on which is encoded computer-readable data 906. This computer-readable data 906, such as binary data comprising at least one of a zero or a one, in turn comprises a set of computer instructions 904 configured to operate according to one or more of the principles set forth herein. In some embodiments, the processor-executable computer instructions 904 are configured to perform a method 902,
15 such as at least some of the exemplary method 100 of Fig. 1, for example. In some embodiments, the processor-executable instructions 904 are configured to implement a system, such as at least some of the exemplary system 250 of Fig. 2B and/or at least some of the exemplary system 700 of Fig. 7, for example. Many such computer-readable media are devised by those of ordinary skill in the art that are configured to operate in
20 accordance with the techniques presented herein.

[0044] As used in this application, the terms "component", "module", "system", "interface" and the like are generally intended to refer to a computer-related entity, either hardware, a combination of hardware and software, software, or software in execution. For example, a component includes a process running on a processor, a processor, an object,
25 an executable, a thread of execution, a program, or a computer. By way of illustration, both an application running on a controller and the controller can be a component. One or more components residing within a process or thread of execution and a component is localized on one computer or distributed between two or more computers.

[0045] Furthermore, the claimed subject matter is implemented as a method, apparatus, 30 or article of manufacture using standard programming or engineering techniques to produce software, firmware, hardware, or any combination thereof to control a computer to implement the disclosed subject matter. The term "article of manufacture" as used herein is intended to encompass a computer program accessible from any computer-readable device, carrier, or media. Of course, many modifications may be made to this

configuration without departing from the scope or spirit of the claimed subject matter.

[0046] Fig. 10 and the following discussion provide a brief, general description of a suitable computing environment to implement embodiments of one or more of the provisions set forth herein. The operating environment of Fig. 10 is only an example of a
5 suitable operating environment and is not intended to suggest any limitation as to the scope of use or functionality of the operating environment. Example computing devices include, but are not limited to, personal computers, server computers, hand-held or laptop devices, mobile devices, such as mobile phones, Personal Digital Assistants (PDAs), media players, and the like, multiprocessor systems, consumer electronics, mini
10 computers, mainframe computers, distributed computing environments that include any of the above systems or devices, and the like.

[0047] Generally, embodiments are described in the general context of “computer readable instructions” being executed by one or more computing devices. Computer readable instructions are distributed via computer readable media as will be discussed
15 below. Computer readable instructions are implemented as program modules, such as functions, objects, Application Programming Interfaces (APIs), data structures, and the like, that perform particular tasks or implement particular abstract data types. Typically, the functionality of the computer readable instructions are combined or distributed as desired in various environments.

[0048] Fig. 10 illustrates an example of a system 1000 comprising a computing device
20 1012 configured to implement one or more embodiments provided herein. In one configuration, computing device 1012 includes at least one processing unit 1016 and memory 1018. In some embodiments, depending on the exact configuration and type of computing device, memory 1018 is volatile, such as RAM, non-volatile, such as ROM, flash memory, etc., or some combination of the two. This configuration is illustrated in
25 Fig. 10 by dashed line 1014.

[0049] In other embodiments, device 1012 includes additional features or functionality. For example, device 1012 also includes additional storage such as removable storage or non-removable storage, including, but not limited to, magnetic storage, optical storage,
30 and the like. Such additional storage is illustrated in Fig. 10 by storage 1020. In some embodiments, computer readable instructions to implement one or more embodiments provided herein are in storage 1020. Storage 1020 also stores other computer readable instructions to implement an operating system, an application program, and the like. Computer readable instructions are loaded in memory 1018 for execution by processing

unit 1016, for example.

[0050] The term “computer readable media” as used herein includes computer storage media. Computer storage media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information
5 such as computer readable instructions or other data. Memory 1018 and storage 1020 are examples of computer storage media. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, Digital Versatile Disks (DVDs) or other optical storage, magnetic cassettes, magnetic tape,
10 magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by device 1012. Any such computer storage media is part of device 1012.

[0051] The term “computer readable media” includes communication media. Communication media typically embodies computer readable instructions or other data in a “modulated data signal” such as a carrier wave or other transport mechanism and
15 includes any information delivery media. The term “modulated data signal” includes a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal.

[0052] Device 1012 includes input device(s) 1024 such as keyboard, mouse, pen, voice input device, touch input device, infrared cameras, video input devices, or any other input
20 device. Output device(s) 1022 such as one or more displays, speakers, printers, or any other output device are also included in device 1012. Input device(s) 1024 and output device(s) 1022 are connected to device 1012 via a wired connection, wireless connection, or any combination thereof. In some embodiments, an input device or an output device from another computing device are used as input device(s) 1024 or output device(s) 1022
25 for computing device 1012. Device 1012 also includes communication connection(s) 1026 to facilitate communications with one or more other devices.

[0053] Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter of the appended claims is not necessarily limited to the specific features or acts described above.
30 Rather, the specific features and acts described above are disclosed as example forms of implementing the claims.

[0054] Various operations of embodiments are provided herein. The order in which some or all of the operations are described should not be construed as to imply that these operations are necessarily order dependent. Alternative ordering will be appreciated by

one skilled in the art having the benefit of this description. Further, it will be understood that not all operations are necessarily present in each embodiment provided herein.

[0055] It will be appreciated that layers, features, elements, etc. depicted herein are illustrated with particular dimensions relative to one another, such as structural dimensions
5 and/or orientations, for example, for purposes of simplicity and ease of understanding and that actual dimensions of the same differ substantially from that illustrated herein, in some embodiments.

[0056] Further, unless specified otherwise, "first", "second", or the like are not intended to imply a temporal aspect, a spatial aspect, an ordering, etc. Rather, such terms are merely
10 used as identifiers, names, etc. for features, elements, items, etc. For example, a first object and a second object generally correspond to object A and object B or two different or two identical objects or the same object.

[0057] Moreover, "exemplary" is used herein to mean serving as an example, instance, illustration, etc., and not necessarily as advantageous. As used in this application, "or" is
15 intended to mean an inclusive "or" rather than an exclusive "or". In addition, "a" and "an" as used in this application are generally be construed to mean "one or more" unless specified otherwise or clear from context to be directed to a singular form. Also, at least one of A and B and/or the like generally means A or B or both A and B. Furthermore, to the extent that "includes", "having", "has", "with", or variants thereof are used in either the
20 detailed description or the claims, such terms are intended to be inclusive in a manner similar to the term "comprising".

[0058] Also, although the disclosure has been shown and described with respect to one or more implementations, equivalent alterations and modifications will occur to others skilled in the art based upon a reading and understanding of this specification and the
25 annexed drawings. The disclosure includes all such modifications and alterations and is limited only by the scope of the following claims.


CLAIMS

1. A method for defining transition zones for navigating a visualization of a scene, comprising:
 - projecting a first texture image and a second texture image onto a geometry of a scene to create a textured geometry of the scene;
 - determining an error basin for a transition space between the first texture image and the second texture image based upon a visual error measurement, the transition space based upon the textured geometry;
 - defining a first transition zone within the transition space based upon one or more first translated views being below an error threshold within the error basin, the first transition zone specifying a first translated view experience for the one or more first translated views; and
 - defining a second transition zone within the transition space based upon one or more second translated views being above the error threshold within the error basin, the second transition zone defining a second translated view experience for the one or more second translated views.
2. The method of claim 1, the first translated view experience specifying unrestricted navigation movement for the one or more first translated views within the first transition zone; and the second translated view experience specifying restricted navigation movement for the one or more second translated views within the second transition zone, the restricted navigation movement corresponding to a snapback force from a current view position to at least one of the first texture image, the second texture image, or the first transition zone.
3. The method of claim 1, comprising:
 - generating a graph representing one or more texture images available to texture the geometry, the graph comprising a first node representing the first texture image, a second node representing the second texture image, and a transitional edge between the first node and the second node, the transitional edge corresponding to the transition space.

4. The method of claim 1, comprising:
 - providing an interactive navigation experience of the scene through one or more current views, the one or more current views comprising a current translated view provided based upon the first translated view experience or the second translated view experience.
5. A system for defining transition zones for navigating a visualization of a scene, comprising:
 - an error estimation component configured to:
 - project a first texture image and a second texture image onto a geometry of a scene to create a textured geometry of the scene; and
 - determine an error basin for a transition space between the first texture image and the second texture image based upon a visual error measurement, the transition space based upon the textured geometry; and
 - a zone definition component configured to:
 - define a first transition zone within the transition space based upon one or more first translated views being below an error threshold within the error basin, the first transition zone specifying a first translated view experience for the one or more first translated views; and
 - define a second transition zone within the transition space based upon one or more second translated views being above the error threshold within the error basin, the second transition zone defining a second translated view experience for the one or more second translated views.
6. The system of claim 5, comprising:
 - a color model component configured to:
 - generate a first color model for the first texture image and a second color model for the second texture image; and
 - establish a color relationship between the first texture image and the second texture image based upon the first color model and the second color model.
7. The system of claim 6, the color model component configured to:
 - blend color from the first texture image and the second texture image based upon the color relationship to create a current translated view of the scene.

8. The system of claim 5, comprising:
a confidence mask component configured to:
generate a confidence mask comprising one or more pixel confidences, a first pixel confidence of a first geometry pixel specifying a confidence that an object, associated with the first geometry pixel, is represented in both the first texture image and the second texture image.
9. The system of claim 8, the confidence mask component configured to:
responsive to the first pixel confidence being below a confidence threshold:
determine that the first geometry pixel corresponds to a transient occluder;
and
modify the first geometry pixel based upon at least one of a blending technique, an inpaint technique, a shading technique, or a fadeout technique.
10. The system of claim 5, comprising:
a graph component configured to:
generate a graph representing one or more texture images available to texture the geometry, the graph comprising a first node representing the first texture image, a second node representing the second texture image, and a transitional edge between the first node and the second node, the transitional edge corresponding to the transition space.

1/11

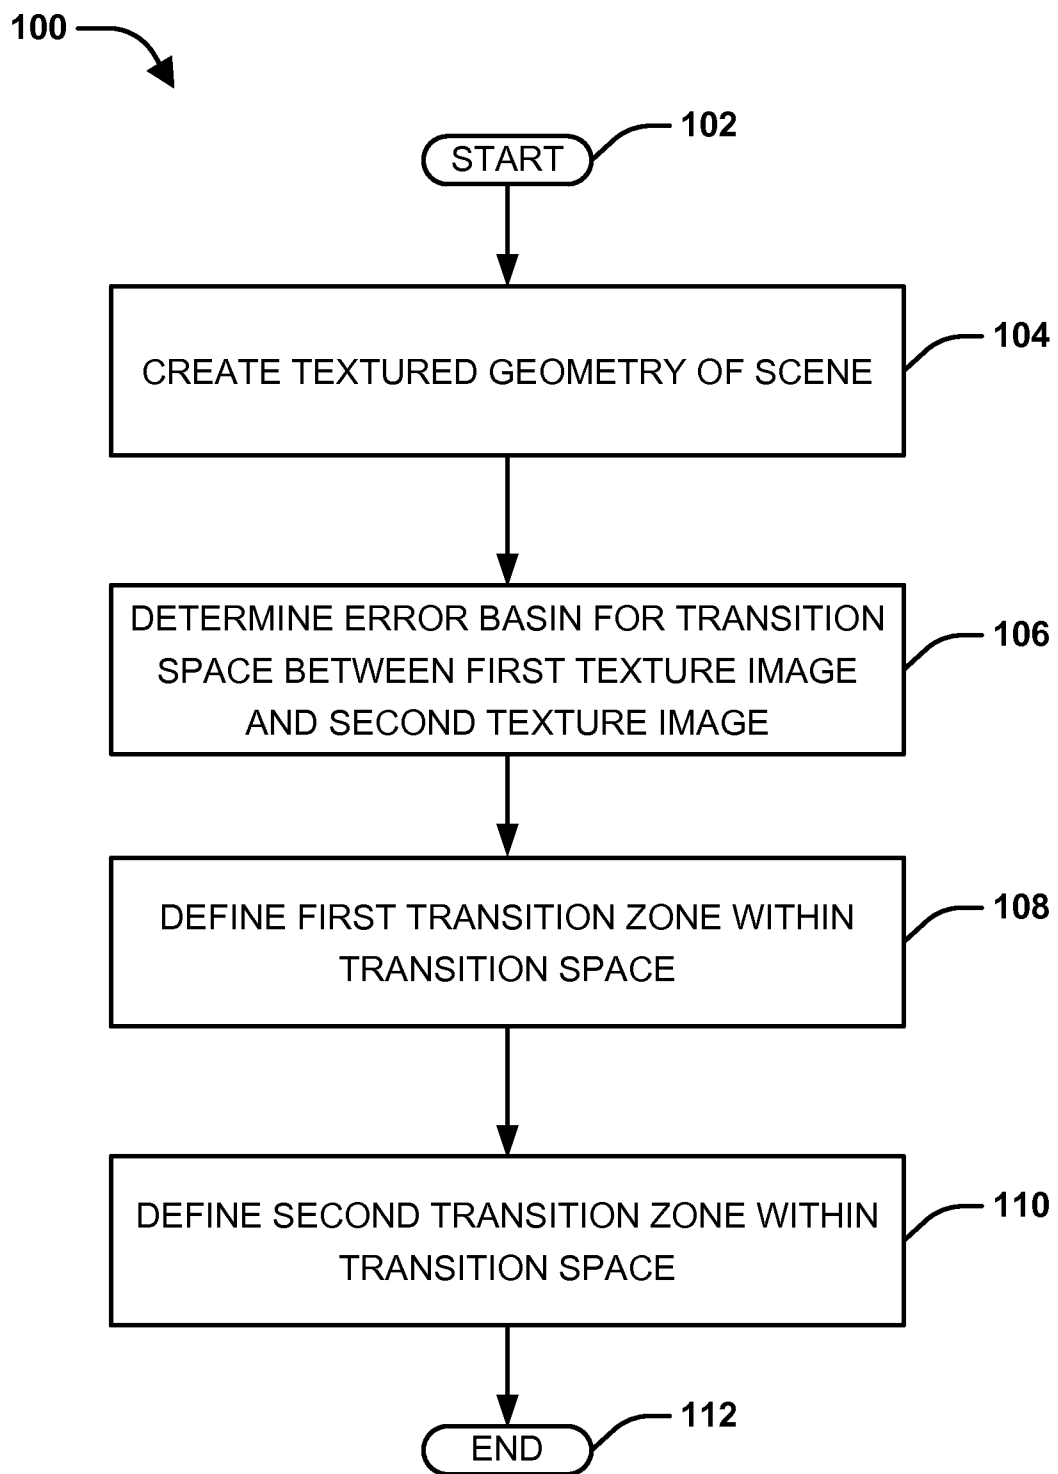**FIG. 1**

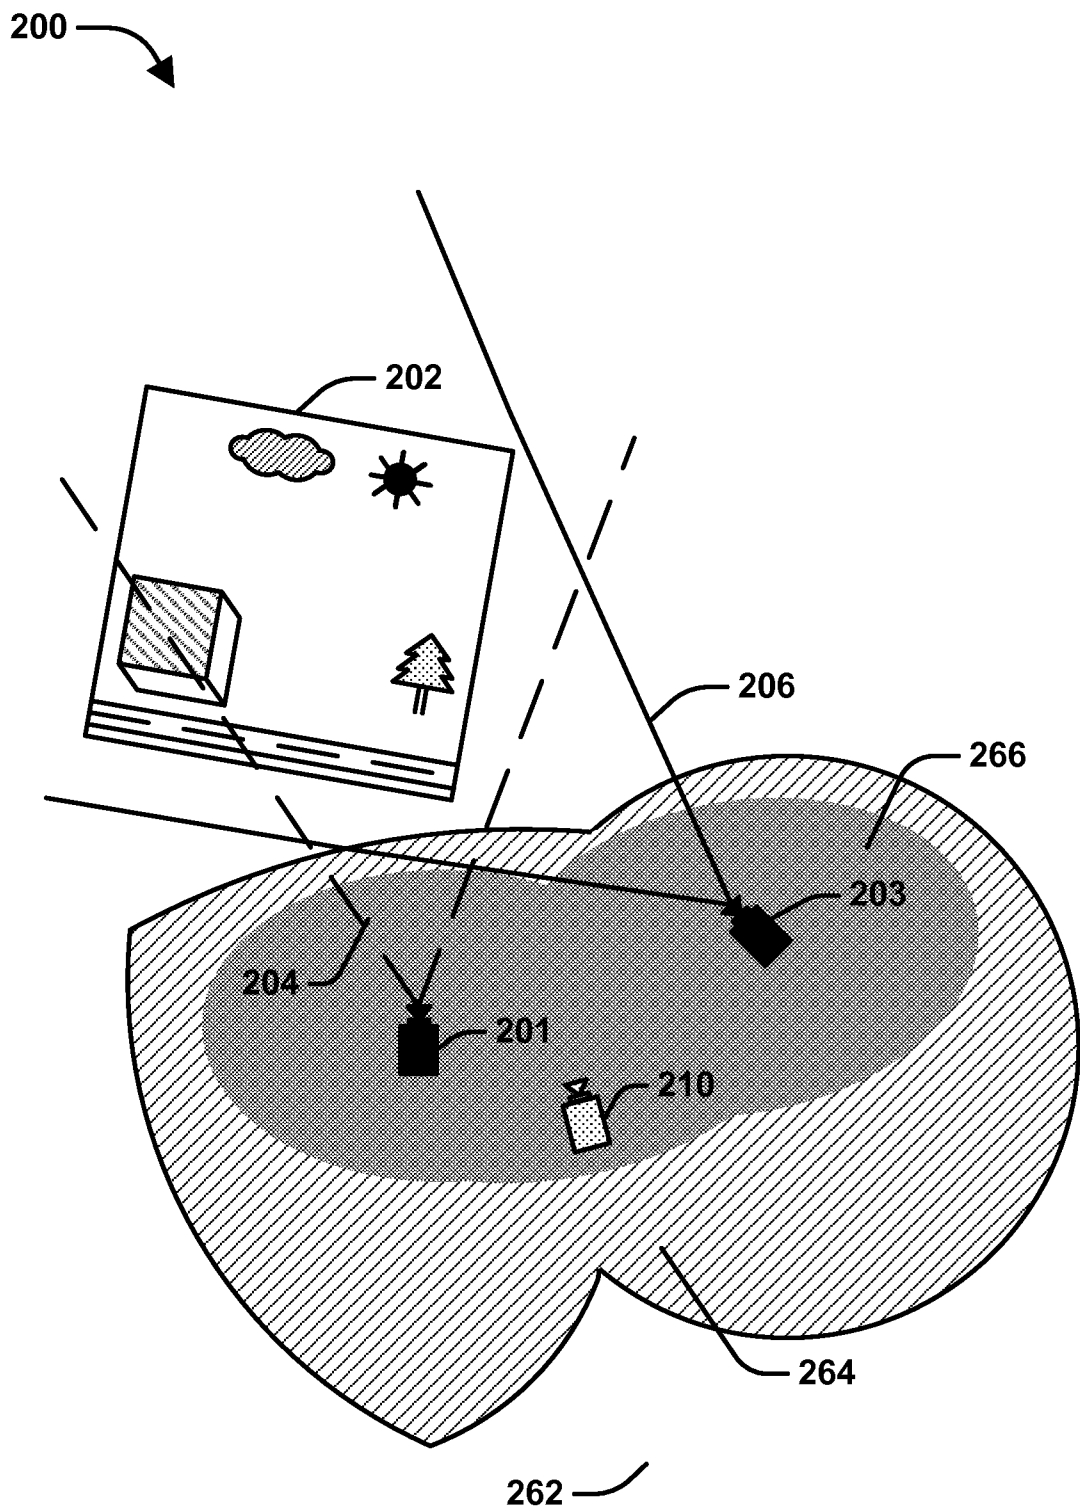
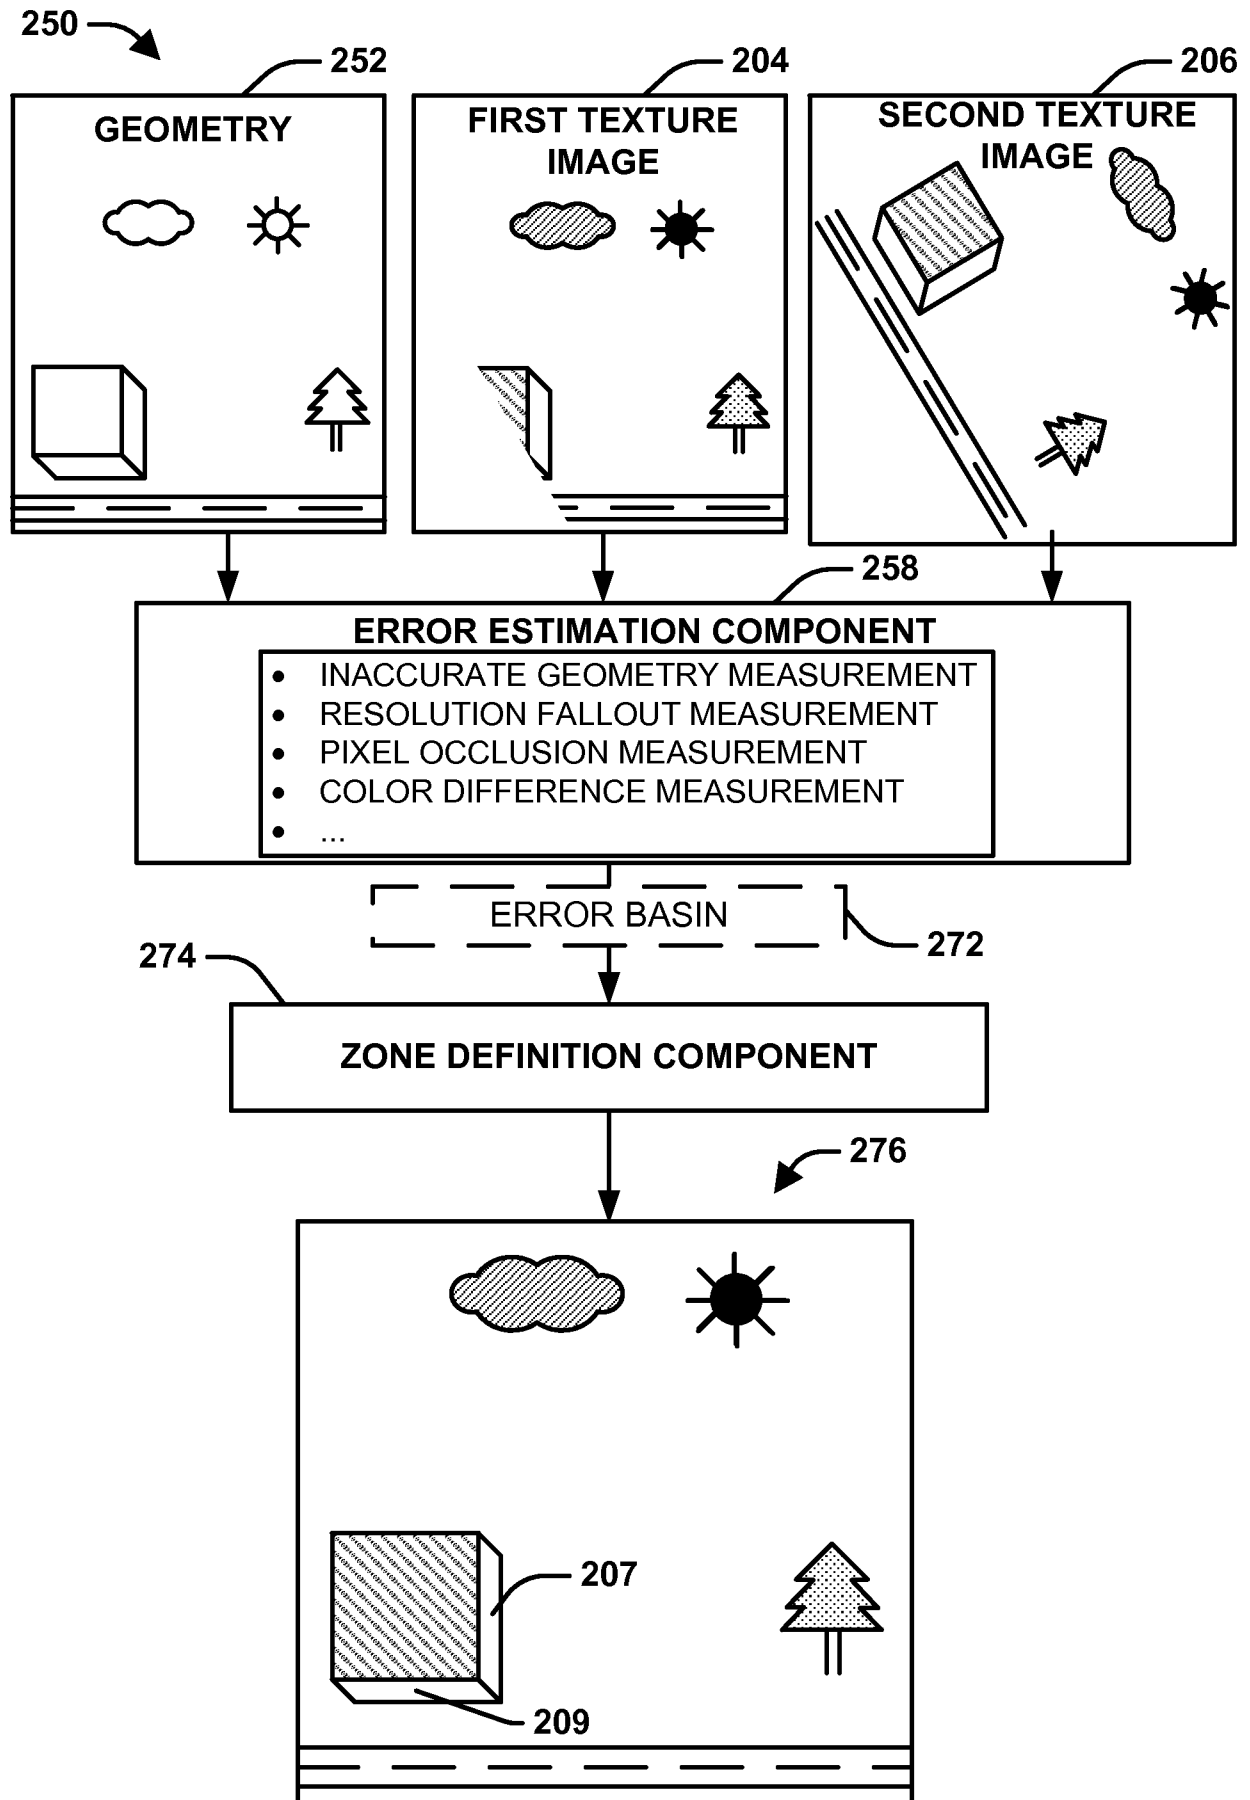


FIG. 2A

3/11

**FIG. 2B**

4/11

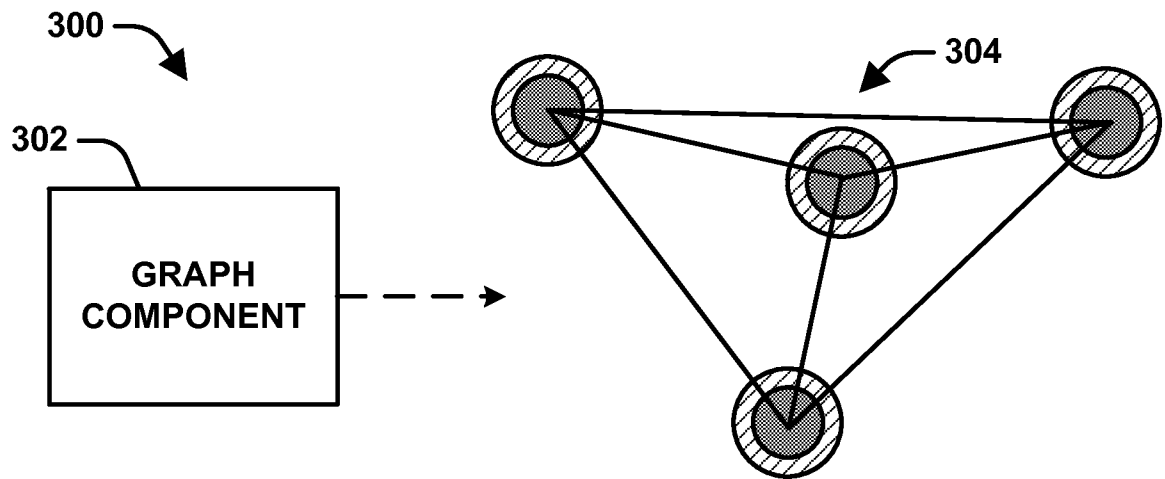


FIG. 3A

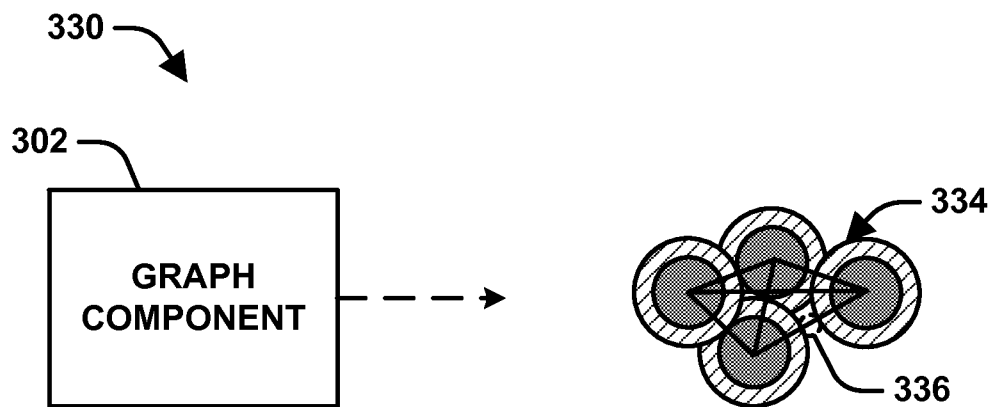


FIG. 3B

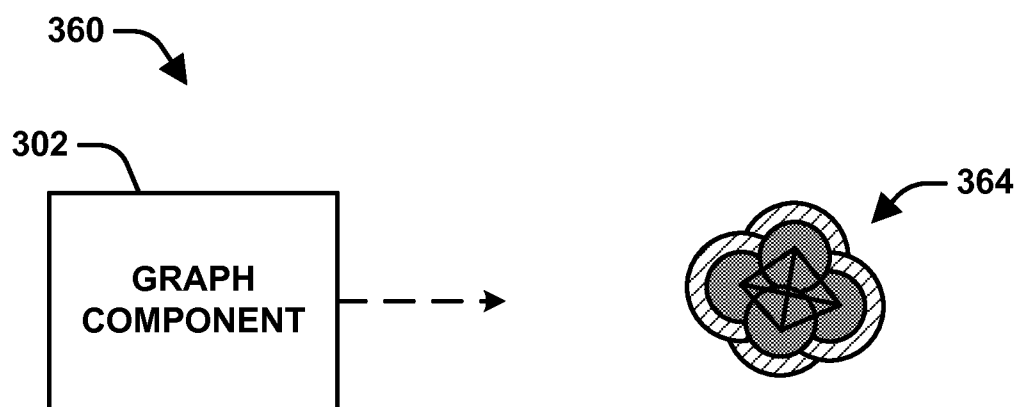


FIG. 3C

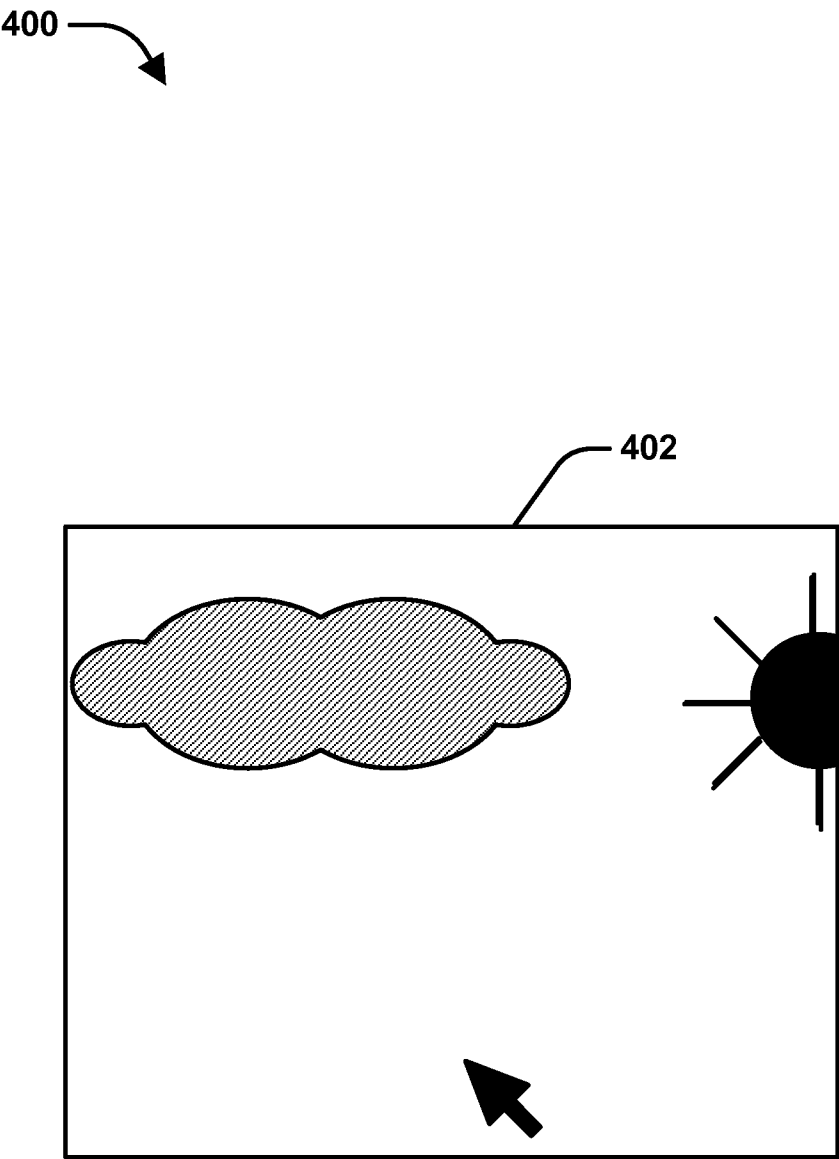


FIG. 4

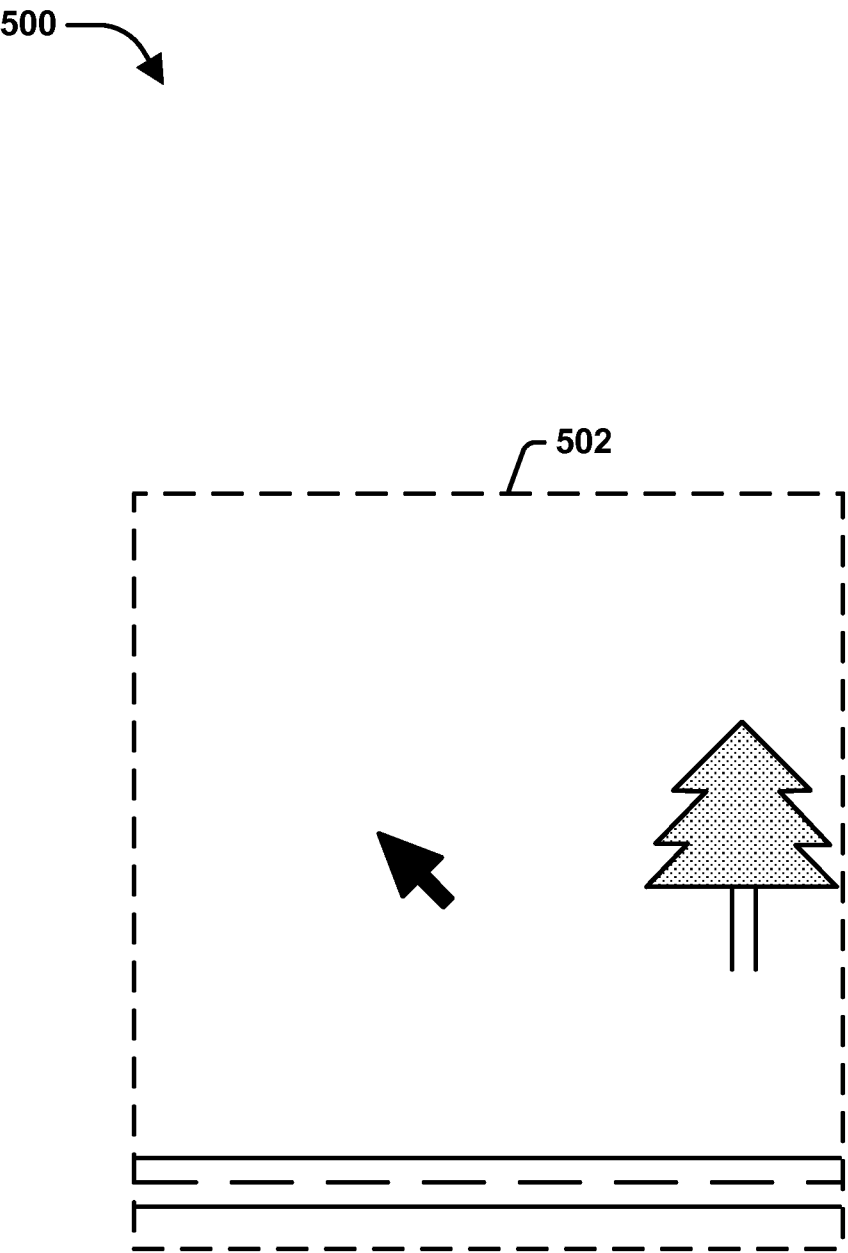


FIG. 5

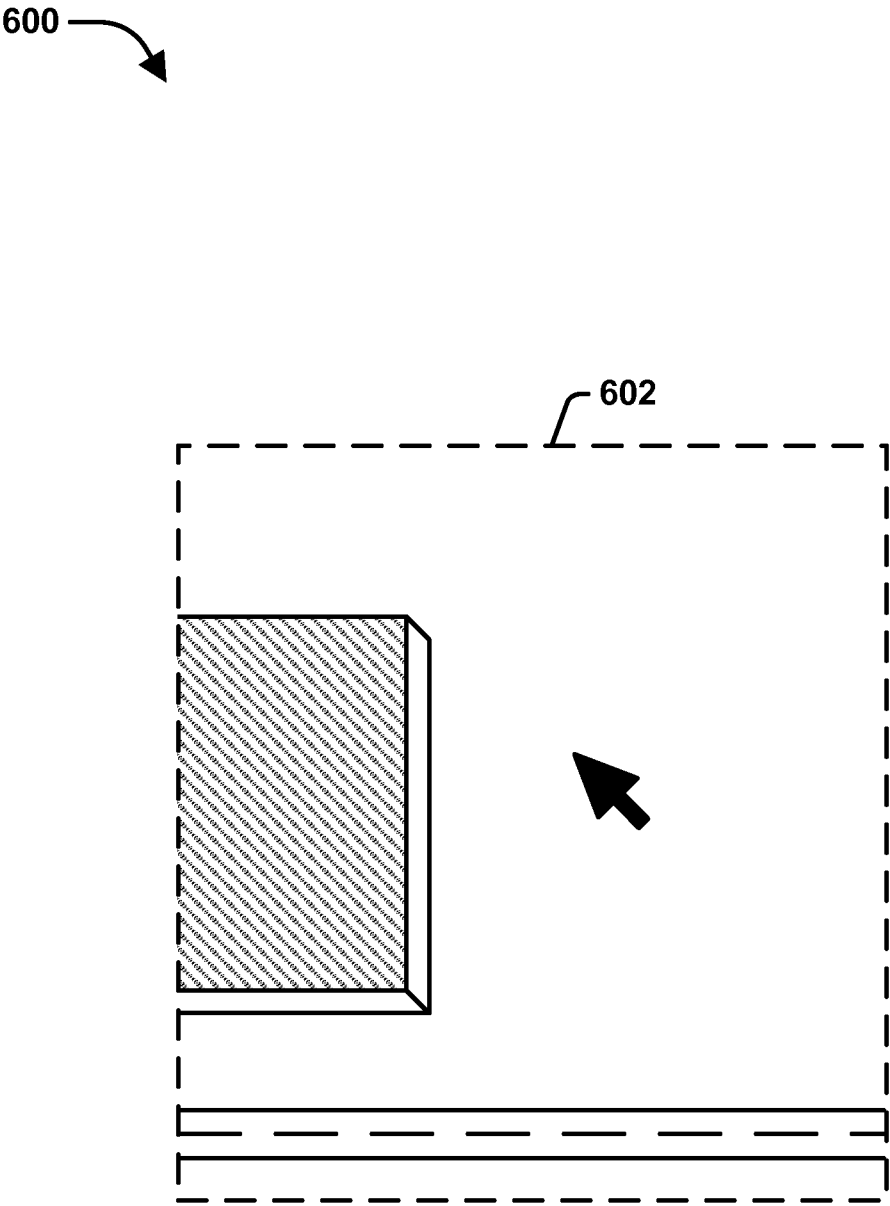
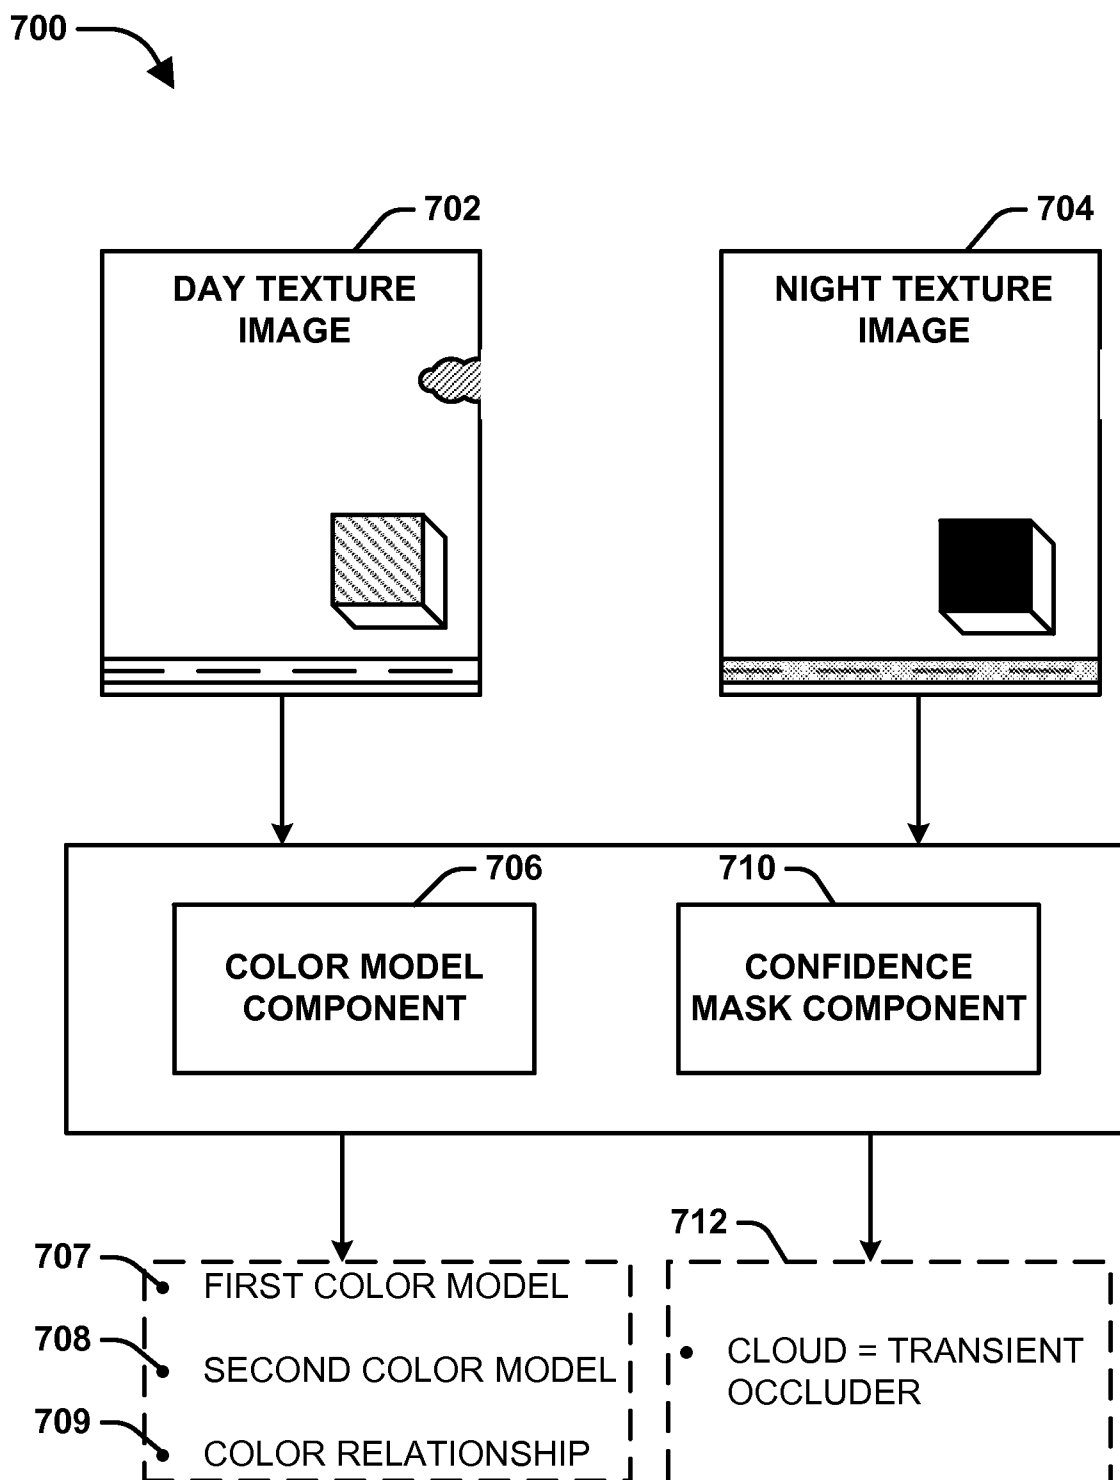
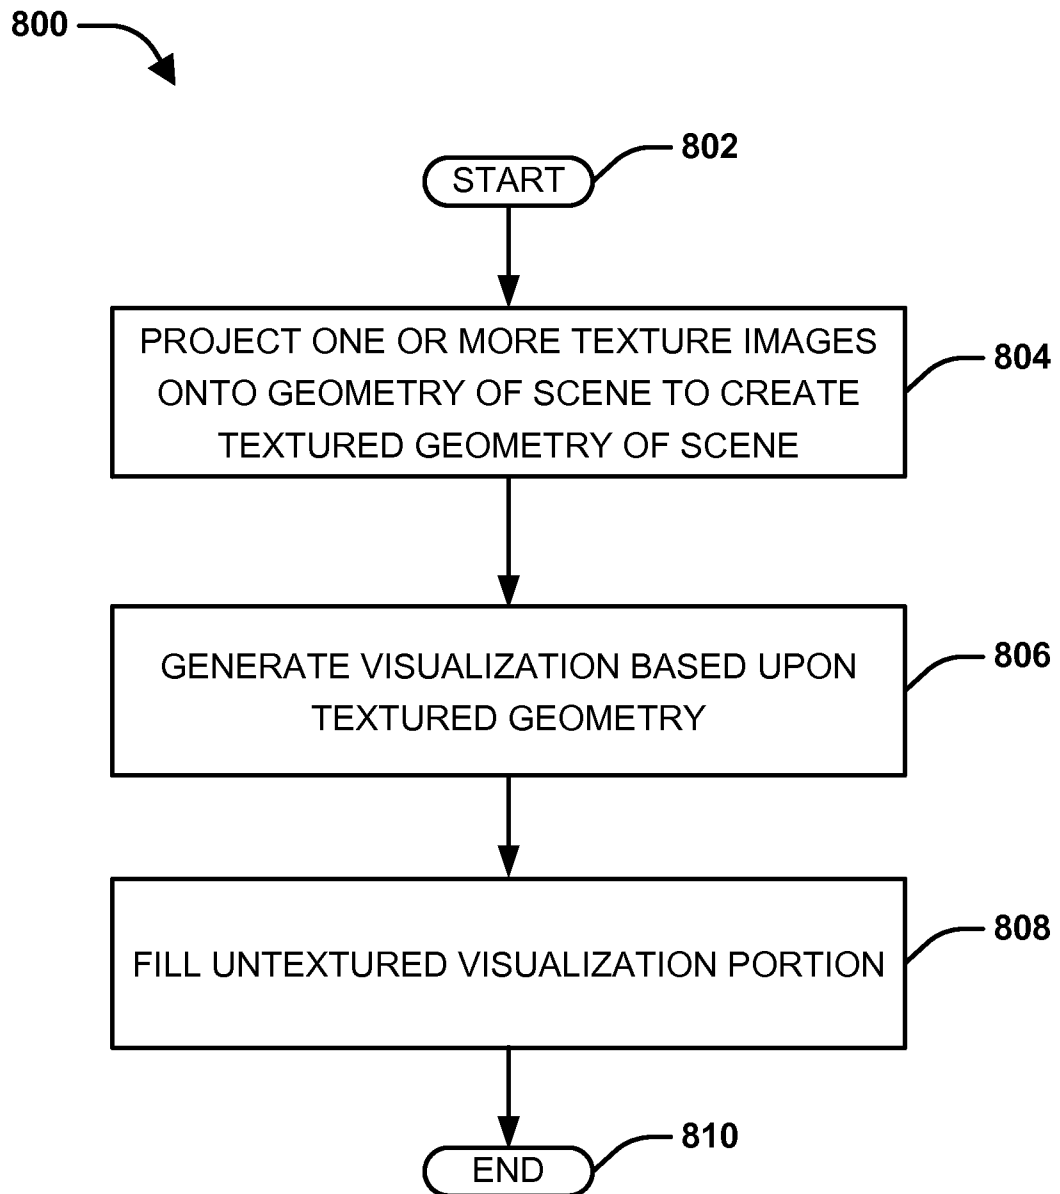


FIG. 6

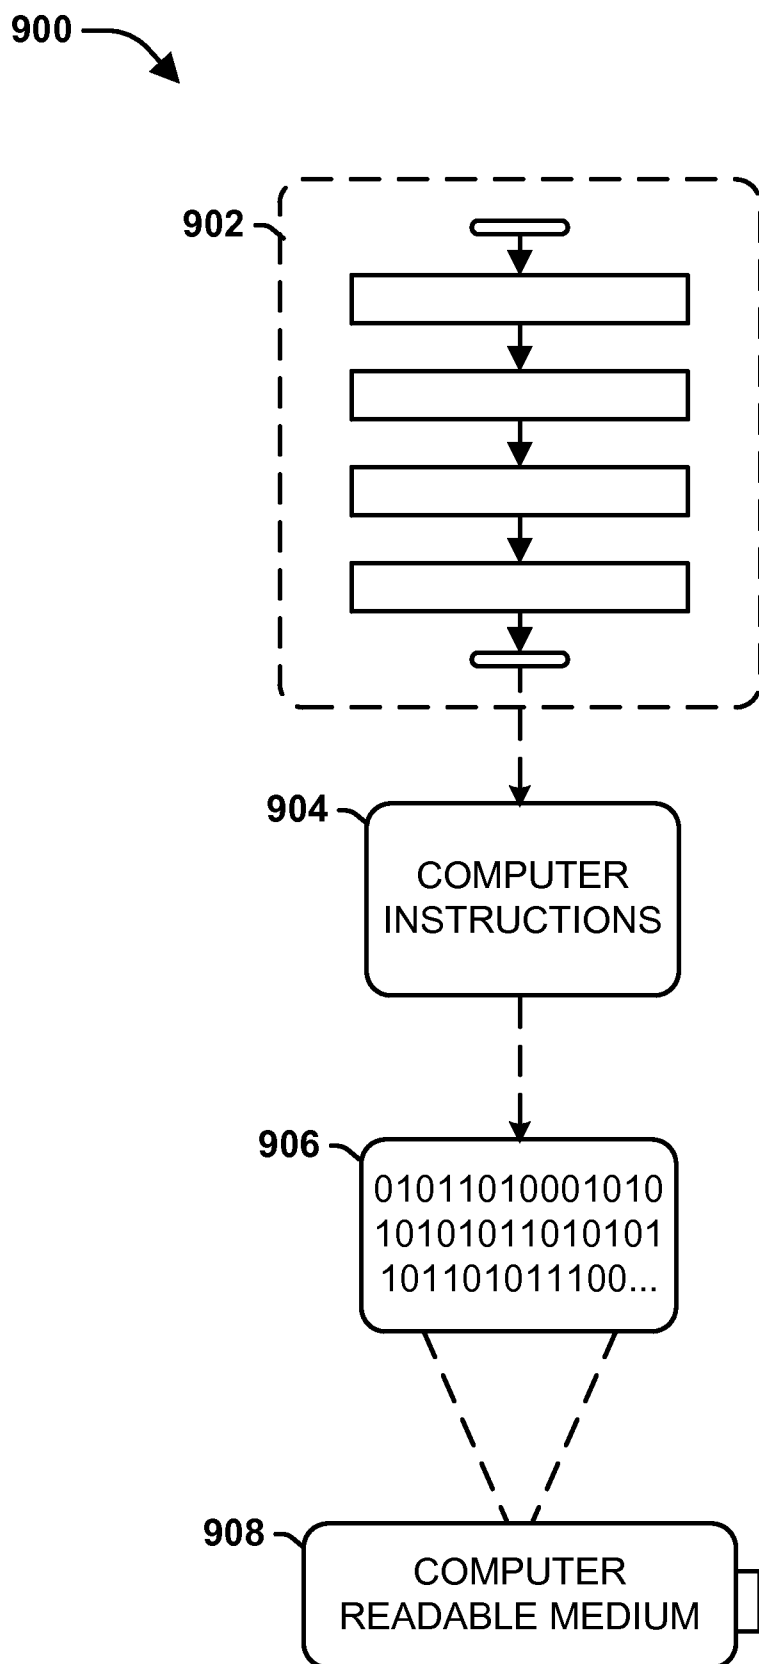
8/11

**FIG. 7**

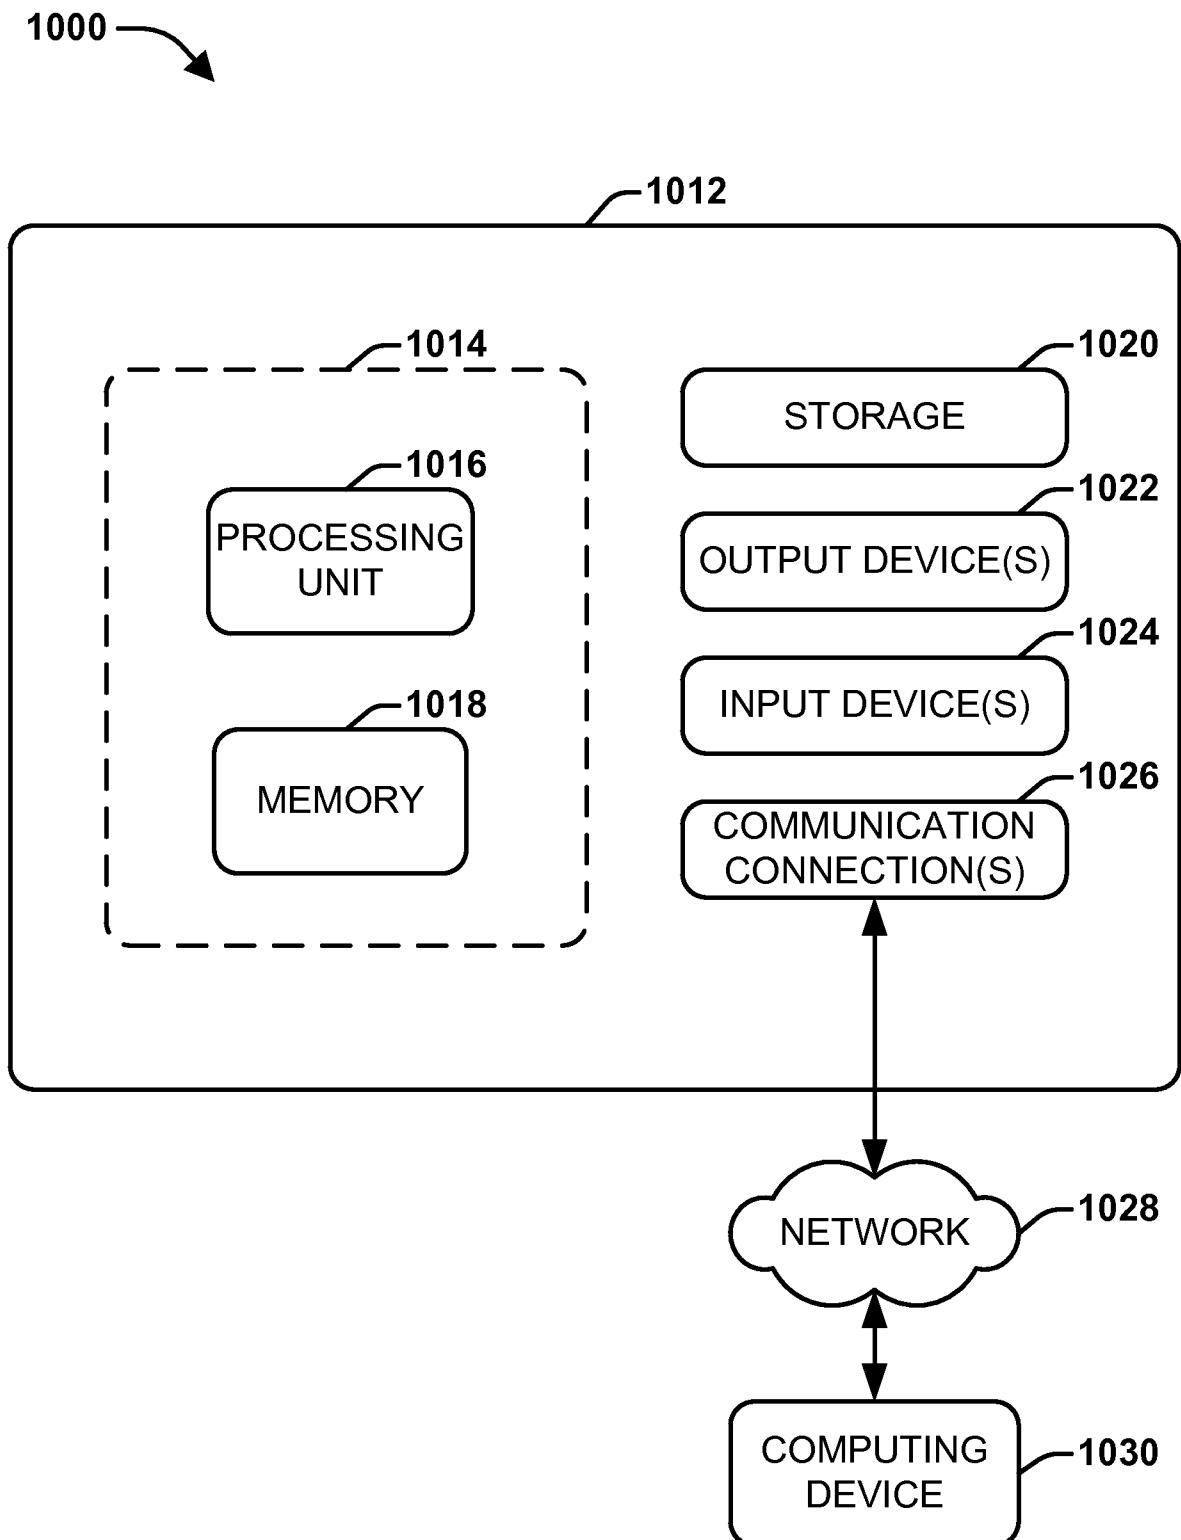
9/11

**FIG. 8**

10/11

**FIG. 9**

11/11

**FIG. 10**