

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018274 A1

(51) International Patent Classification⁷: B60T 8/00, 8/52

(21) International Application Number:
PCT/US2003/021881

(22) International Filing Date: 14 July 2003 (14.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/225,092 21 August 2002 (21.08.2002) US

(71) Applicant: HYDRO-AIRE, INC. [US/US]; 3000 Winona Avenue, Burbank, CA 91510-7722 (US).

(72) Inventors: SALAMAT, Bijan; 20144 Zimmerman Place, Santa Clarita, CA 91350 (US). COOK, Robert, D.; 25408 Avenida Escalera, Valencia, CA 91355 (US).

(74) Agents: PARKHURST, David, G. et al.; Fulwider Patton Lee & Utecht, LLP, Howard Hughes Center, 6060 Center Drive, 10th floor, Los Angeles, CA 90045 (US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR ADAPTIVE BRAKE APPLICATION AND INITIAL SKID DETECTION

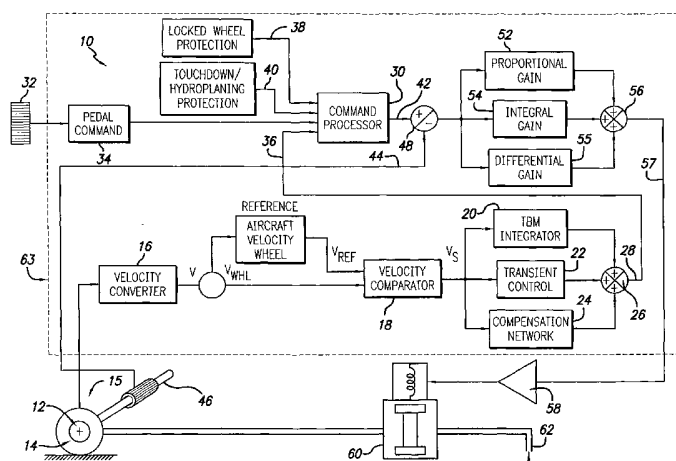

(57) Abstract: The adaptive brake application and initial skid detection system (10) allows rapid brake application and prevents deep initial skids. Brake torque is compared with a predetermined threshold brake torque. Wheel velocity error signals are also generated to indicate the difference between the wheel velocity and a reference velocity signal. A torque bias modulator integrator (20) responsive to brake torque signals adjusts the wheel velocity error signals to provide an anti-skid control signal (28). The torque bias modulator integrator (20) can also be initialized to the value of the measured brake torque when the wheel velocity error signals indicate the beginning of a skid. Brake torque difference signals are generated to indicate the difference between brake torque and a commanded brake torque, and an adjusted brake torque error signal (57) is generated in response to the brake torque difference signals.

WO 2004/018274 A1

SYSTEM AND METHOD FOR ADAPTIVE BRAKE APPLICATION AND INITIAL SKID DETECTION

BACKGROUND OF THE INVENTION

Field of the Invention:

5 This invention relates generally to deceleration control systems for vehicles, and more particularly concerns an adaptive brake application and initial skid detection system for braking of one or more wheels of an aircraft during landing that prevents deep initial skids, and to thus allow rapid brake application in a controlled manner.

10 Description of the Related Art:

Anti-skid and automatic braking systems commonly have been provided on commercial and large turbine aircraft to aid the deceleration of the aircraft upon landing. Modern anti-skid systems typically optimize braking efficiency by adapting to runway conditions and other factors affecting braking to maximize
15 deceleration, corresponding to the level of brake pressure selected by the pilot. In conventional antiskid systems, brakes are typically applied mechanically via a metering valve by the pilot, and as soon as the wheel brake pressure approaches the skid level, such as when an initial skid is detected, a brake pressure value is used to initialize the antiskid control system. However, it has been found that the success
20 of this method does can be affected by such factors as the mode of aircraft operation, aircraft weight, tire/runway interfaces, and the like. It would therefore be desirable to provide an adaptive brake application system that can adjust brake pressure or torque application to account for such factors.

Furthermore, rapid pedal application by an aircraft pilot also can often create
25 deep initial skids before an effective antiskidding brake pressure or brake torque is determined and skidding is effectively controlled by conventional antiskid and brake control systems. Eliminating or reducing initial skids would result in shorter aircraft stopping distances, which allow the aircraft to land on shorter runways, and

can result in reduced tire wear. It would thus be desirable to provide an initial skid detection system to automatically anticipate initial skid conditions and adjust to prevent deep initial skids, to allow the pilot to depress the brake pedals at any rate, while still providing for rapid brake application in a controlled manner. The present invention provides an adaptive brake application and initial skid detection system that meets these needs.

SUMMARY OF THE INVENTION

Briefly, and in general terms, the present invention provides for an adaptive brake application and initial skid detection system that allows rapid brake application, while preventing deep initial skids, by implementation of a skid anticipation system that is initialized as soon as a wheel approaches a skid level to reduce brake application pressure or torque and to apply brakes in a controlled manner.

The invention accordingly provides for a "smart" brake application and initial skid detection system for braking of a wheel of an aircraft during landing. The system is applicable to one or more wheels having a wheel brake for applying brake torque to the wheel. A brake torque sensor generates brake torque signals that are a function of the braking torque applied to the wheel brake, and the brake torque signals are compared with a predetermined threshold brake torque. A wheel speed transducer produces wheel speed signals that are a function of the rotational speed of the wheel, and a wheel velocity signal is generated based upon the wheel speed signals. The wheel velocity is compared with a reference velocity signal for generating wheel velocity error signals indicative of the difference between the aircraft wheel velocity signals and the reference velocity signal. A torque bias modulator integrator is also provided that is responsive to brake torque signals for adjusting the wheel velocity error signals to provide an anti-skid control signal, and in one currently preferred embodiment the torque bias modulator integrator is initialized with the predetermined threshold brake torque plus a predetermined constant torque value. A command processor generates a command brake torque

signal generated in response to a deceleration command, and brake torque comparison means are provided for comparing the brake torque signals with the command brake torque signal for generating brake torque difference signals indicative of the difference between the brake torque signals and the command
5 brake torque signal. Control means provide an adjusted brake torque signal to the wheel brake to control the wheel brake independently of operator brake application, in response to the brake torque difference signals. In another presently preferred embodiment, the torque bias modulator integrator is initialized to the value of a measured brake torque when the wheel velocity error signal indicates the beginning
10 of a skid.

In a currently preferred embodiment, means are also provided for adjusting the brake torque error signals by a proportional torque gain, an integral torque gain, and a differential torque gain. In another presently preferred embodiment, transient control means for providing a proportional control signal and compensation
15 network means, both responsive to the velocity error signal, are also provided, and the outputs of the transient control means and compensation network means are summed with the output of the torque bias modulator integrator.

From the above, it can be seen that the present invention provides a system and method to initiate brake control after rapid application of the brake pedal, but
20 before the onset of skidding occurs. These and other aspects and advantages of the invention will become apparent from the following detailed description and the accompanying drawings, which illustrate by way of example the features of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

25 FIGURE 1 is a schematic diagram of a "smart" brake application and initial skid detection system for an aircraft, according to the principles of the invention;

Fig. 2 shows two charts relating brake pressure, wheel velocity and brake torque over time for the "smart" brake application and initial skid detection system of the invention; and

Fig. 3 is a chart illustrating the brake force to brake slip curve for the "smart" brake application and initial skid detection system of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Effectiveness of conventional antiskid systems can be affected by the mode
5 of aircraft operation, aircraft weight, tire/runway interfaces, and similar factors. Rapid aircraft brake pedal application, especially panic application, can also create deep initial skids before antiskid control is initiated, resulting in lengthening of aircraft stopping distances and increased tire wear.

The present invention provides a system and method for direction of the
10 conditions for the onset of skidding, and the initiation of brake control to prevent deep skids prior to controlled deceleration. With reference to Fig. 1, the invention is embodied in an adaptive, or "smart" brake application and initial skid detection system 10 which can be used in aircraft braking systems, and as installed for an aircraft preferably includes a wheel speed transducer 12 for each wheel brake 14 of
15 a wheel 15 of the aircraft, for measuring wheel speed and generating wheel speed signals that are a function of the rotational speed of the brake wheel. The wheel speed signal is typically converted to a signal representing the velocity of the aircraft by a velocity converter 16, and compared with a desired reference velocity in velocity comparator 18, to generate wheel velocity error signals indicative of the
20 difference between the wheel velocity signals from each braked wheel and the reference velocity signal. The output of the velocity comparator is referred to as slip velocity (V_s) or velocity error. The velocity error signals are adjusted by a torque bias modulator control means (TBM) integrator 20, the transient control means 22, and compensation network 24, the outputs of which are summed at
25 summing junction 26 to provide an anti-skid control signal 28 received by the command processor 30, typically a microprocessor. The TBM integrator in the antiskid loop dictates the maximum allowable control torque level during braking. The TBM integrator is typically slower in response than other control parameters

needed to detect and control initial skid. When no skid is detected, this integrator allows full system torque to the brakes.

The position of the aircraft brake pedal 32 operated by the pilot is typically read by a microcontroller 33 that generates a brake pedal command signal 34, from which a torque application profile is determined. The command processor 30 receives the brake pedal command signal, the anti-skid control signal 28 via feedback line 36, and preferably also receives a locked wheel protection signal 38 indicating whether a wheel is locked, and a touchdown/hydroplaning protection signal 40, to guard against hydroplaning of a wheel on touchdown at high speeds. In a currently preferred embodiment, the command processor operates on the lowest input of the locked wheel protection signal, the touchdown protection signal, the pedal signal, and the antiskid signal. The commanded brake torque signal output 42 of the command processor is compared with the brake torque feedback signal 44 from brake torque sensor 46 by comparator 48, which generates an output torque error signal 50.

In a currently preferred embodiment, the brake torque error signals are also adjusted by a proportional gain by proportional gain circuitry 52, an integral gain by integral gain circuitry 54, and a differential gain by differential gain circuitry 55 that together form a PID control loop, and the outputs of which are summed at summing junction 56 to provide an adjusted brake torque signal 57. The adjusted brake torque signal is also typically amplified by valve amplifier 58 to provide an amplified brake control signal applied to the brake control valve 60 that controls the application of pressurized brake fluid from system torque 62 to the wheel brake.

In a presently preferred embodiment, the functions of the elements in the block 63 are performed by one or more microprocessors under appropriate software control, although alternatively these or analogous functions may be performed by suitable hardware components. It will be appreciated by those skilled in the art that the component parameters and configurations will vary from aircraft to aircraft and that there is thus wide variability in how the system can be used.

"Smart" Brake Application:

Referring to Fig. 2, brake application is allowed without any rate limiting until brake torque is detected at a preset value 64, typically near the brake contact torque 66, at which point the brake torque commences to rise. Then the TBM integrator is initialized to the preset brake torque value plus a predetermined constant increment of torque, at 68, which corresponds to the peak of the brake torque-slip curve 70 shown in Figs. 2 and 3. The output of the TBM integrator is shown as dotted line 72, and the commanded brake torque output is shown as line 74. The wheel velocity is shown as line 76, and brake torque is shown as line 78. As is illustrated in Fig. 2, the initialization of the TBM integrator forces the TBM integrator to track the brake application profile beginning at 69, thus preventing any substantial overshoot.

"Smart" Skid Detection:

When a wheel approaches the skid level, such as when V_s is detected to be greater than the preset wheel velocity limit, then the TBM integrator is initialized with the value of brake torque feedback at the time that V_s is greater than the preset limit. This method ensures correct initialization of the TBM integrator. The brake torque at the time of an initial skid is what the TBM integrator needs to be for the immediate control without multiple initial skids. Therefore a fast response of the TBM integrator is insured to an otherwise slow moving control function.

It should be apparent that this invention is not limited to velocity error type systems, and that the invention is also applicable to other brake control skid detection concepts, such as rate control/detection, as well as any system that monitors the brake application and pressure or torque.

From the above, it will be recognized by those skilled in the art that the present invention provides a new and novel method and apparatus to indicate brake control prior to the initialization of skids and to prevent overshoot and instability after brake control is begun.

It will also be apparent from the foregoing that while particular forms of the invention have been illustrated and described, various modifications can be made

without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims.

WHAT IS CLAIMED IS:

1. An adaptive brake application and initial skid detection system for braking of a wheel of a vehicle, comprising:

a wheel brake for braking the wheel;

5 a brake torque sensor for generating brake torque signals that are a function of the brake torque applied to the wheel;

means for comparing said brake torque signals with a predetermined threshold brake torque;

10 wheel speed signal generating means for producing wheel speed signals that are a function of the rotational speed of the wheel;

a wheel velocity converter for generating a wheel velocity signal based upon said wheel speed signals;

velocity reference generating means for generating a reference velocity signal;

15 wheel velocity comparison means for comparing said wheel velocity signal with said reference velocity signal for generating wheel velocity error signals indicative of the difference between said aircraft wheel velocity signals and said reference velocity signal;

20 a torque bias modulator integrator responsive to said brake torque signals for adjusting said wheel velocity error signals to provide an anti-skid control signal;

command brake torque signal generating means for generating a command brake torque signal in response to a deceleration command;

25 brake torque comparison means for comparing said brake torque signals with said command brake torque signal for generating brake torque difference signals indicative of the difference between said brake torque signals and said command brake torque signal; and

control means for providing an adjusted brake torque signal to said wheel brake to control said wheel brake independently of operator brake application, in response to said brake torque difference signals.

2. The adaptive brake application and initial skid detection system of Claim 1, further comprising:

means for initializing the torque bias modulator integrator with a predetermined threshold brake torque plus a predetermined constant torque value, to thereby minimize delay of said torque bias modulator integrator in controlling the maximum allowable brake torque.

3. The adaptive brake application and initial skid detection system of Claim 2, further comprising means for initializing the torque bias modulator integrator to the value of a measured brake torque when the wheel velocity error signal becomes greater than a velocity error threshold.

4. The adaptive brake application and initial skid detection system of Claim 1, wherein said torque bias modulator integrator is responsive to brake torque signals, and further comprising:

means for initializing the torque bias modulator integrator with a predetermined threshold brake torque plus a predetermined constant torque value, to thereby minimize delay of said torque bias modulator integrator in controlling the maximum allowable brake torque.

20

5. The adaptive brake application and initial skid detection system of Claim 4, further comprising means for initializing the torque bias modulator integrator to the value of a measured brake torque when the wheel velocity error signal becomes greater than a velocity error threshold.

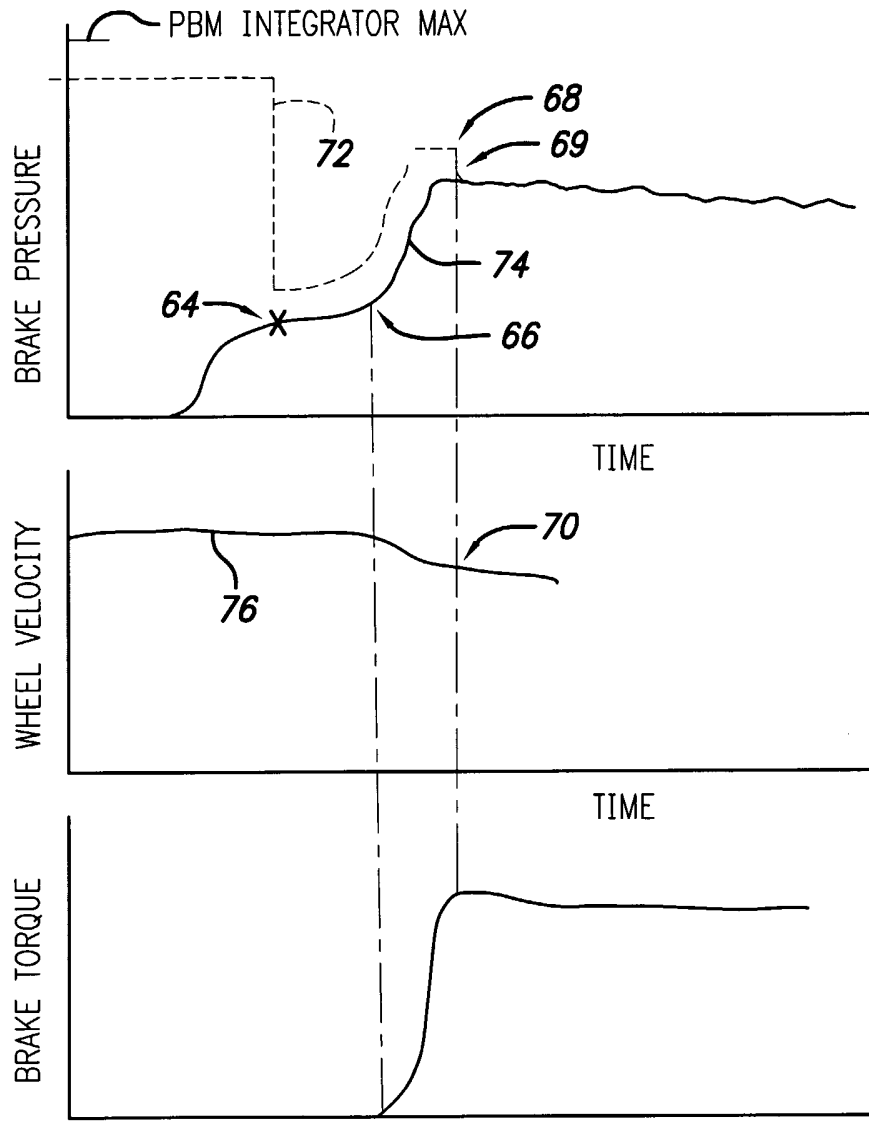


FIG. 2

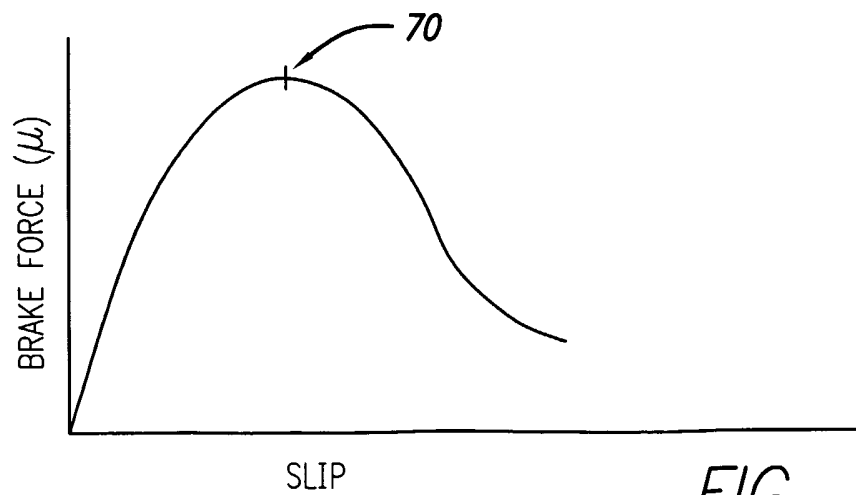


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/21881

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B60T8/00 B60T8/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B60T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 700 072 A (COOK ROBERT D ET AL) 23 December 1997 (1997-12-23) abstract; figure 2 ---	1
A	EP 0 875 430 A (HYDRO AIR INC) 4 November 1998 (1998-11-04) & US 2003/020326 A1 (COOK ROBERT ET AL) 30 January 2003 (2003-01-30) page 2, left-hand column, line 20 -right-hand column, line 15; figure 1 ---	1
P,A	US 2003/120413 A1 (COOK ROBERT D ET AL) 26 June 2003 (2003-06-26) abstract; figures 1-3 ---	1
A	EP 0 601 681 A (MANNESMANN AG) 15 June 1994 (1994-06-15) abstract; figure 1 ---	1
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

* Special categories of cited documents :

<p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>*&* document member of the same patent family</p>
--	--

Date of the actual completion of the international search 7 November 2003	Date of mailing of the international search report 26/11/2003
---	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Blurton, M
--	---

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/21881

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 1 319 268 A (TOYOTA MOTOR CO LTD;NIPPON DENSO CO) 6 June 1973 (1973-06-06) the whole document ---	1
A	DE 20 40 074 A (TOYOTA MOTOR CO LTD;TOYODA MACHINE WORKS LTD) 12 August 1971 (1971-08-12) page 8, line 1 -page 9, line 2; figure 5 page 16, paragraph 2 - paragraph 3; figure 9 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/21881

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
US 5700072	A	23-12-1997	US 5605387 A	25-02-1997
			US 5507568 A	16-04-1996
			US 5390990 A	21-02-1995
			DE 69425041 D1	03-08-2000
			DE 69425041 T2	26-10-2000
			DE 664249 T1	13-02-1997
			EP 0664249 A2	26-07-1995
			HK 1013643 A1	27-10-2000
			JP 3321320 B2	03-09-2002
			JP 7186919 A	25-07-1995
<hr/>				
EP 0875430	A	04-11-1998	US 6132016 A	17-10-2000
			BR 9806618 A	13-06-2000
			CA 2236562 A1	02-11-1998
			CN 1198389 A , B	11-11-1998
			DE 69816694 D1	04-09-2003
			EP 0875430 A2	04-11-1998
			JP 11070897 A	16-03-1999
			US 2002105226 A1	08-08-2002
			US 2002195872 A1	26-12-2002
			US 2003020326 A1	30-01-2003
			US 2003107266 A1	12-06-2003
			US 6299262 B1	09-10-2001
			US 2001035681 A1	01-11-2001
			US 2002014800 A1	07-02-2002
<hr/>				
US 2003120413	A1	26-06-2003	NONE	
<hr/>				
EP 0601681	A	15-06-1994	DE 4242392 A1	16-06-1994
			DE 4311017 A1	06-10-1994
			DE 59305613 D1	10-04-1997
			EP 0601681 A1	15-06-1994
			ES 2098657 T3	01-05-1997
<hr/>				
GB 1319268	A	06-06-1973	JP 50000235 B	07-01-1975
			JP 50000236 B	07-01-1975
			US 3701569 A	31-10-1972
<hr/>				
DE 2040074	A	12-08-1971	JP 49043674 B	22-11-1974
			DE 2040074 A1	12-08-1971
			FR 2060094 A1	11-06-1971
			GB 1276399 A	01-06-1972
			US 3689120 A	05-09-1972
<hr/>				