



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/10/09
(87) Date publication PCT/PCT Publication Date: 2020/04/16
(85) Entrée phase nationale/National Entry: 2021/04/09
(86) N° demande PCT/PCT Application No.: US 2019/055320
(87) N° publication PCT/PCT Publication No.: 2020/076898
(30) Priorité/Priority: 2018/10/10 (US62/744,031)

(51) Cl.Int./Int.Cl. *A61F 2/24* (2006.01)
(71) Demandeur/Applicant:
EDWARDS LIFESCIENCES CORPORATION, US
(72) Inventeurs/Inventors:
MCCANN, ALEX PHILIP, US;
STEARNS, GRANT MATTHEW, US;
DIXON, ERIC ROBERT, US;
KWON, YOON HEE, US;
POPP, MICHAEL J., US;
DELGADO, SERGIO, US;
FRESCHAUF, LAUREN R., US;
...
(74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : DISPOSITIFS D'ETANCHEITE DE VALVULES CARDIAQUES ET DISPOSITIFS D'ADMINISTRATION ASSOCIES

(54) Title: HEART VALVE SEALING DEVICES AND DELIVERY DEVICES THEREFOR

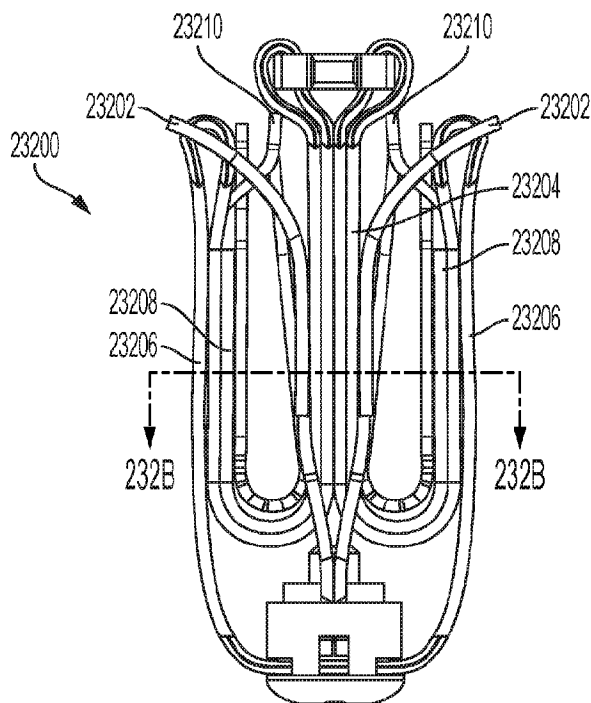


Fig. 232A

(57) **Abrégé/Abstract:**

An implantable prosthetic device has a coaption element and at least one anchor. The coaption element is configured to be positioned within the native heart valve orifice to help fill a space where the native valve is regurgitant and form a more effective seal. The coaption element can have a structure that is impervious to blood. The coaption element can be connected to leaflets of the native valve by the anchor.

(72) Inventeurs(suite)/Inventors(continued): GOHRES, RACHEL ANN, US; FOREMAN, RACHEL LIAT DAVID, US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
16 April 2020 (16.04.2020)



(10) International Publication Number
WO 2020/076898 A1

(51) International Patent Classification:
A61F 2/24 (2006.01)

(21) International Application Number:
PCT/US2019/055320

(22) International Filing Date:
09 October 2019 (09.10.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/744,031 10 October 2018 (10.10.2018) US

(71) Applicant: **EDWARDS LIFESCIENCES CORPORATION** [US/US]; One Edwards Way, Irvine, CA 92614 (US).

(72) Inventors: **MCCANN, Alex, Philip**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **STEARNS, Grant, Matthew**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **DIXON, Eric, Robert**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **KWON, Yoon, Hee**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **POPP, Michael, J.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US).

Way, Legal Department, Irvine, CA 92614 (US). **DELGADO, Sergio**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **FRESCHAUF, Lauren, R.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **GOHRES, Rachel Ann**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **FOREMAN, Rachel Li-at David**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US).

(74) Agent: **RICHARDSON, Thomas C.** et al.; Edwards Lifesciences, One Edwards Way, Irvine, CA 92614 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: HEART VALVE SEALING DEVICES AND DELIVERY DEVICES THEREFOR

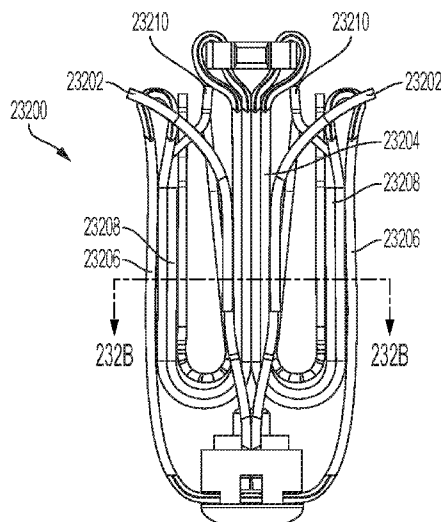


Fig. 232A

(57) Abstract: An implantable prosthetic device has a coaption element and at least one anchor. The coaption element is configured to be positioned within the native heart valve orifice to help fill a space where the native valve is regurgitant and form a more effective seal. The coaption element can have a structure that is impervious to blood. The coaption element can be connected to leaflets of the native valve by the anchor.



WO 2020/076898 A1

WO 2020/076898 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

HEART VALVE SEALING DEVICES AND DELIVERY DEVICES THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 62/744031, filed October 10, 2018, which is incorporated herein by reference for all purposes.

BACKGROUND OF THE INVENTION

[0002] The native heart valves (i.e., the aortic, pulmonary, tricuspid, and mitral valves) serve critical functions in assuring the forward flow of an adequate supply of blood through the cardiovascular system. These heart valves can be damaged, and thus rendered less effective, by congenital malformations, inflammatory processes, infectious conditions, disease, etc. Such damage to the valves can result in serious cardiovascular compromise or death. Damaged valves can be surgically repaired or replaced during open heart surgery. However, open heart surgeries are highly invasive and complications may occur. Transvascular techniques can be used to introduce and implant prosthetic devices in a manner that is much less invasive than open heart surgery. As one example, a transseptal technique could be used, e.g., comprising inserting a catheter into the right femoral vein, up the inferior vena cava and into the right atrium, puncturing the septum, and passing the catheter into the left atrium.

[0003] A healthy heart has a generally conical shape that tapers to a lower apex. The heart is four-chambered and comprises the left atrium, right atrium, left ventricle, and right ventricle. The left and right sides of the heart are separated by a wall generally referred to as the septum. The native mitral valve of the human heart connects the left atrium to the left ventricle. The mitral valve has a very different anatomy than other native heart valves. The mitral valve includes an annulus portion, which is an annular portion of the native valve tissue surrounding the mitral valve orifice, and a pair of cusps, or leaflets, extending downward from the annulus into the left ventricle. The mitral valve annulus can form a “D”-shaped, oval, or otherwise out-of-round cross-sectional shape having major and minor axes. The anterior leaflet can be larger than the posterior leaflet, forming a generally “C”-shaped boundary between the abutting sides of the leaflets when they are closed together.

[0004] When operating properly, the anterior leaflet and the posterior leaflet function together as a one-way valve to allow blood to flow only from the left atrium to the left ventricle. The left atrium receives oxygenated blood from the pulmonary veins. When the muscles of the left atrium contract and the left ventricle dilates (also referred to as “ventricular diastole” or “diastole”), the oxygenated blood that is collected in the left atrium flows into the left ventricle. When the muscles of the left atrium relax and the muscles of the left ventricle contract (also referred to as “ventricular systole” or “systole”), the increased blood pressure in the left ventricle urges the sides of the two leaflets together,

thereby closing the one-way mitral valve so that blood cannot flow back to the left atrium and is instead expelled out of the left ventricle through the aortic valve. To prevent the two leaflets from prolapsing under pressure and folding back through the mitral annulus toward the left atrium, a plurality of fibrous cords called chordae tendineae tether the leaflets to papillary muscles in the left ventricle.

[0005] Mitral regurgitation occurs when the native mitral valve fails to close properly and blood flows into the left atrium from the left ventricle during the systolic phase of heart contraction. Mitral regurgitation is one of the most common forms of valvular heart disease. Mitral regurgitation can have many different causes, such as leaflet prolapse, dysfunctional papillary muscles, stretching of the mitral valve annulus resulting from dilation of the left ventricle, more than one of these, etc. Mitral regurgitation at a central portion of the leaflets can be referred to as central jet mitral regurgitation and mitral regurgitation nearer to one commissure (i.e., location where the leaflets meet) of the leaflets can be referred to as eccentric jet mitral regurgitation. Central jet regurgitation occurs when the edges of the leaflets do not meet in the middle and thus the valve does not close, and regurgitation is present.

[0006] A technique for treating mitral and other valvular regurgitation in patients may include securing edges of the native valve leaflets directly to one another. For example, a catheter delivered clip may be used to attempt to clip the sides of the leaflets together at the end portions of the leaflets. But significant challenges exist. For example, multiple clips may be required to eliminate or reduce regurgitation to an acceptable level, but in some circumstances, this can result in longer operation times and may result in over-restricted flow or undesirable stresses on the native anatomy.

[0007] Despite these prior techniques, there is a continuing need for improved devices and methods for treating valvular regurgitation.

SUMMARY

[0008] This summary is meant to provide some examples and is not intended to be limiting of the scope of the invention in any way. For example, any feature included in an example of this summary is not required by the claims, unless the claims explicitly recite the features. Also, the features, components, steps, concepts, etc. described in examples in this summary and elsewhere in this disclosure can be combined in a variety of ways. Various features and steps as described elsewhere in this disclosure may be included in the examples summarized here.

[0009] An example implantable prosthetic device has a coaption element (while the term coaption element is used throughout this application, this can also be referred to as a coaptation element, a spacer, etc.) and at least one anchor. The coaption element is configured to be positioned within the native heart valve orifice to help fill a space where the native valve is regurgitant and form a more

effective seal. The coaption element can have a structure that is impervious to blood. The coaption element can be connected to leaflets of the native valve by the anchor.

[0010] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a strip of material, and a pair of paddles. A coaption element is formed from or comprises the strip of material. The pair of paddles is formed from or comprises the strip of material and are connected to the coaption element. The pair of paddles are movable between an open position and a closed position.

[0011] The “strip of material” in the various embodiments described throughout this disclosure can be a single unitary strip or piece of a material. However, in some embodiments, the “strip of material” can be formed of multiple smaller discreet pieces of one or more materials that combine into a larger composite strip of material.

[0012] In one example method of manufacturing a valve repair device, a strip of material is folded to form a coaption element and a pair of paddles connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient. A portion of the strip of material forming the coaption element is attached to a collar. A portion of the strip of material forming the paddles is attached to a cap. Movement of the cap toward the collar causes the pair of paddles to move to the closed position. Movement of the cap away from the collar causes the pair of paddles to move to the open position.

[0013] In one example embodiment, a valve repair device for repairing a native valve of a patient has a coaption element and a pair of paddles. The coaption element has four layers. The pair of paddles is connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient.

[0014] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a strip of material and a collar. A coaption element is formed from the strip of material. A collar is connected to the coaption element. A pair of paddles is formed from the strip of material and connected to the coaption element. The paddles are movable between an open position and a closed position by moving the collar toward and away from the paddles.

[0015] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a collar, a coaption element, and a pair of paddles. The collar has a plurality of engagement portions configured to releasably engage a delivery apparatus. The coaption element is attached to the collar. The pair of paddles are connected to the coaption element are movable between an open position and a closed position. The paddles are circumferentially disposed between the engagement portions. The paddles are configured to attach to the native valve of the patient.

[0016] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a coaption element, a pair of paddles, and a covering. The pair of paddles is connected to the coaption element. The paddles are movable between an open position and a closed position. A catch point (e.g., a point that might snag or catch on a portion of the delivery system and interfere with deployment and/or recapture of the device) is formed by or between a portion of at least one of the coaption element and the pair of paddles when the paddles are in the open position. A cover connected to the coaption element and the paddles covers the catch point.

[0017] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a coaption element, a pair of paddles, a first cover, and a second cover. The pair of paddles is connected to the coaption element and are movable between an open position and a closed position. A first cover extends from a distal end of the device and covers at least a portion of the paddles. A second cover extends from a proximal end of the device and covers at least a portion of the coaption element.

[0018] In one example embodiment, a valve repair device for repairing a native valve of a patient is made from a strip of material. The strip of material has first and second edges surrounding a central portion. A coaption element is formed from the strip of material. A pair of paddles is formed from the strip of material. The pair of paddles are connected to the coaption element. The paddles are movable between an open position and a closed position.

[0019] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a strip of material, a pair of attachment portions, a pair of extension members, and a cap. A coaption element is formed from the strip of material. The pair of extension members have attachment portions. A pair of paddles are formed from the strip of material. The pair of paddles are connected to the coaption element. The paddles are movable between an open position and a closed position. The paddles are disposed over the extension members. The cap is attached to the paddles. Movement of the cap toward the coaption element causes the pair of paddles to move to the closed position. Movement of the cap away from the coaption element causes the pair of paddles to move to the open position. The cap includes a retention body, a retaining nut, and a retaining bolt. The retention body has a locking aperture for receiving the attachment portions of the extension members. The retaining nut is inserted into the locking aperture. The retaining bolt secures the retaining nut within the locking aperture.

[0020] In one example method of manufacturing a valve repair device for repairing a native valve of a patient a strip of material is folded to form a coaption element and a pair of paddles connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient. The portion of the strip of material forming the

paddles is attached to a cap. Movement of the cap toward the coaption element causes the pair of paddles to move to the closed position. Movement of the cap away from the coaption element causes the pair of paddles to move to the open position. The cap includes a retention body, a retaining nut, and a retaining bolt. The retention body has a locking aperture for receiving attachment portions of extension members. The retaining nut is configured to insert into the locking aperture. The retaining bolt secures the retaining nut within the locking aperture. A pair of extension members are attached to the retention body of the cap via the attachment portions of the extension members such that the paddles are disposed over the extension members. The retaining bolt and the retaining nut are assembled to secure the cap to the strip of material.

[0021] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a strip of material, a cap, and a pair of extension members. A coaption element is formed from the strip of material. A pair of paddles are formed from the strip of material and are connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient. A cap is attached to the paddles. Movement of the cap toward the coaption element causes the pair of paddles to move to the closed position. Movement of the cap away from the coaption element causes the pair of paddles to move to the open position. The pair of extension members are connected to the cap and are moveable between an open position and a closed position. In the closed position the extension members are biased in a closing direction.

[0022] In one example method of manufacturing a valve repair device for repairing a native valve of a patient a strip of material formed from shape-memory alloy is folded around a jig to form both a coaption element and a pair of paddles connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient. The strip of shape memory material is heat treated to shape-set the strip of material in the shape of the coaption element and paddles.

[0023] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a strip of material, a cap, and a pair of extension members. A coaption element is formed from the strip of material. A pair of paddles is formed from the strip of material and is connected to the coaption element. The paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient. The cap is attached to the paddles. Movement of the cap toward the coaption element causes the pair of paddles to move to the closed position. Movement of the cap away from the coaption element causes the pair of paddles to move to the open position. The pair of extension members is connected to the cap and the paddles. The extension members extend from attachment portions for attaching the extension members to the cap to end

portions that are attached to the strip material forming the paddles. The end portions of the extension members extend beyond the strip of material.

[0024] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a main coaption element, at least one auxiliary coaption element, and a pair of paddles. The at least one auxiliary coaption element is connected to the coaption element. The pair of paddles is connected to the main coaption element. The paddles are movable between an open position and a closed position.

[0025] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a coaption element, a pair of paddles connected to the coaption element, and a pair of paddle frames. The paddles are movable between an open position and a closed position. The paddles are configured to attach to the native valve of the patient. The first and second paddle frames have spaced apart frame portions that are parallel or substantially parallel when the paddles are in a closed position to form rectangular shaped leaflet engagement areas.

[0026] In one example method of repairing a native heart valve, first and second repair devices are installed on a pair of leaflets of the native heart valve. The repair devices each have a frame with a rectangular or substantially rectangular shape. The paddle frames of the installed repair devices are adjacent to one another and are parallel or substantially parallel to one another.

[0027] The foregoing method and other treatment methods herein can be performed on a living animal or on a simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, tissue, etc. being simulated), etc.

[0028] In one example embodiment, a valve repair device for repairing a native valve of a patient includes a pair of paddles and a pair of clasps. The paddles are movable between an open position and a closed position. Each clasp has at least one barb, a barb support portion, a moveable arm, and a flexible portion between the barb support portion and the moveable arm. The flexible portion is configured to allow the barb support portion to flex away from the moveable arm.

[0029] A further understanding of the nature and advantages of the present invention are set forth in the following description and claims, particularly when considered in conjunction with the accompanying drawings in which like parts bear like reference numerals.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] To further clarify various aspects of embodiments of the present disclosure, a more particular description of the certain embodiments will be made by reference to various aspects of the appended drawings. It is appreciated that these drawings depict only typical embodiments of the present disclosure and are therefore not to be considered limiting of the scope of the disclosure. Moreover,

while the figures can be drawn to scale for some embodiments, the figures are not necessarily drawn to scale for all embodiments. Embodiments and other features and advantages of the present disclosure will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

- [0031] Figure 1 illustrates a cutaway view of the human heart in a diastolic phase;
- [0032] Figure 2 illustrates a cutaway view of the human heart in a systolic phase;
- [0033] Figure 2A is another cutaway view of the human heart in a systolic phase;
- [0034] Figure 2B is the cutaway view of Figure 2A annotated to illustrate a natural shape of mitral valve leaflets in the systolic phase;
- [0035] Figure 3 illustrates a cutaway view of the human heart in a diastolic phase, in which the chordae tendineae are shown attaching the leaflets of the mitral and tricuspid valves to ventricle walls;
- [0036] Figure 4 illustrates a healthy mitral valve with the leaflets closed as viewed from an atrial side of the mitral valve;
- [0037] Figure 5 illustrates a dysfunctional mitral valve with a visible gap between the leaflets as viewed from an atrial side of the mitral valve;
- [0038] Figure 6 illustrates a mitral valve having a wide gap between the posterior leaflet and the anterior leaflet;
- [0039] Figure 6A illustrates a coaption element in the gap of the mitral valve as viewed from an atrial side of the mitral valve;
- [0040] Figure 6B illustrates a valve repair device attached to mitral valve leaflets with the coaption element in the gap of the mitral valve as viewed from a ventricular side of the mitral valve;
- [0041] Figure 6C is a perspective view of a valve repair device attached to mitral valve leaflets with the coaption element in the gap of the mitral valve shown from a ventricular side of the mitral valve;
- [0042] Figure 6D is a schematic view illustrating a path of mitral valve leaflets along each side of a coaption element of an example mitral valve repair device;
- [0043] Figure 6E is a top schematic view illustrating a path of mitral valve leaflets around a coaption element of an example native valve repair device;
- [0044] Figure 7 illustrates a tricuspid valve viewed from an atrial side of the tricuspid valve;
- [0045] Figures 8–14 show an example embodiment of an implantable prosthetic device, in various stages of deployment;
- [0046] Figure 11A shows an example embodiment of an implantable prosthetic device that is similar to the device illustrated by Figure 11, but where the paddles are independently controllable;
- [0047] Figures 15–20 show the implantable prosthetic device of Figures 8–14 being delivered and implanted within the native valve;

[0048] Figure 21 shows an example embodiment of an implantable prosthetic device or frame of an implantable prosthetic device;

[0049] Figure 22 shows an example embodiment of an implantable prosthetic device or frame of an implantable prosthetic device;

[0050] Figures 23–25 show example embodiments of an implantable prosthetic device or component of an implantable medical device;

[0051] Figures 26 and 27 show an example embodiment of a barbed clasp for use in an implantable prosthetic device;

[0052] Figures 28–32 show example embodiments of an implantable prosthetic device;

[0053] Figures 32A and 32B are perspective views of a cap and a coaption element insert of the implantable prosthetic device of Figures 28–32 in sealed and spaced apart positions, respectively;

[0054] Figure 33 shows a barbed clasp for use in an implantable prosthetic device;

[0055] Figure 34 shows a portion of native valve tissue grasped by a barbed clasp;

[0056] Figures 35–46 show an example embodiment of an implantable prosthetic device being delivered and implanted within the native valve;

[0057] Figure 47 shows a side view of an example implantable prosthetic device without barbed clasps in a closed position;

[0058] Figure 47A shows a side view of an example implantable prosthetic device without barbed clasps in a closed position;

[0059] Figure 48 shows a side view of an example implantable prosthetic device with barbed clasps in a closed position;

[0060] Figure 48A shows a side view of an example implantable prosthetic device with barbed clasps in a closed position;

[0061] Figure 48B shows a side view of an example implantable prosthetic device with barbed clasps in a closed position, the device being attached to a deployment device;

[0062] Figure 48C shows a side view of the example implantable prosthetic device according to Figure 48B, the device being provided with a cover;

[0063] Figure 48D shows a front view of the example implantable prosthetic device according to Figure 48B, the device being attached to a deployment device;

[0064] Figure 48E shows a front view of the example implantable prosthetic device according to Figure 48D, the device being provided with a cover;

[0065] Figure 48F shows a side view of the example implantable prosthetic device according to Figure 48B with barbed clasps in the closed position;

[0066] Figure 48G shows a front view of the example implantable prosthetic device according to Figure 48F;

[0067] Figure 48H shows a bottom view of the example implantable prosthetic device according to Figure 48F;

[0068] Figure 49 shows a side view of an example implantable prosthetic device without barbed clasps in a partially-open position;

[0069] Figure 50 shows a side view of an example implantable prosthetic device in a partially-open position with barbed clasps in a closed position;

[0070] Figure 51 shows a side view of an example implantable prosthetic device in a partially -open position with barbed clasps in an open position;

[0071] Figure 52 shows a side view of an example implantable prosthetic device without barbed clasps in a half-open position;

[0072] Figure 53 shows a side view of an example implantable prosthetic device in a half-open position with barbed clasps in a closed position;

[0073] Figure 53A shows a side view of an example implantable prosthetic device in a half-open position with barbed clasps in a closed position;

[0074] Figure 53B shows a front view of the example implantable prosthetic device according to Figure 53A;

[0075] Figure 53C shows a side view of the example implantable prosthetic device according to Figure 53A, the device being provided with a cover;

[0076] Figure 53D shows a front view of the example implantable prosthetic device according to Figure 53A, the device being provided with a cover;

[0077] Figure 54 shows a side view of an example implantable prosthetic device in a half-open position with barbed clasps in an open position;

[0078] Figure 54A shows a side view of an example implantable prosthetic device in a half-open position with barbed clasps in an open position;

[0079] Figure 54B shows a front view of the example implantable prosthetic device according to Figure 54A;

[0080] Figure 54C shows a side view of the example implantable prosthetic device according to Figure 54A, the device being provided with a cover;

[0081] Figure 54D shows a front view of the example implantable prosthetic device according to Figure 54A, the device being provided with a cover;

[0082] Figure 55 shows a side view of an example implantable prosthetic device without barbed clasps in a three-quarters-open position;

[0083] Figure 56 shows a side view of an example implantable prosthetic device in a three-quarters-open position with barbed clasps in a closed position;

[0084] Figure 57 shows a side view of an example implantable prosthetic device in a three-quarters-open position with barbed clasps in an open position;

[0085] Figure 58 shows a side view of an example implantable prosthetic device without barbed clasps near a full bailout position or near a fully-open position;

[0086] Figure 59 shows a side view of an example implantable prosthetic device without barbed clasps in a full bailout position or a fully-open position;

[0087] Figure 60 shows a side view of an example implantable device in a full bailout position with barbed clasps in a closed position;

[0088] Figure 60A shows a side view of an example implantable device in a full bailout position with barbed clasps in a closed position;

[0089] Figure 60B shows a front view of the example implantable prosthetic device according to Figure 60A;

[0090] Figure 60C shows a side view the example implantable prosthetic device according to Figure 60A, the device being provided with a cover;

[0091] Figure 60D shows a front view of the example implantable prosthetic device according to Figure 60A, the device being provided with a cover;

[0092] Figure 61 shows a side view of an example implantable device in a full bailout position with barbed clasps in an open position;

[0093] Figure 61A shows a side view of an example implantable device in a full bailout position with barbed clasps in an open position;

[0094] Figure 61B shows a front view of the example implantable prosthetic device according to Figure 61A;

[0095] Figure 61C shows a side view the example implantable prosthetic device according to Figure 61A, the device being provided with a cover;

[0096] Figure 61D shows a front view of the example implantable prosthetic device according to Figure 61A, the device being provided with a cover;

[0097] Figures 62A–62B illustrate the movement of the paddles of an example embodiment of an implantable prosthetic device;

[0098] Figures 63A–63C illustrate the movement of the paddles of an example embodiment of an implantable prosthetic device;

[0099] Figures 64A–64C illustrate the movement of the paddles of an example embodiment of an implantable prosthetic device;

- [00100] Figure 65 shows a perspective view of an example implantable prosthetic device in a closed position;
- [00101] Figure 65A shows a perspective view of an example implantable prosthetic device in a closed position;
- [00102] Figure 66 shows a perspective view of the implantable prosthetic device of Figure 65;
- [00103] Figure 66A shows a perspective view of the implantable prosthetic device of Figure 65A;
- [00104] Figure 67 shows a front view of the implantable prosthetic device of Figure 65;
- [00105] Figure 67A shows a front view of the implantable prosthetic device of Figure 65A;
- [00106] Figure 68 shows a front view of the implantable prosthetic device of Figure 65 with additional components;
- [00107] Figure 68A shows a front view of the implantable prosthetic device of Figure 65A with additional components;
- [00108] Figure 69 shows a side view of the implantable prosthetic device of Figure 65;
- [00109] Figure 70 shows a top view of the implantable prosthetic device of Figure 65;
- [00110] Figure 70A shows a top view of the implantable prosthetic device of Figure 65A;
- [00111] Figure 71 shows a top view of the implantable prosthetic device of Figure 65 with a collar component;
- [00112] Figure 71A shows a top view of the implantable prosthetic device of Figure 65A with a collar component;
- [00113] Figure 72 shows a bottom view of the implantable prosthetic device of Figure 65;
- [00114] Figure 72A shows a bottom view of the implantable prosthetic device of Figure 65A;
- [00115] Figure 73 shows a bottom view of the implantable prosthetic device of Figure 65 with a cap component;
- [00116] Figure 73A shows a bottom view of the implantable prosthetic device of Figure 65A with a cap component;
- [00117] Figure 74 shows a sectioned perspective view of the implantable prosthetic device of Figure 65 sectioned by cross-section plane 75;
- [00118] Figure 74A shows a sectioned perspective view of the implantable prosthetic device of Figure 65A sectioned by cross-section plane 75A;
- [00119] Figure 75 shows a top cross-section view of the example prosthetic device illustrated by Figure 74;
- [00120] Figure 75A shows a top cross-section view of the example prosthetic device illustrated by Figure 74A;

- [00121] Figure 76 shows a sectioned perspective view of the implantable prosthetic device of Figure 65 sectioned by cross-section plane 77;
- [00122] Figure 76A shows a sectioned perspective view of the implantable prosthetic device of Figure 65A sectioned by cross-section plane 77A;
- [00123] Figure 77 shows a top cross-section view of the example prosthetic device illustrated by Figure 76;
- [00124] Figure 77A shows a top cross-section view of the example prosthetic device illustrated by Figure 76A;
- [00125] Figure 78 shows a sectioned perspective view of the implantable prosthetic device of Figure 65 sectioned by cross-section plane 77;
- [00126] Figure 78A shows a sectioned perspective view of the implantable prosthetic device of Figure 65A sectioned by cross-section plane 77A;
- [00127] Figure 79 shows a top cross-section view of the example prosthetic device illustrated by Figure 78;
- [00128] Figure 79A shows a top cross-section view of the example prosthetic device illustrated by Figure 78A;
- [00129] Figure 80 shows a sectioned perspective view of the implantable prosthetic device of Figure 65 sectioned by cross-section plane 81;
- [00130] Figure 80A shows a sectioned perspective view of the implantable prosthetic device of Figure 65A sectioned by cross-section plane 81A;
- [00131] Figure 81 shows a top cross-section view of the example prosthetic device illustrated by Figure 80;
- [00132] Figure 81A shows a top cross-section view of the example prosthetic device illustrated by Figure 80A;
- [00133] Figure 82 shows a sectioned perspective view of the implantable prosthetic device of Figure 65 sectioned by cross-section plane 83;
- [00134] Figure 82A shows a sectioned perspective view of the implantable prosthetic device of Figure 65A sectioned by cross-section plane 83A;
- [00135] Figure 83 shows a top cross-section view of the example prosthetic device illustrated by Figure 82;
- [00136] Figure 83A shows a top cross-section view of the example prosthetic device illustrated by Figure 82A;
- [00137] Figure 84 shows an example embodiment of an implantable prosthetic device with integral barbs;

- [00138] Figure 85 shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00139] Figure 86 shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00140] Figure 86A shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00141] Figure 87 shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00142] Figure 87A shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00143] Figure 88 shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00144] Figure 88A shows an example embodiment of an implantable prosthetic device with integral barbs;
- [00145] Figure 89 shows a perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00146] Figure 89A shows a perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;
- [00147] Figure 90 shows a perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00148] Figure 90A shows a perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;
- [00149] Figure 91 shows a front view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00150] Figure 91A shows a front view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;
- [00151] Figure 92 shows a side view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00152] Figure 92A shows a side view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;
- [00153] Figure 93 shows a top view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00154] Figure 93A shows a top view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;

- [00155] Figure 94 shows a bottom view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65;
- [00156] Figure 94A shows a bottom view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A;
- [00157] Figure 95 shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65 with the section taken across plane 96;
- [00158] Figure 95A shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A with the section taken across plane 96A;
- [00159] Figure 96 shows a cross-section view of the coapting portion and paddle portions of Figure 95;
- [00160] Figure 96A shows a cross-section view of the coapting portion and paddle portions of Figure 95A;
- [00161] Figure 97 shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65 with the section taken across plane 98;
- [00162] Figure 97A shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A with the section taken across plane 98A;
- [00163] Figure 98 shows a cross-section view of the coapting portion and paddle portions of Figure 97;
- [00164] Figure 98A shows a cross-section view of the coapting portion and paddle portions of Figure 97A;
- [00165] Figure 99 shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65 with the section taken across plane 100;
- [00166] Figure 99A shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A with the section taken across plane 100A;
- [00167] Figure 100 shows a cross-section view of the coapting portion and paddle portions of Figure 99;
- [00168] Figure 100A shows a cross-section view of the coapting portion and paddle portions of Figure 99A;
- [00169] Figure 101 shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65 with the section taken across plane 102;
- [00170] Figure 101A shows a sectioned perspective view of a coapting portion and paddle portions of the implantable prosthetic device illustrated by Figure 65A with the section taken across plane 102A;
- [00171] Figure 102 shows a cross-section view of the coapting portion and paddle portions of Figure 101;
- [00172] Figure 102A shows a cross-section view of the coapting portion and paddle portions of Figure 101A;

- [00173] Figure 103 shows an example embodiment of an implantable prosthetic device;
- [00174] Figure 104 shows an example embodiment of an implantable prosthetic device;
- [00175] Figure 105 shows an example embodiment of an implantable prosthetic device;
- [00176] Figure 106 shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00177] Figure 106A shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00178] Figure 106B shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00179] Figure 106C shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00180] Figure 106D shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00181] Figure 106E shows a side view of an example embodiment of an expandable coaption element in an unexpanded condition;
- [00182] Figure 106F shows an example embodiment of an expandable coaption element;
- [00183] Figure 106G shows an example embodiment of an expandable coaption element;
- [00184] Figure 106H shows an example embodiment of an expandable coaption element;
- [00185] Figure 106I shows an example embodiment of an expandable coaption element;
- [00186] Figure 107 shows an end view of the expandable coaption element of Figure 106;
- [00187] Figure 108 shows the expandable coaption element of Figure 106 in an expanded condition;
- [00188] Figure 108A shows the expandable coaption element of Figure 106A in an expanded condition;
- [00189] Figure 108B shows the expandable coaption element of Figure 106B in an expanded condition;
- [00190] Figure 108C shows the expandable coaption element of Figure 106C in an expanded condition;
- [00191] Figure 108D shows the expandable coaption element of Figure 106D in an expanded condition;
- [00192] Figure 108E shows the expandable coaption element of Figure 106E in an expanded condition;
- [00193] Figure 109 shows an end view of the coaption element of Figure 108;
- [00194] Figure 110 shows a side view of an example embodiment of an implantable prosthetic device;
- [00195] Figure 111 shows an end view of a coaption element of the example prosthetic device of Figure 110, taken along lines 111.
- [00196] Figures 112–114 show perspective views of an example embodiment of a paddle frame for the implantable prosthetic device of Figure 65;
- [00197] Figure 112A shows a perspective view of an example embodiment of a paddle frame for the implantable prosthetic device of Figure 65A;

[00198] Figure 114A shows a side view of the paddle frame of Figure 112A;

[00199] Figure 115 shows a front view of the paddle frame of Figures 112–114;

[00200] Figure 115A shows a top view of the paddle frame of Figure 112A;

[00201] Figure 116 shows a top view of the paddle frame of Figures 112–114;

[00202] Figure 116A shows a front view of the paddle frame of Figure 112A;

[00203] Figure 117 shows a side view of the paddle frame of Figures 112–114;

[00204] Figure 117A shows a rear view of the paddle frame of Figure 112A;

[00205] Figure 118 shows a bottom view of the paddle frame of Figures 112–114;

[00206] Figure 118A shows a bottom view of the paddle frame of Figure 112A;

[00207] Figure 119 shows a front view of the paddle frame of Figures 112–114;

[00208] Figure 120 shows a front view of the paddle frame of Figures 112–114 in a compressed condition inside a delivery device;

[00209] Figure 121 shows a side view of an example embodiment of an implantable prosthetic device in a closed condition;

[00210] Figure 122 shows a front view of a paddle frame of the example prosthetic device of Figure 121;

[00211] Figure 123 shows a side view of the implantable prosthetic device of Figure 121 in an open condition;

[00212] Figure 124 shows a front view of the paddle frame of the open prosthetic device of Figure 123;

[00213] Figure 125 shows a side view of an example embodiment of an implantable prosthetic device in a closed condition;

[00214] Figure 126 shows a front view of a paddle frame of the example prosthetic device of Figure 125;

[00215] Figure 127 shows a side view of the implantable prosthetic device of Figure 125 in a closed condition;

[00216] Figure 128 shows a front view of the paddle frame of the open prosthetic device of Figure 127;

[00217] Figure 129 shows an example embodiment of an implantable prosthetic device;

[00218] Figures 130–131 show an example embodiment of an implantable prosthetic device;

[00219] Figure 132 shows an example embodiment of an implantable prosthetic device;

[00220] Figures 133–134 show an example embodiment of an implantable prosthetic device;

[00221] Figures 135–136 show an example embodiment of an implantable prosthetic device;

[00222] Figure 137 shows an example embodiment of an implantable prosthetic device;

[00223] Figures 138–143 show use of an example embodiment of an implantable prosthetic device;

- [00224] Figure 144 shows an example embodiment of a delivery assembly including a delivery device and an example prosthetic device;
- [00225] Figure 145 shows a perspective view of an example embodiment of an implantable prosthetic device releasably coupled to a delivery device;
- [00226] Figure 146 shows the embodiment of Figure 145 with the implantable prosthetic device released from the delivery device;
- [00227] Figure 147 shows a cross-sectional view of the coupler of Figure 145;
- [00228] Figure 148 shows a perspective view of the delivery assembly of Figure 144 with the prosthetic device shown in partial cross-section and some components of the delivery apparatus shown schematically;
- [00229] Figure 149 shows a plan view of a shaft of the delivery device of Figure 144;
- [00230] Figure 150 shows a side elevation view of a proximal end portion of the delivery device of Figure 144;
- [00231] Figure 151 shows a cross-sectional view of the proximal end portion of the delivery device of Figure 144, taken along the line 151–151 shown in Figure 150;
- [00232] Figure 152 shows an exploded view of the proximal end portion of the delivery device of Figure 144;
- [00233] Figures 153–160 show an example procedure used to repair a native valve of a heart, which is partially shown;
- [00234] Figure 161 shows an example embodiment of a handle for the delivery apparatus of Figure 144;
- [00235] Figure 162 is an exploded view of the handle of Figure 161;
- [00236] Figure 163 shows an example embodiment of a coupler and a proximal collar for the delivery assembly of Figure 144, showing the coupler releasably coupled to the proximal collar;
- [00237] Figure 164 shows a perspective view of the coupler and proximal collar of Figure 163, showing the coupler released from the proximal collar;
- [00238] Figure 165 shows example embodiments of a cap, actuation element or means of actuating, and release wire for the delivery assembly of Figure 144, showing the cap releasably coupled to the actuation element or means of actuating by the release wire.
- [00239] Figure 166 shows a perspective view of the cap, actuation element or means of actuating, and the release wire of Figure 163, showing the cap released from the actuation element or means of actuating and the release wire;
- [00240] Figure 167 shows example embodiments of a coupler, a proximal collar, a cap, and an actuation element or means of actuating of the delivery assembly of Figure 144;

- [00241] Figure 168 shows a perspective view of the coupler and proximal collar of Figure 167;
- [00242] Figure 169 shows an example embodiment of a clasp control member of the delivery apparatus of Figure 144;
- [00243] Figure 170 shows a detail view of the clasp control member of Figure 169, taken from the perspective 170 shown in Figure 169;
- [00244] Figure 171 shows an example embodiment of a guide rail for the clasp control member of Figure 169;
- [00245] Figure 172 shows an example embodiment of a shaft of the delivery device of Figure 144;
- [00246] Figure 173 shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00247] Figure 174 shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00248] Figure 174A shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00249] Figure 175 shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00250] Figure 175A shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00251] Figure 176 shows an example embodiment of an implantable prosthetic device and delivery device for releasing and recapturing the prosthetic device;
- [00252] Figures 177–178 show an example embodiment of a coupler for an example implantable prosthetic device;
- [00253] Figures 179–181 show an example embodiment of a coupler for an example implantable prosthetic device;
- [00254] Figures 182–183 show an example embodiment of a coupler for an example implantable prosthetic device;
- [00255] Figures 184–185 show an example embodiment of a coupler for an example implantable prosthetic device;
- [00256] Figure 186 shows an example embodiment of an actuation element or means of actuating for an example prosthetic device;
- [00257] Figure 187 shows an actuation mechanism for an example prosthetic device;
- [00258] Figure 188 shows an actuation mechanism for an example prosthetic device;
- [00259] Figure 188A shows an actuation mechanism for an example prosthetic device;
- [00260] Figure 189 shows an actuation mechanism for an example prosthetic device;

- [00261] Figure 190 shows an actuation mechanism for an example prosthetic device;
- [00262] Figure 191 is a perspective view of a blank used to make a paddle frame;
- [00263] Figure 192 is a perspective view of the blank of Figure 191 bent to make a paddle frame;
- [00264] Figure 193 is a perspective view of a shape-set paddle frame attached to a cap of a valve repair device;
- [00265] Figure 194 is a perspective view of the paddle frame of Figure 193 flexed and attached to inner and outer paddles at a closed position;
- [00266] Figure 195 is a perspective view of two of the paddle frames of Figure 112A showing the paddle frames in a shape-set position;
- [00267] Figure 196 is a perspective view of the paddle frames of Figure 195 showing the paddle frames in a loaded position;
- [00268] Figure 197 is an enlarged side view of device of Figure 60C showing the cover;
- [00269] Figure 198 is an enlarged side view of the device of Figure 60C showing the cover;
- [00270] Figure 199 shows an exploded view of an example prosthetic device;
- [00271] Figure 200 shows an enlarged perspective view of the collar of an example prosthetic device;
- [00272] Figure 201 shows an enlarged perspective view of the cap of an example prosthetic device;
- [00273] Figure 202 shows an exploded view of the cap of Figure 206;
- [00274] Figure 203 shows a plan view of an inner cover for an example prosthetic device;
- [00275] Figure 204 shows a plan view of an outer cover for an example prosthetic device;
- [00276] Figure 205 shows an enlarged view of a strip of material for an example prosthetic device;
- [00277] Figure 206 shows an end view of the material of Figure 205;
- [00278] Figure 207 shows an end view of the material of Figure 205 arranged in a plurality of layers;
- [00279] Figure 208A shows an example implantable prosthetic device in the gap of the native valve as viewed from an atrial side of the native valve during diastole, with example inflatable spacers in a deflated condition;
- [00280] Figure 208B shows the device of Figure 208A during systole, with example inflatable spacers in a deflated condition;
- [00281] Figure 209A shows the device of Figure 208A during diastole, with example inflatable spacers in an inflated condition;
- [00282] Figure 209B shows the device of Figure 208A during systole, with example inflatable spacers in an inflated condition;
- [00283] Figure 210A shows an example expandable spacer in a compressed condition;
- [00284] Figure 210B shows the expandable spacer of Figure 210A in an expanded condition;

- [00285] Figure 211A shows an example implantable prosthetic device, with example inflatable spacers in a deflated condition;
- [00286] Figure 211B shows the device of Figure 211B, with example inflatable spacers in an inflated condition;
- [00287] Figure 212A is a side view of an example implantable prosthetic device;
- [00288] Figure 212B is a front/back view of the device of Figure 212A;
- [00289] Figure 213A is a top view of an example auxiliary spacer for attaching to the device of Figure 212A;
- [00290] Figure 213B is a side view of the spacer of Figure 213A;
- [00291] Figure 214 is a side view of the spacer of Figures 213A, 213B being assembled to the device of Figures 212A, 212B;
- [00292] Figure 215A is a side view of the spacer of Figures 213A, 213B assembled to the device of Figures 212A, 212B;
- [00293] Figure 215B is a top view of the assembly of Figure 215A;
- [00294] Figure 216A is a side view of an example implantable prosthetic device;
- [00295] Figure 216B is a front/back view of the device of Figure 216A;
- [00296] Figure 217A is a top view of an example auxiliary spacer for attaching to the device of Figure 216A;
- [00297] Figure 217B is a side view of the spacer of Figure 217A;
- [00298] Figure 218 is an example auxiliary spacer;
- [00299] Figure 219A is a top view of an example implantable prosthetic device;
- [00300] Figure 219B is a side view of an example implantable prosthetic device;
- [00301] Figure 220A is a top view of example auxiliary spacers;
- [00302] Figure 220B is a top view of example auxiliary spacers;
- [00303] Figure 220C is a top view of example auxiliary spacers;
- [00304] Figure 220D is a top view of example auxiliary spacers;
- [00305] Figure 220E is a top view of example auxiliary spacers;
- [00306] Figure 221 is a plan view of an example implantable prosthetic device cut from a flat sheet of material;
- [00307] Figure 222 is a perspective view of the device of Figure 221;
- [00308] Figure 223 shows the device of Figures 221–222 in the gap of the native valve as viewed from an atrial side of the native valve;
- [00309] Figure 224 is a plan view of an example implantable prosthetic device cut from a flat sheet of material;

- [00310] Figure 225 is a perspective view of the device of Figure 224;
- [00311] Figure 226 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00312] Figure 227 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00313] Figure 228 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00314] Figure 229 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00315] Figure 230 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00316] Figure 231 shows an example embodiment of an implantable prosthetic device with a two-piece cover;
- [00317] Figure 232A is a front view of an implantable prosthetic device including barbed clasps and substantially parallel paddle frame elements according to an example embodiment;
- [00318] Figure 232B is a cross section view taken along the plane indicated by lines 232B-232B in Figure 232A;
- [00319] Figure 233A is a view similar to Figure 232A with an annotation of the space between substantially parallel sections of the paddle frame elements;
- [00320] Figure 233B is a cross section view taken along the plane indicated by lines 233B-233B in Figure 233A;
- [00321] Figure 234A is a view similar to Figure 232A illustrating engagement of a portion of native valve leaflets between the substantially parallel paddle frame elements;
- [00322] Figure 234B is a cross section view taken along the plane indicated by lines 234B-234B in Figure 234A;
- [00323] Figure 235A is a view similar to the view of Figure 234A illustrating misaligned native valve leaflets;
- [00324] Figure 235B is a cross section view taken along the plane indicated by lines 235B-235B in Figure 235A;
- [00325] Figure 236 is a side view of an implantable prosthetic device according to an example embodiment;
- [00326] Figure 237 is a side view of two adjacent implantable prosthetic devices according to an example embodiment;

- [00327] Figure 238A is a side view of an implantable prosthetic device installed on a native valve according to an example embodiment;
- [00328] Figure 238B is a cross section view taken along the plane indicated by lines 238B-238B in Figure 238A;
- [00329] Figure 239A is a side view of two adjacent implantable prosthetic devices installed on a mitral valve according to an example embodiment;
- [00330] Figure 239B is a cross section view taken along the plane indicated by lines 239B-239B in Figure 239A;
- [00331] Figure 240A is a view similar to the view of Figure 239A illustrating two adjacent but misaligned implantable prosthetic devices;
- [00332] Figure 240B is a cross section view taken along the plane indicated by lines 240B-240B in Figure 240A;
- [00333] Figure 241 is a perspective view of a portion of a clasp with a flexible barb support according to an example embodiment;
- [00334] Figure 242 is the portion of a clasp of Figure 241 where the barb support is bent back to illustrate the flexible nature of the barb support in an example embodiment;
- [00335] Figures 243A-243H are schematic illustrations of the clasp with a flexible barb support of Figure 242 releasing from a valve leaflet;
- [00336] Figures 244A-244E are schematic illustrations of an implantable prosthetic device with a clasp and flexible barb support releasing from a valve leaflet;
- [00337] Figures 245A-245E are illustrations of an implantable prosthetic device with a clasp and flexible barb support releasing from a valve leaflet; and
- [00338] Figure 246 is an illustration of an implantable device exerting force on a single leaflet to illustrate a circumstance in which a clasp may be released from a native valve leaflet.
- [00339] detailed description
- [00340] The following description refers to the accompanying drawings, which illustrate specific embodiments of the present disclosure. Other embodiments having different structures and operation do not depart from the scope of the present disclosure.
- [00341] Example embodiments of the present disclosure are directed to devices and methods for repairing a defective heart valve. It should be noted that various embodiments of native valve reparation devices and systems for delivery are disclosed herein, and any combination of these options can be made unless specifically excluded. In other words, individual components of the disclosed devices and systems can be combined unless mutually exclusive or otherwise physically impossible.

[00342] As described herein, when one or more components are described as being connected, joined, affixed, coupled, attached, or otherwise interconnected, such interconnection may be direct as between the components or may be indirect such as through the use of one or more intermediary components. Also as described herein, reference to a "member," "component," or "portion" shall not be limited to a single structural member, component, or element but can include an assembly of components, members, or elements. Also as described herein, the terms "substantially" and "about" are defined as at least close to (and includes) a given value or state (preferably within 10% of, more preferably within 1% of, and most preferably within 0.1% of).

[00343] Figures 1 and 2 are cutaway views of the human heart H in diastolic and systolic phases, respectively. The right ventricle RV and left ventricle LV are separated from the right atrium RA and left atrium LA, respectively, by the tricuspid valve TV and mitral valve MV; i.e., the atrioventricular valves. Additionally, the aortic valve AV separates the left ventricle LV from the ascending aorta AA, and the pulmonary valve PV separates the right ventricle from the pulmonary artery PA. Each of these valves has flexible leaflets (e.g., leaflets 20, 22 shown in Figures 4 and 5) extending inward across the respective orifices that come together or "coapt" in the flow stream to form the one-way, fluid-occluding surfaces. The native valve repair systems of the present application are described primarily with respect to the mitral valve MV. Therefore, anatomical structures of the left atrium LA and left ventricle LV will be explained in greater detail. It should be understood that the devices described herein may also be used in repairing other native valves, e.g., the devices can be used in repairing the tricuspid valve TV, the aortic valve AV, and the pulmonary valve PV.

[00344] The left atrium LA receives oxygenated blood from the lungs. During the diastolic phase, or diastole, seen in Figure 1, the blood that was previously collected in the left atrium LA (during the systolic phase) moves through the mitral valve MV and into the left ventricle LV by expansion of the left ventricle LV. In the systolic phase, or systole, seen in Figure 2, the left ventricle LV contracts to force the blood through the aortic valve AV and ascending aorta AA into the body. During systole, the leaflets of the mitral valve MV close to prevent the blood from regurgitating from the left ventricle LV and back into the left atrium LA, and blood is collected in the left atrium from the pulmonary vein. In one example embodiment, the devices described by the present application are used to repair the function of a defective mitral valve MV. That is, the devices are configured to help close the leaflets of the mitral valve to prevent blood from regurgitating from the left ventricle LV and back into the left atrium LA. Unlike the prior art that describes using sutures or clips often require multiple sutures or clips and additional supports to treat large regurgitation, the devices described in the present application are designed to easily grasp and secure the native leaflets around a coaption element that acts as a filler in the regurgitant orifice.

[00345] Referring now to Figures 1–7, the mitral valve MV includes two leaflets, the anterior leaflet 20 and the posterior leaflet 22. The mitral valve MV also includes an annulus 24, which is a variably dense fibrous ring of tissues that encircles the leaflets 20, 22. Referring to Figure 3, the mitral valve MV is anchored to the wall of the left ventricle LV by chordae tendineae 10. The chordae tendineae 10 are cord-like tendons that connect the papillary muscles 12 (i.e., the muscles located at the base of the chordae tendineae and within the walls of the left ventricle) to the leaflets 20, 22 of the mitral valve MV. The papillary muscles 12 serve to limit the movements of the mitral valve MV and prevent the mitral valve from being reverted. The mitral valve MV opens and closes in response to pressure changes in the left atrium LA and the left ventricle LV. The papillary muscles do not open or close the mitral valve MV. Rather, the papillary muscles brace the mitral valve MV against the high pressure needed to circulate blood throughout the body. Together the papillary muscles and the chordae tendineae are known as the subvalvular apparatus, which functions to keep the mitral valve MV from prolapsing into the left atrium LA when the mitral valve closes.

[00346] Various disease processes can impair proper function of one or more of the native valves of the heart H. These disease processes include degenerative processes (e.g., Barlow's Disease, fibroelastic deficiency), inflammatory processes (e.g., Rheumatic Heart Disease), and infectious processes (e.g., endocarditis). In addition, damage to the left ventricle LV or the right ventricle RV from prior heart attacks (i.e., myocardial infarction secondary to coronary artery disease) or other heart diseases (e.g., cardiomyopathy) can distort a native valve's geometry, which can cause the native valve to dysfunction. However, the vast majority of patients undergoing valve surgery, such as surgery to the mitral valve MV, suffer from a degenerative disease that causes a malfunction in a leaflet (e.g., leaflets 20, 22) of a native valve (e.g., the mitral valve MV), which results in prolapse and regurgitation.

[00347] Generally, a native valve may malfunction in two different ways: (1) valve stenosis; and (2) valve regurgitation. Valve stenosis occurs when a native valve does not open completely and thereby causes an obstruction of blood flow. Typically, valve stenosis results from buildup of calcified material on the leaflets of a valve, which causes the leaflets to thicken and impairs the ability of the valve to fully open to permit forward blood flow.

[00348] The second type of valve malfunction, valve regurgitation, occurs when the leaflets of the valve do not close completely thereby causing blood to leak back into the prior chamber (e.g., causing blood to leak from the left ventricle to the left atrium). There are three main mechanisms by which a native valve becomes regurgitant—or incompetent—which include Carpentier's type I, type II, and type III malfunctions. A Carpentier type I malfunction involves the dilation of the annulus such that normally functioning leaflets are distracted from each other and fail to form a tight seal (i.e., the leaflets do not coapt properly). Included in a type I mechanism malfunction are perforations of the leaflets, as are

present in endocarditis. A Carpentier's type II malfunction involves prolapse of one or more leaflets of a native valve above a plane of coaption. A Carpentier's type III malfunction involves restriction of the motion of one or more leaflets of a native valve such that the leaflets are abnormally constrained below the plane of the annulus. Leaflet restriction can be caused by rheumatic disease (Ma) or dilation of a ventricle (IIIb).

[00349] Referring to Figure 4, when a healthy mitral valve MV is in a closed position, the anterior leaflet 20 and the posterior leaflet 22 coapt, which prevents blood from leaking from the left ventricle LV to the left atrium LA. Referring to Figure 5, regurgitation occurs when the anterior leaflet 20 and/or the posterior leaflet 22 of the mitral valve MV is displaced into the left atrium LA during systole. This failure to coapt causes a gap 26 between the anterior leaflet 20 and the posterior leaflet 22, which allows blood to flow back into the left atrium LA from the left ventricle LV during systole. As set forth above, there are several different ways that a leaflet (e.g. leaflets 20, 22 of mitral valve MV) may malfunction, which can thereby lead to regurgitation.

[00350] Referring to Figure 6, in certain situations, the mitral valve MV of a patient can have a wide gap 26 between the anterior leaflet 20 and the posterior leaflet 22 when the mitral valve is in a closed position (i.e., during the systolic phase). For example, the gap 26 can have a width W between about 2.5 mm and about 17.5 mm, such as between about 5 mm and about 15 mm, such as between about 7.5 mm and about 12.5 mm, such as about 10 mm. In some situations, the gap 26 can have a width W greater than 15 mm. In any of the above-mentioned situations, a valve repair device is desired that is capable of engaging the anterior leaflet 20 and the posterior leaflet 22 to close the gap 26 and prevent regurgitation of blood through the mitral valve MV.

[00351] Although stenosis or regurgitation can affect any valve, stenosis is predominantly found to affect either the aortic valve AV or the pulmonary valve PV, and regurgitation is predominantly found to affect either the mitral valve MV or the tricuspid valve TV. Both valve stenosis and valve regurgitation increase the workload of the heart H and may lead to very serious conditions if left untreated; such as endocarditis, congestive heart failure, permanent heart damage, cardiac arrest, and ultimately death. Because the left side of the heart (i.e., the left atrium LA, the left ventricle LV, the mitral valve MV, and the aortic valve AV) is primarily responsible for circulating the flow of blood throughout the body, malfunction of the mitral valve MV or the aortic valve AV is particularly problematic and often life threatening. Accordingly, because of the substantially higher pressures on the left side of the heart, dysfunction of the mitral valve MV or the aortic valve AV is often more problematic.

[00352] Malfunctioning native heart valves may either be repaired or replaced. Repair typically involves the preservation and correction of the patient's native valve. Replacement typically involves

replacing the patient's native valve with a biological or mechanical substitute. Typically, the aortic valve AV and pulmonary valve PV are more prone to stenosis. Because stenotic damage sustained by the leaflets is irreversible, the most conventional treatments for a stenotic aortic valve or stenotic pulmonary valve are removal and replacement of the valve with a surgically implanted heart valve, or displacement of the valve with a transcatheter heart valve. The mitral valve MV and the tricuspid valve TV are more prone to deformation of leaflets, which, as described above, prevents the mitral valve or tricuspid valve from closing properly and allows for regurgitation or back flow of blood from the ventricle into the atrium (e.g., a deformed mitral valve MV may allow for regurgitation or back flow from the left ventricle LV to the left atrium LA). The regurgitation or back flow of blood from the ventricle to the atrium results in valvular insufficiency. Deformations in the structure or shape of the mitral valve MV or the tricuspid valve TV are often repairable. In addition, regurgitation can occur due to the chordae tendineae 10 becoming dysfunctional (e.g., the chordae tendineae may stretch or rupture), which allows the anterior leaflet 20 and the posterior leaflet 22 to be reverted such that blood is regurgitated into the left atrium LA. The problems occurring due to dysfunctional chordae tendineae 10 can be repaired by repairing the chordae tendineae or the structure of the mitral valve (e.g., by securing the leaflets 20, 22 at the affected portion of the mitral valve).

[00353] The devices and procedures disclosed herein often make reference to repairing a mitral valve for illustration. However, it should be understood that the devices and concepts provided herein can be used to repair any native valve, as well as any component of a native valve. For example, referring now to Figure 7, any of the devices and concepts provided herein can be used to repair the tricuspid valve TV. For example, any of the devices and concepts provided herein can be used between any two of the anterior leaflet 30, septal leaflet 32, and posterior leaflet 34 to prevent regurgitation of blood from the right ventricle into the right atrium. In addition, any of the devices and concepts provided herein can be used on all three of the leaflets 30, 32, 34 together to prevent regurgitation of blood from the right ventricle to the right atrium. That is, the valve repair devices provided herein can be centrally located between the three leaflets 30, 32, 34.

[00354] An example implantable prosthetic device has a coaption element and at least one anchor. The coaption element is configured to be positioned within the native heart valve orifice to help fill the space and form a more effective seal, thereby reducing or preventing regurgitation described above. The coaption element can have a structure that is impervious or resistant to blood and that allows the native leaflets to close around the coaption element during ventricular systole to block blood from flowing from the left or right ventricle back into the left or right atrium, respectively. The prosthetic device can be configured to seal against two or three native valve leaflets; that is, the device may be used in the native mitral (bicuspid) and tricuspid valves. The coaption element is sometimes referred

to herein as a spacer because the coaption element can fill a space between improperly functioning native mitral or tricuspid leaflets that do not close completely.

[00355] The coaption element (e.g., spacer, coaptation element, etc.) can have various shapes. In some embodiments, the coaption element can have an elongated cylindrical shape having a round cross-sectional shape. In other embodiments, the coaption element can have an oval cross-sectional shape, a crescent cross-sectional shape, a rectangular cross-sectional shape, or various other non-cylindrical shapes. The coaption element can have an atrial portion positioned in or adjacent to the left atrium, a ventricular or lower portion positioned in or adjacent to the left ventricle, and a side surface that extends between the native mitral leaflets. In embodiments configured for use in the tricuspid valve, the atrial or upper portion is positioned in or adjacent to the right atrium, and the ventricular or lower portion is positioned in or adjacent to the right ventricle, and the side surface that extends between the native tricuspid leaflets.

[00356] The anchor can be configured to secure the device to one or both of the native mitral leaflets such that the coaption element is positioned between the two native leaflets. In embodiments configured for use in the tricuspid valve, the anchor is configured to secure the device to one, two, or three of the tricuspid leaflets such that the coaption element is positioned between the three native leaflets. In some embodiments, the anchor can attach to the coaption element at a location adjacent the ventricular portion of the coaption element. In some embodiments, the anchor can attach to an actuation element, such as a shaft or actuation wire, to which the coaption element is also attached. In some embodiments, the anchor and the coaption element can be positioned independently with respect to each other by separately moving each of the anchor and the coaption element along the longitudinal axis of the shaft or actuation wire. In some embodiments, the anchor and the coaption element can be positioned simultaneously by moving the anchor and the coaption element together along the longitudinal axis of the shaft or actuation wire. The anchor can be configured to be positioned behind a native leaflet when implanted such that the leaflet is grasped by the anchor.

[00357] The prosthetic device can be configured to be implanted via a delivery sheath. The coaption element and the anchor can be compressible to a radially compressed state and can be self-expandable to a radially expanded state when compressive pressure is released. The device can be configured for the anchor to be expanded radially away from the still-compressed coaption element initially in order to create a gap between the coaption element and the anchor. A native leaflet can then be positioned in the gap. The coaption element can be expanded radially, closing the gap between the coaption element and the anchor and capturing the leaflet between the coaption element and the anchor. In some embodiments, the anchor and coaption element are optionally configured to self-expand. The implantation methods for various embodiments can be different and are more fully discussed below

with respect to each embodiment. Additional information regarding these and other delivery methods can be found in U.S. Pat. No. 8,449,599 and U.S. Patent Application Publication Nos. 2014/0222136, and 2014/0067052, 2016/0331523 each of which is incorporated herein by reference in its entirety. These methods can be performed on a living animal or on a simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, tissue, etc. being simulated), etc.

[00358] The disclosed prosthetic devices can be configured such that the anchor is connected to a leaflet, taking advantage of the tension from native chordae tendineae to resist high systolic pressure urging the device toward the left atrium. During diastole, the devices can rely on the compressive and retention forces exerted on the leaflet that is grasped by the anchor.

[00359] Referring now to Figures 8–14, a schematically illustrated implantable prosthetic device 100 is shown in various stages of deployment. The device 100 can include any other features for an implantable prosthetic device discussed in the present application, and the device 100 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00360] The device 100 is deployed from a delivery sheath or means for delivery 102 and includes a coaptation portion 104 and an anchor portion 106. The coaptation portion 104 of the device 100 includes a coaption element or means for coapting 110 that is adapted to be implanted between the leaflets of a native valve (e.g., a native mitral valve, tricuspid valve, etc.) and is slidably attached to an actuation element 112 (e.g., actuation wire, actuation shaft, actuation tube, etc.). The anchor portion 106 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element or means for actuating 112 opens and closes the anchor portion 106 of the device 100 to grasp the native valve leaflets during implantation. The actuation element 112 (e.g., wire, shaft, tube, screw, line, etc.) can take a wide variety of different forms. For example, the actuation element can be threaded such that rotation of the actuation element (e.g., wire, shaft, tube, screw, etc.) moves the anchor portion 106 relative to the coaption portion 104. Or, the actuation element can be unthreaded, such that pushing or pulling the actuation element 112 moves the anchor portion 106 relative to the coaption portion 104.

[00361] The anchor portion 106 of the device 100 includes outer paddles 120 and inner paddles 122 that are connected between a cap 114 and the coaption element or means for coapting 110 by portions 124, 126, 128. The portions 124, 126, 128 can be jointed and/or flexible to move between all of the positions described below. The interconnection of the outer paddles 120, the inner paddles 122, the coaption element or means for coapting 110, and the cap 114 by the portions 124, 126, and 128 can constrain the device to the positions and movements illustrated herein.

[00362] In some implementations, the actuation element or means for actuating 112 (e.g., actuation wire, actuation shaft, etc.) extends through the delivery sheath and the coaption element or means for coapting 110 to the cap 114 at the distal connection of the anchor portion 106. Extending and retracting the actuation element or means for actuating 112 increases and decreases the spacing between the coaption element or means for coapting 110 and the cap 114, respectively. A collar or other attachment element removably attaches the coaption element or means for coapting 110 to the delivery sheath or means for delivery 102 so that the actuation element or means for actuating 112 slides through the collar or other attachment element and through the coaption element or means for coapting 110 during actuation to open and close the paddles 120, 122 of the anchor portion 106.

[00363] Referring now to Figure 11, the anchor portion 106 includes attachment portions or gripping members. The illustrated gripping members comprise barbed clasps 130 that include a base or fixed arm 132, a moveable arm 134, barbs or means for securing 136, and a joint portion 138. The fixed arms 132 are attached to the inner paddles 122, with the joint portion 138 disposed proximate the coaption element or means for coapting 110. The barbed clasps have flat surfaces and do not fit in a recess of the paddle. Rather, the flat portions of the barbed clasps are disposed against the surface of the inner paddle 122. The joint portion 138 provides a spring force between the fixed and moveable arms 132, 134 of the barbed clasp 130. The joint portion 138 can be any suitable joint, such as a flexible joint, a spring joint, a pivot joint, or the like. In certain embodiments, the joint portion 138 is a flexible piece of material integrally formed with the fixed and moveable arms 132, 134. The fixed arms 132 are attached to the inner paddles 122 and remain stationary relative to the inner paddles 122 when the moveable arms 134 are opened to open the barbed clasps 130 and expose the barbs or means for securing 136. In some implementations, the barbed clasps 130 are opened by applying tension to actuation lines 116 attached to the moveable arms 134, thereby causing the moveable arms 134 to articulate, flex, or pivot on the joint portions 138. Other actuation mechanisms are also possible.

[00364] During implantation, the paddles 120, 122 can be opened and closed, for example, to grasp the native leaflets or native mitral valve leaflets between the paddles 120, 122 and the coaption element or means for coapting 110. The barbed clasps 130 can be used to grasp and/or further secure the native leaflets by engaging the leaflets with barbs or means for securing 136 and pinching the leaflets between the moveable and fixed arms 134, 132. The barbs or means for securing 136 of the barbed clasps 130 increase friction with the leaflets or may partially or completely puncture the leaflets. The actuation lines 116 can be actuated separately so that each barbed clasp 130 can be opened and closed separately. Separate operation allows one leaflet to be grasped at a time, or for the repositioning of a clasp 130 on a leaflet that was insufficiently grasped, without altering a successful grasp on the other leaflet. The barbed clasps 130 can be opened and closed relative to the position of the inner paddle 122 (as long as

the inner paddle is in an open position), thereby allowing leaflets to be grasped in a variety of positions as the particular situation requires.

[00365] The barbed clasps 130 can be opened separately by pulling on an attached actuation line 116 that extends through the delivery sheath or means for delivery 102 to the barbed clasp 130. The actuation line 116 can take a wide variety of forms, such as, for example, a line, a suture, a wire, a rod, a catheter, or the like. The barbed clasps 130 can be spring loaded so that in the closed position the barbed clasps 130 continue to provide a pinching force on the grasped native leaflet. This pinching force remains constant regardless of the position of the inner paddles 122. Barbs or means for securing 136 of the barbed clasps 130 can pierce the native leaflets to further secure the native leaflets.

[00366] Referring now to Figure 8, the device 100 is shown in an elongated or fully open condition for deployment from the delivery sheath. The device 100 is loaded in the delivery sheath in the fully open position, because the fully open position takes up the least space and allows the smallest catheter to be used (or the largest device 100 to be used for a given catheter size). In the elongated condition the cap 114 is spaced apart from the coaption element or means for coacting 110 such that the paddles 120, 122 of the anchor portion 106 are fully extended. In some embodiments, an angle formed between the interior of the outer and inner paddles 120, 122 is approximately 180 degrees. The barbed clasps 130 are kept in a closed condition during deployment through the delivery sheath or means for delivery 102 so that the barbs or means for securing 136 (Fig. 11) do not catch or damage the sheath or tissue in the patient's heart.

[00367] Referring now to Figure 9, the device 100 is shown in an elongated detangling condition, similar to Figure 8, but with the barbed clasps 130 in a fully open position, ranging from about 140 degrees to about 200 degrees, to about 170 degrees to about 190 degrees, or about 180 degrees between fixed and moveable portions of the barbed clasps 130. Fully opening the paddles 120, 122 and the clasps 130 has been found to improve ease of detanglement or detachment from anatomy of the patient during implantation of the device 100.

[00368] Referring now to Figure 10, the device 100 is shown in a shortened or fully closed condition. The compact size of the device 100 in the shortened condition allows for easier maneuvering and placement within the heart. To move the device 100 from the elongated condition to the shortened condition, the actuation element or means for actuating 112 is retracted to pull the cap 114 towards the coaption element or means for coacting 110. The joints or flexible connections 126 between the outer paddle 120 and inner paddle 122 are constrained in movement such that compression forces acting on the outer paddle 120 from the cap 114 being retracted towards the coaption element or means for coacting 110 cause the paddles or gripping elements 120, 122 to move radially outward. During movement from the open to closed position, the outer paddles 120 maintain an acute angle with the

actuation element or means for actuating 112. The outer paddles 120 can optionally be biased toward a closed position. The inner paddles 122 during the same motion move through a considerably larger angle as they are oriented away from the coaption element or means for coapting 110 in the open condition and collapse along the sides of the coaption element or means for coapting 110 in the closed condition. In certain embodiments, the inner paddles 122 are thinner and/or narrower than the outer paddles 120, and the joint or flexible portions 126, 128 connected to the inner paddles 122 can be thinner and/or more flexible. For example, this increased flexibility can allow more movement than the joint or flexible portion 124 connecting the outer paddle 120 to the cap 114. In certain other embodiments, the outer paddles 120 are narrower than the inner paddles 122. The joint or flexible portions 126, 128 connected to the inner paddles 122 can be more flexible, for example, to allow more movement than the joint or flexible portion 124 connecting the outer paddle 120 to the cap 114. In one embodiment, the inner paddles 122 can be the same or substantially the same width as the outer paddles (See for example, Figure 65A).

[00369] Referring now to Figures 11–13, the device 100 is shown in a partially open, grasp-ready condition. To transition from the fully closed to the partially open condition, the actuation element or means for actuating 112 is extended to push the cap 114 away from the coaption element or means for coapting 110, thereby pulling on the outer paddles 120, which in turn pulls on the inner paddles 122, causing the anchor portion 106 to partially unfold. The actuation lines 116 are also retracted to open the clasps 130 so that the leaflets can be grasped. In the example illustrated by Figure 11, the pair of inner and outer paddles 122, 120 are moved in unison, rather than independently, by a single actuation element or means for actuating 112. Also, the positions of the clasps 130 are dependent on the positions of the paddles 122, 120. For example, referring to Figure 10 closing the paddles 122, 120 also closes the clasps.

[00370] Figure 11A illustrates an example embodiment where the paddles 120, 122 are independently controllable. The device 100A illustrated by Figure 11A is similar to the device illustrated by Figure 11, except the device 100A includes an actuation element that is configured as two independent actuation elements 112A, 112B, which are coupled to two independent caps 114A, 114B. To transition a first inner paddle and a first outer paddle from the fully closed to the partially open condition, the actuation element or means for actuating 112A is extended to push the cap 114A away from the coaption element or means for coapting 110, thereby pulling on the outer paddle 120, which in turn pulls on the inner paddle 122, causing the first anchor portion 106 to partially unfold. To transition a second inner paddle and a second outer paddle from the fully closed to the partially open condition, the actuation element or means for actuating 112B is extended to push the cap 114 away from the coaption element or means for coapting 110, thereby pulling on the outer paddle 120, which in turn

pulls on the inner paddle 122, causing the second anchor portion 106 to partially unfold. The independent paddle control illustrated by Figure 11A can be implemented on any of the devices disclosed by the present application.

[00371] Referring now to Figure 12, one of the actuation lines 116 is extended to allow one of the clasps 130 to close. Referring now to Figure 13, the other actuation line 116 is extended to allow the other clasp 130 to close. Either or both of the actuation lines 116 can be repeatedly actuated to repeatedly open and close the barbed clasps 130.

[00372] Referring now to Figure 14, the device 100 is shown in a fully closed and deployed condition. The delivery sheath or means for delivery 102 and actuation element or means for actuating 112 is/are retracted and the paddles 120, 122 and clasps 130 remain in a fully closed position. Once deployed, the device 100 can be maintained in the fully closed position with a mechanical latch or can be biased to remain closed through the use of spring materials, such as steel, other metals, plastics, composites, etc. or shape-memory alloys such as Nitinol. For example, the jointed or flexible portions 124, 126, 128, 138, and/or the inner and outer paddles 122, 120 and/or an additional biasing component (see component 524 in Figure 28) can be formed of metals such as steel or shape-memory alloy, such as Nitinol—produced in a wire, sheet, tubing, or laser sintered powder—and are biased to hold the outer paddles 120 closed around the coaption element or means for coapting 110 and the barbed clasps 130 pinched around native leaflets. Similarly, the fixed and moveable arms 132, 134 of the barbed clasps 130 are biased to pinch the leaflets. In certain embodiments, the attachment or joint portions 124, 126, 128, 138, and/or the inner and outer paddles 122, and/or an additional biasing component (see component 524 in Figure 28) can be formed of any other suitably elastic material, such as a metal or polymer material, to maintain the device in the closed condition after implantation.

[00373] Referring now to Figures 226–231, the implantable device 100 is shown provided with a cover 140. The cover 140 can be a cloth material such as polyethylene cloth of a fine mesh. The cloth cover can provide a blood seal on the surface of the spacer, and/or promote rapid tissue ingrowth. The cover 140 includes first and second cover portions 142, 144 that each cover different portions of the device 100. In some embodiments, a portion of one of the first and second cover portions 142, 144 overlaps a portion of the other of the first and second cover portion 142, 144. The first and second cover portions 142, 144 can be arranged in various ways, and in some embodiments, can include an overlapping portion 146 that overlaps one of the first and second cover portions 142, 144.

[00374] Referring now to Figures 226–229, various arrangements of the first and second cover portions 142, 144 are shown without overlapping portions 146. Referring now to Figure 226, the first cover portion 142 (represented by thin line cross-hatching), which can be made from a single piece of material, extends from the cap 114 to cover the cap 114, outer paddles 120, inner paddles 122, and the

fixed arms 132 of the clasps 130. The second cover 144 (represented by thick line cross-hatching), which can be a single piece of material, covers the coaption element or means for coapting 110.

[00375] Referring now to Figure 227, the first cover portion 142, which can be made from a single piece of material, extends from the cap 114 to cover the cap 114, outer paddles 120, inner paddles 122, the fixed arms 132 and moveable arms 134 of the clasps 130. As with the cover 140 of Figure 226, the second cover 144 covers the coaption element or means for coapting 110.

[00376] Referring now to Figure 228, the first cover portion 142, which can be made from a single piece of material, extends from the cap 114 to cover the cap 114, outer paddles 120, inner paddles 122, and the fixed arms 132 of the clasps 130. The second cover 144, which can be made from a single piece of material, covers the coaption element or means for coapting 110 and extends from the coaption element or means for coapting 110 to cover the moveable arms 134 of the clasps 130.

[00377] Referring now to Figure 229, the first cover portion 142, which can be made from a single piece of material, extends from the cap 114 to cover the cap 114 and outer paddles 120. The second cover 144, which can be made from a single piece of material, covers the coaption element or means for coapting 110 and extends from the coaption element or means for coapting 110 to cover the inner paddles 122, and the fixed arms 132 and moveable arms 134 of the clasps 130.

[00378] Referring now to Figures 230–231, arrangements of the first and second cover portions 142, 144 are shown that include an overlapping portion 146. Referring now to Figure 230, the first cover portion 142, which can be made from a single piece of material, extends from the cap 114 to cover the cap 114, outer paddles 120, inner paddles 122, and the fixed arms 132 and moveable arms 134 of the clasps 130. The second cover 144, which can be made from a single piece of material, covers the coaption element or means for coapting 110 and includes overlapping portions 146 that extend from the coaption element or means for coapting 110 to overlap a portion of the moveable arms 134 that are covered by the first cover 142.

[00379] Referring now to Figure 231, the first cover portion 142, which can be made from a single piece of material, extends from the cap 114 to cover the cap 114, outer paddles 120, inner paddles 122, and the fixed arms 132 of the clasps 130. The second cover 144, which can be made from a single piece of material, covers the coaption element or means for coapting 110 and moveable arms 134 of the clasps 130. The first cover 142 also includes overlapping portions 146 that extend from the fixed arms 132 and inner paddles 122 to overlap a portion of the moveable arms 134 and coaption element or means for coapting 110 that are covered by the second cover 144.

[00380] Referring now to Figures 15–20, the implantable device 100 of Figures 8–14 is shown being delivered and implanted within the native mitral valve MV of the heart H. The methods and steps

shown and/or discussed can be performed on a living animal or on a simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, heart, tissue, etc. being simulated), etc.

[00381] Referring now to Figure 15, the delivery sheath is inserted into the left atrium LA through the septum and the device 100 is deployed from the delivery sheath in the fully open condition. The actuation element or means for actuating 112 is then retracted to move the device 100 into the fully closed condition shown in Figure 16. As can be seen in Figure 17, the device 100 is moved into position within the mitral valve MV into the ventricle LV and partially opened so that the leaflets 20, 22 can be grasped. Referring now to Figure 18, an actuation line 116 is extended to close one of the clasps 130, capturing a leaflet 20. Figure 19 shows the other actuation line 116 being then extended to close the other clasp 130, capturing the remaining leaflet 22. As can be seen in Figure 20, the delivery sheath or means for delivery 102 and actuation element or means for actuating 112 and actuation lines 116 are then retracted and the device 100 is fully closed and deployed in the native mitral valve MV.

[00382] Referring now to Figure 21, an example implantable prosthetic device 200 or frame thereof is shown. In certain embodiments, the device 200 includes an annular spacer member 202, a fabric cover (not shown), and anchors 204 extending from the spacer member 202. The ends of each anchor 204 can be coupled to respective struts of the spacer member 202 by respective sleeves 206 that can be crimped or welded around the connection portions of the anchors 204 and the struts of the spacer member 202. In one example embodiment, a latching mechanism can bind the spacer member 202 to the anchor 204 within the sleeve 206. For example, the sleeve can be machined to have an interior shape that matches or is slightly smaller than the exterior shape of the ends of the spacer member 202 and the anchor 204, so that the sleeve can be friction fit on the connection portions. One or more barbs or projections 208 can be mounted on the frame of the spacer member 202. The free ends of the barbs or projections 208 can comprise various shapes including rounded, pointed, barbed, or the like. The projections 208 can exert a retaining force against native leaflets by virtue of the anchors 204, which are shaped to force the native leaflets inwardly into the spacer member 202.

[00383] Referring now to Figure 22, an example implantable prosthetic device 300 or frame thereof is shown. In certain embodiments, the prosthetic spacer device 300 includes an annular spacer member 302, a fabric cover (not shown), and anchors 304 extending from the spacer member 302 and can be configured similar to the prosthetic spacer device 200. One or more barbs or projections 306 can be mounted on the frame of the spacer member 302. The ends of the projections 306 can comprise stoppers 308. The stoppers 308 of the projections can be configured in a wide variety of different ways. For example, the stoppers 308 can be configured to limit the extent of the projections 306 that can engage and/or penetrate the native leaflets and/or the stoppers can be configured to prevent removal of the projections 306 from the tissue after the projections 306 have penetrated the tissue.

[00384] The anchors 304 of the prosthetic spacer device 300 can be configured similar to the anchors 204 of the prosthetic spacer device 200 except that the curve of each anchor 304 comprises a larger radius than the anchors 204. As such, the anchors 304 cover a relatively larger portion of the spacer member 302 than the anchors 204. This can, for example, distribute the clamping force of the anchors 304 against the native leaflets over a relatively larger surface of the native leaflets in order to further protect the native leaflet tissue.

[00385] Additional details regarding the prosthetic spacer devices can be found, for example, in U.S. Patent Application Publication No. 2016/0331523 and U.S. Provisional Application No. 62/161,688, which applications are incorporated by reference herein. The devices 200, 300 can include any other features for an implantable prosthetic device discussed in the present application, and the device 200, 300 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00386] Referring now to Figures 23–27, an example embodiment of an implantable prosthetic spacer device 400 and components thereof are shown. The device 400 can include any other features for an implantable prosthetic device discussed in the present application, and the device 400 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00387] Referring now to Figure 23, the prosthetic spacer or coaption device 400 can include a coaption portion 404 and an anchor portion 406, the anchor portion 406 including a plurality of anchors 408. The coaption portion 404 includes a coaption or spacer member 410. The anchor portion 406 includes a plurality of paddles 420 (e.g., two in the illustrated embodiment), and a plurality of clasps 430 (e.g., two in the illustrated embodiment). A first or proximal collar 411, and a second collar or cap 414 are used to move the coaption portion 404 and the anchor portion 406 relative to one another.

[00388] As shown in Figure 25, first connection portions 425 of the anchors 408 can be coupled to and extend from a first portion 417 of the coaption or spacer member 410, and second connection portions 421 of the anchors 408 can be coupled to the second collar 414. The proximal collar 411 can be coupled to a second portion 419 of the coaption member 410.

[00389] The coaption member 410 and the anchors 408 can be coupled together in various ways. For example, as shown in the illustrated embodiment, the coaption member 410 and the anchors 408 can be coupled together by integrally forming the coaption member 410 and the anchors 408 as a single, unitary component. This can be accomplished, for example, by forming the coaption member 410 and the anchors 408 from a braided or woven material, such as braided or woven nitinol wire. In other embodiments, the coaption member 410 and the anchors 408 can be coupled together by welding,

fasteners, adhesive, joint connections, sutures, friction fittings, swaging, and/or other means for coupling.

[00390] Referring now to Figure 24, the anchors 408 can comprise first portions or outer paddles 420 and second portions or inner paddles 422 separated by joint portions 423. In this manner, the anchors 408 are configured similar to legs in that the inner paddles 422 are like upper portions of the legs, the outer paddles 420 are like lower portions of the legs, and the joint portions 423 are like knee portions of the legs. In some embodiments, the inner paddle portion 422, the outer paddle portion 420, and the joint portion 423 are formed from a continuous strip of a fabric, such as a metal fabric. In some embodiments, the strip of fabric is a composite strip of fabric.

[00391] The anchors 408 can be configured to move between various configurations by axially moving the cap 414 relative to the proximal collar 411 and thus the anchors 408 relative to the coaption member 410 along a longitudinal axis extending between the first or distal and second or proximal portions 417, 419 of the coaption member 410. For example, the anchors 408 can be positioned in a straight configuration by moving the cap 414 away from the coaption member 410. In the straight configuration, the paddle portions are aligned or straight in the direction of the longitudinal axis of the device and the joint portions 423 of the anchors 408 are adjacent the longitudinal axis of the coaption member 410 (e.g., similar to the configuration shown in Figure 59). From the straight configuration, the anchors 408 can be moved to a fully folded configuration (e.g., Figure 23) by moving the toward the coaption member 410. Initially as the cap 414 moves toward the coaption member 410, the anchors 408 bend at the joint portions 423, 425, 421 and the joint portions 423 move radially outwardly relative to the longitudinal axis of the coaption member 410 and axially toward the first portion 417 of the coaption member 410, as shown in Figures 24–25. As the cap 414 continues to move toward the coaption member 410, the joint portions 423 move radially inwardly relative to the longitudinal axis of the coaption member 410 and axially toward the proximal portion 419 of the coaption member 410, as shown in Figure 23.

[00392] In some embodiments, an angle between the inner paddles 422 of the anchors 408 and the coaption member 410 can be approximately 180 degrees when the anchors 408 are in the straight configuration (see, e.g., Figure 59), and the angle between the inner paddles 422 of the anchors 408 and the coaption member 410 can be approximately 0 degrees when the anchors 408 are in the fully folded configuration (See Figure 23). The anchors 408 can be positioned in various partially folded configurations such that the angle between the inner paddles 422 of the anchors 408 and the coaption member 410 can be approximately 10–170 degrees or approximately 45–135 degrees.

[00393] Configuring the prosthetic spacer device 400 such that the anchors 408 can extend to a straight or approximately straight configuration (e.g. approximately 120–180 degrees relative to the coaption

member 410) can provide several advantages. For example, this can reduce the radial crimp profile of the prosthetic spacer device 400. It can also make it easier to grasp the native leaflets by providing a larger opening in which to grasp the native leaflets. Additionally, the relatively narrow, straight configuration can prevent or reduce the likelihood that the prosthetic spacer device 400 will become entangled in native anatomy (e.g., chordae tendineae) when positioning and/or retrieving the prosthetic spacer device 400 into the delivery apparatus.

[00394] Referring again to Figure 24, the clasps 430 can comprise attachment or fixed portions 432 and arm or moveable portions 434. The attachment or fixed portions 432 can be coupled to the inner paddles 422 of the anchors 408 in various ways such as with sutures, adhesive, fasteners, welding, stitching, swaging, friction fit and/or other means for coupling or fastening.

[00395] In some embodiments, the moveable portions 434 can articulate, flex, or pivot relative to the fixed portions 432 between an open configuration (e.g., Figure 24) and a closed configuration (Figures 23 and 25). In some embodiments, the clasps 430 can be biased to the closed configuration. In some embodiments, in the open configuration, the fixed portions 432 and the moveable portions 434 flex or pivot away from each other such that native leaflets can be positioned between the fixed portions 432 and the moveable portions 434. In some embodiments, in the closed configuration, the fixed portions 432 and the moveable portions 434 flex or pivot toward each other, thereby clamping the native leaflets between the fixed portions 432 and the moveable portions 434.

[00396] Referring to Figures 26–27, clasps 430 are shown in top and perspective views. The fixed portions 432 (only one shown in Figures 26–27) can comprise one or more openings 433 (e.g., three in the illustrated embodiment). At least some of the openings 433 can be used to couple the fixed portions 432 to the anchors 408. For example, sutures and/or fasteners can extend through the openings 433 to couple the fixed portions 432 to the anchors 408 or other attachments, such as welding, adhesives, etc. can be used.

[00397] The moveable portions 434 can comprise one or more side beams 431. When two side beams are included as illustrated, the side beams can be spaced apart to form slots 431A. The slots 431A can be configured to receive the fixed portions 432. The moveable portions 434 can also include spring portions 434A that are coupled to the fixed portions 432 and barb support portions 434B disposed opposite the spring portions 434A.

[00398] The barb support portions 434B can comprise gripper or attachment elements such as barbs 436 and/or other means for frictionally engaging native leaflet tissue. The gripper elements can be configured to engage and/or penetrate the native leaflet tissue to help retain the native leaflets between the fixed portions 432 and moveable portions 434 of the clasps 430.

[00399] The barb support portions 434B can also comprise eyelets 435, which can be used to couple the barb support portions 434B to an actuation mechanism configured to flex or pivot the moveable portions 434 relative to the fixed portions 432. Additional details regarding coupling the clasps 430 to the actuation mechanism are provided below.

[00400] In some embodiments, the clasps 430 can be formed from a shape memory material such as nitinol, stainless steel, and/or shape memory polymers. In certain embodiments, the clasps 430 can be formed by laser-cutting a piece of flat sheet material (e.g., nitinol) or a tube in the configuration shown in Figure 26 or a similar or different configuration and then shape-setting the clasp 430 in the configuration shown in Figure 27.

[00401] Shape-setting the clasps 430 in this manner can provide several advantages. For example, the clasps 430 can optionally be compressed from the shape-set configuration (e.g., Figure 27) to the flat configuration (e.g., Figure 26), or another configuration which reduces the radial crimp profile of the clasps 430. For example, the barbs can optionally be compressed to a flat configuration. Reducing the radial crimp profile can improve trackability and retrievability of the prosthetic spacer device 400 relative to a catheter shaft of a delivery apparatus because barbs 436 are pointing radially inwardly toward the anchors 408 when the prosthetic spacer device 400 is advanced through or retrieved into the catheter shaft (see, e.g., Figure 33). This can prevent or reduce the likelihood that the clasps 430 may snag or skive the catheter shaft.

[00402] In addition, shape-setting the clasps 430 in the configuration shown in Figure 27 can increase the clamping force of the clasps 430 when the clasps 430 are in the closed configuration. This is because the moveable portions 434 are shape-set relative to the fixed portions 432 to a first position (e.g., Figure 27) which is beyond the position the moveable portions 434 can achieve when the clasps 430 are attached to the anchors 408 (e.g., Figure 25) because the anchors 408 prevent the moveable portions 434 from further movement toward the shape-set configuration. This results in moveable portions 434 having a preload (i.e., the clamping force is greater than zero) when the clasps 430 are attached to the anchors 408 and in the closed configuration. Thus, shape-setting the clasps 430 in the Figure 27 configuration can increase the clamping force of the clasps 430 compared to clasps that are shape-set in the closed configuration.

[00403] The magnitude of the preload of the clasps 430 can be altered by adjusting the angle in which the moveable portions 434 are shape-set relative to the fixed portions 432. For example, increasing the relative angle between the moveable portions 434 and the fixed portions 432 increases the preload, and decreasing the relative angle between the moveable portions 434 and the fixed portions 432 decreases the preload. It can also be adjusted in other ways, such as based on the configuration of the joint, hinge, materials, etc.

[00404] In some embodiments, the proximal collar 411 and/or the coaption member 410 can comprise a hemostatic seal 413 configured to reduce or prevent blood from flowing through the proximal collar 411 and/or the coaption member 410. For example, in some embodiments, the hemostatic seal 413 can comprise a plurality of flexible flaps 413A, as shown in Figure 23. In some embodiments, the flaps 413A can be configured to pivot from a sealed configuration to an open configuration to allow a shaft of a delivery apparatus to extend through the second collar 414. In one example embodiment, the flaps 413A form a seal around the shaft of the delivery apparatus. When the shaft of the delivery apparatus is removed, the flaps 413A can be configured to return to the sealed configuration from the open configuration.

[00405] Referring now to Figure 23A, an example embodiment of an implantable prosthetic spacer device 400A is shown. The device 400A can include any other features for an implantable prosthetic device discussed in the present application, and the device 400A can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00406] The prosthetic spacer or coaption device 400A can include a coaption portion 404A and an anchor portion 406A, the anchor portion 406A including a plurality of anchors 408A. The coaption portion 404A includes a coaption member or spacer 410A. The anchor portion 406A includes a plurality of paddles 420A (e.g., two in the illustrated embodiment), and a plurality of clasps 430A (e.g., two in the illustrated embodiment). A first or proximal collar 411A, and a second collar or cap 414A are used to move the coaption portion 404A and the anchor portion 406A relative to one another.

[00407] The coaption member 410A extends from a proximal portion 419B assembled to the collar 411A to a distal portion 417A that connects to the anchors 408A. The coaption member 410A and the anchors 408A can be coupled together in various ways. For example, as shown in the illustrated embodiment, the coaption member 410A and the anchors 408A can be coupled together by integrally forming the coaption member 410A and the anchors 408A as a single, unitary component. This can be accomplished, for example, by forming the coaption member 410A and the anchors 408A from a continuous strip 401A of a braided or woven material, such as braided or woven nitinol wire.

[00408] The anchors 408A are attached to the coaption member 410A by hinge portions 425A and to the cap 414A by hinge portions 421A. The anchors 408A can comprise first portions or outer paddles 420A and second portions or inner paddles 422A separated by joint portions 423A. The joint portions 423A are attached to paddle frames 424A that are hingably attached to the cap 414A. In this manner, the anchors 408A are configured similar to legs in that the inner paddles 422A are like upper portions of the legs, the outer paddles 420A are like lower portions of the legs, and the joint portions 423A are like knee portions of the legs. In the illustrated example, the inner paddle portion 422A, the outer

paddle portion 420A, and the joint portion 423A are formed from the continuous strip of fabric 401A, such as a metal fabric.

[00409] The anchors 408A can be configured to move between various configurations by axially moving the cap 414A relative to the proximal collar 411A and thus the anchors 408A relative to the coaption member 410A along a longitudinal axis extending between the cap 414A and the proximal collar 411A. For example, the anchors 408 can be positioned in a straight configuration (see Fig. 60A) by moving the cap 414A away from the coaption member 410A. In the straight configuration, the paddle portions 420A, 422A are aligned or straight in the direction of the longitudinal axis of the device and the joint portions 423A of the anchors 408A are adjacent the longitudinal axis of the coaption member 410A (e.g., similar to the configuration shown in Figure 60A). From the straight configuration, the anchors 408 can be moved to a fully folded configuration (e.g., Figure 23A) by moving the toward the coaption member 410A. Initially, as the cap 414A moves toward the coaption member 410A, the anchors 408A bend at joint portions 421A, 423A, 425A, and the joint portions 423A move radially outwardly relative to the longitudinal axis of the device 400A and axially toward the distal portion 417A of the coaption member 410A, as shown in Figures 53A and 54A. As the cap 414A continues to move toward the coaption member 410A, the joint portions 423A move radially inwardly relative to the longitudinal axis of the device 400A and axially toward the proximal portion 419A of the coaption member 410A, as shown in Figure 23A.

[00410] In some embodiments, an angle between the inner paddles 422A of the anchors 408A and the coaption member 410A can be approximately 180 degrees when the anchors 408A are in the straight configuration (see, e.g., Figure 60A), and the angle between the inner paddles 422A of the anchors 408A and the coaption member 410A can be approximately 0 degrees when the anchors 408A are in the fully folded configuration (see Figure 23A). The anchors 408A can be positioned in various partially folded configurations such that the angle between the inner paddles 422A of the anchors 408A and the coaption member 410A can be approximately 10–170 degrees or approximately 45–135 degrees.

[00411] Configuring the prosthetic spacer device 400A such that the anchors 408A can extend to a straight or approximately straight configuration (e.g. approximately 120–180 degrees relative to the coaption member 410A) can provide several advantages. For example, this can reduce the radial crimp profile of the prosthetic spacer device 400A. It can also make it easier to grasp the native leaflets by providing a larger opening in which to grasp the native leaflets. Additionally, the relatively narrow, straight configuration can prevent or reduce the likelihood that the prosthetic spacer device 400A will become entangled in native anatomy (e.g., chordae tendineae) when positioning and/or retrieving the prosthetic spacer device 400A into the delivery apparatus.

[00412] The clasps 430A can comprise attachment or fixed portions 432C and arm or moveable portions 434C. The attachment or fixed portions 432C can be coupled to the inner paddles 422A of the anchors 408A in various ways such as with sutures, adhesive, fasteners, welding, stitching, swaging, friction fit, and/or other means for coupling. The clasps 430A are similar to the clasps 430.

[00413] In some embodiments, the moveable portions 434C can articulate, flex, or pivot relative to the fixed portions 432C between an open configuration (e.g., Figure 54A) and a closed configuration (Figure 53A). In some embodiments, the clasps 430A can be biased to the closed configuration. In the open configuration, the fixed portions 432C and the moveable portions 434C articulate, pivot, or flex away from each other such that native leaflets can be positioned between the fixed portions 432C and the moveable portions 434C. In the closed configuration, the fixed portions 432C and the moveable portions 434C articulate, pivot, or flex toward each other, thereby clamping the native leaflets between the fixed portions 432C and the moveable portions 434C.

[00414] The strip 401A is attached to the collar 411A, cap 414A, paddle frames 424A, clasps 430A to form both the coaption portion 404A and the anchor portion 406A of the device 400A. In the illustrated embodiment, the coaption member 410A, hinge portions 421A, 423A, 425A, outer paddles 420A, and inner paddles 422A are formed from the continuous strip 401A. The continuous strip 401A can be a single layer of material or can include two or more layers. In certain embodiments, portions of the device 400A have a single layer of the strip of material 401A and other portions are formed from multiple overlapping or overlying layers of the strip of material 401A. For example, Figure 23A shows the coaption member 410A and inner paddles 422A formed from multiple overlapping layers of the strip of material 401A. The single continuous strip of material 401A can start and end in various locations of the device 400A. The ends of the strip of material 401A can be in the same location or different locations of the device 400A. For example, in the illustrated embodiment of Figure 23A, the strip of material begins and ends in the location of the inner paddles 422A.

[00415] Referring now to Figure 30A, the example implantable prosthetic device 400A is shown covered with a cover 440A. The cover 440A is disposed on the coaption member 410A, the collar 411A, the cap 414A, the paddles 420A, 422A, the paddle frames 424A, and the clasps 430A. The cover 440A can be configured to prevent or reduce blood-flow through the prosthetic spacer device 400A and/or to promote native tissue ingrowth. In some embodiments, the cover 440A can be a cloth or fabric such as PET, velour, or other suitable fabric. In other embodiments, in lieu of or in addition to a fabric, the cover 440A can include a coating (e.g., polymeric material, silicone, etc.) that is applied to the prosthetic spacer device 400A.

[00416] Referring now to Figures 28–30, an example embodiment of an implantable prosthetic device 500 (e.g., a prosthetic spacer device) is shown. The implantable device 500 is one of the many different

configurations that the device 100 that is schematically illustrated in Figures 8–20 can take. The device 500 can include any other features for an implantable prosthetic device discussed in the present application, and the device 500 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00417] The prosthetic spacer device 500 can comprise a coaption element or spacer member 510, a plurality of anchors 508 that include outer paddles 520, inner paddles 522, clasps 530, a first or proximal collar 511, and a second collar or cap 514. These components of the prosthetic spacer device 500 can be configured the same or substantially similar to the corresponding components of the prosthetic spacer device 400.

[00418] The prosthetic spacer device 500 can also include a plurality of paddle extension members or paddle frames 524. The paddle frames 524 can be configured with a round three-dimensional shape with first connection portions 526 coupled to and extending from the cap 514 and second connection portions 528 disposed opposite the first connection portions 526. The paddle frames 524 can be configured to extend circumferentially farther around the coaption member 510 than the outer paddles 520. For example, in some embodiments, each of the paddle frames 524 extend around approximately half of the circumference of the coaption member 510 (as shown in Figure 29), and the outer paddles 520 extend around less than half of the circumference of the coaption member 510 (as shown in Figure 28). The paddle frames 524 can also be configured to extend laterally (i.e., perpendicular to a longitudinal axis of the coaption member 510) beyond an outer diameter of the coaption member 510. In the illustrated example, the inner paddle portions 522 and the outer paddle portions 520 can be formed from a continuous strip of fabric that are connected to the paddle frames 524. For example, the inner paddle portions and the outer paddle portions can be connected to the connection portion of the paddle frame at the flexible connection between the inner paddle portion and the outer paddle portion.

[00419] The paddle frames 524 can further be configured such that connection portions 528 of the paddle frames 524 are connected to or axially adjacent a joint portion 523. The connection portions of the paddle frames 524 can be positioned between outer and inner paddles 520, 522, on the outside of the paddle portion 520, on the inside of the inner paddle portion, or on top of the joint portion 523 when the prosthetic spacer device 500 is in a folded configuration (e.g., Figures 28–30). The connections between the paddle frames 524, the single strip that forms the outer and inner paddles 520, 522, the cap 514, and the coaption element can constrain each of these parts to the movements and positions described herein. In particular the joint portion 523 is constrained by its connection between the outer and inner paddles 520, 522 and by its connection to the paddle frame. Similarly, the paddle frame 524 is constrained by its attachment to the joint portion 523 (and thus the inner and outer paddles) and to the cap.

[00420] Configuring the paddle frames 524 in this manner provides increased surface area compared to the outer paddles 520 alone. This can, for example, make it easier to grasp and secure the native leaflets. The increased surface area can also distribute the clamping force of the paddles 520 and paddle frames 524 against the native leaflets over a relatively larger surface of the native leaflets in order to further protect the native leaflet tissue.

[00421] The increased surface area of the paddle frames 524 can also allow the native leaflets to be clamped to the prosthetic spacer device 500, such that the native leaflets coapt entirely around the coaption member 510. This can, for example, improve sealing of the native leaflet and thus prevent or further reduce mitral regurgitation.

[00422] Referring to Figure 30, the prosthetic spacer device 500 can also include a cover 540. In some embodiments, the cover 540 can be disposed on the coaption member 510, the paddles 520, 522, and/or the paddle frames 524. The cover 540 can be configured to prevent or reduce blood-flow through the prosthetic spacer device 500 and/or to promote native tissue ingrowth. In some embodiments, the cover 540 can be a cloth or fabric such as PET, velour, or other suitable fabric. In other embodiments, in lieu of or in addition to a fabric, the cover 540 can include a coating (e.g., polymeric, silicone, etc.) that is applied to the prosthetic device 500.

[00423] Figures 31–32 illustrate the implantable prosthetic device 500 of Figures 28 and 29 with anchors 508 of an anchor portion 506 and clasps 530 in open positions. The device 500 is deployed from a delivery sheath (not shown) and includes a coaption portion 504 and the anchor portion 506. The device 500 is loaded in the delivery sheath in the fully extended or bailout position, because the fully extended or bailout position takes up the least space and allows the smallest catheter to be used (See Figure 35). Or, the fully extended position allows the largest device 500 to be used for a given catheter size. The coaption portion 504 of the device includes a coaption element 510 for implantation between the native leaflets of a native valve (e.g., mitral valve, tricuspid valve, etc.). An insert 516A is disposed inside the coaption element 510. The insert 516A and the coaption element 510 are slidably attached to an actuation element 512 (e.g., actuation wire, rod, shaft, tube, screw, suture, line, etc.). The anchors 508 of the device 500 include outer paddles 520 and inner paddles 522 that are flexibly connected to the cap 514 and the coaption element 510. Actuation of the actuation element or means for actuation 512 opens and closes the anchors 508 of the device 500 to grasp the native valve leaflets during implantation.

[00424] The actuation element 512 extends through the delivery sheath (not shown), the proximal collar 511, the coaption element 510, the insert 516A, and extends to the cap 514. Extending and retracting the actuation element 512 increases and decreases the spacing between the coaption element 510 and

the cap 514, respectively. This changing of the spacing between the coaption element 510 and the cap 514 causes the anchor portion 506 of the device to move between different positions.

[00425] The proximal collar 511 optionally includes a collar seal 513 that forms a seal around the actuation element or means for actuation 512 during implantation of the device 500, and that seals shut when the actuation element 512 is removed to close or substantially close the proximal end of the device 500 to blood flow through the interior of the coaption element 510 after implantation. In some embodiments, a coupler or means for coupling 2214 (see Figure 145) removably engages and attaches the proximal collar 511 and the coaption element 510 to the delivery sheath. In some embodiments, coupler or means for coupling 2214 is held closed around the proximal collar 511 by the actuation element 512, such that removal of the actuation element 512 allows fingers (see Figure 145) of the coupler or means for coupling 2214 to open, releasing the proximal collar 511.

[00426] The proximal collar 511 and the insert 516A in the coaption element 510 slide along the actuation element 512 during actuation to open and close the paddles 520, 522 of the anchors 508. Referring to Figures 32A and 32B, in some embodiments the cap 514 optionally includes a sealing projection 516 that sealingly fits within a sealing opening 517 of the insert 516A. In one example embodiment, the cap 514 includes a sealing opening and the insert 516A includes a sealing projection. The insert 516A can sealingly fit inside a distal opening 515 of the coaption element 510, the coaption element 510 having a hollow interior. Referring to Figure 32A, the sealing projection 516 of the cap 514 sealingly engages the opening 517 in the insert 516A to maintain the distal end of the coaption element 510 closed or substantially closed to blood flow when the device 500 is implanted and/or in the closed position.

[00427] In one example embodiment, instead of the sealing engagement between the cap 514 and the insert 516A, the insert 516A can optionally include a seal, like the collar seal 513 of the proximal collar, that forms a seal around the actuation element or means for actuation 512 during implantation of the device 500, and that seals shut when the actuation element 512 is removed. Such a seal can close or substantially close the distal end of the coaption element 510 to blood flow after implantation.

[00428] The coaption element 510 and paddles 520, 522 are formed from a flexible material that can be a metal fabric, such as a mesh, woven, braided, or formed in any other suitable way or a laser cut or otherwise cut flexible material. The material can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. Paddle frames 524 provide additional pinching force between the inner paddles 522 and the coaption element 510 and assist in wrapping the leaflets around the sides of the coaption element 510 for a better seal between the coaption element 510 and the leaflets. In some embodiments, the covering 540 illustrated by Figure 30 extends around the paddle frames 524.

[00429] The clasps 530 include a base or fixed arm 532, a moveable arm 534, barbs 536, and a joint portion 538. The fixed arms 532 are attached to the inner paddles 522, with the joint portion 538 disposed proximate the coaption element 510. The barbed clasps have flat surfaces and do not fit in a recess of the paddle. Rather, the flat portion of the barbed clasps are disposed against the surface of the inner paddle 522. For example, the fixed arms 532 are attached to the inner paddles 522 through holes or slots 533 with sutures (not shown). The fixed arms 532 can be attached to the inner paddles 522 or another portion of the device with any suitable means, such as screws or other fasteners, crimped sleeves, mechanical latches or snaps, welding, adhesive, or the like. The fixed arms 532 remain stationary or substantially stationary relative to the inner paddles 522 when the moveable arms 534 are opened to open the barbed clasps 530 and expose the barbs 536. The barbed clasps 530 are opened by applying tension to actuation lines (not shown) attached to holes 535 in the moveable arms 534, thereby causing the moveable arms 534 to pivot or flex on the joint portions 538.

[00430] During implantation, the anchors 508 are opened and closed to grasp the native valve leaflets between the paddles 520, 522 and the coaption element 510. The barbed clasps 530 further secure the native leaflets by engaging the leaflets with barbs 536 and pinching the leaflets between the moveable and fixed arms 534, 532. The barbs 536 of the barbed clasps 530 increase friction with the leaflets or may partially or completely puncture the leaflets. The actuation lines can be actuated separately so that each barbed clasp 530 can be opened and closed separately. Separate operation allows one leaflet to be grasped at a time, or for the repositioning of a clasp 530 on a leaflet that was insufficiently grasped, without altering a successful grasp on the other leaflet. The barbed clasps 530 can open and close when the inner paddle 522 is not closed, thereby allowing leaflets to be grasped in a variety of positions as the particular situation requires.

[00431] Referring now to Figure 33, an example barbed clasp 600 for use in implantable prosthetic devices, such as the devices described above, is shown. However, a wide variety of different barbed clasps can be used. Examples of barbed clasps that can be used include but are not limited to any of the barbed clasps disclosed in the present application and any of the applications that are incorporated herein by reference and/or that the present application claims priority to. In the illustrated example, the barbed clasp 600 is formed from a top layer 602 and a bottom layer 604. The two-layer design of the clasp 600 allow thinner sheets of material to be used, thereby improving the flexibility of the clasp 600 over a clasp formed from a single thicker sheet, while maintaining the strength of the clasp 600 needed to successfully retain a native valve leaflet.

[00432] The barbed clasp 600 includes a fixed arm 610, a jointed portion 620, and a movable arm 630 having a barbed portion 640. The top and bottom layers 602, 604 have a similar shape and in certain embodiments are attached to each other at the barbed portion 640. However, the top and bottom layers

602, 604 can be attached to one another at other or additional locations. The jointed portion 620 is spring-loaded so that the fixed and moveable arms 610, 630 are biased toward each other when the barbed clasp 600 is in a closed condition. When assembled to an implantable prosthetic device, the fixed arm 610 is attached to a portion of the prosthetic device. The clasp 600 is opened by pulling on an actuation line attached to the moveable arm 630 until the spring force of the joint portion 620 is overcome.

[00433] The fixed arm 610 is formed from a tongue 611 of material extending from the jointed portion 620 between two side beams 631 of the moveable arm 630. The tongue 611 is biased between the side beams 631 by the joint portion 620 such that force must be applied to move the tongue 611 from a neutral position located beyond the side beams 631 to a preloaded position parallel or substantially parallel with the side beams 631. The tongue 611 is held in the preloaded position by an optional T-shaped cross-bar 614 that is attached to the tongue 611 and extends outward to engage the side beams 631. In one example embodiment, the cross-bar is omitted and the tongue 611 is attached to the inner paddle 522, and the inner paddle 522 maintains the clasp in the preloaded position. In the two-layer clasp application, the top and bottom layers 602, 604 or just the top layer can be attached to the inner paddle. In some embodiments, the angle between the fixed and moveable arms 610, 630 when the tongue is in the neutral position is about 30 to about 100 degrees, 30 to about 90 degrees, or about 30 to about 60 degrees, or about 40 to about 50 degrees, or about 45 degrees.

[00434] The tongue 611 includes holes 612 for receiving sutures (not shown) that attach the fixed arm 610 to an implantable device. The fixed arm 610 can be attached to an implantable device, such as with screws or other fasteners, crimped sleeves, mechanical latches or snaps, welding, adhesive, or the like. In certain embodiments, the holes 612 are elongated slots or oval-shaped holes to accommodate sliding of the layers 602, 604 without damaging the sutures attaching the clasp 600 to an implantable device.

[00435] The joint portion 620 is formed by two beam loops 622 that extend from the tongue 611 of the fixed arm 610 to the side beams 631 of the moveable arm 630. In certain embodiments, the beam loops 622 are narrower than the tongue 611 and side beam 631 to provide additional flexibility. The beam loops 622 each include a center portion 624 extending from the tongue 611 and an outer portion 626 extending to the side beams 631. The beam loops 622 are bent into a somewhat spiral or helical shape by bending the center and outer portions 624, 626 in opposite directions, thereby forming an offset or step distance 628 between the tongue 611 and side beams 631. The step distance 628 provides space between the arms 610, 630 to accommodate the native leaflet of the native valve after it is grasped. In certain embodiments, the step distance 628 is about 0.5 millimeter to about 1 millimeter, or about 0.75 millimeters.

[00436] When viewed in a top plan view, the beam loops have an “omega-like” shape. This shape of the beam loops 622 allows the fixed and moveable arms 610, 630 to move considerably relative to each other without plastically deforming the clasp material. For example, in certain embodiments, the tongue 611 can be flexed or pivoted from a neutral position that is approximately 45 degrees beyond the moveable arm 630 to a fully open position that ranges from about 140 degrees to about 200 degrees, from about 170 degrees to about 190 degrees, or about 180 degrees from the moveable arm 630 without plastically deforming the clasp material. In certain embodiments, the clasp material plastically deforms during opening without reducing or without substantially reducing the pinch force exerted between the fixed and moveable arms in the closed position.

[00437] Preloading the tongue 611 enables the clasp 600 to maintain a pinching or clipping force on the native leaflet when closed. The preloading of the tongue 611 provides a significant advantage over prior art clips that provide little or no pinching force when closed. Additionally, closing the clasp 600 with spring force is a significant improvement over clips that use a one-time locking closure mechanism, as the clasp 600 can be repeatedly opened and closed for repositioning on the leaflet while still maintaining sufficient pinching force when closed. In addition, the spring-loaded clasps also allow for easier removal of the device over time as compared to a device that locks in a closed position (after tissue ingrowth). In one example embodiment, both the clasps and the paddles are spring biased to their closed positions (as opposed to being locked in the closed position), which can allow for easier removal of the device after tissue ingrowth.

[00438] The barbed portion 640 of the moveable arm 630 includes an eyelet 642, barbs 644, and barb supports 646. Positioning the barbed portion of the clasp 600 toward an end of the moveable arm 630 increases the space between the barbs 644 and the fixed arm 610 when the clasp 600 is opened, thereby improving the ability of the clasp 600 to successfully grasp a leaflet during implantation. This distance also allows the barbs 644 to more reliably disengage from the leaflet for repositioning. In certain embodiments, the barbs of the clasps can be staggered longitudinally to further distribute pinch forces and local leaflet stress.

[00439] The barbs 644 are laterally spaced apart at the same distance from the joint portion 620, providing a superior distribution of pinching forces on the leaflet tissue while also making the clasp more robust to leaflet grasp than barbs arranged in a longitudinal row. In some embodiments, the barbs 644 can be staggered to further distribute pinch forces and local leaflet stress.

[00440] The barbs 644 are formed from the bottom layer 604 and the barb supports 646 are formed from the top layer. In certain embodiments, the barbs are formed from the top layer 602 and the barb supports are formed from the bottom layer 604. Forming the barbs 644 only in one of the two layers 602, 604 allows the barbs to be thinner and therefore effectively sharper than a barb formed from the

same material that is twice as thick. The barb supports 646 extend along a lower portion of the barbs 644 to stiffen the barbs 644, further improving penetration and retention of the leaflet tissue. In certain embodiments, the ends of the barbs 644 are further sharpened using any suitable sharpening means.

[00441] The barbs 644 are angled away from the moveable arm 630 such that they easily penetrate tissue of the native leaflets with minimal pinching or clipping force. The barbs 644 extend from the moveable arm at an angle of about 45 degrees to about 75 degrees, or about 45 degrees to about 60 degrees, or about 48 to about 56 degrees, or about 52 degrees. The angle of the barbs 644 provides further benefits, in that force pulling the implant off the native leaflet will encourage the barbs 644 to further engage the tissue, thereby ensuring better retention. Retention of the leaflet in the clasp 600 can be further improved by the position of the T-shaped cross bar 614 near the barbs 644 when the clasp 600 is closed. In this arrangement, the tissue pierced by the barbs 644 is pinched against the moveable arm 630 at the cross bar 614 location, thereby forming the tissue into an S-shaped torturous path as it passes over the barbs 644. Thus, forces pulling the leaflet away from the clasp 600 will encourage the tissue to further engage the barbs 644 before the leaflets can escape. For example, leaflet tension during diastole can encourage the barbs to pull toward the end portion of the leaflet. The S-shaped path can utilize the leaflet tension during diastole to more tightly engage the leaflets with the barbs.

[00442] Each layer 602, 604 of the clasp 600 is laser cut from a sheet of shape-memory alloy, such as Nitinol. The top layer 602 is aligned and attached to the bottom layer 604. In certain embodiments, the layers 602, 604 are attached at the barbed portion 640 of the moveable arm 630. For example, the layers 602, 604 can be attached only at the barbed portion 640, to allow the remainder of the layers to slide relative to one another. Portions of the combined layers 602, 604, such as a fixed arm 610, barbs 644 and barb supports 646, and beam loops 622 are bent into a desired position. The layers 602, 604 can be bent and shape-set together or can be bent and shape-set separately and then joined together. The clasp 600 is then subjected to a shape-setting process so that internal forces of the material will tend to return to the set shape after being subjected to deformation by external forces. After shape-setting, the tongue 611 is moved to its preloaded position so that the cross-bar 614 can be attached. In one example embodiment, the clasp 600 can optionally be completely flattened for delivery through a delivery sheath and allowed to expand once deployed within the heart. The clasp 600 is opened and closed by applying and releasing tension on an actuation line, suture, wire, rod, catheter, or the like (not shown) attached to the moveable arm 630. In some embodiments, the actuation line or suture is inserted through an eyelet 642 near the barbed portion 640 of the moveable arm 630 and wraps around the moveable arm 630 before returning to the delivery sheath. In certain embodiments, an intermediate suture loop is made through the eyelet and the suture is inserted through the intermediate loop. An

alternate embodiment of the intermediate loop can be composed of fabric or another material attached to the movable arm, instead of a suture loop.

[00443] An intermediate loop of suture material reduces friction experienced by the actuation line/suture relative to the friction between the actuation line/suture and the clasp material. When the suture is looped through the eyelet 642 or intermediate loop, both ends of the actuation line/suture extend back into and through a delivery sheath (e.g., Figure 8). The suture can be removed by pulling one end of the suture proximally until the other end of the suture pulls through the eyelet or intermediate loop and back into the delivery sheath.

[00444] Referring now to Figure 34, a close-up view of one of the leaflets 20, 22 grasped by a barbed clasp such as clasps 430, 530 is shown. The leaflet 20, 22 is grasped between the moveable and fixed arms 434, 532 of the clasp 430, 530. As shown in Figure 34, the tissue of the leaflet 20, 22 is not pierced by the barbs 436, 536, though in some embodiments the barbs 436, 536 may partially or fully pierce through the leaflet 20, 22. The angle and height of the barbs 436, 536 relative to the moveable arm 434, 534 helps to secure the leaflet 20, 22 within the clasp 430, 530. In particular, a force pulling the implant off of the native leaflet will encourage the barbs 436, 536 to further engage the tissue, thereby ensuring better retention. Retention of the leaflet 20, 22 in the clasp 430, 530 is further improved by the position of fixed arm 432, 532 near the barbs 436, 536 when the clasp 430, 530 is closed. In this arrangement, the tissue is formed by the fixed arms 432, 532 and the moveable arms 434, 534 and the barbs 436, 536 into an S-shaped torturous path. Thus, forces pulling the leaflet away from the clasp 430, 530 will encourage the tissue to further engage the barbs 436, 536 before the leaflets can escape. For example, as mentioned above, leaflet tension during diastole can encourage the barbs to pull toward the end portion of the leaflet. The S-shaped path can utilize the leaflet tension during diastole to more tightly engage the leaflets with the barbs.

[00445] Referring now to Figures 35–46, the implantable device 500 is shown being delivered and implanted within the native mitral valve MV of the heart H. The methods and steps shown and/or discussed can be performed on a living animal or on a simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, heart, tissue, etc. being simulated), etc.

[00446] As described above, the device 500 has a covering 540 (see Figure 30) over the coaption element 510, clasps 530, inner paddles 522 and/or the outer paddles 520. The device 500 is deployed from a delivery sheath 502 and includes a coaption portion 504 and an anchor portion 506 including a plurality of anchors 508 (i.e., two in the illustrated embodiment). The coaption portion 504 of the device includes a coaption element 510 for implantation between the leaflets 20, 22 of the native mitral valve MV that is slidably attached to an actuation element or means for actuation 512. Actuation of

the actuation element or means for actuation 512 opens and closes the anchors 508 of the device 500 to grasp the mitral valve leaflets 20, 22 during implantation.

[00447] The anchors 508 of the device 500 include outer paddles 520 and inner paddles 522 that are flexibly connected to the cap 514 and the coaption element 510. The actuation element 512 extends through a capture mechanism 503 (see Figure 41), delivery sheath 502, and the coaption element 510 to the cap 514 connected to the anchor portion 506. Extending and retracting the actuation element 512 increases and decreases the spacing between the coaption element 510 and the cap 514, respectively. In the example illustrated by Figures 35-46, the pair of inner and outer paddles 522, 520 are moved in unison, rather than independently, by a single actuation element 512. Also, the positions of the clasps 530 are dependent on the positions of the paddles 522, 520. For example, referring to Figure 45 closing the paddles 522, 520 also closes the clasps. In one example embodiment, the device 500 can be made to have the paddles 520, 522 be independently controllable in the same manner as the Figure 11A embodiment.

[00448] Fingers of the capture mechanism 503 removably attach the collar 511 to the delivery sheath 502. The collar 511 and the coaption element 510 slide along the actuation element 512 during actuation to open and close the anchors 508 of the anchor portion 506. In some embodiments, the capture mechanism 503 is held closed around the collar 511 by the actuation element 512, such that removal of the actuation element 512 allows the fingers of the capture mechanism 503 to open, releasing the collar 511, and thus the coaption element 510.

[00449] In some embodiments, the coaption element 510 and paddles 520, 522 are formed from a flexible material that can be a metal fabric, such as a mesh, woven, braided, or formed in any other suitable way or a laser cut or otherwise cut flexible material. The flexible material can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. Other configurations are also possible.

[00450] The barbed clasps 530 include a base or fixed arm 532, a moveable arm 534, barbs 536 (see Figure 41), and a joint portion 538. The fixed arms 532 are attached to the inner paddles 522, with the joint portions 538 disposed proximate the coaption element 510. Sutures (not shown) attach the fixed arms 532 to the inner paddles 522. The fixed arms 532 can be attached to the inner paddles 522 and/or another portion of the device with any suitable means, such as screws or other fasteners, crimped sleeves, mechanical latches or snaps, welding, adhesive, or the like. The fixed arms 532 remain stationary or substantially stationary when the moveable arms 534 are opened to open the barbed clasps 530 and expose the barbs 536. The barbed clasps 530 are opened by applying tension to clasp control members or actuation lines 537 attached to the moveable arms 534, thereby causing the moveable arms 534 to pivot or flex on the joint portions 538.

[00451] During implantation, the anchors 508 are opened and closed to grasp the native valve leaflets between the paddles 520, 522 and the coaption element 510. The outer paddles 520 have a wide curved shape that fits around the curved shape of the coaption element 510 to more securely grip the leaflets 20, 22. The curved shape and rounded edges of the outer paddle 520 also prohibits tearing of the leaflet tissue. The barbed clasps 530 further secure the native leaflets by engaging the leaflets with barbs 536 and pinching the leaflets between the moveable and fixed arms 534, 532. The barbs 536 of the barbed clasps 530 increase friction with the leaflets or may partially or completely puncture the leaflets. The actuation lines can be actuated separately so that each barbed clasp 530 can be opened and closed separately. Separate operation allows one leaflet to be grasped at a time, or for the repositioning of a clasp 530 on a leaflet that was insufficiently grasped, without altering a successful grasp on the other leaflet. The barbed clasps 530 can be fully opened and closed when the inner paddle 522 is not closed, thereby allowing leaflets to be grasped in a variety of positions as the particular situation requires.

[00452] The device 500 is loaded in the delivery sheath in the fully open or fully extended position, because the fully open or fully extended position takes up the least space and allows the smallest catheter to be used (or the largest device 500 to be used for a given catheter size). Referring now to Figure 35, the delivery sheath is inserted into the left atrium LA through the septum and the device 500 is deployed from the delivery sheath 502 in the fully open condition. The actuation element 512 is then retracted to move the device 500 into the fully closed condition shown in Figures 36–37 and then maneuvered towards the mitral valve MV as shown in Figure 38. Referring now to Figure 39, when the device 500 is aligned with the mitral valve MV (or other native valve, if implanted in another valve), the actuation element 512 is extended to open the paddles 520, 522 into the partially opened position and the clasp control members or actuation lines 537 are retracted to open the barbed clasps 530 to prepare for leaflet grasp. Next, as shown in Figures 40–41, the partially open device 500 is inserted through the mitral valve MV until leaflets 20, 22 are properly positioned in between the inner paddles 522 and the coaption element 510 and inside the open barbed clasps 530. Figure 42 shows the device 500 with both clasps 530 closed, though the barbs 536 of one clasp 530 missed one of the leaflets 22. As can be seen in Figures 42–44, the out of position clasp 530 is opened and closed again to properly grasp the missed leaflet 22. When both leaflets 20, 22 are grasped properly, the actuation element 512 is retracted to move the device 500 into the fully closed position shown in Figure 45. With the device 500 fully implanted in the native mitral valve MV, the actuation element 512 is withdrawn to release the capture mechanism 503 from the proximal collar 511. Once deployed, the device 500 can be maintained in the fully closed position with a mechanical means such as a latch or can be biased to remain closed through the use of spring material, such as steel, and/or shape-memory alloys such as Nitinol. For example, the paddles 520, 522 can be formed of steel or Nitinol shape-memory alloy—

produced in a wire, sheet, tubing, or laser sintered powder-and are biased to hold the outer paddles 520 closed around the inner paddles 522, coaption element 510, and the barbed clasps 530 pinched around native leaflets 20,22.

[00453] The device 500 can have a wide variety of different shapes and sizes. Referring to Figures 6 and 6A-6E, in an example embodiment, the coaption element 510 functions as a gap filler in the valve regurgitant orifice, such as the gap 26 in the native valve illustrated by Figure 6. Referring to Figure 6A, since the coaption element 510 is deployed between two opposing valve leaflets 20, 22, the leaflets will not coapt against each other in the area of the coaption element 510, but coapt against the coaption element 510 instead. This reduces the distance the leaflets 20, 22 need to be approximated. A reduction in leaflet approximation distance can result in several advantages. For example, the coaption element and resulting reduced approximation can facilitate repair of severe mitral valve anatomies, such as large gaps in functional valve disease (See for example, Figure 6). Since the coaption element 510 reduces the distance the native valves have to be approximated, the stress in the native valves can be reduced or minimized. Shorter approximation distance of the valve leaflets 20,22 can require less approximation forces which can result in less tension of the leaflets and less diameter reduction of the valve annulus. The smaller reduction of the valve annulus (or no reduction of the valve annulus) can result in less reduction in valve orifice area as compared to a device without a spacer. As a result, the coaption element 510 can reduce the transvalvular gradients.

[00454] In one example embodiment, the paddle frames 524 conform to the shape of the coaption element 510. In one example, if the coaption element 510 is wider than the paddle frames 524, a distance (gap) between the opposing leaflets 20, 22 can be created by the device 500. Referring to Figures 6A-6E, in one example embodiment the paddles are configured to conform to the shape or geometry of the coaption element 510. As a result, the paddles can mate with both the coaption element 510 and the native valve. Referring to Figures 6D and 6E, in one example embodiment the paddles 524 surround the coaption element 510. Thus, when the leaflets 20, 22 are coapted or pressed against the coaption element 510, the leaflets 20, 22 fully surround or “hug” the coaption element 510 in its entirety, thus small leaks on the medial and lateral aspects of the coaption element 510 can be prevented. Figures 6B and 6C illustrate the valve repair device 500 attached to native valve leaflets 20, 22 from the ventricular side of the mitral valve. Figure 6A illustrates the valve repair device 500 attached to mitral valve leaflets 20, 22 from the atrial side of the mitral valve. Referring to Figures 6A and 6B, when the paddles have a geometry that conforms to the geometry of the coaption element 510, the leaflets 20, 22 can coapt around the coaption element and/or along the length of the spacer. Referring to Figure 6E, a schematic atrial view/surgeons view depicts the paddle frames (which would not actually be visible from a true atrial view), conforming to the spacer geometry. The opposing leaflets

20, 22 (the ends of which would also not be visible in the true atrial view) being approximated by the paddles, to fully surround or “hug” the coaption element 510.

[00455] Referring to Figures 6B–6E, because the paddle frames 524 conform to the shape of the coaption element 510, the valve leaflets 20, 22 can be coapted completely around the coaption element by the paddle frames 524, including on the lateral and medial aspects 601, 603 of the coaption element 510. This coaption of the leaflets 20, 22 against the lateral and medial aspects of the coaption element 510 would seem to contradict the statement above that the presence of a coaption element 510 minimizes the distance the leaflets need to be approximated. However, the distance the leaflets 20, 22 need to be approximated is still minimized if the coaption element 510 is placed precisely at a regurgitant gap and the regurgitant gap is less than the width (medial – lateral) of the coaption element 510.

[00456] Referring to Figures 6A and 6E, the coaption element 510 can take a wide variety of different shapes. In one example embodiment, when viewed from the top (and/or sectional views from the top; see Figures 95-102), the coaption element has an oval shape or an elliptical shape. The oval or elliptical shape can allow the paddle frames 524 conform to the shape of the coaption element and/or can reduce lateral leaks (See Figures 65–83).

[00457] As mentioned above, the coaption element 510 can reduce tension of the opposing leaflets by reducing the distance the leaflets need to be approximated to the coaption element 510 at the positions 601, 603. The reduction of the distance of leaflet approximation at the positions 601, 603 can result in the reduction of leaflet stresses and gradients. In addition, as is also explained above, the native valve leaflets 20, 22 can surround or “hug” the coaption element in order to prevent lateral leaks. In one example embodiment, the geometrical characteristics of the coaption element can be designed to preserve and augment these two characteristics of the device 500. Referring to Figure 2A, as seen from a Left Ventricular Outflow Tract (LVOT) view, the anatomy of the leaflets 20, 22 is such that the inner sides of the leaflets coapt at the free end portions and the leaflets 20, 22 start receding or spreading apart from each other. The leaflets 20, 22 spread apart in the atrial direction, until each leaflet meets with the mitral annulus.

[00458] In one example embodiment, the valve repair device 500 and its coaption element 510 are designed to conform to the geometrical anatomy of the valve leaflets 20, 22. To achieve valve sealing, the valve repair device 500 can be designed to coapt the native leaflets to the coaption element, completely around the coaption element, including at the medial 601 and lateral 603 positions of the coaption element 510. Additionally, a reduction on forces required to bring the leaflets into contact with the coaption element 510 at the positions 601, 603 can minimize leaflet stress and gradients.

Figure 2B shows how a tapered or triangular shape of a coaption element 510 will naturally adapt to the native valve geometry and to its expanding leaflet nature (toward the annulus).

[00459] Figure 6D illustrates the geometry of the coaption element 510 and the paddle frame 524 from an LVOT perspective. As can be seen in this view, the coaption element 510 has a tapered shape being smaller in dimension in the area closer to where the inside surfaces of the leaflets 20, 22 are required to coapt and increase in dimension as the coaption element extends toward the atrium. The depicted native valve geometry is accommodated by a tapered coaption element geometry. Still referring to Figure 6D, the tapered coaption element geometry, in conjunction with the illustrated expanding paddle frame 524 shape (toward the valve annulus) can help to achieve coaptation on the lower end of the leaflets, reduce stress, and minimize transvalvular gradients.

[00460] Referring to Figure 6C, in one example embodiment remaining shapes of the coaption element 510 and the paddle frames 524 can be defined based on an Intra-Commissural view of the native valve and the device 500. Two factors of these shapes are leaflet coaptation against the coaption element 510 and reduction of stress on the leaflets due to the coaption. Referring to Figures 6C and 67, to both coapt the valve leaflets 20, 22 against the coaption element 510 and reduce the stress applied to the valve leaflets 20, 22 by the coaption element 510 and/or the paddles 524, the coaption element 510 can have a round or rounded shape and the paddle frame 524 can have a full radius that spans from one leg of the paddles to the other leg of the paddles. The round shape of the coaption element and/or the illustrated fully rounded shape of the paddle frame will distribute the stresses on the leaflets 20, 22 across a large, curved engagement area 607. For example, in Figure 6C, the force on the leaflets 20, 22 by the paddle frames is spread along the entire rounded length of the paddle frame 524, as the leaflets 20 try to open during the diastole cycle.

[00461] Referring to Figure 67, in one example embodiment, to cooperate with the full rounded shape of the paddle frames 524, and/or in order to maximize leaflet coaptation against the coaption element 510 and leaflet-to-leaflet coaptation at the sides 601, 603 of the coaption element 510, the shape of the coaption element in the intra-commissural view follows a round shape. Referring to Figure 67, the round shape of the coaption element in this view substantially follows or is close to the shape of the paddle frames 524.

[00462] In one example embodiment, the overall shape of the coaption element 510 is an elliptical or oval cross section when seen from the surgeon's view (top view - See Figure 70), a tapered shape or cross section when seen from an LVOT view (side view - See Figure 69), and a substantially round shape or rounded shape when seen from an intra-commissural view (See Figure 68). In one example embodiment, a blend of these three geometries can result in the three-dimensional shape of the illustrated coaption element 510 that achieves the benefits described above.

[00463] In one example embodiment, the dimensions of the coaption element are selected to minimize the number of implants that a single patient will require (preferably one), while at the same time maintaining low transvalvular gradients. In one example embodiment, the anterior-posterior distance X47B at the top of the spacer is about 5 mm, and the medial-lateral distance X67D of the spacer at its widest is about 10 mm. In one example embodiment, the overall geometry of the device 500 can be based on these two dimensions and the overall shape strategy described above. It should be readily apparent that the use of other anterior-posterior distance anterior-posterior distance X47B and medial-lateral distance X67D as starting points for the device will result in a device having different dimensions. Further, using other dimensions and the shape strategy described above will also result in a device having different dimensions.

[00464] Tables A, B, and C provide examples of values and ranges for dimensions of the device and components of the device for some example embodiments. However, the device can have a wide variety of different shapes and sizes and need not have all or any of the dimensional values or dimensional ranges provided in Tables A, B, and C. Table A provides examples of linear dimensions X in millimeters and ranges of linear dimensions in millimeters for the device and components of the device. Table B provides examples of radius dimensions R in millimeters and ranges of radius dimensions in millimeters for the device and components of the device. Table C provides examples of angular dimensions α in degrees and ranges of angular dimensions in degrees for the device and components of the device. The subscripts for each of the dimensions indicates the drawing in which the dimension first appears.

Table A -Linear Dimensions (mm)

	Example	Range A		Range B		Range D	Range C		Range C	
		(max)	(min)	(max)	(min)	(max)	(min)	(max)	(min)	
X _{47A}	2.8	1.4	4.2	2.1	3.5	2.52	3.08	2.66	2.94	
X _{47B}	5.3	2.65	7.95	3.975	6.625	4.77	5.83	5.035	5.565	
X _{47C}	2.8	1.4	4.2	2.1	3.5	2.52	3.08	2.66	2.94	
X _{47D}	3.3	1.65	4.95	2.475	4.125	2.97	3.63	3.135	3.465	
X _{47E}	5.4	2.7	8.1	4.05	6.75	4.86	5.94	5.13	5.67	
X _{47F}	8	4	12	6	10	7.2	8.8	7.6	8.4	
X _{47G}	1	0.5	1.5	0.75	1.25	0.9	1.1	0.95	1.05	
X _{52A}	12	6	18	9	15	10.8	13.2	11.4	12.6	
X _{58A}	11	5.5	16.5	8.25	13.75	9.9	12.1	10.45	11.55	
X _{59A}	27	13.5	40.5	20.25	33.75	24.3	29.7	25.65	28.35	
X _{59B}	8	4	12	6	10	7.2	8.8	7.6	8.4	
X _{59C}	7	3.5	10.5	5.25	8.75	6.3	7.7	6.65	7.35	
X _{67A}	2.4	1.2	3.6	1.8	3	2.16	2.64	2.28	2.52	
X _{67B}	3.7	1.85	5.55	2.775	4.625	3.33	4.07	3.515	3.885	
X _{67C}	10	5	15	7.5	12.5	9	11	9.5	10.5	
X _{67D}	10	5	15	7.5	12.5	9	11	9.5	10.5	
X _{67E}	15	7.5	22.5	11.25	18.75	13.5	16.5	14.25	15.75	
X _{67F}	1	0.5	1.5	0.75	1.25	0.9	1.1	0.95	1.05	
X ₆₈	14.2	7.1	21.3	10.65	17.75	12.78	15.62	13.49	14.91	
X _{70A}	1.7	0.85	2.55	1.275	2.125	1.53	1.87	1.615	1.785	
X _{70B}	2.8	1.4	4.2	2.1	3.5	2.52	3.08	2.66	2.94	
X _{71A}	6.2	3.1	9.3	4.65	7.75	5.58	6.82	5.89	6.51	
X _{71B}	5.4	2.7	8.1	4.05	6.75	4.86	5.94	5.13	5.67	
X _{71C}	0.9	0.45	1.35	0.675	1.125	0.81	0.99	0.855	0.945	
X _{71D}	3.75	1.875	5.625	2.8125	4.6875	3.375	4.125	3.5625	3.9375	
X _{71E}	4.5	2.25	6.75	3.375	5.625	4.05	4.95	4.275	4.725	
X _{72A}	10.4	5.2	15.6	7.8	13	9.36	11.44	9.88	10.92	
X _{91A}	8.8	4.4	13.2	6.6	11	7.92	9.68	8.36	9.24	
X _{91B}	7.8	3.9	11.7	5.85	9.75	7.02	8.58	7.41	8.19	
X _{91C}	8.1	4.05	12.15	6.075	10.125	7.29	8.91	7.695	8.505	
X _{91D}	13.6	6.8	20.4	10.2	17	12.24	14.96	12.92	14.28	
X _{92A}	0.05	0.025	0.075	0.0375	0.0625	0.045	0.055	0.0475	0.0525	
X _{92B}	1.5	0.75	2.25	1.125	1.875	1.35	1.65	1.425	1.575	
X _{92C}	10.8	5.4	16.2	8.1	13.5	9.72	11.88	10.26	11.34	
X _{95A}	13.8	6.9	20.7	10.35	17.25	12.42	15.18	13.11	14.49	
X _{96A}	8.2	4.1	12.3	6.15	10.25	7.38	9.02	7.79	8.61	
X _{96B}	5.1	2.55	7.65	3.825	6.375	4.59	5.61	4.845	5.355	
X _{96C}	0.5	0.25	0.75	0.375	0.625	0.45	0.55	0.475	0.525	
X ₉₇	10.8	5.4	16.2	8.1	13.5	9.72	11.88	10.26	11.34	
X _{98A}	9.8	4.9	14.7	7.35	12.25	8.82	10.78	9.31	10.29	
X _{98B}	5	2.5	7.5	3.75	6.25	4.5	5.5	4.75	5.25	
X ₉₉	8	4	12	6	10	7.2	8.8	7.6	8.4	
X _{100A}	9.7	4.85	14.55	7.275	12.125	8.73	10.67	9.215	10.185	
X _{100B}	4	2	6	3	5	3.6	4.4	3.8	4.2	
X ₁₀₁	5.2	2.6	7.8	3.9	6.5	4.68	5.72	4.94	5.46	
X _{102A}	8	4	12	6	10	7.2	8.8	7.6	8.4	
X _{102B}	2.9	1.45	4.35	2.175	3.625	2.61	3.19	2.755	3.045	
X _{117A}	4.2	2.1	6.3	3.15	5.25	3.78	4.62	3.99	4.41	
X _{117B}	14.5	7.25	21.75	10.875	18.125	13.05	15.95	13.775	15.225	
X _{117C}	13	6.5	19.5	9.75	16.25	11.7	14.3	12.35	13.65	

[0465]

Table B - Radius Dimensions (mm)

	Example	Range A		Range B		Range C		Range D	Range C	
		(max)	(min)	(max)	(min)	(max)	(min)	(max)	(min)	
R _{47A}	1.3	0.65	1.95	0.975	1.625	1.17	1.43	1.235	1.365	
R _{47B}	1	0.5	1.5	0.75	1.25	0.9	1.1	0.95	1.05	
R _{47C}	0.6	0.3	0.9	0.45	0.75	0.54	0.66	0.57	0.63	
R _{47D}	5	2.5	7.5	3.75	6.25	4.5	5.5	4.75	5.25	
R _{47E}	0.75	0.375	1.125	0.5625	0.9375	0.675	0.825	0.7125	0.7875	
R _{67A}	0.75	0.375	1.125	0.5625	0.9375	0.675	0.825	0.7125	0.7875	
R _{67B}	0.9	0.45	1.35	0.675	1.125	0.81	0.99	0.855	0.945	
R _{70A}	1.4	0.7	2.1	1.05	1.75	1.26	1.54	1.33	1.47	
R _{70B}	0.4	0.2	0.6	0.3	0.5	0.36	0.44	0.38	0.42	
R _{70C}	0.6	0.3	0.9	0.45	0.75	0.54	0.66	0.57	0.63	
R _{70D}	7	3.5	10.5	5.25	8.75	6.3	7.7	6.65	7.35	
R _{71A}	1.6	0.8	2.4	1.2	2	1.44	1.76	1.52	1.68	
R _{72A}	1.85	0.925	2.775	1.3875	2.3125	1.665	2.035	1.7575	1.9425	
R _{73A}	1.9	0.95	2.85	1.425	2.375	1.71	2.09	1.805	1.995	
R _{91A}	9.2	4.6	13.8	6.9	11.5	8.28	10.12	8.74	9.66	
R _{91B}	0.3	0.15	0.45	0.225	0.375	0.27	0.33	0.285	0.315	
R _{91C}	0.3	0.15	0.45	0.225	0.375	0.27	0.33	0.285	0.315	
R _{92A}	0.75	0.375	1.125	0.5625	0.9375	0.675	0.825	0.7125	0.7875	
R _{94A}	1.65	0.825	2.475	1.2375	2.0625	1.485	1.815	1.5675	1.7325	
R _{96A}	1.7	0.85	2.55	1.275	2.125	1.53	1.87	1.615	1.785	
R _{96B}	4.7	2.35	7.05	3.525	5.875	4.23	5.17	4.465	4.935	
R _{98A}	1.3	0.65	1.95	0.975	1.625	1.17	1.43	1.235	1.365	
R _{98B}	7.6	3.8	11.4	5.7	9.5	6.84	8.36	7.22	7.98	
R _{100A}	0.9	0.45	1.35	0.675	1.125	0.81	0.99	0.855	0.945	
R _{100B}	9.6	4.8	14.4	7.2	12	8.64	10.56	9.12	10.08	
R _{102A}	0.45	0.225	0.675	0.3375	0.5625	0.405	0.495	0.4275	0.4725	
R _{102B}	8.5	4.25	12.75	6.375	10.625	7.65	9.35	8.075	8.925	
R _{115A}	9.3	4.65	13.95	6.975	11.625	8.37	10.23	8.835	9.765	
R _{115B}	7.8	3.9	11.7	5.85	9.75	7.02	8.58	7.41	8.19	
R _{115C}	7.8	3.9	11.7	5.85	9.75	7.02	8.58	7.41	8.19	
R _{115D}	6.7	3.35	10.05	5.025	8.375	6.03	7.37	6.365	7.035	
R _{115E}	1.5	0.75	2.25	1.125	1.875	1.35	1.65	1.425	1.575	

[0466]

Table C - Angular Dimensions (degrees)

	Example	Range A		Range B		Range C		Range D	Range C	
		(max)	(min)	(max)	(min)	(max)	(min)	(max)	(min)	
α_{47}	12	6	18	9	15	10.8	13.2	11.4	12.6	
α_{91A}	9	4.5	13.5	6.75	11.25	8.1	9.9	8.55	9.45	
α_{91B}	14	7	21	10.5	17.5	12.6	15.4	13.3	14.7	
α_{91C}	20	10	30	15	25	18	22	19	21	
α_{117A}	39	19.5	58.5	29.25	48.75	35.1	42.9	37.05	40.95	
α_{117B}	3	1.5	4.5	2.25	3.75	2.7	3.3	2.85	3.15	

[0467]

[00468] Referring now to Figures 47–61, an implantable device 500 is shown in various positions and configurations. The implantable device 500 can include any other features for an implantable prosthetic device discussed in the present application, and the device 500 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00469] The implantable device 500 has a proximal or attachment portion 505, a coaption element 510 (e.g., spacer, etc.), inner anchor portions or inner paddles 522, outer anchor portions or outer paddles 520, anchor extension members or paddle frames 524, and a distal portion 507. The inner paddles 522

are attached (e.g., jointly attached, etc.) between the coaption element 510 and the outer paddles 520. The outer paddles 520 are attached (e.g., jointly attached, etc.) between the inner paddles 522 and the distal portion 507. The paddle frames 524 are attached to the cap 514 at the distal portion 507 and extend to the joint portion 523 between the inner and outer paddles 522, 520. In some embodiments, the paddle frames 524 are formed of a material that is more rigid and stiff than the material forming the paddles 522, 520 so that the paddle frames 524 provide support for the paddles 522, 520. In one example embodiment, the inner paddles 522 are stiff, relatively stiff, rigid, have rigid portions and/or are stiffened by a stiffening member or the fixed portion of the clasps 530. The stiffening of the inner paddle allows the device to move to the various different positions shown and described herein. The inner paddle 522, the outer paddle 520, the coaption can all be interconnected as described herein, such that the device 500 is constrained to the movements and positions shown and described herein.

[00470] Referring now to Figures 47–48, the device 500 is shown in a closed position. When closed, the inner paddles 522 are disposed between the outer paddles 520 and the coaption element 510. In some embodiments, the device 500 includes clasps or gripping members 530 (Figure 48) that can be opened and closed to grasp the native leaflets 20, 22 of the mitral valve MV. The clasps 530 are attached to and move with the inner paddles 522 and are disposed between the inner paddles 522 and the coaption element 510.

[00471] Referring now to Figures 49–51, the device 500 is shown in a partially open position. The device 500 is moved into the partially open position by an actuation element or means for actuation 512 that passes through the attachment portion 505 and coaption element 510 and can removably engage the distal portion 507. The actuation element 512 is extended through the attachment portion 505 such that a distance D between the attachment portion 505 and distal portion 507 increases as the actuation element 512 is extended. In the example illustrated by Figures 49–51, the pair of inner and outer paddles 522, 520 are moved in unison, rather than independently, by a single actuation element 512. Also, the positions of the clasps 530 are dependent on the positions of the paddles 522, 520. For example, referring to Figure 48 closing the paddles 522, 520 also closes the clasps. In one example embodiment, the device 500 can be made to have the paddles 520, 522 be independently controllable in the same manner as the Figure 11A embodiment.

[00472] Extending the actuation element 512 pulls down on the bottom portions of the outer paddles 520 and paddle frames 524. The outer paddles 520 and paddle frames 524 pull down on the inner paddles 522, where the inner paddles 522 are connected to the outer paddles 520 and the paddle frames 524. Because the attachment portion 505 and coaption element 510 are held in place, the inner paddles 522 are caused to flex or pivot in an opening direction. The inner paddles 522, the outer paddles 520,

and the paddle frames all flex to the position shown in Figure 49. Opening the paddles 522, 520 and frames 524 forms a gap 520A between the coaption element 510 and the inner paddle 522 that can receive and grasp the native leaflets 20.

[00473] As is described above, some embodiments of the device 500 include clasps or gripping members 530. When the device 500 is partially opened the clasps 530 are exposed. In some embodiments, the closed clasps 530 (Figure 50) can be opened (Figure 51), thereby creating a second opening or gap 530A for receiving and capturing the native leaflets 20, 22. The extent of the gap 530A in the clasps 530 is limited to the extent that the inner paddle 522 has spread away from the coaption element 510.

[00474] Referring now to Figures 52–54, the device 500 is shown in a laterally extended or open position. The device 500 is moved into the laterally extended or open position by continuing to extend the actuation element 512 described above, thereby increasing the distance D between the attachment portion 505 and distal portion 507. Continuing to extend the actuation element 512 pulls down on the outer paddles 520 and paddle frames 524, thereby causing the inner paddles 522 to spread apart further from the coaption element 510. In the laterally extended or open position, the inner paddles 522 extend horizontally more than in other positions of the device 500 and form an approximately 90-degree angle with the coaption element 510. Similarly, the paddle frames 524 are at their maximum spread position when the device 500 is in the laterally extended or open position. The increased gap 520A formed in the laterally extended or open position allows clasps 530 to open further (Figure 54) before engaging the coaption element 510, thereby increasing the size of the gap 530A.

[00475] Referring now to Figures 55–57, the device 500 is shown in a three-quarters extended position. The device 500 is moved into the three-quarters extended position by continuing to extend the actuation element 512 described above, thereby increasing the distance D between the attachment portion 505 and distal portion 507. Continuing to extend the actuation element 512 pulls down on the outer paddles 520 and paddle frames 524, thereby causing the inner paddles 522 to spread apart further from the coaption element 510. In the three-quarters extended position, the inner paddles 522 are open beyond 90 degrees to an approximately 135-degree angle with the coaption element 510. The paddle frames 524 are less spread than in the laterally extended or open position and begin to move inward toward the actuation element 512 as the actuation element 512 extends further. The outer paddles 520 also flex back toward the actuation element 512. As with the laterally extended or open position, the increased gap 520A formed in the laterally extended or open position allows clasps 530 to open even further (Figure 57), thereby increasing the size of the gap 530A.

[00476] Referring now to Figure 58, the device 500 is shown in an almost fully extended position. The device 500 is moved into the almost fully extended position by continuing to extend the actuation

element 512 described above, thereby increasing the distance D between the attachment portion 505 and distal portion 507. Continuing to extend the actuation element 512 pulls down on the outer paddles 520 and paddle frames 524, thereby causing the inner paddles 522 to spread apart further from the coaption element 510. In the almost fully extended position the inner paddles 522 begin to approach an approximately 180-degree angle with the coaption element 510. Although the inner paddles move to this position, the outer paddles 520 and the paddle frames 524 never move or flex to or past a ninety-degree angle with respect to the coaption element 510. In the almost fully extended position the inner and outer paddles 522, 520 can have a somewhat curved shape.

[00477] Referring now to Figures 59–61, the device 500 is shown in a fully extended position. The device 500 is moved into the fully extended position by continuing to extend the actuation element 512 described above, thereby increasing the distance D between the attachment portion 505 and distal portion 507 to a maximum distance allowable by the device 500. Continuing to extend the actuation element 512 pulls down on the outer paddles 520 and paddle frames 524, thereby causing the inner paddles 522 to spread apart further from the coaption element 510. The outer paddles 520 and paddle frames 524 move to a position where they are close to the actuation element. In the fully extended position, the inner paddles 522 are open to an approximately 180-degree angle with the coaption element 510. The inner and outer paddles 522, 520 are stretched straight in the fully extended position to form an approximately 180-degree angle between the paddles 522, 520. The fully extended position of the device 500 provides the maximum size of the gap 520A between the paddles, and, in some embodiments, allows clasps 530 to also open fully to approximately 180 degrees (Figure 61) between portions of the clasp 530. The position of the device 500 is the narrowest configuration. Thus, the fully extended position of the device 500 may be a desirable position for bailout of the device 500 from an attempted implantation or may be a desired position for placement of the device in a delivery catheter, or the like.

[00478] Referring now to Figures 47A, 48A–48H, 53A–53C, 54A–54D, 60A–60D, and 61A–61D, an implantable device 500A is shown in various positions and configurations. The implantable device 500A can include any other features for an implantable prosthetic device discussed in the present application, and the device 500A can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00479] The implantable device 500A has a proximal or attachment portion 505A, a coaption element 510A, inner anchor portions or inner paddles 522A, outer anchor portions or outer paddles 520A, anchor extension members or paddle frames 524A, and a distal portion 507A. The inner paddles 522A are attached (e.g., jointly attached, etc.) between the coaption element 510A, e.g., by joint portions 525A and the outer paddles 520A by joint portions 523A. The outer paddles 520A are attached (e.g.,

jointably attached, etc.) between the inner paddles 522A, e.g., by joint portions 523A and the distal portion 507A by joint portions 521A. The paddle frames 524A are attached to the cap 514A (Figure 48A) at the distal portion 507A and extend to the joint portion 523A between the inner and outer paddles 522A, 520A. In some embodiments, the paddle frames 524A are formed of a material that is more rigid and stiff than the material forming the paddles 522A, 520A so that the paddle frames 524A provide support for the paddles 522A, 520A. The paddle frames 524A include an opening or slot 524B for receiving the joint portions 523A (Figure 65A). In some embodiments, the inner paddles 522A are stiff, relatively stiff, rigid, have rigid portions and/or are stiffened by a stiffening member or the fixed portion of the clasps 530C. The stiffening of the inner paddle allows the device to move to the various different positions shown and described herein. The inner paddle 522A, the outer paddle 520A, and the coaption element can all be interconnected as described herein, such that the device 500A is constrained to the movements and positions shown and described herein.

[00480] The coaption element 510A, inner paddles 522A, outer paddles 520A can be attached together by integrally forming the coaption element 510A and the paddles 520A, 522A as a single, unitary component. This can be accomplished, for example, by forming the coaption element 510A and the paddles 520A, 522A from a continuous strip 501A of a braided or woven material, such as braided or woven nitinol wire.

[00481] The continuous strip 501A is attached to a collar 511D, a cap 514A, paddle frames 524A, clasps 530C. In the illustrated embodiment, the coaption element 510A, hinge portions 521A, 523A, 525A, outer paddles 520A, and inner paddles 522A are formed from the continuous strip 501A. The continuous strip 501A can be a single layer of material or can include two or more layers. In certain embodiments, portions of the device 500A have a single layer of the strip of material 501A and other portions are formed from multiple overlapping or overlying layers of the strip of material 501A. For example, Figure 47A shows the coaption element 510A and inner paddles 522A formed from multiple overlapping or overlying layers of the strip of material 501A. Consequently, the coaption element 510A and inner paddle 522A have an increased stiffness relative to the outer paddles 520A that are formed from a single layer of material 501A. The single continuous strip of material 501A can start and end in various locations of the device 500A. The ends of the strip of material 501A can be in the same location or different locations of the device 500A. For example, in the illustrated embodiment of Figure 47A, the strip of material begins and ends in the location of the inner paddles 522.

[00482] The clasps 530C can comprise attachment or fixed portions 532C, arm or moveable portions 534C, barbs 536C, and joint portions 538C. The attachment or fixed portions 532C can be coupled to the inner paddles 522A in various ways such as with sutures, adhesive, fasteners, welding, stitching,

swaging, friction fit and/or other means for coupling with the joint portions 538C disposed proximate the coaption element 510A. The clasps 530C can be similar to clasps 430.

[00483] The moveable portions 534C can pivot or flex relative to the fixed portions 532C between an open configuration (e.g., Figure 54A) and a closed configuration (Figure 48A). In some embodiments, the clasps 530C can be biased to the closed configuration. In the open configuration, the fixed portions 532C and the moveable portions 534C pivot or flex away from each other such that native leaflets can be positioned between the fixed portions 532C and the moveable portions 534C. In the closed configuration, the fixed portions 532C and the moveable portions 534C pivot or flex toward each other, thereby clamping the native leaflets between the fixed portions 532C and the moveable portions 534C. The fixed arms 532C remain stationary or substantially stationary when the moveable arms 534C are opened to open the barbed clasps 530C and expose the barbs 536C. The barbed clasps 530C are opened by applying tension to actuation lines 537A attached to the moveable arms 534C, thereby causing the moveable arms 534C to pivot or flex on the joint portions 538C.

[00484] Referring now to Figures 47A, and 48A–48H, the device 500A is shown in a closed position. A side view of the device 500A is shown in Figures 48B, 48C, and 48F, from a front view in Figures Figure 48D, 48E, and 48G, and from a bottom view in Figure 48H. The device 500A is narrower when viewed from the front than the side. From the side, the device 500A has a generally inverted trapezoidal shape that is rounded and tapers toward the distal portion 507A of the device 500A. From the front, the device 500A has a generally rounded rectangle shape that tapers somewhat toward the distal portion 507A. As can be seen from the bottom view of the device 500A shown in Figure 48H, the device 500A has a generally rounded rectangle shape when viewed from below (and when viewed from above as can be seen in, for example, Figure 70A).

[00485] In the closed configuration of the device 500A, the inner paddles 522A are disposed between the outer paddles 520A and the coaption element 510A. In some embodiments, the device 500A includes clasps or gripping members 530C (Figure 48A) that can be opened and closed to grasp the native leaflets 20, 22 of the mitral valve MV. The clasps 530C are attached to and move with the inner paddles 522A and are disposed between the inner paddles 522A and the coaption element 510A.

[00486] Referring now to Figures 48B–48D, the device 500A is shown attached to a delivery device 502A. The delivery device 502A has actuatable members or fingers 503A that releasably engage the attachment portion 505A. An actuation element 512A extends from the delivery device 502A to the cap 514A through the attachment portion 505A and coaption element 510A of the prosthetic device 500A. Extending and retracting the actuation element 512A causes the device 500A to open and close, as is described below. Actuation lines/sutures 537A extend from the delivery device 502A to attach to the clasps 530C. Tension can be applied to the sutures 537A to open the clasps 530C and released to

allow the clasps 530C to close. The device 500A is shown separated from the delivery device 502A in a deployed condition in Figures 48F–48G.

[00487] Referring now to Figures 48C and 48E, the device 500A is shown with a cover 540A. The cover 540A can be formed from a single piece of material, or from multiple segments abutting or joined to each other. In the illustrated embodiment, the cover 540A has an outer or lower cover 541A and an inner or upper cover 543A. The outer cover 541A covers the cap 514A, outer paddles 520A, inner paddles 522A, and clasps 530C. The inner cover 543A covers the coaption element 510A and the proximal ends of the inner paddles 522A and clasps 530C where the coaption element 510A meets the inner paddles 522A and clasps 530C. The cover 540A can be a cloth material such as polyethylene cloth of a fine mesh. The cloth cover can provide a blood seal on the surface of the spacer, and/or promote rapid tissue ingrowth.

[00488] Referring now to Figures 53A–53D and 54A–54D, the device 500A is shown in a laterally extended or open position. The device 500A is moved into the open position by the actuation element or means for actuation 512A that passes through the attachment portion 505A and coaption element 510A and can removably engage the distal portion 507A. The actuation element 512A is extended through the attachment portion 505A such that a distance D2 between the attachment portion 505A and distal portion 507A increases as the actuation element 512A is extended. In the example illustrated by Figures 53A–53D and 54A–54D, the pair of inner and outer paddles 520A, 522A are moved in unison, rather than independently, by a single actuation element 512A. Also, the positions of the clasps 530C are dependent on the positions of the paddles 520A, 522A. For example, referring to Figure 48A closing the paddles 520A, 522A also closes the clasps 530C. In one example embodiment, the device 500A can be made to have the paddles 520A, 522A be independently controllable in the same manner as the Figure 11A embodiment.

[00489] Extending the actuation element 512A pulls down on the bottom portions of the outer paddles 520A and paddle frames 524A to transition the device 500A from a closed to partially open position. The outer paddles 520A and paddle frames 524A pull down on the inner paddles 522A where the inner paddles 522A are connected to the outer paddles 520A and the paddle frames 524A. Because the attachment portion 505A and coaption element 510A are held in place, the inner paddles 522A are caused to pivot or flex in an opening direction. The inner paddles 522A, the outer paddles 520A, and the paddle frames all flex to the position shown in Figure 53A. Opening the paddles 522A, 520A and frames 524 forms a gap 520D between the coaption element 510A and the inner paddle 522A that can receive and grasp the native leaflets 20.

[00490] Continuing to extend the actuation element 512A pulls down on the outer paddles 520A and paddle frames 524A, thereby causing the inner paddles 522A to spread apart further from the coaption

element 510A. In the laterally extended or open position, the inner paddles 522A extend horizontally more than in other positions of the device 500A and form an approximately 90-degree angle with the coaption element 510A. Similarly, the paddle frames 524A are at their maximum spread position when the device 500A is in the laterally extended or open position. The increased gap 520D formed in the laterally extended or open position allows clasps 530C to open further (Figure 54A) before engaging the coaption element 510A, thereby increasing the size of the gap 530D as compared to the partially open position.

[00491] As is described above, some embodiments of the device 500A include clasps or gripping members 530C. When the device 500A is opened the clasps 530C are exposed. In some embodiments, the closed clasps 530C (Figures 53A–53D) can be opened (Figures 54A–54D), thereby creating a second opening or gap 530D for receiving and capturing the native leaflets 20, 22. The extent of the gap 530D in the clasps 530C is limited to the extent that the inner paddle 522A has spread away from the coaption element 510A.

[00492] Referring now to Figures 60A–60D and 61A–61D, the device 500A is shown in a fully extended position. The device 500A is moved into the fully extended position by continuing to extend the actuation element 512A described above, thereby increasing the distance D2 between the attachment portion 505A and distal portion 507A to a maximum distance allowable by the device 500A. Continuing to extend the actuation element 512A pulls down on the outer paddles 520A and paddle frames 524A, thereby causing the inner paddles 522A to extend further away from the coaption element 510A. The outer paddles 520A and paddle frames 524A move to a position where they are close to the actuation element. In the fully extended position, the inner paddles 522A are open to an approximately 180-degree angle with the coaption element 510A. The inner and outer paddles 522A, 520A are stretched straight or substantially straight in the fully extended position to form an approximately 180-degree angle between the paddles 522A, 520A. The fully extended position of the device 500A provides the maximum size of the gap 520D between the paddles, and, in some embodiments, allows clasps 530C to also open fully to approximately 180 degrees (Figure 61A) between portions of the clasp 530C. The position of the device 500A is the narrowest configuration. Thus, the fully extended position of the device 500A may be a desirable position for bailout of the device 500A from an attempted implantation or may be a desired position for placement of the device in a delivery catheter, or the like.

[00493] Referring now to Figures 197–198, enlarged views of portions of Figure 60C are shown. Referring now to Figure 197, the inner cover 543A can be seen covering the coaption element 510A from the proximal portion 519B to the distal portion 517A. In some embodiments, the inner cover 543A is formed from a flat sheet (see Figure 201) of a cloth material such as polyethylene cloth of a

fine mesh and is folded around the coaption element 510A and held in place by stitches 545A. Referring now to Figure 198, the outer cover 541A can be seen covering the clasps 530C and inner paddles 522A. Collar portions 548A of inner cover 543A cover the portion of the clasps 530C and inner paddles 522A closest to the coaption element 510A. Transition portions 547A of the inner cover 543A extend from the coaption element 510A to the collar portions 548A to provide a smooth transition between the coaption element 510A and the clasps 530C and inner paddles 522A so that native tissue is not caught on the device 500A during implantation.

[00494] Referring now to Figure 199, an exploded view of the device 500A is shown. The coaption element 510A, outer paddles 520A, and inner paddles 522A are formed from a single strip of material 501A, as described above. The collar 511D, cap 514A, paddle frames 524A, and clasps 530C are assembled to the strip of material 501A to form the device 500A. The cap 514A includes a retention body 560A with a locking aperture 561A for receiving a retaining nut 562A having a threaded bore 564A that engages a threaded portion 568A of a retaining bolt 566A. The threaded portion 568A of the retaining bolt 566A is inserted through the opening 527B to engage the retention body and nut 560A, 562A to attach the cap 514A to the strip of material 501A.

[00495] In some embodiments, a stiffening member 539C is attached to the inner paddle 522A to stiffen the inner paddle 522A to maintain the inner paddle in a straight or substantially straight configuration as the inner paddle is moved between the various positions. A cutout 539D in the stiffening member 539C is shaped to receive the fixed arm 532C of the clasp 530C so that the stiffening member 539C can fit around the fixed arm 532C when both the stiffening member 539C and clasp 530C are attached to the inner paddle 522A. Like the fixed arm 532C, the stiffening member 539C can be coupled to the inner paddles 522A in various ways such as with sutures, adhesive, fasteners, welding, stitching, swaging, friction fit and/or other means for coupling.

[00496] Referring now to Figure 200, an enlarged view of the collar 511D attached to the proximal portion 519B of the coaption element 510A is shown. The collar 511D includes protrusions 511B for releasably engaging the fingers 503A of the delivery device 502A. An aperture 515A in the collar 511D receives the actuation element 512A. The proximal portion 519B of the coaption element 510A flares outward to form two loops 519D that are inserted through the arcuate openings 513A of the collar 511D to attach the collar 511D to the proximal portion 519B of the coaption element 510A. The loops 519D are formed by folding the strip of material 501A to form first and second layers 581A, 582A.

[00497] Referring now to Figures 201–202, enlarged and exploded views of the cap 514A are shown, respectively. Figure 201 shows an enlarged view of the cap 514A attached to the distal portion 527A of the strip of material 501A. The retention body 560A, retaining nut 562A, and retaining

bolt 566A cooperate to attach the paddle frames 524A to the distal portion 527A of the strip of material 501A. In particular, the retaining bolt 566A is inserted through the opening 527B of the distal portion 527A (Figure 202) to prohibit movement of the cap 514A along the strip of material 501A. A channel 560B in the retention body 560A and a flange 567A of the bolt 566A form a passageway 514B through the cap 514A for the distal portion 527A.

[00498] Referring now to Figure 202, the components of the cap 514A are shown in an exploded view to better illustrate the features of the components of the cap 514A and paddle frames 524A and to show how those features interlock during assembly of the cap 514A to the distal portion 527A. Forming the cap 514A from multiple components that can be assembled around the strip of material 501A allows the cap 514A to be attached after the strip of material 501A has been folded to form the coaption element 510A and paddles 520A, 522A and been woven through the collar 511D and paddle frames 524A.

[00499] The retention body 560A includes a locking aperture 561A for receiving the retaining nut 562A. The locking aperture 561A has a generally rectangular shape and includes two opposing locking channels 561B that receive the attachment portions 524C of the paddle frames 524A. A transverse locking channel 561C formed in the bottom of the retention body 560A has the same width as the locking channels 561B. The paddle frames 524A include notches 524D in the attachment portions 524C that form hook portions 524E that engage the transverse locking channel 561C to secure the paddle frames 524A to the cap 514A.

[00500] The retaining nut 562A includes a rectangular locking body 563A extending distally from a flange 563B. The locking body 563A is configured to slidably engage the locking aperture 561A of the retention body 560A while leaving the locking channels 561B unobstructed. Thus, the locking body 563A can be inserted into the locking aperture 561A to lock the attachment portions 524C of the paddle frames 524A within the locking channels 561B. Notches 563C in the flange 563B accommodate the attachment portions 524C of the paddle frames 524A. The threaded bore 564A is formed through the retaining nut 562A to receive the retaining bolt 566A.

[00501] The retaining bolt 566A includes a threaded portion 568A extending from the flange 567A. The threaded portion 568A is inserted through the opening 527B in the distal portion 527A to threadedly engage the threaded bore 564A of the retaining nut 562A. The flange 567A has a rounded shape that provides a rounded end to the distal portion 507A of the device 500A. The flange 567A includes openings 567B for receiving a tool (not shown) that engages the bolt 566A so that the bolt 566A can be turned during assembly to couple the components of the cap 514A together.

[00502] To assemble the paddle frames 524A and cap 514A to the distal portion 527A, the paddle frames 524A are squeezed to narrow the width of the attachment portion 524C so that the attachment

portions 524C can be inserted into the locking channels 561B of the locking aperture 561A. When the paddle frames 524A are allowed to expand, the attachment portions 524C expand outward so that the notches 524D engage the retention body 560A and the hook portions 524E engage the transverse locking channel 561C. The retaining nut 562A is then inserted into the locking aperture 561A with the locking portion 563A arranged between the two attachment portions 524C of each paddle frame 524A, thereby locking the paddle frames 524A in engagement with the retention body 560A. The assembled paddle frames 524A, retention body 560A, and retaining nut 562A are placed on the distal portion 527A so that the threaded bore 564A aligns with the opening 527B and the threaded portion 568A of the bolt 566A is inserted through the opening 527B to threadedly engage the threaded bore 564A. The bolt 566A is then tightened until the flange 567A engages the retention body 560A and the cap 514A is securely assembled to the distal portion 527A.

[00503] Referring now to Figures 203 and 204, portions of the cover 540A are shown cut from flat sheets of material. The cover 540A includes the outer cover 541A and the inner cover 543A. Each of the covers 541A, 543A include different shaped segments or portions to attach to different portions of the device 500A. In particular, the covers 541A, 543A are shaped to smooth transitions between portions of the device 500A to reduce catch points and provide a smoother exterior to the device 500.

[00504] The various segments of the covers 541A, 543A extend from a middle portion that is shaped to attach to an end of the device 500A. In other embodiments, the portion of the cover 541A, 543A that attaches to an end of the device 500A is located at an end of the covers 541A, 543A or can be located anywhere between the middle and ends of the covers 541A, 543A. Various portions of the covers 541A, 543A can be shaped to wrap around portions of the device 500A. The cover 540A can be made of any suitable material, such as a polyethylene cloth of a fine mesh. In certain embodiments, the cover is formed out of a single piece of material. In other embodiments, the cover can be formed of any number of pieces of material that are attached to the device and/or joined together by any suitable means, such as by stitching, adhesives, welding, or the like.

[00505] Referring to Figures 60C and 204, the outer cover 541A extends outward from a middle portion 580 to end portions 588. The middle portion 580 is shaped to be attached to the cap 514A of the device 500A. Outer paddle portions 582 extend from the middle portion 580 to inner paddle and inside clasp portions 584. The inner paddle and inside clasp portions 584 extend from the outer paddle portions 582 to outside moveable clasp portions 586. The outside moveable clasp portions 586 extend from the inner paddle portions 584 to the end portions 588.

[00506] The outer paddle portions 582 include wing portions 583 that extend laterally to a width that is wider than the other portions of the outer cover 541A so that the outer paddle portions 582 can attach to the outer paddles 520A and paddle frames 524A of the device 500A. The inner paddle portions 584

attach to the inner paddles 522A, stationary arms 532C, and the inside surface (the side with the barbs) of the moveable arms 534C. The outside clasp portions 586 attach to the outside surface (the side without the barbs) of the moveable arms 534C of the clasps 530C. The ends 588 of the outer cover 541A terminate near the joint portion 538C of the clasp 530C on the outside of the clasps 530C. The inner paddle and inside clasp portions 584 include openings 585 that allow the barbs 536C of the clasps 530C to protrude through the outer cover 541A to engage tissue of the native heart valve.

[00507] Referring to Figures 60C and 203, the inner cover 543A extends outward from a middle portion 590 to end portions 598. The middle portion 590 is configured to be attached to the collar 511D of the device 500A. Openings 591 in the middle portion 590 expose the protrusions 511E from the collar 511D when the middle portion 590 is attached to the collar 511D so that the protrusions 511E can be engaged by the delivery device 502A. Coaption portions 592 extend from the middle portion 590 to flexible hinge portions 594. Holes 593 along the edges of the coaption portions 592 allow each of the coaption portions 592 to be joined together after being folded around the coaption element 510A, such as, for example, by stitches 545A. The flexible hinge portions 594 extend from the coaption portions 592 to transition portions 596. The transition portions 596 extend from the flexible hinge portions 594 to the end portions 598. Holes 597 along the edges of the transition portions 596 allow each of the transition portions 596 to be wrapped around the inner paddle 522A and ends of the clasp 530C and secured to itself by stitches or other suitable securing means. The flexible hinge portions 594 bridge the gaps between the coaption element 510A and the clasps 530C when the device 500A is opened, as can be seen in Figure 198.

[00508] Referring now to Figures 62A–64C, an implantable device 700 is shown. The implantable device 700 has paddles 702 that open and close to grasp leaflets 20, 22 against barbed clasps or gripping devices 704. The paddles 702 move to create an opening 706 between the paddles 702 and gripping devices 704 in which the leaflets 20, 22 can be grasped. The device 700 can be configured to close a wide gap 26 (Figure 6) in the native heart valve MV, TV. In addition, the implantable device 700 can include any other features for a device discussed in the present application, and the device 700 can be positioned to engage valve leaflets 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application). The device 700 can include any other features for an implantable prosthetic device discussed in the present application, and the device 700 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00509] Referring to Figure 62A, the paddles 702 of the device 700 are moved, rotated, or pivoted outward in the direction X to create an opening 706 between the paddles 702 and the gripping members 704 having a width W. The width W can be, for example, between about 5 mm and about 15 mm, such

as between 7.5 mm and about 12.5 mm, such as about 10 mm. In alternative embodiments, the width W can be less than 5 mm or greater than 15 mm.

[00510] Referring to Figure 62B, the paddles 702 of the device 700 are moved outward in the direction Z such that the opening 706 has a width H. The width H can be, for example, between about 10 mm and about 25 mm, such as between about 10 mm and about 20 mm, such as between about 12.5 mm and about 17.5 mm, such as about 15 mm. In some embodiments, the width H can be less than 10 mm or more than 25 mm. In certain embodiments, the ratio between the width H and the width W can be about 5 to 1 or less, such as about 4 to 1 or less such as about 3 to 1 or less, such as about 2 to 1 or less, such as about 1.5 to 1 or less, such as about 1.25 to 1 or less, such as about 1 to 1. The device 700 can be configured such that the paddles 702 are moved, rotated, or pivoted outward in the direction X and then moved outward in the direction Z to create the opening 706 having a width H between the paddles 702 and the gripping members 704. Optionally, the device 700 can be configured such that the paddles are moved outward in the direction Z and then moved or pivoted outward in the direction X to create width H between the paddles 702 and gripping members 704. In addition, the device 700 can be configured such that the paddles 702 are moved or pivoted outward in the direction X and moved outward in the direction Z simultaneously to create the width H between the paddles 702 and the gripping members 704.

[00511] Figures 63A–63C illustrate an implantable device 700 in which the paddles 702 are moved, rotated, or pivoted outward in the direction X, and, subsequently, moved outward in the direction Z to create a wider opening 706. Figure 63A illustrates the implantable device 700 in a closed position, such that the paddles 702 are engaging the gripping members 704. Referring to Figure 63B, the paddles 702 are moved or pivoted outward in the direction X to create an opening 706 having a width W for receiving valve tissue. Referring to Figure 63C, after the paddles 702 are moved or pivoted outward in the direction X, the paddles 702 are moved outward in the direction Z such that the opening 706 has a width H. After valve tissue is received in the openings 706 between the paddles 702 and the gripping members 704, the valve repair device is moved back to the closed position (as shown in Figure 63A) to secure the valve repair device 700 to the valve tissue. The implantable device 700 can include any other features for an implantable device discussed in the present application, and the implantable device 700 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00512] Figures 64A–64C illustrate an implantable device 700 in which the paddles 702 are moved outward in the direction Z, and, subsequently, moved, extended, or pivoted outward in the direction X to create a wider opening 706. Figure 64A illustrates the implantable device 700 in a closed position, such that the paddles 702 are engaging the gripping members 704. Referring to Figure 64B, the paddles

702 are moved outward in the direction Z to create an opening 706 having a width W for receiving valve tissue. Referring to Figure 64C, after the paddles 702 are moved outward in the direction Z, the paddles 702 are moved or pivoted outward in the direction X such that the opening 706 has a width H. After valve tissue is received in the openings 706 between the paddles 702 and the gripping members 704, the implantable device 700 is moved back to the closed position (as shown in Figure 64A) to secure the implantable device 700 to the valve tissue. The implantable device 700 can include any other features for an implantable device discussed in the present application, and the implantable device 700 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00513] While Figures 63A–63C illustrate a device 700 in which the paddles 702 are moved or pivoted and then spread apart, and Figures 64A–64C illustrate a device 700 in which the paddles 702 are spread apart and then moved or pivoted, in alternative embodiments, a device 700 can include paddles 702 that can be spread apart and moved or pivoted simultaneously. In addition, in certain embodiments, the paddles 702 can be spread apart and moved or pivoted independently of each other. That is, in the embodiments for the valve repair device 700 shown in Figures 63A–63C and 64A–64C, as well as the embodiment in which the spreading apart and moving or pivoting of each paddle 702 is completed simultaneously, the paddles 702 can be controlled independently of each other.

[00514] Referring now to Figures 65–83, the example implantable device 500 is shown in the closed condition. Referring now to Figures 65–66, the device 500 extends from a proximal portion 505 to a distal portion 507 and includes a coaption portion 510, inner paddles 522, outer paddles 520, and paddle frames 524. In some embodiments, the outer paddles 520 extend to and/or around the paddle frames 524 and can have more than one layer to surround the paddle frames 524. The proximal portion 505 can include a collar 511 for attaching a delivery device (not shown). The distal portion 507 can include a cap 514 that is attached (e.g., jointly attached, etc.) to the outer paddles 520 and is engaged by an actuation element (not shown) to open and close the device 500 to facilitate implantation in the native valve as described in the present application.

[00515] Referring now to Figures 67–68, a front view of the device 500 is shown. The device 500 has a shape that is symmetrical or substantially symmetrical around a vertical front-to-back plane 550 and is generally narrower at the distal portion 507 than the proximal portion 505. The shape of the coaption element 510 and paddle frames 524 is rounded or generally rounded to prevent the device 500 from catching or snagging on structures of the heart, such as the chordae tendineae, during implantation. For this reason, the proximal collar 511 (Figure 68) and cap 514 (Figure 68) also have round edges. When viewed from the front or back, the paddle frames 524 can be seen to have a rounded or generally rounded shape, extending upwards and outwards from the distal portion 507 to approximately coincide

with the shape of the coaption element 510 when viewed from the front or back. Thus, the coaption element 510 and paddle frames 524 generally define the shape of the device 500 when viewed from the front or back. In addition, the rounded shape of the paddle frames 524 and the corresponding rounded shape of the coaption element can distribute leaflet stress across a wider surface. In some example embodiments, the paddle frames 524 and/or the coaption element 510 can have other shapes.

[00516] Referring now to Figure 69, a side view of the device 500 is shown. As with the front and back views (Figures 67–68), the device 500 has a shape that is symmetrical or substantially symmetrical around a vertical side-to-side plane 552 when viewed from the side. The distal portion 507 is also generally narrower than the proximal portion 505 when the device 500 is viewed from the side. The coaption element 510 optionally also has a tapering or generally tapering shape that narrows toward the distal portion 507 of the device 500. However, in some example embodiments, the coaption element does not taper as it extends from the proximal portion of the device to the distal portion of the device.

[00517] The rounded features of the device 500 are further demonstrated by the round shape of the paddles 520, 522 where the inner and outer paddles 520, 522 are joined together and the round shape of the paddle frames 524. However, the paddles 520, 522 and paddle frames 524 can take a wide variety of different forms. For example, the paddles 520, 522 and the paddle frames 524 can be rounded along the top edges but be flat or substantially flat on the sides of the paddles 520, 522 and/or the paddle frames. By making the paddles 520, 522 flat or substantially flat on the sides, two devices can be implanted side-by-side on the native valve leaflet, with the two devices sitting flush or substantially flush against each other.

[00518] The closed paddles 520, 522 form gaps 542 between the inner paddles 522 and the coaption element 510 that are configured to receive native tissue. As can be seen in Figure 69, the narrowing of the coaption element 510 gives the gaps 542 a somewhat teardrop shape that increases in width as the gaps 542 approach the distal portion 507 of the device. The widening of the gaps 542 toward the distal portion 507 allows the paddles 520, 522 to contact tissue grasped in the gaps 542 nearer to the proximal portion 505.

[00519] The paddle frames 524 extend vertically from the distal portion 507 toward the proximal portion 505 until approximately a middle third of the device 500 before bending or flaring outward so that the connection portion of the frames 524 passes through gaps 544 formed by the inner paddles 522 folded inside of the outer paddles 520. However, in other embodiments the connection of the frames are positioned inside the inner paddles 522 or outside the outer paddles 520. The outer paddles 520 have a rounded shape that is similar to that of the coaption element 510 when viewed from the front or back (Figures 67–68). Thus, the device 500 has a rounded shape or substantially round shape.

The round shape of the device 500 is particularly visible when the device 500 is viewed from the top (Figures 70–71) or bottom (Figures 72–73).

[00520] Referring now to Figures 70–71, top views of the device 500 are shown. The device 500 has a shape that is symmetrical or substantially symmetrical around a front-to-back plane 550 and is also symmetrical or substantially symmetrical around a side-to-side plane 552 when viewed from the top. An opening 519A in the coaption element 510 is visible at the proximal portion 505 of the device 500. As can be seen in Figure 70, the coaption element 510 can be hollow inside. The proximal collar 511 shown in Figure 71 can be secured to the coaption element 510 to close off the coaption element 510.

[00521] In one example embodiment, the coaption element is not planar and has all curved surfaces. For example, the coaption elements 510 illustrated herein can be formed of a series of blended surfaces have a variety of different radii of curvature. The coaption element 510 has an oval or generally oval-shape when viewed from the top. However, in some example embodiments, the coaption element 510 can have other shapes when viewed from the top. For example, the coaption element can have a rectangular, square, diamond, elliptical, or any other shape. The paddle frames 224 each have an arcuate shape with a smaller radius than the coaption element 510 so that the gaps 542 formed between the inner paddles 522 and paddle frames 524 and the coaption element 510 taper as they approach left 551 and right 553 sides of the device 500. Thus, native tissue, such as the leaflets 20, 22 tend to be pinched between the paddle frames 524 and the coaption element 510 towards the left and right sides 551, 553 of the device 500.

[00522] Referring now to Figures 72–73, bottom views of the device 500 are shown. As with the top views (Figures 70–71), the device 500 has a shape that is symmetrical or substantially symmetrical around the front-to-back plane 550 and is also symmetrical or substantially symmetrical around the side-to-side plane 552 when viewed from the bottom. The cap 514 is shown in Figure 73 and can jointably attach to the outer paddles 520 and the paddle frames 524.

[00523] The paddle frames 524 extend outward from the distal portion 507 of the device 500 to the left and right sides 551, 553 at a narrow or slight angle from the side-to-side plane 552. The paddle frames 524 extend further away from the side-to-side plane 552 as the paddle frames 524 extend toward the proximal portion of the device 500 (Figure 69) to ultimately form the arcuate shape seen in Figures 70–71.

[00524] Referring now to Figures 74–83, perspective and cross-sectional views of the device 500 are shown. Referring now to Figure 74, the device 500 is shown sliced by cross-section plane 75 near the proximal portion of the coaption element 510. Referring now to Figure 75, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 75 in Figure 74. At the location of the plane 75, the coaption element 510 has a round or generally round shape with lobes arranged along the

front-to-back plane 550. The gaps 542 between the paddle frames 524 and coaption element 510 form a crescent-like shape with a central width 543. As noted above, the gaps 542 narrow as the gaps 542 approach the left and right sides 551, 553.

[00525] Referring now to Figure 76, the device 500 is shown sliced by cross-section plane 77 positioned about three-quarters of the way between the distal portion 507 and the proximal portion 505 of the coaption element 510. Referring now to Figure 77, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 77 in Figure 76. At the location of the plane 75, the coaption element 510 has an oval or generally oval shape oriented along the side-to-side plane 552. The gaps 542 between the paddle frames 524 and coaption element 510 form a crescent or crescent-like shape with a central width 543 that is less than the central width 543 seen in Figure 75. At the location of the plane 77, the width 543 of the gaps 542 is narrower towards the center of the device, widens somewhat as the gaps 542 approach the left and right sides 551, 553 before narrowing again. Thus, the native tissue is pinched in the center of the gaps 542 about three-quarters of the way up the coaption element 510.

[00526] Referring now to Figure 78, the device 500 is shown sliced by cross-section plane 79 positioned about half of the way between the distal portion 507 and the proximal portion 505 of the coaption element 510. Referring now to Figure 79, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 79 in Figure 78. At the location of the plane 79, the coaption element 510 has an oval or generally oval shape oriented along the side-to-side plane 552. The paddle frames 524 can be seen near the left and right sides 551, 553 very close to or in contact with the coaption element 510. The gaps 542 are crescent or generally crescent shaped and are wider than the gaps 542 viewed along the plane 77 (Figure 77.)

[00527] Referring now to Figure 80, the device 500 is shown sliced by cross-section plane 81 positioned about one-quarter of the way between the distal portion 507 and the proximal portion 505 of the coaption element 510. Referring now to Figure 81, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 81 in Figure 80. At the location of the plane 81, the coaption element 510 has an oval or generally oval shape oriented along the side-to-side plane 552 that is narrower than the oval shape seen in Figure 77. The paddle frames 524 can be seen near the left and right sides 551, 553 very close to or in contact with the coaption element 510. The gaps 542 are crescent or generally crescent shaped and are wider than the gaps 542 viewed along the plane 79 (Figure 79.)

[00528] Referring now to Figure 82, the device 500 is shown sliced by cross-section plane 83 positioned near the distal portion 507 of the coaption element 510. Referring now to Figure 83, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 83 in Figure 82. At the location of the plane 83, the coaption element 510 has an oval or generally oval shape oriented along the side-

to-side plane 552 that is narrower than the oval shape seen in Figure 79 as the coaption element 510 tapers toward the distal portion 507 of the device 500. The paddle frames 524 can be seen near the left and right sides 551, 553 very close to or in contact with the coaption element 510. While the inner paddles 522 are not visible in Figure 81, the gaps 542 are crescent or generally crescent shaped and are wider than the gaps 542 viewed along the plane 81 (Figure 81.)

[00529] Referring now to Figures 65A, 66A, 67A, 68A, 70A, 71A, 72A, 73A, 74A, 75A, 76A, 77A, 78A, 79A, 80A, 81A, 82A, and 83A, the example implantable device 500A is shown in the closed condition. Referring now to Figures 65A and 66A, the device 500A extends from a proximal portion 505A to a distal portion 507A and includes a coaption portion 510A, inner paddles 522A, outer paddles 520A, and paddle frames 524A. The proximal portion 505A can include a collar 511D for attaching a delivery device (not shown). The distal portion 507A can include a cap 514A that is attached (e.g., jointly attached, etc.) to the outer paddles 520A and is engaged by an actuation element (not shown) to open and close the device 500A to facilitate implantation in the native valve as described in the present application.

[00530] Referring now to Figures 67A and 68A, front views of the device 500A are shown. The device 500A has a shape that is symmetrical or substantially symmetrical around a vertical front-to-back plane 550A and is generally narrower at the distal portion 507A than along the paddle frames 524A. The shape of the coaption element 510A and paddle frames 524A is a generally rounded rectangular shape to prevent the device 500A from catching or snagging on structures of the heart, such as the chordae tendineae, during implantation. For this reason, the proximal collar 511D (Figure 68A) and cap 514A (Figure 68A) can also have round edges. When viewed from the front or back, the paddle frames 524A can be seen to have a generally rounded rectangular shape, extending upwards and outwards from the distal portion 507A to a shape that has sides that are wider than and approximately parallel to the coaption element 510A when viewed from the front or back. Thus, the paddle frames 524A generally define the shape of the device 500A when viewed from the front or back. In addition, the rounded rectangular shape of the paddle frames 524A can distribute leaflet stress across a wider surface. In some example embodiments, the paddle frames 524A and/or the coaption element 510A can have other shapes.

[00531] As with the front and back views (Figures 67A and 68A), the device 500A has a shape that is symmetrical or substantially symmetrical around a vertical side-to-side plane 552A (Figure 70A) when viewed from the side (e.g., Figure 47A). The distal portion 507A is also generally narrower than the proximal portion 505A when the device 500A is viewed from the side. In the embodiment illustrated in Figure 48B, the coaption element 510A does not taper as it extends from the proximal portion 505A of the device 500A to the distal portion 507A of the device 500A. However, in some example

embodiments, the coaption element does taper as it extends from the proximal portion of the device to the distal portion of the device (e.g., Figure 47).

[00532] The generally rounded features of the device 500A are further demonstrated by the rounded shape of the paddles 520A, 522A where the inner and outer paddles 520A, 522A are joined together. However, the paddles 520A, 522A and paddle frames 524A can take a wide variety of different forms. For example, the paddles 520A, 522A and the paddle frames 524A can be rounded along the top edges and be flat or substantially flat on the sides (e.g., the sides of the paddle frames 524A arranged at the front and back sides of the device 500A). By making the paddles 520A, 522A flat or substantially flat on the sides, two devices can be implanted side-by-side on the native valve leaflet, with the two devices sitting flush or substantially flush against each other.

[00533] The closed paddles 520A, 522A form gaps 542A between the inner paddles 522A and the coaption element 510A that are configured to receive native tissue. As can be seen in Figures 48B and 48F, the proximal end of the coaption element 510A has an approximately dog-bone shape so that the gaps 542A are narrower toward the proximal portion 505A as the gaps 542A approach the distal portion 507A of the device. The narrowing of the gaps 542A toward the attachment portion 505A allows the paddles 520A, 522A to contact tissue grasped in the gaps 542A nearer to the proximal portion 505A.

[00534] The paddle frames 524A extend vertically from the distal portion 507A toward the proximal portion 505A until approximately a middle third of the device 500A before bending or flaring outward so that a connection portion 524B of the frames 524A passes through gaps 544A formed by the inner paddles 522A folded inside of the outer paddles 520A. However, in other embodiments the connections of the frames are positioned inside the inner paddles 522A or outside the outer paddles 520A. The outer paddles 520A have a rounded rectangular shape that is similar to that of the coaption element 510A when viewed from the front or back (Figures 67A and 68A). Thus, the device 500A has a rounded rectangular shape. The rounded rectangular shape of the device 500A is particularly visible when the device 500A is viewed from the top (Figures 70A and 71A) or bottom (Figures 72A and 73A).

[00535] Referring now to Figures 70A and 71A, top views of the device 500A are shown. The device 500A has a shape that is symmetrical or substantially symmetrical around a front-to-back plane 550A and is also symmetrical or substantially symmetrical around a side-to-side plane 552A when viewed from the top. A proximal opening 519C in the coaption element 510A is visible at the proximal portion 505A of the device 500A. The actuation element 512A is received through the opening 519C so that the coaption element 510A wraps around the actuation element 512A. In some embodiments, the opening 519C is formed by inserting the actuation element 512A between the folded and overlapping layers of the strip of material 501A (described in detail below). In other embodiments, the opening

519C is formed by shape-setting the folded layers of the strip of material 501A forming the coaption element 510A around a blank or jig to give the coaption element 510A a rounded or generally rounded shape. The proximal collar 511D shown in Figure 71A can be secured to the coaption element 510A to close off the coaption element 510A. The proximal collar 511D includes attachment portions 513A that engage with openings 546A formed by the folded layers of the strip of material 501A that form the coaption element 510A. In some embodiments, the attachment portions 513A are holes in the collar 511D so that the strip of material 501A must be inserted through the collar 511D before folding the strip of material 501A during assembly of the device 500A. In some embodiments, the attachment portions 513A are open slots (e.g., the attachment portions 524B of the paddle frames 524A) that receive the strip of material 501A before or after folding the strip of material 501A.

[00536] As is noted above, the coaption element 510A has a generally rectangular shape when viewed from the top. In some example embodiments, the coaption element 510A can have other shapes when viewed from the top. For example, the coaption element can have a round, square, diamond, elliptical, or any other shape. The paddle frames 224A each have a rounded rectangular shape when viewed from the top so that the paddle frames 224A surround the rectangular coaption element 510A. Thus, native tissue, such as the leaflets 20, 22 tend to be pinched or compressed evenly in the gaps 542A formed between the inner paddles 522A and paddle frames 524A and the coaption element 510A.

[00537] Referring now to Figures 72A and 73A, bottom views of the device 500A are shown. As with the top views (Figures 70A and 71A), the device 500A has a shape that is symmetrical or substantially symmetrical around the front-to-back plane 550A and is also symmetrical or substantially symmetrical around the side-to-side plane 552A when viewed from the bottom. A distal portion 527A of the strip of material 501A includes an aperture 527B for receiving the cap 514A shown in Figure 73A.

[00538] The paddle frames 524A extend outward from the distal portion 507A of the device 500A to the left and right sides 551A, 553A at a narrow or slight angle from the side-to-side plane 552A. The paddle frames 524A extend further away from the side-to-side plane 552A while maintaining a generally constant distance relative to the front-to-back plane 550A as the paddle frames 524A extend toward the proximal portion 505A of the device 500A (Figure 65A) to ultimately form the rounded rectangle shape seen in Figures 70A and 71A.

[00539] In one example embodiment, the dimensions of the device 500A are selected to minimize the number of implants that a single patient will require (preferably one), while at the same time maintaining low transvalvular gradients. In one example embodiment, the anterior-posterior distance Y47I of the device 500A at the widest is less than 10 mm, and the medial-lateral distance Y67C of the spacer at its widest is less than 6 mm. In one example embodiment, the overall geometry of the device 500A can be based on these two dimensions and the overall shape strategy described above. It should

be readily apparent that the use of other anterior-posterior distance Y47I and medial-lateral distance Y67C as starting points for the device 500A will result in a device having different dimensions. Further, using other dimensions and the shape strategy described above will also result in a device having different dimensions.

[00540] Tables D and E provide examples of values and ranges for dimensions of the device 500A and components of the device 500A for some example embodiments. However, the device 500A can have a wide variety of different shapes and sizes and need not have all or any of the dimensional values or dimensional ranges provided in Tables D and E. Table D provides examples of linear dimensions Y in millimeters and ranges of linear dimensions in millimeters for the device 500A and components of the device 500A. Table B provides examples of radius dimensions S in millimeters and ranges of radius dimensions in millimeters for the device 500A and components of the device 500A. The subscripts for each of the dimensions indicates the drawing in which the dimension first appears.

Table D - Linear Dimensions (mm)									
	Example	Range A		Range B		Range C		Range D	
		(max)	(min)	(max)	(min)	(max)	(min)	(max)	(min)
Y _{47A}	2.58	1.29	3.87	1.94	3.23	2.32	2.84	2.45	2.71
Y _{47B}	1.43	0.72	2.15	1.07	1.79	1.29	1.57	1.36	1.50
Y _{47C}	3.75	1.88	5.63	2.81	4.69	3.38	4.13	3.56	3.94
Y _{47D}	0.55	0.18	0.53	0.26	0.44	0.32	0.39	0.33	0.37
Y _{47E}	0.71	0.36	1.07	0.53	0.89	0.64	0.78	0.67	0.75
Y _{47F}	1.07	0.54	1.61	0.80	1.34	0.96	1.18	1.02	1.12
Y _{47G}	7.68	3.84	11.52	5.76	9.60	6.91	8.45	7.30	8.06
Y _{47H}	5.41	2.71	8.12	4.06	6.76	4.87	5.95	5.14	5.68
Y _{47I}	9.16	4.58	13.74	6.87	11.45	8.24	10.08	8.70	9.62
Y _{47J}	0.72	0.36	1.08	0.54	0.90	0.65	0.79	0.68	0.76
Y _{67A}	1.61	0.81	2.42	1.21	2.01	1.45	1.77	1.53	1.69
Y _{67B}	3.25	1.63	4.88	2.44	4.06	2.93	3.58	3.09	3.41
Y _{67C}	5.90	2.95	8.85	4.43	7.38	5.31	6.49	5.61	6.20
Y _{67D}	15.21	7.60	22.81	11.41	19.01	13.69	16.73	14.45	15.97
Y _{67E}	3.25	1.63	4.88	2.44	4.06	2.93	3.58	3.09	3.41
Y _{68A}	14.04	7.02	21.06	10.53	17.55	12.64	15.44	13.34	14.74
Y _{71A}	4.50	2.25	6.75	3.38	5.63	4.05	4.95	4.28	4.73
Y _{72A}	2.50	1.25	3.75	1.88	3.13	2.25	2.75	2.38	2.63
Y _{114A}	4.34	2.17	6.50	3.25	5.42	3.90	4.77	4.12	4.55
Y _{114B}	13.28	6.64	19.92	9.96	16.50	11.95	14.61	12.62	13.94
Y _{116A}	14.79	7.39	22.18	11.09	18.48	13.31	16.27	14.05	15.53

[00541]

Table E - Radius Dimensions (mm)									
	Example	Range A		Range B		Range C		Range D	
		(max)	(min)	(max)	(min)	(max)	(min)	(max)	(min)
S _{47A}	0.74	0.37	1.11	0.56	0.93	0.67	0.81	0.70	0.78
S _{47B}	0.68	0.34	1.02	0.51	0.85	0.61	0.75	0.65	0.71
S _{47C}	1.10	0.55	1.65	0.93	1.38	0.99	1.21	1.05	1.16
S _{47D}	5.62	2.81	8.43	4.22	7.03	5.06	6.18	5.34	5.90
S _{47E}	0.96	0.48	1.44	0.72	1.20	0.86	1.06	0.91	1.01
S _{71A}	0.63	0.31	0.94	0.47	0.78	0.56	0.69	0.59	0.66
S _{71B}	2.07	1.04	3.11	1.55	2.59	1.86	2.28	1.97	2.17
S _{71A}	1.88	0.94	2.81	1.41	2.34	1.69	2.06	1.78	1.97
S _{114A}	5.62	2.81	8.43	4.22	7.03	5.06	6.18	5.34	5.90
S _{114B}	6.00	3.00	9.00	4.50	7.50	5.40	6.60	5.70	6.30
S _{114C}	3.15	1.58	4.73	2.36	3.94	2.84	3.47	2.99	3.31
S _{117A}	1.15	0.58	1.73	0.86	1.44	1.04	1.27	1.09	1.21
S _{117B}	2.69	1.35	4.04	2.02	3.36	2.42	2.96	2.56	2.82

[0542]

[00543] Referring now to Figures 74A, 75A, 76A, 77A, 78A, 79A, 80A, 81A, 82A, and 83A, perspective and cross-sectional views of the device 500A are shown. Referring now to Figure 74A, the device 500A is shown sliced by cross-section plane 75A near the proximal portion of the coaption element 510A. Referring now to Figure 75A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 75A in Figure 74A. At the location of the plane 75A, the coaption element 510A has a generally rounded rectangular shape. The gaps 542A between the inner paddles 522A and coaption element 510A have a width 542B. As noted above, the gaps 542A have a consistent or generally consistent width.

[00544] Referring now to Figure 76A, the device 500A is shown sliced by cross-section plane 77A positioned about three-quarters of the way between the distal portion 507A and the proximal portion 505A of the coaption element 510A. Referring now to Figure 77A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 77A in Figure 76A. As can be seen in Figures 76A and 77A, the strip of material 501A forming the device 500A is overlapped to form four layers in the area of the coaption element 510A. A single layer of the strip of material 501A forms each of the inner paddle 522A and the outer paddle 520A. At the location of the plane 75A, the coaption element 510A has a generally rectangular shape oriented along the side-to-side plane 552A. The gaps 542A between the inner paddle 522A and the coaption element 510A are visible. The gaps 542A between the inner paddles 522A and coaption element 510A have a width 542B that is greater than the width 542B seen in Figure 75A. The gaps 544A between the outer and inner paddles 520A, 522A have a consistent or generally consistent width 544B for receiving the attachment portion 524B of the paddle frames 524A.

[00545] Referring now to Figure 78A, the device 500A is shown sliced by cross-section plane 79A positioned about half of the way between the distal portion 507A and the proximal portion 505A of the device 500A. Referring now to Figure 79A, a cross-sectional view of the device 500A is shown as

viewed from cross-section plane 79A in Figure 78A. As can be seen in Figures 78A and 79A, the strip of material 501A forming the device 500A is overlapped to form four layers in the area of the coaption element 510A, two layers in the area of the inner paddle 522A, and one layer in the area of the outer paddle 520A. At the location of the plane 79A, the coaption element 510A has a generally rectangular shape oriented along the side-to-side plane 552A. The gaps 542A between the inner paddles 522A and the coaption element 510A have a width 542B that is the same or about the same as the width 542B seen in Figure 77A.

[00546] Referring now to Figure 80A, the device 500A is shown sliced by cross-section plane 81A positioned about one-quarter of the way between the distal portion 507A and the proximal portion 505A of the device 500A. Referring now to Figure 81A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 81A in Figure 80A. As can be seen in Figures 80A and 81A, the strip of material 501A forming the device 500A is overlapped to form four layers in the area of the coaption element 510A, two layers in the area of the inner paddle 522A, and the outer paddle 520A is formed by a single layer. At the location of the plane 81A, the coaption element 510A has a generally rectangular shape oriented along the side-to-side plane 552A. The gaps 542A between the inner paddle 522A and coaption element 510A have a width 542B that is about the same as the central width 542B seen in Figure 79A.

[00547] Referring now to Figure 82A, the device 500A is shown sliced by cross-section plane 83A positioned about one-quarter of the way between the distal portion 507A and the proximal portion 505A of the device 500A. Referring now to Figure 83A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 83A in Figure 82A. As can be seen in Figures 82A and 83A, the strip of material 501A forming the device 500A is overlapped to form four layers in the area of the coaption element 510A, two layers in the area of the inner paddle 522A, and a single layer forms the outer paddle 520A. At the location of the plane 83A, the coaption element 510A has a generally rectangular shape oriented along the side-to-side plane 552A. The gaps 542A between the inner paddles 522A and coaption element 510A form an arcuate shape with a width 542B that is about the same as the central width 542B seen in Figure 81A.

[00548] Referring now to Figures 84–88, 86A, 87A, and 88A, example implantable devices 100, 500, 500A are shown without clasps or articulable gripping members. Rather, the example devices 100, 500, 500A shown in Figures 84–88, 86A, 87A, and 88A, have barbs or gripping members 800/800A and/or 802/802A integrated into portions of the coaption element or paddles of the anchor portion of the devices to facilitate grasping of the tissue of the native heart valve.

[00549] Referring now to Figure 84, an example implantable device 100 is shown that does not include articulable clasps or gripping elements. As described above, the device 100 is deployed from a delivery

sheath or means for delivery 102 and includes a coaption portion 104 and an anchor portion 106. The coaption portion 104 of the device 100 includes a coaption element or means for coapting 110 that is adapted to be implanted between the leaflets 20, 22 of a native valve (e.g., mitral valve MV, etc.) and is slidably attached to an actuation element or shaft 112 that extends through the coaption element or means for coapting 110 to a distal cap 114.

[00550] The anchor portion 106 of the device 100 includes outer paddles 120 and inner paddles 122 that are connected between the distal cap 114 and the coaption element or means for coapting 110. The anchor portion 106 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element or means for actuating 112 opens and closes the anchor portion 106 of the device 100 to grasp the native valve leaflets 20, 22 during implantation.

[00551] Rather than articuable clasps or gripping elements, the device 100 shown in Figure 84 includes barbed portions 800 arranged on the coaption element or means for coapting 110, with each side of the coaption element or means for coapting 110 having at least one barbed portion 800. When the anchor portion 106 of the device 100 is closed, tissue grasped between the inner paddles 122 and the coaption element or means for coapting 110 is pressed against the barbed portions 800. The barbed portions 800 can be sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 100. In some embodiments, the barbed portions 800 are angled downward to increase engagement with the native tissue.

[00552] Referring now to Figure 85, the example implantable device 100 is shown without separate articuable clasps. As described above, the device 100 is deployed from a delivery sheath or means for delivery 102 and includes a coaption portion 104 and an anchor portion 106. The coaption portion 104 of the device 100 includes a coaption element or means for coapting 110 that is adapted to be implanted between the leaflets 20, 22 of the native valve or mitral valve MV and is slidably attached to an actuation element 112 (e.g., actuation wire, shaft, rod, suture, line, etc.) that extends through the coaption element or means for coapting 110 to a distal cap 114.

[00553] The anchor portion 106 of the device 100 includes outer paddles 120 and inner paddles 122 that are connected between the distal cap 114 and the coaption element or means for coapting 110. The anchor portion 106 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element or means for actuating 112 opens and closes the anchor portion 106 of the device 100 to grasp the native valve leaflets 20, 22 during implantation.

[00554] Rather than separate articuable clasps or gripping elements, the device 100 shown in Figure 85 includes barbed portions 800 arranged on the inner paddles 122, with each inner paddle 122 having

at least one barbed portion 800. When the anchor portion 106 of the device 100 is closed, tissue grasped between the inner paddles 122 and the coaption element or means for coacting 110 is pressed against the barbed portions 800. The barbed portions 800 are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 100. In some embodiments, the barbed portions 800 are angled downward to increase engagement with the native tissue.

[00555] Referring now to Figure 86, the example implantable device 500 is shown that does not include articulating clasps or gripping elements. As described above, the device 500 includes a coaption portion 504 and an anchor portion 506. The coaption portion 504 of the device 500 includes a coaption element 510 that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation 512 that extends through the coaption element 510 to a distal cap 514.

[00556] The anchor portion 506 of the device 500 includes outer paddles 520 and inner paddles 522 that are connected between the distal cap 514 and the coaption element 510. The anchor portion 506 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element 512 opens and closes the anchor portion 506 of the device 500 to grasp the native valve leaflets 20, 22 during implantation.

[00557] Rather than articulating clasps or gripping elements, the device 500 includes barbed portions 800 arranged on the inner paddles 522, with each inner paddle 522 optionally having more than one barbed portion 800. When the anchor portion 506 of the device 500 is closed, tissue grasped between the inner paddles 522 and the coaption element 510 is pressed against the barbed portions 800. The barbed portions 800 are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500. In some embodiments, the barbed portions 800 are angled downward to increase engagement with the native tissue.

[00558] Referring now to Figure 86A, the example implantable device 500A is shown that does not include articulating clasps or gripping elements. As described above, the device 500A includes a coaption element 510A that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation (not shown) that extends through the coaption element 510A to a distal cap 514A. The device 500A also includes outer paddles 520A and inner paddles 522A that are connected between the distal cap 514A and the coaption element 510A. The device 500A is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation

of the actuation element opens and closes the paddles 520A, 522A of the device 500A to grasp the native valve leaflets 20, 22 during implantation.

[00559] Rather than articulating clasp or gripping elements, the device 500A includes barbed portions 800A arranged on the inner paddles 522A, with each inner paddle 522A optionally having more than one barbed portion 800A. When the device 500A is closed, tissue grasped between the inner paddles 522A and the coaption element 510A is pressed against the barbed portions 800A. The barbed portions 800A are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500A. In some embodiments, the barbed portions 800A are angled downward to increase engagement with the native tissue.

[00560] Referring now to Figure 87, the example implantable device 500 is shown that does not include separate articulating clasp or gripping elements. As described above, the device 500 includes a coaption portion 504 and an anchor portion 506. The coaption portion 502 of the device 500 includes a coaption element 510 that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation 512 that extends through the coaption element 510 to a distal cap 514.

[00561] The anchor portion 506 of the device 500 includes outer paddles 520 and inner paddles 522 that are connected between the distal cap 514 and the coaption element 510. The anchor portion 506 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element 512 opens and closes the anchor portion 506 of the device 500 to grasp the native valve leaflets 20, 22 during implantation.

[00562] Rather than separate articulating clasp or gripping elements, the device 500 includes barbed portions 800 arranged on the coaption element 510, with each side of the coaption element 510 having more than one barbed portion 800. When the anchor portion 506 of the device 500 is closed, tissue grasped between the inner paddles 522 and the coaption element 510 is pressed against the barbed portions 800. The barbed portions 800 are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500. In some embodiments, the barbed portions 800 are angled downward to increase engagement with the native tissue.

[00563] Referring now to Figure 87A, the example implantable device 500A is shown that does not include articulating clasp or gripping elements. As described above, the device 500A can have a coaption element 510A that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation (not shown) that extends through the coaption element 510A to a distal cap 514A. The device 500A also

includes outer paddles 520A and inner paddles 522A that are connected between the distal cap 514A and the coaption element 510A. The device 500A is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element opens and closes the paddles 520A, 522A of the device 500A to grasp the native valve leaflets 20, 22 during implantation.

[00564] Rather than separate articable clasps or gripping elements, the device 500A includes barbed portions 800A arranged on the coaption element 510A, with each side of the coaption element 510A having more than one barbed portion 800A. When the device 500A is closed, tissue grasped between the inner paddles 522A and the coaption element 510A is pressed against the barbed portions 800A. The barbed portions 800A are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500A. In some embodiments, the barbed portions 800A are angled downward to increase engagement with the native tissue.

[00565] Referring now to Figure 88, the example implantable device 500 is shown that does not include separate articable clasps or gripping elements. As described above, the device 500 includes a coaption portion 504 and an anchor portion 506. The coaption portion 504 of the device 500 includes a coaption element 510 that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation 512 that extends through the coaption element 510 to a distal cap 514.

[00566] The anchor portion 506 of the device 500 includes outer paddles 520 and inner paddles 522 that are connected between the distal cap 514 and the coaption element 510. The anchor portion 506 is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element 512 opens and closes the anchor portion 506 of the device 500 to grasp the native valve leaflets 20, 22 during implantation.

[00567] Rather than articable clasps or gripping elements, the device 500 includes barbed portions 800 arranged on the coaption element 510, with each side of the coaption element 510 including at least one barbed portion 800. Similar to device 1000 described above, the device 500 also includes barbed portions 802 arranged on the inner paddles 522, with each inner paddle 522 having at least one barbed portion 802.

[00568] When the anchor portion 506 of the device 500 is closed, tissue grasped between the inner paddles 522 and the coaption element 510 is pressed against the barbed portions 800, 802. The barbed portions 800, 802 are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500. In some embodiments, the barbed portions 800, 802 are angled downward to increase engagement with the native tissue. The combination of

barbed portions 800 on the coaption element 510 and barbed portions 802 on the inner paddles 522 forms the grasped tissue into an S-shaped tortuous path as it passes over the barbed portions 800, 802. Thus, forces pulling the tissue away from the device 500 will encourage the tissue to further engage the barbed portions 800, 802 before the tissue can escape.

[00569] Referring now to Figure 88A, the example implantable device 500A is shown that does not include articulating clasps or gripping elements. As described above, the device 500A can have a coaption element 510A that is adapted to be implanted between the leaflets 20, 22 of the native valve or native mitral valve MV and is slidably attached to an actuation element or means for actuation (not shown) that extends through the coaption element 510A to a distal cap 514A. The device 500A also includes outer paddles 520A and inner paddles 522A that are connected between the distal cap 514A and the coaption element 510A. The device 500A is actuatable between open and closed conditions and can take a wide variety of forms, such as, for example, paddles, gripping elements, or the like. Actuation of the actuation element opens and closes the paddles 520A, 522A of the device 500A to grasp the native valve leaflets 20, 22 during implantation.

[00570] Rather than articulating clasps or gripping elements, the device 500A includes barbed portions 800A arranged on the coaption element 510A, with each side of the coaption element 510A including at least one barbed portion 800A. The device 500A also includes barbed portions 802A arranged on the inner paddles 522A, with each inner paddle 522A having at least one barbed portion 802A.

[00571] When the device 500A is closed, tissue grasped between the inner paddles 522A and the coaption element 510A is pressed against the barbed portions 800A, 802A. The barbed portions 800A, 802A are sharp so that they engage—and in some embodiments, pierce—the native tissue and prohibit the tissue from retracting from the device 500A. In some embodiments, the barbed portions 800A, 802A are angled downward to increase engagement with the native tissue. The combination of barbed portions 800A on the coaption element 510A and barbed portions 802A on the inner paddles 522A forms the grasped tissue into an S-shaped tortuous path as it passes over the barbed portions 800A, 802A. Thus, forces pulling the tissue away from the device 500A will encourage the tissue to further engage the barbed portions 800A, 802A before the tissue can escape.

[00572] Referring now to Figures 89–102, the coaption element 510 and paddles 520, 522 of the example device 500 are shown. The coaption element 510 and the paddles can be made from a wide variety of different materials. The coaption element 510 and paddles 520, 522 can be formed from one or more of a variety of materials, for example, a metal fabric, such as a mesh, woven, braided, electrospun, deposited or formed in any other suitable way, laser cut, or otherwise cut material or flexible material. The material can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body.

[00573] In one example embodiment, the coaption element is made from a braided mesh of metal wires, such as a braided mesh of nitinol wires. In one example embodiment, the coaption element 510 is made of a braided mesh of between 25 and 100 wires, such as between 40 and 85 wires, such as between 45 and 60 wires, such as about 48 Nitinol wires or 48 Nitinol wires.

[00574] The coaption element can be covered in a cloth, such as a polyethylene cloth. The coaption element 510, can be surrounded in its entirety with a cloth cover, such as a polyethylene cloth of a fine mesh. The cloth cover can provide a blood seal on the surface of the spacer, and/or promote rapid tissue ingrowth.

[00575] The use of a shape memory material, such as braided Nitinol wire mesh, for the construction of the coaption element 510 results in a coaption element that can self-expandable, flexible in all directions, and/or results in low strains when the coaption element is crimped and/or bent. The material can be a single piece, two halves joined together, or a plurality of sections or pieces that are fastened or joined together in any suitable manner, such as, by welding, with adhesives, or the like.

[00576] Referring now to Figures 89–90, the device 500 extends from a proximal portion 505 to a distal portion 507 and includes a coaption element 510, inner paddles 522, and outer paddles 520. The coaption element 510 includes a proximal opening 519A and a distal opening 515 (Figures 92 and 94). The proximal opening 519A of the coaption element 510 is formed in a proximal portion 519 of the coaption element 510. The coaption element 510 is jointably connected to the inner paddles 522 by joint portions 525. The inner paddles 522 are jointably connected to the outer paddles 520 by joint portions 523. The outer paddles 520 are attached (e.g., jointably attached, etc.) to distal portions 527 by joint portions 521. Coaption gaps 542 are formed between the inner paddles 522 and the coaption element 510. Paddle gaps 544 are formed between the inner and outer paddles 520, 522 when the paddles 520, 522 are folded, for example, as shown in Figure 90.

[00577] Referring now to Figure 91, a front view of the device 500 is shown (a back view of which would be identical). The coaption element 510 includes the proximal portion 519, a middle portion 518, and a distal portion 517. The proximal portion 519 includes the proximal opening 519A. The distal portion 517 includes the distal opening 515 and is connected to the joint portions 525. The shape of the coaption element 510 is rounded or generally rounded to prevent the device 500 from catching or snagging on structures of the heart, such as the chordae tendineae, during implantation.

[00578] Referring now to Figure 92, a side view of the device 500 is shown. Similar to the device 500 viewed from the front, the distal portion 507 of the device 500 is generally narrower than the proximal portion 505 of the device 500 when the device 500 is viewed from the side. The coaption element 510 flares outwards in the proximal portion 519 from the proximal opening 519A to the middle portion 518. The coaption element 510 then tapers or narrows in the middle portion 518 from the proximal

portion 519 to the distal portion 517. The distal portion 517 remains narrow and then splits into the two joint portions 525. The generally rounded features of the device 500 are further demonstrated by the round shape of the joint portions 523 that jointably connect the inner and outer paddles 520, 522 and the outwardly bowed shape of the outer paddles 520.

[00579] The coaption gaps 542 formed between the inner paddles 522 and the coaption element 510 are configured to receive native tissue. The narrowing of the coaption element 510 gives the gaps 542 a somewhat teardrop shape that increases in width as the gaps 542 approach the distal portion 507 of the device 500. The widening of the gaps 542 toward the distal portion 507 allows the inner paddles 522 to contact tissue grasped in the gaps 542 nearer to the proximal portion 505 where pinching forces are greater as a result of the mechanical advantage provided by the length of the paddles 520, 522 and other securing or anchoring elements, such as those described in the present application.

[00580] Referring now to Figure 93, a top view of the device 500 is shown. The proximal opening 519A in the coaption element 510 is visible at the proximal portion 505 of the device 500 and the coaption element 510 can be seen to be hollow inside. The coaption element 510 has an oval or generally oval-shape when viewed from the top. While the paddles 520, 522 appear as protruding rectangular shapes, the paddles 520, 522 can extend laterally and have an arcuate or crescent-like shape.

[00581] Referring now to Figure 94, a bottom view of the device 500 is shown. The distal opening 515 in the coaption element 510 is visible at the distal portion 507 of the device 500 and the coaption element 510 can be seen to be hollow inside. The coaption element 510 has an oval or generally oval-shape when viewed from the top. While the paddles 520, 522 appear as protruding rectangular shapes, the paddles 520, 522 can extend laterally and have an arcuate or crescent-like shape. The distal portion 517 of the coaption element 510 can be seen splitting in two to join with the joint portions 525.

[00582] Referring now to Figures 89A, 90A, 91A, 92A, 93A, 94A, 95A, 96A, 97A, 98A, 99A, 100A, 101A, and 102A, the portions of the device 500A formed by the strip of material 501A (e.g., a single, continuous strip of material, a composite strip of material, etc.), that is, the coaption element 510A and paddles 520A, 522A, are shown. The coaption element 510A and the paddles can be made from a wide variety of different materials. The coaption element 510A, and paddles 520A, 522A can be formed from a material that can be a metal fabric, such as a mesh, woven, braided, electrospun, deposited or formed in any other suitable way, laser cut, or otherwise cut material or flexible material. The material can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body.

[00583] In one example embodiment, the coaption element 510A, inner paddle 522A, and outer paddle 520A are made from a single, continuous strip of material 501A. The strip of material 501A can be formed from a material that can be a metal fabric, such as a mesh, woven, braided, electrospun,

deposited or formed in any other suitable way, laser cut, or otherwise cut material or flexible material. The material can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. In one example embodiment, the strip of material 501A is made of a braided mesh of between 25 and 100 strands, such as between 40 and 85 strands, such as between 45 and 60 strands, such as about 48 Nitinol wires or 48 Nitinol wires.

[00584] Referring now to Figures 205–207, an example woven or braided material 4000 that can be used for the strip of material 501A is shown. Referring now to Figure 205, an enlarged plan view of the material 4000 is shown. The material 4000 extends from a first edge 4002 to a second edge 4004. The edges 4002, 4004 surround a central portion or field 4006. The material 4000 is formed by braiding or weaving together central strands 4020, such as Nitinol wires. Edge strands 4010 extend longitudinally through the material 4000 along the edges 4002, 4004. The central strands 4020 are woven or braided such that the central strands 4020 wrap around the edge strands 4010. Wrapping the central strands 4020 around the edge strands 4010 causes the material 4000 near the edges 4002, 4004 to be thicker than the material in the central portion 4006, forming a lobed or dog-bone-like shape when the material 4000 is viewed from the end, as is shown in Figure 206. Thus, the edges 4002, 4004 of the material 4000 are less flexible than the central portion 4006. The edge strands 4010 and central strands 4020 can be similar in diameter and can have a diameter ranging from about 0.06 millimeters to about 0.18 millimeters. In some embodiments, the edge strands 4010 can have a larger diameter than the central strands 4020 to impart more stiffness or rigidity to the edges 4002, 4004 than the central portion 4006. For example, the edge strands 4010 can have a diameter ranging from 0.07 millimeters to about 0.27 millimeters, or about 0.17 millimeters, and the central strands 4020 can have a diameter ranging from about 0.04 millimeters to about 0.15 millimeters, or about 0.009 millimeters. In some embodiments, the edges 4002, 4004 are made less flexible than the central portion 4006 by using different materials for the edge strands 4010 and central strands 4020, such as, for example, a metal material—e.g., Nitinol—for the edge strands 4010 and a cloth or plastic material—e.g., polyethylene—for the central strands 4020. Alternatively, the edge strands 4010 and central strands 4020 can be made from the same material that is subjected to different chemical and/or thermal processes that alter the flexibility of the materials so that the central strands 4020 are more flexible than the edge strands 4010.

[00585] Referring now to Figure 207, folded portions of material 4000 are layered on top of each other to form a section that has four layers 4000A, 4000B, 4000C, 4000D. The lobed shape of the individual layers, with thicker edges 4002, 4004 than the central portion 4006, creates three gaps 4001A, 4001B, 4001C between the layers 4000A, 4000B, 4000C, 4000D of material 4000 in the location of the central

portion 4006. Outer gaps 4001A, 4001C are formed between outer layers 4000A, 4000D and the adjacent middle layers 4000B, 4000C.

[00586] As is discussed in the present disclosure, the coaption element 510A of the device 500A can be formed from four layers of material, such as the material 4000. When layers of the material 4000 are used to form the coaption element 510A, the actuation element 512A of the device 500A can be inserted through the middle gap 4001B formed in the center of the four layers of material 4000. The actuation element 512A can have a larger diameter than the width of the gap 4001B, so that inserting the actuation element 512A causes the middle gap 4001B to stretch open and adjacent outer gaps 4001A, 4001C to reduce in size. In some embodiments, inserting the actuation element 512A causes the center body portions 4006 on either side to bulge outward to a thickness that is greater than the thickness of the four stacked edge portions 4002, 4004.

[00587] The coaption element 510A and paddles 520A, 522A can be covered in a cloth, such as a polyethylene cloth. The coaption element 510A and paddles 520A, 522A can be surrounded in their entirety with a cloth cover (e.g., cover 540A), such as a polyethylene cloth of a fine mesh. The cloth cover can provide a blood seal on the surface of the spacer, and/or promote rapid tissue ingrowth.

[00588] The use of a shape memory material, such as braided Nitinol wire mesh, for the construction of the coaption element 510A and paddles 520A, 522A results in a coaption element and paddles that can be self-expandable, flexible in all directions, and/or results in low strains when crimped and/or bent. The material can be a single piece, two halves joined together, or a plurality of sections or pieces that are fastened or joined together in any suitable manner, such as, by welding, with adhesives, or the like.

[00589] Referring now to Figures 89A and 90A, the device 500A extends from a proximal portion 505A to a distal portion 507A and includes a coaption element 510A, inner paddles 522A, and outer paddles 520A. The single, continuous strip of material 501A extends between two ends 501B and is folded to form the coaption element 510A, inner paddles 522A, and outer paddles 520A. Some portions of the device 500A are formed from multiple layers of the strip of material 501A. For example, the strip of material 501A is overlapped to form four layers in the area of the coaption element 510A and two layers in the area of the inner paddle 522A.

[00590] The coaption element 510A and paddles 520A, 522A are jointly connected together by joint portions of the strip of material 501A. The coaption element 510A is jointly connected to the inner paddles 522A by joint portions 525A. The inner paddles 522A are jointly connected to the outer paddles 520A by joint portions 523A. The outer paddles 520A are attached (e.g., jointly attached, etc.) to the distal portion 527A by joint portions 521A. The aperture 527B in the distal portion 527A engages the cap 514A.

[00591] Various gaps are formed between portions of the device 500A when the strip of material 501A is folded into the desired shape. Coaption gaps 542A are formed between the inner paddles 522A and the coaption element 510A. Paddle gaps 544A are formed between the inner and outer paddles 520A, 522A when the paddles 520A, 522A are folded, for example, as shown in Figure 90A. Collar gaps 546A are formed when the strip of material 501A is folded to form the proximal portions 519B of the coaption element 510A.

[00592] Referring now to Figure 91A, a front view of the device 500A is shown (a back view of which would be identical). The coaption element 510A includes the proximal portion 519B extending above the joint portions 523A of the paddles 520A, 522A. The distal portion 517A of the coaption element 510A is concealed by the paddles 520A, 522A when viewed from the front or back, giving the device 500A a long and narrow rounded rectangular shape. The shape of the coaption element 510A helps prevent the device 500A from catching or snagging on structures of the heart, such as the chordae tendineae, during implantation.

[00593] Referring now to Figure 92A, a side view of the device 500A is shown. The distal end 507A of the device 500A is generally narrower than the proximal end 505A of the device 500A when the device 500A is viewed from the side, forming a generally blunt and rounded shape. The coaption element 510A includes the proximal portion 519B, a middle portion 518A, and the distal portion 517A. The proximal portion 519B flares outward from the middle portion 518A to engage the collar 511D (Figure 48A). The middle portion 518A of the coaption element 510A is straight or generally straight when viewed from the side. The distal portion 517A is attached (e.g., jointably attached, etc.) to the inner paddles 522A by the joint portions 525A. The generally rounded features of the device 500A are further demonstrated by the round shape of the joint portions 523A that jointably connect the paddles 520A, 522A. The joint portions 521A connecting the outer paddles 520A to the distal portion 527A are also rounded and ease the transition in shape from the strip of material 501A to the cap 514A (Figure 48A) that is assembled to the flat or generally flat distal portion 527A.

[00594] The coaption gaps 542A formed between the inner paddles 522A and the coaption element 510A are configured to receive native tissue. The general straightness of the middle portion 518A of the coaption element 510A and the inner paddles 522A gives the gaps 542A a consistent or generally consistent width with a narrow upper end where the proximal portion 519B flares outward to engage the collar 511D (Figure 48A). Thus, the inner paddles 522A contact the tissue grasped in the gaps 542A nearer to the proximal portion 505A where pinching forces are greater as a result of the mechanical advantage provided by the length of the paddles 520A, 522A and other securing or anchoring elements, such as those described in the present application.

[00595] As discussed above, the coaption element 510A and paddles 520A, 522A of the device 500A are formed by folding the strip of material 501A. The strip of material 501A is then unfolded and assembled with other components, such as the collar 511D, cap 514A, and paddle frames 524A. The strip of material 501A is shape-set after being formed into a desired shape so that the strip of material 501A returns to the desired shape after assembly with other components. In some embodiments, a jig is used during folding and shape-setting of the strip of material 501A to ensure that the strip of material 501A is folded in the proper location with the desired radius.

[00596] Referring again to Figure 92A, portions of a jig 570A to aid in folding and shape-setting the device 500A are shown. The strip of material 501A is shown folded around the jig 570A so that the strip of material 501A forms a desired shape. To fold the strip of material 501A into the shape of the device 500A using the jig 570A, the strip of material 501A is arranged with one of the ends 501B at the location of the inner paddle 522A. The strip 501A is extended from the end 501B in a distal direction 507B to form a first layer 581A of the inner paddle 522A, around a first jig portion 572A to form a first layer 581A of the hinge portion 525A, and then in a proximal direction 505B to form the first layer 581A of the coaption element 510A. The first layer 581A of material forms the sides of the inner paddle 522A and coaption element 510A that surround the coaption gap 542A. The strip 501A is then wrapped around a second jig portion 574A to form one of the proximal portions 519B and openings 546A of the coaption element 510A. The strip 501A is then extended in a distal direction 507A along the first layer 581A to form a second layer 582A of the coaption element 510A. The strip 501A is then wrapped back round the first jig portion 572A, forming the second layer 582A of the hinge portion 525A and back in the proximal direction 505B to form the second layer 582A of the inner paddle 522A. The strip 501A is then wrapped around a third jig portion 576A to form the joint portion 523A. The strip 501A then extends in the distal direction 507A along the inner paddle 522A to form the outer paddle 520A before being folded around a fourth jig portion 578A to form the joint portion 521. The strip 501A is then extended laterally to form the distal portion 527. The routing of the strip 501A through the jig 570A is then performed in reverse order on the opposite side of the jig 570A to form the second half of the device 500A. That is, the strip 501A is then wrapped around the fourth, third, second, and first jig portions 578A, 576A, 574A, 572A to form the second half of the device 500A. Once the strip 501A has been wrapped around the jig portions as described above, a shape-setting operation is performed. While the portions of the illustrated jig have a rounded or generally round shape, the portions can have any shape to aid in the folding and shaping of the strip of material 501A. The jig 570 can have more or fewer portions for engaging the strip of material 501A.

[00597] Referring now to Figure 93A, a top view of the device 500A is shown. The first and second layers 581A, 582A of each half of the device 500A form the four layers of the coaption device 510A.

The proximal opening 519C of the coaption device 510A is formed between the two second layers 582A. In some embodiments, the opening 519C is formed by inserting the actuation element 512A (not shown) between the folded and overlapping layers of the strip of material 501A after shape-setting of the strip of material 501A. In other embodiments, the opening 519C is formed by shape-setting the folded layers 581A, 582A of the strip of material 501A around an additional jig portion (not shown) to give the coaption element 510A a rounded or generally rounded shape when viewed from the top.

[00598] Referring now to Figure 94A, a bottom view of the device 500A is shown. The distal portion 527A of the strip of material 501A is shown, as is the aperture 527B for receiving the cap 514A. The coaption element 510A and outer paddles 520A have a generally rounded rectangle shape when viewed from below.

[00599] Referring now to Figures 95–102, perspective and cross-sectional views of the device 500 are shown. Referring now to Figure 95, the device 500 is shown sliced by cross-section plane 96 near the proximal portion of the coaption element 510. Referring now to Figure 96, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 96 in Figure 95. At the location of the plane 96, the coaption element 510 has an oval or generally oval shape with thicker portions along the sides of the coaption element 510. The distal opening 515 is visible from the proximal portion and the coaption element 510 has a hollow interior.

[00600] Referring now to Figure 97, the device 500 is shown sliced by cross-section plane 98 positioned about half of the way between the distal portion 507 and the proximal portion 505 of the coaption element 510. Referring now to Figure 98, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 98 in Figure 97. At the location of the plane 98, the coaption element 510 has an oval or generally oval shape that is larger than the oval shape of Figure 96.

[00601] Referring now to Figure 99, the device 500 is shown sliced by cross-section plane 100 positioned about one-quarter of the way between the distal portion 507 and the proximal portion 505 of the coaption element 510. Referring now to Figure 99, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 100 in Figure 99. At the location of the plane 100, the coaption element 510 has an oval or generally oval shape that is narrower than the oval shape seen in Figure 98.

[00602] Referring now to Figure 101, the device 500 is shown sliced by cross-section plane 102 positioned near the distal portion 507 of the coaption element 510. Referring now to Figure 102, a cross-sectional view of the device 500 is shown as viewed from cross-section plane 102 in Figure 101. At the location of the plane 102, the coaption element 510 has an oval or generally oval shape that is smaller than the oval shape seen in Figure 100 and that is split as the coaption element 510 joins the joint portions 525.

[00603] Referring now to Figures 95A, 96A, 97A, 98A, 99A, 100A, 101A, and 102A, perspective and cross-sectional views of the portions of the device 500A formed by the single, continuous strip of material 501A are shown. Referring now to Figure 95A, the device 500A is shown sliced by cross-section plane 96A near the proximal portion of the coaption element 510A. Referring now to Figure 96A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 96A in Figure 95A. At the location of the plane 96A, the coaption element 510 has a rectangular or generally rectangular shape. In some embodiments, when the actuation element (not shown) is inserted between the layers 582A of the coaption element 510A, the coaption element 510A remains straight when viewed from the side but bows outward to form a rounded or generally round shape when viewed from cross-section plane 96A.

[00604] Referring now to Figure 97A, the device 500A is shown sliced by cross-section plane 98A near the proximal portion of the coaption element 510A. Referring now to Figure 98A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 98A in Figure 97A. At the location of the plane 98A, the coaption element 510 has a rectangular or generally rectangular shape. In some embodiments, when the actuation element (not shown) is inserted between the layers 582A of the coaption element 510A, the coaption element 510A remains straight when viewed from the side but bows outward to form a rounded or generally round shape when viewed from cross-section plane 98A.

[00605] Referring now to Figure 99A, the device 500A is shown sliced by cross-section plane 100A near the proximal portion of the coaption element 510A. Referring now to Figure 100A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 100A in Figure 99A. At the location of the plane 100A, the coaption element 510 has a rectangular or generally rectangular shape. In some embodiments, when the actuation element (not shown) is inserted between the layers 582A of the coaption element 510A, the coaption element 510A remains straight when viewed from the side but bows outward to form a rounded or generally round shape when viewed from cross-section plane 100A.

[00606] Referring now to Figure 101A, the device 500A is shown sliced by cross-section plane 102A near the proximal portion of the coaption element 510A. Referring now to Figure 102A, a cross-sectional view of the device 500A is shown as viewed from cross-section plane 102A in Figure 101A. At the location of the plane 102A, the coaption element 510 has a rectangular or generally rectangular shape. In some embodiments, when the actuation element (not shown) is inserted between the layers 582A of the coaption element 510A, the coaption element 510A remains straight when viewed from the side but bows outward to form a rounded or generally round shape when viewed from cross-section plane 102A.

[00607] Referring now to Figures 103–105, the example implantable prosthetic device 100 is shown having covered and uncovered portions. The device 100 is shown implanted in the native mitral valve MV and secured to the native leaflets 20, 22. As described above, the device 100 includes a coaption element or means for coapting 110, paddles 120, clasps 130, and a cap 114. The paddles 120 and clasps 130 are in a closed position to secure the device 100 to the grasped native leaflets 20, 22 of the mitral valve MV. A proximal portion 105 of the device 100 is exposed to the left atrium LA and a distal portion 107 of the device 100 is exposed to the left ventricle LV.

[00608] Referring now to Figure 103, the device 100 is shown with a covering 900 that covers the entirety of the coaption element or means for coapting 110 and the cap 114. In some embodiments, the covering 900 can be a cloth or fabric or polymer such as PET, velour, electrospun, deposited, or other suitable material. In other embodiments, in lieu of or in addition to a fabric, the cover can include a coating (e.g., polymeric) that is applied to the prosthetic spacer device and/or mechanical sealing mechanisms, such as silicone and interlocking joints can be used. The covering 900 can be formed from a metal fabric, such as a mesh, woven, braided, or formed in any other suitable way or a laser cut or otherwise cut flexible material. The covering 900 can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. The covering 900 prohibits blood flow through coaption element or means for coapting 110 at the proximal portion 105, and also provides a seal between the device 100 and the leaflets 20, 22. Thus, the covering 900 aids in the prohibition of blood flow through the native valve at the location of the device 100. The covering 900 also prohibits recirculating blood flow from entering the device 100 from the distal portion 107.

[00609] Referring now to Figure 104, the device 100 is shown with a covering 1000 that partially covers the coaption element or means for coapting 110 from the proximal portion 105 of the device 100 to the portion of the coaption element or means for coapting 110 that engages the native leaflets 20, 22. In some embodiments, the cover can be a cloth or fabric such as PET, velour, or other suitable fabric. In other embodiments, in lieu of or in addition to a fabric, the cover can include a coating (e.g., polymeric) that is applied to the prosthetic spacer device. The covering 1000 can be formed from a metal fabric, such as a mesh, woven, braided, or formed in any other suitable way or a laser cut or otherwise cut flexible material. The covering 1000 can be cloth, shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. Thus, the covering 1000 prohibits blood flow through the coaption element or means for coapting 110 at the proximal portion 105.

[00610] Referring now to Figure 105, the device 100 is shown with a covering 1100 that partially covers the coaption element or means for coapting 110 extending from the portion of the coaption element or

means for coapting 110 that engages the native leaflets 20, 22 toward the distal portion 107. The covering 1100 also covers the cap 114. In some embodiments, the cover can be a cloth or fabric such as PET, velour, or other suitable fabric. In other embodiments, in lieu of or in addition to a fabric, the cover can include a coating (e.g., polymeric) that is applied to the prosthetic spacer device. The covering 1100 can be formed from a mesh, woven, braided, or formed in any other suitable way. The covering 1100 can be cloth, polymer, silicone, electrospun material, deposited material, and/or shape-memory alloy wire—such as Nitinol—to provide shape-setting capability, or any other flexible material suitable for implantation in the human body. Thus, blood flow can enter the coaption element or means for coapting 110 but is prohibited from passing through the device by the covering 1100 arranged toward the distal portion 107. The covering 1100 also prohibits recirculating blood flow from entering the device 100 from the distal portion 107.

[00611] Referring now to Figures 106–109, an example coaption element 1200 for an implantable prosthetic device is shown. The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application. Referring to Figure 106, the coaption element 1200 has a cylindrical or generally cylindrical shape extending between two caps 1201. However, the coaption element 1200 can have any shape, such as any of the shapes disclosed herein. In one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. For example, the width/size of the coaption element in the Anterior to Posterior direction (when implanted), Medial to Lateral direction (when implanted), or both can be expanded (or contracted) in a controlled manner. The coaption element can be made from a mesh 1200 of material. Referring now to Figure 107, the mesh wall of the generally cylindrical coaption element 1200 extends outward from the caps 1201 by a distance 1204. Referring now to Figure 108, axial forces 1208 are applied to the caps 1201 of the coaption element 1200 causing the coaption element 1200 to compress in an axial direction. Compressing the coaption element 1200 axially causes the coaption element 1200 to expand or bulge in an outward direction 1210, such that the distance 1204 increases.

[00612] The coaption element 1200 can be compressed in a wide variety of different ways. For example, a threaded connection can be used to draw the two ends of the coaption element together or push the two ends of the coaption element apart. For example, a collar can be provided on each end of the coaption element. One of the collars can threadedly engage a threaded shaft, while the other collar is rotatably connected to the shaft. Rotating the shaft in one direction draws the collars together. Rotating the shaft in the opposite direction moves the collars apart.

[00613] Incorporating the coaption element 1200 into an implantable prosthetic device of the present application allows the coaption element to be expanded to press outward against tissue grasped between the coaption element and the paddles and/or gripping members.

[00614] Referring now to Figures 106A, 108A, 106B, and 108B, example coaption elements 1200, similar to the embodiment illustrated by Figures 106–109, for an implantable prosthetic device is shown. The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application. Referring to Figure 106A, the coaption element 1200 has a cylindrical or generally cylindrical shape extending between two caps 1201. However, the coaption element 1200 can have any shape, such as any of the shapes disclosed herein. In the example illustrated by Figures 106A and 108A, the coaption element 1200 comprises a tube 1203 with slots 1205. For example, the tube 1203 can be made from a shape memory alloy, such as nitinol, and the slots can be cut, such as laser cut, into the tube. The slots can be cut into the material that forms the tube, before the material is formed into a tube.

[00615] In one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. For example, the configuration of the slots 1205 and/or a shape-set of the tube can be selected to control the shape of the expanded coaption element 1200. For example, the configuration of the slots 1205 and/or a shape-set can determine the way the width/size of the coaption element in the Anterior to Posterior direction, and/or Medial to Lateral direction expanded (and/or contract). Referring to Figure 106A, the tube wall of the generally cylindrical coaption element 1200 can extend outward from caps 1201 by a distance 1204. Referring now to Figure 108A, axial forces 1208 and/or rotational forces 1209 can be applied to the caps 1201 of the coaption element 1200 causing the coaption element 1200 to expand from the configuration illustrated by Figure 106A to the configuration illustrated by Figure 108A. In the illustrated example, compressing the coaption element 1200 axially and twisting the coaption element 1200 to expand or bulge in an outward direction 1210, such that the distance 1204 increases.

[00616] Referring to Figures 106B and 108B, the coaption element 1200 can be compressed in a wide variety of different ways. For example, a threaded connection 1221 can be used to draw the two ends of the coaption element together and twist the coaption element in a first direction or push the two ends of the coaption element apart and twist the coaption element in a second direction. For example, a collar can be provided on each end of the coaption element. One of the collars can threadedly engage a threaded shaft, while the other collar is fixedly connected to the shaft. Rotating the shaft in one direction draws the collars together and rotates the collars relative to one another in a first direction. Rotating the shaft in the opposite direction moves the collars apart and rotates the collars relative to one another in a second direction. The pitch of the threaded connection can be selected to set a ratio between the distance the coaption element 1200 is compressed and the angle that the coaption element is twisted.

[00617] Incorporating the coaption elements 1200 illustrated by Figures 106A, 108A, 106B, and 108B into an implantable prosthetic device of the present application allows the coaption element to be expanded to press outward against tissue grasped between the coaption element and the paddles and/or gripping members.

[00618] Figures 106C and 108C illustrate an example embodiment of a controllably expandable coaption element 1200 for an implantable prosthetic device. The coaption element 1200 can be used on its own, with a covering, or inside any of the coaption elements described herein (to expand the coaption element). The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application. Referring to Figure 106C, the coaption element 1200 has pairs of pivotally connected arms 1231. The pairs of pivotally connected arms 1231 each extending between and pivotally connected to two caps 1201. In the illustrated example, there are two pairs of pivotally connected arms 1231. However, there can be one, three, four, or any number of pairs of pivotally connected arms.

[00619] In one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. For example, two pairs (as illustrated) of pivotally connected arms can be included to change the width/size of the coaption element in only one of the Anterior to Posterior direction, and/or Medial to Lateral direction. Four pairs of pivotally connected arms 1231 can be included to change the width/size of the coaption element in both the Anterior to Posterior direction and Medial to Lateral direction. When four pairs of pivotally connected arms 1231 are included, the arms can have different lengths and/or pivot point locations to make the coaption element 1200 expand (or contract) differently in different directions. For example, the lengths of the arms can be selected to expand more in the Medial to Lateral direction than the Anterior to Posterior direction.

[00620] Referring now to Figure 108C, axial forces 1208 can be applied to the caps 1201 of the coaption element 1200 causing the coaption element 1200 to expand from the configuration illustrated by Figure 106C to the configuration illustrated by Figure 108C. In the illustrated example, compressing the pivotally connected arms 1231 axially causes the pivotal connections 1233 or knees to spread apart in an outward direction 1210, such that the distance 1204 increases.

[00621] Referring to Figures 106C and 108C, the coaption element 1200 can be compressed in a wide variety of different ways. For example, a threaded connection 1221 can be used to draw the two ends of the coaption element together or push the two ends of the coaption element apart. For example, a collar can be provided on each end of the coaption element. One of the collars can threadably engage a threaded shaft, while the other collar is rotatably connected to the shaft. Rotating the shaft in one direction draws the collars together. Rotating the shaft in the opposite direction moves the collars apart.

[00622] Incorporating the coaption element 1200 illustrated by Figures 106C, and 108C into an implantable prosthetic device of the present application allows the coaption element to be expanded to press outward against tissue grasped between the coaption element and the paddles and/or gripping members.

[00623] Figures 106D and 108D illustrate an example embodiment of an expandable coaption element 1200 for an implantable prosthetic device. The coaption element 1200 can be used on its own, with a covering (See Figures 106E and 108E), or inside any of the coaption elements described herein (to expand the coaption element). The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application. Referring to Figure 106C, the coaption element 1200 has, a central support member 1243, one or more pivotally connected arms 1241, and connection lines 1245. Each arm 1241 extends from a pivotal connection to the central support member 1243. Each connection line 1245 is connected to the central support member 1243 and a pivotally connected arm 1241. The length of the connection line 1245 sets the degree to which the connection arms pivot away from the central support member 1243. In the illustrated example, there are two pivotally connected arms 1241. However, there can be one, three, four, or any number of pivotally connected arms.

[00624] In one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. For example, two pivotally connected arms can be included to change the width/size of the coaption element in only one of the Anterior to Posterior direction, and/or Medial to Lateral direction. Four pivotally connected arms 1241 can be included to change the width/size of the coaption element in both the Anterior to Posterior direction and Medial to Lateral direction. When four pivotally connected arms 1241 are included, the arms and/or the connection lines 1245 can have different lengths and/or pivot point locations to make the coaption element 1200 expand (or contract) differently in different directions. For example, the lengths of the arms and/or the connection lines can be selected to expand more in the Medial to Lateral direction than the Anterior to Posterior direction.

[00625] The arms 1241 can be moved from the contracted position (Figure 106D) to the expanded position (Figure 108D). For example, the arms 1241 can be biased toward the expanded position by a spring or other biasing means. In the illustrated example, restraints 1247, such as sutures hold the arms 1241 in the contracted position. The restraints 1247 can be removed or broken to cause the coaption element 1200 to expand from the configuration illustrated by Figure 106D to the configuration illustrated by Figure 108D.

[00626] Figures 106E and 108E illustrate an example embodiment that is similar to the embodiment illustrated by Figures 106D and 108D, except that the coaption element includes a covering material 1253. The covering material 1253 can extend from the central support member 1243 to each arm 1241.

The covering material 1253 can be used with the connection lines 1245 or the covering material can eliminate the need for the connection lines 1245.

[00627] Referring now to Figure 106F, an example coaption element 1200, similar to the embodiment illustrated by Figures 106-109, for an implantable prosthetic device is shown. The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application. Referring to Figure 106F, the coaption element 1200 is defined by a coil 1263 extending between two caps 1201. The coaption element 1200 can have any shape, such as any of the shapes disclosed herein. The coil 1263 can be made from a shape memory alloy, such as nitinol.

[00628] In one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. For example, the shape-set of the coil 1263 can be selected to control the shape of the expanded coaption element 1200. For example, the configuration of the shape-set can determine the way the width/size of the coaption element in the Anterior to Posterior direction, and/or Medial to Lateral direction expand (and/or contract). Referring to Axial forces 1208 and/or rotational forces 1209 can be applied to caps 1201 of the coaption element 1200 causing the coaption element 1200 to expand or retract from the configuration illustrated by Figure 106F. In the illustrated example, extending the coil 1263 axially and twisting the coil 1263 contracts the coil in an inward direction 1211 and compressing the coil 1263 axially and twisting the coil in the opposite direction expands or bulge the coil in an outward direction.

[00629] Referring to Figure 106F, the coaption element 1200 can be compressed in a wide variety of different ways. For example, a threaded connection 1221 can be used to draw the two ends of the coaption element together and twist the coaption element in a first direction or push the two ends of the coaption element apart and twist the coaption element in a second direction. For example, a collar can be fixedly connected to each end of the coil 1263. One of the collars can threadedly engage a threaded shaft, while the other collar is fixedly connected to the shaft. Rotating the shaft in one direction draws the collars together and rotates the collars relative to one another in a first direction. Rotating the shaft in the opposite direction moves the collars apart and rotates the collars relative to one another in a second direction. The pitch of the threaded connection can be selected to set a ratio between the distance the coaption element 1200 is compressed and the angle that the coaption element is twisted.

[00630] Incorporating the coaption elements 1200 illustrated by Figure 106F into an implantable prosthetic device of the present application allows the coaption element to be expanded to press outward against tissue grasped between the coaption element and the paddles and/or gripping members.

[00631] Figures 106G–106I illustrate example embodiments of expandable coaption elements 1200. In the examples illustrated by Figures 106G-106I, the coaption elements are inflated by a fluid medium to expand the coaption element. The fluid medium can take a wide variety of different forms. Examples of fluids that can be used to inflate the coaption element 1200 include, but are not limited to, air, gel, water, blood, foaming materials, etc. The coaption element 1200 can be used with any of the implantable prosthetic devices described in the present application.

[00632] Referring to Figure 106G, the coaption element 1200 can have an outer layer 1271 (For example, any of the coaption elements 110, 510 disclosed herein) and an inner layer 1273 or balloon. The coaption element 1200 can have any shape, such as any of the shapes disclosed herein. In the example illustrated by Figures 106G and 1086, the inner layer 1273 is disposed in the outer layer 1271 and can have the same or generally the same shape as the inner surface of the outer layer. The inner layer can be made from an expandable material, such as a rubber or other material traditionally used for making balloons and angioplasty devices. The outer layer 1271 can be made from a shape memory alloy, such as nitinol.

[00633] Referring to Figures 106H and 106I, in one example embodiment, the direction of expansion of the coaption element 1200 can be controlled. In the example illustrated by Figure 106H, the inner layer 1273 comprises two balloons that are optionally connected together. However, any number of balloons can be used. For example, the inner layer can comprise 3, 4, or any number of balloons. The balloons can be individually inflated to control the shape of expansion of the coaption element 1200. When the balloons are connected together, the connection can also affect the shape of expansion. In the example illustrated by Fig. 106H, the balloons are connected together along a plane 1275 or area. Expansion of the inner layer 1273 in the direction 1277 will be less than the expansion in the direction 1279 due to the connection 1275. As such, in this example, the expansion due to inflation can be limited to or substantially limited to expansion in the Medial to Lateral direction.

[00634] The use of multiple balloons and the configuration of any connections between the balloons can determine the way the width/size of the coaption element in the Anterior to Posterior direction, and/or Medial to Lateral direction expand (and/or contract).

[00635] In the example illustrated by Figure 106I, the inner layer 1273 comprises one or more supports 1281 or struts. One support 1281 is illustrated, but any number can be used. For example, the inner layer can comprise 2, 3, 4, or any number of supports. The supports 1281 can divide the inner layer into multiple independently inflatable chambers or the supports may not seal off independent chambers and inflation fluid applied to any chamber will fill all of the chambers. When there are independently inflatable chambers, the chambers can be individually inflated to control the shape of expansion of the coaption element 1200. The supports also affect the shape of expansion. In the example illustrated by

FIG. 106I, the support 1281 will reduce or eliminate expansion of the inner layer 1273 in the direction 1277. As such, in this example, the expansion due to inflation can be limited to or substantially limited to expansion in the Medial to Lateral direction.

[00636] The use of multiple independently inflatable chambers and/or the configuration of the support members 1281 can determine the way the width/size of the coaption element in the Anterior to Posterior direction, and/or Medial to Lateral direction expand (and/or contract).

[00637] Incorporating the coaption elements 1200 illustrated by Figures 106G-106I into an implantable prosthetic device of the present application allows the coaption element to be expanded to press outward against tissue grasped between the coaption element and the paddles and/or gripping members.

[00638] Referring now to Figures 110–111, an example implantable prosthetic device 1300 is shown. The device 1300 is similar to the device 100, described above, and includes a coaption element 1310, paddles 1320, and clasps or gripping members 1330. Referring now to Figure 111, a top view of the coaption element 1310 is shown. As can be seen in Figure 111, the coaption element 1310 has an oval or generally oval-shaped cross-section. The coaption element 1310 does not include a central opening and can be formed from a solid piece of material, such as foam. Forming the coaption element 1310 from a solid piece of foam material prohibits blood from flowing through the center of the coaption element 1310, thereby substantially eliminating a location where blood can be captured. The device 1300 can include any other features for an implantable prosthetic device discussed in the present application, and the device 1300 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application). The prosthetic device 1300 can be opened and closed in a wide variety of different ways. For example, a sleeve can be slidably disposed over the coaption element to engage and open the paddles. Or, the paddles can be opened by pulling a line or suture that opens the clasps and the movement of the clasps can open the paddles. However, any mechanism for opening and closing the device 1300 can be used.

[00639] Referring now to Figures 112–128, an example paddle frame 1400 for an implantable prosthetic device is shown. The paddle frame 1400 can be used with any of the implantable prosthetic devices described in the present application. The paddle frame 1400 is formed from a piece of material 1402, such as nitinol, or any other suitable material. The paddle frame 1400 extends from a cap attachment portion 1410 to a paddle connection portion 1420 and has a proximal portion 1422, a middle portion 1424, and a distal portion 1426. In some embodiments, the paddle frame 1400 includes attachment portions 1440 for securing a cover (see Figure 30), the inner paddle 522, and/or the outer paddle 520 to the paddle frame 1400. In some embodiments, the paddle frame 1400 is thinner in the location of

the fifth curve 1438 to facilitate bending of both sides of the paddle frame 1400 toward the center plane 1404 during, for example, crimping of the device.

[00640] The paddle frame 1400 extends from a first attachment portion 1412 in a rounded, three-dimensional shape through the proximal, middle, and distal portions 1422, 1424, 1426 and returns to a second attachment portion 1414. To form a rounded three-dimensional shape, the paddle frame 1400 is bent or curved in multiple locations as the paddle frame 1400 extends between the first and second attachment portions 1412, 1414. The attachment portions 1412, 1414 include notches 1416, 1418 respectively for attachment to the cap. The paddle frame 1400 flexes at the area 1419. The area 1419 can include a wider portion 1417 to distribute the stress that results from flexing the paddle frame 1400 over a greater area. Also, notches 1416, 1418 can include radiused notches 1415 at each end of the notches. The radiused notches 1415 serve as strain reliefs for the bending area 1419 and the area where the paddle frame 1400 connects to the cap.

[00641] The paddle frame 1400 curves away from a median or central plane 1404 (Figure 115) at a first curve 1430 to widen the shape of the paddle frame 1400. As can be seen in Figure 117, the paddle frame 1400 also curves away from a frontal plane 1406 in the location of the first curve 1430. The paddle frame 1400 curves away from the outward direction of the first curve 1430 at a second curve 1432 to form sides of the frame 1400. The paddle frame continues to slope away from the frontal plane 1406 in the location of the second curve 1432. In some embodiments, the second curve 1432 has a larger radius than the first curve 1430. The paddle frame 1400 curves away from the frontal plane 1406 at a third curve 1434 as the paddle frame 1400 continues to curve in the arc of the second curve 1432 when viewed from the frontal plane 1406. This curvature at the third curve 1434 results in a gradual departure of the frame 1400, and thus the native valve leaflet from the centerline 1406. This departure from the centerline results in spreading of the leaflet tissue toward the valve annulus, which can result in less stress on the leaflet tissue. The paddle frame 1400 curves toward the lateral plane 1404 at a fourth curve 1436 as the frame 1400 continues to curve away from the frontal plane 1406. The rounded three-dimensional shape of the paddle frame 1400 is closed with a fifth curve 1438 that joins both sides of the paddle frame 1400. As can be seen in Figures 116 and 118, the paddle frame 1400 has an arcuate or generally arcuate shape as the frame 1400 extends away from the attachment portion 1420 and to the closed portion 1424. The middle portion 1424 of the frame is closer to the frontal plane 1406 than the closed portion 1426, giving the sides of the middle portion 1424 a rounded, wing-like shape that engages the curved surface of coaption element (not shown) during grasping of native tissue between a paddle (not shown) and coaption element of an implantable device of the present invention.

[00642] Referring to Figure 191, in an example embodiment, a flat blank 1403 of paddle frame 1400 can be cut, for example laser cut, from a flat sheet of material. Referring to Figure 192, the cut blank 1403 can then be bent to form the three-dimensional shaped paddle frame 1400.

[00643] Referring to Figures 193 and 194, in one example embodiment, the paddle frames 1400 can be shape-set to provide increased clamping force against or toward the coaption element 510 when the paddles 520, 522 are in the closed configuration. This is because the paddle frames are shape-set relative to the closed position (e.g. Figure 194) to a first position (e.g., Figure 193) which is beyond the position where the inner paddle 522 would engage the coaption element, such as beyond the central plane 552 of the device 500, such as beyond the opposite side of the coaption element, such as beyond the outer paddle on the opposite side of the coaption element. Referring to Figure 194, the paddle frame 1400 is flexed and attached to the inner and outer paddles 522, 520, for example by stitching. This results in the paddle frames having a preload (i.e., the clamping force against or toward the coaption element is greater than zero) when the paddle frames 1400 are in the closed configuration. Thus, shape-setting the paddle frames 1400 in the Figure 193 configuration can increase the clamping force of the paddle frames 1400 compared to paddle frames that are shape-set in the closed configuration (Figure 194).

[00644] The magnitude of the preload of the paddle frames 1400 can be altered by adjusting the degree to which the paddle frames 1400 are shape-set relative to the coaption element 510. The farther the paddle frames 1400 are shape-set past the closed position, the greater the preload.

[00645] The curves of the paddle frame 1400 can be independent from one another, that is, one curve is complete before another curve starts, or can be combined, that is, the paddle frame 1400 curves in multiple directions simultaneously.

[00646] Referring now to Figures 112A, 114A, 115A, 116A, 117A, and 118A, example paddle frames 1400A for an implantable prosthetic device are shown. The paddle frames 1400A can be used with any of the implantable prosthetic devices described in the present application. Each paddle frame 1400A is formed from a piece of material 1402A, such as nitinol, or any other suitable material. Each paddle frame 1400A extends from a cap attachment portion 1410A to a paddle connection portion 1420A and has a proximal portion 1422A, a middle portion 1424A, and a distal portion 1426A.

[00647] Each paddle frame 1400A extends from a first attachment portion 1412A in a rounded, three-dimensional shape through the proximal, middle, and distal portions 1422, 1424, 1426 and returns to a second attachment portion 1414. To form a rounded three-dimensional shape, each paddle frame 1400A is bent or curved in multiple locations as the paddle frame 1400A extends between the first and second attachment portions 1412A, 1414A. The attachment portions 1412A, 1414A include notches 1416A, 1418A respectively for attachment to the cap. The paddle frames 1400A flex at the

area 1419A. The area 1419A can include a wider portion 1417A to distribute the stress that results from flexing the paddle frame 1400A over a greater area. Also, notches 1416A, 1418A can include radiused notches 1415A at each end of the notches 1416A, 1418A. The radiused notches 1415A serve as strain reliefs for the bending area 1419A and the area where the paddle frame 1400A connects to the cap.

[00648] Each paddle frame 1400A curves away from a median or central plane 1404A (Figure 116A) at a first curve 1430A to widen the shape of the paddle frame 1400A. As can be seen in Figure 114A, the paddle frame 1400A also curves away from a frontal plane 1406A in the location of the first curve 1430A. The paddle frame 1400A curves away from the outward direction of the first curve 1430A at a second curve 1432A to form sides 1433A of the frame 1400A that are parallel or substantially parallel to the central plane 1404A when viewed from the frontal plane 1406A. The paddle frame continues to slope away from the frontal plane 1406A in the location of the second curve 1432A. In some embodiments, the second curve 1432A has a larger radius than the first curve 1430A. The paddle frame 1400A curves back toward the frontal plane 1406A at a third curve 1434A in the middle portion 1424A while the sides 1433A of the paddle frame 1400A remain parallel or substantially parallel to the central plane 1404A. The paddle frame 1400A curves away from the central plane 1404A a second time at a fourth curve 1436A and continues to curve away from the central plane 1404A through the remainder of the middle and distal portions 1424A, 1426A. The rounded three-dimensional shape of the paddle frame 1400A is closed by an end portion 1442A connected to the sides 1433A by fifth curves 1438A that form rounded corners of the distal end 1426A of the paddle frame 1400A.

[00649] The end portion 1442A can be wider than the remainder of the paddle frame 1400A to accommodate features that allow the paddle frames 1400A to be attached to the paddles (not shown) and cover (not shown). For example, the end portion 1442A can include a slot 1444A for receiving a portion of a strip of material, such as the strip of material 401A, 501A described above. An opening 1446A in the end portion 1442A allows a strip of material to be inserted into the slot 1444A. The end portion 1442A can also include attachment holes 1440A for securing a cover (see Figure 30A) to the paddle frame 1400A.

[00650] As can be seen in Figures 116A and 117A, the paddle frame 1400A has a generally rounded rectangle shape as the frame extends away from the attachment portion 1410A to the closed end of the paddle connection portion 1420A. The middle portion 1424A of the frame is closer to the frontal plane 1406A than the distal portion 1426A, giving the sides of the middle portion 1424A a rounded, wing-like shape that engages the front and back surfaces of the coaption element (not shown) during grasping of native tissue between a paddle (not shown) and coaption element of an implantable device described herein.

[00651] Referring to Figures 195 and 196, the paddle frames 1400A are shown assembled to the cap 514A of an example implantable device, such as the device 500A described above. In one example embodiment, the paddle frames 1400A can be shape-set to provide increased clamping force against or toward a coaption element 510A when the paddles 520A, 522A are in the closed configuration. This is because the paddle frames 1400A are shape-set relative to the closed position (e.g., Figure 196) to a first position (e.g., Figure 195) which is beyond the position where the inner paddle 522A would engage the coaption element 510A, such as beyond the central plane 552A of the device 500A (e.g., Figure 70A), such as beyond the opposite side of the coaption element, such as beyond the outer paddle on the opposite side of the coaption element. In the first position the sides 1433A of the paddle frames 1400A are intertwined in that the sides 1433A of one paddle frame 1400A are moved slightly laterally to allow movement past the sides 1433A of the other paddle frame 1400A until the end portions 1442A of each frame 1400A contact each other and the sides 1433A and prevent further movement.

[00652] The magnitude of the preload of the paddle frames 1400A can be altered by adjusting the degree to which the paddle frames 1400A are shape-set relative to the coaption element 510A. The farther the paddle frames 1400A are shape-set past the closed position, the greater the preload force when the paddle frames 1400A are moved into the open position.

[00653] The curves of the paddle frame 1400A can be independent from one another, that is, one curve is complete before another curve starts, or can be combined, that is, the paddle frame 1400A curves in multiple directions simultaneously.

[00654] Like the paddle frame 1400 shown in Figures 191 and 192, in an example embodiment, the paddle frame 1400A can be formed from a flat blank that is cut from a flat sheet of material, for example, by laser cutting. The cut blank can then be bent to form the three-dimensional shape of the paddle frame 1400A.

[00655] Referring now to Figures 119–120, the paddle frame 1400 is shown in an expanded condition (Figure 119) and a compressed condition (Figure 120). The paddle frame 1400 is in a compressed condition when the paddles are disposed in a delivery device 1450. Referring to Figure 119, the paddle frame 1400 is moved from the expanded condition to the compressed condition by compressing the paddle in the direction X and extending a length of the paddle in the direction Y. When the paddles 1400 are in the compressed condition, the paddles have a width H. The width H can be, for example between about 4 mm and about 7 mm, such as, between about 5 mm and about 6 mm. In alternative embodiments, the width H can be less than 4 mm or more than 7 mm. In certain embodiments, the width H of the compressed paddles 1400 is equal or substantially equal to a width D of the delivery opening 1452 of the delivery device 1450. The ratio between the width W of the paddles in the expanded condition and the width H of the paddles in the compressed condition can be, for example,

about 4 to 1 or less, such as about 3 to 1 or less, such as about 2 to 1 or less, such as about 1.5 to 1, such as about 1.25 to 1, such as about 1 to 1. In alternative embodiments, the ratio between the width W and the width H can be more than 4 to 1. Figure 120 illustrates the connection portions 1410 compressed from the positions illustrated by Figure 119. However, in some example embodiments, the connection portions 1410 will not be compressed. For example, the connection portions 1410 will not be compressed when the connection portions 1410 are connected to a cap 514. The paddle frame 1400A shown in Figures 112A and 114A–118A can be similarly compressed.

[00656] Referring now to Figures 121–124, the example implantable device 500 is shown in open and closed conditions with paddle frames that are compressed or stretched as the anchor portion 506 of the device is opened and closed. The paddle frames 1524 are like the paddle frame 1400 described above. Referring now to Figure 121, the anchor portion 506 is shown in a closed condition. Referring now to Figure 122, the paddle frames 1524 have a first width W1 and a first length L1. Referring now to Figure 123, the anchor portion 506 is shown in an open condition and the paddle frames 1524 are in an extended condition (Figure 124). Opening the anchor portion 506 of the device 500 causes the paddle frames 1524 to move, extend, or pivot outward from the coaption portion 510 and transition to the extended condition. In the extended condition, the paddle frames 1524 have a second or extended length L2 and a second or extended width W2. In the extended condition, the paddle frame 1524 lengthens and narrows such that the second length L2 is greater than the first length L1 and the second width W2 is narrower than the first width W1. One advantage of this embodiment is that the paddle frames become narrower and can have less chordal engagement during grasping of the leaflets. However, the paddle frames become wide when the implant is closed to enhance support of the leaflet. Another advantage of this embodiment is that the paddle frames also become narrower and longer in the bailout position. The narrower paddle size in the extended, elongated, or bailout position can allow for less chordal entanglement and increased ease of bailout.

[00657] Referring now to Figures 125–128, the example implantable device 500 is shown in open and closed conditions with paddle frames that are compressed or stretched as the anchor portion 506 of the device is opened and closed. The paddle frames 1624 are similar to the paddle frame 1400 described above. Referring now to Figure 125, the anchor portion 506 is shown in a closed condition. Referring now to Figure 126, the paddle frames 1624 have a first width W1 and a first length L1. Referring now to Figure 127, the anchor portion 506 is shown in an open condition and the paddle frames 1624 are in a compressed condition (Figure 128). Opening the anchor portion 506 of the device 500 causes the paddle frames 1624 to move, extend, or pivot outward from the coaption portion 510 and transition to the compressed condition. In the compressed condition, the paddle frames 1624 have a second or compressed length L2 and a second or compressed width W2. In the compressed condition, the paddle

frame 1624 shortens and widens such that the second length L2 is less than the first length L1 and the second width W2 is wider than the first width W1.

[00658] Referring now to Figures 129–136, example implantable prosthetic devices are shown that can be locked or fastened closed. Referring now to Figure 129, the example implantable prosthetic device 500 is shown that can be locked or retained in a closed condition with magnets. As described above, the device 500 includes a coaption element 510 and paddles 520. The paddles 520 open and close to grasp leaflets 20, 22 of the native heart valve, as described in more detail above. The coaption element 510 includes one or more magnets 1700 and the paddles 520 include one or more magnets 1702. The magnets 1700, 1702 have opposite poles facing each other such that the magnets 1702 in the paddles 520 are attracted to the magnets 1700 in the coaption element 510 and the magnetic attractive forces between the magnets 1700, 1702 retain the paddles 520 in a closed condition. In certain embodiments, the magnets 1700, 1702 are programmed or polymagnets with patterns of polarity such that the implantable device 500 can be locked and unlocked by moving—such as rotating—the magnet 1700 within the coaption element. For example, the magnet 1700 can be configured such that the magnet 1700 attracts the magnets 1702 in the paddles 520 in a first orientation and repels the magnets 1702 in the paddles 520 when the magnet 1700 is rotated 90 degrees into a second orientation.

[00659] Referring now to Figures 130–131, the example implantable prosthetic device 500 is shown that can be locked or retained in a closed condition with an elastic band 1800. The elastic band 1800 can be made from any flexible material and have any configuration. For example, the elastic band can comprise coiled nitinol, can have a stent like structure, etc.

[00660] As described above, the device 500 includes a coaption element 510, paddles 520, and barbed clasps 530. The paddles 520 and barbed clasps 530 open and close to grasp leaflets 20, 22 of the native heart valve, as described in more detail above. The paddles 520 move between an open condition (Figure 130) to a closed condition (Figure 131) by actuation of an actuation element or means for actuation 512, as described above. The elastic band 1800 can be arranged to lock or retain the device 500 in a closed condition. When the device 500 is in the open condition (Figure 130) the band 1800 is arranged around the paddles 520 in a relaxed or disengaged condition. For example, the band 1800 can be arranged around a narrower portion of the open device 500, such as a tapered portion of the paddles 520 near a distal portion 507 of the device. When the device 500 is in the closed condition (Figure 131) the band 1800 is arranged around the paddles 520 in an engaged condition. In certain embodiments, when the band 1800 is in the engaged condition it is arranged around the widest portion of the device 500 or can be arranged around the center of the device 500.

[00661] The band 1800 is moved from the disengaged condition in a closing or engaging direction 1802 to the engaged condition with sutures (not shown) or other suitable means of moving the band 1800.

Movement of the band 1800 can cause the paddles 520 to move in a closing direction 1804, thereby closing and securing the device 500 in a single movement of the band 1800. Alternatively, device 500 can be closed and the band 1800 moved into the engaged location to secure the device 500 in the closed condition.

[00662] Referring now to Figure 132, the example implantable prosthetic device 500 is shown that can be locked or retained in a closed condition with a biasing member 1900. As described above, the device 500 includes a coaption element 510, paddles 520, and barbed clasps 530. The paddles 520 are moved between open and closed positions with an actuation element 512 extending through the coaption element 510 to a cap 514. The paddles 520 and barbed clasps 530 are opened and closed to grasp leaflets 20, 22 of the native heart valve, as described in more detail above. In the closed condition, the paddles 520 and the clasps 530 engage the tissue of valve leaflets 20, 22 and each other to secure the device 500 to the valve tissue.

[00663] The biasing member 1900 (e.g., a spring) is configured to bias the cap 514 toward the coaption element 510, thereby biasing the device 500 toward the closed condition. After the device 500 is delivered to and attached to the valve tissue with a delivery device (not shown), the delivery device is removed from the patient's body and the biasing member 1900 maintains the device 500 in a closed condition to prevent detachment of the device 500 from the valve tissue.

[00664] Referring now to Figures 133–134, an example implantable prosthetic device 2000 is shown that can be locked or retained in a closed condition with latches. The device 2000 can include any other features for an implantable prosthetic device discussed in the present application, and the device 2000 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00665] The device 2000 is similar to other implantable devices described above and includes paddles 2002 and gripping members or clasps 2004. The paddles 2002 are opened and closed to grasp the native leaflets 20, 22 in a gap 2006 between the paddles 2002 and gripping members 2004. The device 2000 also includes a latch member 2008 attached to the paddles 2002, in which the latch member 2008 is configured to attach the paddles 2002 to the gripping members 2004 when the device 2000 is in the closed position. In some embodiments, the latch member 2008 serves as a secondary latching mechanism and is configured to keep the device 2000 in the closed position when other mechanisms fail.

[00666] Referring to Figure 133, the device 2000 is in an open position with valve tissue 20, 22 disposed in the gap or opening 2006 between the paddles 2002 and the gripping members 2004. Referring to Figure 134, the device 2000 is moved to the closed position such that the valve tissue 20, 22 is secured between the paddles 2002 and the gripping members 2004. The device 2000 can be moved to the closed

position by any suitable manner, such as, for example, any manner described in the present application. When the device 2000 is moved to the closed position, the latch member 2008 punctures the valve tissue 20, 22 and is inserted into or through the gripping member 2004 to secure the paddle 2002 to the gripping member 2004. The latch member 2008 can take any suitable form that can secure the paddles 2002 to the gripping members 2004, such as, for example, metals, plastics, etc.

[00667] Referring now to Figures 135–136, the example implantable prosthetic device 2000 is shown that can be locked or retained in a closed condition with latches. In Figures 135–136, the device 2000 includes a coaption element 2010. Referring to Figure 135, the device 2000 is in an open position with valve tissue 20, 22 disposed in the gap or opening 2006 between the paddles 2002 and the gripping members 2004. Referring to Figure 136, the device 2000 is moved to the closed position such that the valve tissue 20, 22 is secured between the paddles 2002 and the gripping members 2004. The device 2000 can be moved to the closed position by any suitable manner, such as, for example, any manner described in the present application. When the device 2000 is moved to the closed position, the latch member 2008 punctures the valve tissue 20, 22 and is inserted into or through the gripping member 2004 to secure the paddle 2002 to the gripping member 2004. In the illustrated embodiment, the latch member 2008 protrudes beyond the gripping members 2004 and into the coaption element 2010. In some embodiments, the latch member 2008 can be secured in the coaption element 2010 by latching onto a portion of the coaption element 2010 or by penetrating the coaption element 2010 material. The latch member 2008 can take any suitable form that can secure the paddles 2002 to the gripping members 2004, such as, for example, metals, plastics, etc.

[00668] Referring now to Figures 137–145, various embodiments of implantable prosthetic devices and methods of using the same are shown that facilitate release of native tissue grasped by the implantable prosthetic devices. The devices can include any other features for an implantable prosthetic device discussed in the present application, and the devices can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00669] Referring now to Figure 137, a device 2100 with stretchable clasps or gripping members is shown. The device 2100 is delivered from a delivery sheath 2102 and has a coaption element 2110, paddles 2120, and clasps or gripping members 2130. The gripping members 2130 include barbs 2132 and stretchable portions 2134. The stretchable portions 2134 allow the clasps 2130 to be stretched in a stretching direction 2136. Actuation lines or actuation sutures 2104 extend from the delivery sheath 2102 to the clasps 2130. Retracting the lines/sutures 2104 in a retraction direction 2106 opens and stretches the clasps 2130 to a fully extended position. In certain embodiments, the clasps 2130 primarily stretch once the clasps 2130 are in the fully open position. Movement of the barbs 2132 in

the stretching direction 2136 allows for clean disengagement from the native tissue. In some embodiments, the stretchable portion 2134 is configured to be moved such that the barbs 2132 exit the valve tissue in a direction opposite or substantially opposite the direction in which the barbs entered the native tissue. Alternatively, the clasps 2130 can be otherwise extendable to allow for disengagement from the native tissue without tearing the native tissue. For example, joint portions 2131 can be configured to allow the barbs 2132 of the clasps 2130 to be pulled in the direction 2136.

[00670] Referring now to Figures 138–143, two example embodiments of methods of releasing valve tissue from the prosthetic device 500 are shown. As described above, the device 500 includes a coaption element 510, inner paddles 522, outer paddles 520, and barbed clasps 530. The device 500 is deployed from a delivery sheath 502. An actuation element 512 extends through the coaption element 510 to a cap 514. Actuation of the actuation element 512 opens and closes the paddles 520, 522 to open and close the device. The barbed clasps 530 include barbs 536, moveable arms 534, and stationary arms 532. The stationary arms 532 are attached to the inner paddles 522 so that the clasps 530 move with the movement of the inner paddles 522. Clasp control members or actuation lines/sutures 537 extend from the delivery sheath 502 to the moveable arms 534 of the clasps 530.

[00671] Figures 138–141 illustrate an example method of releasing grasped valve tissue. In the example illustrated by Figures 138-141, the device is shown in an open or substantially open position to more clearly illustrate the movements of the parts of the device 500 that are involved with tissue release. However, in practice the tissue release method is more likely to be practiced with the device 500 in the more closed positions illustrated by Figures 142 and 143. That is, it is not likely that the paddles and clasps will be substantially opened before moving the clasps to release the valve tissue as illustrated by Figures 138-141. It is more likely that the paddles and clasps will only be opened slightly before releasing the valve tissue as illustrated by Figures 142 and 143. The same parts that move in the example illustrated by Figures 138-141 move in the example illustrated by Figures 142-143.

[00672] Referring now to Figure 138, the device 500 is shown in an open or substantially open position with the clasps 530 in a closed position. Retraction of the clasp control members or actuation lines/sutures 537 articulates, flexes, or pivots the moveable arms 534 of the clasps 530 to a partially open position (Figure 139) and then to a fully open position (Figure 140). Referring now to Figure 141, once the clasps 530 are in the fully open position (Figure 140), further retraction of the actuation lines/sutures 537 in the retraction direction 560 pulls upward on the moveable arms 534, barbs 536, and inner paddles 522 in a tissue release direction. The portion 523 of the inner paddles 522 closest to the coaption element flex upward in direction 562 to allow this movement in the retraction direction 560. There can optionally be a small gap G140 between the clasp 530 and the coaption element 510. The inner paddles can flex at the small gap (if there is a small gap) or at the connection 523 between

the coaption element 510 and the inner paddles if there is not a gap. This flexing movement 562 of the inner paddles 522 can optionally also cause the outer paddles to move or pivot downward. Movement of the barbs 536 in the tissue release direction 560 allows for clean disengagement from the native tissue. The barbs can be at an angle θ (see Figure 138) to the moveable arms 534 that facilitates release from the tissue. For example, the angle θ can be between 10 and 60 degrees, such as 20 and 50 degrees, such as 25 and 45 degrees, such as about 30 degrees, or 30 degrees.

[00673] Referring now to Figures 142–143, the device 500 is shown in a slightly opened position or a closed position. As mentioned above, the same parts of the device 500 move in the example illustrated by Figures 142 and 143 as in the example illustrated by Figures 138–141. In the partially open position or closed position, further retraction of the actuation lines/sutures 537 in the retraction direction 560 pulls upward on the moveable arms 534, barbs 536, and inner paddles 522. The portion of the inner paddles 522 closest to the coaption element flexes or is lifted-up in the direction 562 to allow the movement. As mentioned above, there can optionally be a small gap G140 between the clasps 530 and the coaption element 510. The inner paddles can flex 562 at the small gap (if there is a small gap) or at the connection between the coaption element 510 and the inner paddles if there is not a gap. The movement of the barbs 536 in the direction 560 releases the valve tissue from the barbs. The lifting on the inner paddles 522 can optionally also force the outer paddles 520 to move outward in an opening direction 564. The optional outward movement 564 of the outer paddles 520 relieves the pinching force applied to grasped tissue by the paddles and the coaption element. Relieving the pinching force on the tissue can also assist in the release of the tissue from the barbs. In one example embodiment, the device 500 is moved from the position illustrated by Figure 143 to the position illustrated by Figure 140 or 141 to fully disengage the device from the native valve.

[00674] Figures 144–152 show an example delivery assembly 2200 and its components. Referring to Figure 144, the delivery assembly 2200 can comprise the implantable prosthetic spacer device 500 (or any other implantable device described in the present application) and a delivery apparatus 2202. The delivery apparatus 2202 can comprise a plurality of catheters and catheter stabilizers. For example, in the illustrated embodiment, the delivery apparatus 2202 includes a first catheter 2204, a second catheter 2206, a third catheter 2208, and catheter stabilizers 2210. The second catheter 2206 extends coaxially through the first catheter 2204, and the third catheter 2208 extends coaxially through the first and second catheters 2204, 2206. The prosthetic spacer device 500 can be releasably coupled to a distal end portion of the third catheter 2208 of the delivery apparatus 2202, as further described below.

[00675] In the illustrated embodiment, the delivery assembly 2200 is configured, for example, for implanting the prosthetic spacer device 500 in a native valve via a transvascular approach (e.g., the native mitral valve MV via a transseptal delivery approach, etc.). In other embodiments, the delivery

assembly 2200 can be configured for implanting the prosthetic spacer device 500 in aortic, tricuspid, or pulmonary valve regions of a human heart. Also, the delivery assembly 2200 can be configured for various delivery methods, including transseptal, transaortic, transventricular, etc.

[00676] Referring to Figure 146, the first collar or cap 514 of the prosthetic spacer device 500 can include a bore 516A. In some embodiments, the bore 516A can comprise internal threads configured to releasably engage corresponding external threads on a distal end 512B of the actuation element or means of actuating 512 of the delivery apparatus 2202, as shown in Figure 145.

[00677] Referring again to Figure 146, the second or proximal collar 511 of the prosthetic spacer device 500 can include a central opening 511C that is axially aligned with the bore 516A of the cap 514. The central opening 511C of the proximal collar 511 can be configured to slidably receive the actuation element, actuation shaft, or means of actuating 512 of the delivery apparatus 2202, as shown in Figure 145. In some embodiments, the proximal collar 511 and/or the coaption element 510 can have a sealing member (not shown, but see, e.g., the sealing member 413 shown in Figure 23) configured to seal the central opening 511C when the actuation element or means of actuating 512 is withdrawn from the central opening 511C.

[00678] As shown in Figure 146, the proximal collar 511 can also include a plurality of engagement portions or projections 511A and a plurality of guide openings 511B. The projections 511A can extend radially outwardly and can be circumferentially offset (e.g., by about 90 degrees) relative to the guide openings 511B. The guide openings 511B can be disposed radially outwardly from the central opening 511C. The projections 511A and the guide openings 511B of the proximal collar 511 can be configured to releasably engage a coupler or means for coupling 2214 of the delivery apparatus 2202, as shown in Figure 145.

[00679] Referring again to Figure 144 and as mentioned above, the delivery apparatus 2202 can include the first and second catheters 2204, 2206. The first and second catheters 2204, 2206 can be used, for example, to access an implantation location (e.g., a native mitral valve or tricuspid valve region of a heart) and/or to position the third catheter 2208 at the implantation location.

[00680] The first and second catheters 2204, 2206 can comprise first and second sheaths 2216, 2218, respectively. The catheters 2204, 2206 can be configured such that the sheaths 2216, 2218 are steerable. Additional details regarding the first catheter 2204 can be found, for example, in U.S. Published Patent Application No. 2016/0155987, which is incorporated by reference herein in its entirety. Additional details regarding the second catheter 2206 can be found, for example, in U.S. Provisional Patent Application No. 62/418,528, which is incorporated by reference herein in its entirety.

[00681] Referring still to Figure 144, delivery apparatus 2202 can also include the third catheter 2208, as mentioned above. The third catheter 2208 can be used, for example, to deliver, manipulate, position, and/or deploy the prosthetic spacer device 500 at the implantation location.

[00682] Referring to Figure 148, the third catheter 2208 can comprise the actuation element or inner shaft 512, the coupler or means for coupling 2214, an outer shaft 2220, a handle 2222 (shown schematically), and clasp control members or actuation lines 537. A proximal end portion 2220a of the outer shaft 2220 can be coupled to and extend distally from the handle 2222, and a distal end portion 2220b of the outer shaft 2220 can be coupled to the coupler or means for coupling 2214. A proximal end portion of the actuation element or means of actuating 512 can be coupled to an actuation knob 2226. The actuation element or means of actuating 512 can extend distally from the knob 2226 (shown schematically), through the handle 2222, through the outer shaft 2220, and through the coupler or means for coupling 2214. The actuation element or means of actuating 512 can be moveable (e.g., axially and/or rotationally) relative to the outer shaft 2220 and the handle 2222. The clasp control members or actuation lines 537 can extend through and be axially movable relative to the handle 2222 and the outer shaft 2220. The clasp control members/actuation lines 537 can also be axially movable relative to the actuation element or means of actuating 512.

[00683] As shown in Figures 145–146, the actuation element or means of actuating 512 (e.g., actuation shaft, etc.) of the third catheter 2208 can be releasably coupled to the cap 514 of the prosthetic spacer device 500. For example, in some embodiments, the distal end portion 512B of the actuation element or means of actuating 512 can comprise external thread configured to releasably engage the interior threads of the bore 516A of the prosthetic spacer device 500. As such, rotating the actuation element or means of actuating 512 in a first direction (e.g., clockwise) relative to the cap 514 of the prosthetic spacer device 500 releasably secures the actuation element or means of actuating 512 to the cap 514. Rotating the actuation element or means of actuating 512 in a second direction (e.g., counterclockwise) relative to the cap 514 of the prosthetic spacer device 500 releases the actuation element or means of actuating 512 from the cap 514.

[00684] Referring now to Figures 145–147, the coupler or means for coupling 2214 of the third catheter 2208 can be releasably coupled to the proximal collar 511 of the prosthetic spacer device 500. For example, in some embodiments, the coupler or means for coupling 2214 can comprise a plurality of flexible arms 2228 and a plurality of stabilizer members 2230. The flexible arms 2228 can comprise apertures 2232, ports 2233 (Figure 146), and eyelets 2234 (Figure 147). The flexible arms 2228 can be configured to move or pivot between a first or release configuration (Figure 146) and a second or coupled configuration (Figures 145 and 147). In the first configuration, the flexible arms 2228 extend radially outwardly relative to the stabilizer members 2230. In the second configuration, the flexible

arms 2230 extend axially parallel to the stabilizer members 2230 and the eyelets 2234 radially overlap 2228, as shown in Figure 147. The flexible arms 2228 can be configured (e.g., shape-set) to be biased to the first configuration.

[00685] The prosthetic spacer device 500 can be releasably coupled to the coupler or means for coupling 2214 by inserting the stabilizer members 2230 of the coupler or means for coupling 2214 into the guide openings 511B of the prosthetic spacer device 500. The flexible arms 2228 of the coupler or means for coupling 2214 can then be moved or pivoted radially inwardly from the first configuration to the second configuration such that the projections 511A of the prosthetic spacer device 500 extend radially into the apertures 2232 of the flexible arms 2228. The flexible arms 2228 can be retained in the second configuration by inserting the distal end portion 512B of the actuation element or means of actuating 512 (e.g., actuation shaft, etc.) through openings 2236 of the eyelets 2234, which prevents the flexible arms 2228 from moving or pivoting radially outwardly from the second configuration to the first configuration, thereby releasably coupling the prosthetic spacer device 500 to the coupler or means for coupling 2214.

[00686] The prosthetic spacer device 500 can be released from the coupler or means for coupling 2214 by proximally retracting the actuation element or means of actuating 512 relative to the coupler or means for coupling 2214 such that the distal end portion 512B of the actuation element or means of actuating 512 withdraws from the openings 2236 of the eyelets 2234. This allows the flexible arms 2228 to move or pivot radially outwardly from the second configuration to the first configuration, which withdraws the projections 511A of the prosthetic spacer device 500 from the apertures 2232 of the flexible arms 2228. The stabilizer members 2230 can remain inserted into the guide openings 511B of the prosthetic spacer device 500 during and after the flexible arms 2228 are released. This can, for example, prevent the prosthetic spacer device 500 from moving (e.g., shifting and/or rocking) while the flexible arms 2228 are released. The stabilizer members 2230 can then be withdrawn from the guide openings 511B of the prosthetic spacer device 500 by proximally retracting the coupler or means for coupling 2214 relative to the prosthetic spacer device 500, thereby releasing the prosthetic spacer device 500 from the coupler or means for coupling 2214.

[00687] Referring to Figure 148, the outer shaft 2220 of the third catheter 2208 can be an elongate shaft extending axially between the proximal end portion 2220a, which is coupled to the handle 2222, and the distal end portion 2220b, which is coupled to the coupler or means for coupling 2214. The outer shaft 2220 can also include an intermediate portion 2220c disposed between the proximal and distal end portions 2220a, 2220b.

[00688] Referring to Figure 149, the outer shaft 2220 can comprise a plurality of axially extending lumens, including an actuation element lumen or means of actuating lumen 2238 and a plurality of

control member lumens 2240 (e.g., four in the illustrated embodiment). In some embodiments, the outer shaft 2220 can comprise more (e.g., six) or less (e.g., two) than four control member lumens 2240.

[00689] The actuation element lumen or means of actuating lumen 2238 can be configured to receive the actuation element or means of actuating 512, and the control member lumens 2240 can be configured to receive one or more clasp control members or actuation lines 537. The lumens 2238, 2240 can also be configured such that the actuation element or means of actuating 512 and clasp control members/lines 537 can be movable axially and/or rotationally relative to the respective lumens 2238, 2240. In particular embodiments, the lumens 2238, 2240 can comprise a liner or coating configured to reduce friction within the lumens 2238, 2240. For example, the lumens 2238, 2240 can comprise a liner comprising PTFE.

[00690] Referring still to Figures 148–149, the outer shaft 2220 can be formed from various materials, including metals and polymers. For example, in one particular embodiment, the proximal end portion 2220a can comprise stainless steel and the distal and intermediate portions 2220b, 2220c can comprise PEBAX (e.g., PEBAX®). The outer shaft 2220 can also comprise an outer covering or coating, such as a polymer that is reflowed over the portions 2220a, 2220b, and 2220c.

[00691] The outer shaft 2220 can include one or more coil portions 2242 disposed radially outwardly from the lumens 2238, 2240. For example, in one particular embodiment, the outer shaft 2220 can comprise a first coil 2242a, a second coil 2242b, and a third coil 2242c. The first coil 2242a can be the radially outermost coil, the third coil 2242c can be the radially innermost coil, and the second coil 2242b can be radially disposed between the first coil 2242a and the third coil 2242c.

[00692] The coil portions 2242 can comprise various materials and/or configurations. For example, the coil portions 2242 can be formed from stainless steel. In one particular embodiment, the first and third coils 2242a, 2242c comprise stainless steel coils wound in a left-hand configuration, and the second coil 2242b comprises a stainless-steel coil wound in a right-hand configuration.

[00693] The coil portions 2242 can also comprise various pitches. The pitch of one or more of the coils 2242 can be the same or different than the pitch of one or more other coils 2242. In one particular embodiment, the first and second coils 2242a, 2242b can have a first pitch (e.g., 0.74 in.), and the third coil can comprise a second pitch (e.g., 0.14 in.).

[00694] The outer shaft 2220 can also comprise a tie layer 2244 disposed radially inwardly from the third coil 2242c. The tie layer 2244 can be formed of various materials including polymers, such as PEBAX (e.g., PEBAX®).

[00695] As shown in Figures 150–152, the handle 2222 of the third catheter 2208 can include a housing 2246, an actuation lock mechanism 2248, a clasp control mechanism 2250, and a flushing mechanism

2252. Referring to Figure 150, a distal end portion of the housing 2246 can be coupled to the proximal end portion 2220a of the outer shaft 2220. The actuation lock mechanism 2248, the clasp control mechanism 2250, and a flushing mechanism 2252 can be coupled to a proximal end of the housing 2246. The actuation lock mechanism 2248 can be configured to selectively lock the position of the actuation element or means of actuating 512 relative to the housing 2246 and the outer shaft 2220. The clasp control mechanism 2250 can also be coupled to proximal end portions of the clasp control members or actuation lines 537 and can be configured to secure the clasp control members 537 relative to the handle 2222 and to move the clasp control members 537 relative to the outer shaft 2220 and the actuation element or means of actuating 512. The flushing mechanism 2252 can be configured for flushing (e.g., with a saline solution) the outer shaft 2220 prior to inserting the outer shaft 2220 into a patient's vasculature.

[00696] As shown in Figures 151–152, the housing 2246 of the handle 2222 can comprise a main body 2254 and a nose portion 2256 coupled to a distal end portion of the main body 2254. The main body 2254 and the nose portion 2256 can be coupled together in various manners, including fasteners 2258 and/or pins 2260 (e.g., as shown in the illustrated embodiment), adhesive, and/or other coupling means. The housing 2246 can be formed from various materials, including polymers (e.g., polycarbonate).

[00697] The main body 2254 of the housing 2246 can comprise a plurality of lumens, including an actuation element lumen or means of actuating lumen 2262 (e.g., an actuation shaft lumen, actuation tube, etc.), control member lumens 2264 (Figure 152), and a flushing lumen 2266 that connects with the actuation element lumen or means of actuating lumen 2262 (Figure 151). As shown in Figure 152, the main body 2254 can also include a plurality of tubes (e.g., hypotubes), including an actuation tube 2268 and control member tubes 2270 that are disposed at least partially in the actuation element lumen or means of actuating lumen 2262 and the control member lumens 2264, respectively. The tubes 2268, 2270 can be axially movable (e.g., slidable) relative to the lumens 2262, 2264, respectively.

[00698] The proximal end of the actuation tube or lumen 2268 can extend proximally from the main body and can be coupled to the knob 2226 and to the proximal end portion of the actuation element or means of actuating 512. The proximal ends of the control member tubes 2270 can extend proximally from the main body 2254 and can be coupled to the clasp control mechanism 2250 and the clasp control members 537.

[00699] The distal ends of the tubes 2268, 2270 can comprise flanges 2272, 2274 configured to engage a stopper to limit the axial movement of the tubes 2268, 2270 relative to the housing 2246. For example, the flanges 2272, 2274 can be configured to contact respective surfaces of the main body 2254 (e.g., a lip) to prevent tubes 2268, 2270 from withdrawing completely from the proximal ends of the lumens 2262, 2264, respectively.

[00700] The actuation tube or lumen 2268 can be configured to receive and be coupled to the proximal end portion of the actuation element or means of actuating 512. The control member tubes 2270 can be configured to receive portions of the clasp control mechanism 2250, as further described below. The tubes 2268, 2270 can be formed from various materials, including polymers and metals (e.g., stainless steel).

[00701] In some embodiments, the main body 2254 can include a plurality of seal members 2276 (e.g., O-rings) configured to prevent or reduce blood leakage through the lumens and around the shafts and/or tubes. The seal members can be secured relative to the main body 2254, for example, by fasteners 2278 (e.g., hollow-lock or socket-jam set screws).

[00702] As shown in Figure 152, the nose portion 2256 of the housing 2246 can comprise a plurality of lumens, including an actuation element lumen or means of actuating lumen 2280 (e.g., an actuation shaft lumen, etc.), and control member lumens 2282. The actuation element lumen or means of actuating lumen 2280 of the nose portion 2256 can be extend coaxially with the actuation element lumen or means of actuating lumen 2262 of the main body 2254. Proximal ends of the control member lumens 2282 of the nose portion 2256 can be aligned with the control member lumens 2264 of the main body 2254 at the proximal end of the nose portion 2256 (i.e., the lumens 2282, 2264 are in the same plane). The control member lumens 2282 can extend from the proximal ends at an angle (i.e., relative to the control member lumens 2264 of the main body 2254), and distal ends of the control member lumens 2282 can connect with the actuation element lumen or means of actuating lumen 2280 of the nose portion 2256 at a location toward the distal end of the nose portion 2256. In other words, the proximal ends of the lumens 2282 are in a first plane (i.e., the plane of the control member lumens 2264 of the main body 2254), and the distal ends of the lumens 2282 are in a second plane (i.e., the plane of the actuation shaft lumen or means of actuating lumen 2262 of the main body 2254).

[00703] As shown in Figure 151, the actuation element lumen or means of actuating lumen 2280 of the nose portion 2256 can be configured to receive the proximal end portion of the outer shaft 2220. The proximal end portion of the outer shaft 2220 can be coupled to the nose portion 2256 in many ways such as with adhesive, fasteners, frictional fit, and/or other coupling means.

[00704] Referring still to Figure 151, the actuation lock mechanism 2248 of the handle 2222 can be coupled to the proximal end portion of the main body 2254 of the housing 2246 and to the actuation tube 2268. The actuation lock mechanism 2248 can be configured to selectively control relative movement between the actuation tube 2268 and the housing 2246. This, in turn, selectively controls relative movement between the actuation element or means of actuating 512 (which is coupled to the actuation tube 2268) and the outer shaft 2220 (which is coupled to the nose portion 2256 of the housing 2246).

[00705] In some embodiments, the actuation lock mechanism 2248 can comprise a lock configuration, which prevents relative movement between the actuation tube 2268 and the housing 2246, and a release configuration, which allows relative movement between the actuation tube 2268 and the housing 2246. In some embodiments, the actuation lock mechanism 2248 can be configured to include one or more intermediate configurations (i.e., in addition to the lock and release configuration) which allow relative movement between the actuation tube 2268 and the housing 2246, but the force required to cause the relative movement is greater than when the actuation lock mechanism is in the release configuration.

[00706] As shown in Figure 151 of the illustrated embodiment, the actuation lock mechanism 2248 can comprise a lock (e.g., a Tuohy-Borst adapter) 2284 and a coupler (e.g., a female luer coupler) 2286. The coupler 2286 can be attached to the distal end of the lock 2284 and coupled to the proximal end of the main body 2254 of the housing 2246. The actuation tube 2268 can coaxially extend through the lock 2284 and the coupler 2286. As such, rotating a knob 2288 of the lock 2284 in a first direction (e.g., clockwise) can increase the frictional engagement of the lock 2284 on the actuation tube 2268, thus making relative movement between the actuation tube 2268 and the housing 2246 more difficult or preventing it altogether. Rotating a knob 2288 of the lock 2284 in a second direction (e.g., counterclockwise) can decrease the frictional engagement of the lock 2284 on the actuation tube 2268, thus making relative movement between the actuation tube 2268 and the housing 2246 easier.

[00707] In other embodiments, actuation lock mechanism 2248 can comprise other configurations configured for preventing relative movement between the actuation tube 2268 and the housing 2246. For example, the locking mechanism 2248 can include lock configured like a stopcock valve in which a plunger portion of valve selectively engages the actuation tube 2268.

[00708] The clasp control mechanism 2250 can comprise an actuator member 2290 and one or more locking members 2292 (e.g., two in the illustrated embodiment). A distal end portion of the actuator member 2290 can be coupled to the control member tubes 2270, which extend from the proximal end of the main body 2254 of the housing 2246, as best shown in Figure 151. The locking members 2292 can be coupled to a proximal end portion of the actuator member 2290.

[00709] As shown in the illustrated embodiment, the actuator member 2290 can, optionally, comprise a first side portion 2294 and a second side portion 2296 selectively coupled to the first side portion 2294 by a connecting pin 2298. The actuator member 2290 can be configured such that the first and second side portions 2294, 2296 move together when the connecting pin 2298 is inserted through the first and second side portions 2294, 2296. When the connecting pin 2298 is withdrawn, the first and second side portions 2294, 2296 can be moved relative to each other. This can allow the clasp control members or lines 537 (which are releasably coupled to the first and second side portions 2294, 2296 by the locking elements 2292) to be individually actuated.

[00710] The connection between the first and second side portions 2294, 2296 can be configured such that the first and second side portions 2294, 2296 can move axially (i.e., proximally and distally) but not rotationally relative to each other when the connecting pin 2298 is withdrawn. This can be accomplished, for example, by configuring the first side portion 2294 with keyed slot or groove and configuring second side portion 2296 with a keyed projection or tongue that corresponds to the keyed slot or groove of the first side portion 2294. This can, for example, prevent or reduce the likelihood that the clasp control members/lines 537 from twisting relative to the outer shaft 2220.

[00711] The first and second side portions 2294, 2296 can include axially extending lumens 2201. Distal ends of the lumens 2201 can be configured to receive the proximal end portions of the control member tubes 2270. Proximal ends of the lumens 2201 can be configured to receive portions of the locking members 2292.

[00712] The locking members 2292 can be configured to selectively control relative movement between a clasp control member 2224 and the respective first or second side portion 2294, 2296 of the actuator member 2290. The locking members 2292 can comprise a lock configuration, which prevents relative movement between a clasp control member 2224 and the respective first or second side portion 2294, 2296, and a release configuration, which allows relative movement between a clasp control member 2224 and the respective first or second side portion 2294, 2296. In some embodiments, the locking members 2292 can also comprise one or more intermediate configurations (i.e., in addition to the lock and release configuration) which allows relative movement between a clasp control member 2224 and the respective first or second side portion 2294, 2296, but the force required to cause the relative movement is greater than when the locking members 2292 are in the release configuration.

[00713] As shown in the illustrated embodiment, the locking members 2292 can be configured similar to stopcock valves. Thus, rotating knobs 2203 in a first direction (e.g., clockwise) can increase the frictional engagement between the locking members 2292 on the clasp control members/lines 537 and make relative movement between a clasp control member 537 and the respective first or second side portion 2294, 2296 more difficult or prevent it altogether. Rotating knobs 2203 in a second direction (e.g., counterclockwise) can decrease the frictional engagement between the locking members 2292 on the clasp control members 537 and make relative movement between a clasp control member 2224 and the respective first or second side portion 2294, 2296 easier. In other embodiments, actuation locking members 2292 can comprise other configurations configured for preventing relative movement between the locking members 2292 on the clasp control members 537.

[00714] The flushing mechanism 2252 can comprise a flushing tube 2205 and a valve 2207 (e.g., a stopcock valve). A distal end of the flushing tube 2205 can be coupled to and in fluidic communication with the flushing lumen 2266 and thus with the actuation shaft lumen or means of actuating lumen

2262 of the main body 2254. A proximal end of the flushing tube 2205 can be coupled to the valve 2207. In this manner, the flushing mechanism 2252 can be configured for flushing (e.g., with a saline solution) the outer shaft 2220 prior to inserting the outer shaft 2220 into a patient's vasculature.

[00715] The clasp control members 537 or actuation lines can be configured to manipulate the configuration of the clasps 530, as further described below. As shown in Figure 148, each of the clasp control members or lines 537 can be configured as a suture (e.g., wire, thread, etc.) loop. Proximal end portions of the control members 537 can extend proximally from the proximal end portion of the clasp control mechanism 2250 and can be releasably coupled to the locking mechanisms 2292 of the clasp control mechanism 2250.

[00716] From the locking mechanisms 2292, the clasp control members or actuation lines 537 can form loops extending distally through the lumens 2201 of the clasp control mechanism 2250, through the control member tubes 2270, the control member lumens 2264, 2282 of the handle 2222, and through the control member lumens 2240 of the outer shaft 2220. The clasp control members 537 can extend radially outwardly from the lumens 2240, for example, through the ports 2233 (Figure 146) of the coupler or means for coupling 2214. The clasp control members 537 can then extend through openings 535 of the clasps 530. The clasp control members 537 can then extend proximally back to the coupler or means for coupling 2214, radially inwardly through the ports 2233 of the coupler or means for coupling 2214, and then proximally through the outer shaft 2220 and the handle 2222, and to the locking mechanisms 2292 of the clasp control mechanism 2250.

[00717] In Figure 148, the clasp control members or lines 537 are shown slacken and the clasps 530 are partially open in order to illustrate the clasp control members 537 extending through the openings 535 of the clasps 530. However, ordinarily when the clasp control members 537 are slacken, the clasps 530 would be in the closed configuration.

[00718] As shown in the illustrated embodiment, each of the clasp control members or actuation lines 537 can extend through multiple lumens 2240 of the outer shaft 2220. For example, each of the clasp control members 537 can be looped through two of the lumens 2240. In other embodiments, each of the clasp control members 537 can be disposed in a single lumen 2240. In yet other embodiments, multiple clasp control members 537 can be disposed in a single lumen 2240.

[00719] With the clasp control members or actuation lines 537 coupled to the clasps 530, the clasp control mechanism 2250 can be used to actuate the clasps 530 between open and closed configurations. The clasps 530 can be opened by moving the actuator member 2290 proximally relative to the knob 2226 and the housing 2246. This increases tension of the clasp control members 537 and causes the clasp 530 to move from the closed configuration to the open configuration. The clasps 530 can be closed by moving the actuator member 2290 distally relative to the knob 2226 and the housing 2246.

This decreases tension on the clasp control members 537 and allows the clasp 530 to move from the open configuration to the closed configuration. The clasps 530 can be individually actuated by removing the pin 2298 and moving the first or second side portions 2294, 2296 relative to each other, the knob 2226, and the housing 2246.

[00720] When the handle 2222 is assembled as best shown in Figures 150–151, the actuation element or means of actuating 512 can extend distally from the knob 2226, through the actuation tube 2268, through the actuation lumens 2262, 2280 of the housing 2246, through the actuation lumen 2238 of the outer shaft 2220, and through the coupler or means for coupling 2214.

[00721] Referring now to Figures 153–160, the delivery assembly 2200 is used, for example, to implant the prosthetic spacer device 500 in native mitral valve MV of a heart H using a transseptal delivery approach. Figures 153–160 are similar to Figures 15–20, described above, that show the implantable prosthetic device 100 being implanted in the heart H and Figures 35–46, described above, that show the implantable prosthetic device 500 being implanted in the heart H. The methods and steps shown and/or discussed can be performed on a living animal or on a simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, heart, tissue, etc. being simulated), etc.

[00722] Although not shown, a guide wire can be inserted into the patient's vasculature (e.g., a femoral vein) through an introducer sheath. The guide wire can be advanced through the femoral vein, through the inferior vena cava, into the right atrium, through the interatrial septum IAS (e.g., via the fossa ovalis), and into the left atrium LA. The first sheath 2216 of the first catheter 2204 can be advanced over the guide wire such that a distal end portion of the first sheath 2216 is disposed in the left atrium LA, as shown in Figure 153.

[00723] With the prosthetic spacer device 500 coupled to the third catheter 2208 (e.g., as shown in Figure 145) and configured in a radially compressed, delivery configuration, the prosthetic spacer device 500 can be loaded into the first sheath 2216 at a distal end of the second sheath 2218 of the second catheter 2206. The first sheath 2216 retains the prosthetic spacer device 500 in the delivery configuration. In some embodiments, the radially compressed, delivery configuration can be an axially elongated configuration (e.g., like the configuration shown in Figure 153). In other embodiments, the radially compressed, delivery configuration can be an axially foreshorten configuration (e.g., similar to the configuration shown in Figure 155). The second catheter 2206 along with the prosthetic spacer device 500 and the third catheter 2208 can then be advanced together through the first catheter 2204 such that a distal end portion of the sheath 2218 exposed from the distal end portion of the first sheath 2216 and is disposed in the left atrium LA, as shown in Figure 153.

[00724] As shown in Figure 153, the prosthetic spacer device 500 can be exposed from the first sheath 2216 by distally advancing the outer shaft 2220 and the actuation element or means of actuating 512

of the third catheter 2208 relative to the first sheath 2216 and/or retracting the first sheath 2216 relative to the outer shaft 2220 and the actuation element or means of actuating 512, thus forcing the paddles 520, 522 of the anchors 508 out of the first sheath 2216. Once exposed from the first sheath 2216, the paddles 520, 522 can be folded by retracting the actuation element or means of actuating 512 of the third catheter 2208 relative to the outer shaft 2220 of the third catheter 2208 and/or by advancing the outer shaft 2220 relative to the actuation element or means of actuating 512, causing the paddles 520, 522 to bend from the configuration shown in Figure 153, to the configuration shown in Figure 154, and then to the configuration shown in Figure 155. This can be accomplished, for example, by placing the actuation lock mechanism 2248 in the release configuration (e.g., by rotating the knob 2288 counterclockwise relative to the handle 2222) and then moving the knob 2226 proximally relative to the housing 2246. Another option is to set the locking knob 2288 to maintain enough friction that you can actively slide the actuation element or means for actuation 512 but the actuation element or means for actuation will not move on its own. At any point in the procedure, the physician can lock the relative position of the actuation element or means of actuating 512 and the outer shaft 2220, and thus the position of the paddles 520, 522, by actuating the actuation locking mechanism 2248.

[00725] The prosthetic spacer device 500 can then be positioned coaxial relative to the native mitral valve MV by manipulating (e.g., steering and/or bending) the second sheath 2218 of the second catheter 2206, as shown in Figure 155. The prosthetic spacer device 500 can also be rotated (e.g., by rotating the housing 2246) relative to the native mitral valve MV such that the paddles 520, 522 align with native leaflets 20, 22 of the mitral valve MV.

[00726] The paddles 520, 522 of the prosthetic spacer device 500 can then be partially opened (i.e., moved radially outwardly relative to the coaption element 510) to the configuration shown in Figure 156 by moving the knob 2226 distally relative to the housing 2246. The prosthetic spacer device 500 can then be advanced through the annulus of the native mitral valve MV and at least partially into the left ventricle LV. The prosthetic spacer device 500 is then partially retracted such that the paddles 520, 522 are positioned behind the ventricular portions of the leaflets 20, 22 (e.g., at the A2/P2 positions) and the coaption element 510 is disposed on the atrial side of the leaflets 20, 22.

[00727] In this configuration, the native leaflets 20, 22 can be secured relative to the paddles 520, 522 by capturing the native leaflets with the clasps 530. The native leaflets 20, 22 can be grasped simultaneously or separately by actuating the actuator member 2290. For example, Figure 157 shows separate leaflet grasping. This can be accomplished by removing the pin 2298 from the actuator member 2290 and moving the first or second side portions 2294, 2296 relative to each other, the knob 2226, and the housing 2246. Moving the first or second side portions 2294, 2296 distally relative to the knob 2226 and the housing 2246 closes the clasps 530 on the native leaflets 20, 22 (e.g., as shown

by the left clasp 530 as illustrated in Figure 157). Moving the first or second side portions 2294, 2296 proximally relative to the knob 2226 and the housing 2246 opens the clasps 530 (e.g., as shown by the right clasp 530 as illustrated in Figure 157). Once a clasp 530 is closed, a physician can re-open the clasp 530 to adjust the positioning of the clasp 530.

[00728] With both of the native leaflets 20, 22 secured within the clasps 530, the physician can move the knob 2226 proximally relative to the housing 2246. This pulls the paddles 520, 522 and thus the native leaflets 20, 22 radially inwardly against the coaption element 510, as shown in Figure 158. The physician can then observe the positioning and/or reduction in regurgitation. If repositioning or removal is desired the physician can re-open the paddles 520, 522 and/or the clasps 530.

[00729] Once the desired positioning and/or reduction in regurgitation is achieved, the physician can release the prosthetic spacer device 500 from the delivery apparatus 2202. The clasps 530 can be released from the delivery apparatus 2202 by releasing the clasp control members or actuation lines 537 from the locking members 2292 and unthreading the clasp control members or actuation lines 537 from the openings 535 of the clasps 530. The cap 514 of the prosthetic spacer device 500 can be released from the delivery apparatus 2202 by rotating the knob 2226 in the second direction relative to the housing 2246 such that the actuation element or means of actuating 512 withdraws from the bore 516A. The actuation element or means of actuating 512 can then be retracted proximally through the prosthetic spacer device 500 by pulling the knob 2226 proximally relative to the housing 2246. The proximal collar 511 of the prosthetic spacer device 500 can be released from the delivery apparatus 2202 by retracting the actuation element or means of actuating 512 proximally relative to the coupler or means for coupling 2214 such that the distal end portion of the actuation element or means of actuating 512 withdraws from the eyelets 2234 of the coupler or means for coupling 2214. This allows the flexible arms 2228 of the coupler or means for coupling 2214 to move radially outwardly away from the projections 511A of the proximal collar 511. The stabilizer members 2230 of the coupler or means for coupling 2214 can then be withdrawn from the guide openings 511B of the proximal collar 511 by pulling the housing 2246 proximally, thereby releasing the prosthetic spacer device 500 from the delivery apparatus 2202 as shown in Figure 159.

[00730] The shafts 512, 2220 of the third catheter 2208 can then be retracted proximally into the second sheath 2218 of the second catheter 2206, and the second sheath 2218 of the second catheter 2206 can be retracted proximally into the first sheath 2216 of the first catheter 2204. The catheters 2204, 2206, 2208 can then be retracted proximally and removed from the patient's vasculature.

[00731] With the prosthetic spacer device 500 implanted at the A2/P2 position, the native mitral valve MV comprises a double orifice during ventricular diastole, as shown in Figure 160. During ventricular

systole, the side surfaces of the native leaflets 20, 22 can coapt all the way around the prosthetic spacer device 500 to prevent or reduce mitral regurgitation.

[00732] Referring now to Figures 161–162, an example embodiment of a handle 2300 for the delivery apparatus 2200 is shown. Referring to Figure 161, the handle 2300 can comprise a housing 2302, an actuation control mechanism 2304, the clasp control mechanism 2250, and a flushing mechanism (not shown, but see, e.g., the flushing mechanism 2252 in Figure 150). The housing 2302 can include a main body 2306 and the nose portion 2256. The nose portion 2256 of the housing 2302 can be coupled to a proximal end portion of the outer shaft 2220. The actuation control mechanism 2304, the clasp control mechanism 2250, and a flushing mechanism 2252 can be coupled to a proximal end of the main body 2306 of the housing 2302.

[00733] The handle 2300 can be configured similar to the handle 2222, except that the handle 2300 is configured such that rotational movement of the first knob 2318 of the actuation control mechanism 2304 relative to the housing 2302 causes axial movement of the actuation tube 2268 and the actuation element or means of actuating 512; whereas, the handle 2222 is configured such that axial movement of the knob 2226 relative to the housing 2246 causes axial movement of the actuation tube 2268 and the actuation element or means of actuating 512.

[00734] As mentioned above, the housing 2302 can include a main body 2306 and the nose portion 2256. Referring to Figure 162, the main body 2306 of the housing 2302 can comprise an actuation lumen 2308, control member lumens 2310, and a flange portion 2312. The flange portion 2312 can extend axially from a proximal end portion of the main body 2306 and annularly around the actuation lumen 2308.

[00735] The flange portion 2312 of the main body 2306 can comprise one or more circumferential grooves 2314, a bore (not shown), and a guide pin 2316. The grooves 2314 can be configured to interact with the actuation control mechanism 2304, as further described below. The bore can extend radially inwardly from an outside diameter to an inside diameter of the flange portion 2312 and can be configured to receive the guide pin 2316. The guide pin 2316 can be partially disposed in the bore and can extend radially inwardly from the bore such that the guide pin 2316 protrudes into the actuation lumen 2308.

[00736] Referring still to Figure 162, the actuation control mechanism 2304 can comprise a first knob 2318, attachment pins 2320, a drive screw 2322, a collet 2324, and a second knob 2326. The first knob 2318 can have a distal end portion 2328 and a proximal end portion 2330. The first knob 2318 can be configured such that the inside diameter of the distal end portion 2328 is relatively larger than the inside diameter of the proximal end portion 2330. The distal end portion 2328 can comprise openings

2332 that extend radially inwardly from an outside diameter to the inside diameter of the distal end portion 2328.

[00737] Referring again to Figure 161, the inside diameter of the distal end portion 2328 can be configured such that the distal end portion 2328 of the first knob 2318 can extend over the flange portion 2312 of the main body 2306. The openings 2332 (Figure 162) can be configured to axially align with the grooves 2314 when the first knob 2318 is disposed over the flange 2312. The attachment pins 2320 can be configured so as to extend through the openings 2332 of the first knob 2318 and into grooves 2314 of the flange 2312. In this manner, the attachment pins 2320 allow relative rotational movement and prevent relative axial movement between the first knob 2318 and the flange 2312.

[00738] The inside diameter of the proximal end portion 2330 of the first knob 2318 can have internal threads (not shown) configured to engage corresponding external threads 2334 of the drive screw 2322. As shown in Figure 162, the drive screw 2322 can have a slot 2336 that extends axially across the external threads 2334. The slot 2336 can be configured to receive the guide pin 2316 of the flange portion 2312. As such, when the handle 2300 is assembled (Figure 161) and the first knob 2318 is rotated relative to the flange 2312, the guide pin 2316 prevents the drive screw 2322 from rotating together with the first knob 2318 and causes the drive screw 2322 to move axially relative to the first knob 2318 and the flange 2312. In this manner, rotating the first knob 2318 in a first direction (e.g., clockwise) moves the drive screw distally relative to the housing 2302, and rotating the first knob 2318 in a second direction (e.g., counterclockwise) moves the drive screw proximally relative to the housing 2302.

[00739] The drive screw 2322 can also have a lumen 2338, as shown in Figure 162. The lumen 2338 can be configured such that the actuation tube 2268 can extend through the drive screw 2322. The lumen 2338 can be configured such that a distal end portion 2340 of the collet 2324 can also be inserted into a proximal end portion of the lumen 2338.

[00740] The second knob 2326 can comprise a first, distal portion 2342 and a second, proximal portion 2344. The first portion 2342 can include internal threads (not shown) corresponding to the external threads 2334 of the drive screw 2322. The second portion 2344 can comprise a conical inside surface configured to engage a proximal end portion 2346 of the collet 2324.

[00741] When assembled (Figure 161), the actuation tube 2268 can extend through the lumen 2338 of the drive screw 2322, through the collet 2324, and through the second knob 2326. The second knob 2326 can be disposed over the collet 2324 and the internal threads of the first portion 2342 of the second knob can threadedly engage the external threads 2334 of the drive screw 2322. Accordingly, rotating the second knob 2326 in a first direction (e.g., clockwise) relative to the drive screw 2322 causes the second portion 2344 of the second knob 2326 to move toward the proximal end portion

2346 of the collet 2324 and thus urges the collet 2324 radially inwardly against the actuation tube 2268. As a result, the actuation tube 2268 and the drive screw 2322 move axially together when the first knob 2318 is rotated relative to the housing 2302. Rotating the second knob 2326 in a second direction (e.g., counterclockwise) relative to the drive screw 2322 causes the second portion 2344 of the second knob 2326 to move away from the proximal end portion 2346 of the collet 2324 and thus allows the collet 2324 to move radially outwardly relative to the actuation tube 2268. As a result, the actuation tube 2268 and the drive screw 2322 can move relative to each other.

[00742] With the prosthetic spacer device 500 coupled to the actuation element or means of actuating 512 and the outer shaft 2220 of the delivery apparatus 2202, the physician can use the actuation control mechanism 2304 of the handle 2300 to manipulate the paddles 520, 522 of the prosthetic spacer device 500 relative to the spacer member 202 of the prosthetic spacer device 500. The actuation control mechanism 2304 can be activated by rotating the second knob 2326 in the first direction relative to the drive screw 2322 to secure the actuation tube 2268 and thus the actuation element or means of actuating 512 to the drive screw 2322. The physician can then rotate the first knob 2318 relative to the housing 2302, which causes the drive screw 2322 and thus the actuation tube 2268 and the actuation element or means of actuating 512 to move axially relative to the housing 2302 and thus the outer shaft 2220. This, in turn, causes the paddles 520, 522 (which are coupled to the actuation element or means of actuating 512 via the cap 514) to move relative to the coaption element 510 (which is coupled to the outer shaft 2220 via coupler or means for coupling 2214 and the proximal collar 511).

[00743] The prosthetic spacer device 500 can be released from the delivery apparatus 2202 by rotating the second knob 2326 in the second direction relative to the drive screw 2322. This allows the actuation tube 2268 and thus the actuation element or means of actuating 512 to move relative to the drive screw 2322. The shafts 512, 2220 of the delivery apparatus 2202 can then be removed from the respective collars of the prosthetic spacer device 500, as described above.

[00744] Configuring a delivery apparatus with the actuation control mechanism 2304 can provide several advantages. For example, the rotational forces required to actuate the first knob 2318 of the handle 2300 can be less than the axial forces required to actuate the knob 2226 of the handle 2300.

[00745] The actuation control mechanism 2304 can also provide relatively more precise control of the paddles 520, 522 because the axial movement of the actuation element or means of actuating 512 is controlled by rotation of the first knob 2318 and the thread pitch of the drive screw 2322 rather than be axial movement of the knob 2226. In other words, the actuation control mechanism 2304 can be configured, for example, such that one rotation of the first knob 2318 moves the actuation element or means of actuating 512 a small axial distance (e.g., 1 mm); whereas, it can be relatively more difficult to axially move the knob 2226 and thus the shaft 512 in small increments (e.g., 1 mm).

[00746] Additionally, the actuation control mechanism 2304 can prevent or reduce inadvertent movement and release of the actuation element or means of actuating 512. For example, because the actuation control mechanism 2304 requires rotational movement of the first knob 2318 to move the actuation element or means of actuating 512, it can prevent or reduce the likelihood that the actuation element or means of actuating 512 will move if the knob 2226 is inadvertently contacted. Also, the physician has to rotate the second knob 2326 to release the actuation tube 2268 from the drive screw 2322 before the physician can rotate the knob 2226 to release the actuation element or means of actuating 512 from the cap 514 of the prosthetic spacer device 500 and proximally retract the actuation element or means of actuating 512. This two-step release process could reduce the likelihood of a physician inadvertently releasing the prosthetic spacer device 500 from the delivery apparatus 2202.

[00747] Figures 163–164 show example embodiments of a coupler 2400 and a proximal collar 2402. Although not shown, the coupler 2400 can be coupled to the distal end portion of the outer shaft 2220 (Figure 149) in a manner similar to the coupler or means for coupling 2214. As shown, the proximal collar 2402 can be coupled to a proximal end portion of the coaption element 510 in a manner similar to the proximal collar 511 (Figure 146). As such, the coupler 2400 and the proximal collar 2402 can be used, for example, in lieu of the coupler or means for coupling 2214 and the proximal collar 514 of the delivery assembly 2200, respectively, to releasably couple the prosthetic spacer device 500 to the outer shaft 2220 (Figure 149).

[00748] Referring to Figure 164, the coupler 2400 can comprise an axially-extending lumen 2404 and a plurality of radially-extending openings 2406. The lumen 2404 can be configured to receive the actuation element or means of actuating 512 (Figure 163). The openings 2406 can be configured to receive the proximal collar 2402, as further described below.

[00749] The proximal collar 2402 can comprise a plurality of proximally-extending tabs or fingers 2408. Free end portions 2410 of the fingers 2408 can have radially-extending projections 2412 formed thereon. The fingers 2408 can be configured to move or pivot between a first or resting state (Figure 164) and a second or deflected state (Figure 163). In the first state, the free end portions 2410 of the fingers 2408 press radially inwardly against each other. In the second state, the free end portions 2410 of the fingers 2408 are radially spaced from each other.

[00750] Referring to Figure 163, the coupler 2400 and the proximal collar 2402 be releasably coupled together by positioning the fingers 2408 of the proximal collar 2402 within the coupler 2400. The actuation element or means of actuating 512 can then be advanced through the lumen 2404 of the coupler 2400 and through the fingers 2408 of the proximal collar 2402, thus causing the free ends 2410 of the fingers 2408 to move or pivot radially-outwardly from the first state to the second state. The projections 2412 of the fingers 2408 and the openings 2406 of the coupler 2400 can be rotationally

aligned such that the projections 2412 extend into the openings 2406, thereby releasably coupling the coupler 2400 to the proximal collar 2402. The coupler 2400 can be released from the proximal collar 2402 by retracting the actuation element or means of actuating 512 from the finger 2408 of the proximal collar 2402. This allows the free end portions 2410 of the fingers 2408 to move or pivot from the second state back to the first state and causes the projections 2412 of the fingers 2408 to withdraw from the openings 2406 of the coupler 2400, thus releasing the coupler 2400 from the proximal collar 2402.

[00751] In some embodiments, the fingers 2408 of the proximal collar 2402 can be configured to create a hemostatic seal when the fingers 2408 are in the first state. This can, for example, prevent or reduce blood from flowing through the proximal collar 2402 when the prosthetic spacer device 500 is implanted in a patient.

[00752] Figures 165–166 show example embodiments of a cap 2500, an actuation element or means of actuating 2502 (e.g., actuation shaft, etc.), and a release member (e.g., wire) 2504, which can be used, for example, with the delivery assembly 2200. Although not shown, the cap 2500 can be coupled to the distal portion of the prosthetic spacer device 500. A proximal portion (not shown) of the actuation element or means of actuating 2502 can be coupled to the actuation tube 2268 and the knob 2226. From the proximal end portion, the actuation element or means of actuating 2502 can extend distally through the handle 2222 (Figure 150), through the outer shaft 2220 (Figure 150), and into the prosthetic spacer device 500 (Figure 145). A distal end portion of the actuation element or means of actuating 2502 can be releasably coupled to the cap 2500 of the prosthetic spacer device 500. As such, the cap 2500 and the actuation element or means of actuating 2502 can be used, for example, in lieu of the cap 514 and the actuation element or means of actuating 512 of the delivery assembly 2200, respectively.

[00753] Referring to Figure 166, the cap 2500 can comprise a central bore 2506 and a tongue or tab 2508 formed (e.g., laser cut) in a side surface 2510 of the cap 2500. The tongue 2508 can have an opening 2512 formed (e.g., laser cut) therein. The central bore 2506 can be configured to receive a distal end portion of the actuation element or means of actuating 2502. The tongue 2508 can be movable or pivotable relative to the side surface 2510 of the cap 2500 from a first or resting configuration (Figure 166) to a second or deflected configuration (Figure 165). In the first configuration, the tongue 2508 can be flush with the side surface 2510. In the second configuration, the tongue 2508 can extend radially inwardly relative to the side surface 2510 to protrude into the central bore 2506.

[00754] The tongue 2508 can be used, for example, to releasably couple the cap 2500 to the actuation element or means of actuating 2502, as shown in Figures 165 and 166. For example, the actuation element or means of actuating 2502 can be inserted into the central bore 2506 of the cap 2500. The

tongue 2508 can then be pushed radially inwardly from the first configuration to the second configuration such that the tongue 2508 presses against the actuation element or means of actuating 2502. The release member 2504 can then be advanced distally such that a distal end portion 2514 of the release member 2504 extends through the opening 2512 of the tongue 2508. Thus, the release member 2504 retains the tongue 2508 in the second configuration against the actuation element or means of actuating 2502, thereby releasably coupling the cap 2500 to the actuation element or means of actuating 2502.

[00755] The cap 2500 can be released from the actuation element or means of actuating 2502 by retracting the release member 2504 proximally such that the distal end portion 2514 of the release member 2504 withdraws from the opening 2512 of the tongue 2508. This allows the tongue to move radially outwardly from the second state back to the first state, thereby releasing the cap 2500 from the actuation element or means of actuating 2502.

[00756] This configuration can provide several advantages. For example, in some embodiments, the cap 2500 and the actuation element or means of actuating 2502 can be formed without threads. Removing the threads can make manufacturing the cap 2500 and the actuation element or means of actuating 2502 easier and/or less expensive. Removing the threads from the actuation element or means of actuating 2502 can also reduce the likelihood the actuation element or means of actuating 2502 could catch or snag on another component of the delivery assembly 2200.

[00757] Figures 167–168 show example embodiments of a coupler 2600, a proximal collar 2602, a cap 2604, and an actuation element or means of actuating 2606 (e.g., actuation shaft, etc.), which can be used, for example, with the delivery assembly 2200. Referring to Figure 167, the coupler 2600 can be coupled to the distal end portion of the outer shaft 2220. The proximal collar 2602 can be coupled to the proximal portion of the prosthetic spacer device 500 (shown schematically in partial cross-section), and the cap 2604 can be coupled to the distal portion of the prosthetic spacer device 500. A proximal portion (not shown) of the actuation element or means of actuating 2606 can be coupled to the actuation tube 2268 and the knob 2226. From the proximal end portion, the actuation element or means of actuating 2606 can extend distally through the handle 2222 (Figure 150), through the outer shaft 2220 (Figure 150), and into the prosthetic spacer device 200 (Figure 145). A distal end portion of the actuation element or means of actuating 2606 can be releasably coupled to the cap 2604 of the prosthetic spacer device 500. As such, the coupler 2600, the proximal collar 2602, the cap 2604, and the actuation element or means of actuating 2606 can be used, for example, in lieu of the coupler or means for coupling 2214, the proximal collar 511, the cap 514, and the actuation element or means of actuating 512 of the delivery assembly 2200, respectively.

[00758] Referring to Figure 168, the coupler 2600 can comprise a connection portion 2608, a plurality of pins 2610 (e.g., three in the illustrated embodiment), and one or more securing members 2612 (e.g., three in the illustrated embodiment). The pins 2610 and the securing members can be coupled to and extend distally from the connection portion 2600.

[00759] The connection portion 2608 can have an axially-extending lumen 2614 configured to slidably receive the actuation element or means of actuating 2606. In some embodiments, the connection portion 2608 can also have a recessed outwardly facing surface 2615 configured to be inserted into the distal end portion of the outer shaft 2220, as shown in Figure 167.

[00760] As best shown in Figure 168, the pins 2610 can be spaced circumferentially relative to each other and relative to the securing members 2612. The securing members 2612 can be spaced circumferentially relative to each other. In some embodiments, the pins 2610 and the securing members 2612 can be configured in an alternating type pattern (e.g., pin-securing member-pin and so on) on the connection portion 2608.

[00761] Referring to Figure 167, the pins 2610 can be configured to extend into openings 2616 of the proximal collar 2602. In certain embodiments, the securing members 2612 can be suture loops. The securing members 2612 can be configured to extend through the openings 2616 of the proximal collar 2602 and around the actuation element or means of actuating 2606. For clarity, only one securing member 2612 is shown extending around the actuation element or means of actuating 2606 in Figure 167.

[00762] Referring again to Figure 168, in addition to the openings 2616, the proximal collar 2602 can comprise a central lumen 2618 disposed radially inward from the openings 2616. The central lumen 2618 can extend axially and can be configured to slidably receive the actuation element or means of actuating 2606, as shown in Figure 167.

[00763] The cap 2604 can be configured in a sleeve-like manner such that the actuation element or means of actuating 2606 can slidably extend through the cap 2604, as shown in Figure 167.

[00764] The actuation element or means of actuating 2606 can comprise a radially-expandable portion 2620 disposed at or near the distal end portion 2622 of the actuation element or means of actuating 2606. The radially-expandable portion 2620 can be configured to be selectively expandable from a compressed configuration to an expanded configuration. The radially-expandable portion 2620 can be configured such that an outside diameter of the radially-expandable portion 2620 is less than the inside diameter of the cap 2604, the central lumen 2618 of the proximal collar 2602, and the lumen 2614 of the coupler 2600 when the radially-expandable portion 2620 is in the compressed configuration. When the radially expandable portion 2620 is in the expanded configuration, the outside diameter of the radially-expandable portion 2620 is greater than the inside diameter of the cap 2604. Thus, in the

expanded configuration, the radially-expandable portion 2620 can prevent the distal end portion 2622 from moving proximally relative to the cap 2604.

[00765] As shown in Figure 167, the prosthetic spacer device 500 can be releasably coupled to the outer shaft 2220 and the actuation element or means of actuating 2606 by inserting the pins 2610 and the securing members 2612 through respective openings 2616 in the proximal collar 2602. With the radially-expandable portion 2620 in the compressed configuration, the actuation element or means of actuating 2606 can be advanced distally through the lumen 2614 of the coupler 2600, through the lumen 2618 and the securing members 2612 of the proximal collar 2602, and through the cap 2604 such that the radially-expandable portion 2620 is disposed distal relative to the cap 2604. The radially-expandable portion 2620 of the actuation element or means of actuating 2606 can then be expanded from the compressed configuration to the expanded configuration, thus releasably coupling the prosthetic spacer device 500 to the outer shaft 2220 and the actuation element or means of actuating 2606.

[00766] The prosthetic device 500 can be released from the outer shaft 2220 and the actuation element or means of actuating 2606 by compressing the radially-expandable portion 2620 of the actuation element or means of actuating 2606 and proximally retracting the actuation element or means of actuating 2606 through the cap 2604, through the securing members 2612 and the lumen 2618 of the proximal collar 2602. The outer shaft 2220 can then be retracted proximally relative to the prosthetic spacer device 500 such that the pins 2610 and the securing members 2612 withdraw from the openings 2616 in the proximal collar 2602, thus releasing the prosthetic spacer device 500 from the outer shaft 2220 and the actuation element or means of actuating 2606.

[00767] Figures 169–170 show an example embodiment of clasp control members, which can be used, for example, in lieu of the clasp control members 537 of the delivery assembly 2200. Referring to Figure 170, the clasp control members 2700 can comprise sleeves 2702, connecting members 2704, and release members 2706. The connecting members 2704 and the release members 2706 can extend axially through and can be movable relative to the sleeves 2702.

[00768] Proximal end portions (not shown) of the sleeves 2702 can be coupled to the control member tubes 2270, and distal end portions of the sleeves 2708 can be releasably coupled to the clasps 530 of the prosthetic spacer device 500 by the connecting members 2704 and the release members 2706, as further described below.

[00769] The connecting members 2704 can, for example, be suture loops that extend distally from the clasp control mechanism 2250 of the delivery apparatus 2202, through the control member tubes 2270, through the sleeves 2702, and through the openings 535 of the clasps 530. The connecting members

2704 can be releasably coupled to the clasps 530 of the prosthetic spacer device 500 by the release members 2706.

[00770] The release members 2706 can, for example, be wires that extend distally from the clasp control mechanism 2250 of the delivery apparatus 2202, through the control member tubes 2270, through the sleeves 2702, and through the loops of the connecting members 2704. In this manner, the release members 2706 releasably couple the connecting members 2704 and thus the sleeves 2702 to the clasps 530 by preventing the connection members 2704 from withdrawing through the openings 535 of the clasps 530. The connection members 2704 can be released from the clasps 530 by withdrawing the release members 2706 from the loops of the connecting members 2704 and withdrawing the connecting members 2704 from the openings 535 of the clasps 530.

[00771] With the sleeves 2702 releasably coupled to the clasps 530 of the prosthetic spacer device 500 by the connecting members 2704 and the release members 2706, the clasps 530 can be actuated (either together or separately) by moving the sleeves 2702 axially relative to the outer shaft 2220 and the actuation element or means of actuating 512. This can be accomplished, for example, by moving the actuator member 2290, which are coupled to the sleeves 2702 via the control tubes 2268, relative to the housing 2246 and actuation tube 2268. Moving the actuation member 2290 proximally relative to the housing 2246 and actuation tube 2268 can open the clasps 530 and moving the actuation member 2290 distally relative to the housing 2246 and actuation tube 2268 can close the clasps 530.

[00772] Because the sleeves 2702 are relatively rigid (e.g., compared to the clasp control members 537), the sleeves 2702 can be used to push the clasps 530 closed (either in lieu of or in addition to the bias of the clasps 530 to the closed position). This pushability can help to ensure the native leaflets are grasped within the clasps 530 and thus secured to the paddles 520, 522.

[00773] Figure 171 shows an example embodiment of a guide rail or means for guiding 2800. The guide rail or means for guiding 2800 can, for example, be coupled to the clasps 530 of the prosthetic spacer device 500. In some embodiments, the clasp control member 2700 can be releasably coupled to the guide rail or means for guiding 2800 in a snare-like manner similar to that described above with respect to Figure 170.

[00774] Coupling a clasp control member 2700 to the guide rail or means for guiding 2800 rather than directly to the clasps 530 allows the clasp control member 2700 to slide longitudinally along the guide rail or means for guiding 2800 as the clasp 530 moves between the open and the closed configurations. This can, for example, allow the clasp control member 2700 to maintain a relatively constant angle relative to the paddles 520, 522 as the clasps 530 are actuated. For example, the clasp control member 2700 can slide outwardly toward a first side portion 2802 of the guide rail or means for guiding 2800 when the clasp 530 is pulled open, and the clasp control member 2700 can slide inwardly toward a

second side portion 2804 of the guide rail or means for guiding 2800 when the clasp 530 is pushed closed. This can therefore reduce the force required to actuate the clasp control member 2700. For example, the sleeves 2702 can remain more substantially straight as the movable portion of the clasp 530 swings through its full arc of motion. This is due to the sliding movement on the guide rail or means for guiding 2800. By sliding and remaining substantially straight, the amount of bending of the sleeves is limited.

[00775] Figure 172 shows an example embodiment of a shaft 2900. The shaft 2900 can be used, for example, with the delivery apparatus 2202 in lieu of the outer shaft 2220 of the third catheter 2208. The shaft 2900 can comprise a plurality of axially extending lumens, including an actuation element lumen or means of actuating lumen 2902 (e.g., an actuation shaft lumen, actuation tube, etc.), and a plurality of control member lumens 2904 (e.g., four in the illustrated embodiment) disposed radially outwardly from the actuation element lumen or means of actuating lumen 2902. The control member lumens 2904 can be spaced relative to each other and can be evenly distributed circumferentially around the actuation element lumen or means of actuating lumen 2902. For example, each of the control member lumens 2904 can be located approximately 90 degrees from an adjacent control member lumen 2904.

[00776] The actuation element lumen or means of actuating lumen 2902 can be configured to receive the actuation element or means of actuating 512, and the control member lumens 2904 can be configured to receive the clasp control members or actuation lines 537. The lumens 2902, 2904 can also be configured such that the actuation element or means of actuating 512 and clasp control members/lines 537 can be movable (e.g., axially and/or rotationally) relative to the lumens 2902, 2904, respectively. In particular embodiments, the lumens 2902, 2904 can comprise a liner or coating (e.g., PTFE, polymer, hydrogel, etc.) configured to reduce friction between the lumens 2902, 2904 and the actuation element or means of actuating 512 and clasp control members/lines 537, respectively.

[00777] The shaft 2900 can be formed from various materials, including metals and polymers. For example, in one particular embodiment, the shaft 2900 can comprise a first portion 2906, a second portion 2908, and a third portion 2910. The first portion 2906 be the radially outermost portion, the third portion 2910 can be the radially innermost portion, and the second portion 2908 can be disposed radially between the first and third portions 2906, 2910. In certain embodiments, the first and third portions 2906, 2910 can be formed from polymeric material (e.g., PEBAX or other material having a Type D Shore durometer value of 55D), and the second portion 2908 can be formed from a metallic material (e.g., braided stainless steel).

[00778] Configuring the shaft 2900 in this manner can, for example, further improve control of the distal end portion of the shaft 2900. For example, this configuration can prevent or reduce “whipping” (e.g., sudden or abrupt movement) at the distal end portion of the shaft 2900 when the shaft 2900 is

rotated at the proximal end portion (e.g., by rotating the housing 2246 of the handle 2222). As such, a physician can more precisely control the distal end portion of the shaft 2900 and thus more precisely control the prosthetic spacer device (e.g., the spacer device 500) during the implantation procedure such as when the physician rotates the prosthetic spacer device to align the anchors of the prosthetic spacer device with the native leaflets.

[00779] It should be noted that in certain embodiments the housing 2246 of the handle 2222 can comprise four control member lumens 2264, 2282 (i.e., four of each) that are coupled to the control member lumens 2904. As such, each portion of the clasp control members or lines 537 can extend distally in a separate lumen from the clasp control mechanism 2250 of the handle 2222 to the prosthetic spacer device 500.

[00780] Referring to Figure 173, the actuation element 512 can be hollow so that a tethering line or suture 3000 can be extended through the actuation element 512 to the device 500. The actuation element 512 extends through the device 500 and is attached to the cap 514. Retracting the tethering line 3000 in the retraction direction X relative to a coupler of the delivery assembly 2200 reduces the length of the tethering line 3000, thereby moving the coupler of the delivery assembly 2200 toward the device 500 in a recapture direction Y.

[00781] Referring again to Figure 173, the device 500 is shown in a closed position as if after delivery and implantation in a native valve. Once the device 500 is implanted, the coupler of the delivery assembly 2200 is opened and moved away from the device in a retraction direction X so that the performance of the device 500 can be monitored to see if any adjustments may be desirable. If further adjustments to the device 500 are desired, the tethering line 3000 is retracted in the retraction direction X so that the coupler of the delivery assembly 2200 moves in the recapture direction Y toward the device 500.

[00782] Referring now to Figure 174, the coupler of the delivery assembly 2200 has been moved into a suitable position to recapture the device 500. Once in position, the actuation lines 3002 for each moveable arm 2228 are retracted in an actuation direction A to cause the moveable arms 2228 to move in a closing direction B close around the proximal collar 511 of the device 500. In some embodiments, the tethering line 3000 is adjusted simultaneously with the actuation lines 3002 to aid in recapturing the device 500 which may be moving around as the native valve opens and closes.

[00783] Referring now to Figure 175, the moveable arms 2228 are closed around the proximal collar 511. The actuation element 512 is then moved in a distal direction C, through the securing portions of the moveable arms 2228 and into the device 500 along the tethering line 3000. To recapture and secure the device 500, a threaded end 512B of the actuation element 512 is threaded into a threaded receptacle 516A of the cap 514 as shown in Figure 176.

[00784] Figures 174A and 175A illustrate an example of a mechanism that can be used to recouple the coupler of the delivery assembly 2200 to the collar 511 of the device 500. In the example of Figures 174A and 175A, the actuation element 512 can be hollow so that a tethering line or suture 3000 can be extended through the actuation element 512 to the device 500. As in the embodiment illustrated by Figures 174 and 175, retracting the tethering line 3000 in the retraction direction X moves the coupler of the delivery assembly 2200 toward the device 500 in a recapture direction Y.

[00785] Referring now to Figure 174A and 175A, the coupler of the delivery assembly 2200 has been moved into a suitable position to recapture the device 500. Once in position, a closing sleeve 3003 that fits around the moveable arms 2228 is advanced over the coupler of the delivery assembly 2200 in a closing direction C to press the moveable arms 2228 inward in a closing direction D around the proximal collar 511 of the device 500. In some embodiments, the tethering line 3000 is adjusted simultaneously with the closing sleeve 3003 to aid in recapturing the device 500 which may be moving around as the native valve opens and closes.

[00786] Referring now to Figure 175A, the moveable arms 2228 are closed around the proximal collar 511. The actuation element 512 is then moved in a distal direction E and into the device 500 along the tethering line 3000. To recapture and secure the device 500, a threaded end 512B of the actuation element 512 is threaded into a threaded receptacle 516A of the cap 514 as shown in Figure 176.

[00787] Referring now to Figures 177–178, an example implantable prosthetic device 3100 is shown. The device 3100 includes an implantable prosthetic device 3110 and a coupler 3120. An actuation element or means of actuating or wire 3130 can extend through the coupler 3120 to the device 3110 to open and close the device 3110. The device 3110 is similar to example implantable prosthetic devices described in the present application and includes a proximal collar 3112 having an opening 3114 and radially disposed apertures 3116. The coupler 3120 has moveable arms or fingers 3122 that can be moved between open and closed positions. The moveable arms 3122 include protrusions 3124 configured to engage the apertures 3116 of the proximal collar 3112 of the device 3110. The moveable arms 3122 are biased inward so that moving the actuation element or means of actuating 3130 in a distal direction Y through the coupler 3120 and between the moveable arms 3122 spreads the moveable arms 3122 outwards so that the protrusions 3124 engage the apertures 3116. In the illustrated embodiment, the protrusions 3124 and apertures 3116 are tapered to ease engagement of the protrusions 3124 with the apertures 3116. Moving the actuation element or means of actuating 3130 in a retraction direction X allows the moveable arms 3122 to move inward so that the protrusions 3124 disengage the apertures 3116. In this way the device 3110 can be released and recaptured by the coupler 3120.

[00788] Referring now to Figures 179–181, an example implantable prosthetic device 3200 is shown. The device 3200 includes an implantable prosthetic device 3210 and a coupler 3220. An actuation element or means of actuating or wire 3230 can extend through the coupler 3220 to the device 3210 to open and close the device 3210. The device 3210 is similar to example implantable prosthetic devices described in the present application and includes a proximal collar 3212 having an opening 3214 and radially disposed apertures 3216.

[00789] The coupler 3220 has moveable arms or fingers 3222 that can be moved between open and closed positions. The moveable arms 3222 include protrusions 3224 configured to engage the apertures 3216 of the proximal collar 3212 of the device 3210. The moveable arms 3222 are biased inward so that moving the actuation element or means of actuating 3230 in a distal direction Y through the coupler 3220 and between the moveable arms 3222 spreads the moveable arms 3222 outwards so that the protrusions 3224 engage the apertures 3216. Moving the actuation element or means of actuating 3230 in a retraction direction X allows the moveable arms 3222 to move inward so that the protrusions 3224 disengage the apertures 3216. In this way the device 3210 can be released and recaptured by the coupler 3220.

[00790] The actuation element 3230 (e.g., actuation wire, shaft, tube, etc.) can be hollow so that a tethering line or suture 3232 can be extended through the actuation element 3230 to the device 3210. The actuation element 3230 extends through the opening 3214 of the device 3210 and is attached to securing portions 3218. Retracting the tethering line 3232 in the retraction direction X (Figure 180) reduces the length of the tethering line 3232, thereby moving the coupler 3220 toward the device 3210 such that the moveable arms 3222 are inserted into the opening 3214 of the device 3210 as shown in Figure 180.

[00791] Referring now to Figure 181, once the coupler 3220 has been moved into position to recapture the device 3210 the actuation element 3230 is moved in the distal direction Y to recouple the coupler 3220 to the device 3210. The actuation element 3230 engages the moveable arms 3222, thereby causing the protrusions 3224 to move in an outward direction A to engage the apertures 3216 of the device 3210. In the illustrated embodiment, the protrusions 3224 and apertures 3216 are tapered to ease engagement of the protrusions 3224 with the apertures 3216. In some embodiments, the tethering line 3232 is adjusted simultaneously as the actuation element or means of actuating 3230 is extended to take up slack in the actuation line and maintain engagement between the coupler 3220 and device 3210.

[00792] Referring now to Figures 182–183, an example implantable prosthetic device 3300 is shown. The device 3300 includes an implantable prosthetic device 3310 and a coupler 3320. An actuation element or means of actuating or wire 3330 can extend through the coupler 3320 to the device 3310 to

open and close the device 3310. The device 3310 is similar to example implantable prosthetic devices described in the present application and includes a proximal collar 3312 having an opening 3314 and radially disposed apertures 3316.

[00793] The coupler 3320 has moveable arms or fingers 3322 that can be moved between open and closed positions. The moveable arms 3322 include distal protrusions 3324 configured to engage the apertures 3316 of the proximal collar 3312 of the device 3310. The moveable arms 3322 also include internal protrusions 3326 having apertures 3328 configured to receive the actuation element or means of actuating 3330. In the closed position, the internal apertures 3328 are offset from the actuation element or means of actuating 3330. The actuation element or means of actuating 3330 has a tapered end 3332 to engage the offset apertures 3328. As successive apertures 3328 are engaged by the tapered end 3332 of the actuation element or means of actuating 3330, the moveable arms 3322 are moved outward to engage the opening 3314.

[00794] The moveable arms 3322 are biased inward so that moving the actuation element or means of actuating 3330 in a distal direction Y through the coupler 3320 and between the moveable arms 3322 spreads the moveable arms 3322 outwards so that the protrusions 3324 engage the apertures 3316. Moving the actuation element or means of actuating 3330 in a retraction direction X allows the moveable arms 3322 to move inward so that the protrusions 3324 disengage the apertures 3316. In this way the device 3310 can be released and recaptured by the coupler 3320. In some embodiments, the prosthetic device 3300 is similar to the device 3200 and includes a tethering line (not shown) that allows the device 3300 to be recaptured.

[00795] Referring now to Figures 184–185, an example implantable prosthetic device 3400 is shown. The device 3400 includes an implantable prosthetic device 3410 and a coupler 3420. An actuation element or means of actuating or wire 3430 can extend through the coupler 3420 to the device 3410 to open and close the device 3410. The device 3410 is similar to example implantable prosthetic devices described in the present application and includes a proximal collar 3412 having an opening 3414 and radially disposed apertures.

[00796] The coupler 3420 has moveable arms or fingers 3422 that can be moved between open and closed positions. The moveable arms 3422 include distal protrusions 3424 configured to engage the apertures 3416 of the proximal collar 3412 of the device 3410. The moveable arms 3422 also include internal protrusions 3426 having apertures 3428 configured to receive the actuation element or means of actuating 3430. In the closed position, the internal apertures 3428 are offset from the actuation element or means of actuating 3430. The actuation element or means of actuating 3430 has a tapered end 3432 to engage the offset apertures 3428. As successive apertures 3428 are engaged by the tapered

end 3432 of the actuation element or means of actuating 3430, the moveable arms 3422 are moved inward to engage the opening 3414.

[00797] The moveable arms 3422 are biased outward so that moving the actuation element or means of actuating 3430 in a distal direction Y through the coupler 3420 and between the moveable arms 3422 retracts the moveable arms 3422 inwards so that the protrusions 3424 engage the apertures 3416. Moving the actuation element or means of actuating 3430 in a retraction direction X allows the moveable arms 3422 to spread outward so that the protrusions 3424 disengage the apertures 3416. In this way the device 3410 can be released and recaptured by the coupler 3420. In some embodiments, the prosthetic device 3400 is similar to the device 3200 and includes a tethering line (not shown) that allows the device 3400 to be recaptured.

[00798] Referring to Figure 186, an actuation element or means of actuating 3500 for placing and actuating an implantable prosthetic device is shown. The actuation element or means of actuating 3500 includes a hollow positioning shaft 3510 and a hollow device shaft 3520 that fit over a retaining shaft 3530 that holds the hollow positioning and device shafts 3510, 3520 together at a connection 3502. The hollow positioning shaft 3510 extends from a delivery device 3504 and when coupled to the device shaft 3520 allows an implantable device 3506 to be placed in a suitable location for implantation. The location of the connection 3502 between the hollow positioning shaft 3510 and the device shaft 3520 can be at a wide variety of different positions in an implantable device. For example, the connection 3502 can be at a proximal portion of a device or can be at a distal portion of a device.

[00799] The hollow positioning shaft 3510 can include a protruding portion 3512 and a recessed receiving portion 3514. The device shaft 3520 can also include a protruding portion 3522 and a recessed receiving portion 3524. When the hollow positioning and device shafts 3510, 3520 are coupled, the protruding portion 3512 of the hollow positioning shaft 3510 is received by the receiving portion 3524 of the device shaft 3520, and the protruding portion 3522 of the device shaft 3520 is received by the receiving portion 3514 of the hollow positioning shaft 3510.

[00800] The hollow positioning and device shafts 3510, 3520 can be connected in a wide variety of different ways. For example, the hollow positioning shaft 3510 can include a bore or channel 3516 that is aligned with a bore or channel 3526 of the hollow device shaft 3520 when the protruding portions 3512, 3522 are disposed in the receiving portions 3514, 3524, respectively. When the openings 3516, 3526 are aligned and the retaining shaft 3530 is placed into the openings 3516, 3526 in the direction X, the hollow positioning and device shafts 3510, 3520 are retained together. When the retaining shaft 3530 is removed from the openings 3516, 3526 in the direction Z, protruding portions 3512, 3522 can be removed from the receiving portions 3514, 3524, such that the device 3506 is detached from the hollow positioning shaft 3510.

[00801] Still referring to Figure 186, in some embodiments, when the hollow positioning and device shafts 3510, 3520 are secured to each other, an aperture 3540 is created at interface 3542 between the hollow positioning and device shafts 3510, 3520. The aperture 3540 is configured to secure a control line 3544 between the hollow positioning and device shafts 3510, 3520 to allow for separate control of clasps or gripping members (not shown). That is, the aperture 3540 is configured such that the line 3544 does not move relative to the aperture 3540 when the hollow positioning and device shafts 3510, 3520 are joined together. Upon detachment of the hollow positioning and device shafts 3510, 3520, the line 3544 is released from the aperture 3540 and can be removed from the implantable device 3506. The line 3544 can then be retracted into the catheter to release the clasps gripping members.

[00802] Referring now to Figure 187, an actuation or control mechanism 3600 is shown. The control mechanism 3600 can be used to open and close first and second clasps or gripping members 3610, 3620 to grasp native leaflets for implantation of an implantable prosthetic device. The control mechanism 3600 includes a first gripper control member 3612 and a second gripper control member 3622. The first gripper control member 3612 is configured to move the first gripping member 3610 bi-directionally in the direction X, and the second gripper control member 3622 is configured to move the second gripping member 3620 bi-directionally in the direction Z. Movement of the first gripping member 3610 in the direction X adjusts the width W of a first opening 3616 between the first gripping member 3610 and a first paddle 3614, and movement of the second gripping member 3620 in the direction Z will adjust the width H of a second opening 3626 between the second gripping member 3620 and a second paddle 3624.

[00803] In the illustrated embodiment, the gripper control members 3610, 3620 include actuation lines configured as push/pull links 3611, 3621, such as, for example, a catheter, a flexible rod, a stiff wire, etc. and a coupler 3613, 3623. Each push/pull link 3611, 3621 extends from a delivery device 3602 and is removably attached to the corresponding gripping member 3612, 3622 by the couplers 3613, 3623. The link 3611 is configured to be pushed and pulled in the direction Y. Movement of the link 3611 in the direction Y causes the gripping member 3610 to move in the direction X. Similarly, the link 3621 is configured to be pushed and pulled in the direction M, and movement of the link 3621 in the direction M causes the gripping member 3620 to move in the direction H.

[00804] Referring now to Figures 188 and 188A, an actuation or control mechanism 3700 for use in implantable prosthetic devices, such as the devices described in the present application, is shown. The actuation mechanism 3700 allows for pushing and pulling of portions of an implantable device, such as the clasps or gripping members described above. The mechanism 3700 includes first and second control members 3710, 3720 that extend from a delivery device 3702. The delivery device 3702 can be any suitable device, such as a sheath or catheter. The first and second control members 3710, 3720

include first and second sutures 3712, 3722 and first and second flexible wires 3714, 3724. The first and second flexible wires 3714, 3724 extend from the delivery device 3702 and each include a loop 3716, 3726 for receiving the first and second sutures 3712, 3722 and for engaging a clasp or gripping member. Each of the first and second sutures 3712, 3722 extends from the delivery device 3702, through a one of the first and second loops 3716, 3726, respectively, and back into the delivery device 3702. In the example illustrated by Figure 188, each suture 3712, 3722 extends through one of the loops 3716, 3726 once. In the example illustrated by Figure 188, each suture 3712, 3722 extends through one of the loops 3716, 3726 twice. In some embodiments, the first and second control members 3710, 3720 extend through separate delivery devices 3702. The sutures 3712, 3722 are removably attached to moveable arms of example barbed clasps described above. The first and second loops 3716, 3726 of the respective wires 3714, 3724 are able to move along the corresponding sutures 3712, 3722 such that the loops 3716, 3726 can engage the corresponding barbed clasps to engage the moveable arms. That is, the sutures 3712, 3722 are used to pull the moveable arms in an opening direction and the wires 3714, 3724 are used to push the moveable arms in a closing direction. The wires 3714, 3724 can be made of, for example, steel alloy, nickel-titanium alloy, or any other metal or plastic material. In certain embodiments, the wires 3714, 3724 can have a diameter between about 0.10 mm and about 0.35 mm, between about 0.15 mm and about 0.30 mm, and between about 0.20 mm and about 0.25 mm. While the wires 3714, 3724 are shown as coming out of separate lumens than the sutures 3712, 3722, in one embodiment, the wires 3714, 3724 can share a lumen with a suture.

[00805] In the examples of Figures 188 and 188A, the wires 3714, 3724 can be replaced with a rigid or semi-rigid tube or pushable coil. The tube or pushable coil can share a lumen with a suture loop, the suture loop can be disposed inside the tube or pushable coil. The tube or pushable coil can be advanced over one side or both sides of each suture loop to push. The tube, pushable coil, or wire can be retracted as necessary into the catheter when not needed.

[00806] Referring now to Figure 189, an example embodiment of an actuation or control mechanism 3800 includes a first catheter 3811, a second catheter 3821, and single line 3830, such as a wire or suture. The first catheter 3811 and line 3830 are configured to move a first gripping member 3810 in the direction X, and the second catheter 3821 and line 3830 configured to move a second gripping member 3820 in the direction Z. Movement of the gripping member 3810 in the direction X will adjust the width W of a first opening 3816 between the first gripping member 3810 and a first paddle 3814, and movement of the second gripping member 3820 in the direction Z will adjust the width H of a second opening 3826 between the second gripping member 3820 and a second paddle 3824. The line 3830 extends from a delivery device 3802 through the catheters 3811, 3821 and is threaded through openings in both gripping member 3810, 3820. Each catheter 3811, 3821 is configured to engage and

move the corresponding gripping member 3810, 3820. In particular, the first catheter 3811 is configured to be pushed in the direction Y while the line 3830 is payed out of the second catheter 3821 or tension in the line 3830 is reduced. The first catheter 3811 is configured to be pulled in the direction Y while the line 3830 is pulled into the first catheter 3811 or tension in the line is increased. Movement of the first catheter 3811 in the direction Y causes the first catheter 3811 to move the first gripping member 3810 in the direction X. Similarly, the second catheter 3821 is configured to be pushed in the direction M while the line 3830 is payed out of the first catheter 3811 or tension in the line 3830 is reduced. The second catheter 3821 is configured to be pulled in the direction M while the line 3830 is pulled into the second catheter 3821 or tension in the line 3830 is increased. Movement of the second catheter 3821 in the direction M causes the second catheter 3821 to move the second gripping member 3820 in the direction H. In an alternative embodiment, the control mechanism 3800 described above with reference to Figure 189 can include a first flexible wire with a loop (e.g., the flexible wire 3714 with the loop 3716 shown in Figure 188) and a second flexible wire with a loop (e.g., the flexible wire 3724 with the loop 3726 shown in Figure 188), and the single line 3830 extends through the loop 3716, 3726 of each of the wires 3830.

[00807] Referring to Figure 190, an example embodiment of an actuation or control mechanism 3900 includes a single line 3930, such as a suture or wire, that is removably attached to first and second clasps or gripping members 3910, 3920 and removably fixed between a shaft or positioning shaft 3904 and a shaft or device shaft 3906 of an implantable device. While described as two shafts 3904, 3906, these could be configured as a single shaft passing through a loop of line 3930, e.g., and can be retractable from the loop to release the line. The shafts 3904, 3906 are similar to the hollow positioning and device shafts 3510, 3520, described in more detail above. The single line 3930 is connected at a connection 3908 between the shafts 3904, 3906, such that the single line 3930 can separately control the gripping members 3910, 3920. That is, movement of a first portion 3932 of the line 3930 in a direction Y will adjust a width W between the first gripping member 3910 and a first paddle 3914 but will not adjust a width H between the second gripping member 3920 and a second paddle 3924. Similarly, movement of a second portion 3934 of the line 3930 in a direction M will adjust a width H between the second gripping member 3920 and a second paddle 3924 but will not adjust the width W between the first gripping member 3910 and the first paddle 3914. After the valve repair device is in a closed position and secured to the native valve tissue, the positioning shaft 3904 is detached from the device shaft 3906. Decoupling the shafts 3904, 3906 releases the line 3930 from the connection 3908. The line 3930 can then be retracted into the catheter 3902 to release the gripping members 3910, 3920 by pulling one end of the line 3930 into the catheter 3902. Pulling one end of the line 3930 into the catheter 3902 pulls the other end of the line 3930 through the gripping members 3910, 3920 and then

into the catheter 3902. Any of the lines described herein can be retracted in this manner. While described here as a single line, a similar configuration could also be used where line 3930 is two separate lines each connecting in a similar way to a respective clasp or gripping member 3910, 3920, and with each of the separate lines attaching to the shafts 3904, 3906 or to a combined single shaft (e.g., that passes through loops at the ends of the two lines and can be retracted to release the two lines).

[00808] Referring now to Figures 208A, 208B, 209A, and 209B, an example implantable prosthetic device 4100, such as the devices described in the present application, is shown anchored to native leaflets 20, 22. The device 4100 includes a coaption or spacer element 4102 and anchors 4104. The anchors 4104 attach the device 4100 to the leaflets 20, 22. As can be seen in Figure 208B, first and second gaps 26A, 26B remain between the closed leaflets 20, 22 after the device 4100 is deployed. The coaption element 4102 includes first and second auxiliary, inflatable coaption or spacer elements 4106, 4108 that are shown in a deflated condition in Figures 208A and 208B.

[00809] Referring now to Figures 209A, 209B, the device 4100 is shown with the auxiliary coaption elements 4106, 4108 in an inflated condition. The first and second auxiliary coaption elements 4106, 4108 can be inflated to fill the first and second gaps 26A, 26B. Filling the gaps 26A, 26B allows the leaflets 20, 22 to more fully seal around the device 4100. The auxiliary coaption elements 4106, 4108 are independently inflatable so that the first auxiliary coaption element 4106 can be inflated to a different size than the second auxiliary coaption element 4108 to fill different size gaps 26A, 26B.

[00810] Referring now to Figures 210A and 210B, an example expandable coaption or spacer element 4200 for use with a prosthetic implantable device of the present disclosure is shown. Referring now to Figure 210A, the expandable coaption element 4200 is shown in a compressed condition. The expandable coaption element 4200 is formed from a coiled wire 4202 that is retained in the compressed condition by a retaining element 4204. Once the coaption element 4200 is in a desired location, an actuation line or actuation suture 4206 is used to pull the retaining element 4204 in an actuation direction 4208. Removing the retaining element 4204 allows the coaption element 4200 to expand in an expansion direction 4210 to a larger, expanded size. The coaption element 4200 can be used as the auxiliary coaption element 4106, 4108 in the embodiment of Figures 208A, 208B, 209A, and 209B.

[00811] Referring now to Figures 211A and 211B, an example implantable prosthetic device 4300, such as the devices described in the present application, is shown. The device 4300 extends from a proximal end 4301 to a distal end 4303. Like the device 4100 described above, the device 4300 includes a coaption or spacer element 4302 that has first and second auxiliary, inflatable coaption or spacer elements 4306, 4308 that are shown in a deflated condition in Figure 211A. Each auxiliary coaption element 4306, 4308 extends from a proximal end 4306A, 4308A to a distal end 4306B, 4308B.

Referring now to Figure 211B, the device 4300 is shown with the auxiliary coaption elements 4306, 4308 in an inflated condition. When inflated, the proximal ends 4306A, 4308A and distal end 4306B, 4308B have different sizes such that the auxiliary coaption elements 4306, 4308 increase in size from the proximal 4306A, 4308A to distal ends 4306B, 4308B. In certain embodiments, the proximal ends are larger than the distal ends. The varying width of the auxiliary coaption elements 4306, 4308 improves coaption between leaflets (not shown) and the device 4300 where the gaps between leaflets change in size from the proximal to distal ends 4301, 4303 of the device 4300.

[00812] Referring now to Figures 212A, 212B, 213A, 213B, 214, 215A, 215B, 216A, 216B, 217A, 217B, and 218 an example implantable prosthetic device 4400, such as the devices described in the present application, is shown. Referring now to Figures 212A, 212B, 213A, 213B, and 214, the device 4400 includes a coaption or spacer element 4402, anchors 4404, and an attachment portion 4406. The attachment portion 4406 is a threaded rod that extends from the coaption element 4402 to receive an auxiliary coaption or spacer element 4410. The auxiliary coaption element 4410 has an inverted L-shape with an attachment opening 4412 and a spacer body 4414. The attachment opening 4412 receives the attachment portion 4406 to attach the auxiliary coaption element 4410 to the device 4400. The spacer body 4414 extends along one side of the coaption element 4402 to fill a gap (e.g., gaps 26A, 26B shown in Figure 208B) between the leaflets. The auxiliary coaption element 4410 can have any suitable shape and can vary in width and size like the inflatable spacers 4106, 4108, 4306, and 4308 described above.

[00813] Referring now to Figure 214, the auxiliary coaption element 4410 is shown being assembled to the device 4400. The auxiliary coaption element 4410 can be attached to the attachment portion 4406 of the device 4400 after the device 4400 has been implanted between the native leaflets (not shown) and anchored in place via the anchors 4404. As can be seen in Figures 215A and 215B, the auxiliary coaption element 4410 is secured to the attachment portion 4406 with a nut 4408 after being attached to the device 4400. In certain embodiments, the attachment opening 4412 in the auxiliary coaption element 4410 is a slot to allow for lateral adjustment of the position of the auxiliary coaption element 4410 without fully removing the auxiliary coaption element 4410 from the device 4400. That is, the nut 4408 can be loosened to allow the position of the auxiliary coaption element 4410 to be adjusted after assembly to the device 4400.

[00814] Referring now to Figures 216A, 216B, 217A, 217B, the device 4400 and auxiliary coaption element or spacer 4410 are shown with different means of attaching the auxiliary coaption element 4410 to the device 4400 than the threaded rod and nut 4408 described above. The device 4400 shown in Figures 216A and 216B includes a circular magnet 4407 surrounding the attachment portion 4406. The auxiliary coaption element 4410 shown in Figures 217A and 217B includes a similarly shaped

magnet 4413 surrounding the attachment opening 4412 (which is shown as a hole, rather than a slot). When the auxiliary coaption element 4410 is assembled to the device 4400 opposite poles of two magnets 4407, 4413 face each other and are attracted to each other and retain the auxiliary coaption element 4410 on the device 4400 by way of magnetic attractive forces. In some embodiments, a plurality of magnets are provided on the device 4400 and/or the auxiliary coaption element 4410.

[00815] Referring now to Figure 218, a double-sided auxiliary coaption element 4420 for attachment to the device 4400 is shown. The auxiliary coaption element 4420 has an inverted U-shape with an attachment opening 4422 disposed between two coaption portions 4424. Like the auxiliary coaption element 4410 described above, the attachment opening 4422 receives the attachment portion 4406 to attach the auxiliary coaption element 4420 to the device 4400. The coaption portions 4424 extend along both sides of the coaption element 4402 to fill gaps (e.g., gaps 26A, 26B shown in Figure 208B) between the leaflets. The auxiliary coaption element 4420 can have any suitable shape and can vary in width and size like the inflatable spacers 4106, 4108, 4306, and 4308 described above.

[00816] Referring now to Figures 219A, 219B, an example implantable prosthetic device 4500, such as the devices described in the present application, is shown. The device 4500 includes a coaption or spacer element 4502 and attachment portions 4504 arranged on opposite sides of the coaption element 4502. The attachment portions 4504 are configured to receive auxiliary coaption or spacer elements of varying shapes and sizes (Figures 220A–220E). In the illustrated embodiment, the attachment portions 4504 are shown as hoops that receive posts or pins 4512 of the auxiliary coaption elements (Figures 220A–220E). Like the spacers 4410 shown above, the auxiliary coaption elements 4510A, 4510B, 4520A, 4520B, 4530A, 4530B, 4540A, 4540B, 4550A, 4550B shown in Figures 220A–220E extend along one or both sides of the coaption element 4502 to fill a gap (e.g., gaps 26A, 26B shown in Figure 208B) between the leaflets. To accommodate gaps of different sizes and shapes, the variety of auxiliary coaption elements 4510A, 4510B, 4520A, 4520B, 4530A, 4530B, 4540A, 4540B, 4550A, 4550B are provided with semi-circle, rounded triangular, or other suitable shapes in a range of sizes. Different size and shape auxiliary coaption elements 4510A, 4510B, 4520A, 4520B, 4530A, 4530B, 4540A, 4540B, 4550A, 4550B can be attached to the coaption element 4502 to accommodate gaps that are different shapes and sizes on opposite sides of the coaption element 4502.

[00817] Referring now to Figures 221–223, an example implantable prosthetic device 4600 is shown. Referring now to Figure 221, the device 4600 is shown cut from a flat sheet of material 4602, such as Nitinol, into a lattice-like shape formed from a plurality of struts. The coaption portion 4604 of the device 4600 includes auxiliary coaption portions 4606 that expand outwards from the coaption element 4602 when the device 4600 is formed into a three-dimensional shape. The auxiliary coaption portions 4606 can be longer struts that are curved before the prosthetic device is expanded. Referring now to

Figure 223, when the device is expanded, the longer curved struts expand to form the auxiliary coaption portions 4606. The expanded auxiliary coaption portions 4606 fill or partially fill gaps 26 between the native leaflets 20, 22 when the device 4600 is implanted between the native leaflets 20, 22. In some embodiments, the coaption portion 4604 of the device is covered with a cover (not shown) can be a cloth material such as polyethylene cloth of a fine mesh. The cloth cover can provide a blood seal on the surface of the spacer, and/or promote rapid tissue ingrowth.

[00818] Referring now to Figures 224–225, an example implantable prosthetic device 4700 is shown. Referring now to Figure 224, the device 4700 is shown cut from a flat sheet of material 4702, such as Nitinol. The device 4700 includes coaption portions 4704, inner paddle portions 4706, outer paddle portions 4708, and a middle portion 4710. Referring now to Figure 225, the device 4700 is shown folded into a three-dimensional shape. The material 4702 is folded at the middle portion 4710 so that the various portions of each side of the material 4702 align. When the coaption portions 4704 are aligned, a matrix of cut-outs in the material 4702 form the coaption portion 4704 into a three-dimensional shape similar to the shape of the coaption elements described above.

[00819] An example embodiment of an implantable prosthetic device 23200 is illustrated in Figures 232A-232B. The device 23200 can be the same as, substantially the same as, or similar to the device 500A, except the paddles 23202 of the device 23200 are configured to form an area 23304 (See Figure 233A) where the paddles are parallel or substantially parallel to enhance leaflet engagement. The implantable device 23200 can include any other features for an implantable prosthetic device discussed in the present application, and the device 23200 can be positioned to engage valve tissue 20, 22 as part of any suitable valve repair system (e.g., any valve repair system disclosed in the present application).

[00820] As shown in Figures 232A and 232B, the prosthetic device 23200 comprises paddle frames 23202, a coaption element 23204, outer paddle portions 23206, and inner paddle portions 23208. The paddle frames 23202, the paddle portions (23206 & 23208), and the coaption element 23204 work together to capture and secure the leaflets of a native valve. In addition to the paddle portions 23206, 23208, the paddle frames 23202 and the coaption element 23204, a clasp 23210 is connected to each inner paddle portion 23208 and serves to secure the leaflets during the installation of the prosthetic device 23200. In the cross-section view of Figure 232B, the outer paddle 23206 and inner paddle 23208 portions of the coaption element 23204 are illustrated. Also visible are the clasp 23210 portions. In particular, the cross-section view of Figure 232B shows a flexible portion 23212 extending between fixed and movable portions of the clasp 23210.

[00821] As is annotated in Figures 233A-233B, portion of the paddle frames 23202 is configured to be parallel or substantially parallel between each paddle frame 23202 when in use. This forms an area 23304 in which an enhanced level of leaflet tissue clamping is exhibited. In the illustrated

example, the area 23304 is rectangular or substantially rectangular. However, in some example embodiments the area 23304 can have other shapes. For example, the area 23304 can be somewhat tapered in other embodiments to correspond to a tapered shape of native valve leaflets.

[00822] Figures 234A-234B illustrate an implantable prosthetic device 23200 which has captured native valve leaflets, such as native valve leaflets 20 and 22 or tricuspid leaflets. Device 23200 can also be covered similar to other devices herein. As illustrated, the leaflets 20 and 22 are captured between paddle frames 23202 in an area in which the paddle frames are parallel or substantially parallel to each other, as opposed to an area where the paddle frames curve away from each other. In the illustrated example, this parallel configuration provides an area extending from dashed line 23408 to dashed line 23410 where the leaflets are pressed together at the sides of the coaption element, rather than at a single point. The distance where the leaflets are pressed together can be from 1-10mm, such as from 2-5 mm, such as from 3-4 mm. The cross-section view of Figure 234B illustrates that the leaflets 20 and 22 are pressed together by the paddle frames 23202 and no blood will flow through the native valve in this area during diastole or systole.

[00823] An advantage of the embodiment illustrated by Figures 234A-234B is illustrated in Figures 235A-235B. As shown at 23502, the first leaflet extends farther into the prosthetic device 23200 than the second leaflet 22. It should be noted, that the use of “first” and “second” is to simplify the explanation of the figure. As such, a first leaflet 20 can be any leaflet (e.g., either an anterior or posterior leaflet, etc.) as is also the case with a second leaflet 22. As was noted elsewhere herein, during the installation of the prosthetic device 23200, the leaflets (20, 22) can be captured individually before being clamped in place by the coaption element and paddle frame. The result may be a misalignment and/or difference in depth of insertion as illustrated at 23502. In some example embodiments, paddle frames may have a shorter parallel section or no parallel section, resulting in a narrower section of contact between the leaflets along the paddle frames. Because of the parallel or substantially parallel alignment of the example paddle frames (23202) the leaflets are still pressed together along the length of the paddle frames between lines 23408 and 23410. The distance between lines 23408 and 23410 where the leaflets are pressed together by the paddles frames is less than in the example illustrated by Figure 234A, but there is still an area where the leaflets are pressed together. The cross-section view of Figure 235B illustrates that the leaflets 20 and 22 are pressed together by the paddle frames 23202 and no blood will flow through the native valve in this area during diastole or systole, even though the leaflets are offset in the device. In one example embodiment, the leaflets 20, 22 will be pressed together by the paddles 23202 as long as some portion of each leaflet is in the area 23304 (See Figure 233A) where the paddle frames 23302 are parallel and close enough to press the leaflets together (i.e.

the distance between the paddle frames 23302 in the area 23304 is less than or equal to the stacked thickness of the two leaflets).

[00824] Figure 236 illustrates an alternate view of the prosthetic device 23200 of Figure 233A. If the view of Figure 233A were to be considered a “front” view, the view of Figure 236 would be a side view. Because the prosthetic device 23200 is optionally symmetrical or substantially symmetrical from front to back and from side to side, Figure 236 could represent either a left or right-side view of the prosthetic device 23200. Visible at the upper end of the figure is the collar 23602 of the prosthetic device 23200. The outer paddle 23206 is visible from top to bottom of the figure. A paddle frame 23202 is also visible. As was noted in Figure 234A, the paddle frame 23202 has an area 23406 along which the paddle frames of the prosthetic devices are parallel or substantially parallel. In the illustrated example embodiment, the outer edges 23604 of each paddle frame 23202 are parallel or substantially parallel to a vertical axis 23606 of the prosthetic device 23200. This vertical extension of the outer edges 23604 of the paddle frames 23202 gives the paddle frames 23202 and the outside of the device a rectangular shape. This rectangular shape permits a plurality of prosthetic devices 23200 to be placed adjacent to one another.

[00825] In certain circumstances, the repair of a valve, such as a mitral valve or tricuspid valve may require more than one prosthetic device 23200. In such a case, a second (or more) prosthetic device 23200 can be installed. In certain circumstances, it may be desirable that this second prosthetic device 23200 be installed adjacent to a first prosthetic device 23200. The parallel configuration of the portions 23604 and the resulting generally rectangular shape of the device allows two (or more) prosthetic devices 23200 to be installed adjacent to one another with parallel or substantially parallel paddle frame portions 23604 abutting or nearly abutting one another. This positioning is illustrated in Figure 237. In Figure 237, two prosthetic devices 23200 are positioned adjacent to each other such that the paddle frames 23202 of each device are parallel or substantially parallel as illustrated in Figure 237. The close or abutting parallel paddles frames 23202 helps reduce or eliminate leakage or regurgitation between portions of leaflets that are between the devices 23200

[00826] A prosthetic device 23200 installed on leaflets 20, 22 of a native heart valve, such as, for example, a mitral valve MV is illustrated in Figure 238A. As shown, the prosthetic device 23200 is positioned at a location along the leaflets of the mitral valve MV. Figure 238B shows a cross-section of a first leaflet 20 and a second leaflet 22. If a single prosthetic device 23200, as illustrated, is insufficient to repair the native valve to reduce regurgitation to a desired level or eliminate regurgitation, a second device 23200 can be installed. In an installation using a second prosthetic device 23200, positioning the devices in close proximity can prevent regurgitation between leaflet portions that are between the two prosthetic devices.

[00827] Having a first prosthetic device 23200 and a second prosthetic device 23200, each configured with a parallel or substantially parallel portion of paddle frame permits a side-by-side installation as illustrated in Figure 239A. As shown, the leaflets 20, 22 of a mitral valve MV is secured by two prosthetic devices 23200 positioned adjacent to one another such that the paddle frame of the first prosthetic device 23200 is parallel or substantially parallel to the paddle frame of the second prosthetic device 23200. Thus, the devices can be positioned very close to one another, minimizing any gap 23902 between the two prosthetic devices 23200. As illustrated in Figure 239B, the portions of the leaflets 20 and 22 that are between the two devices are held together by the paddle frames 23202 such that these leaflet portions do not open during ventricular systole and thereby prevent a regurgitant jet between the devices.

[00828] Figures 235A-235B and the corresponding description show and describe how sections of paddle frame 23202 that are parallel or substantially parallel cause coaption of a portion of a first leaflet with a portion of a second leaflet around the coaption element, even though the first leaflet 20 and second leaflet 22 are misaligned. In the embodiment of Figures 235A and 235B, if any portion of the leaflets 20, 22 are in the larger, parallel area 23304, the leaflets will be pressed together by the paddle frames. In an example embodiment, this larger, parallel area 23304 can also be utilized to prevent regurgitation through leaflet portions that are between two adjacent devices.

[00829] The prosthetic devices 23200 of Figure 239B are illustrated as vertically aligned such that the edges of the leaflets 20 and 22 of the native valve are captured at the same or generally the same depth in the prosthetic devices 23200. However, such an installation could be very difficult to achieve and/or confirm.

[00830] Figure 240A illustrates a vertical misalignment between two prosthetic devices 23200 installed on a native valve, such as a mitral valve. As can be observed in Figure 240A, a lower portion of the leaflets 20, 22 is within the area 23304 of both devices, along which the paddle frames of the first prosthetic device are parallel or substantially parallel. As was noted earlier, this area 23304 provides a clamping action of the leaflets. Thus, as illustrated in Figure 240B, the area 23904 between the leaflets 20 and 22 is held together such that a gap between the leaflets does not form between two prosthetic devices 23200, even though the two valve leaflets are vertically misaligned on the valve. The path of the leaflets in Fig. 239B and 240B remains the same or similar.

[00831] As illustrated in Figures 8-12, the corresponding description, and elsewhere herein, a clasp is used to secure valve leaflets during installation of the prosthetic devices disclosed herein, including the prosthetic device 23200. An example installation process is illustrated in Figures 15-20 and the accompanying written description. In that described process, a clasp associated with each paddle portion of the coaption element is used to capture a valve leaflet. In order to securely grasp the leaflet,

the clasps are equipped with barbs which can partially or completely puncture the leaflet. Referring to Figures 241 and 242, an example embodiment of the barbed portion of a clasp 24100 is illustrated. Shown is an optional eyelet 24102 and barbs 24104 which are located in a barb support portion 24106 of the clasp 24100. Visible in the figure are portions of the clasp 24100 that are configured to increase the flexibility of the barb support portion 24106 of the clasp 24100. The increase of the flexibility of the barb support portion 24106 of the clasp 24100 can be accomplished in a wide variety of different ways. In the illustrated embodiment, cutouts 24108 to increase the flexibility of the barb support portion 24106 of the clasp 24100. However, in some example embodiments, the flexibility can be increased by reducing the thickness in a select area or areas, making portions of the clasp from different materials, heat and or chemical treatment of different portions of the clasps, etc. Any manner of increasing the barb support portion can be used.

[00832] In one example embodiment, the flexibility of the barb support portion 24106 is configured such that the barbs rotate and pull out of the leaflet upon application of a predetermined pulling force. In one example embodiment, the predetermined pulling force is selected such that the barbs rotate and pull out of the leaflet before damage to the leaflet occurs. In one example embodiment the predetermined pulling force is selected such that the paddles and paddle frames first flex and open or partially open and then the barbs rotate and pull out of the leaflet. Figure 241 illustrates the barb support in a “normal” or unflexed position while Figure 242 illustrates the barb support portion 24106 of the clasp 24100 in a flexed position.

[00833] Figures 243A-243H illustrate an example behavior of a clasp configured according to Figures 241 and 242. Figures 243B-243H illustrate the barb support portion 24106 as tension is applied between the clasp 24100 and the leaflet 20. The tension can be applied for a variety of different reasons. In one example embodiment, the tension results from capturing the leaflets with the clasps, manipulating one leaflet while a second leaflet is captured, closing of the paddles after the leaflet is grasped by the clasp and/or pressure applied to the device by blood due to the beating of the heart.

[00834] In Figure 243A, the barbs 24104 of the clasp 24100 are embedded in a leaflet 20 (only a small portion of the leaflet is illustrated). In use with a prosthetic device 23200 as illustrated in Figures 18-20, the clasp is affixed at the base of the paddle. As mentioned above, various situations can cause tension to be applied such that the barb of the clasp pulls against the leaflet. In Figure 243A, this tension could be caused by the leaflet 20 moving upward and/or laterally while the clasp 24100 remains stationary, the leaflet 20 remaining stationary while the clasp 24100 moves downward and/or laterally, or a combination in which both the leaflet 20 and the clasp 24100 moves. In each instance, tension between the leaflet 20 and the clasp 24100 results. As the application of tension continues, pressure against barb 24104 causes the barb support portion 24106 to begin to rotate away from the leaflet 20

in a clockwise motion relative to the moveable arm 134 of the clasp (as illustrated in Figure 243B). As the application of tension becomes greater, the barb support portion 24106 continues to rotate away from the leaflet 20 as illustrated in Figure 243C. As shown at 24306, the barb 24104 begins to withdraw from the leaflet 20. Figure 243D illustrates continued rotation of the barb support portion 24106, allowing the barb 24104 to further withdraw 24308 from the leaflet 20. Figure 243E represents a continuation of this process, with the barb support portion rotated farther away from the leaflet 20 than was illustrated in Figure 243D, and the barb 24104 itself withdrawing even farther from the leaflet 20. This process continues as illustrated in Figure 243F, which shows the barb 24104 almost completely withdrawn from the leaflet 20. As shown in Figure 243G, the barb 24104 will eventually withdraw from the leaflet 20 and the barb support portion will return to its original or shape set position as illustrated in Figure 243H, positioning the barb 24104 to be aligned to re-engage the leaflet 20 as needed.

[00835] Figures 244A-244E illustrate the process of Figures 243A-243H with an example schematic illustration of a prosthetic device 24402 and leaflets (20 and 22) of a mitral valve. Manipulation of the device during the installation of the prosthetic device 24402 can causes the prosthetic device 24402 to be pushed deeper into the leaflets (20 and 22) as illustrated in Figure 244B. As this happens, the barbs 24104 of the clasps are pulled away from the cap 24410 portion of the prosthetic device 24402. This causes the paddle assembly 24412 to flex and partially open away from the coaption portion 24414 of the prosthetic device 24402.

[00836] As shown in Figure 244C, as the prosthetic device 24402 is pushed farther downward relative to the leaflets (20 and 22) of the mitral valve, the barb portions 24104 of the clasps 24100 flex and start to be withdrawn from the leaflets (20 and 22).

[00837] Figure 244D illustrates the release of the prosthetic device 24402 from the leaflets (20 and 22) as the barbs 24416 are completely withdrawn from the leaflets (20 and 22). After the leaflets (20 and 22) are released, the paddles return to their original position as illustrated in Figs. 244E and 244A and the barbs 24104 and clasps 24100 return to a position adjacent to the paddles as illustrated in Figure 244E.

[00838] Figures 245A-245E illustrate the process of Figures 244A-244E using an example prosthetic device 24502, Figure 245A illustrates the prosthetic device 24502 with the barbs 24104 engaged in leaflets (20 and 22). With the exception of the flexible clasp and optionally paddle frames that provide parallel leaflet engagement areas, the prosthetic device 24502 can be the same as, substantially the same as, or similar to the device 500A. Figures 245B-245E demonstrate the process of releasing the leaflets (20 and 22) in the same manner as was described in Figures 244B-244E.

[00839] Figures 244A-244E and 245A-245E demonstrate conditions in which a prosthetic device could be moved into the native valve and pull on the leaflets. Figures 16-20 show an installation process of

the prosthetic devices disclosed herein. Figure 18 shows that a first clasp can be engaged with a first leaflet, while a second clasp is not engaged with the second leaflet.

[00840] Referring to Figure 246, in an attempt to capture a second leaflet with the second clasp, an installer may pull (indicated by arrow 24606) the prosthetic device 24502 with the attached first leaflet 20 toward the second leaflet 22 to capture the second leaflet (The device illustrated by Figure 246 is the device 24502, but can be any of the devices disclosed herein). In many cases, the second leaflet can be captured in this manner. In some cases, the first leaflet 20 could be pulled excessively to reach the first leaflet 20. The clasp 24100 illustrated by Figures can be used to protect the first leaflet. In particular, the clasp 24100 will release from the first leaflet in the manner illustrated by Figures 243A-243H. The clasp will also open somewhat as the operator pulls the device and the first leaflet. This is illustrated in Figure 246. As illustrated by Figures 243A-243H, the barb support 24106 can bend away from the first leaflet 20 and release the barb from the first leaflet 20, when a predetermined tensile force is applied between the leaflet and the clasp.

[00841] While various inventive aspects, concepts and features of the disclosures may be described and illustrated herein as embodied in combination in the example embodiments, these various aspects, concepts, and features may be used in many alternative embodiments, either individually or in various combinations and sub-combinations thereof. Unless expressly excluded herein all such combinations and sub-combinations are intended to be within the scope of the present application. Still further, while various alternative embodiments as to the various aspects, concepts, and features of the disclosures—such as alternative materials, structures, configurations, methods, devices, and components, alternatives as to form, fit, and function, and so on—may be described herein, such descriptions are not intended to be a complete or exhaustive list of available alternative embodiments, whether presently known or later developed. Those skilled in the art may readily adopt one or more of the inventive aspects, concepts, or features into additional embodiments and uses within the scope of the present application even if such embodiments are not expressly disclosed herein.

[00842] Additionally, even though some features, concepts, or aspects of the disclosures may be described herein as being a preferred arrangement or method, such description is not intended to suggest that such feature is required or necessary unless expressly so stated. Still further, example or representative values and ranges may be included to assist in understanding the present application, however, such values and ranges are not to be construed in a limiting sense and are intended to be critical values or ranges only if so expressly stated.

[00843] Moreover, while various aspects, features and concepts may be expressly identified herein as being inventive or forming part of a disclosure, such identification is not intended to be exclusive, but rather there may be inventive aspects, concepts, and features that are fully described herein without

being expressly identified as such or as part of a specific disclosure, the disclosures instead being set forth in the appended claims. Descriptions of example methods or processes are not limited to inclusion of all steps as being required in all cases, nor is the order that the steps are presented to be construed as required or necessary unless expressly so stated. Further, the treatment techniques, methods, operations, steps, etc. described or suggested herein can be performed on a living animal or on a non-living simulation, such as on a cadaver, cadaver heart, simulator (e.g. with the body parts, tissue, etc. being simulated), etc. The words used in the claims have their full ordinary meanings and are not limited in any way by the description of the embodiments in the specification.

- 1 -

Edwards Lifesciences Corporation
PCT/US2019/055320

5 August 2020
EM 6024-01WO RF/gei

Amended claims (clean copy)

1. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a strip of material;

5 a coaption element formed from the strip of material; and

a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

10 wherein the paddles are configured to attach to the native valve of the patient.

2. The valve repair device of claim 1, wherein the strip of material comprises metal strands that are woven together.

3. The valve repair device of any of the preceding claims, wherein the strip of material comprises an electrospun material.

15 4. The valve repair device of any of the preceding claims, wherein the strip of material comprises electrospun metal fibers.

5. The valve repair device of any of the preceding claims, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

20 6. The valve repair device of any of the preceding claims, wherein the strip of material is folded to form the coaption element and the pair of paddles.

7. The valve repair device of any of the preceding claims, wherein the strip of material is folded to form a plurality of layers.

8. The valve repair device of claim 7, wherein the coaption element is formed from four layers of the strip of material.

- 2 -

9. The valve repair device of claim 7, wherein the paddles comprise an inner paddle portion and an outer paddle portion, and the inner paddle portion is formed from two layers of the folded strip of material.

10. The valve repair device of any of the preceding claims, wherein the
5 paddles are disposed over an extension member.

11. The valve repair device of claim 10, wherein the extension member comprises a hoop and the strip of material is folded around the hoop.

12. The valve repair device of claim 11, wherein the paddles comprise an inner paddle portion and an outer paddle portion and the fold of the strip of material
10 around the hoop is arranged between the inner and outer paddle portions.

13. The valve repair device of any of the preceding claims, wherein the strip of material extends from a beginning in the paddle portion to an end in the paddle portion.

14. The valve repair device of claim 13, wherein the paddles comprise an
15 inner paddle portion and an outer paddle portion, and wherein the beginning and end of the strip of material are located in the paddle portions.

15. The valve repair device of any of the preceding claims, further comprising a base assembly that comprises:

20 a shaft;
a collar that the shaft extends through; and
a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;
wherein the pair of paddles are attached to the cap; and
wherein movement of the cap toward the collar causes the pair of
25 paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

- 3 -

16. The valve repair device of any of the preceding claims, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

17. A method of manufacturing a valve repair device for repairing a native
5 valve of a patient, the method comprising:

folding a strip of material to form a coaption element and a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient.

10 attaching the portion of the strip of material forming the coaption element to a collar; and

attaching the portion of the strip of material forming the paddles to a cap, wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the
15 pair of paddles to move to the open position.

18. The method of claim 17, wherein the strip of material comprises metal strands that are woven together.

19. The method of any of claims 17 and 18, wherein the strip of material comprises an electrospun material.

20 20. The method of any of claims 17–19, wherein the strip of material comprises electrospun metal fibers.

21. The method of any of claims 17–20, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

22. The method of any of claims 17–21, wherein the strip of material is folded
25 to form the coaption element and the pair of paddles.

23. The method of any of claims 17–22, wherein the strip of material is folded to form a plurality of layers.

- 4 -

24. The method of claim 23, wherein the coaption element is formed from four layers of the strip of material.

25. The method of claim 23, wherein the paddles comprise an inner paddle portion and an outer paddle portion, and the inner paddle portion is formed from
5 two layers of the folded strip of material.

26. The method of any of claims 17–25, wherein the paddles are disposed over an extension member.

27. The method of claim 26, wherein the extension member comprises a hoop and the strip of material is folded around the hoop.

10 28. The method of claim 27, wherein the paddles comprise an inner paddle portion and an outer paddle portion and the fold of the strip of material around the hoop is arranged between the inner and outer paddle portions.

29. The method of any of claims 17–28, wherein the strip of material extends from a beginning in the paddle portion to an end in the paddle portion.

15 30. The method of claim 29, wherein the paddles comprise an inner paddle portion and an outer paddle portion, and wherein the beginning and end of the strip of material are located in the inner paddle portions.

31. The method of any of claims 17–30, further comprising a base assembly that comprises:

20 a shaft;
a collar that the shaft extends through; and
a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;
wherein the pair of paddles are attached to the cap; and
25 wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

- 5 -

32. The method of any of claims 17–31, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

33. A valve repair device for repairing a native valve of a patient, the valve
5 repair device comprising:

a coaption element having four layers; and

a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient.

10 34. The valve repair device of claim 33, wherein the four layers of the coaption element are formed from a single piece of material.

35. The valve repair device of any of claims 33-34, wherein each layer of the coaption element comprises metal strands that are woven together.

15 36. The valve repair device of any of claims 33-35, wherein each layer of the coaption element comprises an electrospun material.

37. The valve repair device of any of claims 33-36, wherein each layer of the coaption element comprises electrospun metal fibers.

38. The valve repair device of any of claims 33-37, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

20 39. The valve repair device of claim 38, wherein the each of the inner paddle portions connects to two layers of the coaption element.

40. The valve repair device of any of claims 33-39, wherein the paddles are disposed over an extension member.

25 41. The valve repair device of claim 40, wherein the extension member comprises a hoop.

- 6 -

42. The valve repair device of claim 40, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

43. The valve repair device of claim 42, wherein the inner paddle portion is disposed between the extension member and the coaption element.

5 44. The valve repair device of any of claims 33-43, wherein the coaption element has a rectangular cross-section.

45. The valve repair device of any of claims 33-44, wherein the coaption element has two inner layers and two outer layers.

10 46. The valve repair device of any of claims 33-45, wherein each layer has a middle portion extending between two edge portions, and wherein the middle portion is thinner than the two edge portions.

47. The valve repair device of any of claims 33-46, further comprising a base assembly that comprises:

15 a shaft;
a collar that the shaft extends through; and
a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;
wherein the pair of paddles are attached to the cap; and
wherein movement of the cap toward the collar causes the pair of
20 paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

48. The valve repair device of claim 47, wherein the shaft extends between the layers of the coaption element.

25 49. The valve repair device of claim 48, wherein two layers of the coaption element are disposed on each side of the shaft.

- 7 -

50. The valve repair device of claim 48, wherein the coaption element has two inner layers and two outer layers and the shaft extends between the two inner layers.

51. The valve repair device of claim 48, wherein each layer has a middle
5 portion extending between two edge portions, and wherein the middle portion is thinner than the two edge portions.

52. The valve repair device of claim 48, wherein the shaft causes middle portions of each layer to expand outwards.

53. The valve repair device of claim 48, wherein the shaft causes middle
10 portions of the layers on one side of the shaft to spread apart from layers on the other side of the shaft.

54. The valve repair device of any of claims 33-53, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

15 55. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a strip of material;

a coaption element formed from the strip of material;

a collar connected to the coaption element; and

20 a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position; and

wherein the paddles are configured to attach to the native valve of the patient.

25 56. The valve repair device of claim 55, wherein the collar is spaced apart from the paddles.

- 8 -

57. The valve repair device of any of claims 55-56, wherein the collar is connected to a proximal end of the coaption element.

58. The valve repair device of any of claims 55-57, wherein the paddles are connected to a distal end of the coaption element.

5 59. The valve repair device of any of claims 55-58, wherein the strip of material is woven through at least one opening of the collar.

60. The valve repair device of any of claims 55-59, wherein the strip of material is woven through two openings of the collar.

10 61. The valve repair device of any of claims 55-60, wherein the strip of material is woven through at least one arcuate shaped opening of the collar.

62. The valve repair device of claim 61, wherein the at least one opening comprises an open slot.

63. The valve repair device of any of claims 55-62, wherein the strip of material comprises metal strands that are woven together.

15 64. The valve repair device of any of claims 55-63, wherein the strip of material comprises an electrospun material.

65. The valve repair device of any of claims 55-64, wherein the strip of material comprises electrospun metal fibers.

20 66. The valve repair device of any of claims 55-65, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

67. The valve repair device of any of claims 55-66, wherein the paddles are disposed over an extension member.

- 9 -

68. The valve repair device of any of claims 55-67, further comprising a base assembly that comprises:

a shaft that extends through the collar; and

a cap attached to the shaft such that the cap can be moved by the shaft
5 away from the collar;

wherein both of the pair of paddles are attached to the cap; and

wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

10 69. The valve repair device of claim 68, wherein the shaft extends through a central aperture of the collar.

70. The valve repair device of any of claims 55-69, further comprising a clasp associated with each paddle of the pair of paddles, each clasp having at least one barb, a barb support portion, and a moveable arm.

15 71. The valve repair device of claim 70, wherein the clasp includes a flexible portion disposed between the barb support portion and the moveable arm.

72. The valve repair device of claim 71, wherein the paddles and the flexible portions are configured such that pulling on the barbs first causes the paddles to at least partially open and then causes the barb support portion to flex away from
20 the moveable arm.

73. The valve repair device of any of claims 68-72, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

74. A valve repair device for repairing a native valve of a patient, the valve
25 repair device comprising:

a collar having a plurality of engagement portions configured to releasably engage a delivery apparatus;

a coaption element attached to the collar; and

- 10 -

a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

wherein the paddles are circumferentially disposed between the engagement portions; and

5 wherein the paddles are configured to attach to the native valve of the patient.

75. The valve repair device of claim 74, wherein the engagement portions extend radially from the collar.

76. The valve repair device of any of claims 74-75, wherein the collar has
10 two engagement portions that extend from opposite sides of the collar.

77. The valve repair device of any of claims 74-76, wherein the collar has two engagement portions that are circumferentially offset from each other by about 30 to about 150 degrees.

78. The valve repair device of any of claims 74-76, wherein the collar has
15 two engagement portions that are circumferentially offset from each other by about 45 to about 135 degrees.

79. The valve repair device of any of claims 74-76, wherein the collar has two engagement portions that are circumferentially offset from each other by about 60 to about 120 degrees.

20 80. The valve repair device of any of claims 74-76, wherein the collar has two engagement portions that are circumferentially offset from each other by about 75 to about 105 degrees.

81. The valve repair device of any of claims 74-76, wherein the collar has two engagement portions that are circumferentially offset from each other by about
25 180 degrees.

- 11 -

82. The valve repair device of any of claims 74-81, wherein the paddles are circumferentially offset from at least one engagement portion by about half of a circumferential offset between two adjacent engagement portions.

83. The valve repair device of any of claims 74-82, wherein the paddles are
5 circumferentially offset from at least one engagement portion by about 30 to about 150 degrees.

84. The valve repair device of any of claims 74-82, wherein the paddles are circumferentially offset from at least one engagement portion by about 45 to about 135 degrees.

10 85. The valve repair device of any of claims 74-82, wherein the paddles are circumferentially offset from at least one engagement portion by about 60 to about 120 degrees.

86. The valve repair device of any of claims 74-82, wherein the paddles are circumferentially offset from at least one engagement portion by about 75 to about
15 105 degrees.

87. The valve repair device of any of claims 74-82, wherein the paddles are circumferentially offset from at least one engagement portion by about 90 degrees.

88. The valve repair device of any of claims 74-87, wherein the paddles extend from opposite sides of the device.

20 89. The valve repair device of any of claims 74-88, wherein the paddles are circumferentially offset from each other by about 180 degrees.

90. The valve repair device of any of claims 74-89, wherein the strip of material comprises metal strands that are woven together.

91. The valve repair device of any of claims 74-90, wherein the strip of
25 material comprises an electrospun material.

- 12 -

92. The valve repair device of any of claims 74-91, wherein the strip of material comprises electrospun metal fibers.

93. The valve repair device of any of claims 74-92, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

5 94. The valve repair device of any of claims 74-93, wherein the paddles are disposed over an extension member.

95. The valve repair device of any of claims 74-94, further comprising a base assembly that comprises:

a shaft extending through the collar; and

10 a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;

wherein the pair of paddles are attached to the cap; and

wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

96. The valve repair device of any of claims 74-95, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

20 97. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a coaption element; and

a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient;

25 a catch point formed by a portion of at least one of the coaption element and the pair of paddles when the paddles are in the open position; and

a cover connected to the coaption element and the paddles that covers the catch point.

- 13 -

98. The valve repair device of claim 97, wherein the cover extends from the coaption element to the paddles.

99. The valve repair device of any claims 97-98, wherein the cover extends from a proximal end of the device to the paddles.

5 100. The valve repair device of any of claims 97-99, wherein the cover extends from a distal end of the device to the coaption element.

101. The valve repair device of any of claims 97-100, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

10 102. The valve repair device of claim 101, wherein the catch point is formed between the coaption element and the inner paddle portion.

103. The valve repair device of claim 101, wherein the catch point is formed between the inner and outer paddle portions.

104. The valve repair device of any of claims 101-103, wherein the cover extends from the coaption element to the inner paddle portions.

15 105. The valve repair device of any of claims 97-104, wherein the cover extends from a proximal end of the device to the paddles.

106. The valve repair device of any of claims 101-105, wherein the cover extends from a distal end of the device to the inner paddle portions.

20 107. The valve repair device of any of claims 101-106, further comprising gripping members having moveable and fixed arms, wherein the fixed arms are attached to the inner paddle portions of the paddles.

108. The valve repair device of claim 107, wherein the catch point is formed between the gripping member and the inner paddle portion.

- 14 -

109. The valve repair device of claim 107, wherein the catch point is formed between the gripping member and the coaption element.

110. The valve repair device of any of claims 107-109, wherein the cover extends from the coaption element to the moveable arms of the gripping members.

5 111. The valve repair device of any of claims 107-110, wherein the cover extends from a proximal end of the device to the gripping members.

112. The valve repair device of any of claims 107-111, wherein the cover extends from a proximal end of the device to the moveable arms of the gripping members.

10 113. The valve repair device of any of claims 107-112, wherein the cover extends from a distal end of the device to the gripping members.

114. The valve repair device of any of claims 107-113, wherein the cover extends from a distal end of the device to the moveable arms of the gripping members.

15 115. The valve repair device of any of claims 97-114, wherein the paddles are each disposed over an extension member.

116. The valve repair device of claim 115, wherein the cover covers at least a portion of the extension member.

20 117. The valve repair device of any of claims 115 and 116, wherein the cover covers at least a portion of the extension member and paddles.

118. The valve repair device of claim 115, wherein the cover extends from a proximal end of device to cover at least a portion of the extension members and the paddles.

- 15 -

119. The valve repair device of claim 115, wherein the cover extends from a distal end of device to cover at least a portion of the extension members and the paddles.

120. The valve repair device of any of claims 97-119, further comprising a
5 base assembly that comprises:

a shaft;

a collar that the shaft extends through;

a cap attached to the shaft such that the cap can be moved by the shaft
away from the collar;

10 wherein the pair of paddles are attached to the cap;

wherein movement of the cap toward the collar causes the pair of
paddles to move to the closed position, and movement of the cap away from the
collar causes the pair of paddles to move to the open position.

121. The valve repair device of claim 120, wherein the cover covers at least
15 a portion of the cap and paddles.

122. The valve repair device of any of claims 97-121, wherein the catch point
is formed between the coaption element and the paddles when an angle between
coaption element and paddles is greater than about 120 degrees.

123. The valve repair device of any of claims 97-122, wherein the catch point
20 is formed between the coaption element and the paddles when an angle between
coaption element and paddles is greater than about 150 degrees.

124. The valve repair device of any of claims 97-123, wherein the catch point
is formed between the coaption element and the paddles when an angle between
coaption element and paddles is greater than about 180 degrees.

25 125. The valve repair device of any of claims 97-124, wherein the cover
comprises metal strands that are woven together.

- 16 -

126. The valve repair device of any of claims 97-125, wherein the strip of material comprises an electrospun material.

127. The valve repair device of any of claims 97-126, wherein the strip of material comprises electrospun metal fibers.

5 128. The valve repair device of any of claims 97-127, wherein the strip of material comprises a cloth material.

129. The valve repair device of any of claims 97-128, wherein the strip of material comprises polyethylene.

10 130. The valve repair device of any of claims 97-129, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

131. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a coaption element;

15 a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

a first cover extending from a distal end of the device and covering at least a portion of the paddles; and

20 a second cover extending from a proximal end of the device and covering at least a portion of the coaption element; and

wherein the paddles are configured to attach to the native valve of the patient.

132. The valve repair device of claim 131, wherein the first cover entirely covers the paddles.

25 133. The valve repair device of any of claims 131-132, wherein the second cover entirely covers the coaption element.

- 17 -

134. The valve repair device of any of claims 131-133, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

135. The valve repair device of claim 134, wherein the first cover entirely covers the inner and outer paddle portions.

5 136. The valve repair device of any of claims 134 and 135, further comprising gripping members having fixed and moveable portions, wherein the fixed portions are attached to the inner paddle portions.

137. The valve repair device of claim 136, wherein the first cover covers the fixed portion of the gripping members.

10 138. The valve repair device of any of claims 136 and 137, wherein the second cover covers the moveable portions of the gripping members.

139. The valve repair device of any of claims 137–138, wherein the second cover includes openings for barbs extending from the moveable portions of the gripping members.

15 140. The valve repair device of claim 136, wherein the first cover covers the fixed and moveable portions of the gripping members.

141. The valve repair device of any of 140, wherein the first cover includes openings for barbs extending from the moveable portions of the gripping members.

20 142. The valve repair device of claims 140 or 141, wherein the second cover overlaps the first cover to cover a portion of the inner paddle portion and of the fixed and moveable gripping members.

143. The valve repair device of any of claims 136–142, wherein the second cover covers the moveable portions of the gripping members.

- 18 -

144. The valve repair device of claims 143 or 144, wherein the second cover includes openings for barbs extending from the moveable portions of the gripping members.

145. The valve repair device of claim 143, wherein the first cover overlaps the
5 second cover to cover a portion of the moveable gripping members and the coaption element.

146. The valve repair device of any of claims 131-145, wherein the first cover extends outward from a middle portion to end portions.

147. The valve repair device of claim 146, wherein the middle portion is
10 attached to the distal end of the device.

148. The valve repair device of any of claims 131-147, wherein the second cover extends outward from a middle portion to end portions.

149. The valve repair device of claim 148, wherein the middle portion is attached to the proximal end of the device.

15 150. The valve repair device of any of claims 131-149, further comprising a base assembly that comprises:

a shaft;

a collar that the shaft extends through;

a cap attached to the shaft such that the cap can be moved by the shaft
20 away from the collar; and

wherein the pair of paddles are attached to the cap; and

wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

25 151. The valve repair device of claim 150, wherein the first cover extends outward from a middle portion to end portions, and wherein the middle portion is attached to the cap.

- 19 -

152. The valve repair device of any of claims 150 and 151, wherein the second cover extends outward from a middle portion to end portions, and wherein the middle portion is attached to the collar.

153. The valve repair device of claim 152, wherein the middle portion includes
5 openings that expose engagement portions of the collar.

154. The valve repair device of any of claims 131-153, wherein the first cover further comprises:

a middle portion;
outer paddle portions extending from the middle portion; and
10 inner paddle portions extending from the outer paddle portions to end portions.

155. The valve repair device of claim 154, wherein the outer paddle portions include laterally extending wings.

156. The valve repair device of any of claims 131-155, wherein the second
15 cover further comprises:

a middle portion;
coaption portions extending from the middle portion to end portions;
flexible hinge portions extending from the coaption portions; and
transition portions extending from the flexible hinge portions to end
20 portions.

157. The valve repair device of claim 156, wherein the coaption portions include are joined together to surround the coaption element.

158. The valve repair device of claim 157, wherein the coaption portions are joined together by sewing through holes in edges of the coaption portions.

25 159. The valve repair device of any of claims 156–158, wherein the transition portions are attached to respective inner paddle portions.

- 20 -

160. The valve repair device of any of claims 136–156, wherein the first cover further comprises:

- a middle portion;
- outer paddle portions extending from the middle portion;
- 5 inner paddle portions extending from the outer paddle portions;
- inside clasp portions extending from the inner paddle portions; and
- outside moveable clasp portions extending from the inside clasp portions to end portions.

161. The valve repair device of claim 160, wherein the outer paddle portions
10 include laterally extending wings.

162. The valve repair device of any of claims 136–161, wherein the second cover further comprises:

- a middle portion;
 - coaption portions extending from the middle portion to end portions;
 - 15 flexible hinge portions extending from the coaption portions; and
 - transition portions extending from the flexible hinge portions to end portions;
- wherein the transition portions are attached to respective inner paddle portions and gripping members.

20 163. The valve repair device of any of claims 131-162, wherein the paddles are disposed over an extension member and the first cover is attached to the extension member.

164. The valve repair device of claim 163, wherein the extension member comprises a hoop.

25 165. The valve repair device of any of claims 131-164, wherein at least one of the first and second covers is formed from polyethylene.

166. The valve repair device of any of claims 131-165, wherein at least one of the first and second covers is cut from a flat sheet of material.

- 21 -

167. The valve repair device of any of claims 131-166, wherein the first and second covers are configured to form a blood seal on the surface of the valve repair device.

168. The valve repair device of any of claims 131-167, wherein at least one
5 of the first and second covers is a fine mesh cloth.

169. The valve repair device of any of claims 131-168, wherein at least one of the first and second covers is formed from polyethylene.

170. The valve repair device of any of claims 131-169, wherein the coaption element is configured to close a gap in the native valve of the patient when the
10 valve repair device is attached to the native valve.

171. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a strip of material having first and second edges surrounding a central portion;

15 a coaption element formed from the strip of material; and

a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position; and

20 wherein the paddles are configured to attach to the native valve of the patient.

172. The valve repair device of claim 171, wherein the central portion is thinner than the first and second edges.

173. The valve repair device of any of claims 171-172, wherein the strip of material has a lobed cross-sectional shape.

25 174. The valve repair device of any of claims 171-173, wherein the strip of material comprises:

at least one first edge strand;

- 22 -

at least one second edge strand; and
a plurality of central strands extending between the first and second edge strands to form the central portion.

175. The valve repair device of claim 174, wherein the plurality of central
5 strands are braided around the first and second edge strands.

176. The valve repair device of claim 174, wherein the plurality of central strands are woven around the first and second edge strands.

177. The valve repair device of any of claims 174–176, wherein the first and second edge strands have a diameter that is larger than a diameter of the central
10 strands.

178. The valve repair device of any of claims 174–177, wherein the first and second edge strands have a diameter of about 0.017 millimeters.

179. The valve repair device of any of claims 174–178, wherein the central strands have a diameter of about 0.009 millimeters.

180. The valve repair device of any of claims 174–179, wherein the central
15 portion is formed from between about 25 and about 100 central strands.

181. The valve repair device of any of claims 174–180, wherein the central portion is formed from between about 40 and about 85 central strands.

182. The valve repair device of any of claims 174–181, wherein the central
20 portion is formed from between about 48 and about 60 central strands.

183. The valve repair device of any of claims 174–182, wherein the central portion is formed from about 48 central strands.

184. The valve repair device of any of claims 174–183, wherein the central strands and the edge strands are formed from the same material.

- 23 -

185. The valve repair device of any of claims 174–183, wherein the central strands and the edge strands are formed from different materials.

186. The valve repair device of any of claims 174–185, wherein at least one of the central strands and the edge strands are formed from Nitinol wire.

5 187. The valve repair device of any of claims 174–186, wherein the central strands are formed from polyethylene.

188. The valve repair device of any of claims 171-187, wherein the first and second edge portions are more rigid than the central portion.

10 189. The valve repair device of any of claims 171-188, wherein the strip of material comprises an electrospun material.

190. The valve repair device of any of claims 171-189, wherein the strip of material comprises electrospun metal fibers.

191. The valve repair device of any of claims 171-190, further comprising a base assembly that comprises:

15 a shaft;
a collar that the shaft extends through; and
a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;
wherein the pair of paddles are attached to the cap; and
20 wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

192. The valve repair device of any of claims 171-191, wherein the coaption element is configured to close a gap in the native valve of the patient when the
25 valve repair device is attached to the native valve.

- 24 -

193. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a strip of material;

a coaption element formed from the strip of material;

5 a pair of extension members extending from attachment portions;

a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position, are disposed over the extension member, and are configured to attach to the native valve of the patient; and

10 a cap attached to the paddles, wherein movement of the cap toward the coaption element causes the pair of paddles to move to the closed position, and movement of the cap away from the coaption element causes the pair of paddles to move to the open position, the cap comprising:

15 a retention body having a locking aperture for receiving the attachment portions of the extension members;

a retaining nut configured to insert into the locking aperture; and

a retaining bolt for securing the retaining nut within the locking aperture.

194. The valve repair device of claim 193, further comprising:

a collar attached to the coaption element;

20 a shaft extending through the collar to attach to the cap such that the cap can be moved by the shaft away from the collar.

wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

25 195. The valve repair device of any of claims 193-194, wherein the shaft is attached to the retaining nut of the cap.

196. The valve repair device of any of claims 193-195, wherein the locking aperture extends through the retention body.

30 197. The valve repair device of any of claims 193-196, wherein the locking aperture is rectangular.

- 25 -

198. The valve repair device of any of claims 193-197, wherein the locking aperture includes opposing locking channels for receiving the attachment portions of the extension members.

199. The valve repair device of claim 198, wherein the opposing locking
5 channels have a rectangular shape.

200. The valve repair device of claims 198 or 199, wherein each locking channel receives two attachment portions of extension members.

201. The valve repair device of any of claims 193-200, wherein the extension members have a rectangular cross-section.

10 202. The valve repair device of any of claims 193-201, wherein the attachment portions of the extension members include hook portions for engaging the locking aperture.

203. The valve repair device of claim 202, wherein the hook portions engage opposing locking channels of the locking aperture.

15 204. The valve repair device of any of claims 193-203, wherein the attachment portions of the extension members include notches for engaging the locking aperture.

205. The valve repair device of claim 203, wherein the notches engage opposing locking channels of the locking aperture.

20 206. The valve repair device of any of claims 193-205, wherein the retaining bolt has a threaded portion extending from a flange.

207. The valve repair device of claim 206, wherein the flange includes at least one recess for receiving a tool.

- 26 -

208. The valve repair device of any of claims 193-207, wherein each extension member comprises a hoop.

209. The valve repair device of claim 208, wherein the hoop extends between two attachment portions.

5 210. The valve repair device of claim 209, wherein the two attachment portions are biased to spread apart from each other.

211. The valve repair device of any of claims 193-210, wherein:
the locking aperture includes opposing locking channels for receiving the attachment portions of the extension members;

10 each extension member comprises a hoop extending between two attachment portions;

the extension members are formed from a shape-memory alloy; and

the attachment portions are shape-set in a spaced apart relationship that is wider than a distance between the two locking channels.

15 212. The valve repair device of any of claims 193-211, wherein the strip of material is attached to the cap such that the strip of material is prohibited from moving relative to the cap.

213. The valve repair device of any of claims 193-212, wherein the strip of material includes an opening for receiving the retaining bolt.

20 214. The valve repair device of any of claims 193-213, wherein the retention body includes a channel for receiving the strip of material.

215. The valve repair device of claim 214, wherein the channel is enclosed by a flange of the retaining bolt.

25 216. The valve repair device of any of claims 214 and 215, wherein the channel is narrower than a distance between the locking channels.

- 27 -

217. The valve repair device of any of claims 214-216, wherein the channel is narrower than a width of the locking aperture.

218. The valve repair device of any of claims 193-217, wherein the strip of material comprises metal strands that are woven together.

5 219. The valve repair device of any of claims 193-218, wherein the strip of material comprises an electrospun material.

220. The valve repair device of any of claims 193-219, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

10 221. A method of manufacturing a valve repair device for repairing a native valve of a patient, the method comprising:

folding a strip of material to form a coaption element and a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient; and

15 attaching the portion of the strip of material forming the paddles to a cap, wherein movement of the cap toward the coaption element causes the pair of paddles to move to the closed position, and movement of the cap away from the coaption element causes the pair of paddles to move to the open position, the cap comprising:

a retention body having a locking aperture for receiving the attachment portions of the extension members;

a retaining nut configured to insert into the locking aperture; and

a retaining bolt for securing the retaining nut within the locking aperture;

25 attaching a pair of extension members to the retention body of the cap via attachment portions of the extension members such that the paddles are disposed over the extension members; and

assembling the retaining bolt and retaining nut to secure the cap to the strip of material.

- 28 -

222. The method of claim 221, further comprising:
a collar attached to the coaption element;
a shaft extending through the collar to attach to the cap such that the cap can be moved by the shaft away from the collar; and

5 wherein movement of the cap toward the collar causes the pair of paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

223. The method of any of claims 221 and 222, wherein attaching the pair of extension members to the cap further comprises:

10 inserting the attachment portions of the extension members into the locking aperture of the retention body; and

inserting the retaining nut into the locking aperture of the retention body after inserting the extension members.

224. The method of any of claims 221–223, wherein the shaft is attached to the retaining nut of the cap.

225. The method of any of claims 221-224, wherein the locking aperture extends through the retention body.

226. The method of any of claims 221-225, wherein the locking aperture includes opposing locking channels for receiving the attachment portions of the extension members.

227. The method of any of claims 221-226, wherein each locking channel receives two attachment portions of extension members.

228. The method of any of claims 221-227, wherein the attachment portions of the extension members include hook portions for engaging the locking aperture.

25 229. The method of claim 228, wherein the hook portions engage opposing locking channels of the locking aperture.

- 29 -

230. The method of any of claims 221-229, wherein the attachment portions of the extension members include notches for engaging the locking aperture.

231. The method of any of claims 221–230, wherein the retaining bolt has a threaded portion extending from a flange.

5 232. The method of claim 231, wherein the flange includes at least one recess for receiving a tool.

233. The method of any of claims 221-232, wherein each extension member comprises a hoop.

10 234. The method of claim 233, wherein the hoop extends between two attachment portions.

235. The method of claim 234, wherein the two attachment portions are biased to spread apart from each other.

236. The method of any of claims 221–235, wherein:
the locking aperture includes opposing locking channels for receiving the
15 attachment portions of the extension members
each extension member comprises a hoop extending between two attachment portions;
the extension members are formed from a shape-memory alloy; and
the attachment portions are shape-set in a spaced apart relationship that
20 is wider than a distance between the two locking channels.

237. The method of any of claims 221–236, wherein the strip of material is attached to the cap such that the strip of material is prohibited from moving relative to the cap.

238. The method of any of claims 221–237, wherein the retention body
25 includes a channel for receiving the strip of material.

- 30 -

239. The method of claim 238, wherein the channel is narrower than a distance between the locking channels.

240. The method of any of claims 238–239, wherein the channel is narrower than a width of the locking aperture.

5 241. The method of any of claims 221–240, wherein the strip of material comprises metal strands that are woven together.

242. The method of any of claims 221-241, wherein the strip of material comprises an electrospun material.

10 243. The method of any of claims 221–242, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

244. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

15 a strip of material;
a coaption element formed from the strip of material;
a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position, and are configured to attach to the native valve of the patient;
a cap attached to the paddles, wherein movement of the cap toward the
20 coaption element causes the pair of paddles to move to the closed position, and movement of the cap away from the coaption element causes the pair of paddles to move to the open position; and
a pair of extension members connected to the cap and moveable between an open position and a closed position, wherein in the closed position the
25 extension members are biased in a closing direction.

245. The valve repair device of claim 244, wherein the extension members do not overlap while in the closed position.

- 31 -

246. The valve repair device of any of claims 244 and 245, wherein the extension members are moveable in the closing direction beyond the closed position to a pre-loading position.

247. The valve repair device of any of claims 244-246, wherein the extension
5 members are shape-set in a pre-loading position and the extension members are moved in the closing direction beyond the closed position to the pre-loading position.

248. The valve repair-device of any of claims 246 and 247, wherein at least a
10 portion of each extension member overlaps the other extension member in the pre-loading position.

249. The valve repair device of any of claims 246–248, wherein ends of the extension members do not overlap.

250. The valve repair device of any of claims 244-249, wherein the extension members comprise hoops.

15 251. The valve repair device of claim 250, wherein the hoops interlock in the pre-load position.

252. The valve repair device of any of claims 244-251, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

20 253. The valve repair device of any of claims 244-252, wherein the paddles are disposed over the extension members.

254. The valve repair device of any of claims 244-253, wherein the strip of material comprises metal strands that are woven together.

255. The valve repair device of any of claims 244-254, wherein the strip of material comprises electrospun metal fibers.

- 32 -

256. The valve repair device of any of claims 244-255, further comprising a base assembly that comprises:

a collar; and

a shaft that extends through the collar and is attached to the cap such
5 that the cap can be moved by the shaft away from the collar;

wherein movement of the cap toward the collar causes the pair of
paddles to move to the closed position, and movement of the cap away from the
collar causes the pair of paddles to move to the open position.

257. The valve repair device of any of claims 244-256, wherein the coaption
10 element is configured to close a gap in the native valve of the patient when the
valve repair device is attached to the native valve.

258. A method of manufacturing a valve repair device for repairing a native
valve of a patient, the method comprising:

folding a strip of material formed from shape-memory alloy around a jig
15 to form a coaption element and a pair of paddles connected to the coaption
element, wherein the paddles are movable between an open position and a closed
position and are configured to attach to the native valve of the patient; and

heat treating the strip of material to shape-set the strip of material in the
shape of the coaption element and paddles.

259. The method of claim 258, wherein the jig further comprises plurality of
20 jig portions.

260. The method of claim 259, wherein the strip of material is folded around
each of the plurality of jig portions.

261. The method of any of claims 259 and 260, wherein the strip of material
25 is folded more than once around one of the plurality of jig portions.

262. The method of any of claims 258-261, wherein the jig further comprises
first, second, third, and fourth jig portions.

- 33 -

263. The method of claim 262, wherein folding the strip of material around the jig comprises:

- folding the strip of material around the first jig portion;
- folding the strip of material around the second jig portion;
- 5 folding the strip of material around the first jig portion a second time;
- folding the strip of material around the third jig portion; and
- folding the strip of material around the fourth jig portion.

264. The method of any of claims 262 and 263, wherein the first jig portion is larger than the second, third, and fourth jig portions.

10 265. The method of any of claims 262–264, wherein the jig portions are cylindrical, and the first jig portion has a larger diameter than a diameter of the second, third, and fourth jig portions.

266. The method of any of claims 262–265, wherein the second jig portion is closer to a proximal end of the valve repair device than the first, third, and fourth
15 jig portions.

267. The method of any of claims 262–266, wherein the fourth jig portion is closer to a distal end of the valve repair device than the first, second, and third jig portions.

268. The method of any of claims 262–267, wherein the first and third jig
20 portions are arranged closer to a proximal end of the valve repair device than the fourth jig portion.

269. The method of any of claims 262–268, wherein:
the second jig portion is the closest jig portion to a proximal end of the valve repair device;
25 the fourth jig portion is the closest jig portion to a distal end of the valve repair device; and
the first and third jig portions are arranged between the second and fourth jig portions.

- 34 -

270. The method of any of claims 262–269, wherein the first jig portion is arranged between the fourth jig portion and the third jig portion.

271. The method of any of claims 262–270, wherein each jig portion comprises a pair of jig portions.

5 272. The method of claim 271, wherein folding the strip of material around the jig comprises:

folding the strip of material around one of the first jig portions;
folding the strip of material around one of the second jig portions;
folding the strip of material around one of the first jig portions a second

10 time;

folding the strip of material around one of the third jig portions;
folding the strip of material around one of the fourth jig portions;
folding the strip of material around the other of the fourth jig portions;
folding the strip of material around the other of the third jig portions;
15 folding the strip of material around the other of the first jig portions;
folding the strip of material around the other of the second jig portions;

and

folding the strip of material around the other of the first jig portions a second time.

20 273. The method of any of claims 262–272, wherein a proximal end of the coaption element is formed by folding the strip of material around the second jig portion.

274. The method of any of claims 262–273, wherein a distal end of the paddles is formed by folding the strip of material around the fourth jig portion.

25 275. The method of any of claims 262–274, wherein the paddles comprise an inner paddle portion and an outer paddle portion and a hinge between the inner and outer paddle portions is formed by folding the strip of material around the third jig portion.

- 35 -

276. The method of any of claims 262–275, wherein the first jig portion is cylindrical and has a diameter of about 1.0 mm.

277. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

- 5 a strip of material;
- a coaption element formed from the strip of material;
- a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position, and are configured to attach to the native valve of the patient;
- 10 a cap attached to the paddles, wherein movement of the cap toward the coaption element causes the pair of paddles to move to the closed position, and movement of the cap away from the coaption element causes the pair of paddles to move to the open position; and
- a pair of extension members connected to the cap and the paddles, the
- 15 extension members extending from attachment portions for attaching the extension members to the cap to end portions that are attached to the strip material forming the paddles;
- wherein the end portions of the extension members extend beyond the strip of material.

20 278. The valve repair device of claim 277, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

279. The valve repair device of any of claims 277 and 278, wherein the paddles are disposed over a portion of the extension members.

25 280. The valve repair device of any of claims 277-279, wherein the paddles are disposed over the end portions of the extension members.

281. The valve repair device of any of claims 277-280, wherein the paddles are disposed within the extension members.

- 36 -

282. The valve repair device of any of claims 277-281, wherein the paddles are disposed within the end portions of the extension members.

283. The valve repair device of any of claims 277-282, wherein the extension members comprise a hoop and the strip of material is folded around a portion of
5 the hoop.

284. The valve repair device of claim 283, wherein the paddles comprise an inner paddle portion and an outer paddle portion and the fold of the strip of material around the hoop is arranged between the inner and outer paddle portions.

285. The valve repair device of any of claims 277-284, wherein the end
10 portions include a slot for receiving the strip of material.

286. The valve repair device of claim claims 285, wherein the slot includes an opening formed between the slot and an exterior of the extension member.

287. The valve repair device of any of claims 285-286, wherein the slot extends between first and second ends.

15 288. The valve repair device of claim 287, wherein the slot includes an opening arranged between the first and second ends.

289. The valve repair device of claim 288, wherein the opening is formed between the slot and an exterior of the extension member.

20 290. The valve repair device of any of claims 277-289, wherein the end portions include at least one attachment hole for securing a cover to the extension member.

291. The valve repair device of any of claims 277-290, further comprising a base assembly that comprises:

a shaft;

25 a collar that the shaft extends through;

- 37 -

a cap attached to the shaft such that the cap can be moved by the shaft away from the collar;

wherein the pair of paddles are attached to the cap;

wherein movement of the cap toward the collar causes the pair of
5 paddles to move to the closed position, and movement of the cap away from the collar causes the pair of paddles to move to the open position.

292. The valve repair device of any of claims 277-291, wherein the strip of material comprises metal strands that are woven together.

293. The valve repair device of any of claims 277-292, wherein the strip of
10 material comprises an electrospun material.

294. The valve repair device of any claims 277-293, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

295. A valve repair device for repairing a native valve of a patient, the valve
15 repair device comprising:

a coaption element;

at least one auxiliary coaption element connected to the coaption element; and

a pair of paddles connected to the coaption element, wherein the
20 paddles are movable between an open position and a closed position and are configured to attach to the native valve of the patient.

296. The valve repair device of claim 295, wherein the at least one auxiliary coaption element is inflatable between a deflated condition and an inflated condition.

25 297. The valve repair device of claim 295, wherein two auxiliary coaption elements are connected to the coaption element and are independently inflatable between a deflated condition and an inflated condition.

- 38 -

298. The valve repair device of any of claims 295-297, wherein first and second auxiliary coaption elements are connected to the coaption element, are independently inflatable between a deflated condition and an inflated condition, and a first inflated condition of the first auxiliary coaption element is larger than a
5 second inflated condition of the second auxiliary coaption element.

299. The valve repair device of any of claims 295-298, wherein the at least one auxiliary coaption element increases in size from a proximal end to a distal end.

300. The valve repair device of any of claims 295-298, wherein the at least
10 one auxiliary coaption element decreases in size from a proximal end to a distal end.

301. The valve repair device of any of claims 295-300, wherein the at least one auxiliary coaption element expands from a compressed condition to an expanded condition upon removal of a retaining element.

15 302. The valve repair device of claim 301, wherein the auxiliary coaption element is formed from coiled wire.

303. The valve repair device of claims 295-302, wherein the coaption element includes an attachment portion for removably attaching the at least one auxiliary coaption element.

20 304. The valve repair device of claim 303, wherein the attachment portion is a threaded rod and the at least one auxiliary coaption element includes an attachment opening for receiving the threaded rod.

305. The valve repair device of claim 304, wherein the at least one auxiliary coaption element is retained by a nut.

- 39 -

306. The valve repair device of any of claims 303–305, wherein the attachment portion includes a magnet and the at least one auxiliary coaption element includes a magnet for attaching to magnet of the attachment portion.

307. The valve repair device of any of claims 303-306, wherein the auxiliary
5 coaption element includes a coaption portion that extends along one side of the coaption element between the pair of paddles.

308. The valve repair device of any of claims 303-307, wherein the auxiliary coaption element includes two coaption portions that extend along opposite sides of the coaption element between the pair of paddles.

10 309. The valve repair device of any of claims 303-308, wherein the coaption element includes two attachment portions arranged on opposite sides of the coaption element for removably attaching the at least one auxiliary coaption element.

15 310. The valve repair device of claim 309, wherein the attachment portions are rings configured to receive a post extending from the at least one auxiliary coaption element.

311. The valve repair device of any of claims 309 and 310, wherein the at least one auxiliary coaption element has a semi-circle cross-sectional shape.

20 312. The valve repair device of any of claims 309-311, wherein first and second auxiliary coaption elements having different shapes are attached to the attachment portions.

313. The valve repair device of any of claims 309-312, wherein first and second auxiliary coaption elements having different sizes are attached to the attachment portions.

- 40 -

314. The valve repair device of claim claims 295-313, wherein the coaption element is formed from a lattice of struts and the auxiliary coaption element is a curved strut that is longer than the struts forming the coaption element.

315. The valve repair device of claim 314, wherein the coaption element and
5 auxiliary coaption element are cut from a flat sheet of material.

316. The valve repair device of claim 315, wherein the auxiliary coaption elements expand outward from the coaption element when the flat sheet of material is formed into the three-dimensional shape of the coaption element.

317. The valve repair device of any of claims 295-316, further comprising a
10 base assembly that comprises:

a shaft;

a collar that the shaft extends through; and

a cap attached to the shaft such that the cap can be moved by the shaft
away from the collar;

15 wherein the pair of paddles are attached to the cap; and

wherein movement of the cap toward the collar causes the pair of
paddles to move to the closed position, and movement of the cap away from the
collar causes the pair of paddles to move to the open position.

318. The valve repair device of any of claims 295-317, wherein the coaption
20 element is configured to close a gap in the native valve of the patient when the
valve repair device is attached to the native valve.

319. A valve repair device for repairing a native valve of a patient, the valve
repair device comprising:

a coaption element; and

25 a pair of paddles connected to the coaption element, wherein the
paddles are movable between an open position and a closed position;

wherein the paddles are configured to attach to the native valve of the
patient;

a first paddle frame having two spaced apart frame portions;

- 41 -

a second paddle frame portion having two spaced apart frame portions that are substantially parallel to the two spaced apart frame portions of the first paddle frame when the paddles are in a closed position to form a rectangular shaped leaflet engagement areas.

5 320. The valve repair device of claim 319, wherein the rectangular leaflet engagement areas are configured to press two native heart valve leaflets together on opposite sides of the coaption element.

10 321. The valve repair device of any of claims 319 and 320, wherein the rectangular leaflet engagement areas are configured to press two native heart valve leaflets together when the two leaflets are misaligned along a height of the valve repair device.

15 322. The valve repair device of any of claims 319-321 wherein the rectangular leaflet engagement areas are configured to press two native heart valve leaflets together when the two leaflets are misaligned along a height of the valve repair device on both sides of the coaption element.

323. The valve repair device of claims 319-322, wherein a strip of material is folded to form the coaption element and the pair of paddles.

20 324. The valve repair device of any of claims 319-323, wherein the paddles comprise an inner paddle portion and an outer paddle portion, and the inner paddle portion is formed from two layers of the folded strip of material.

325. The valve repair device of any of claims 319-324, wherein the coaption element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

25 326. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:
 a strip of material;
 a coaption element formed from the strip of material; and

- 42 -

a pair of paddles formed from the strip of material and connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

wherein the paddles are configured to attach to the native valve of the
5 patient;

a first and second paddle frame each having a first frame portion that is substantially parallel to a second frame portion to form a rectangular shaped leaflet engagement area.

327. The valve repair device of claim 326, wherein the strip of material is
10 folded to form the coaption element and the pair of paddles.

328. The valve repair device of claim 326, wherein the paddles comprise an inner paddle portion and an outer paddle portion, and the inner paddle portion is formed from two layers of the folded strip of material.

329. The valve repair device of any of claims 326-328, wherein the coaption
15 element is configured to close a gap in the native valve of the patient when the valve repair device is attached to the native valve.

330. The valve repair device of any of claims 326-329, wherein the rectangular leaflet engagement area is configured to press two native heart valve leaflets together when the two leaflets are misaligned along a height of the valve
20 repair device.

331. The valve repair device of any of claims 326-329, wherein the rectangular leaflet engagement area is configured to press two mitral valve leaflets together when the two leaflets are misaligned along a height of the valve repair device.

25 332. A method of repairing a native valve of a patient comprising:
installing a first repair device on a pair of native valve leaflets, the first valve repair device comprising:
a coaption element; and

- 43 -

a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

wherein the paddles are configured to attach to the native valve of the patient;

5 first and second paddle frames each having a substantially rectangular shape;

installing a second repair device on the pair of native valve leaflet adjacent to the first repair device, the second repair device comprising:

a coaption element; and

10 a pair of paddles connected to the coaption element, wherein the paddles are movable between an open position and a closed position;

wherein the paddles are configured to attach to the native valve of the patient;

15 first and second paddle frames each having a substantially rectangular shape;

wherein the first and second paddle frames of the installed first repair device are substantially parallel to the first and second paddle frames of the installed second repair device.

333. A valve repair device for repairing a native valve of a patient, the valve repair device comprising:

a pair of paddles that are movable between an open position and a closed position; and

25 a clasp associated with each paddle, each clasp having at least one barb, a barb support portion, a moveable arm, and a flexible portion between the barb support portion and the moveable arm;

wherein the flexible portion is configured to allow the barb support portion to flex away from the moveable arm.

334. The valve repair device of claim 333, wherein the flexible portion comprises a plurality of notches.

30 335. The valve repair device of claim 333, wherein the paddles comprise an inner paddle portion and an outer paddle portion.

- 44 -

336. The valve repair device of any of claims 333-335, wherein the paddles and the flexible portions are configured such that pulling on the barbs first causes the paddles to at least partially open and then causes the barb support portion to flex away from the moveable arm.

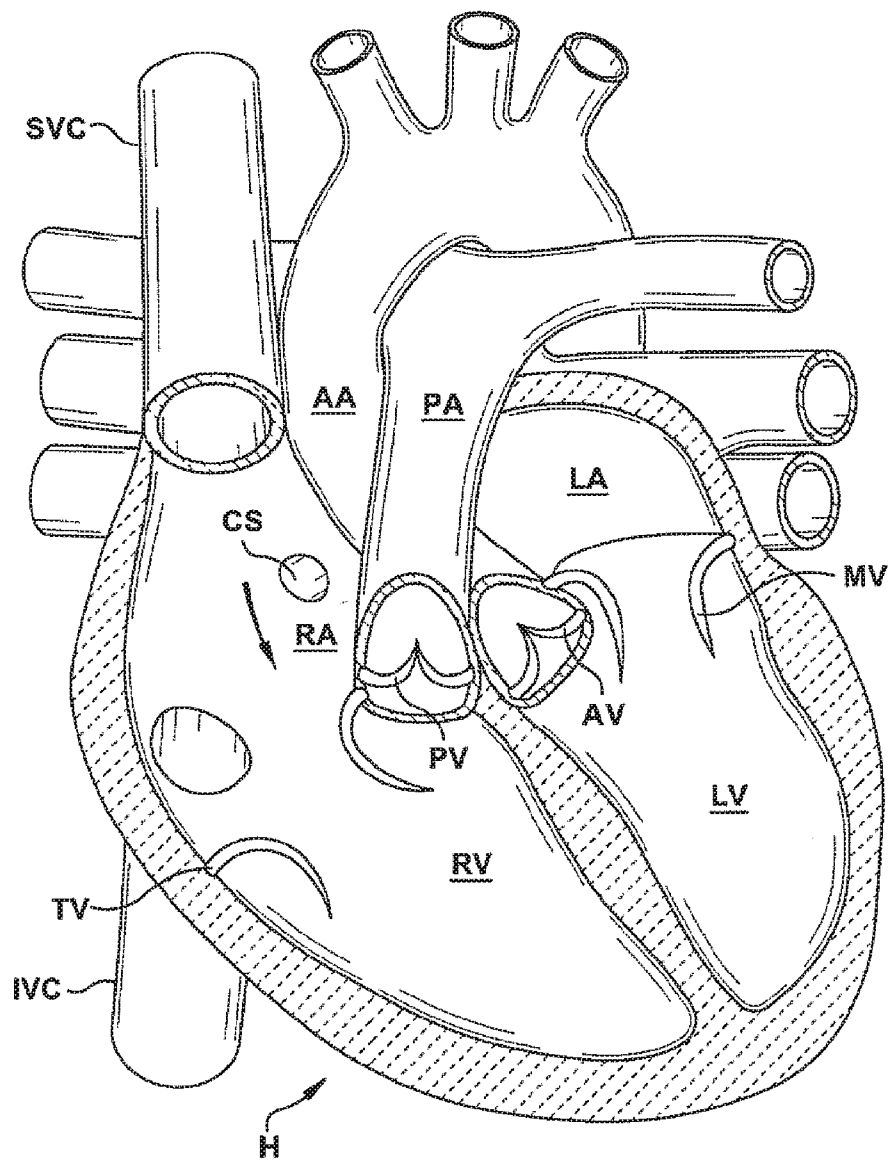
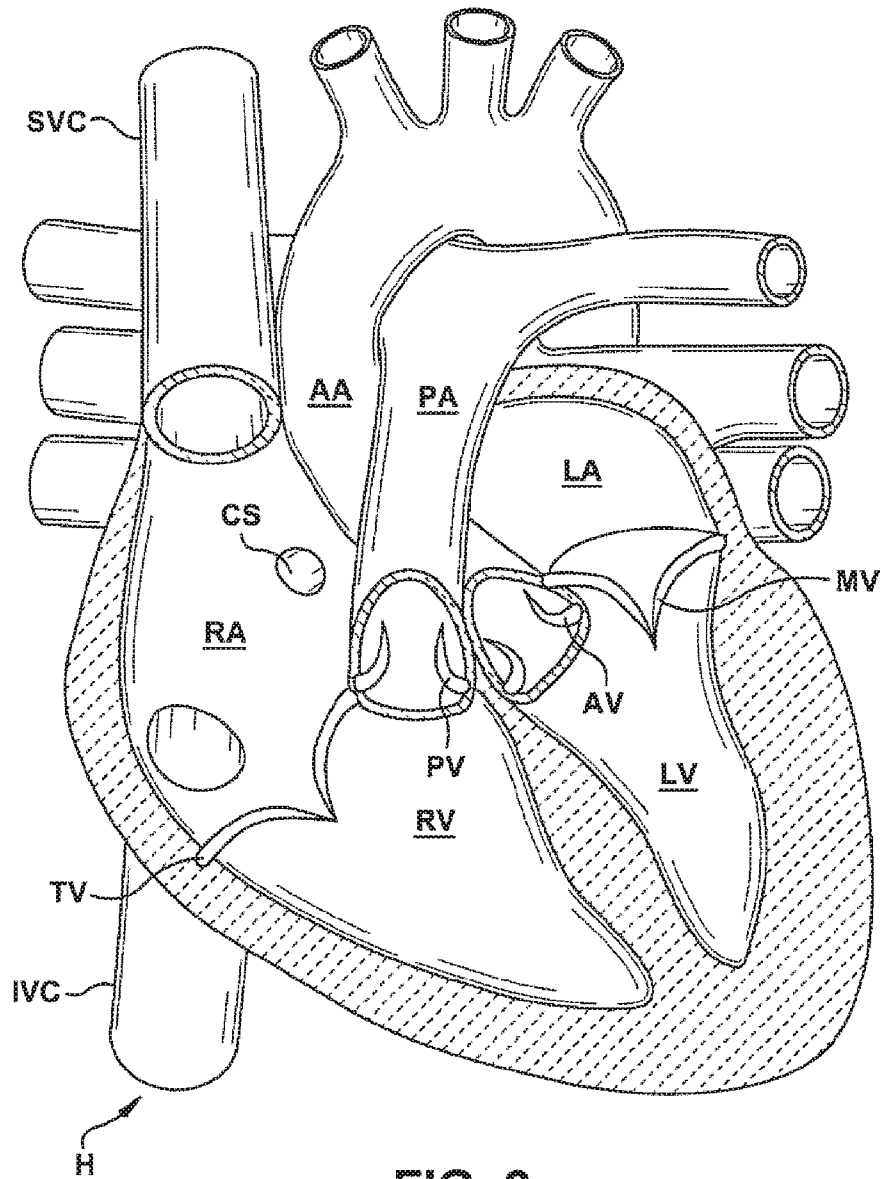


FIG. 1



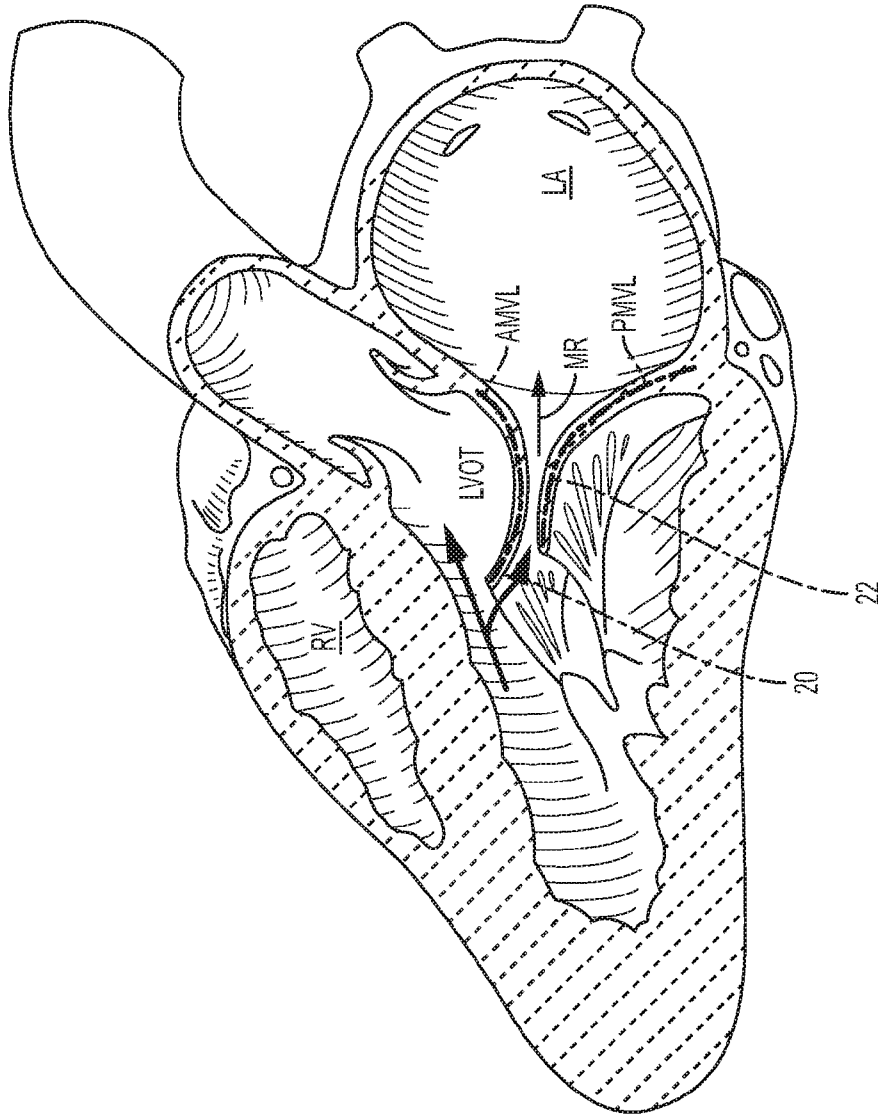


Fig. 2A

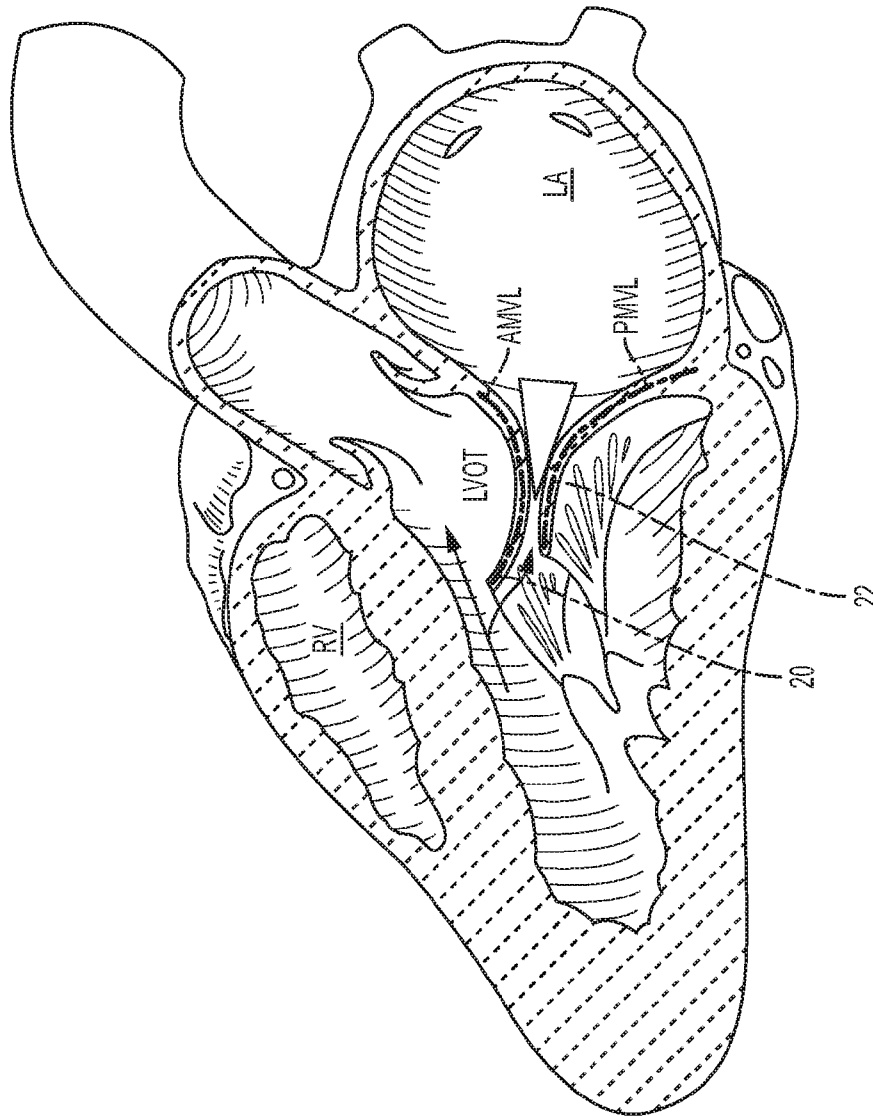


Fig. 2B

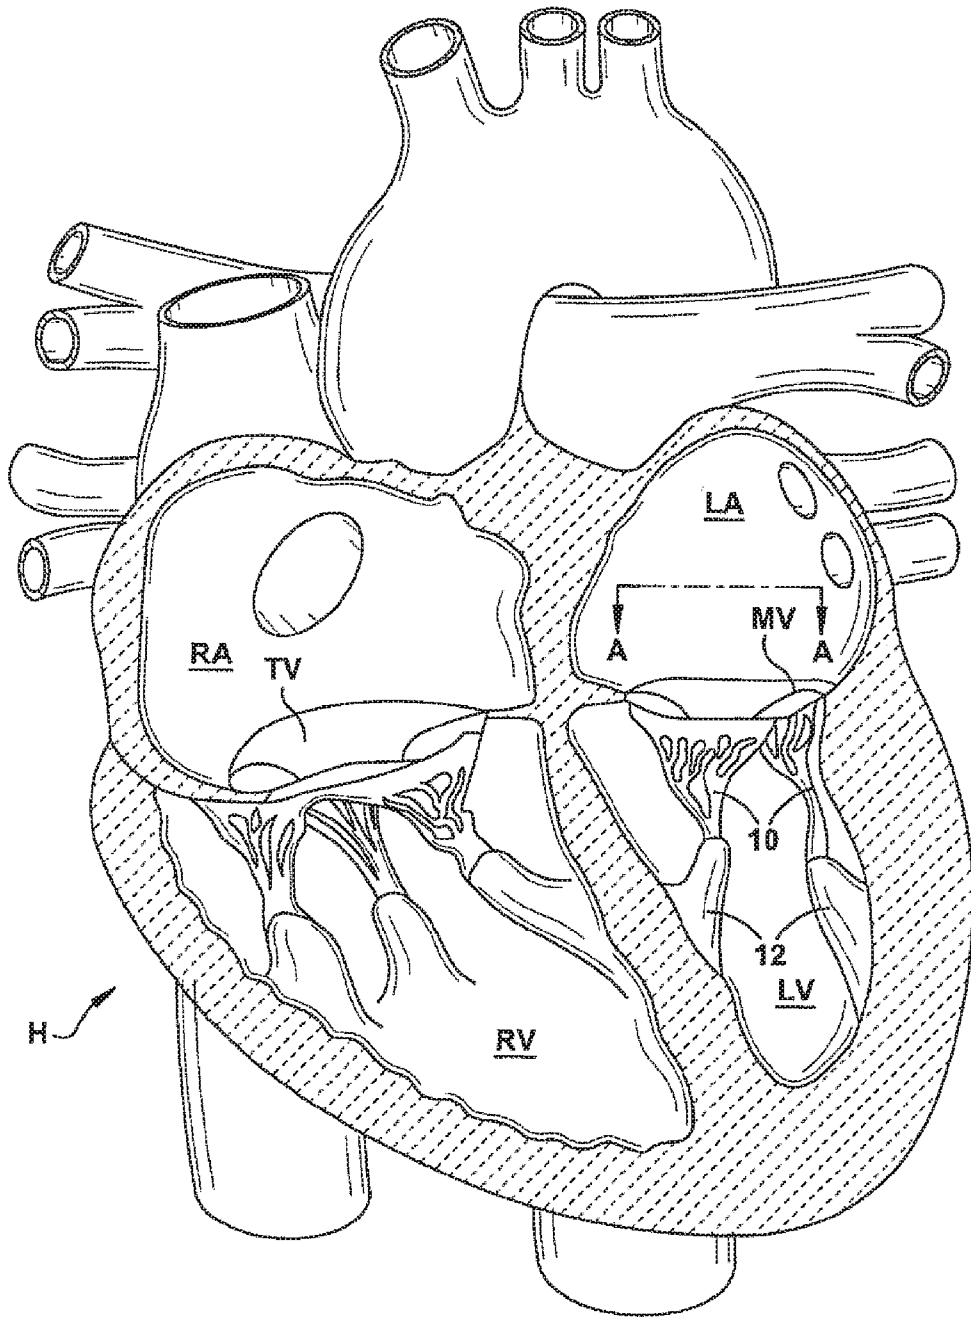
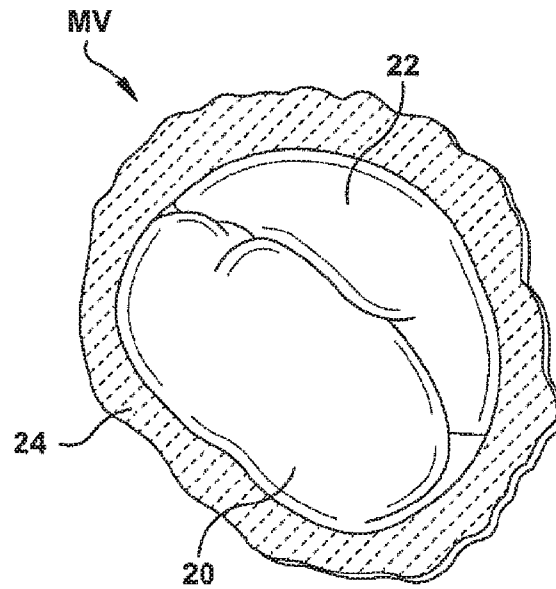
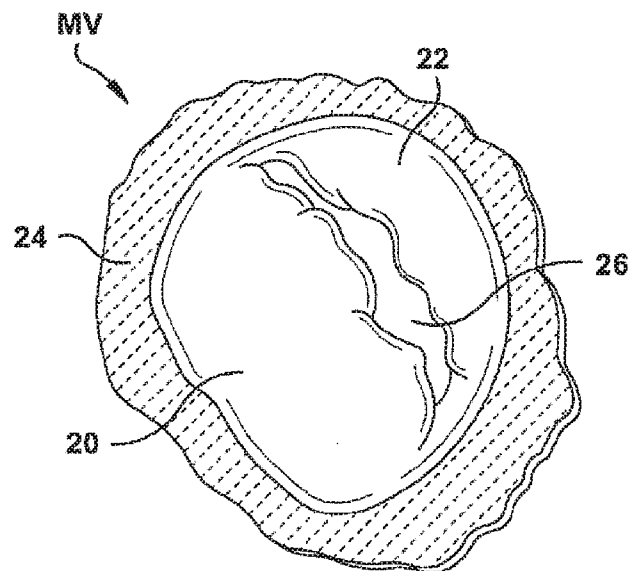
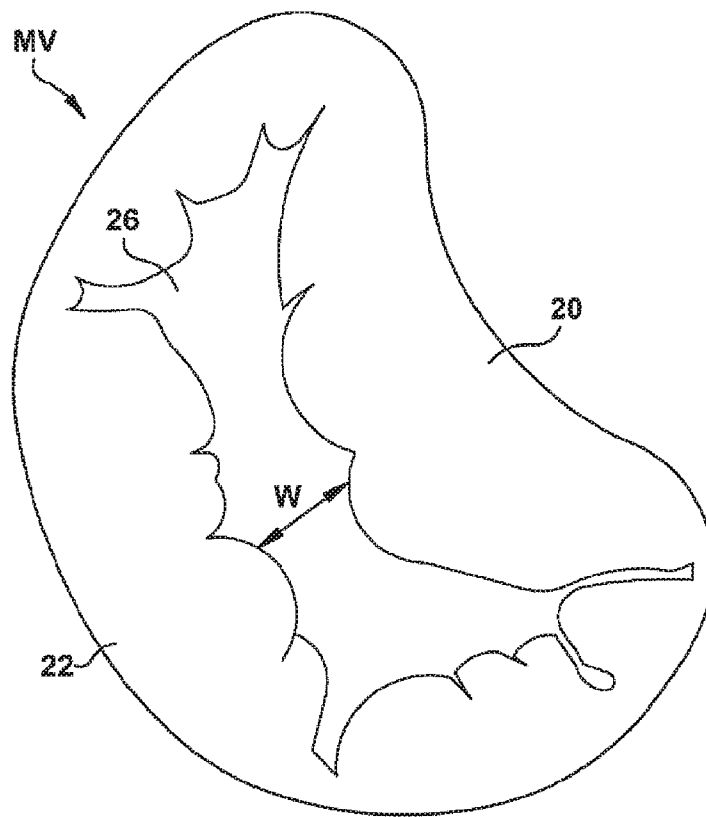


FIG. 3

**FIG. 4****FIG. 5**

**FIG. 6**


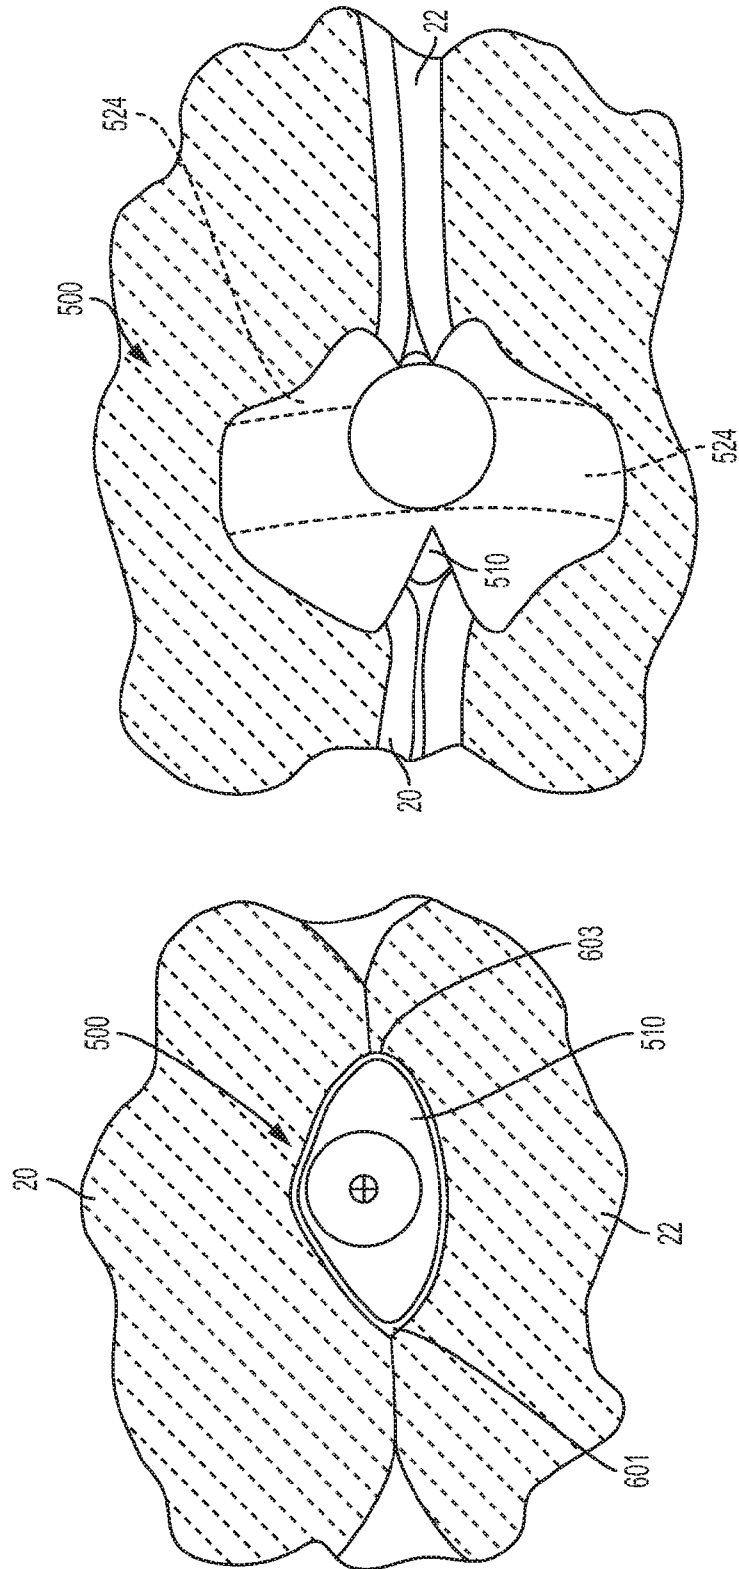


Fig. 6A

Fig. 6B

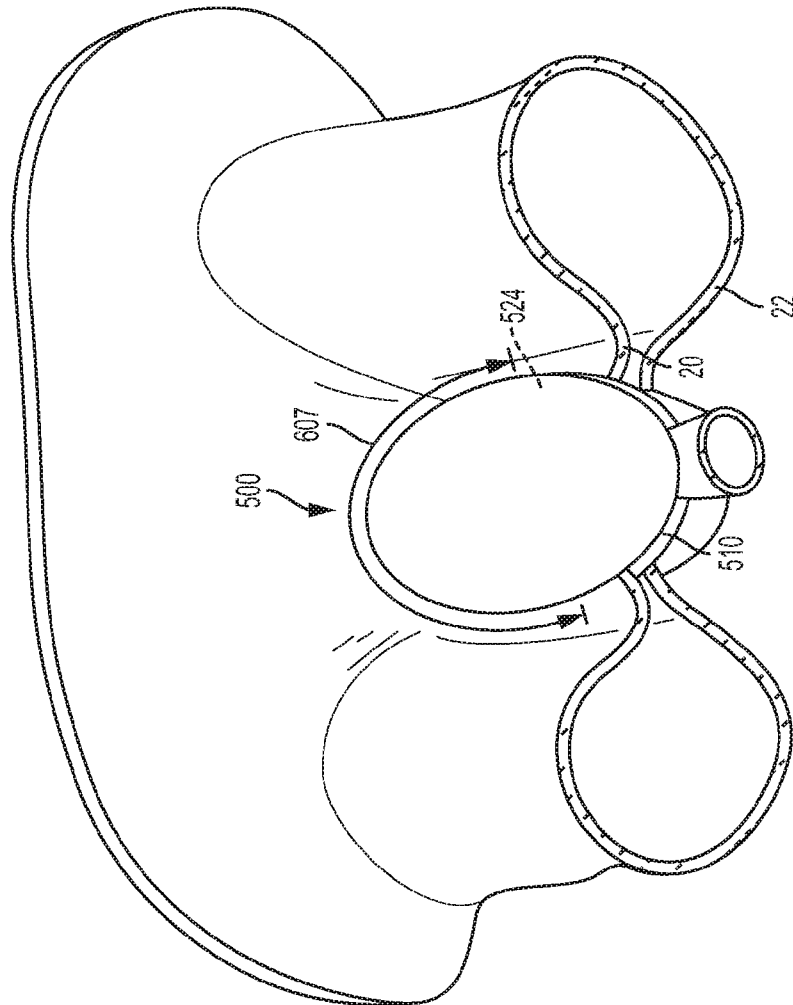

செந்தேவராயன்

10/262

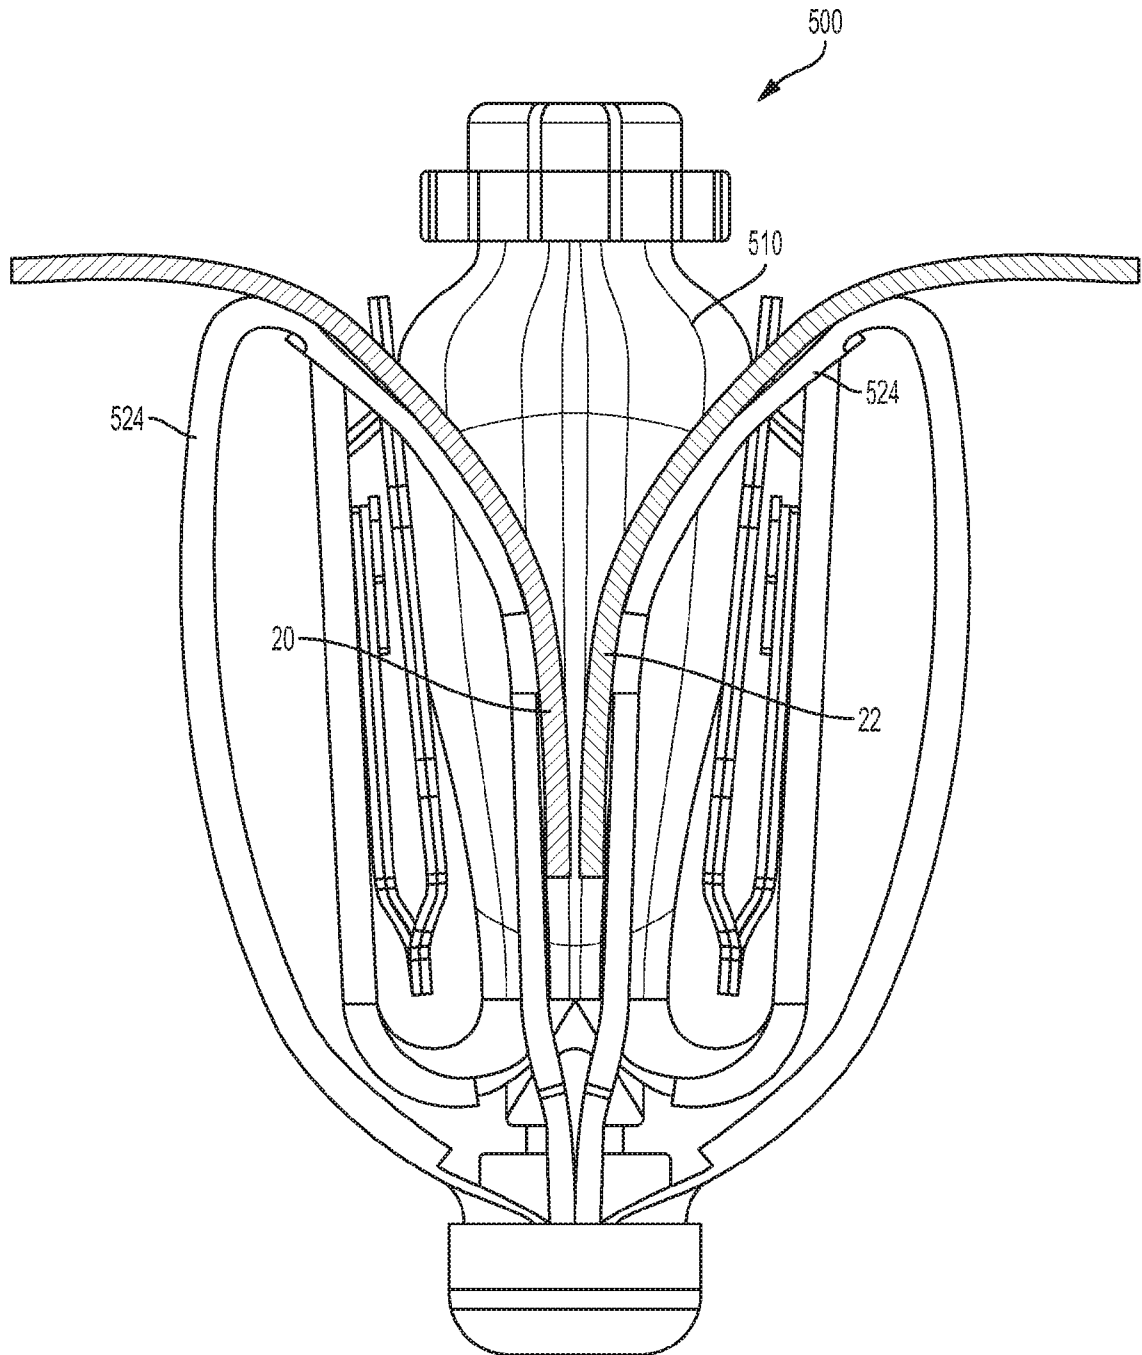


Fig. 6D

11/262

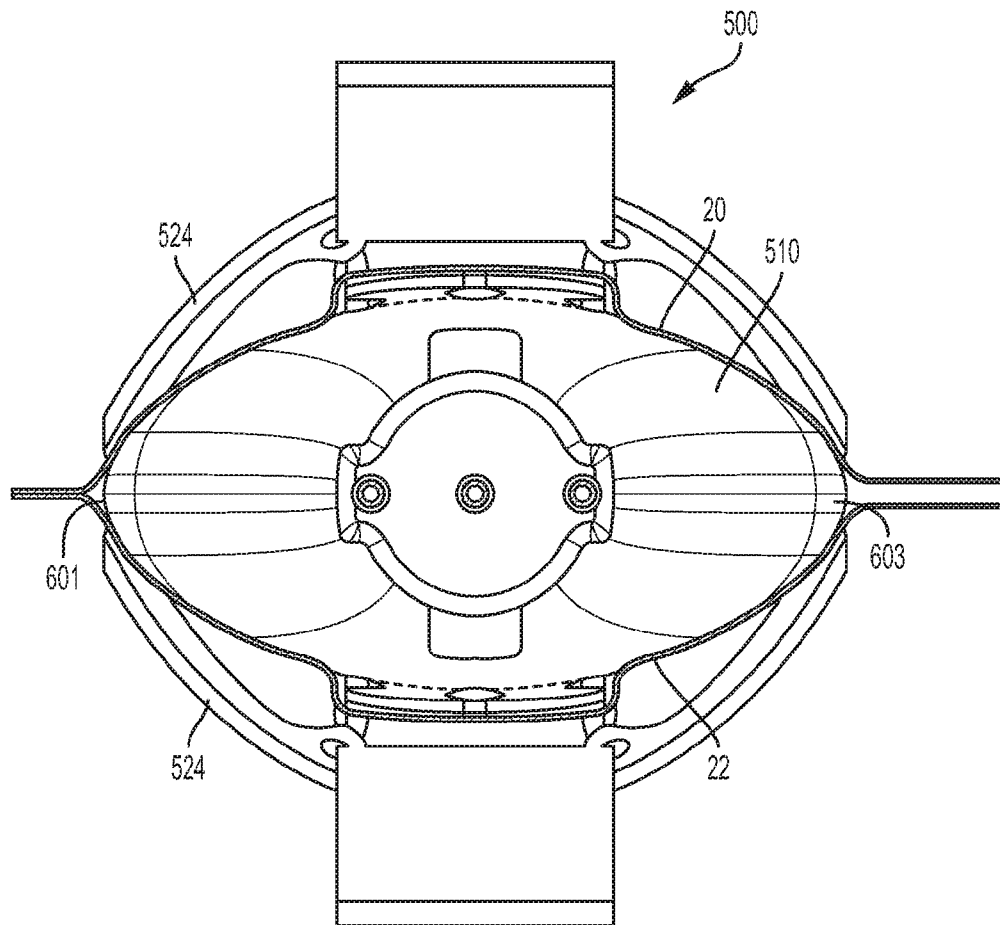


Fig. 6E

12/262

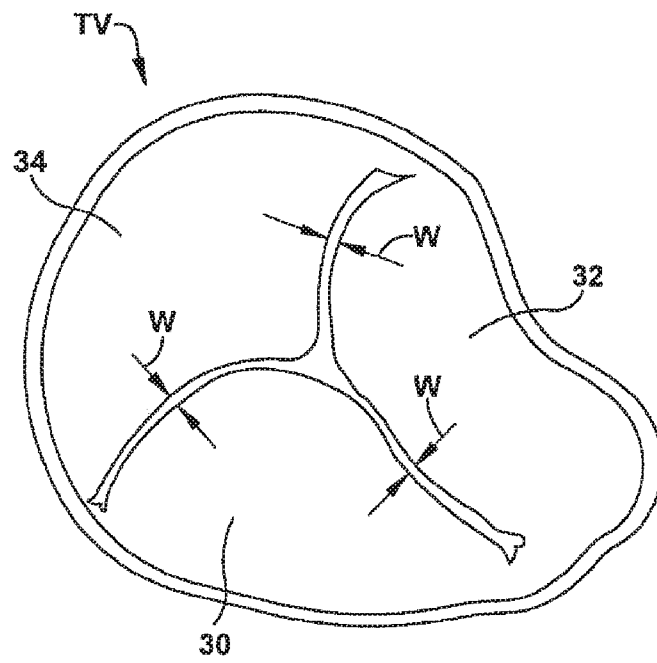


FIG. 7

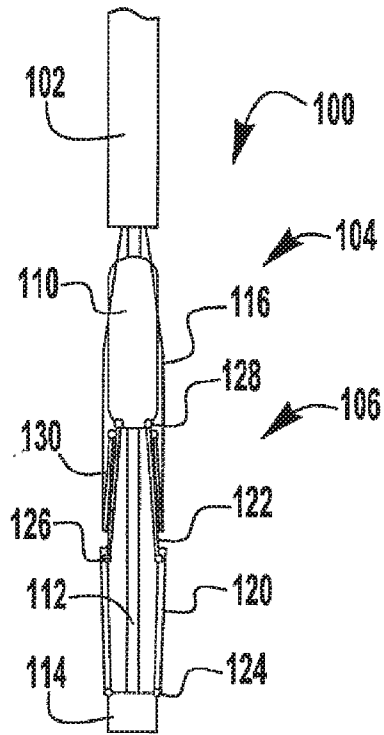


FIG. 8

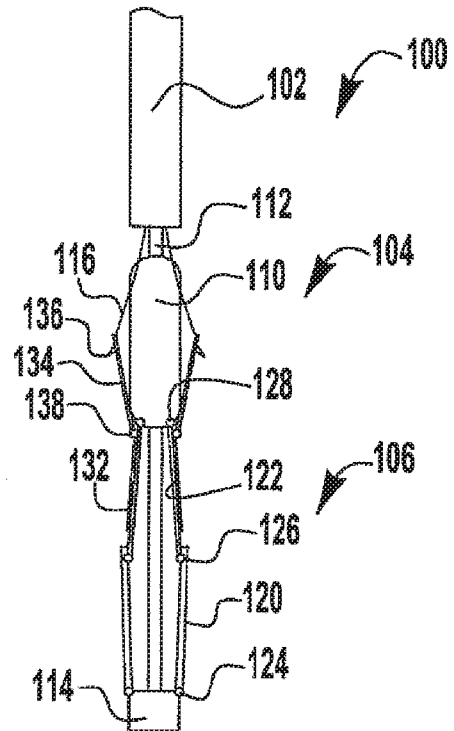


FIG. 9




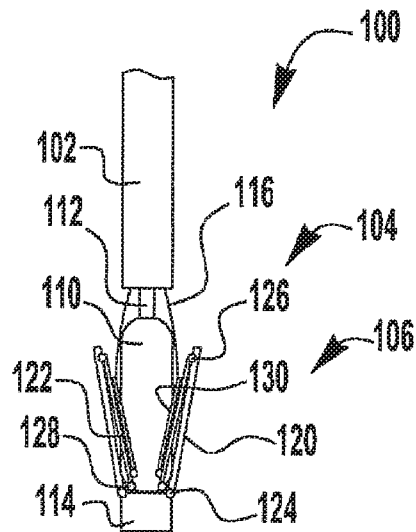


FIG. 10

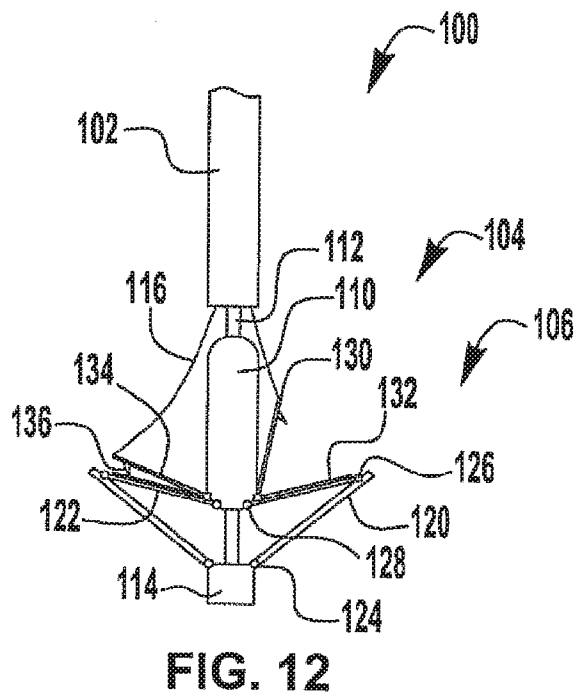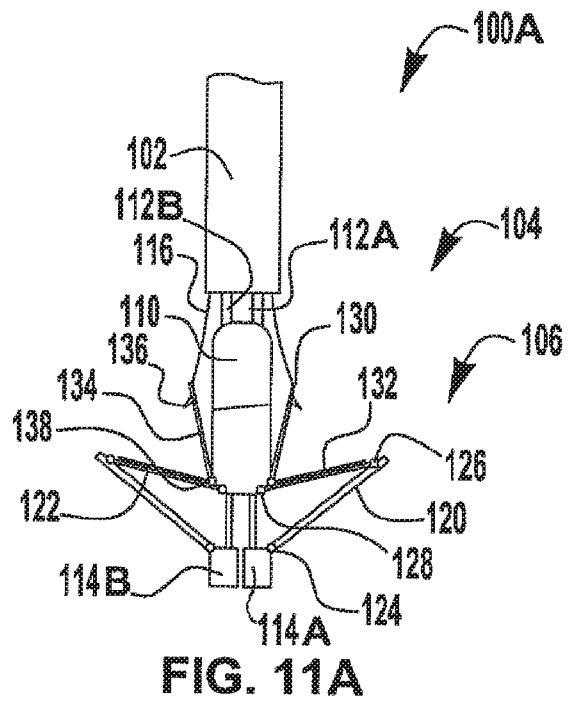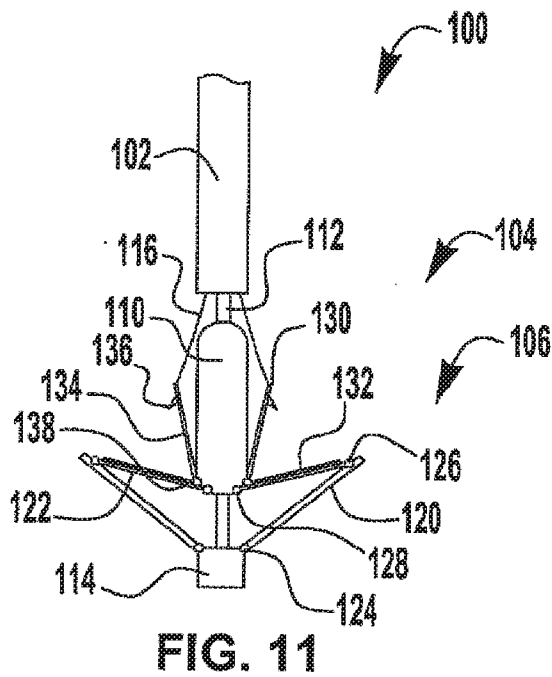

15/262

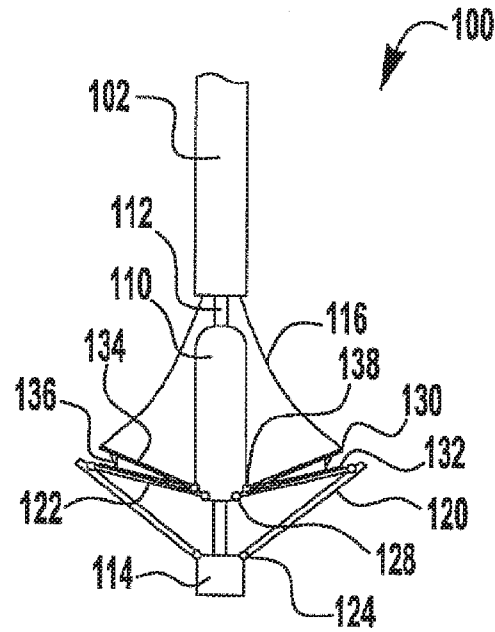


FIG. 13

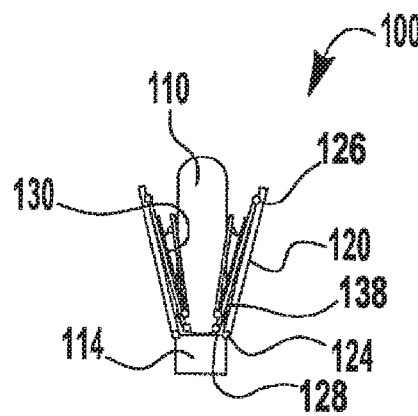
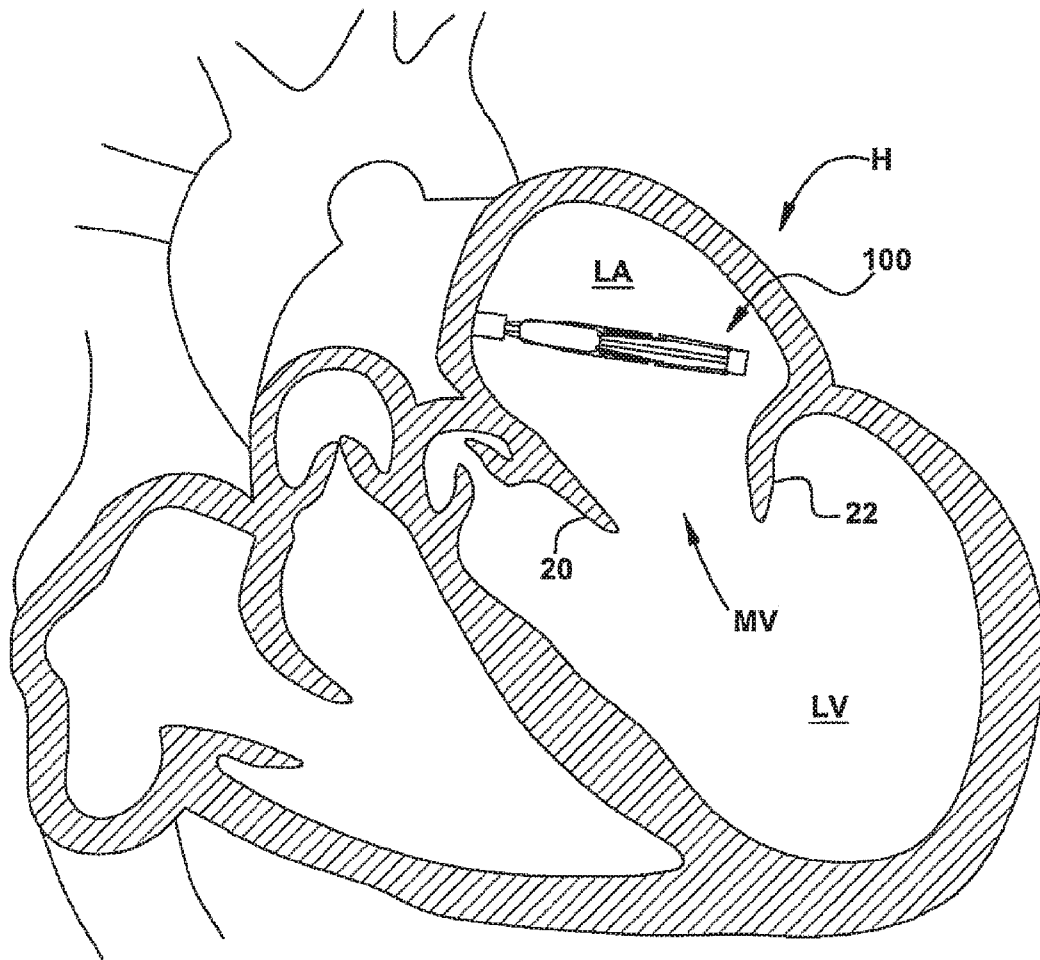
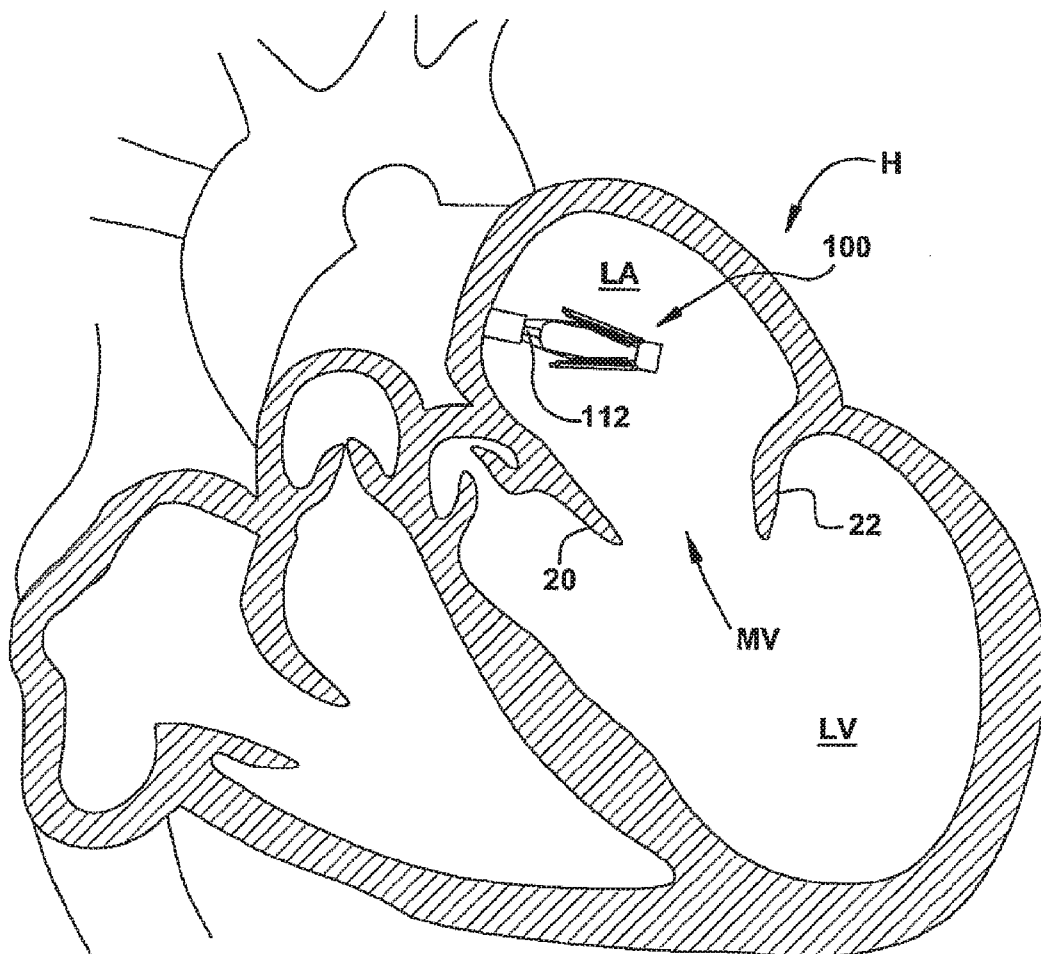


FIG. 14

**FIG. 15**

**FIG. 16**

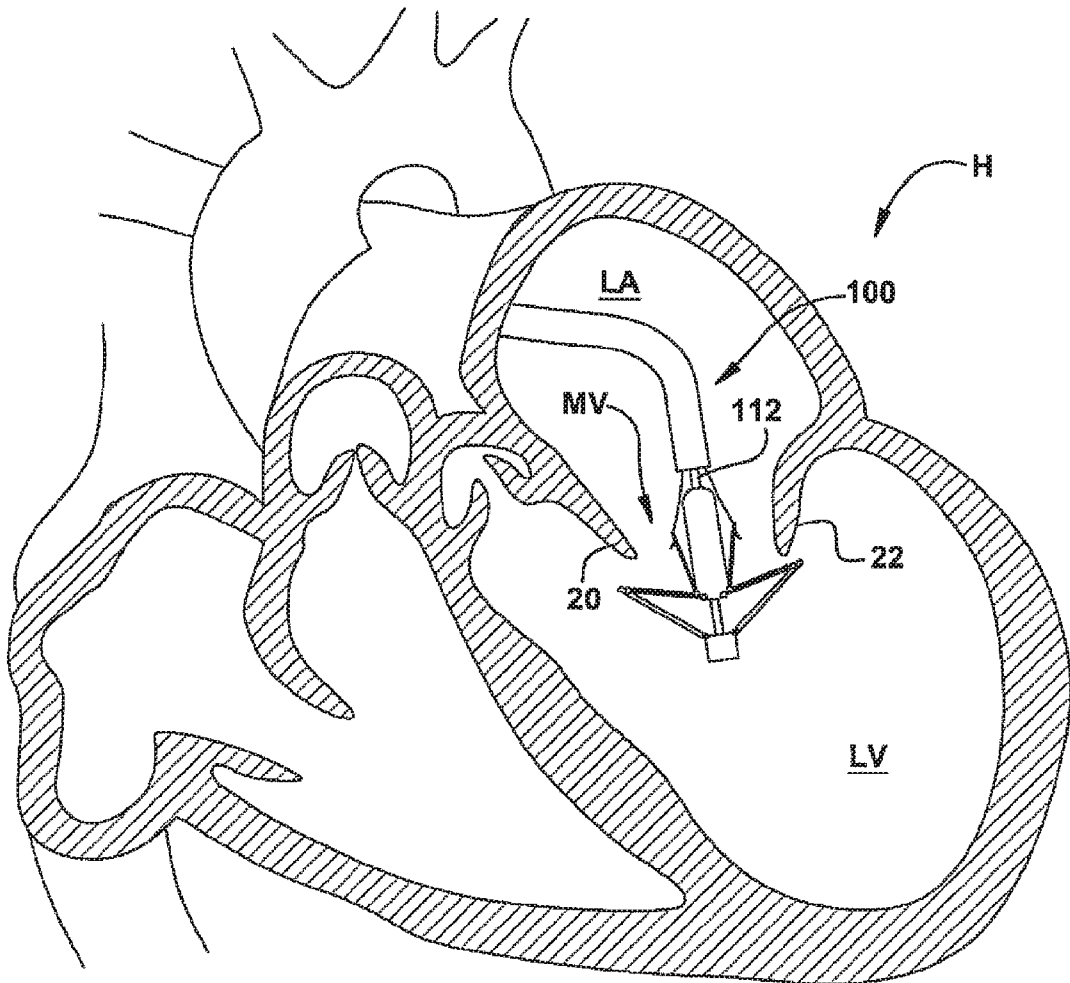
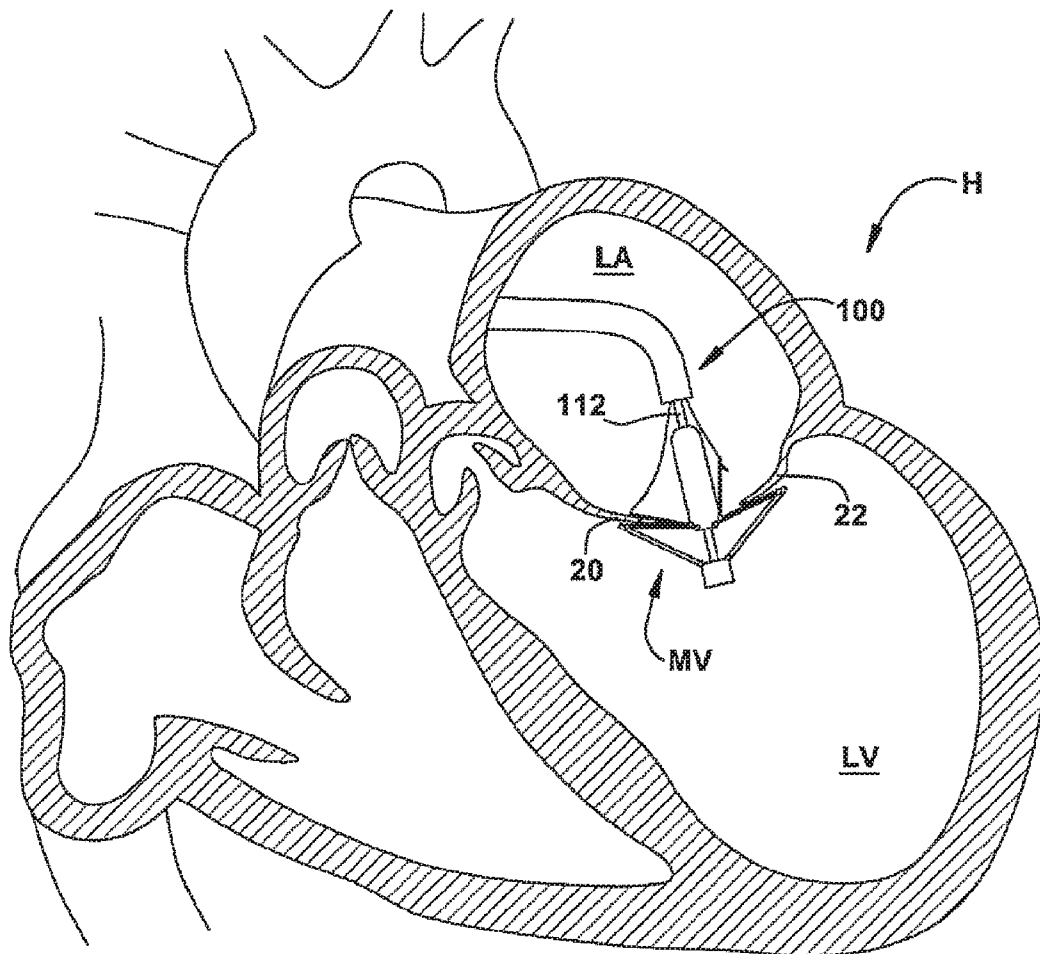
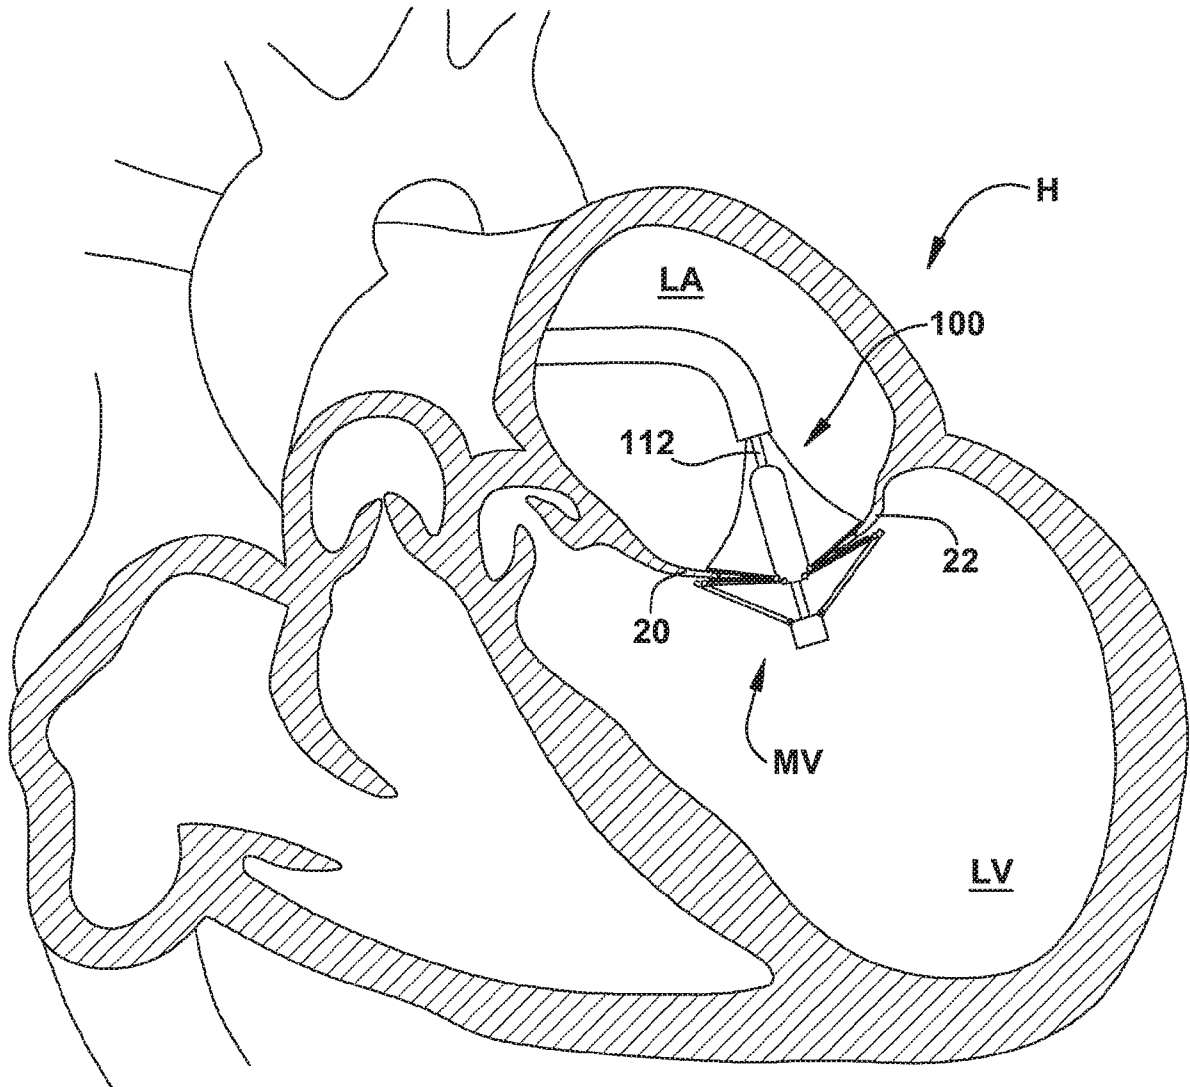


FIG. 17

**FIG. 18**

**FIG. 19**

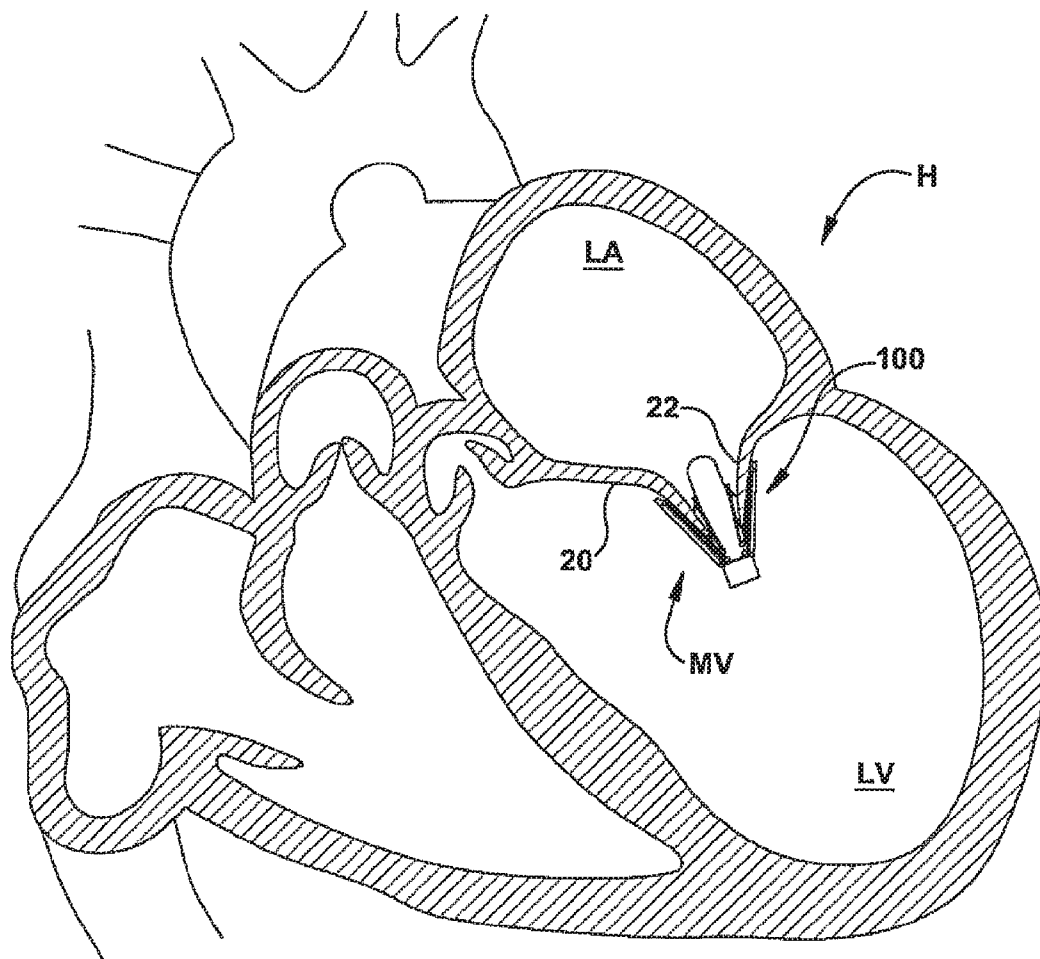
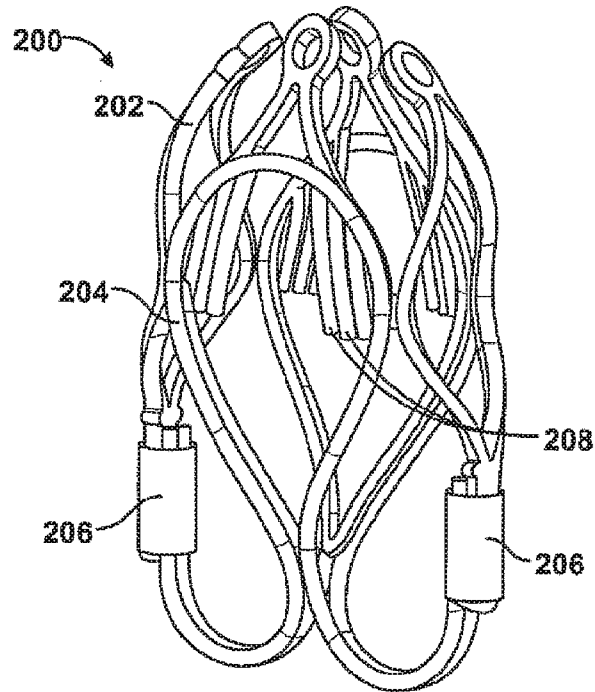
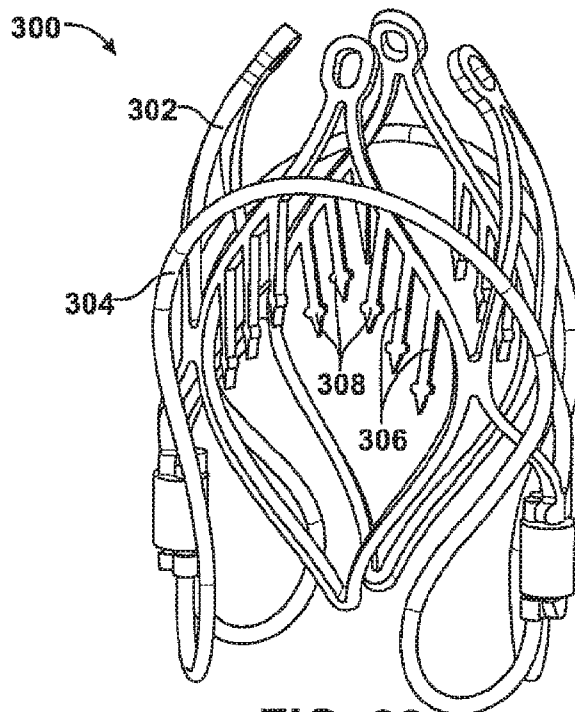


FIG. 20

**FIG. 21****FIG. 22**

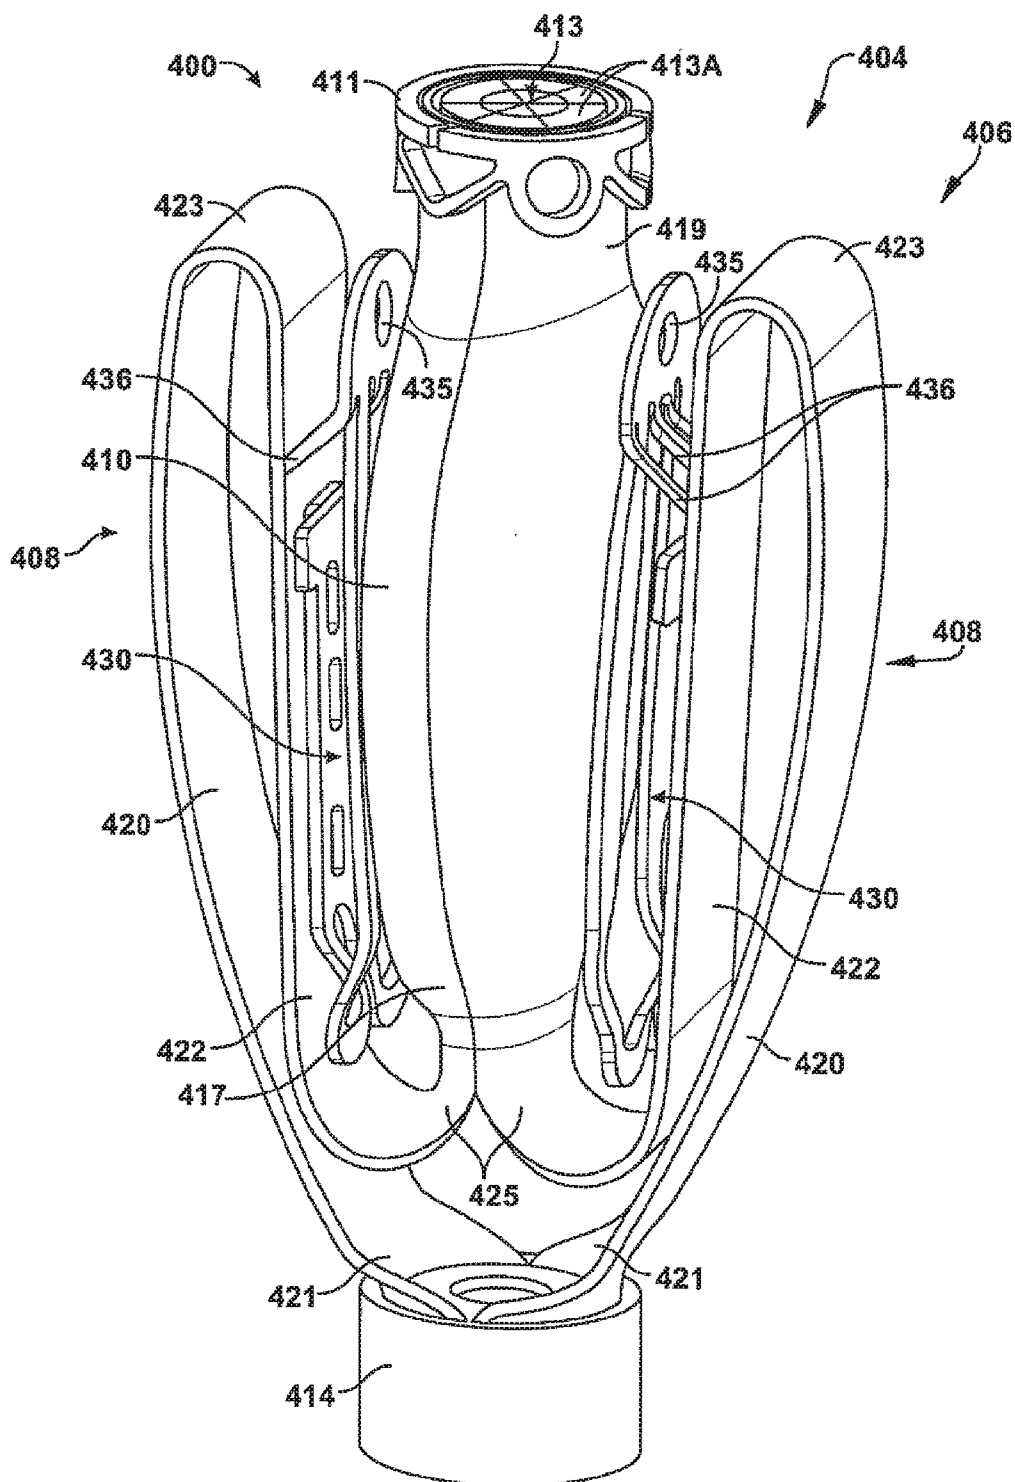


FIG. 23

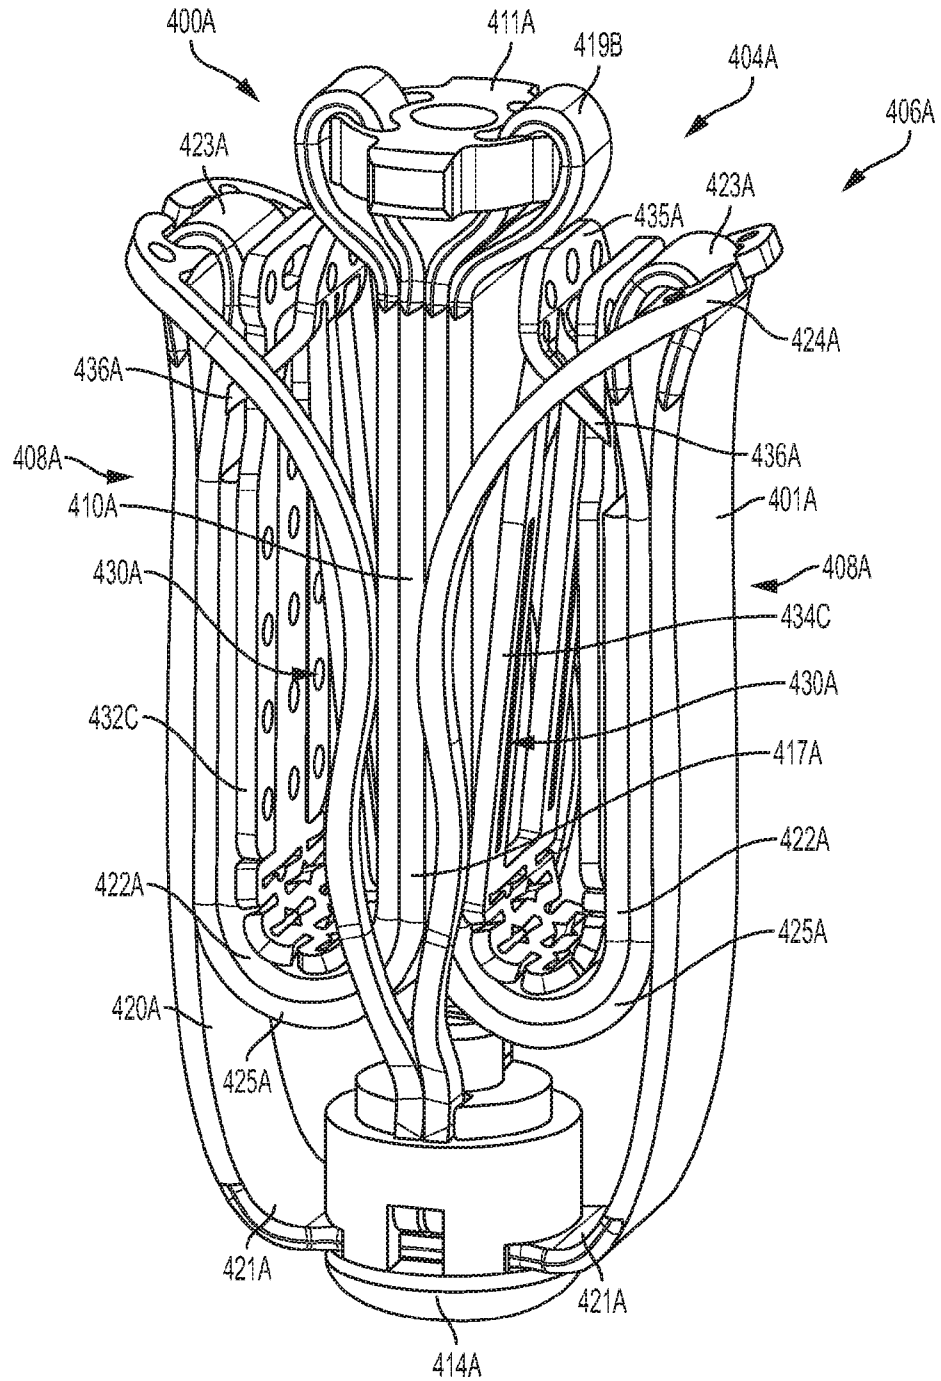


Fig. 23A

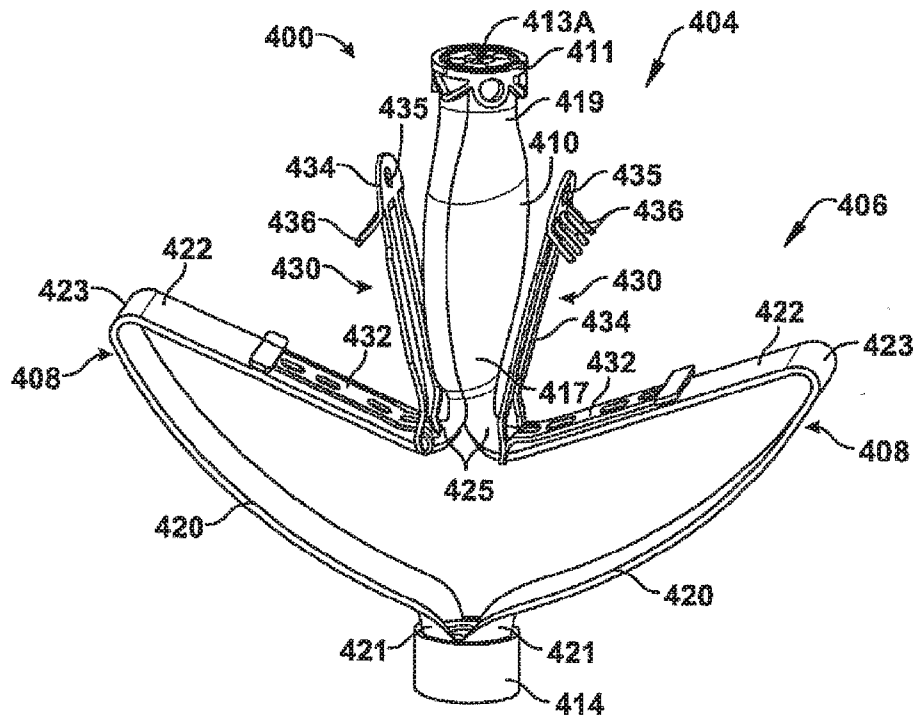


FIG. 24

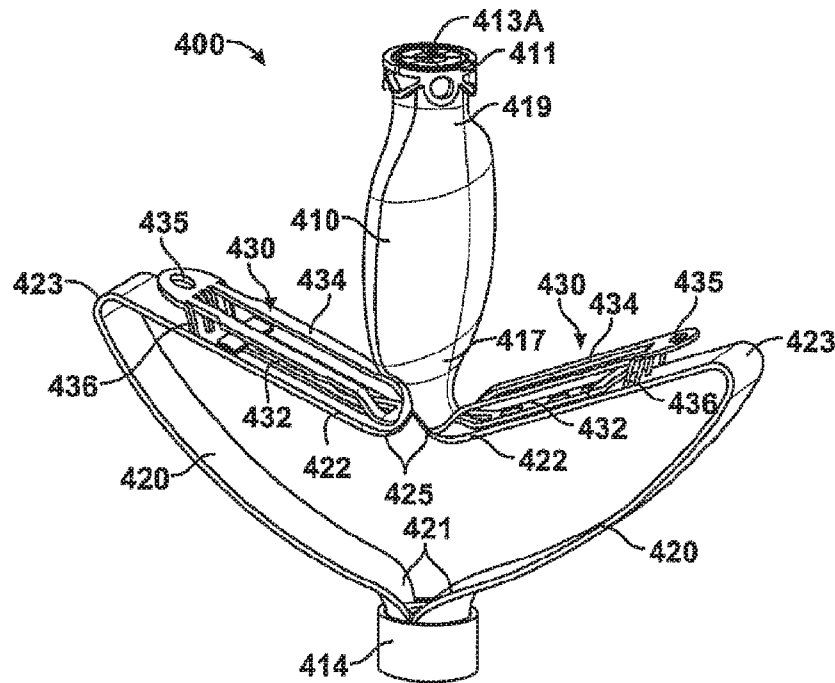


FIG. 25

26/262

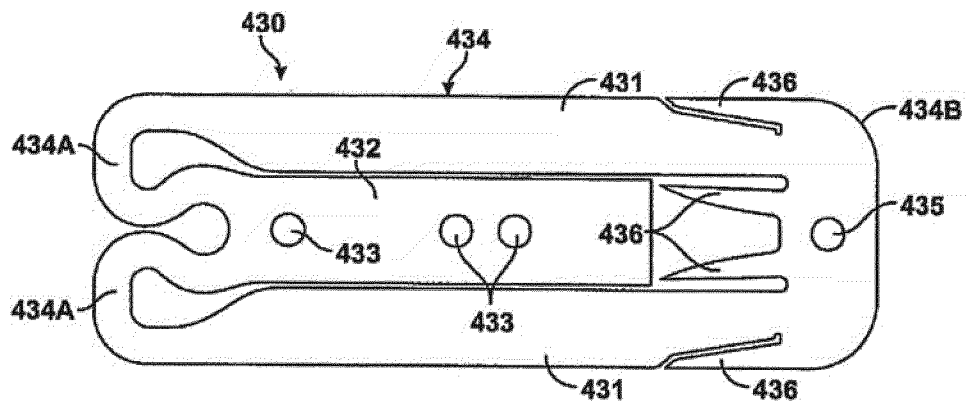


FIG. 26

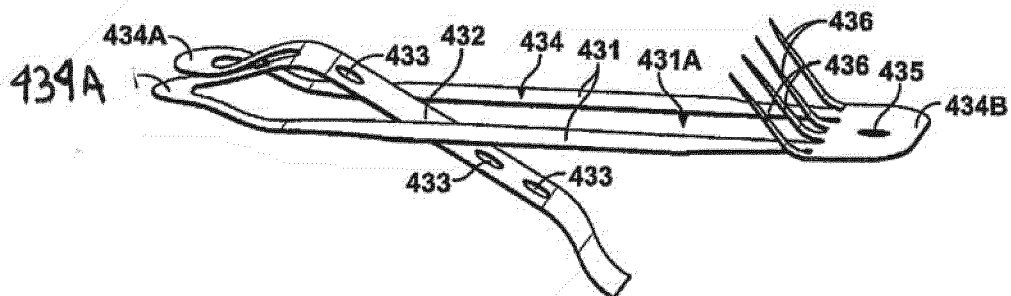
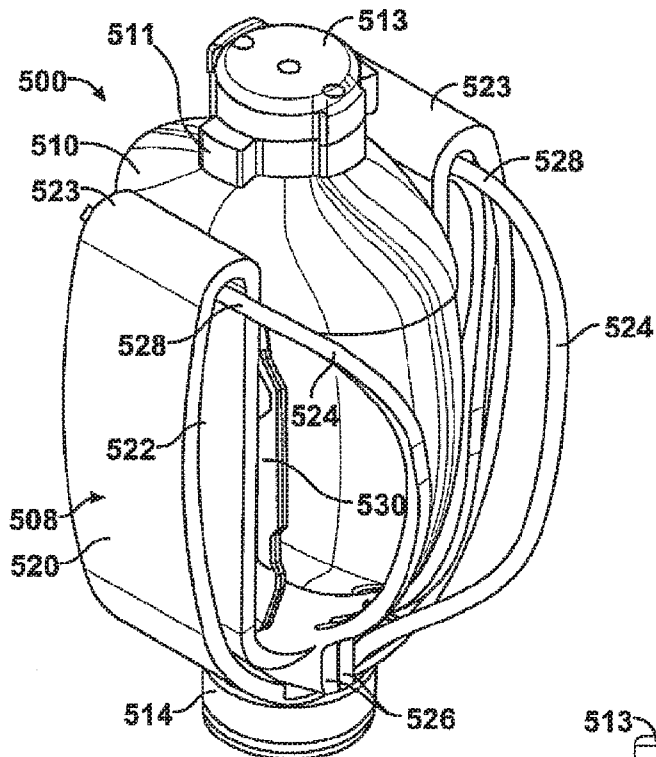
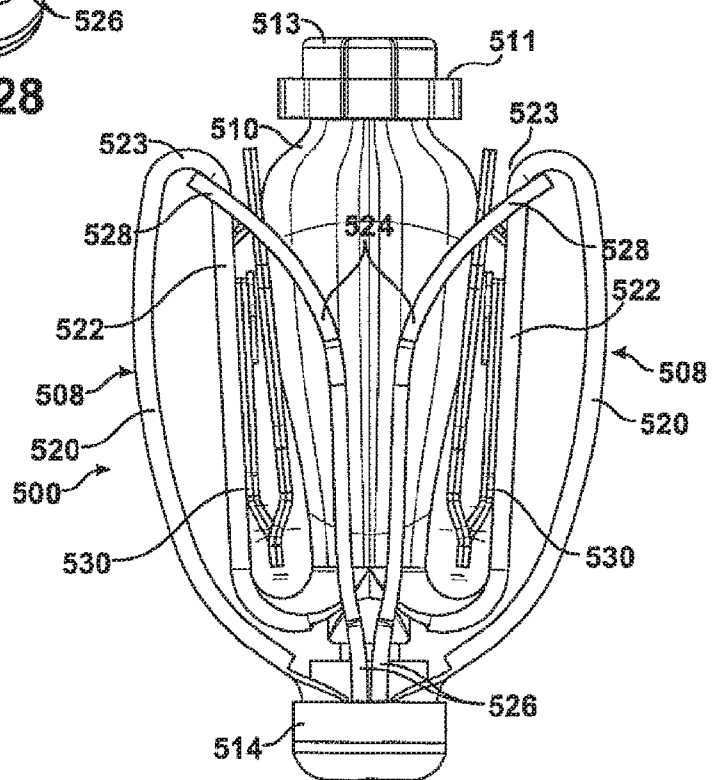
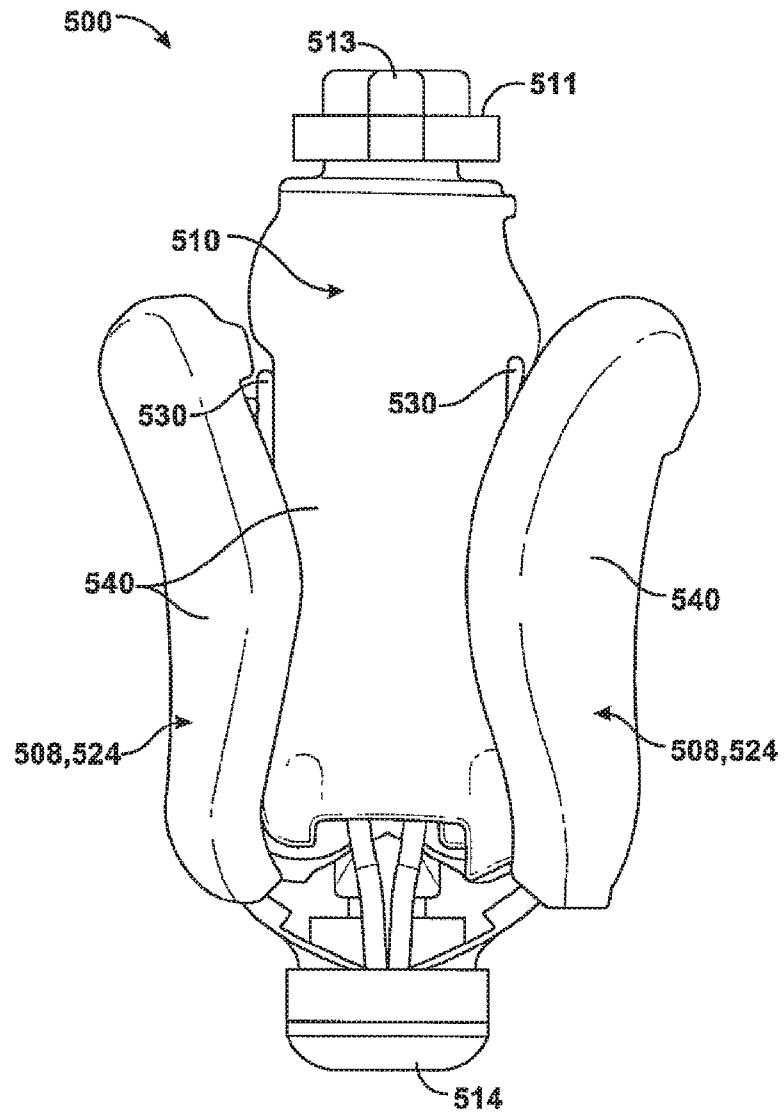
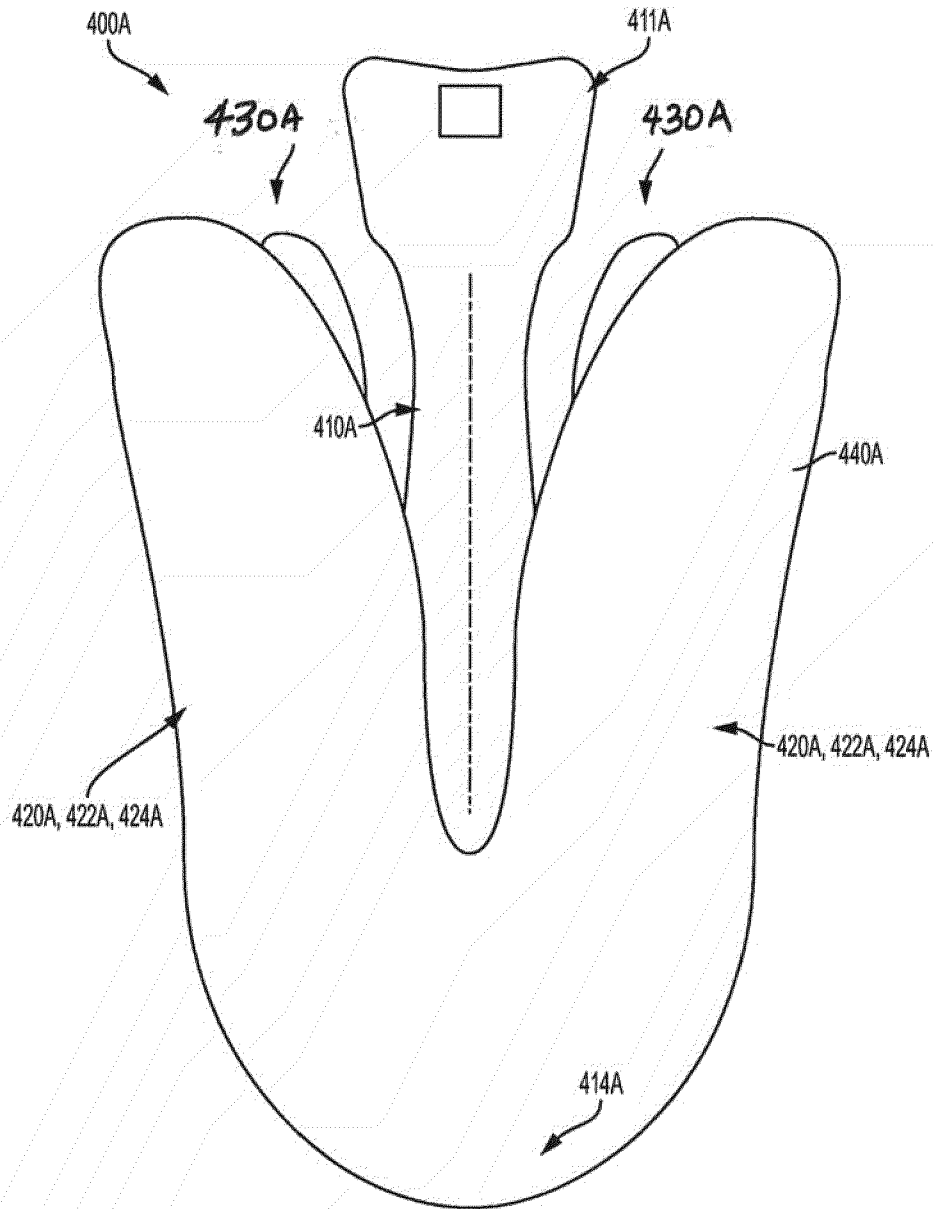


FIG. 27


**FIG. 28****FIG. 29**


**FIG. 30**

29/262

**Fig. 30A**

30/262

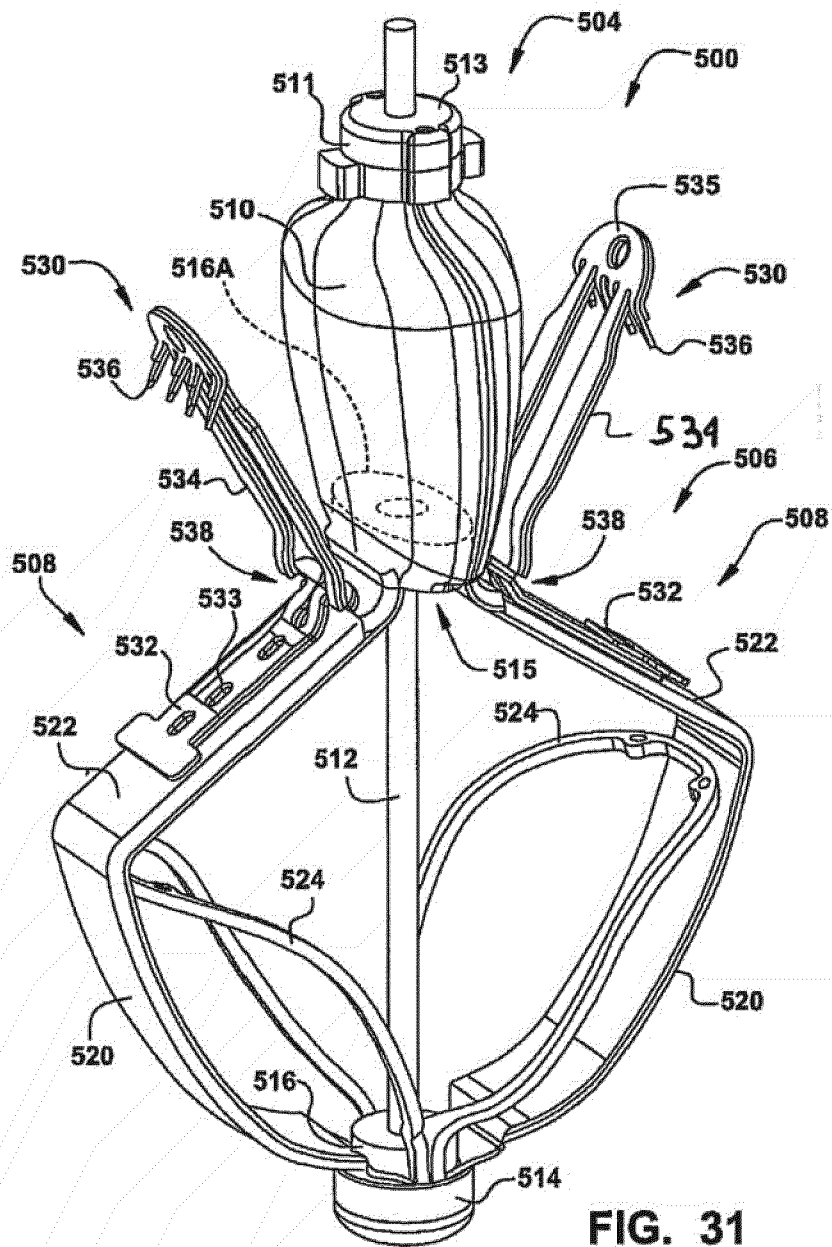

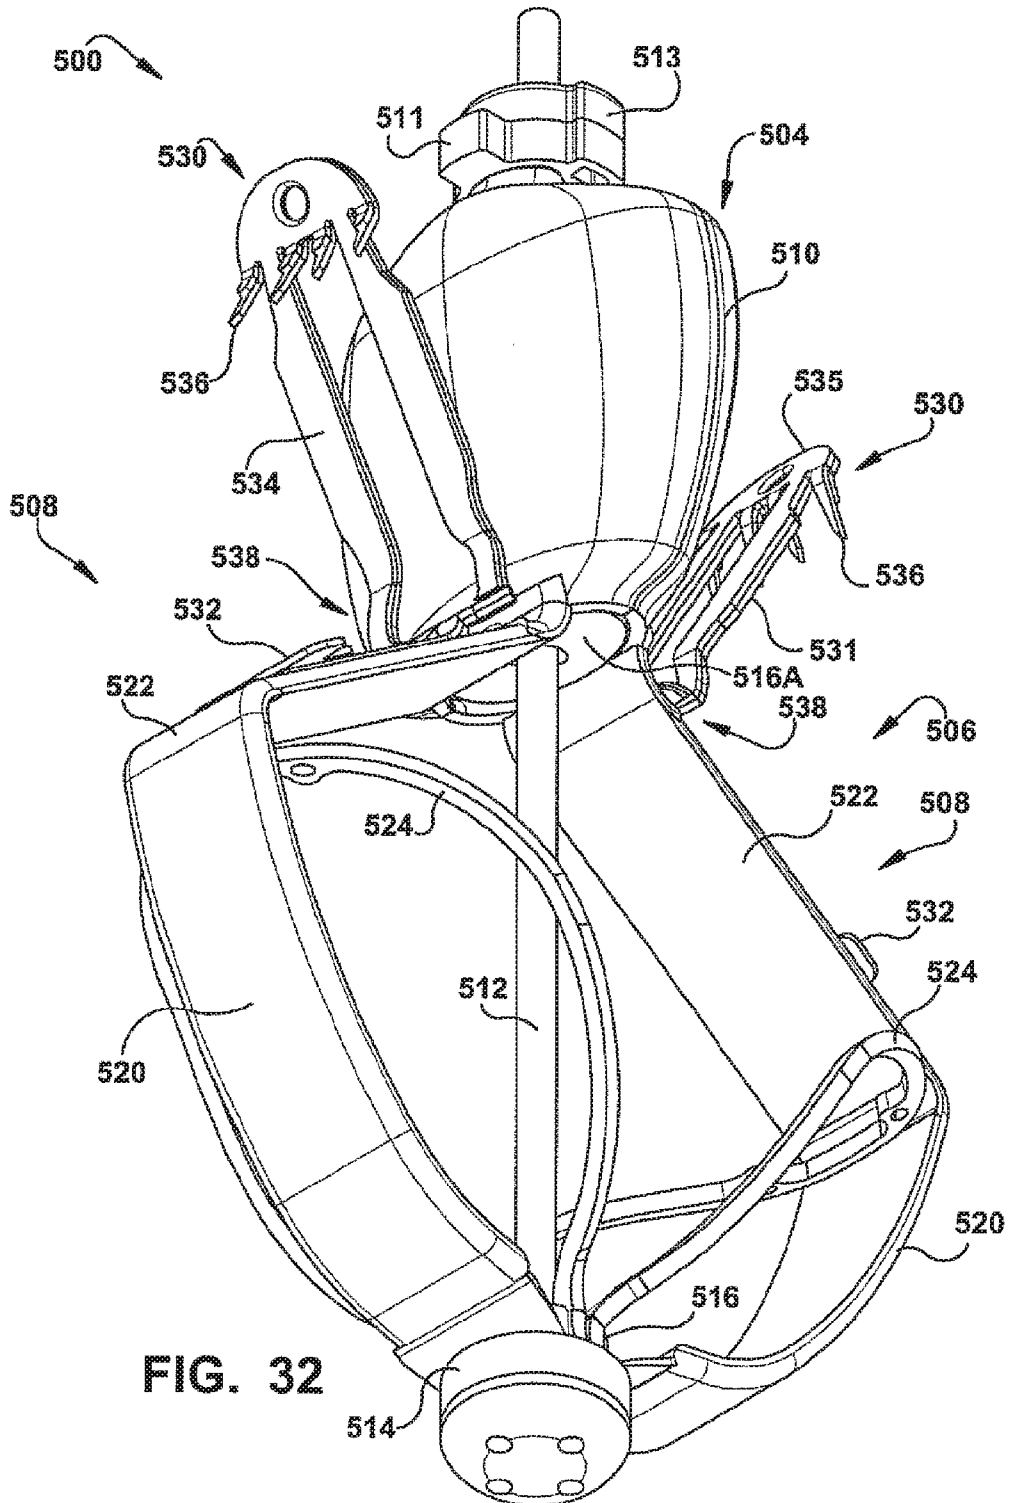

32/262

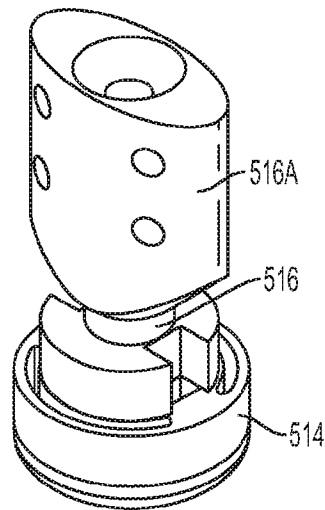


Fig. 32A

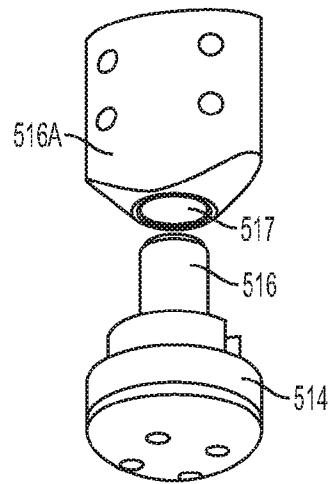


Fig. 32B

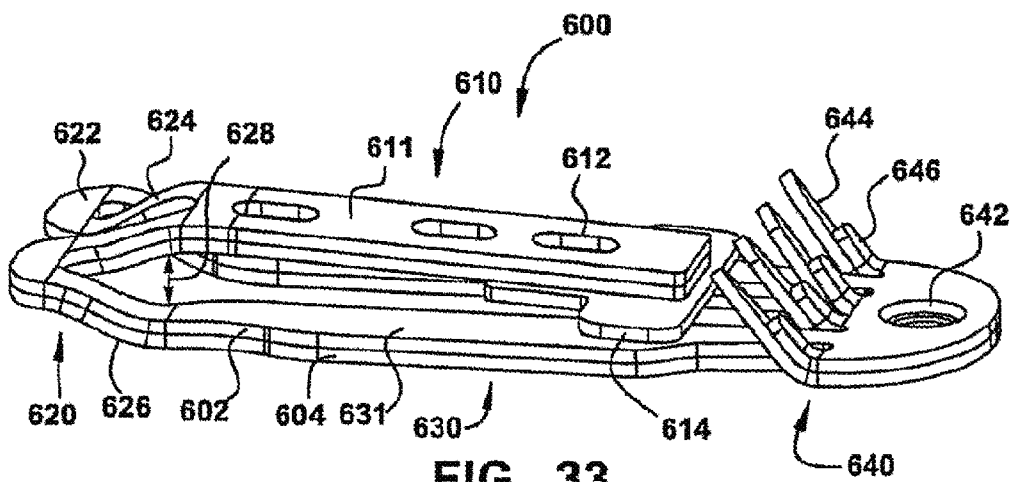


FIG. 33



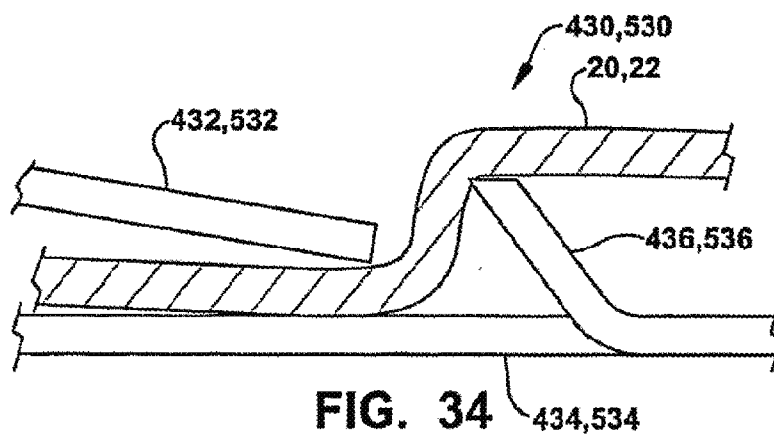


FIG. 34

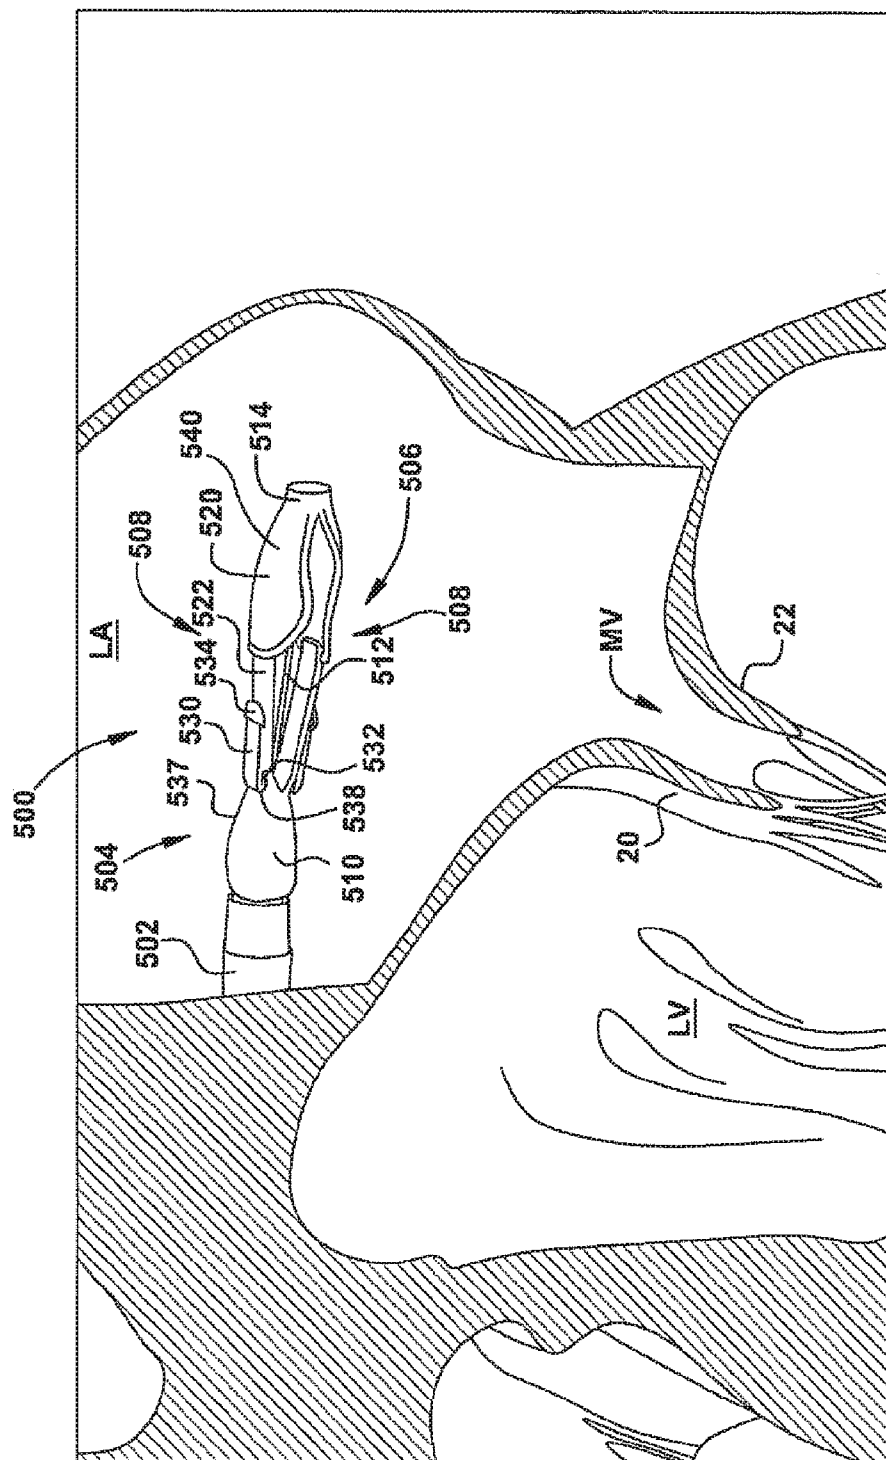

336

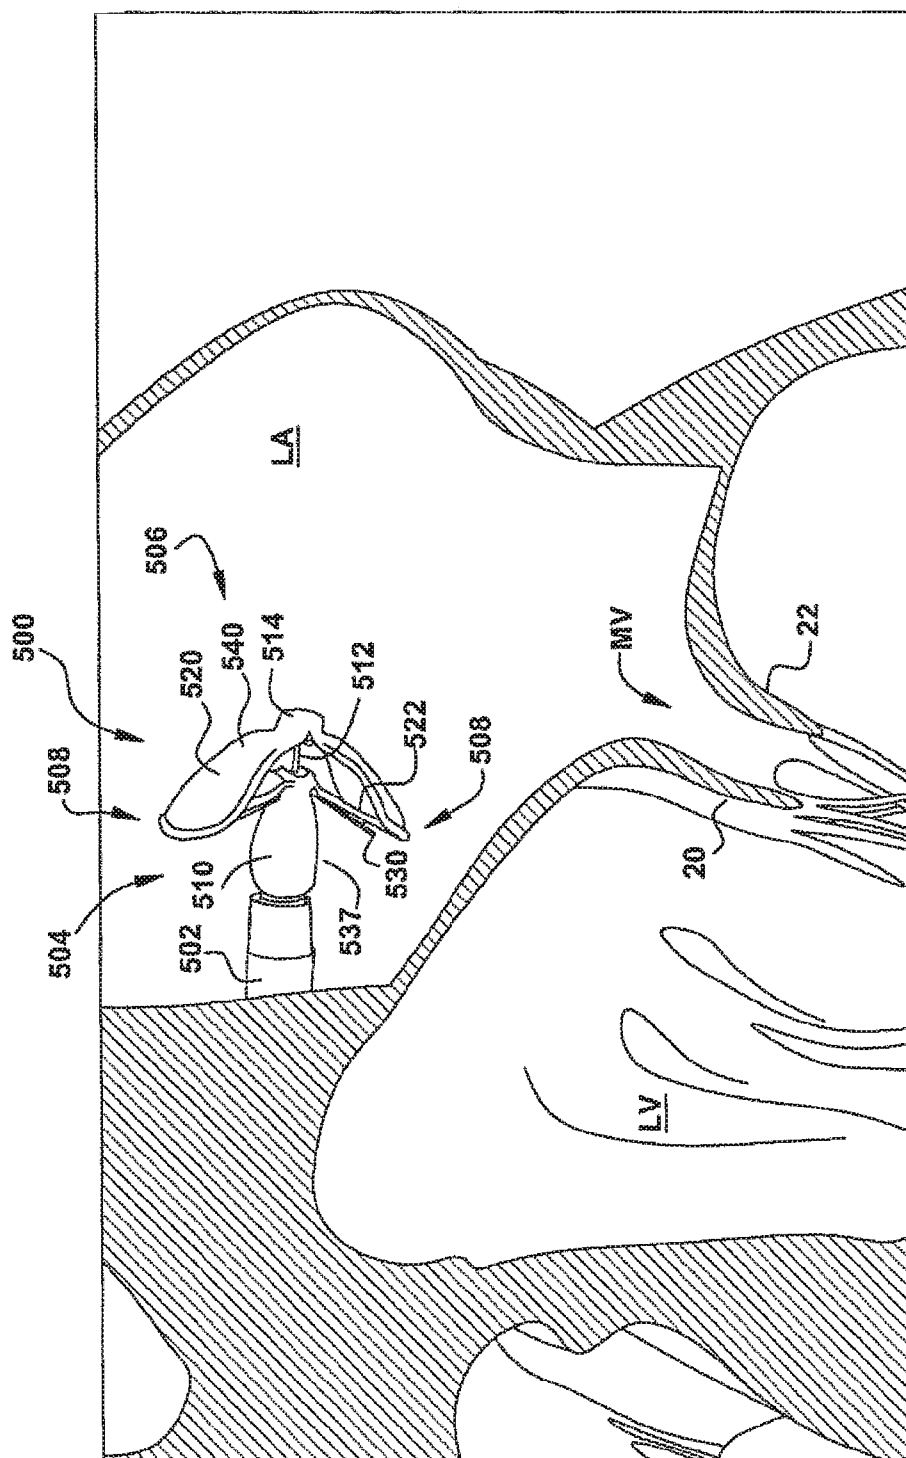

63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
8

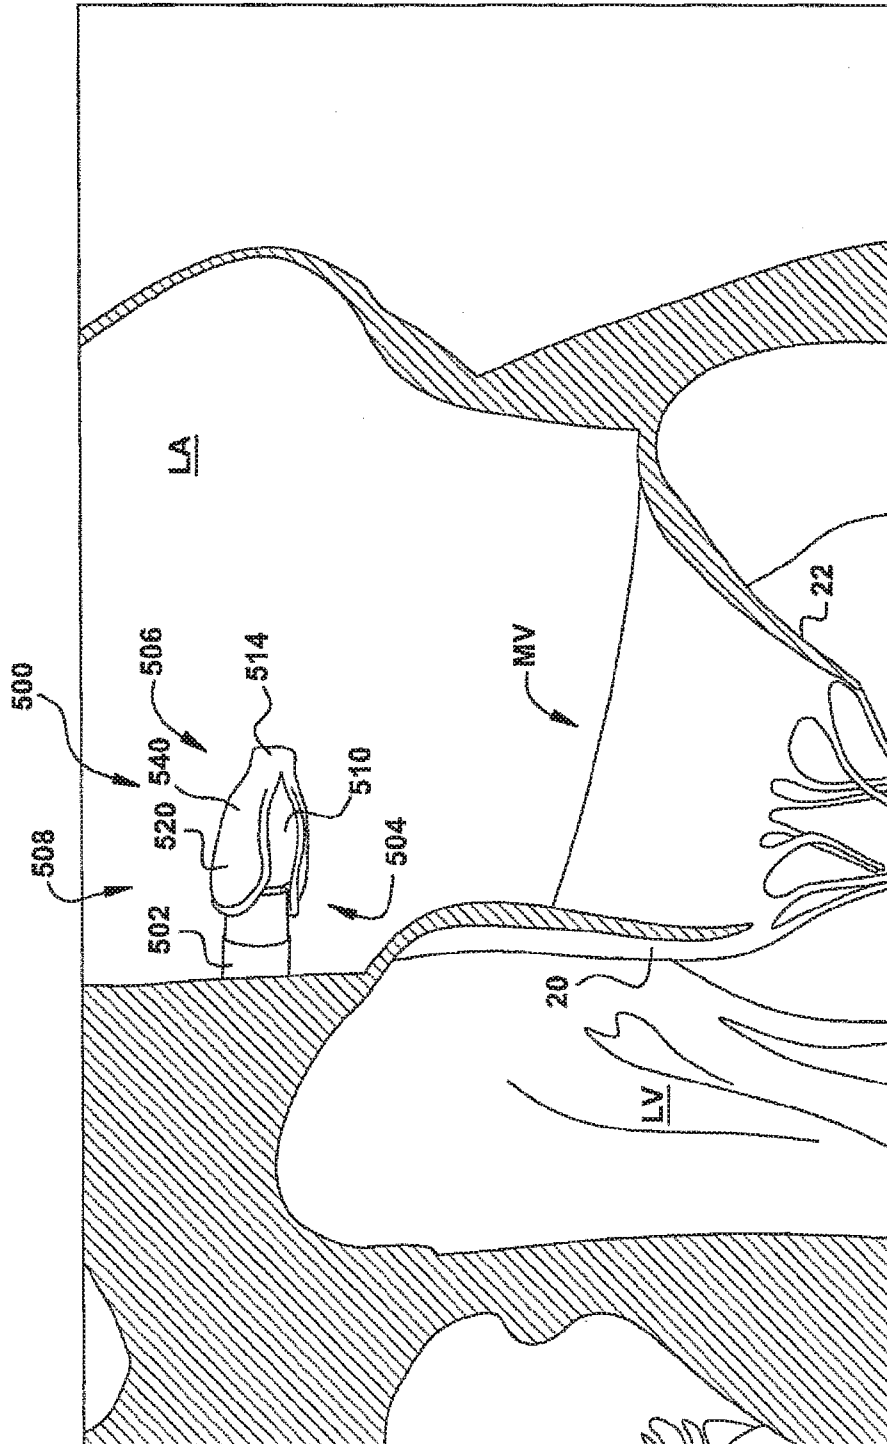


Fig. 37


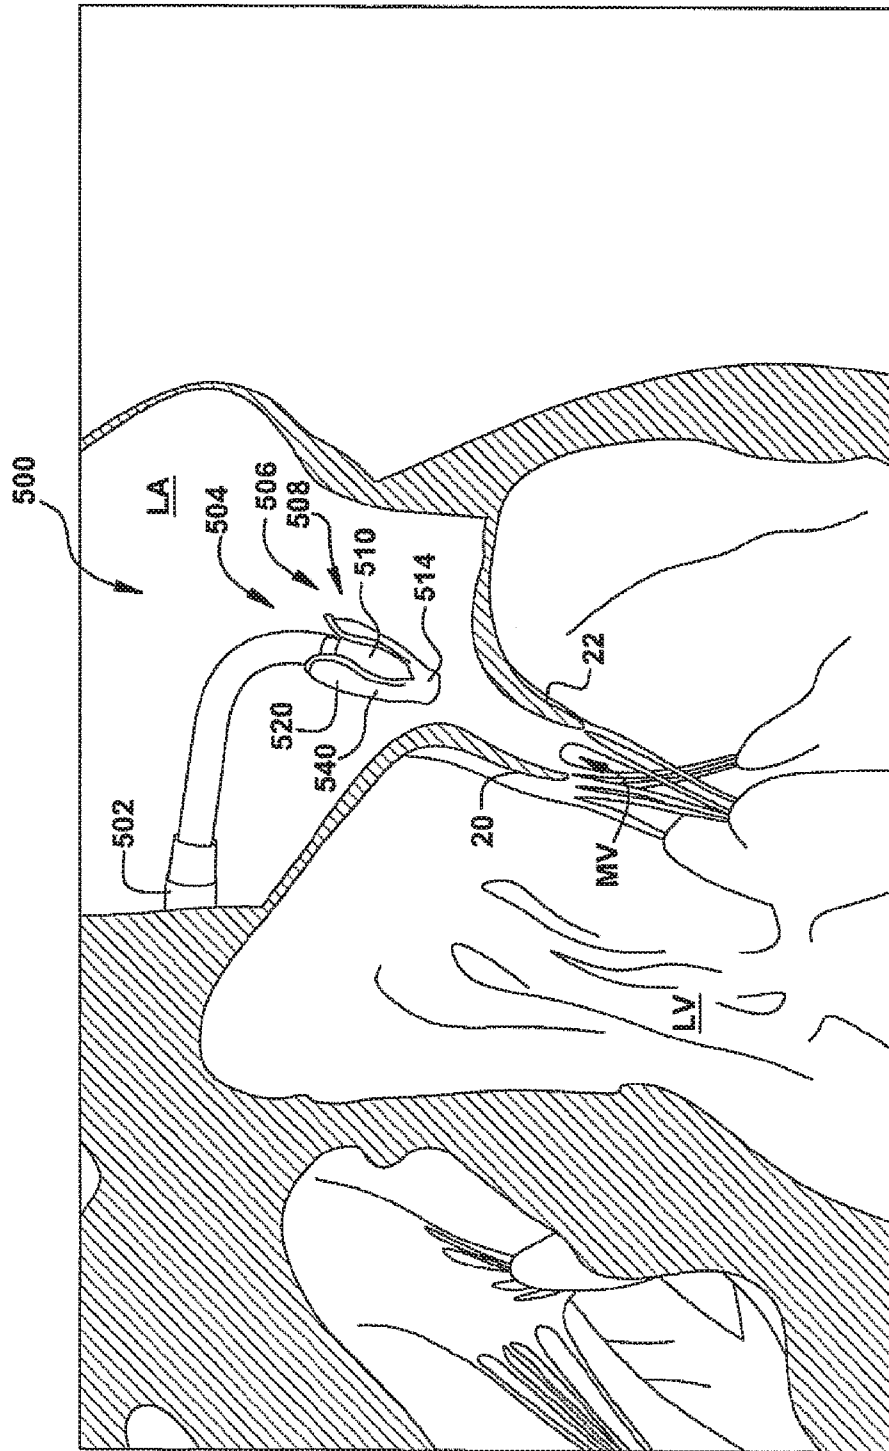


FIG. 38

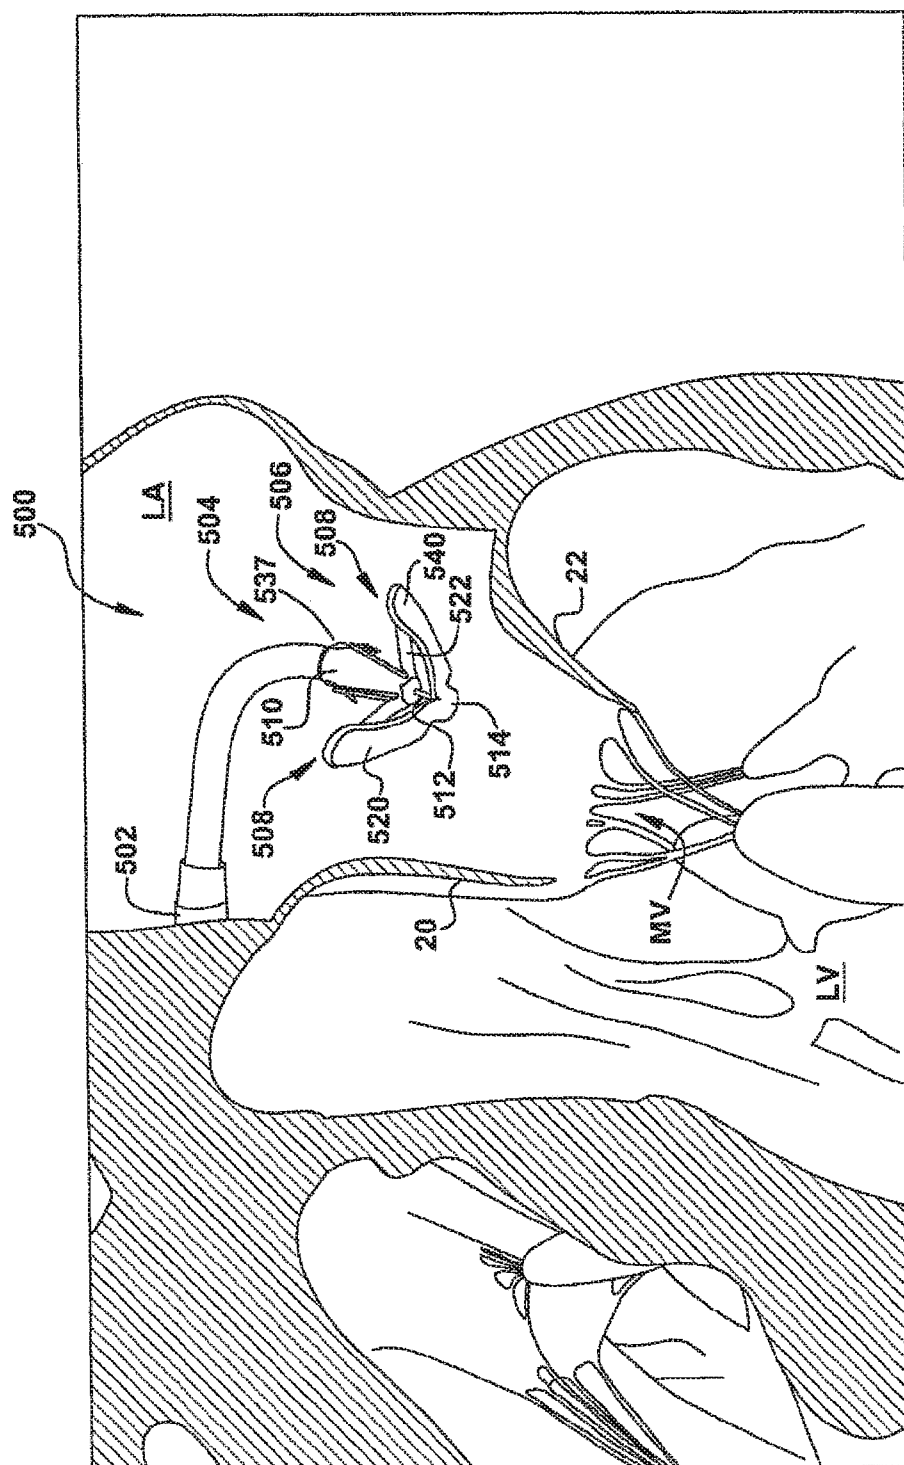

36



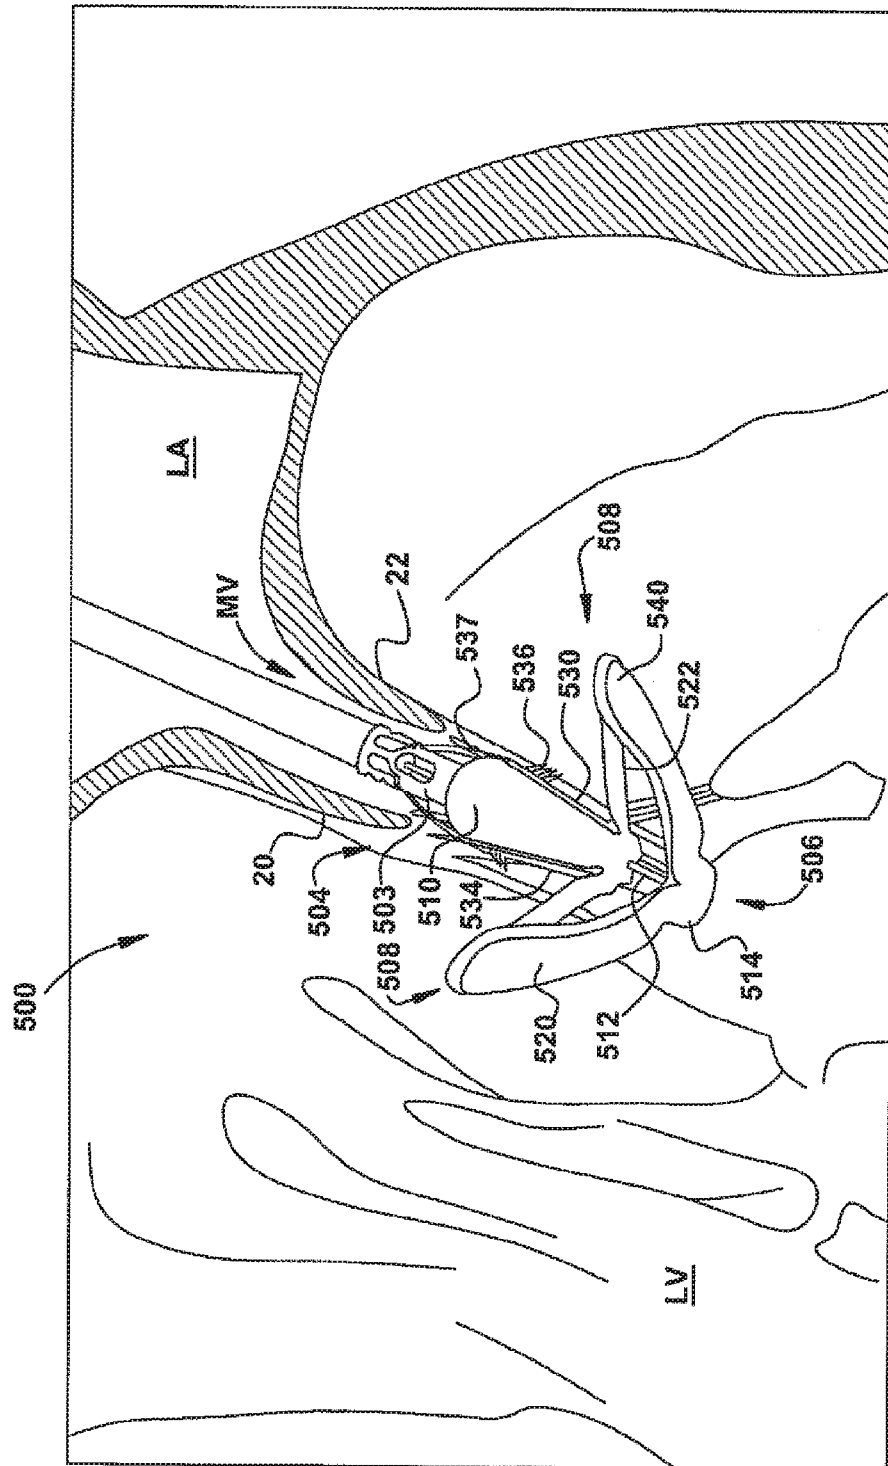


FIG. 40

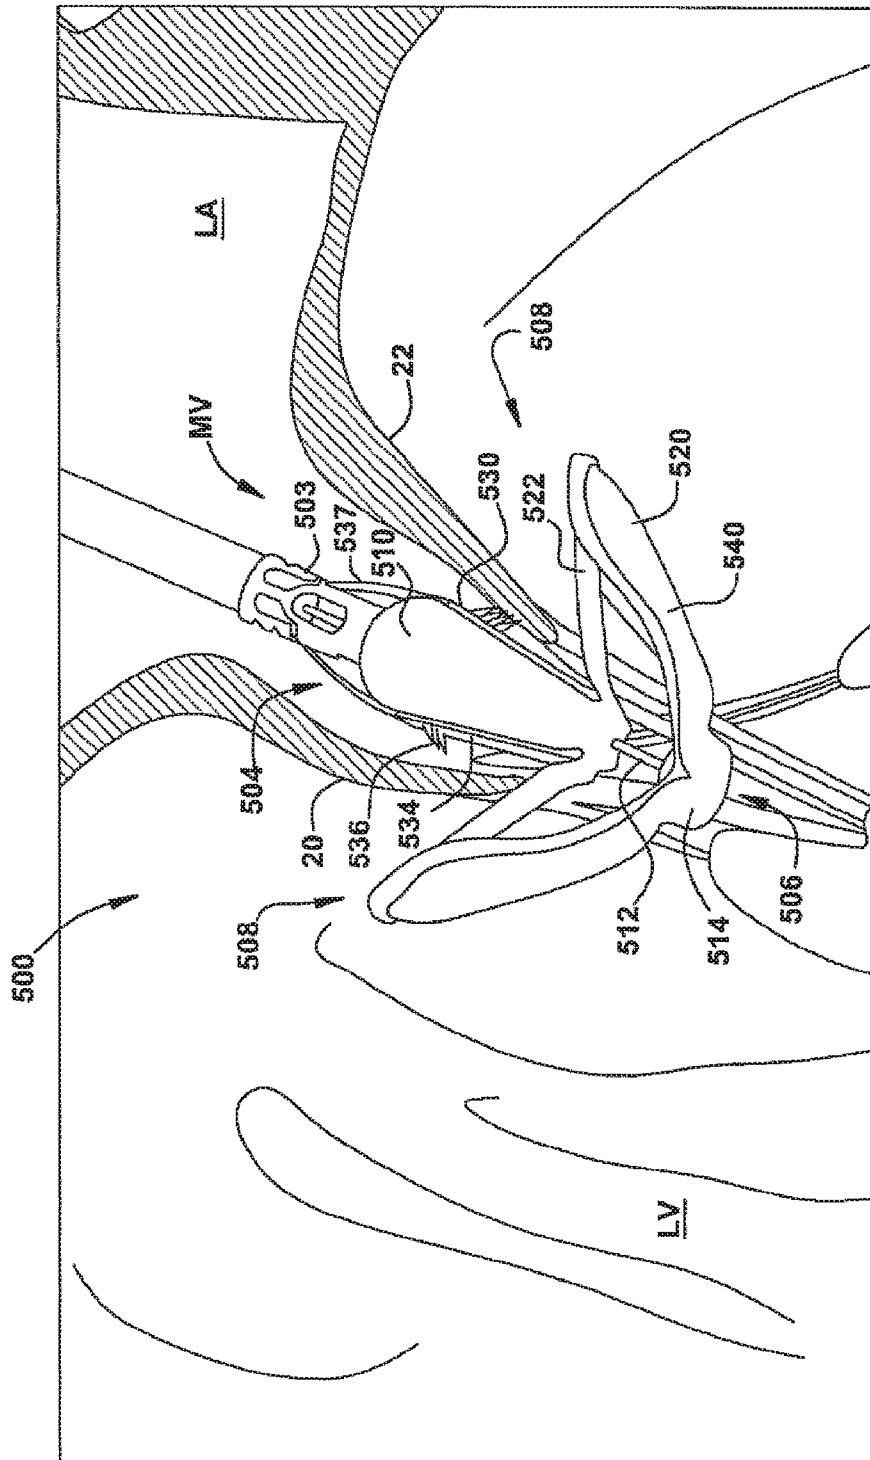

44

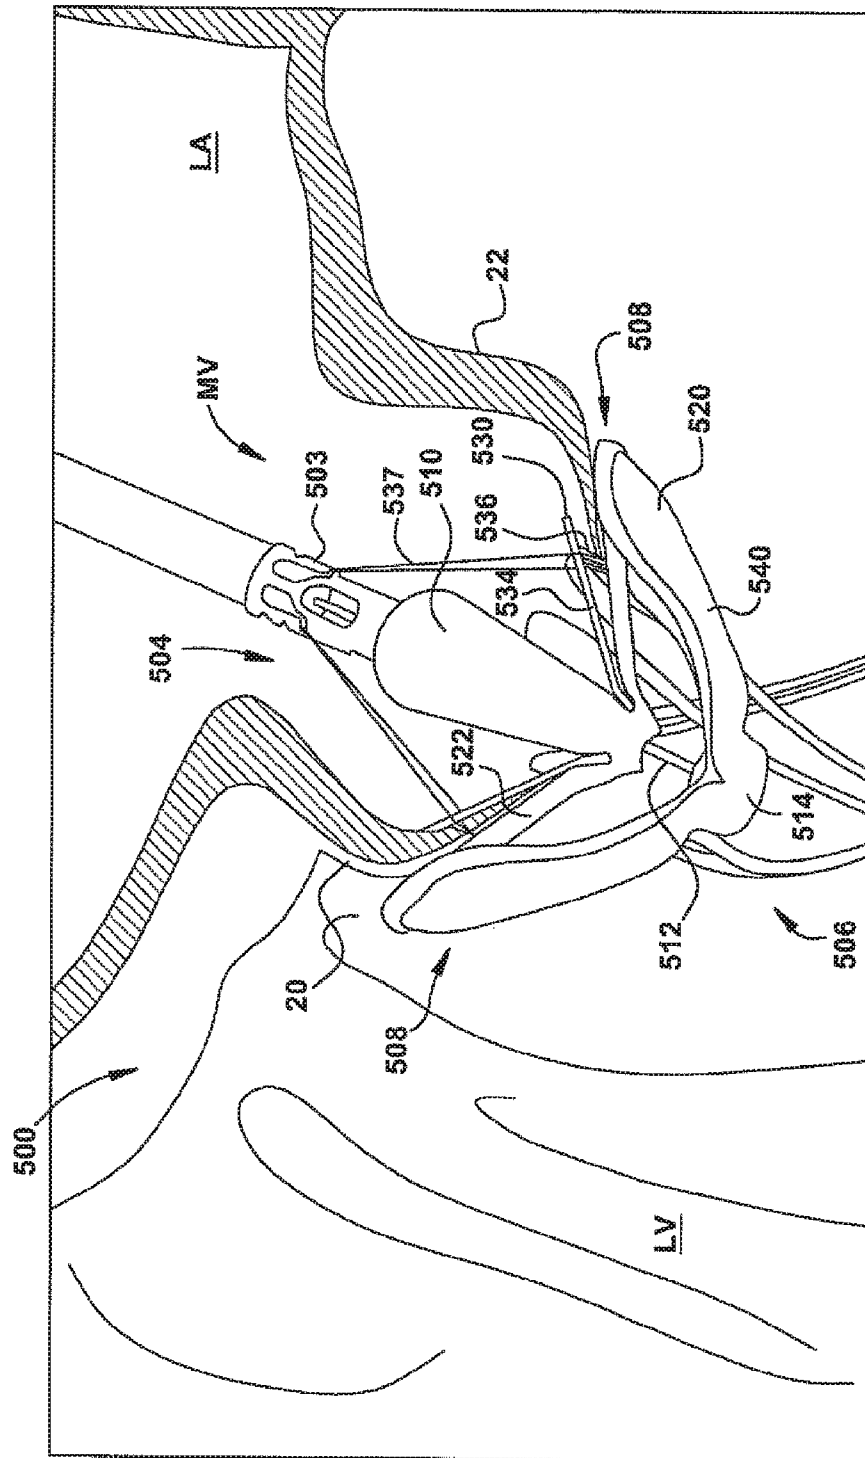

246



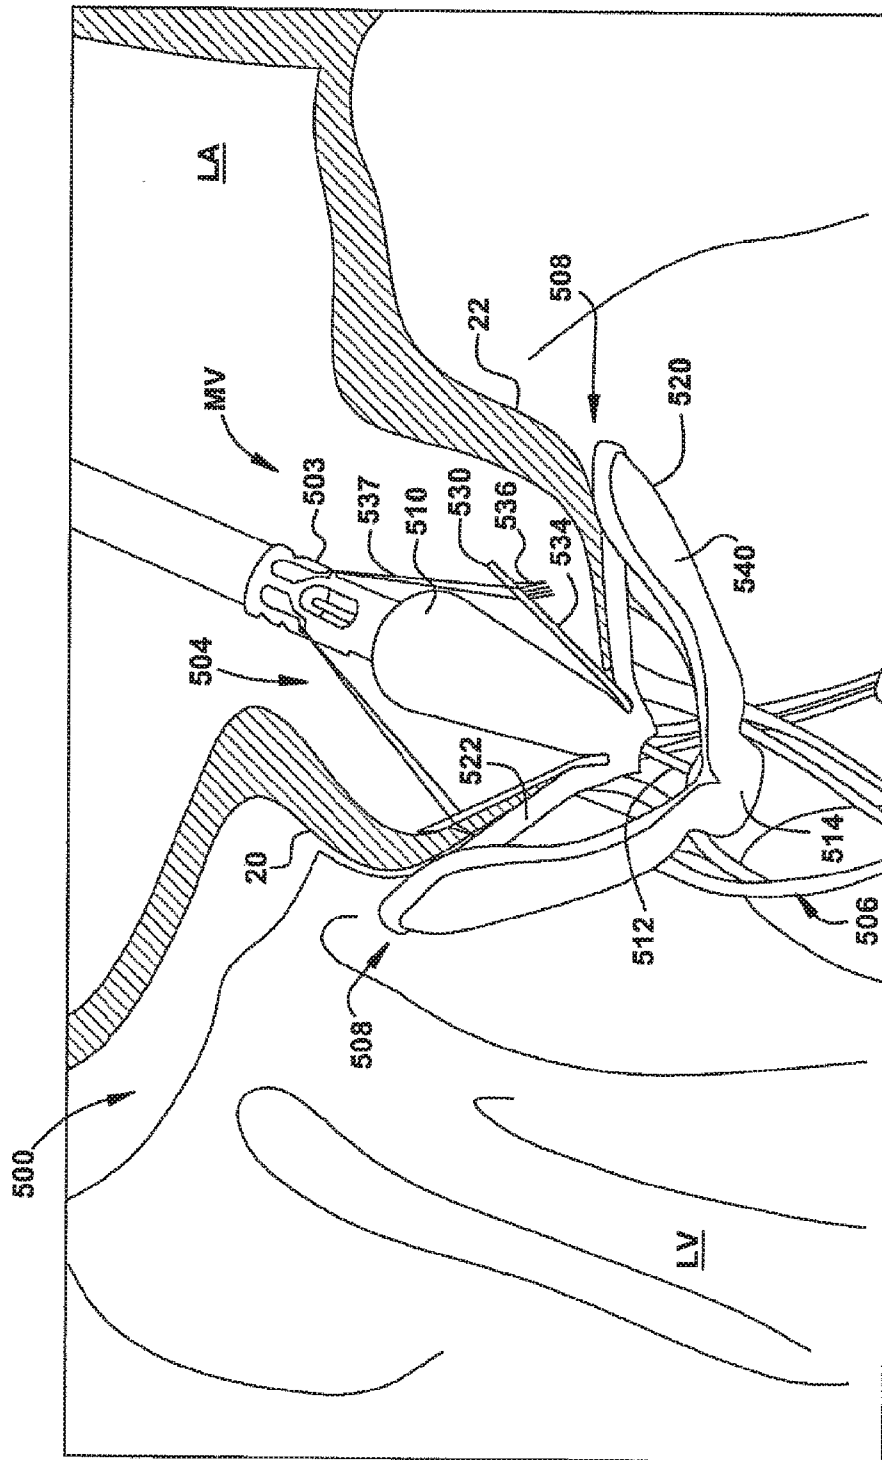


Fig. 43

44
 LG²
 EL

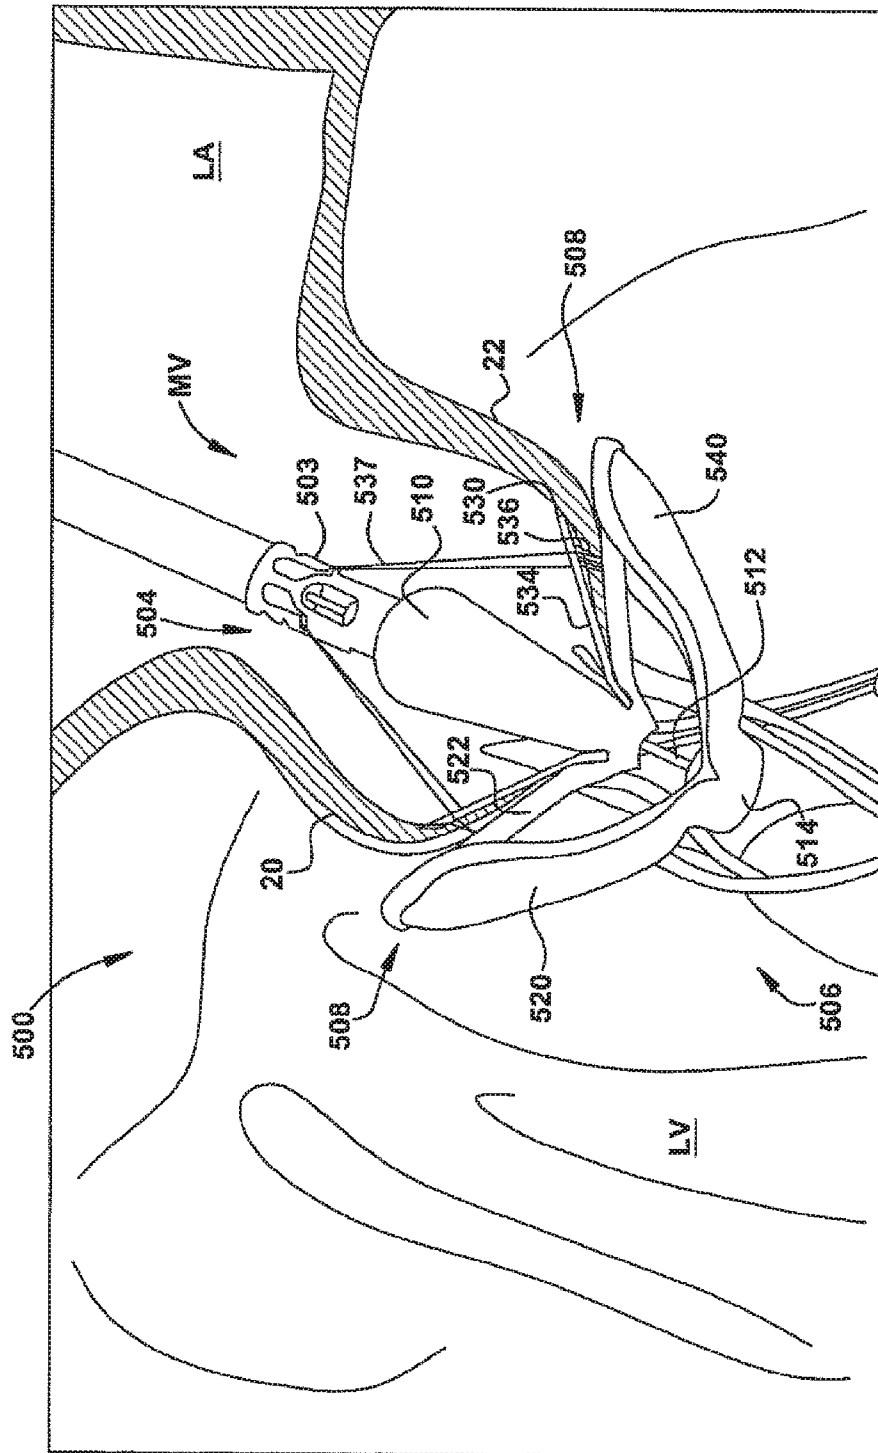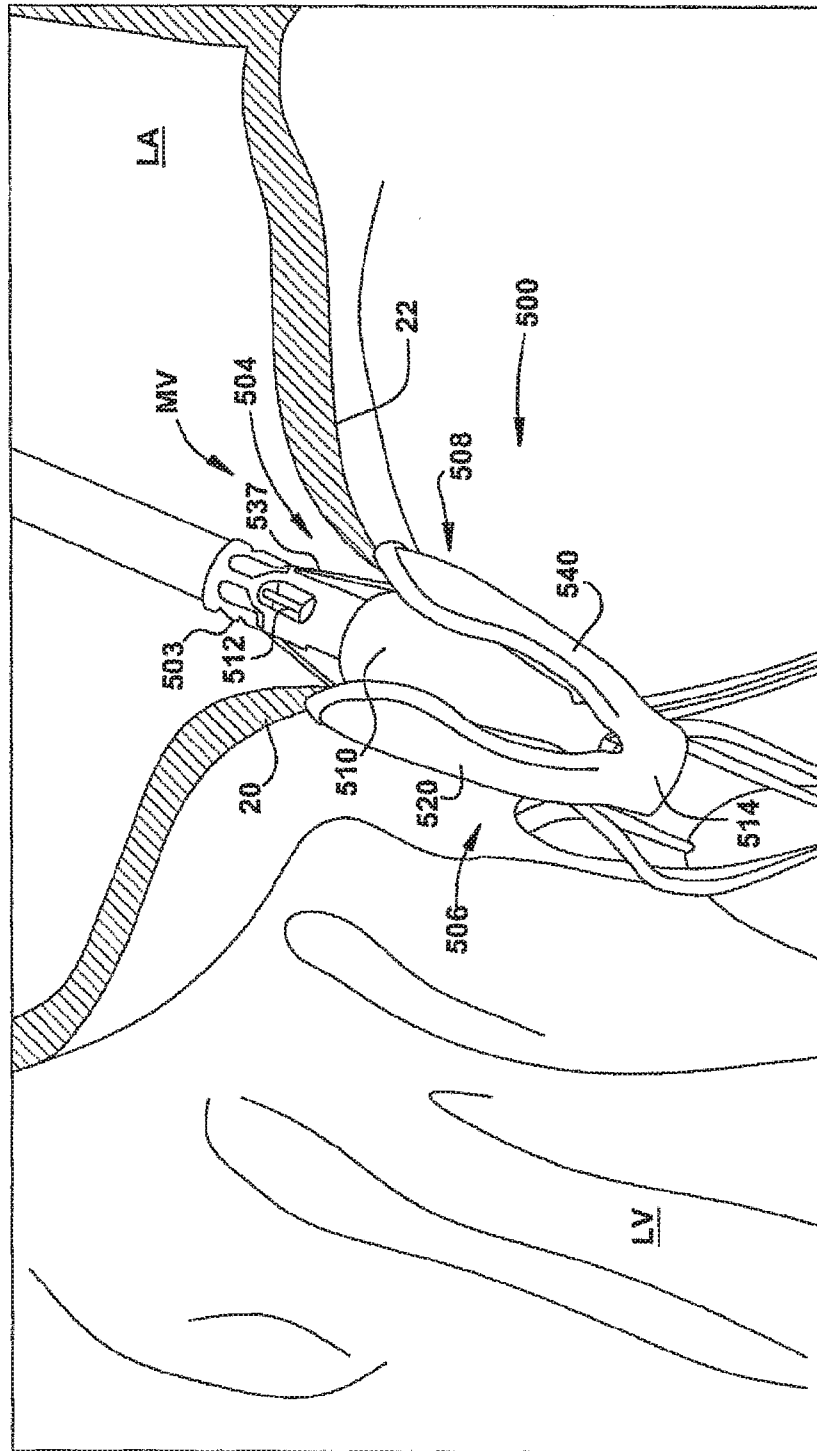

45
4
G^{*}
E

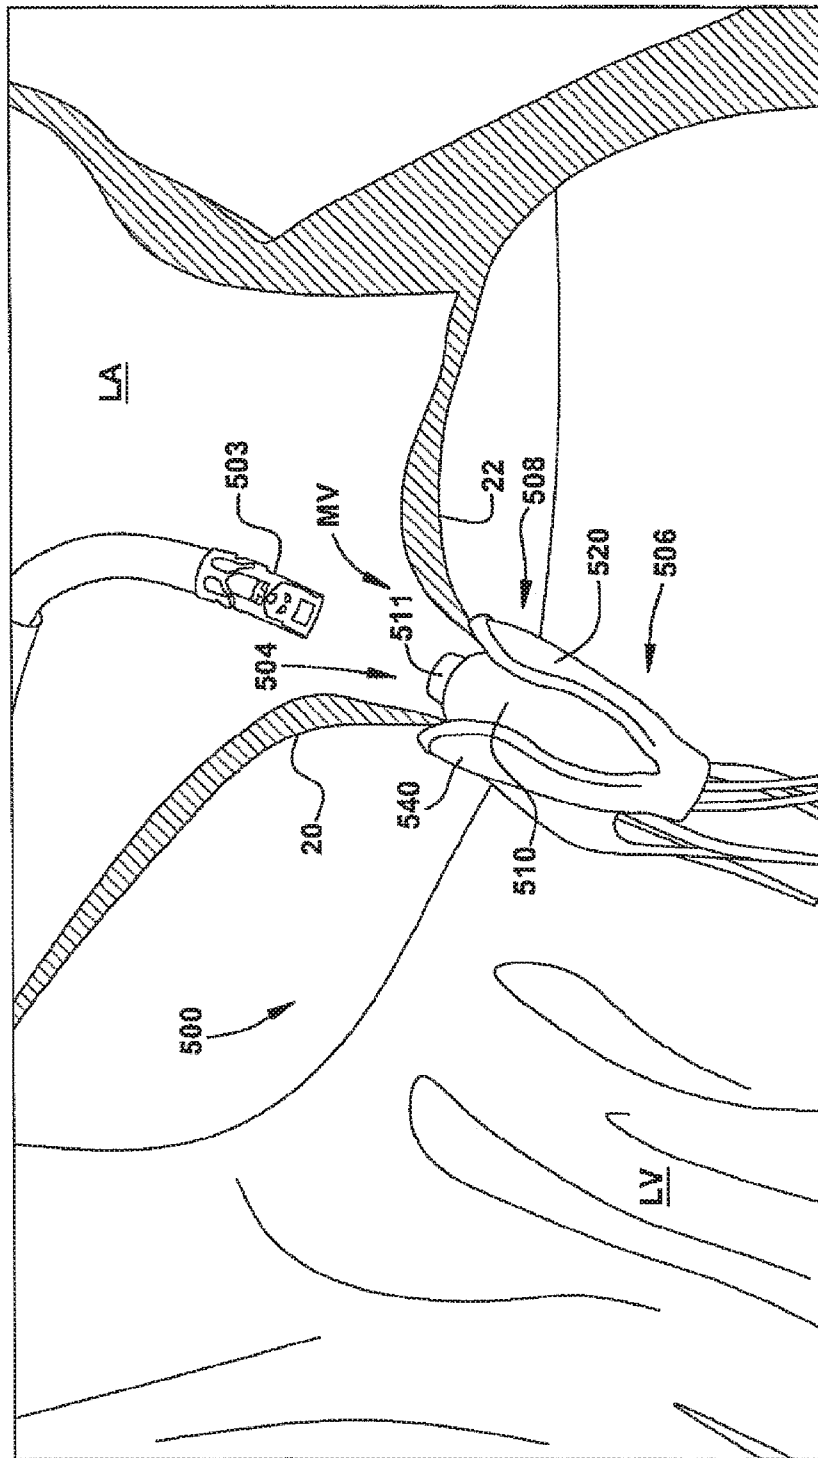


Fig. 46

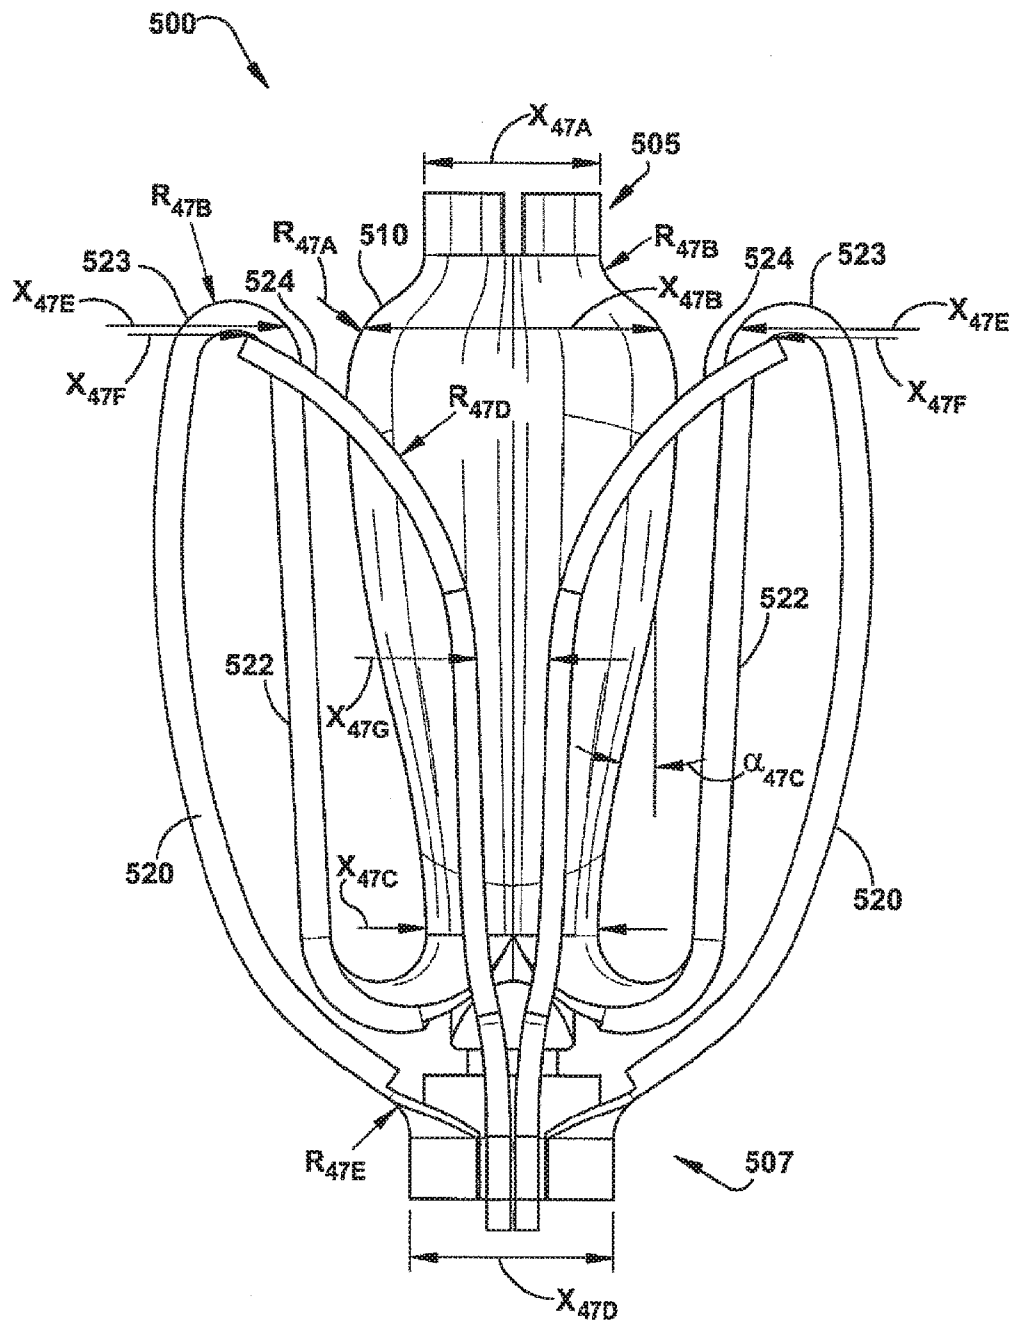


Fig. 47

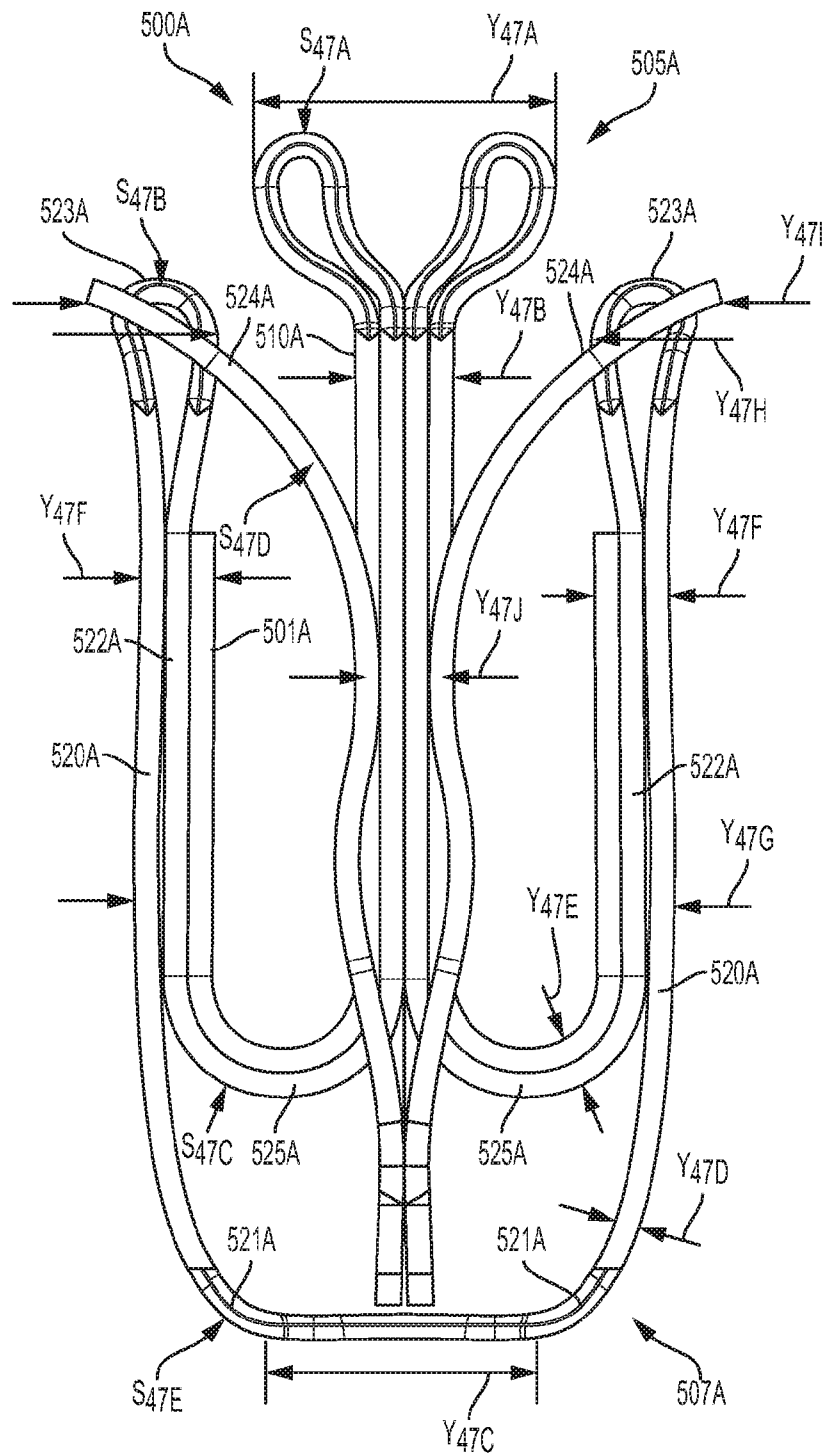
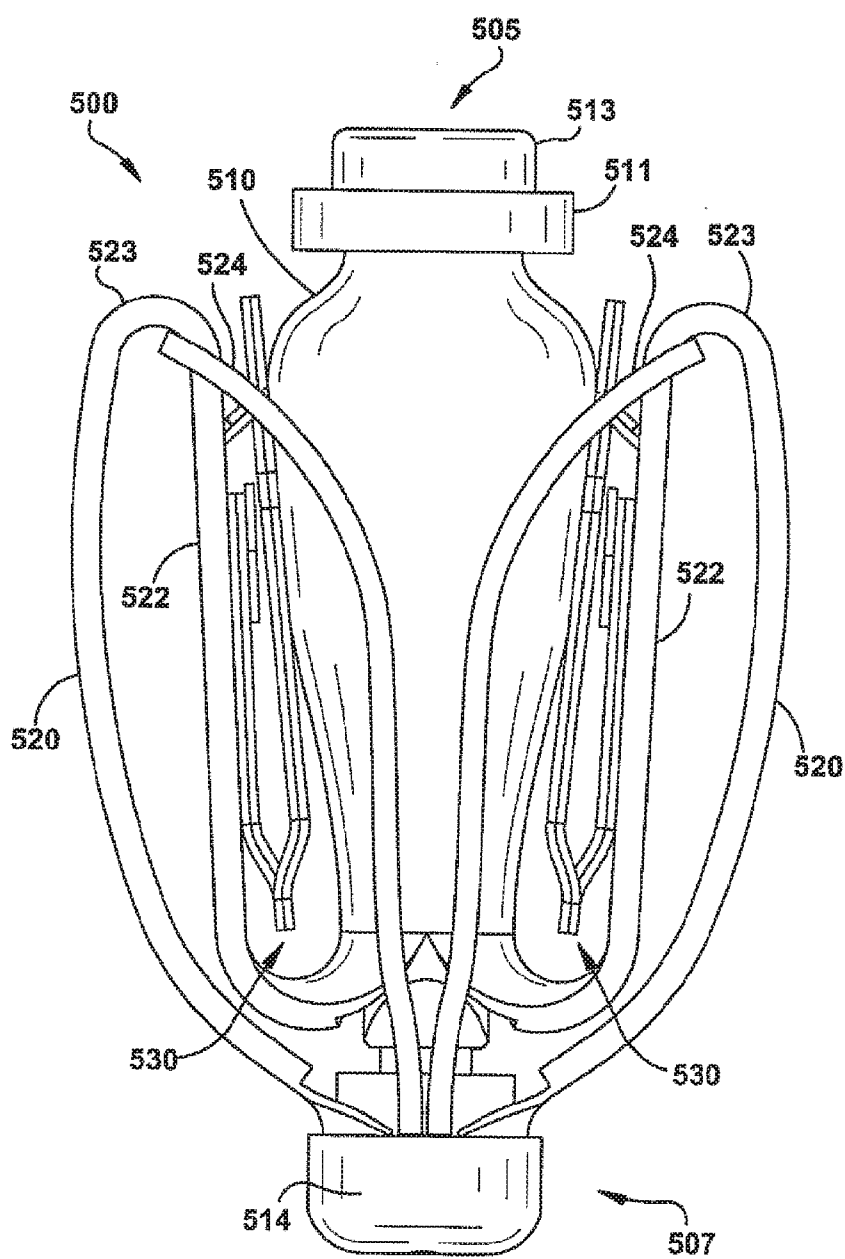
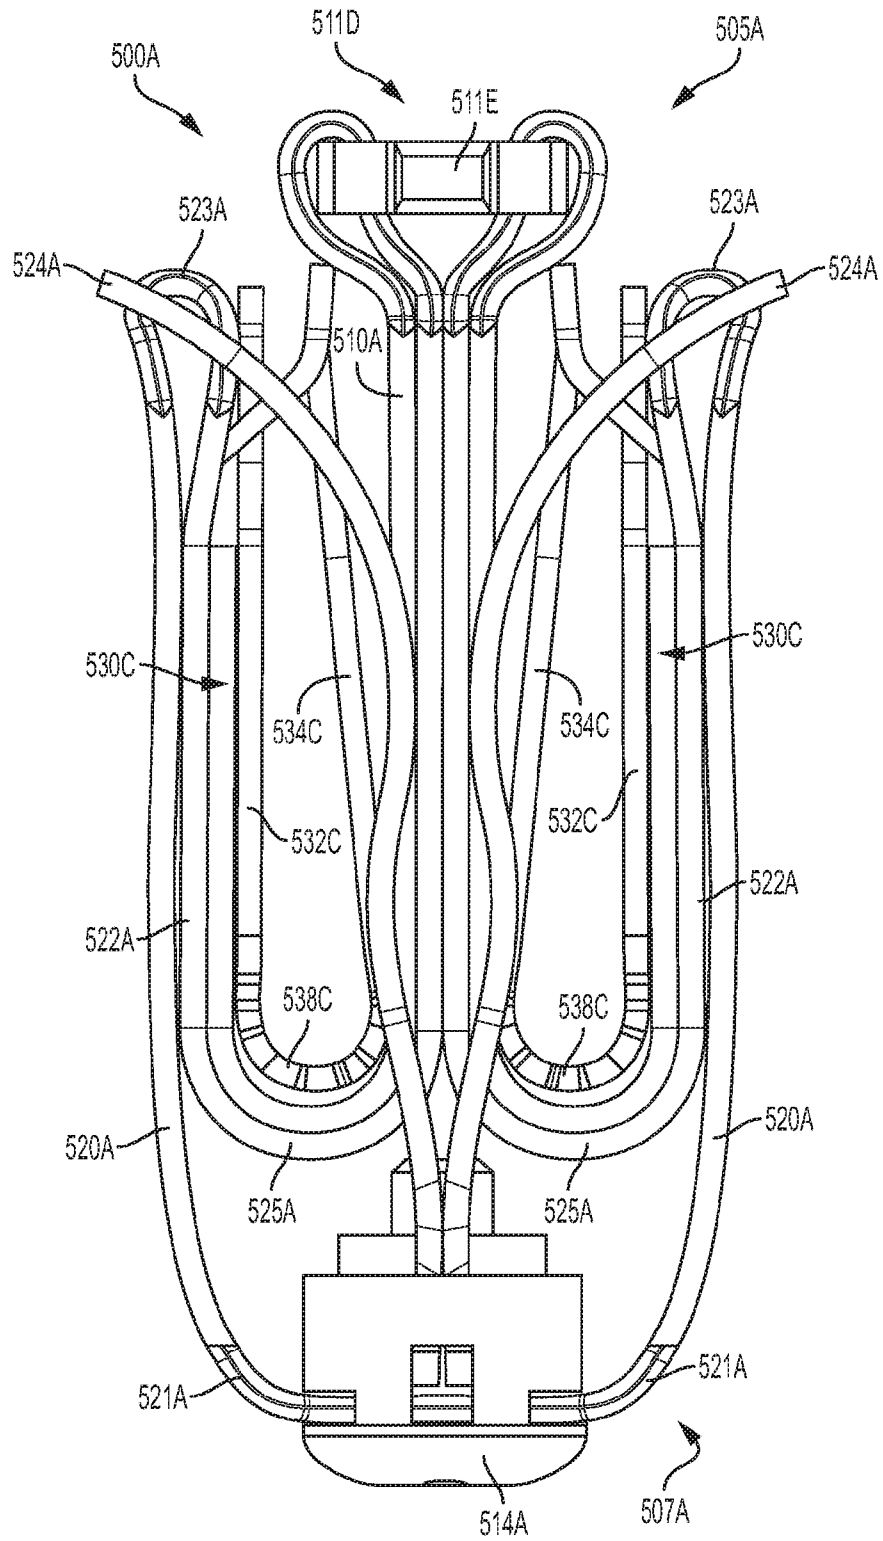


Fig. 47A

**Fig. 48**

**Fig. 48A**

49/262

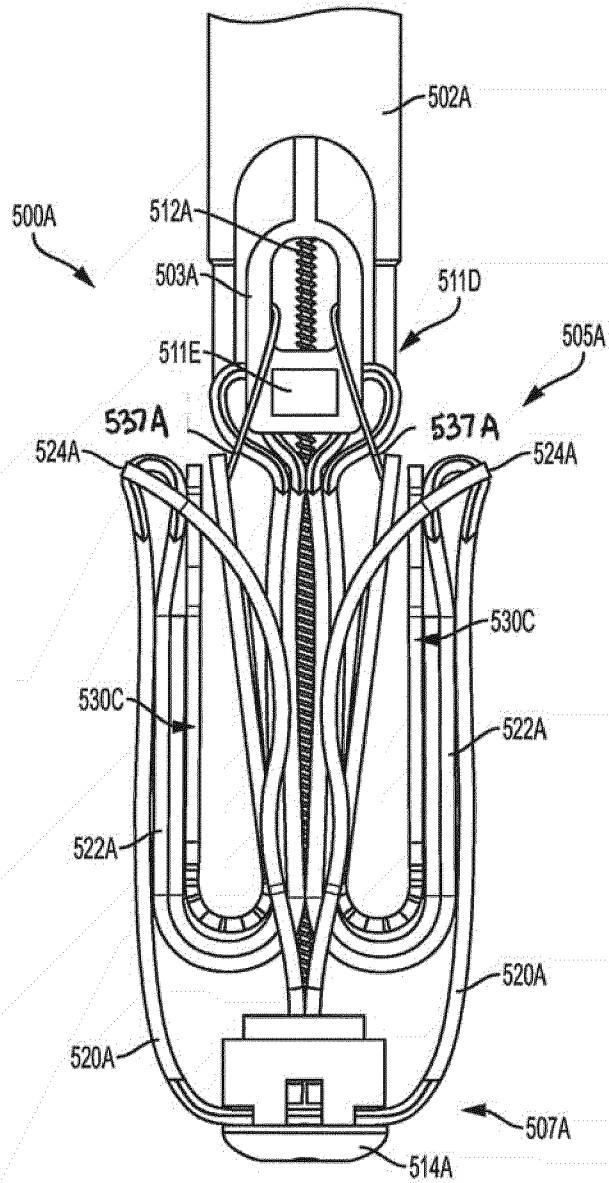
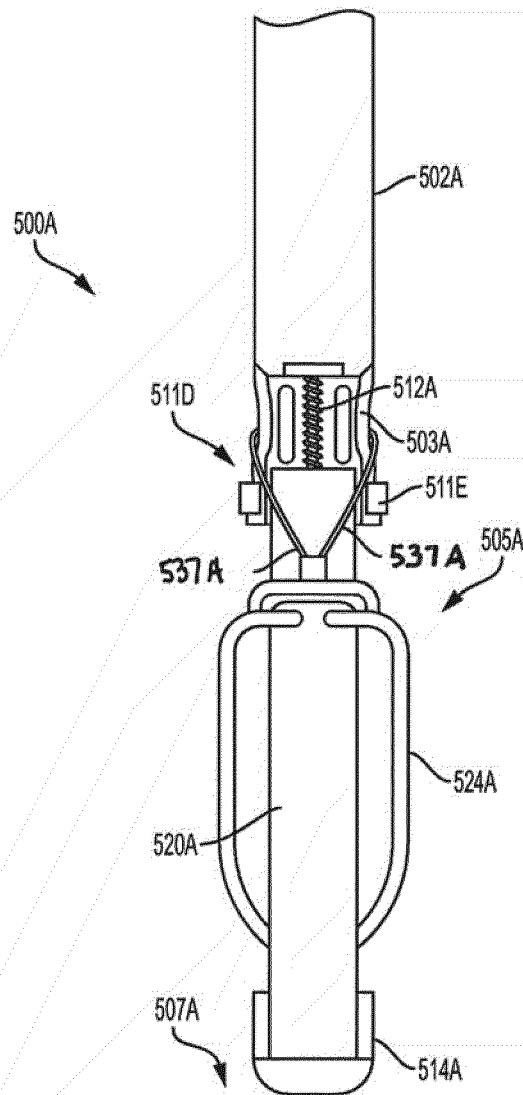
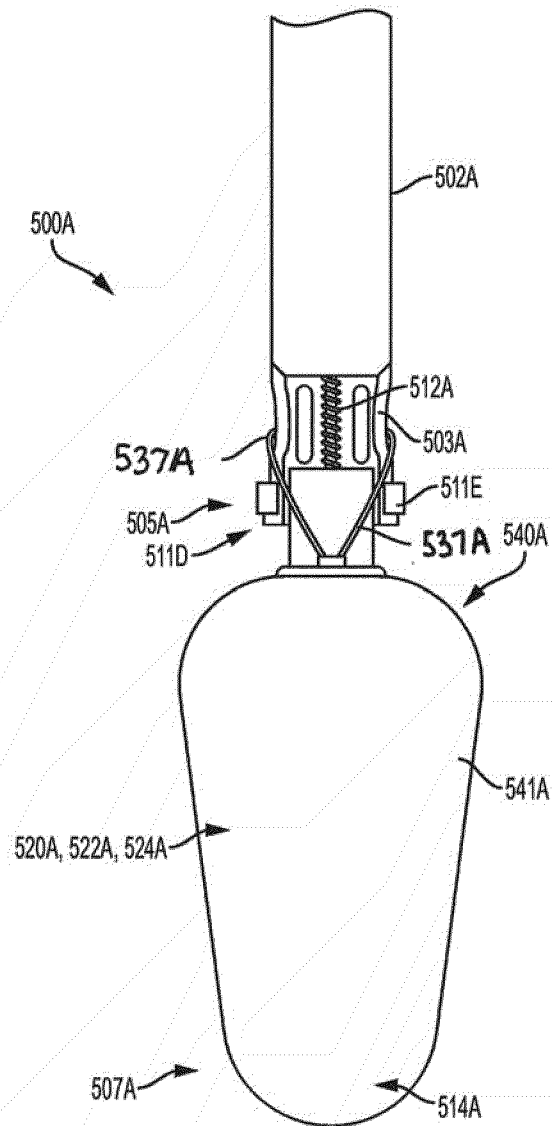


Fig. 48B


51/262

**Fig. 48D**


52/262

**Fig. 48E**


53/262

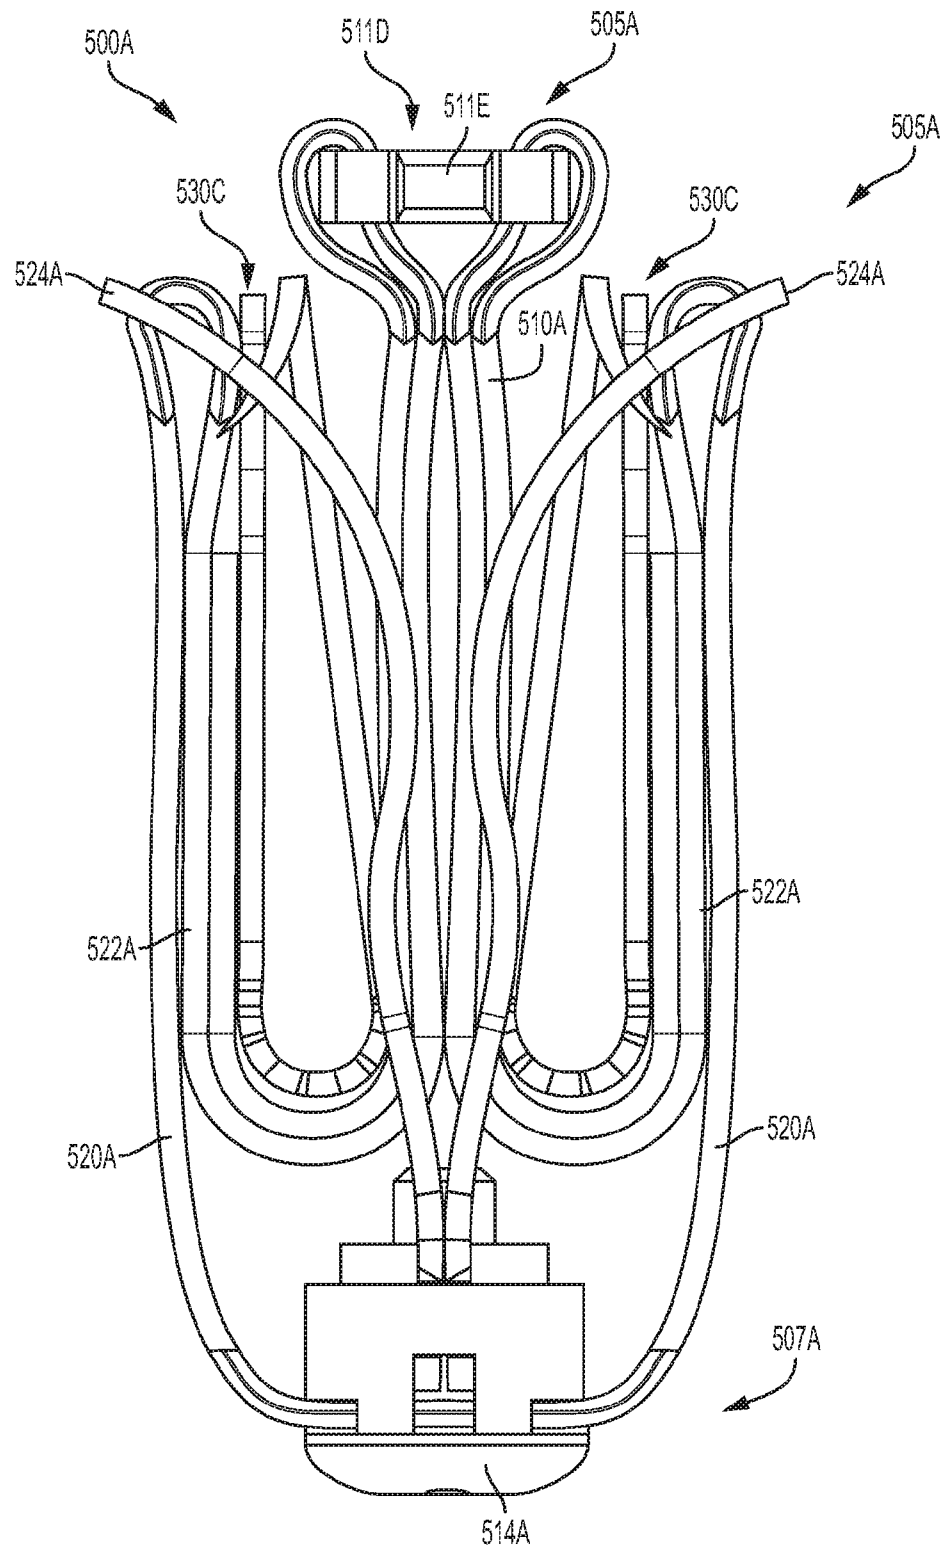**Fig. 48F**

54/262

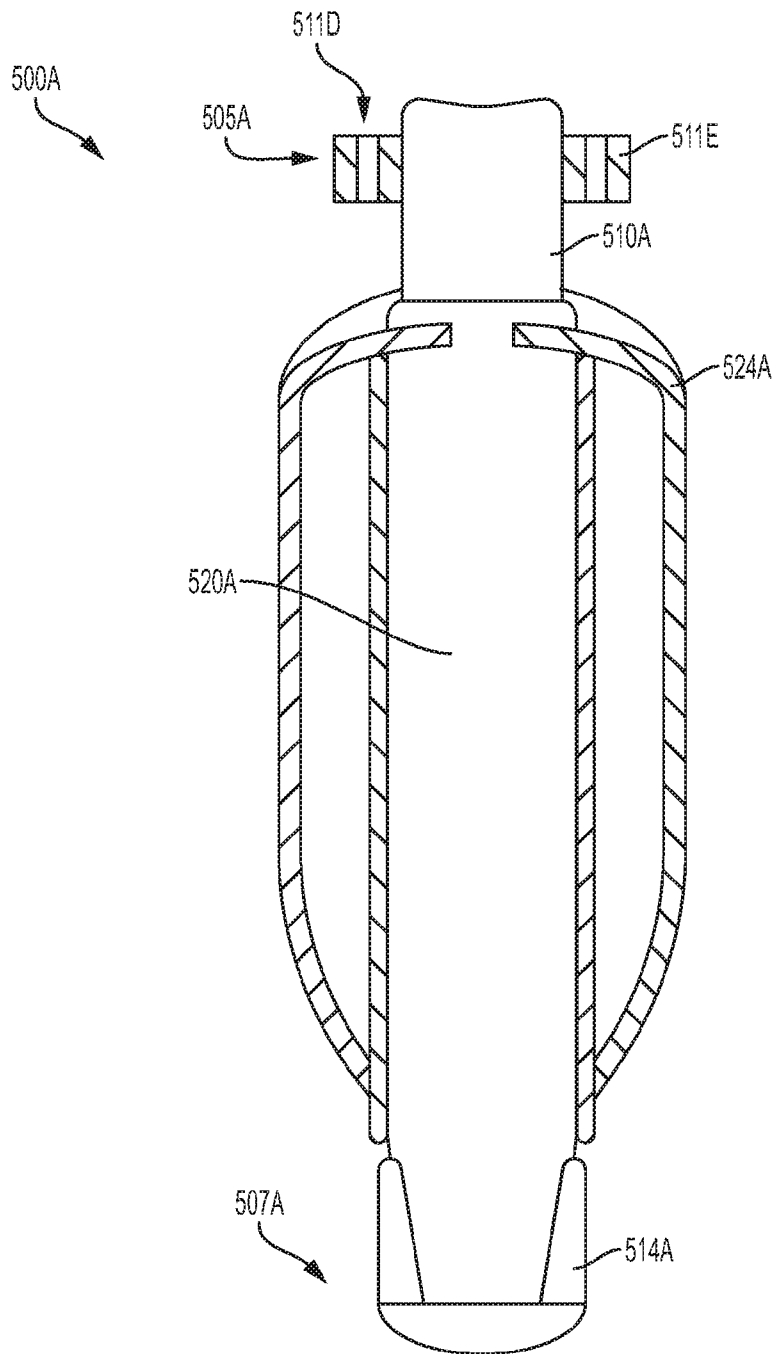**Fig. 48G**

55/262

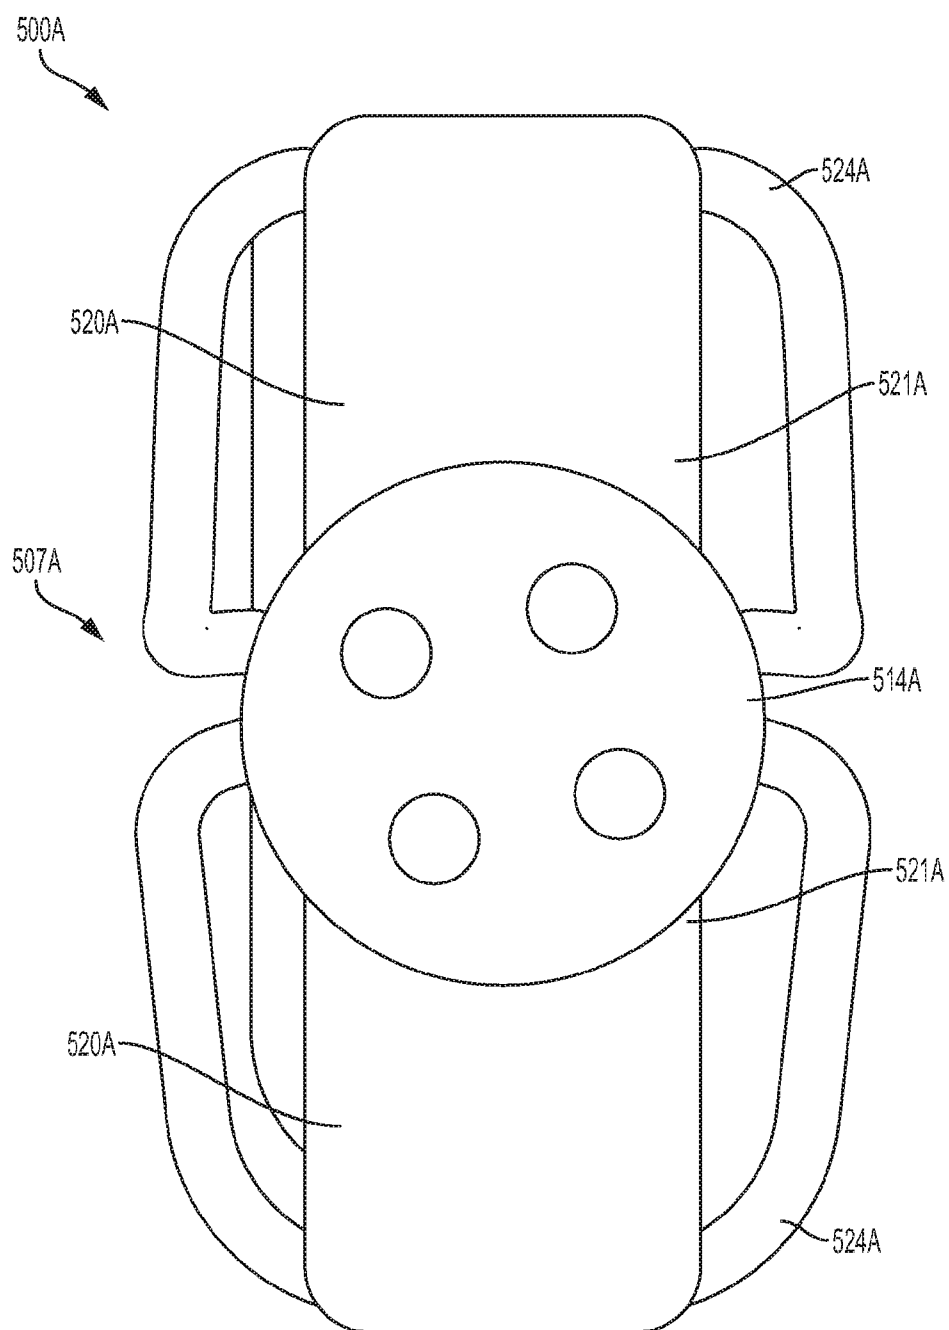**Fig. 48H**

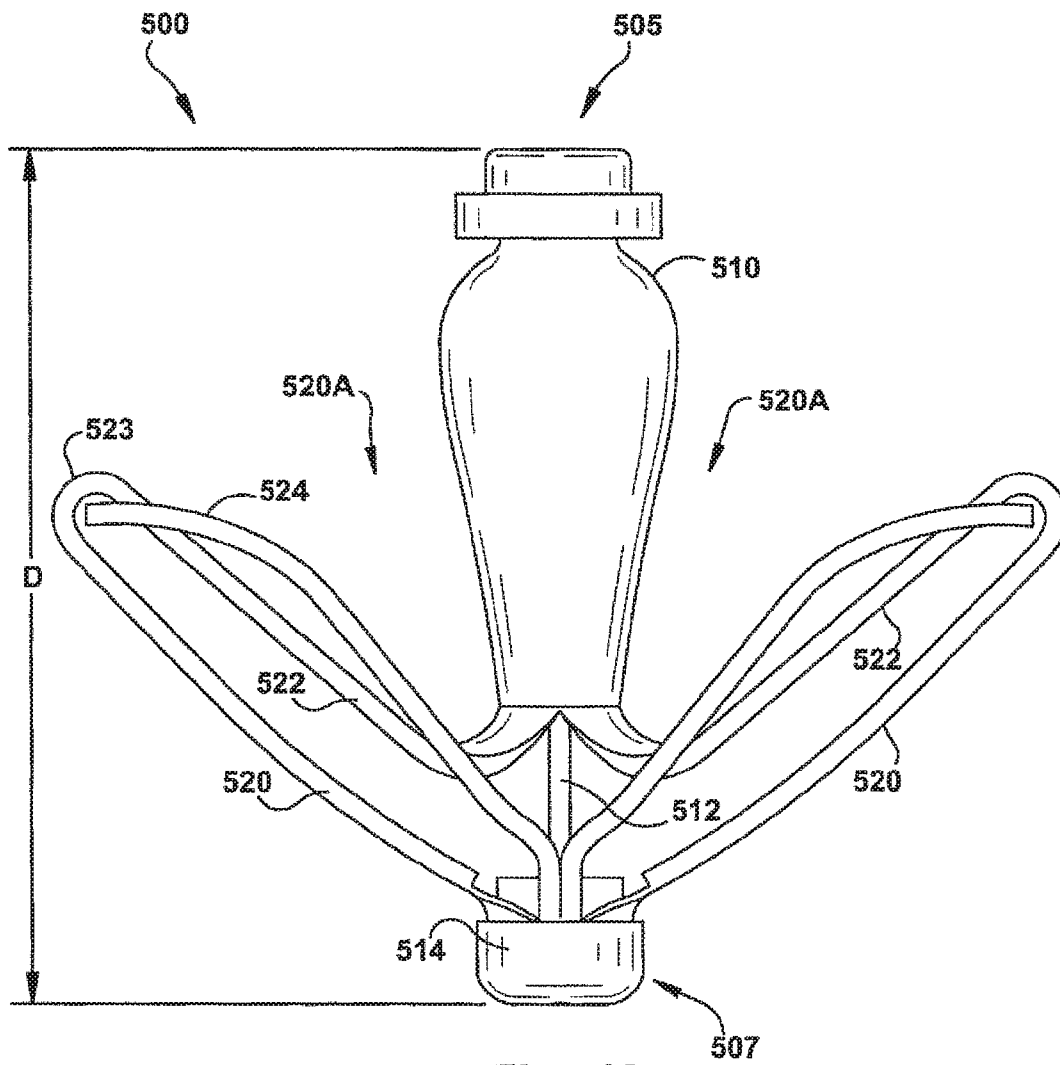


Fig. 49

57/262

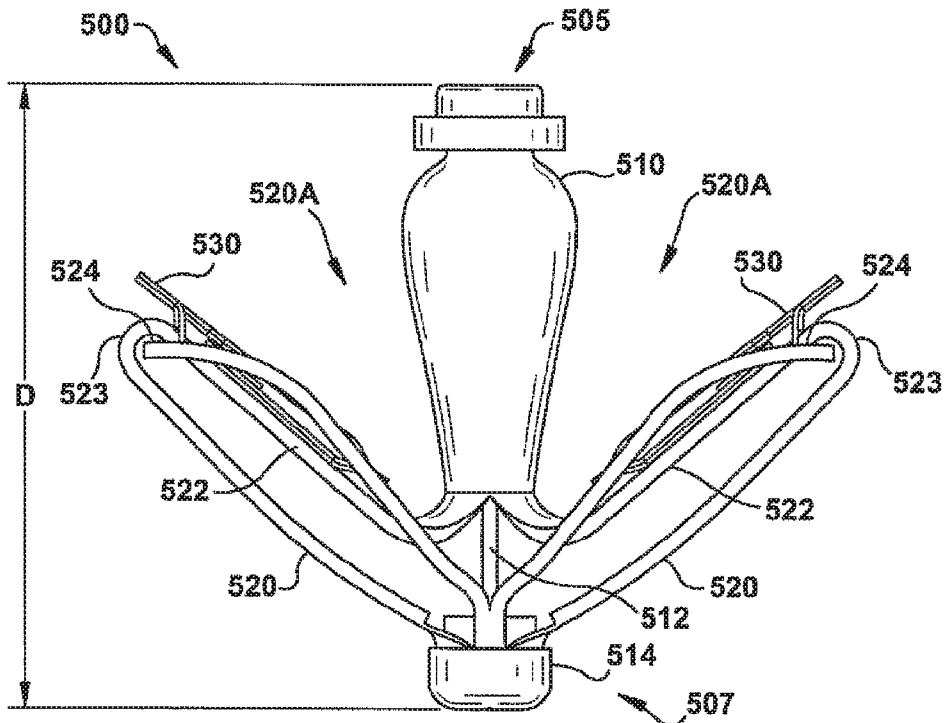


Fig. 50




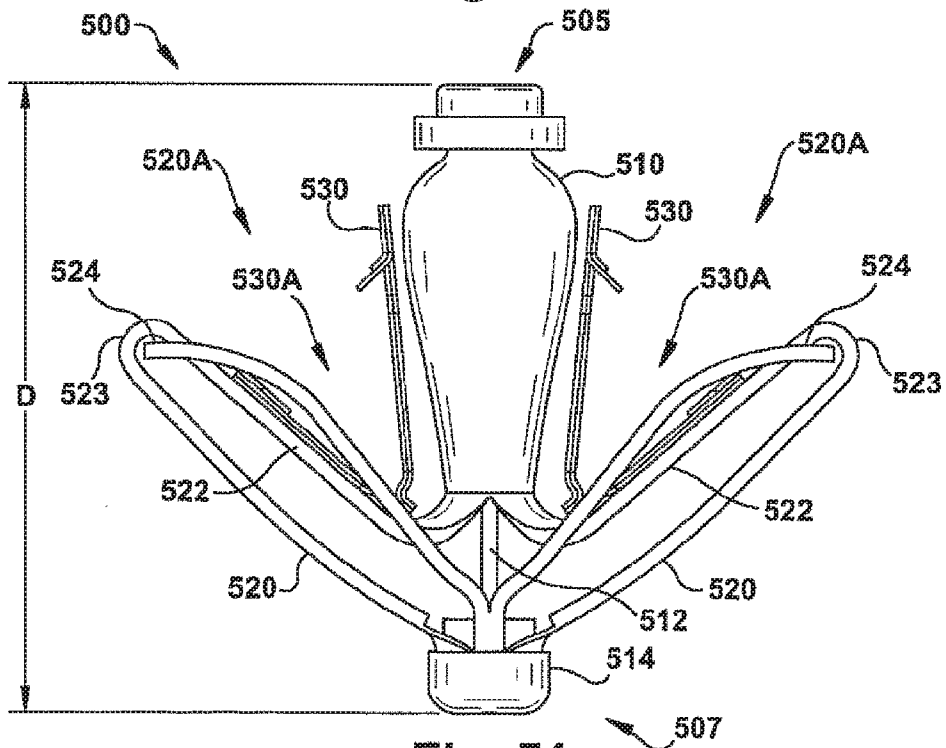


Fig. 51


**Fig. 52**


59/262

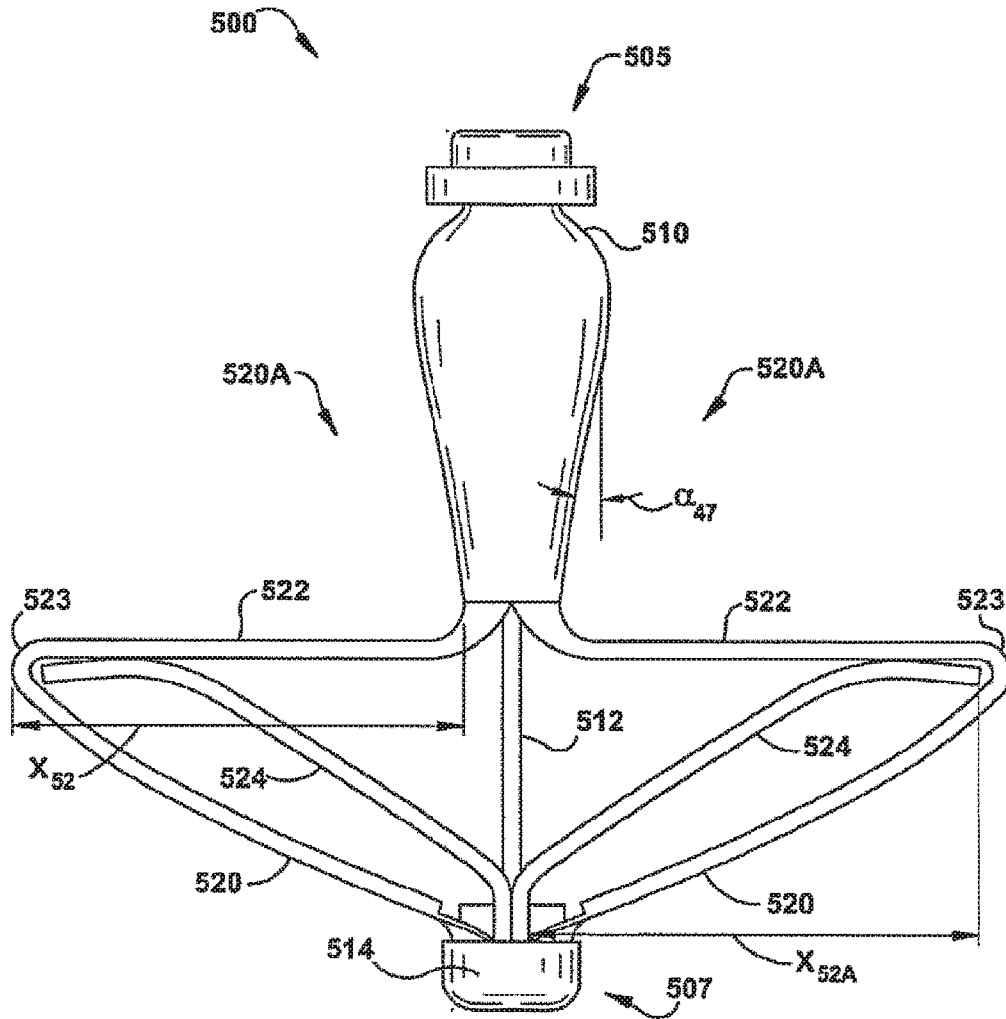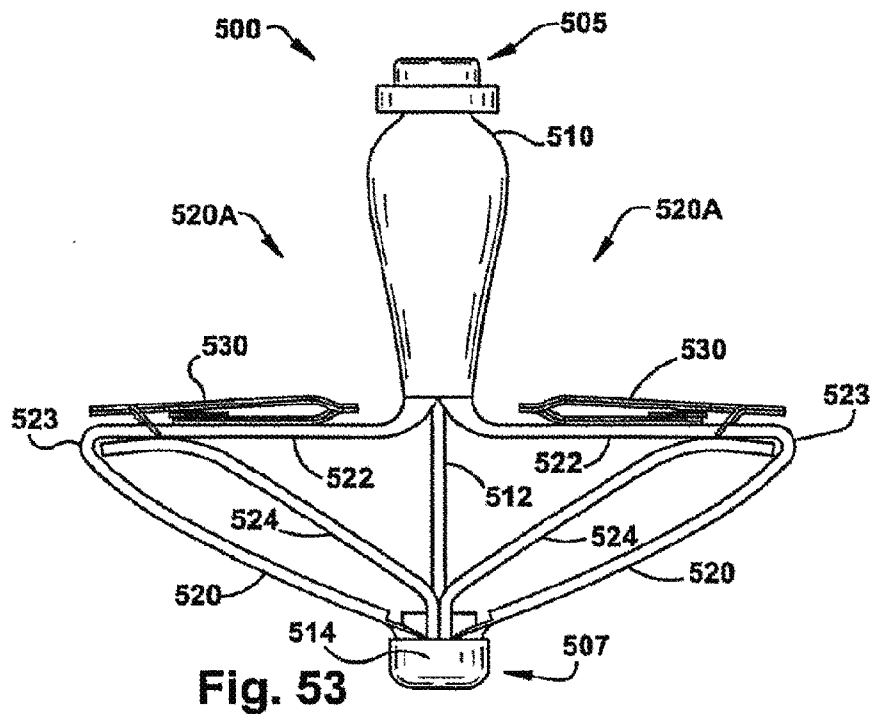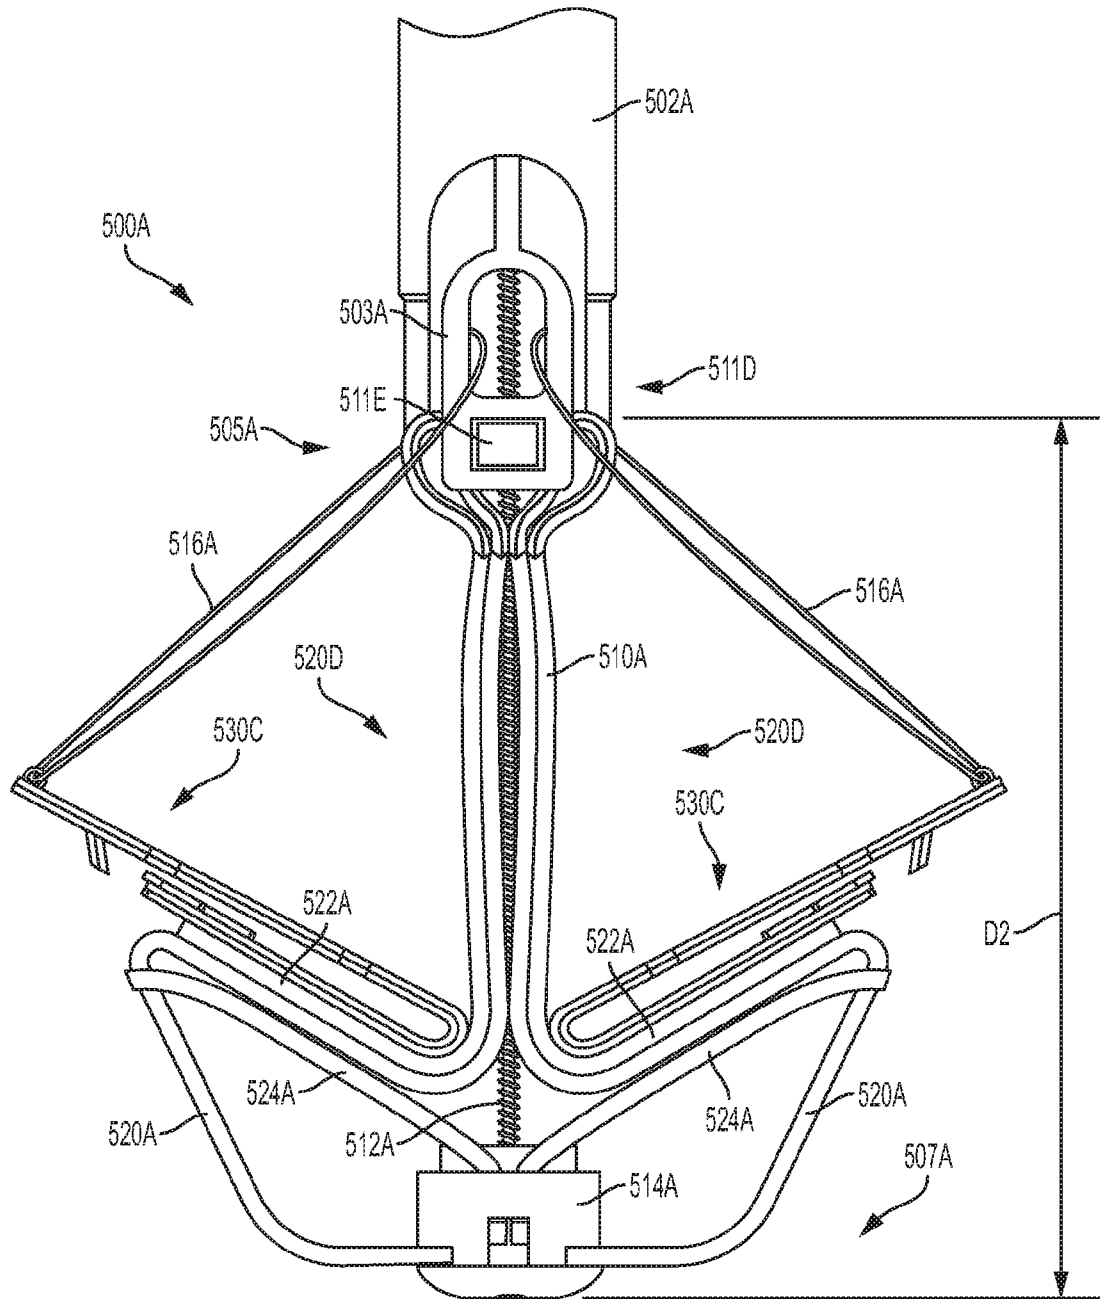


**Fig. 53A**


61/262

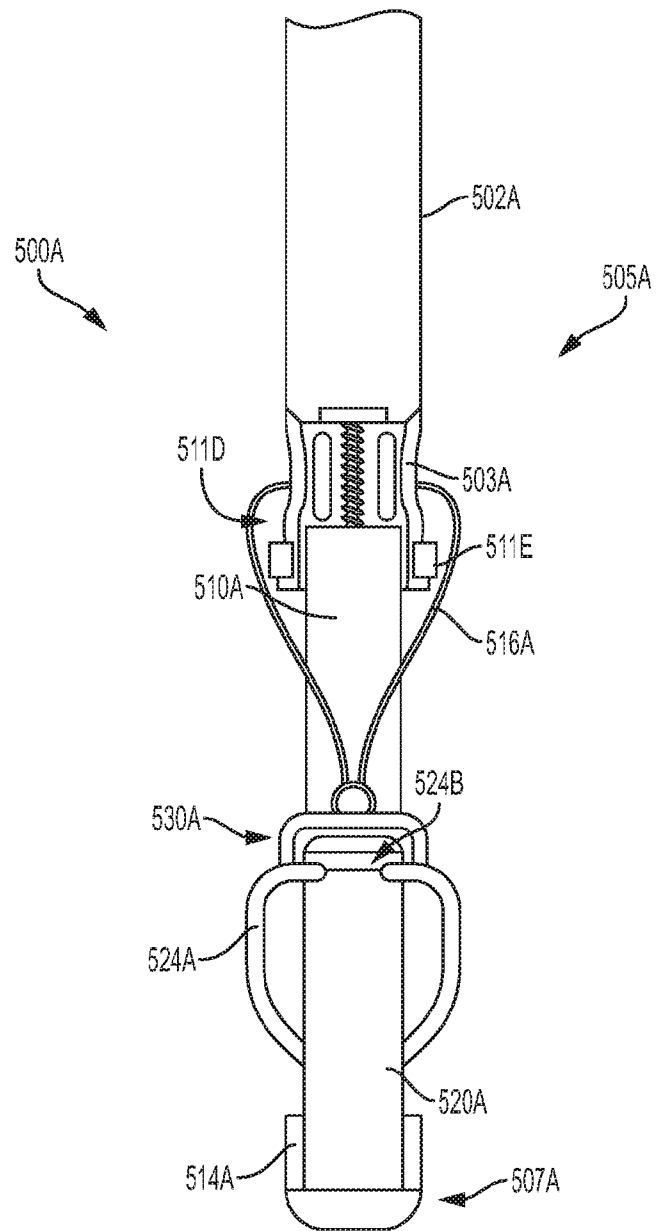**Fig. 53B**

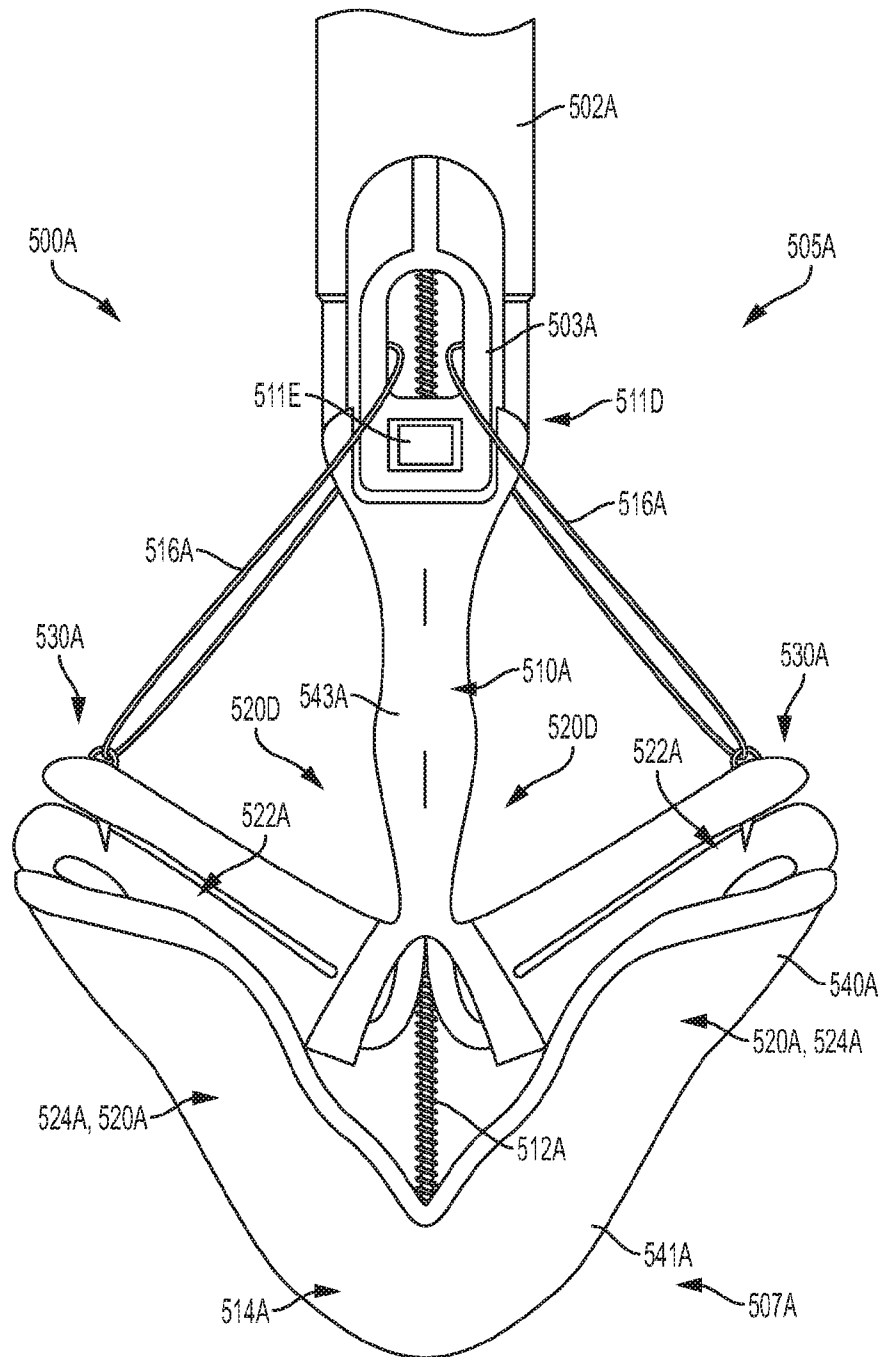
**Fig. 53C**

63/262

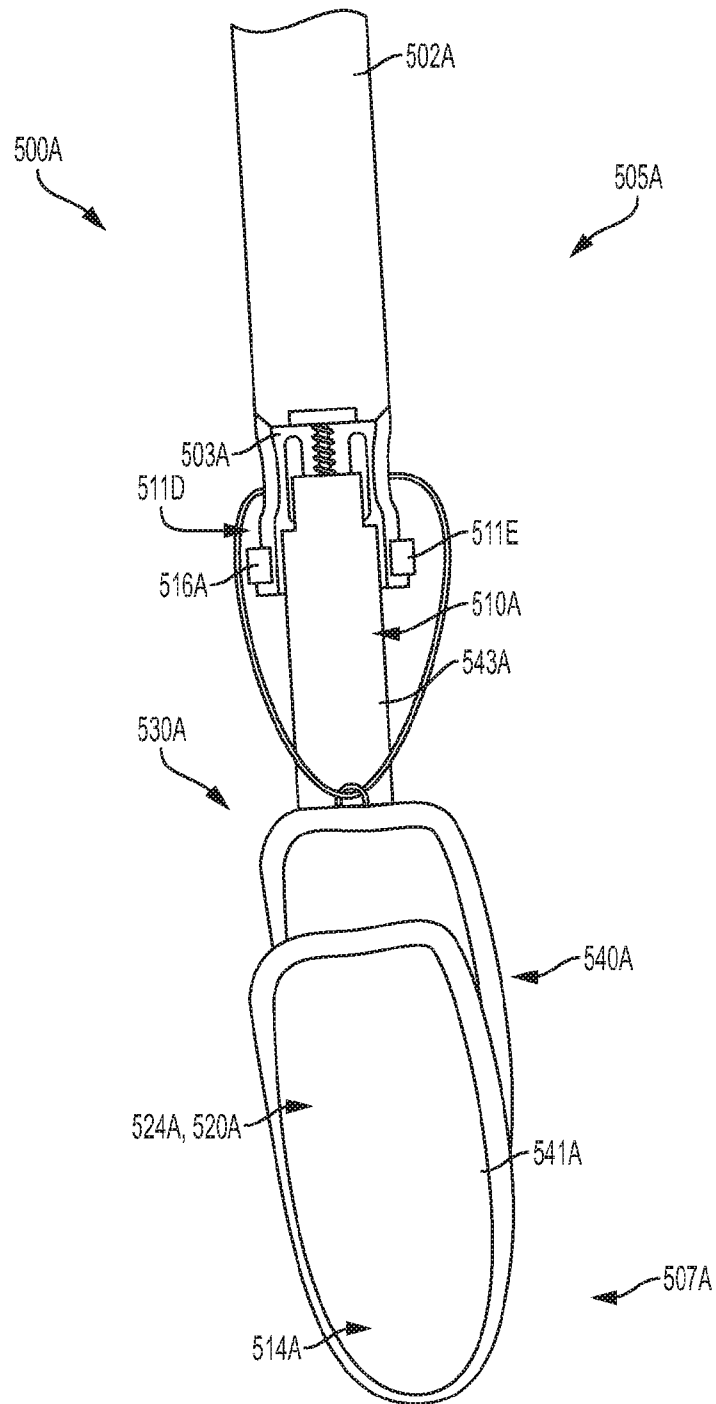
**Fig. 53D**

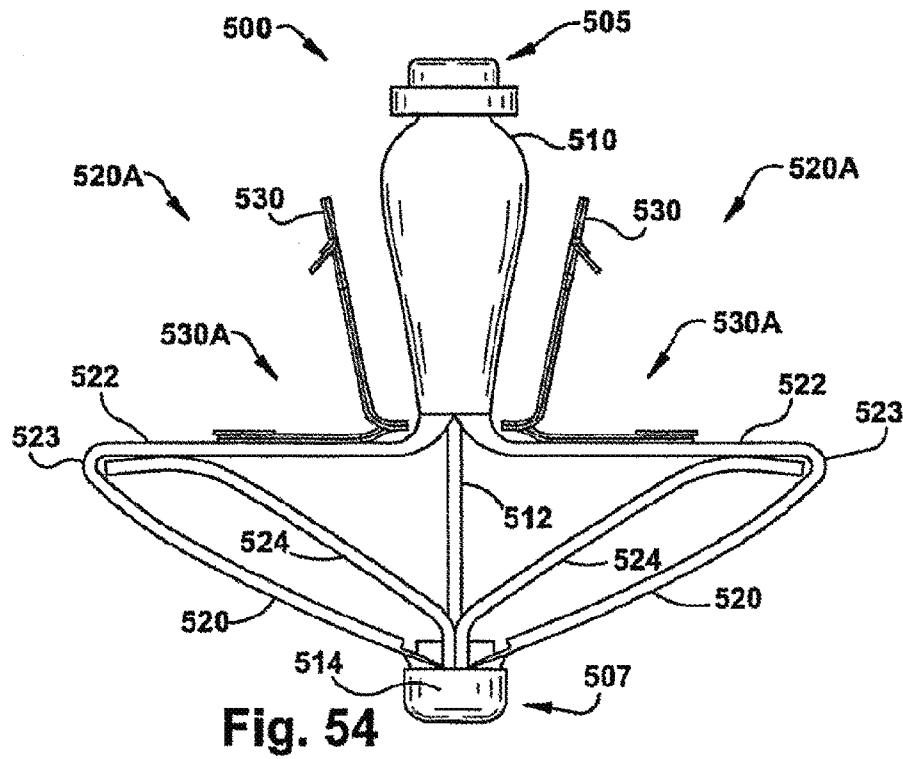

65/262

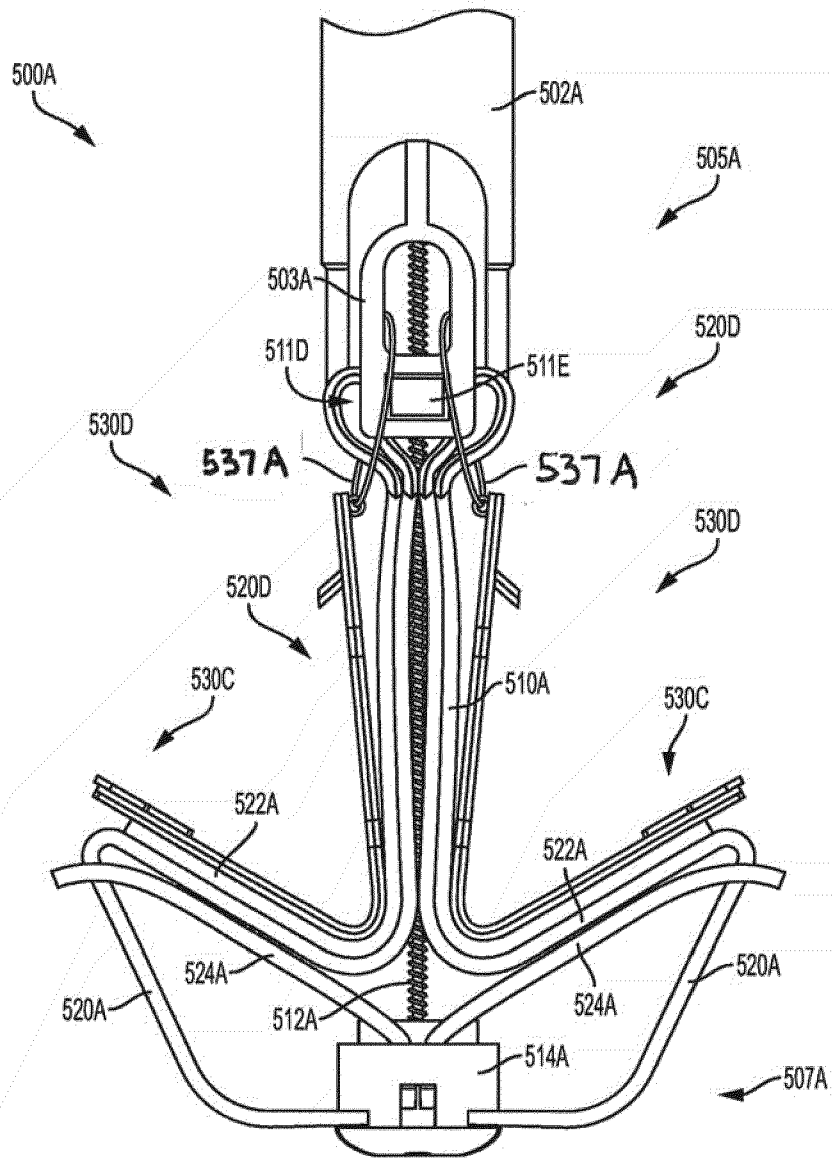**Fig. 54A**

66/262

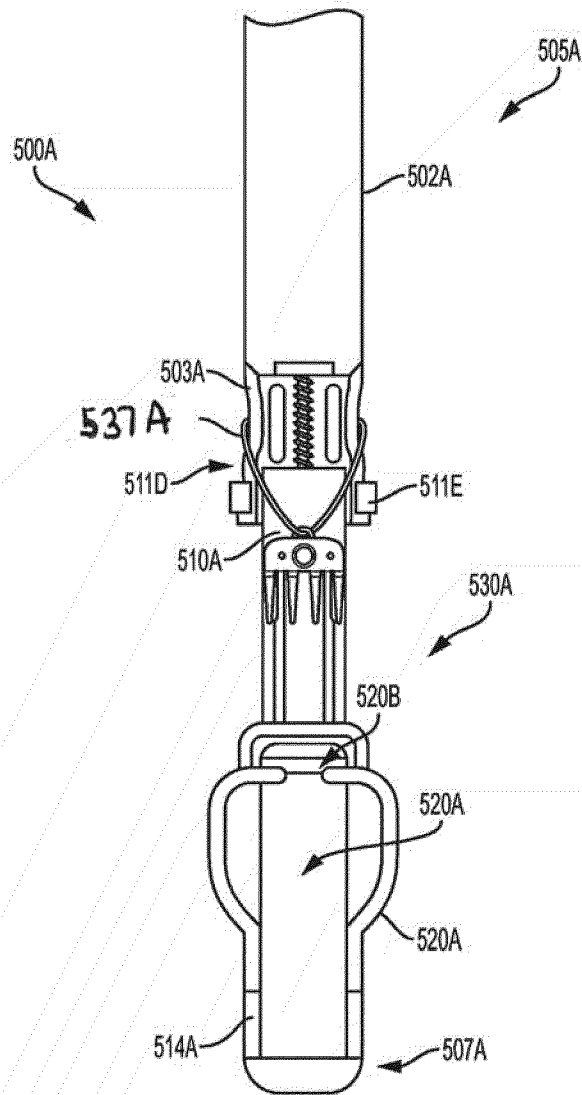**Fig. 54B**

67/262

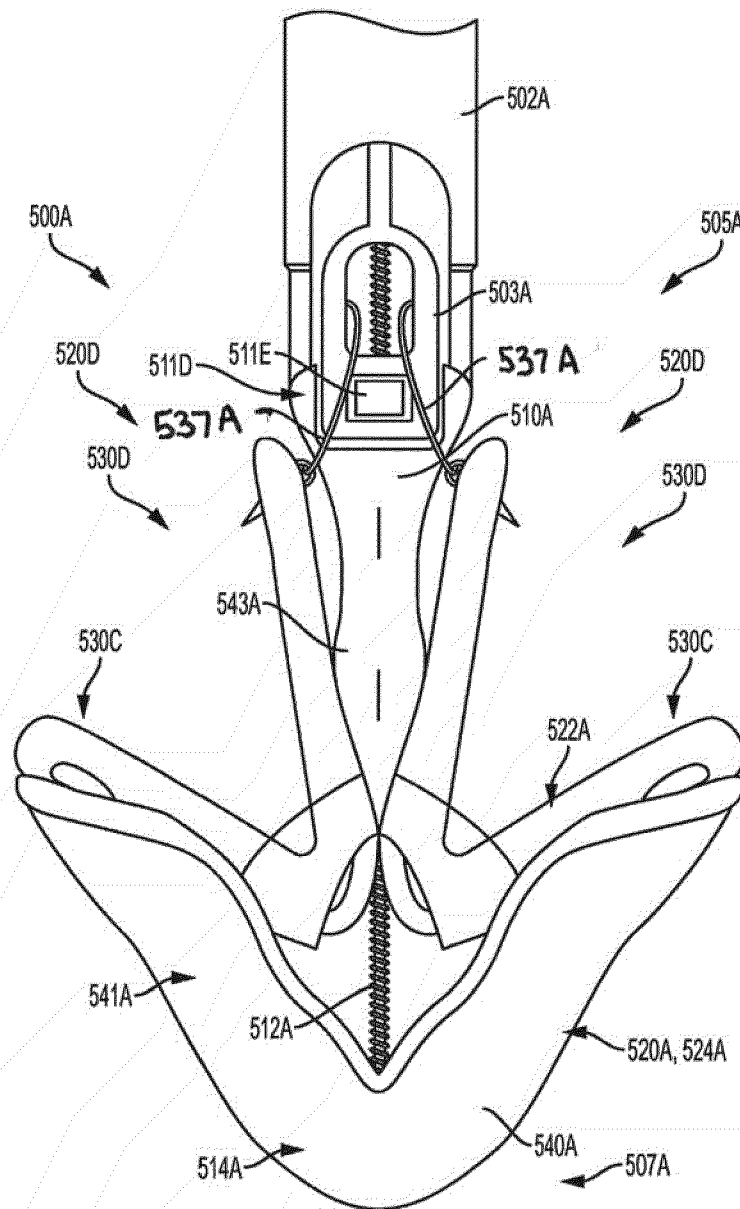
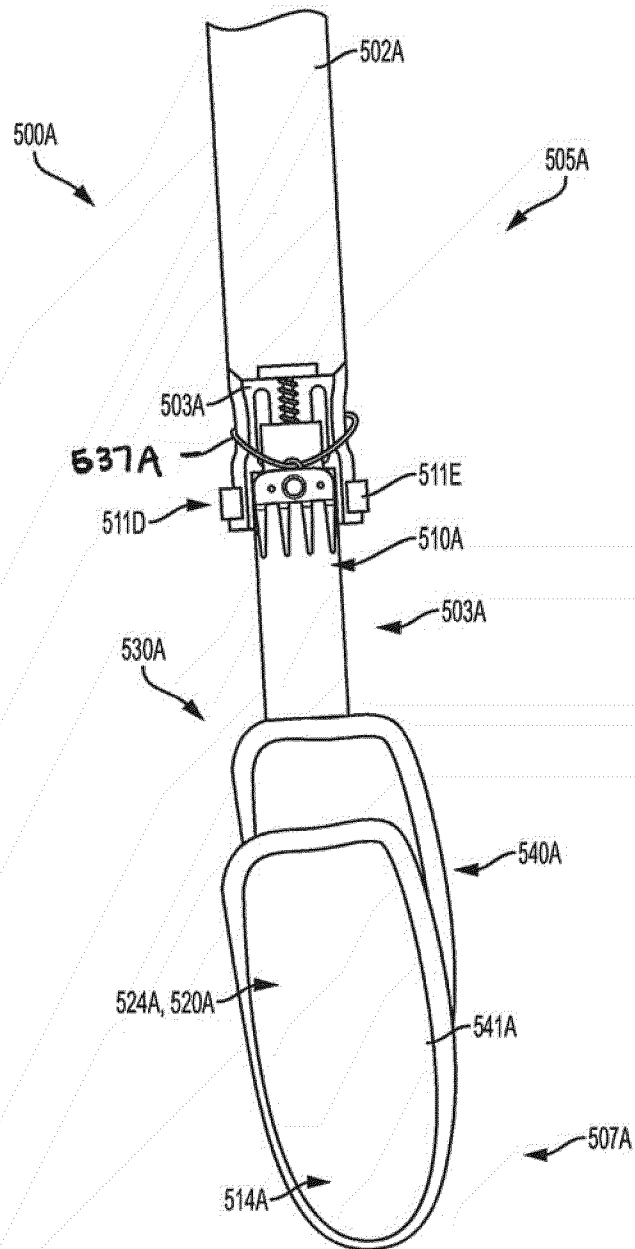
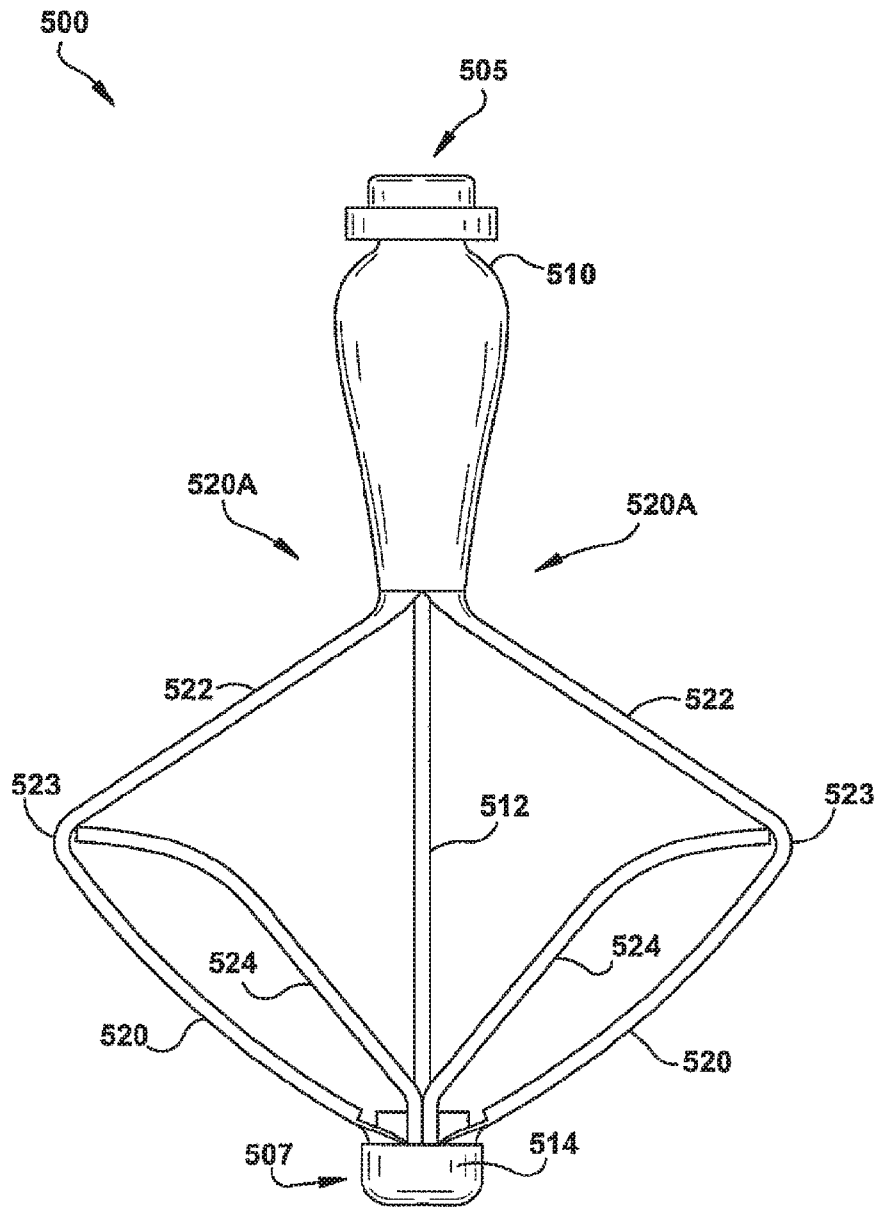


Fig. 54C

68/262

**Fig. 54D**

**Fig. 55**

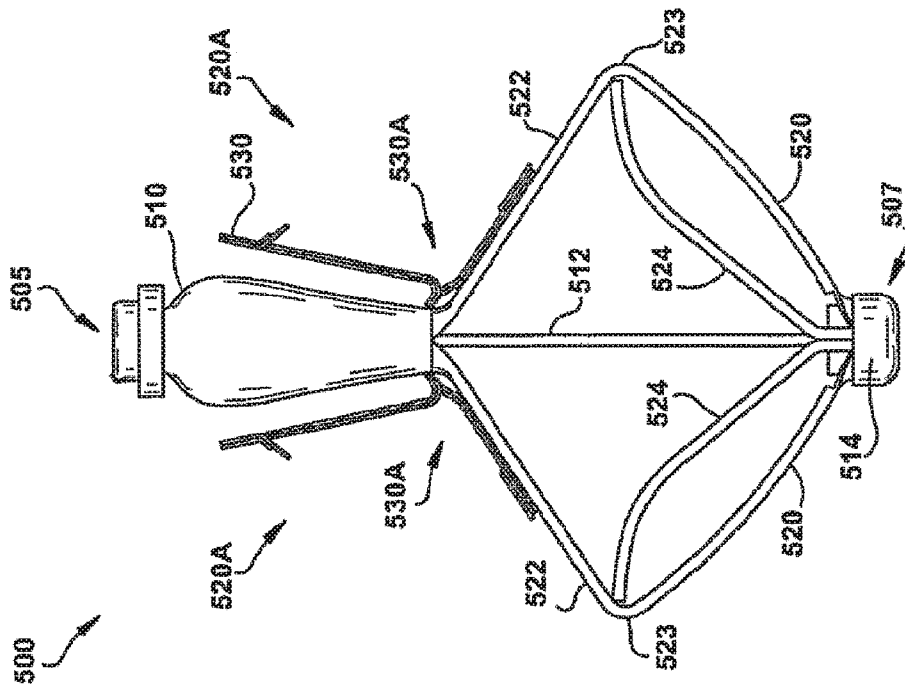


Fig. 57

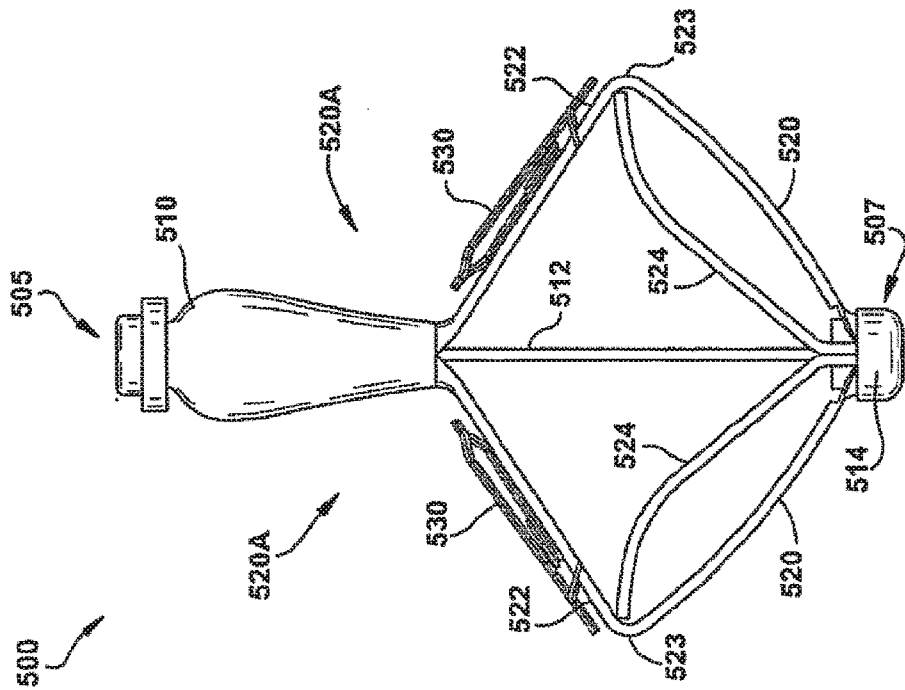


Fig. 56

71/262

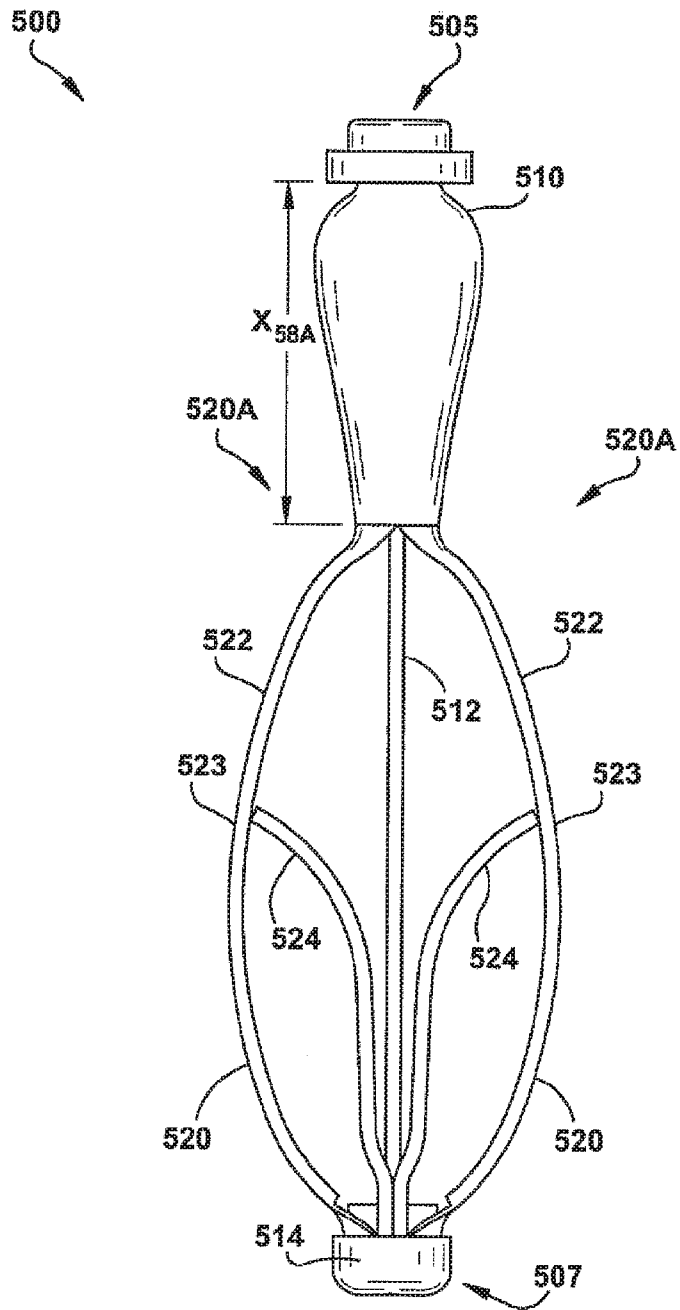


Fig. 58

72/262

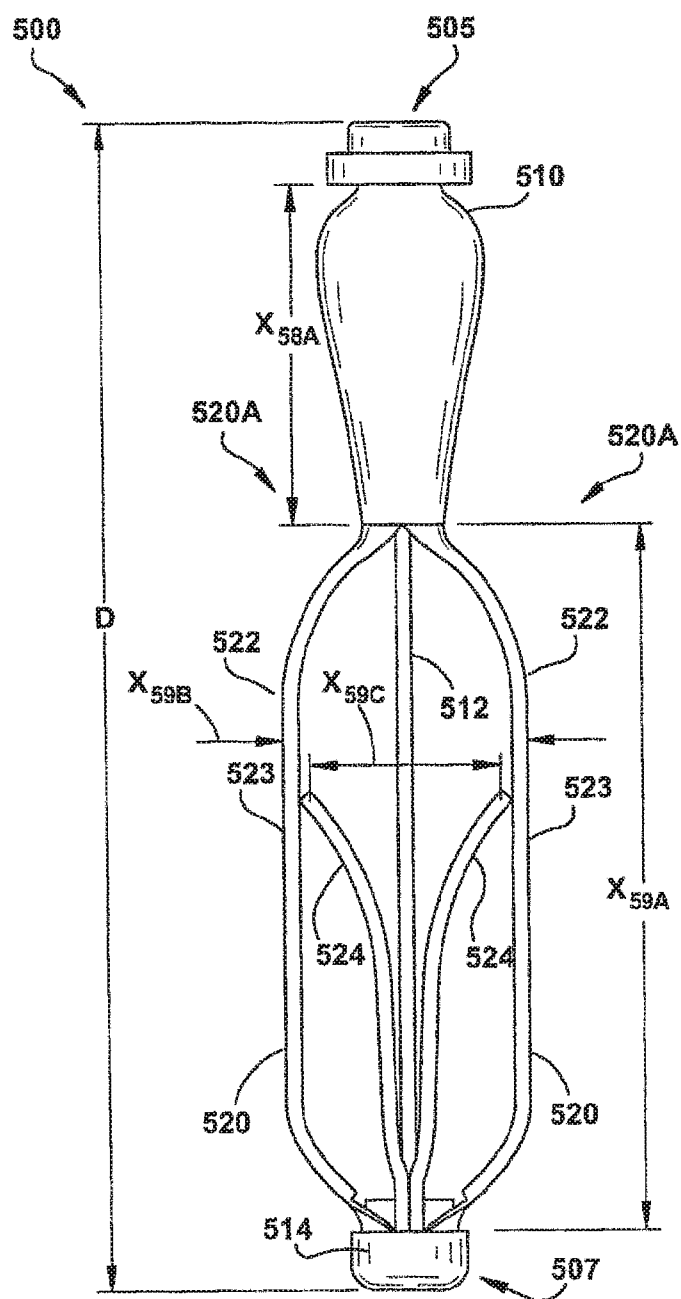
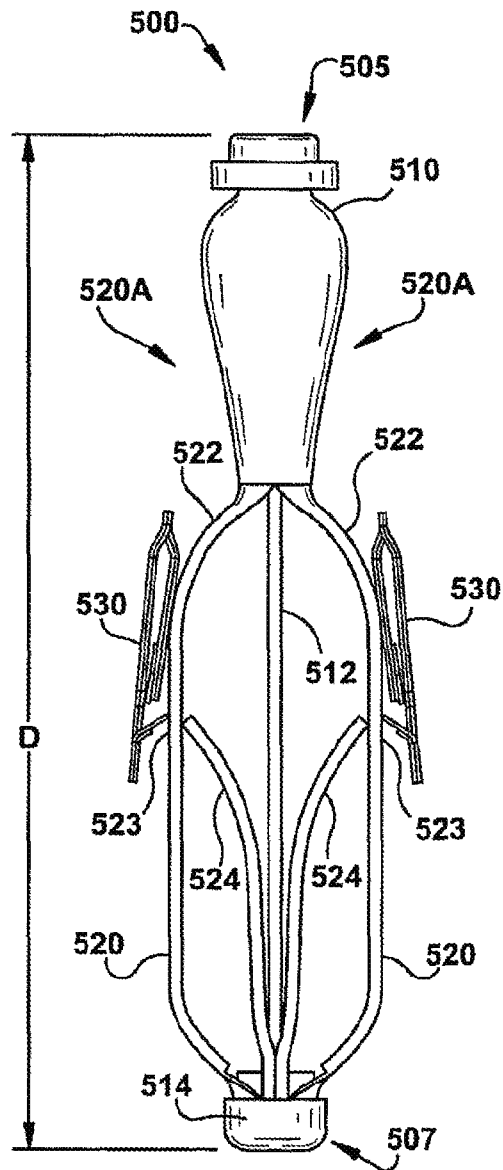


Fig. 59

73/262

**Fig. 60**

74/262

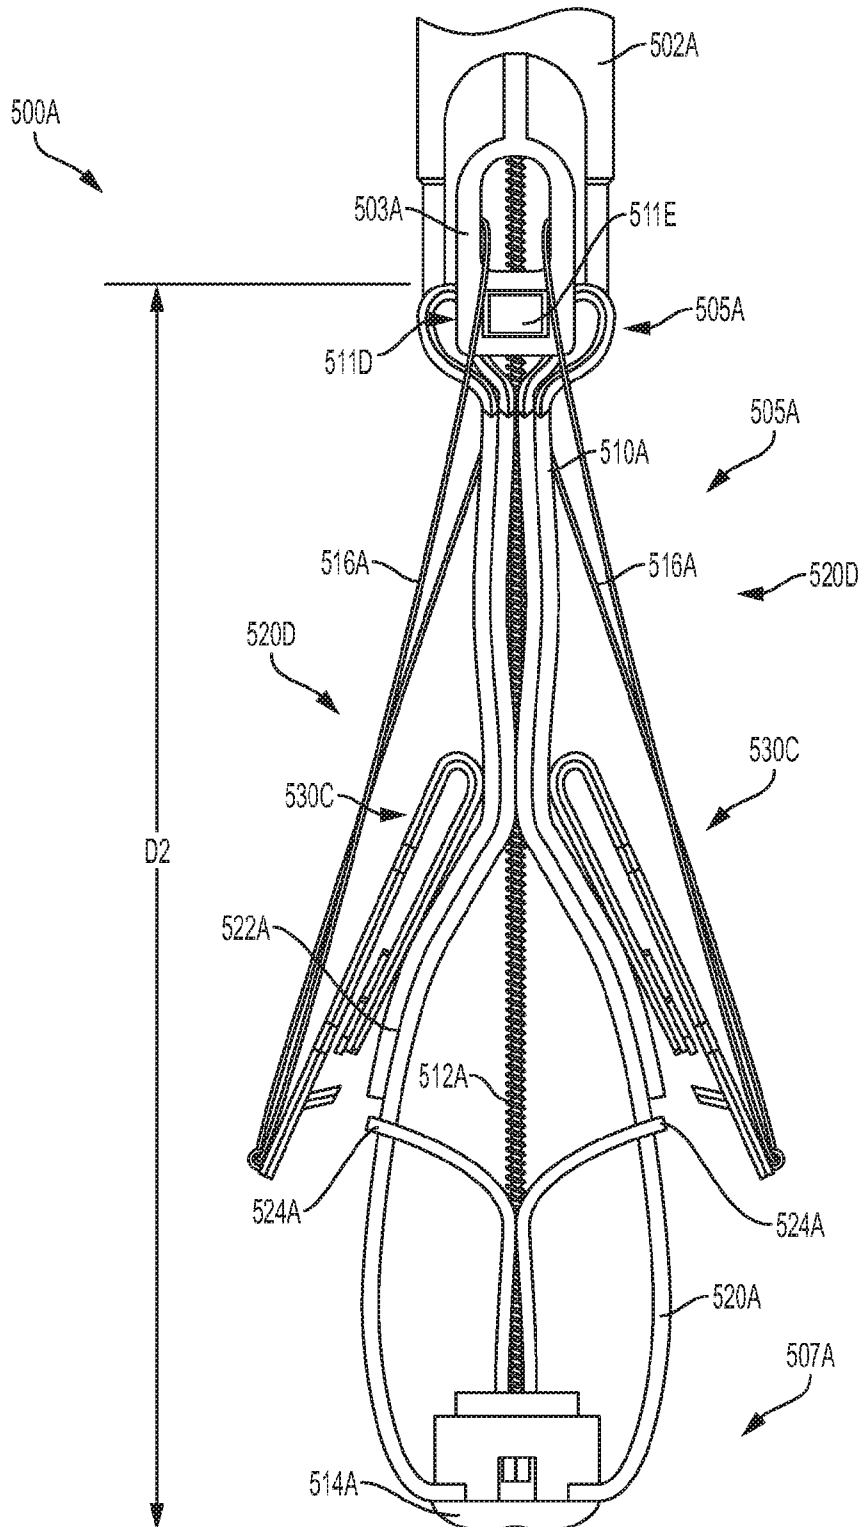
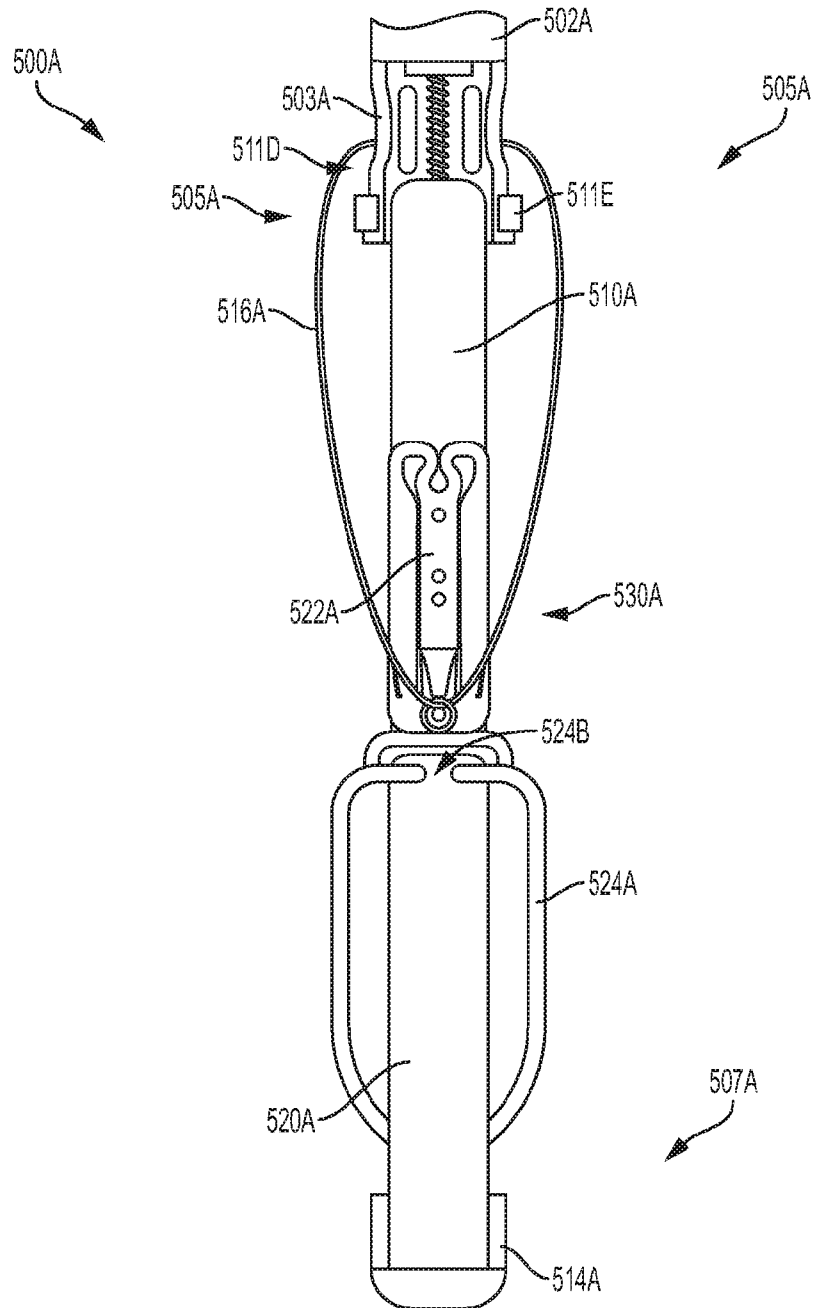


Fig. 60A

75/262

**Fig. 60B**

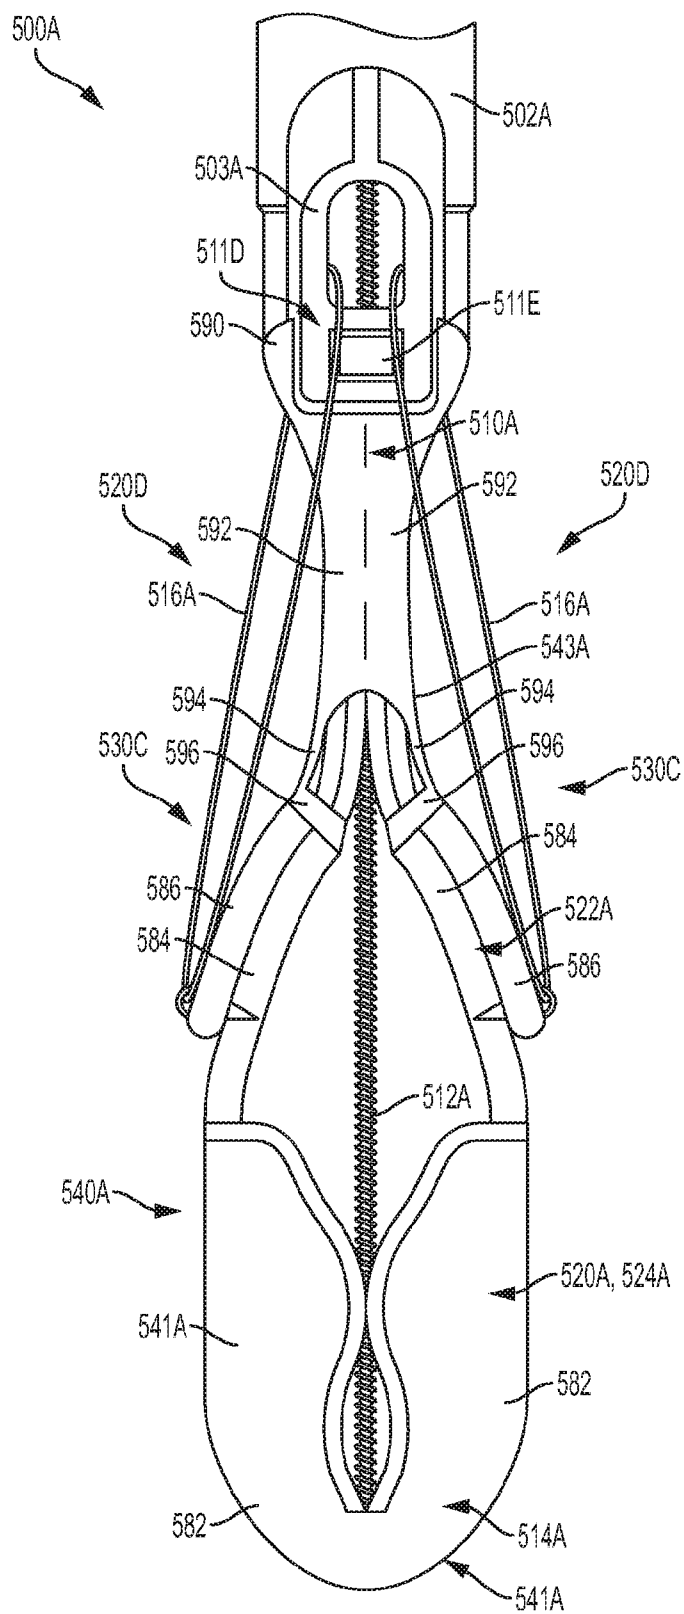


Fig. 60C

77/262

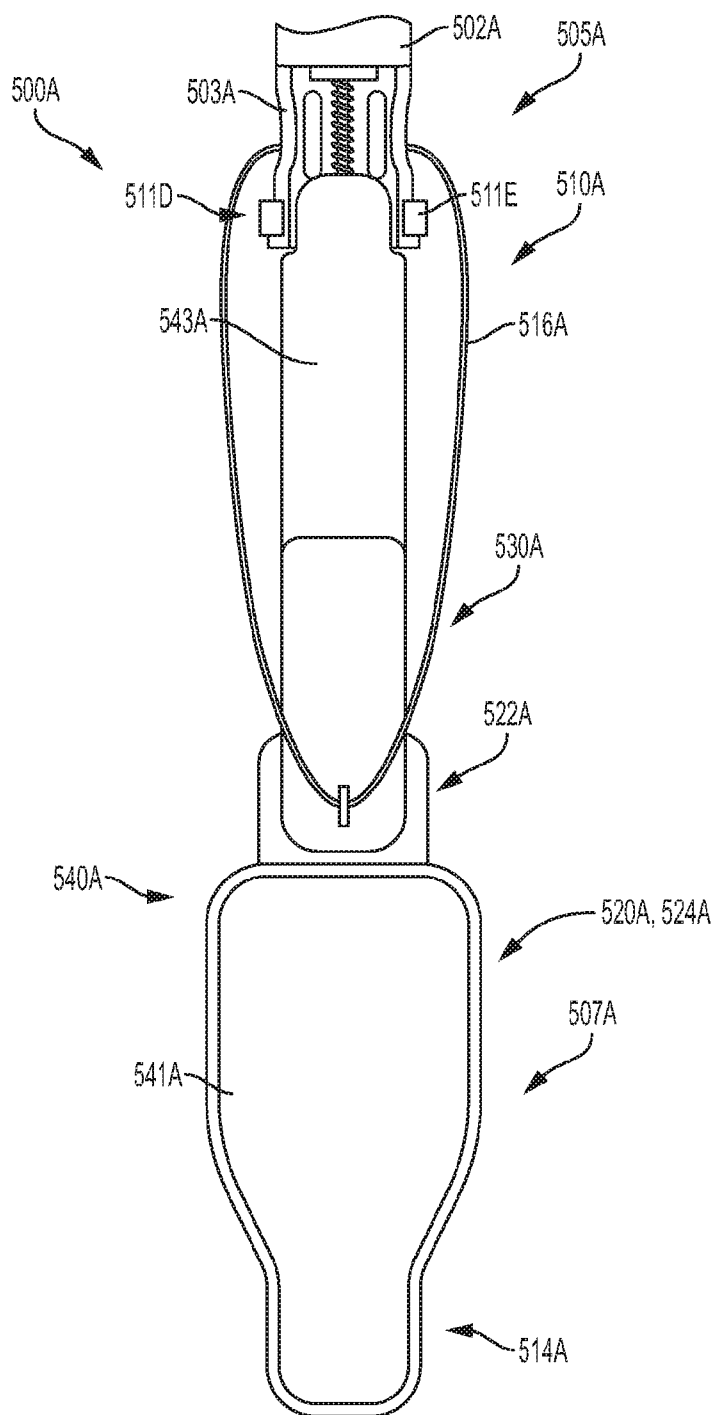
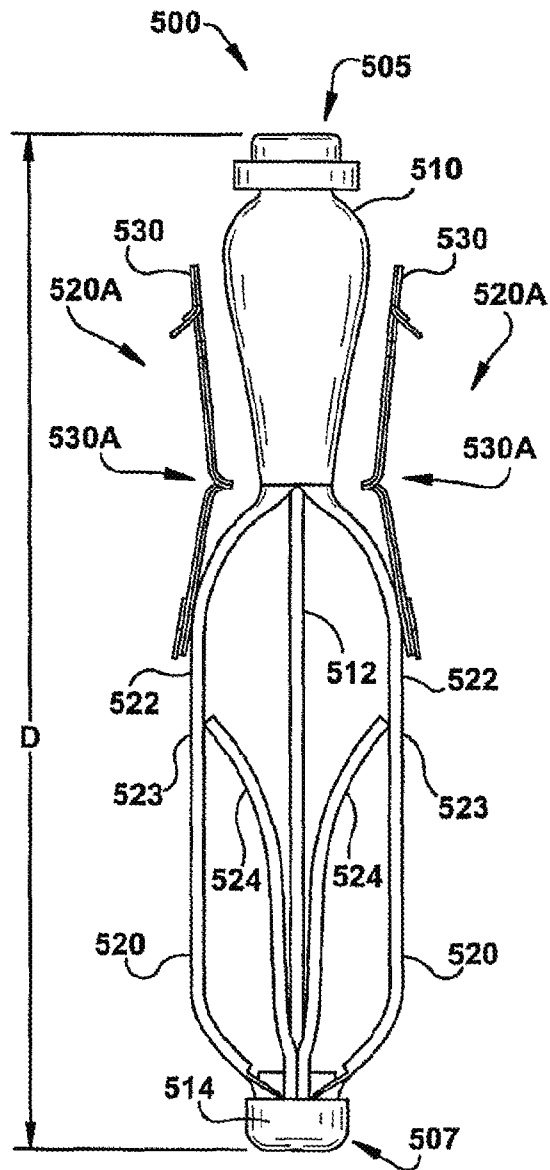
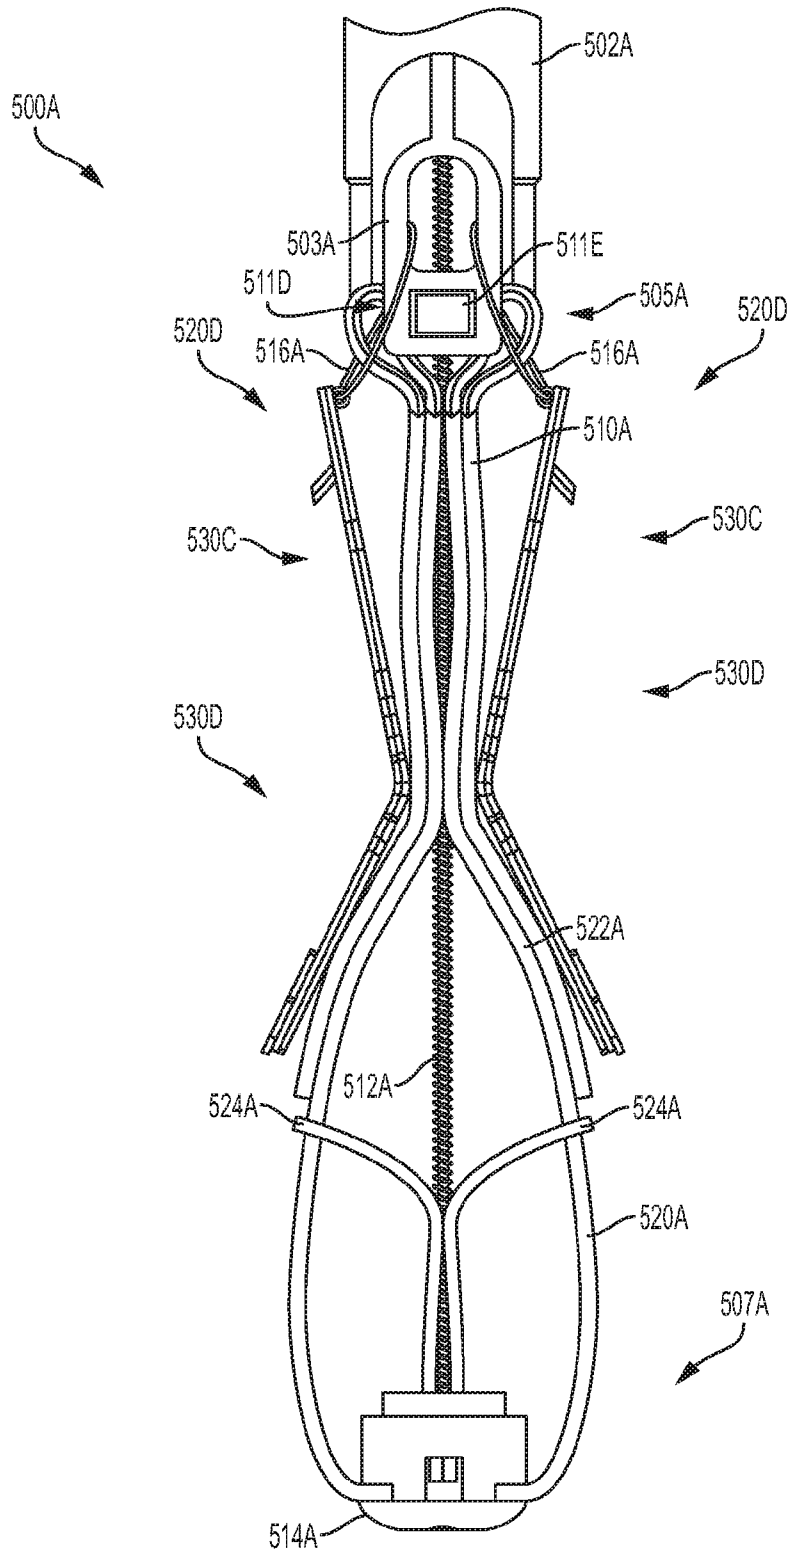


Fig. 60D


78/262

**Fig. 61**


79/262

**Fig. 61A**


80/262

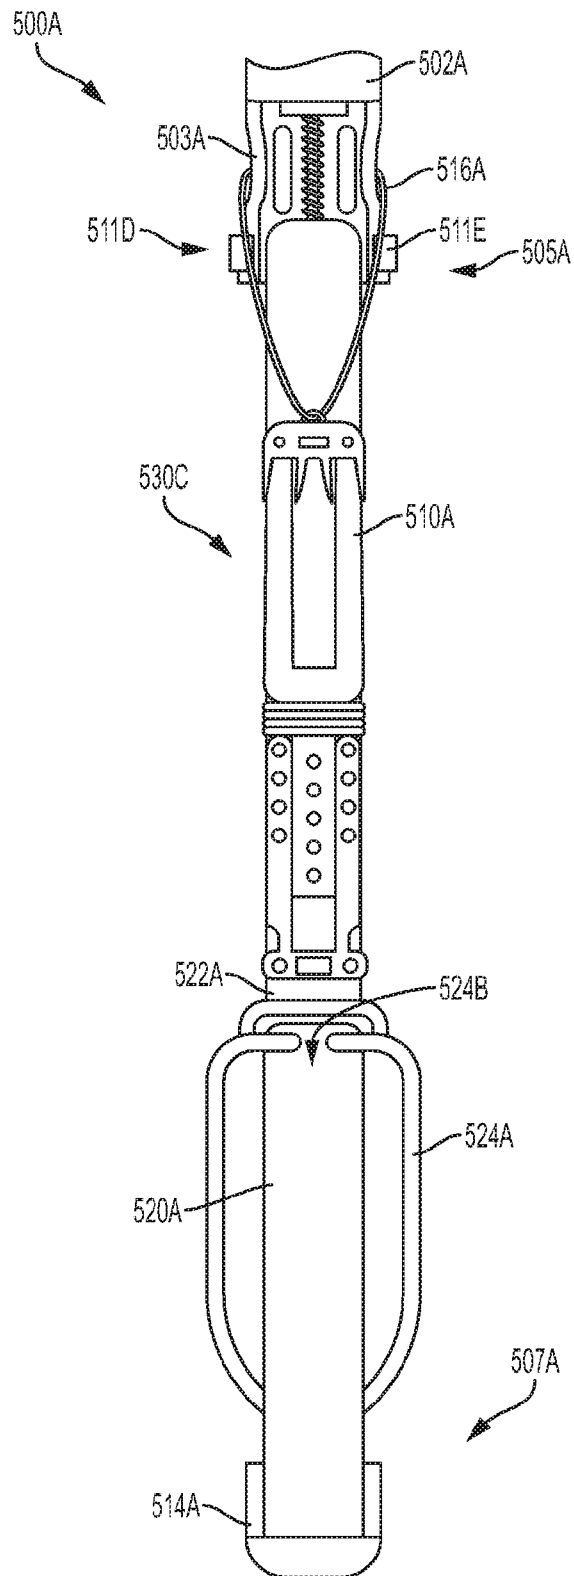**Fig. 61B**

81/262

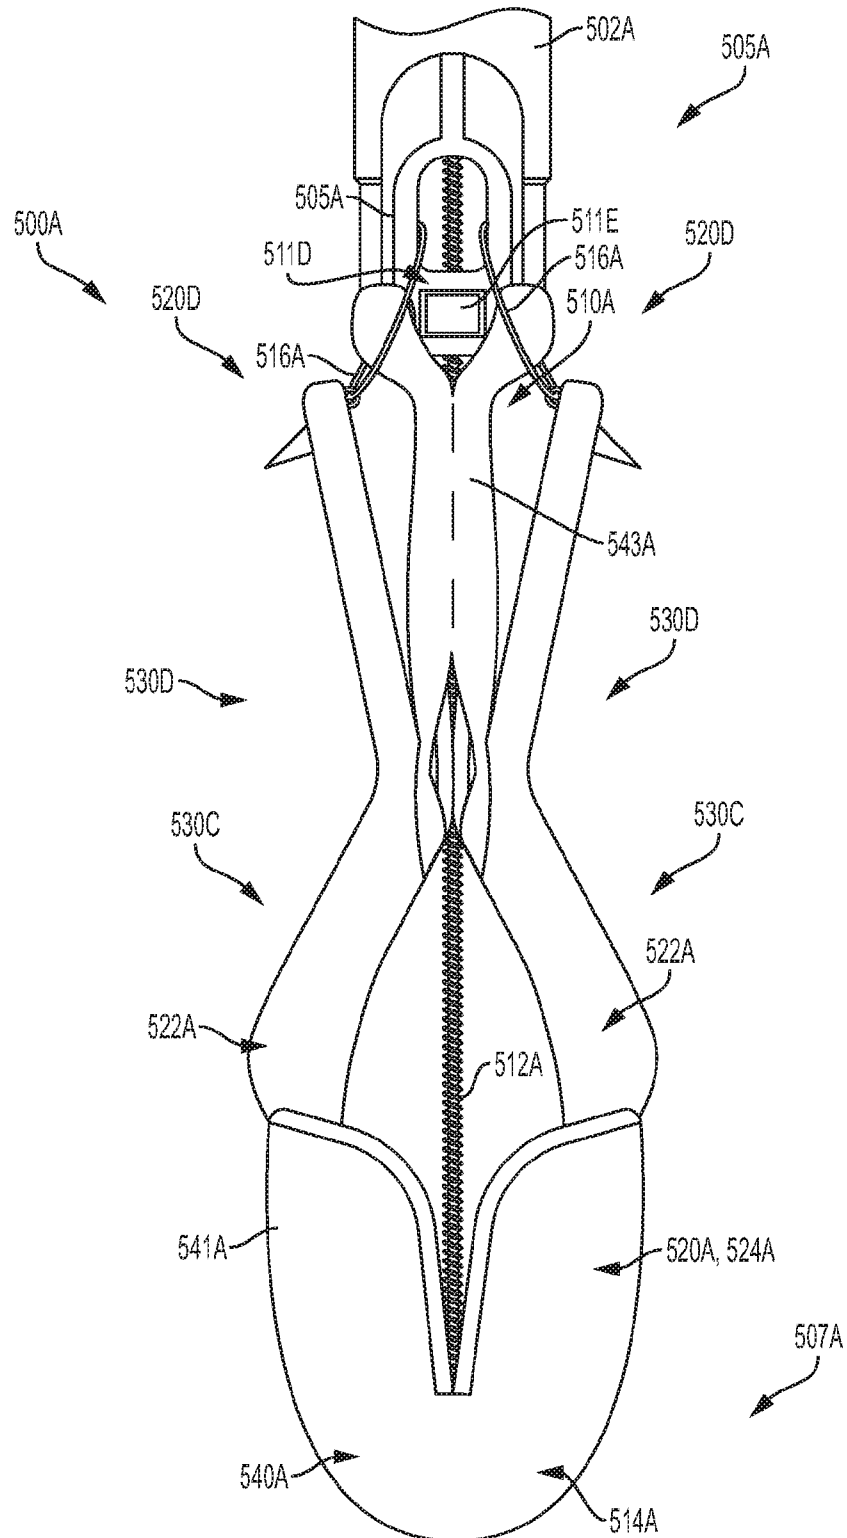**Fig. 61C**

82/262

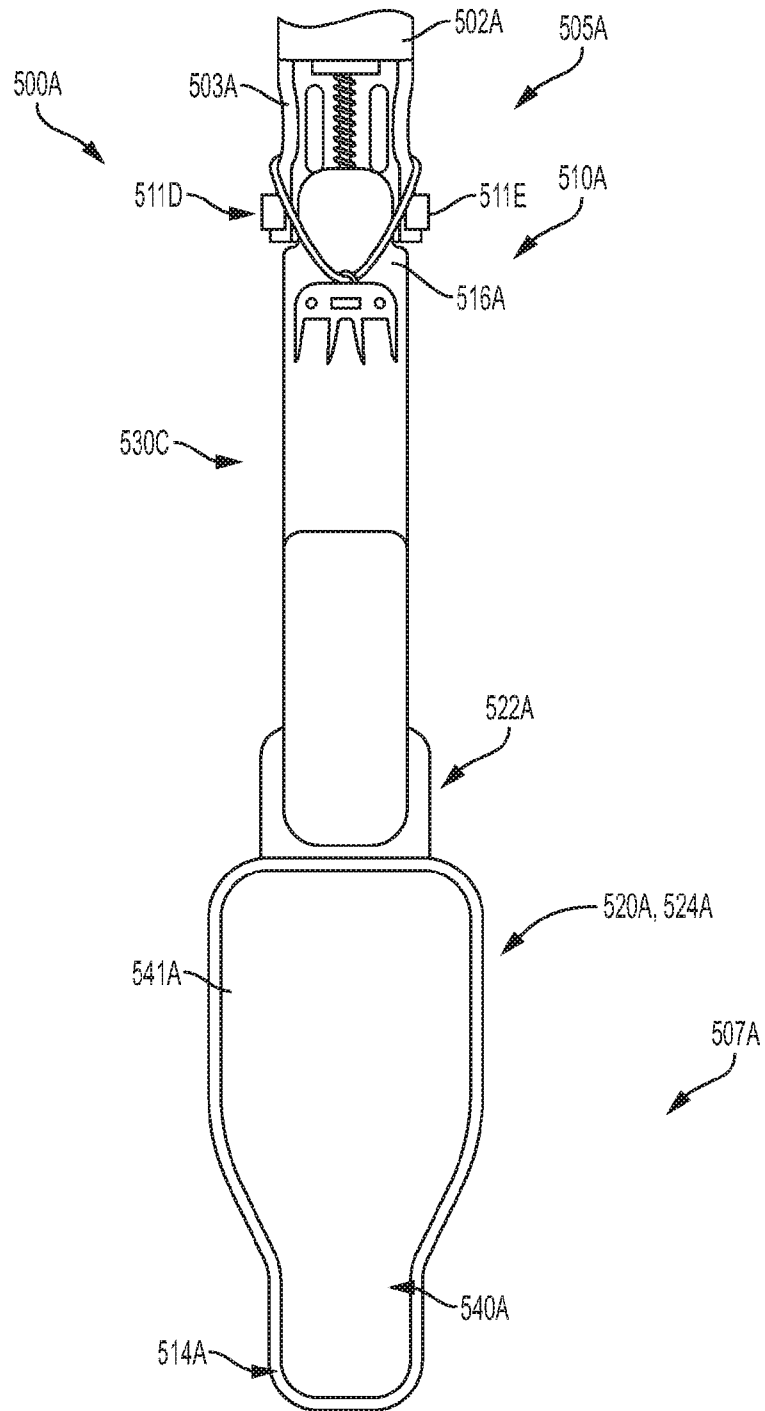**Fig. 61D**

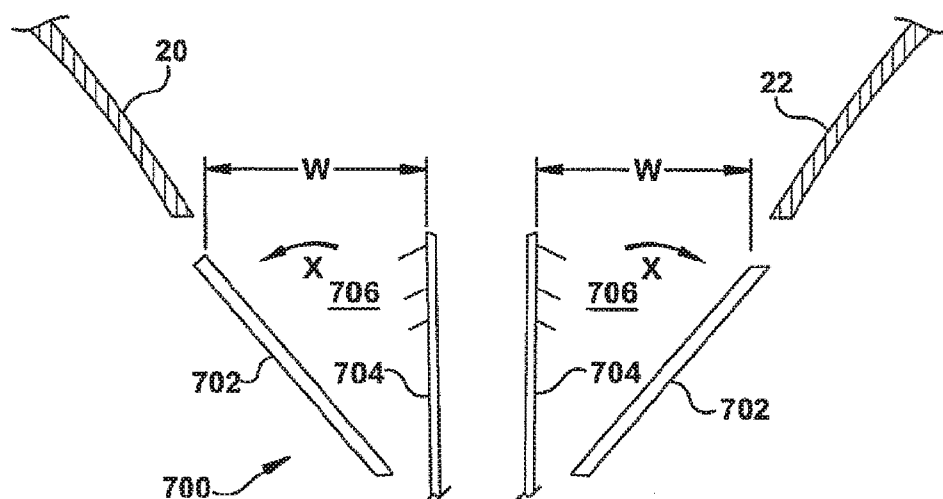


Fig. 62A

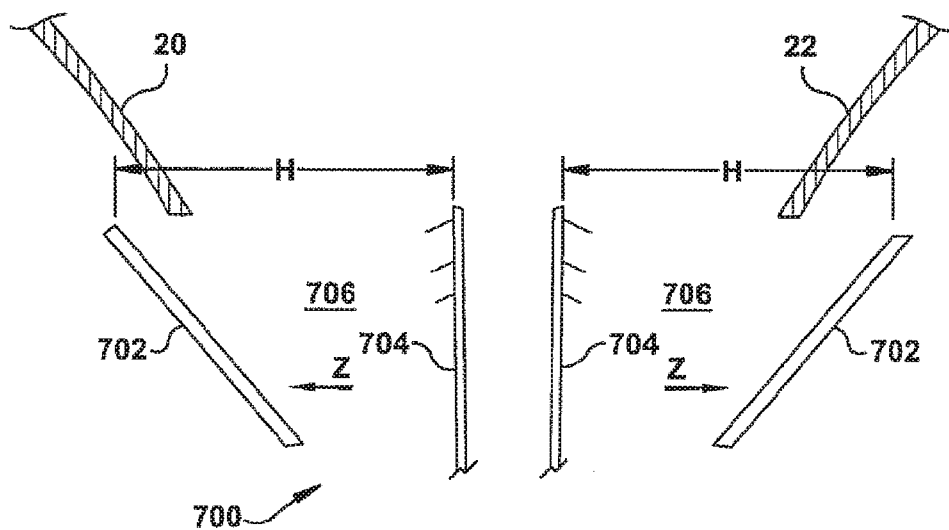


Fig. 62B

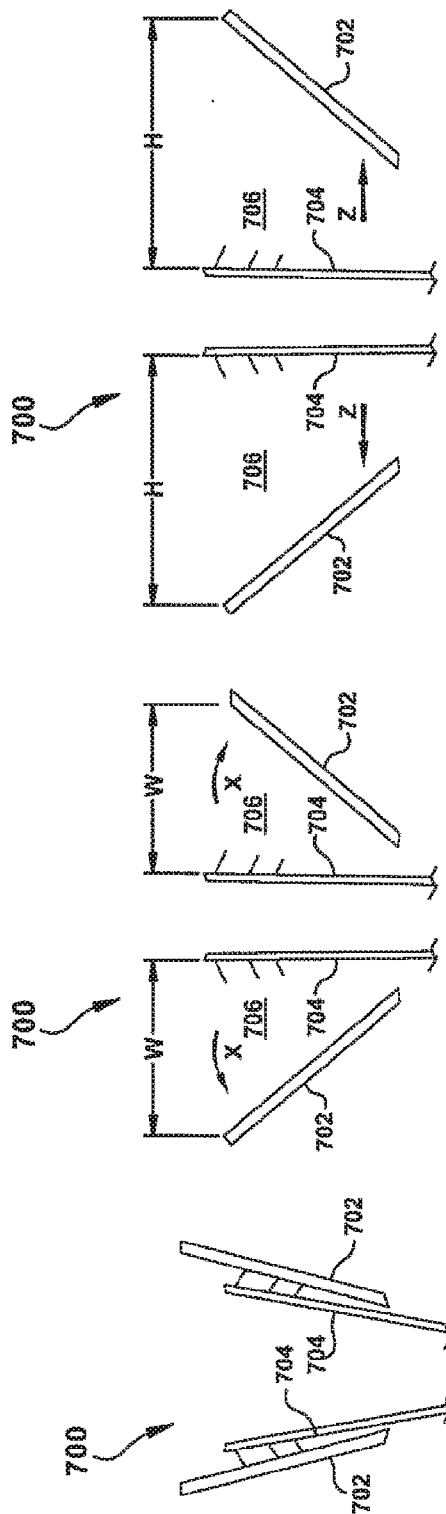


Fig. 63C

Fig. 63B

Fig. 63A

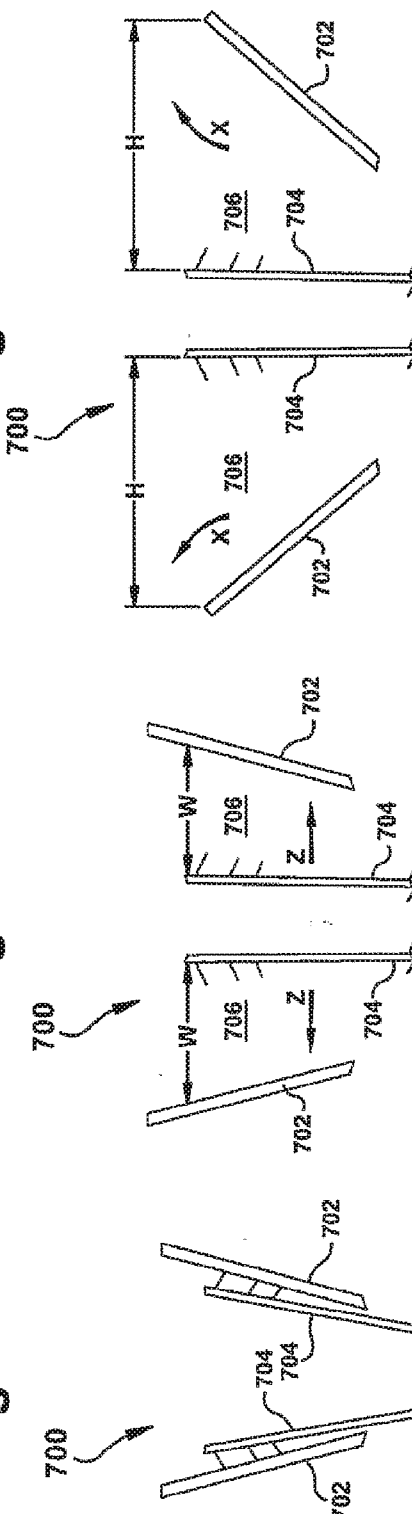


Fig. 64C

Fig. 64B

Fig. 64A

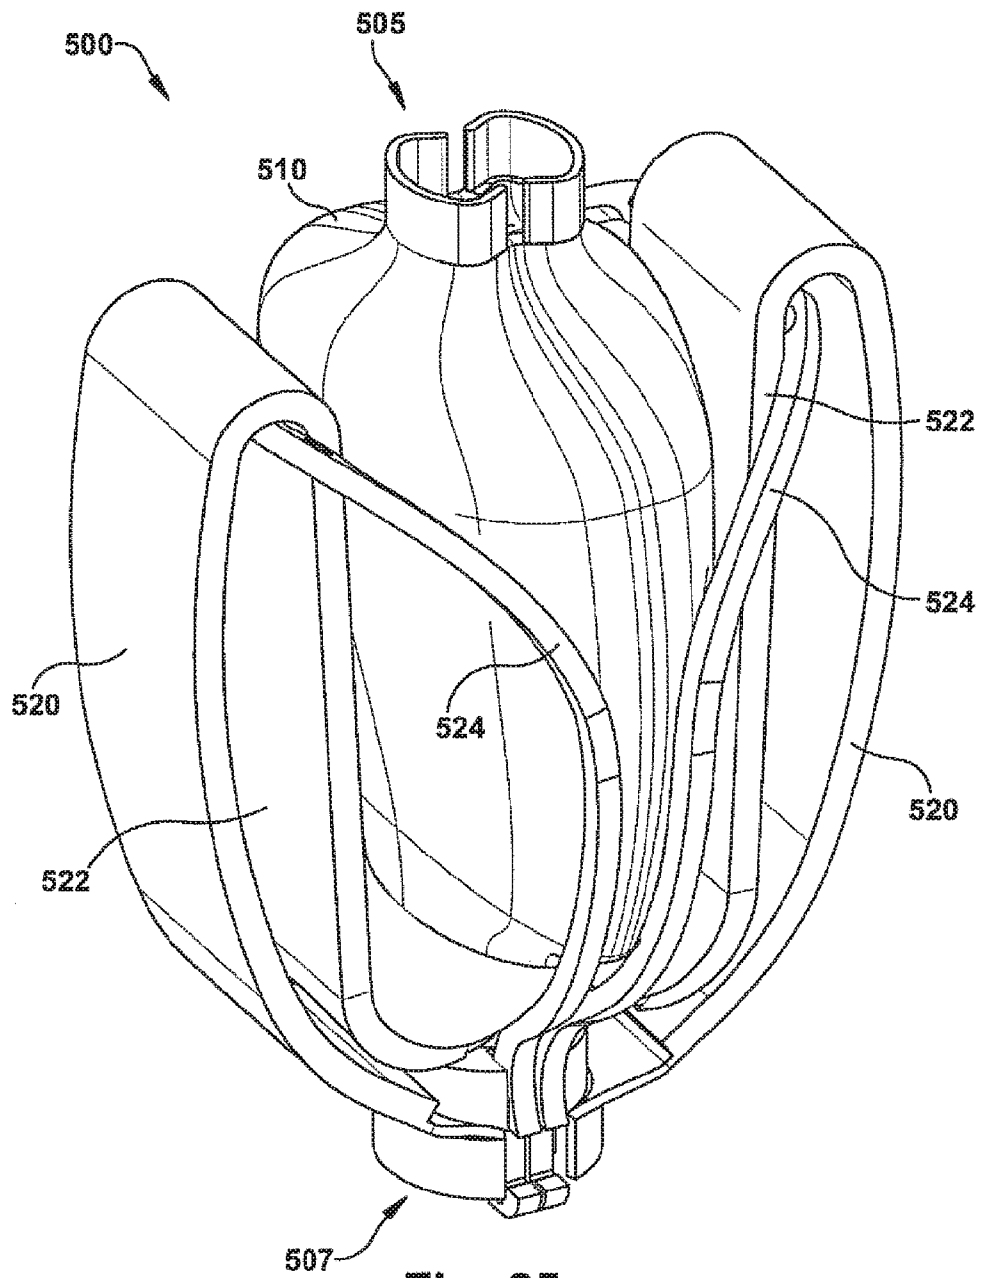
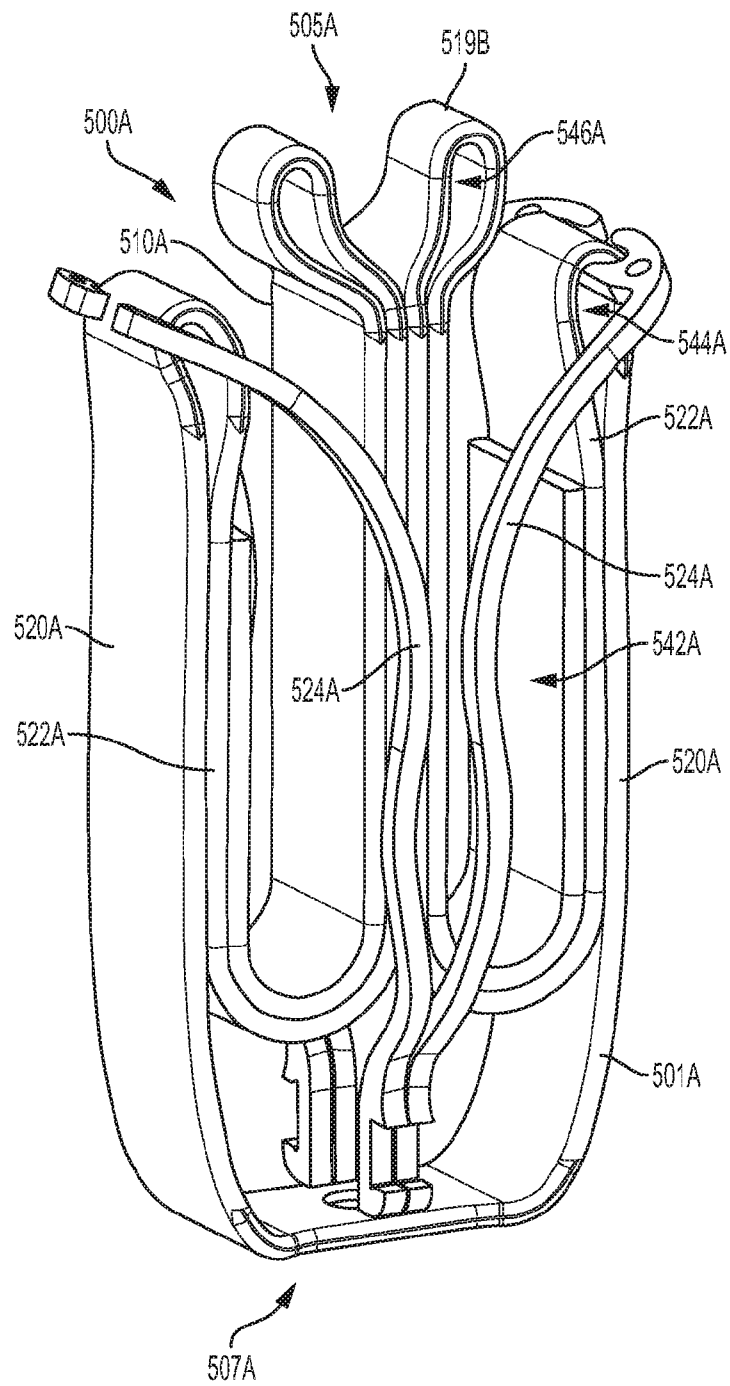


Fig. 65

**Fig. 65A**

87/262

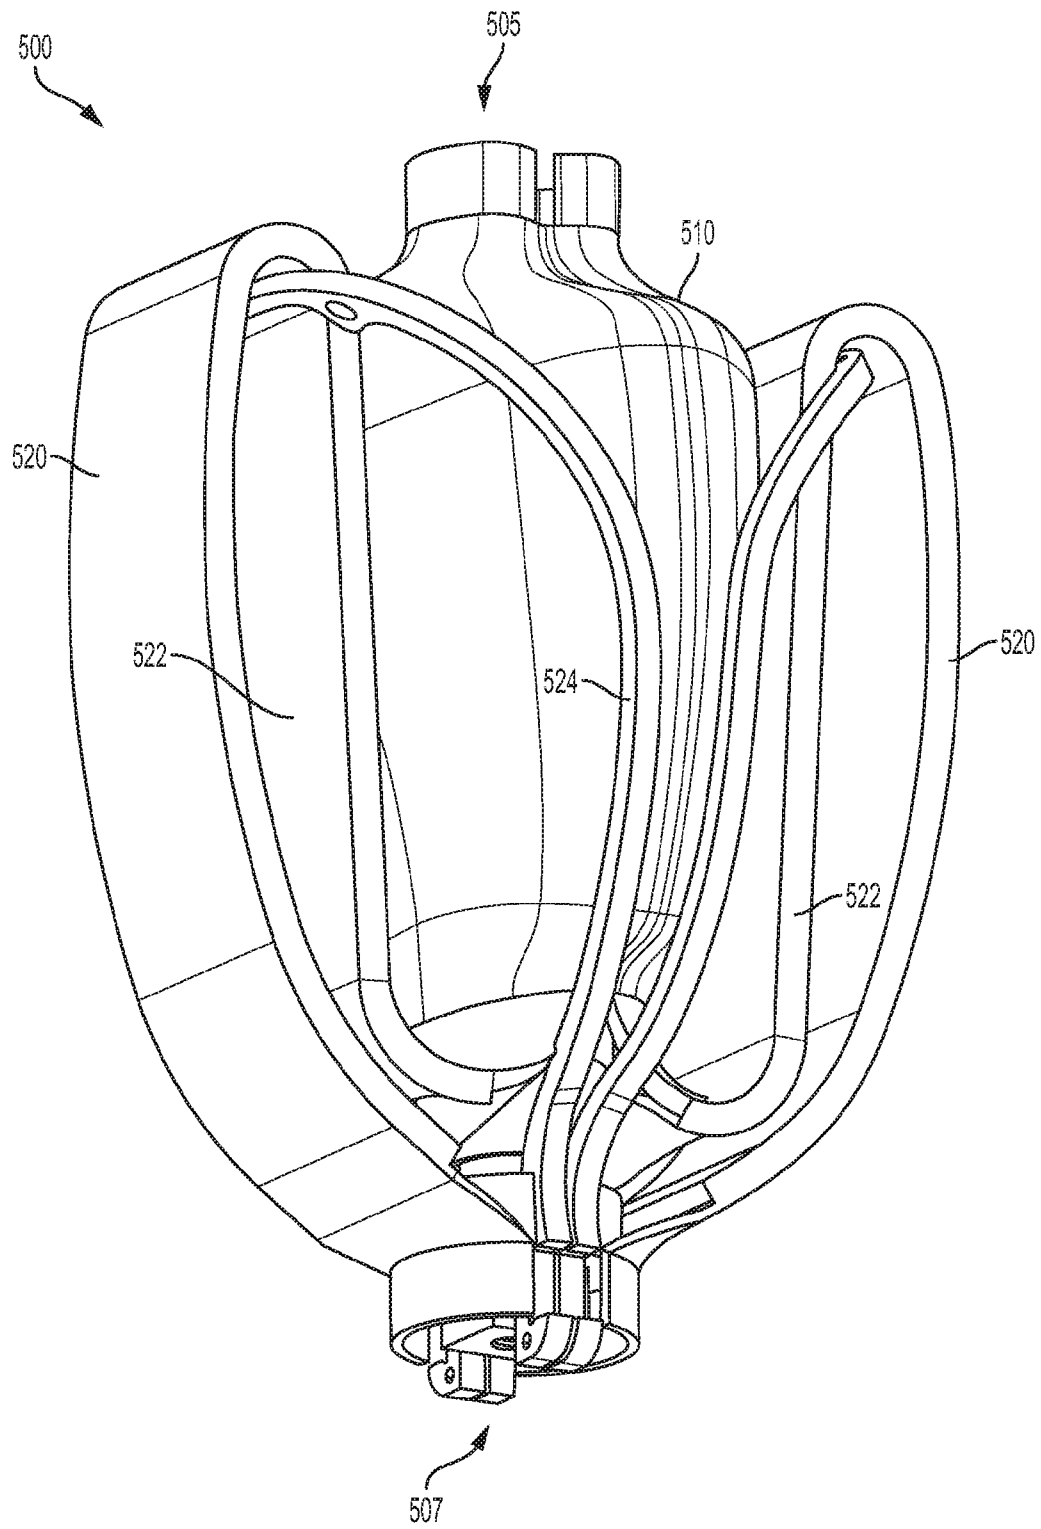
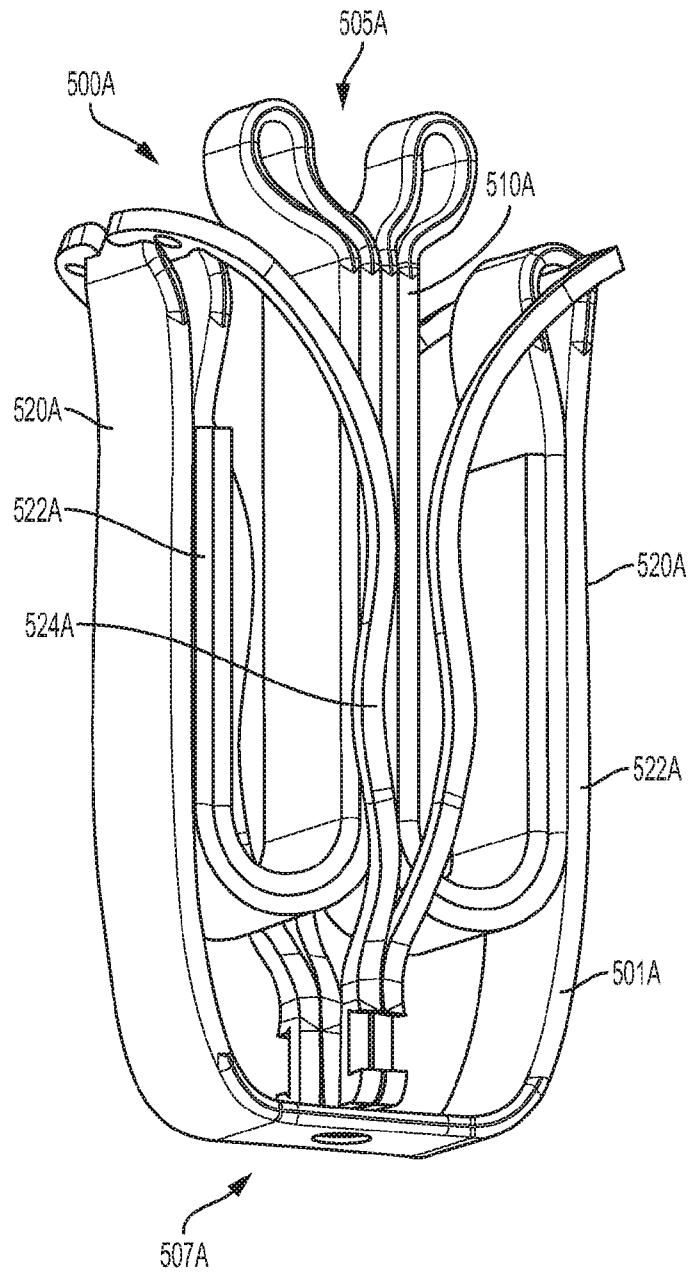
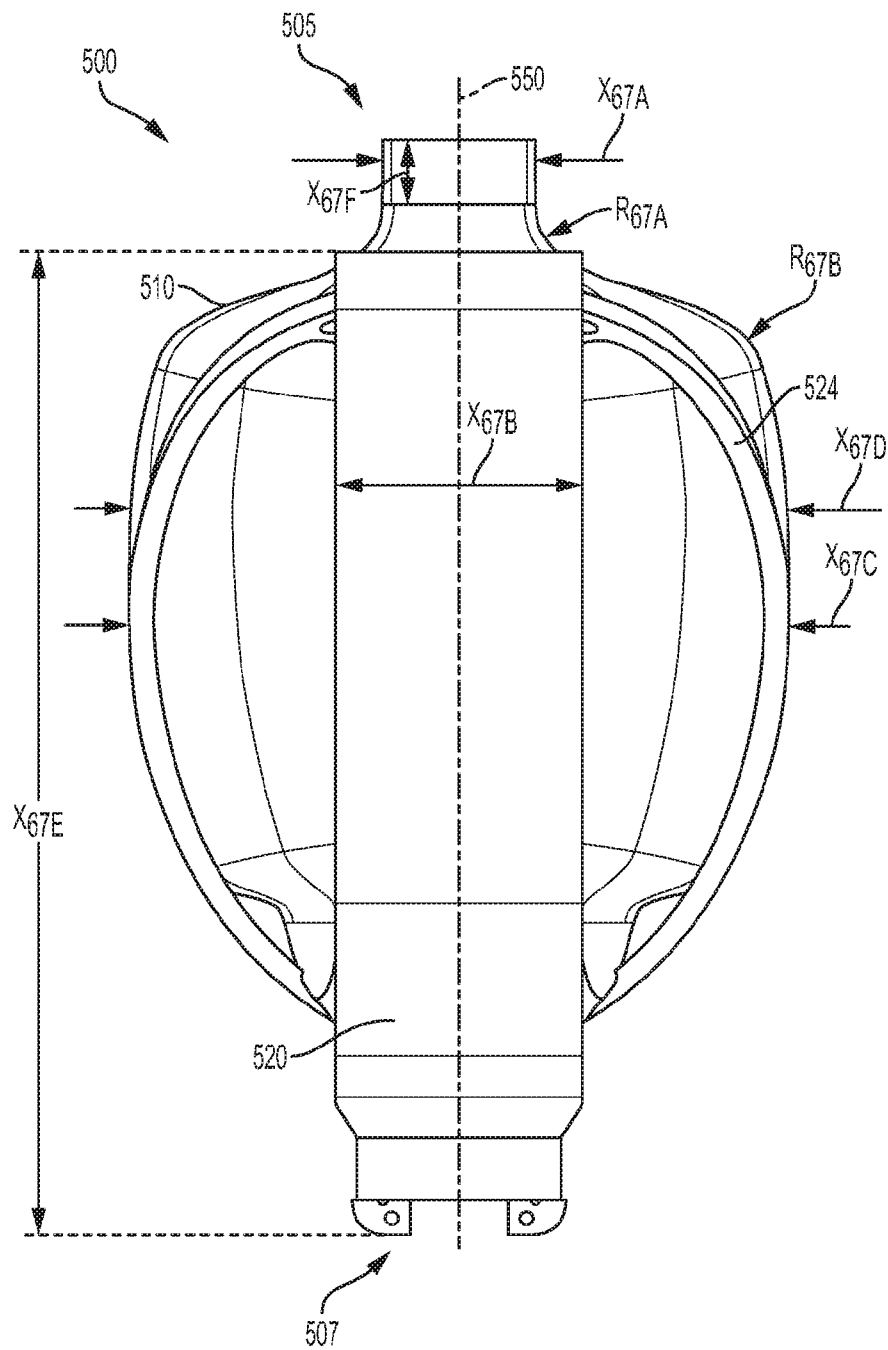



Fig. 66

**Fig. 66A**

89/262

**Fig. 67**

90/262

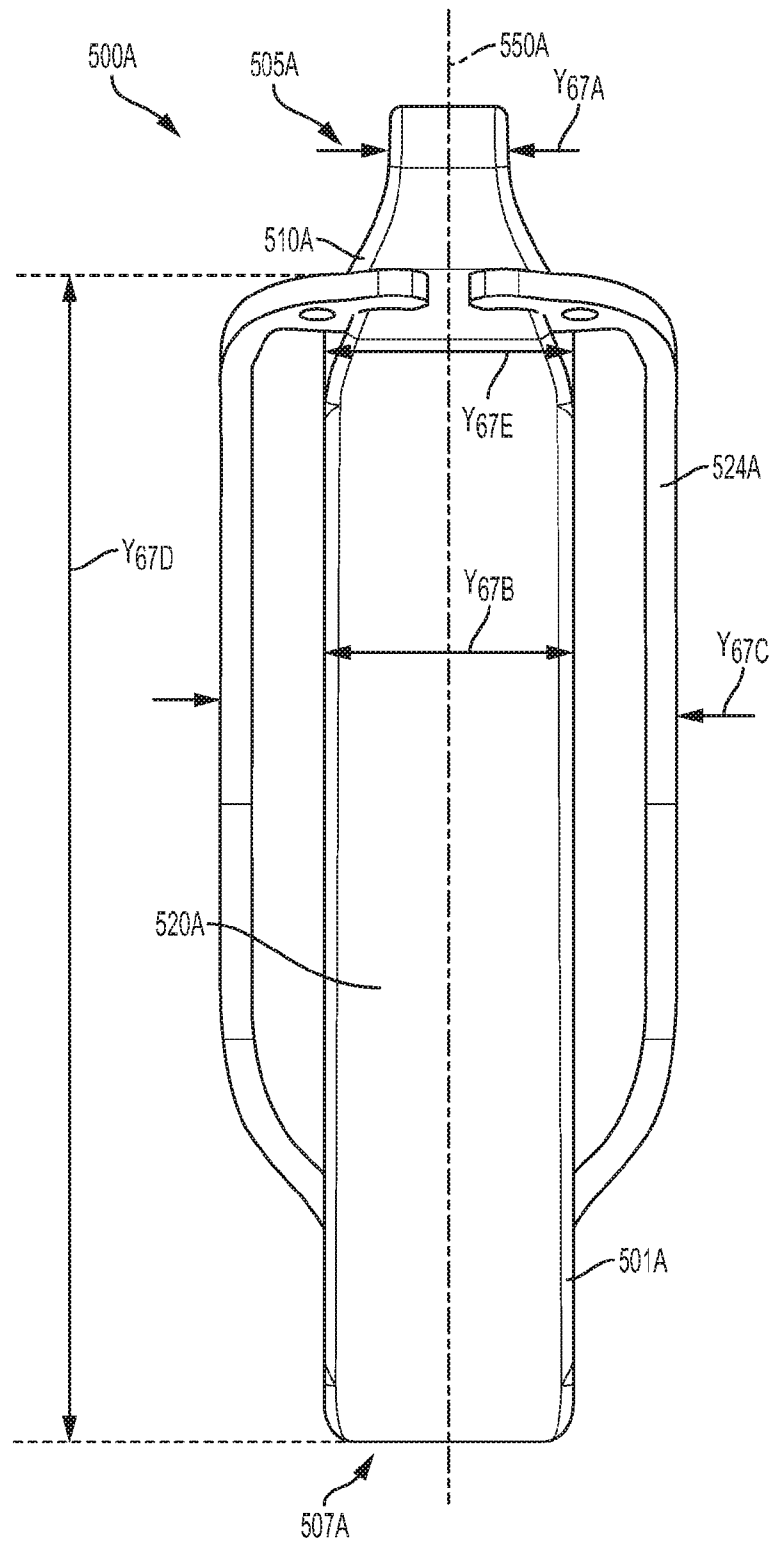**Fig. 67A**

91/262

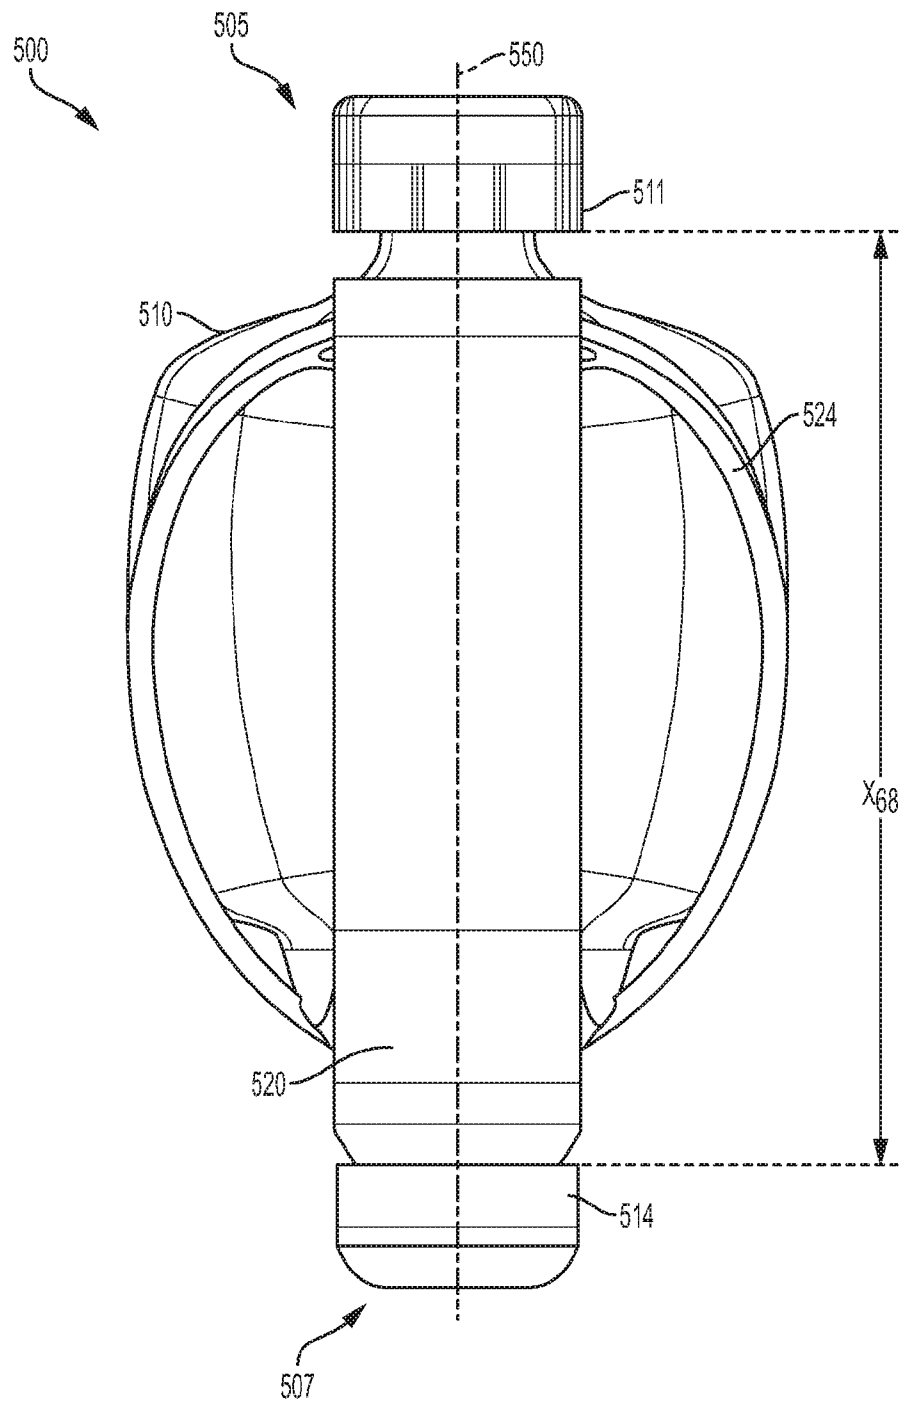
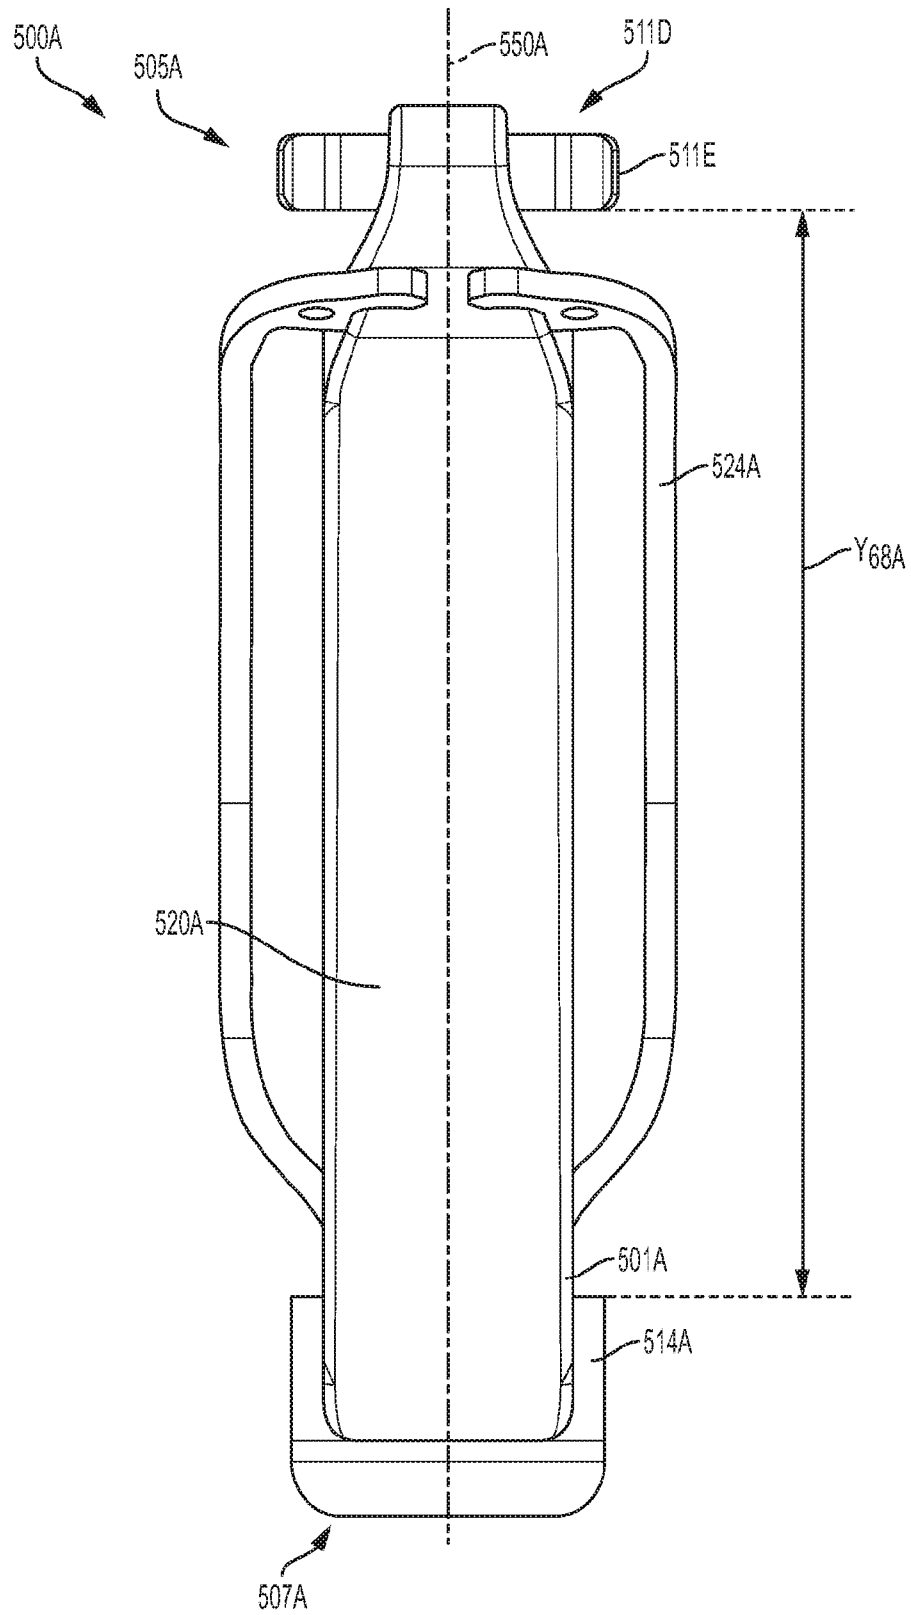
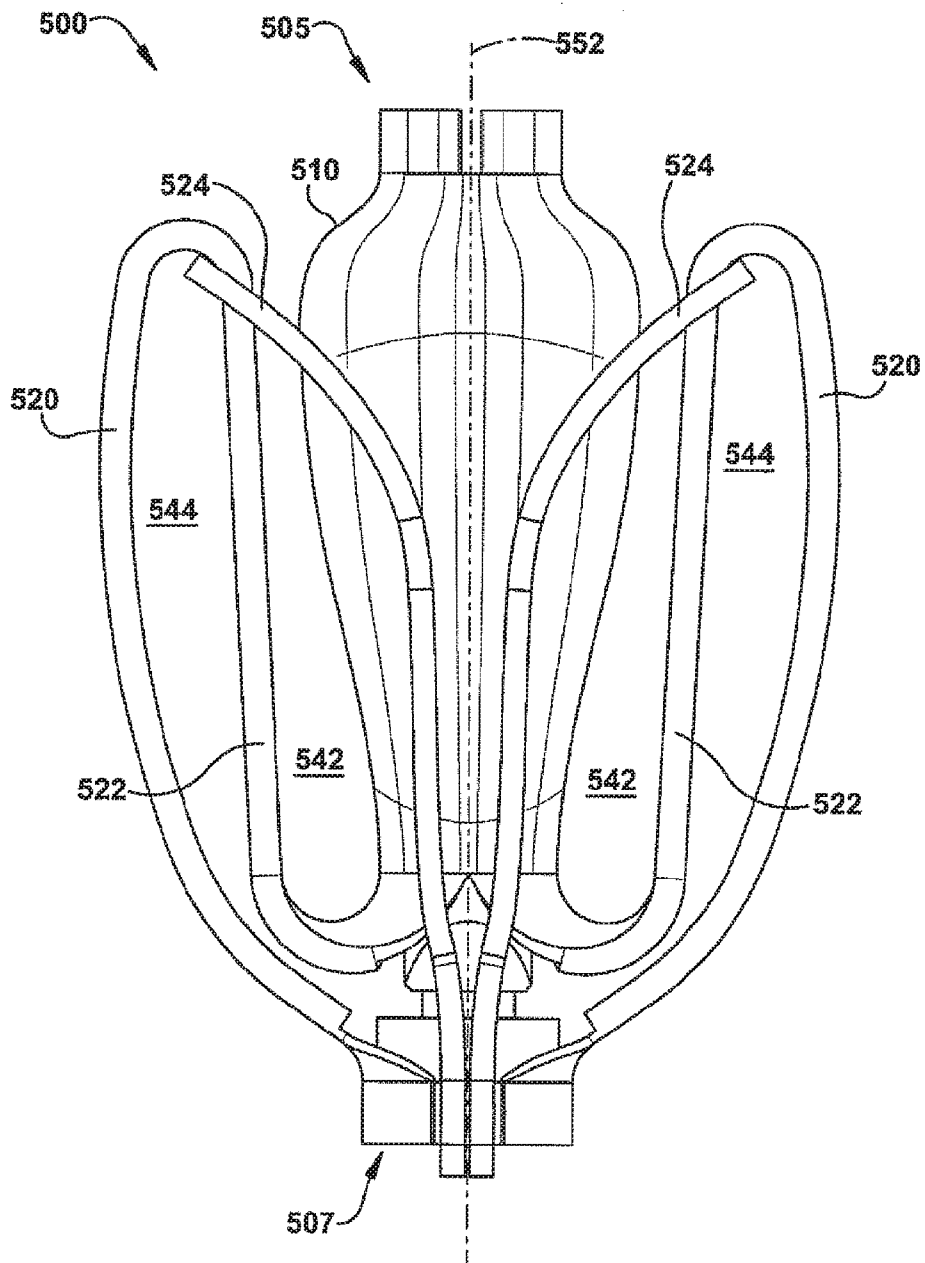
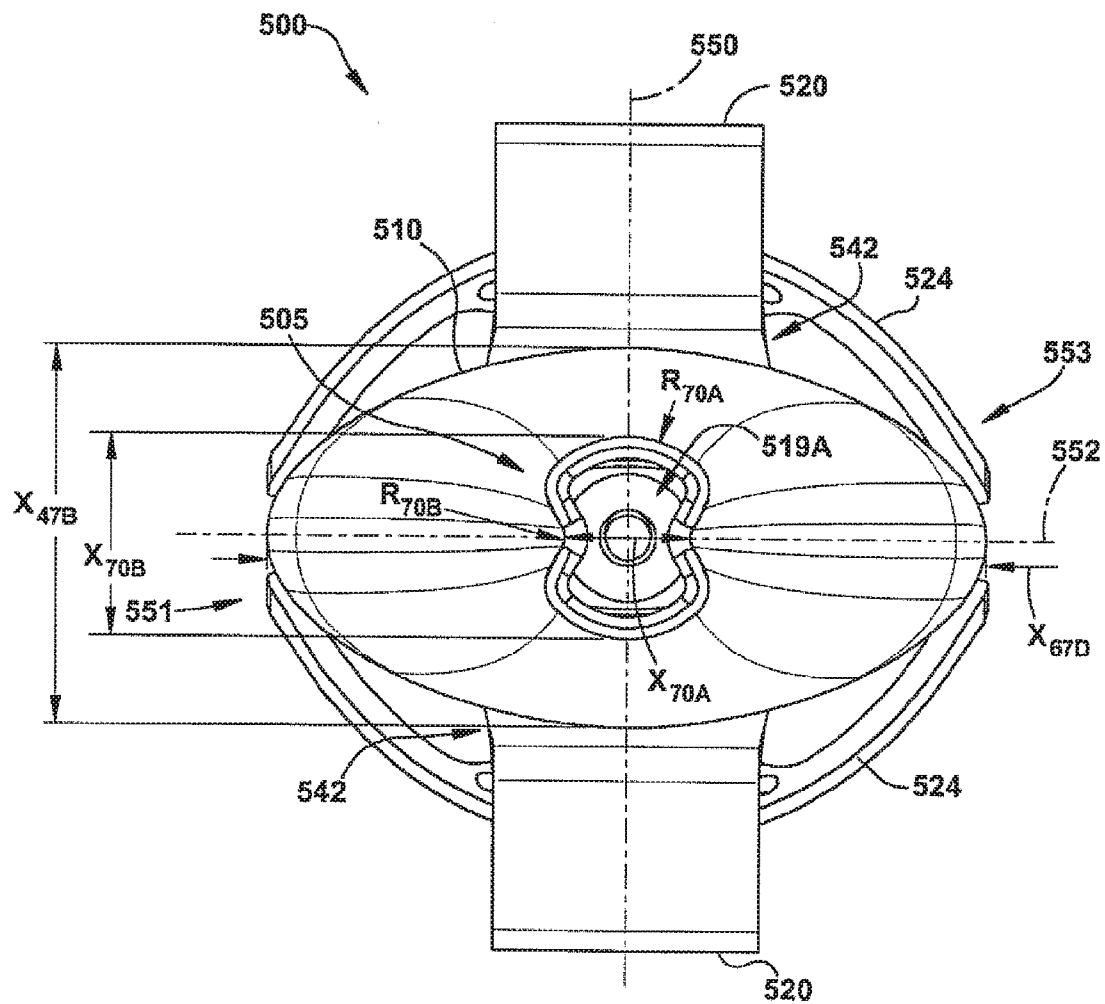


Fig. 68

92/262

**Fig. 68A**

**Fig. 69**

**Fig. 70**

95/262

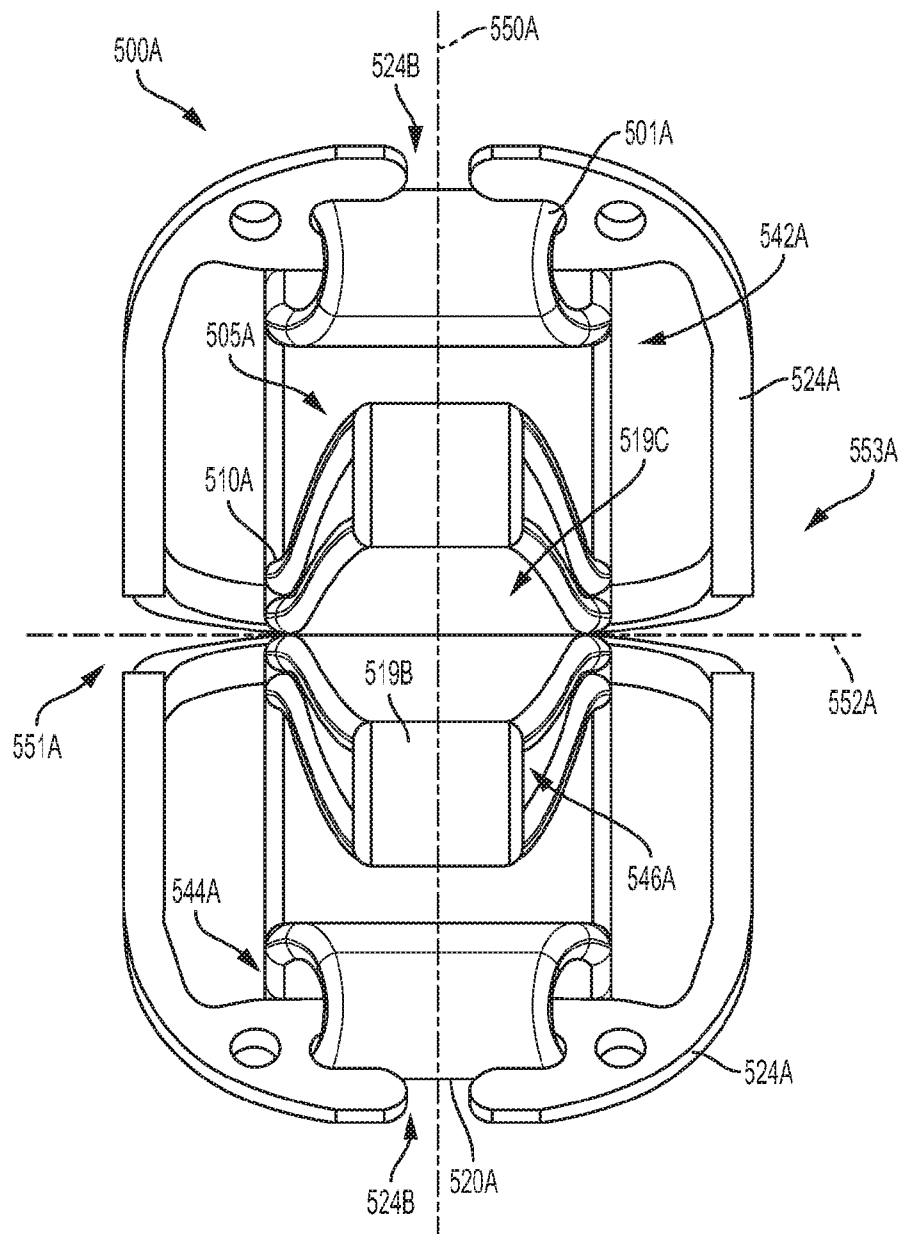


Fig. 70A

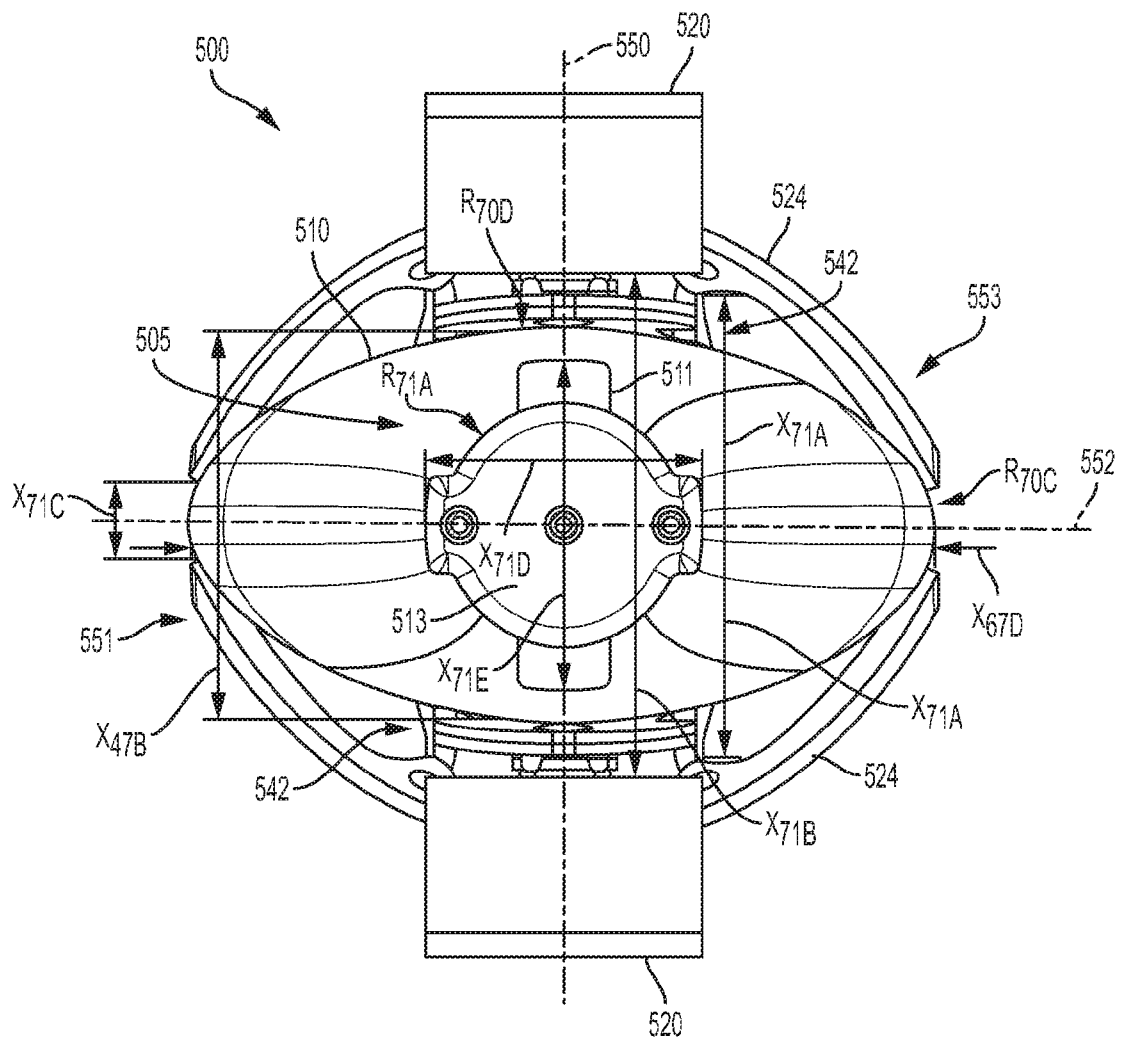
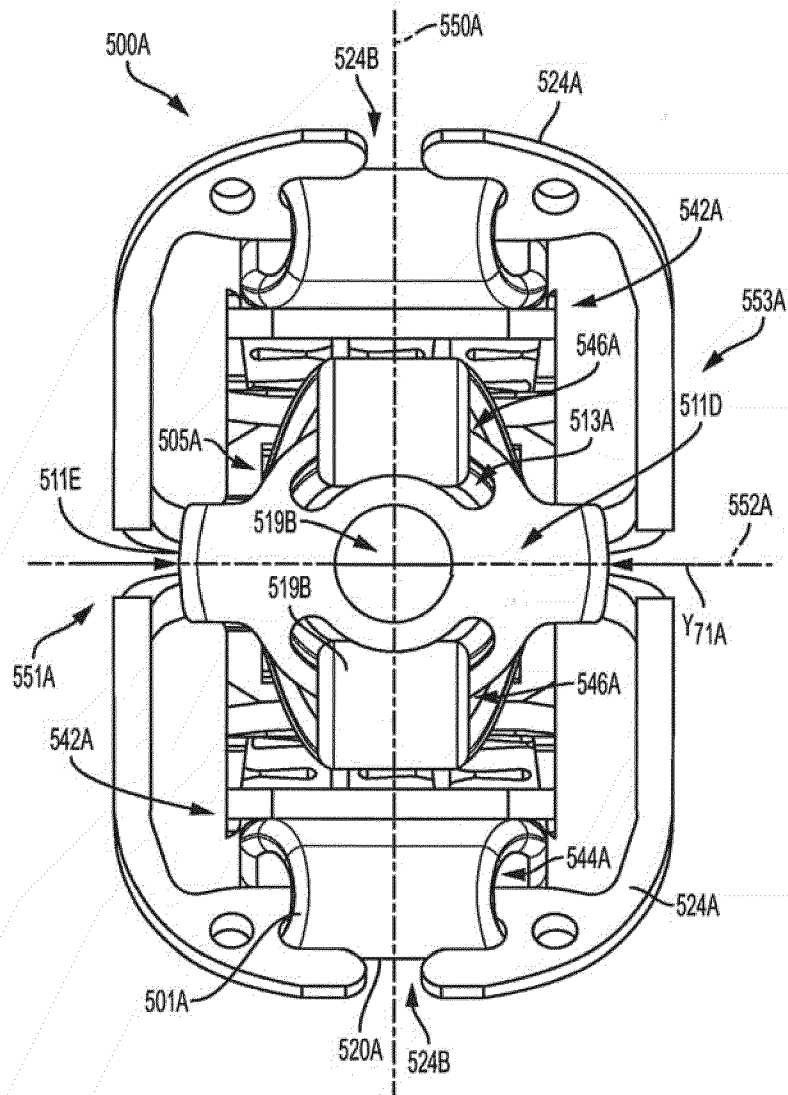
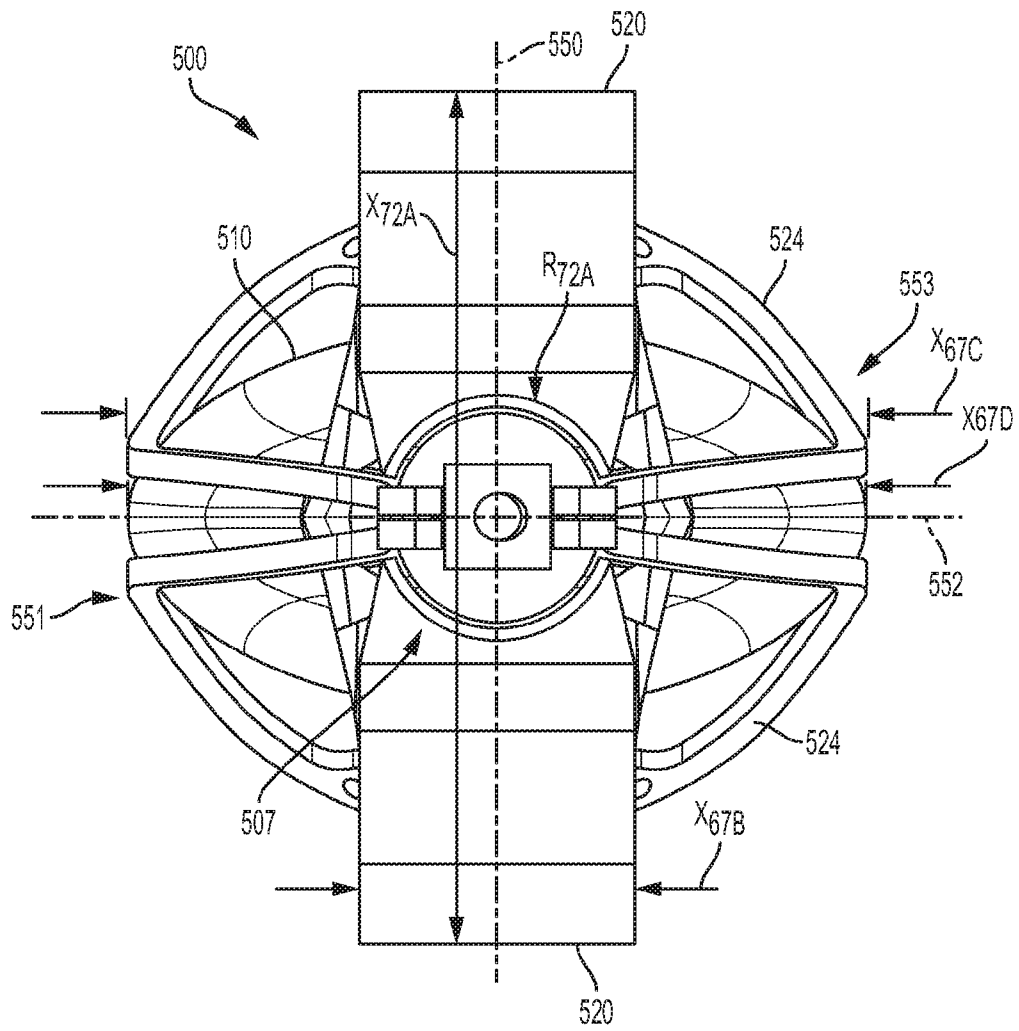


Fig. 71

97/262

**Fig. 71A**

**Fig. 72**

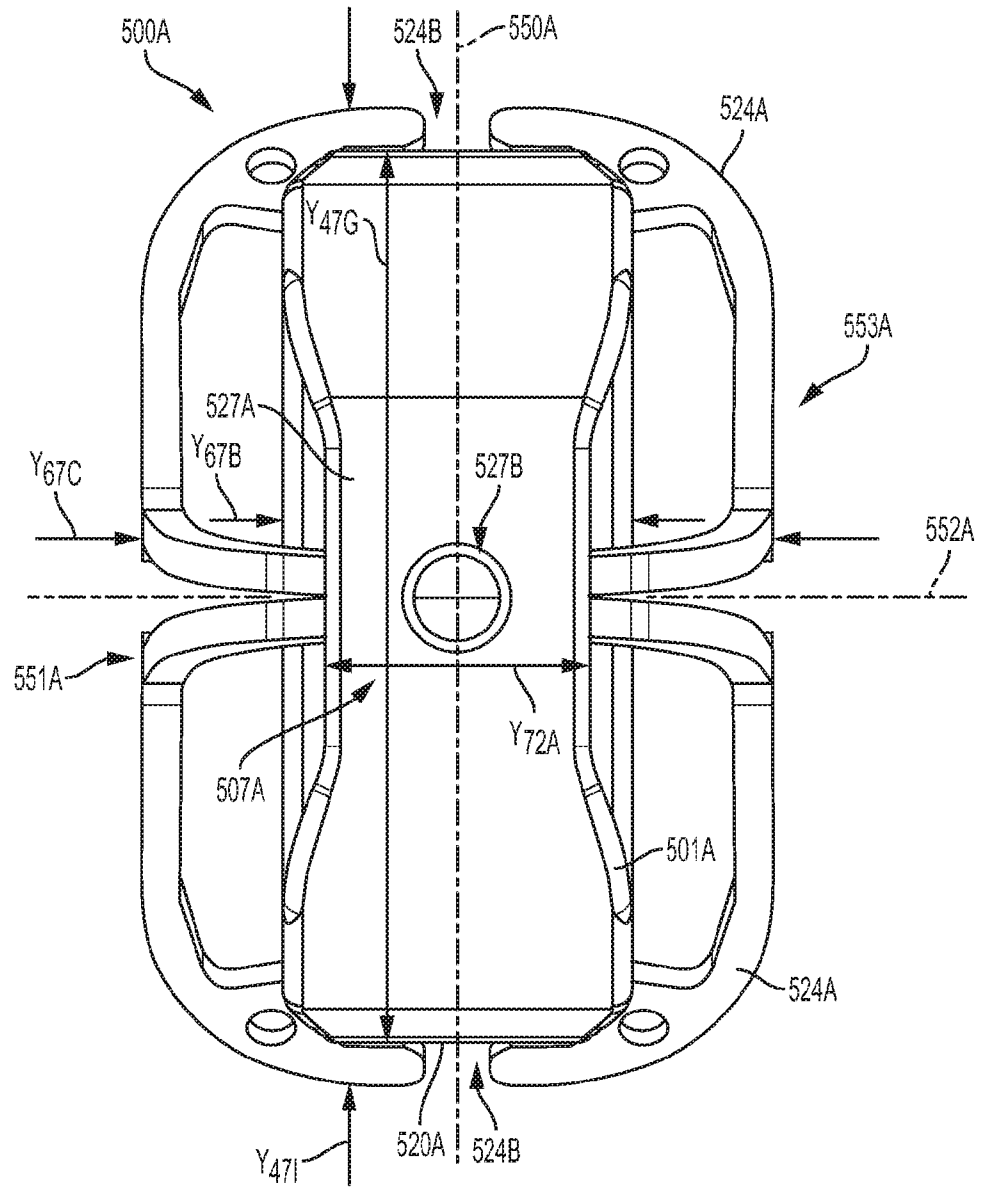
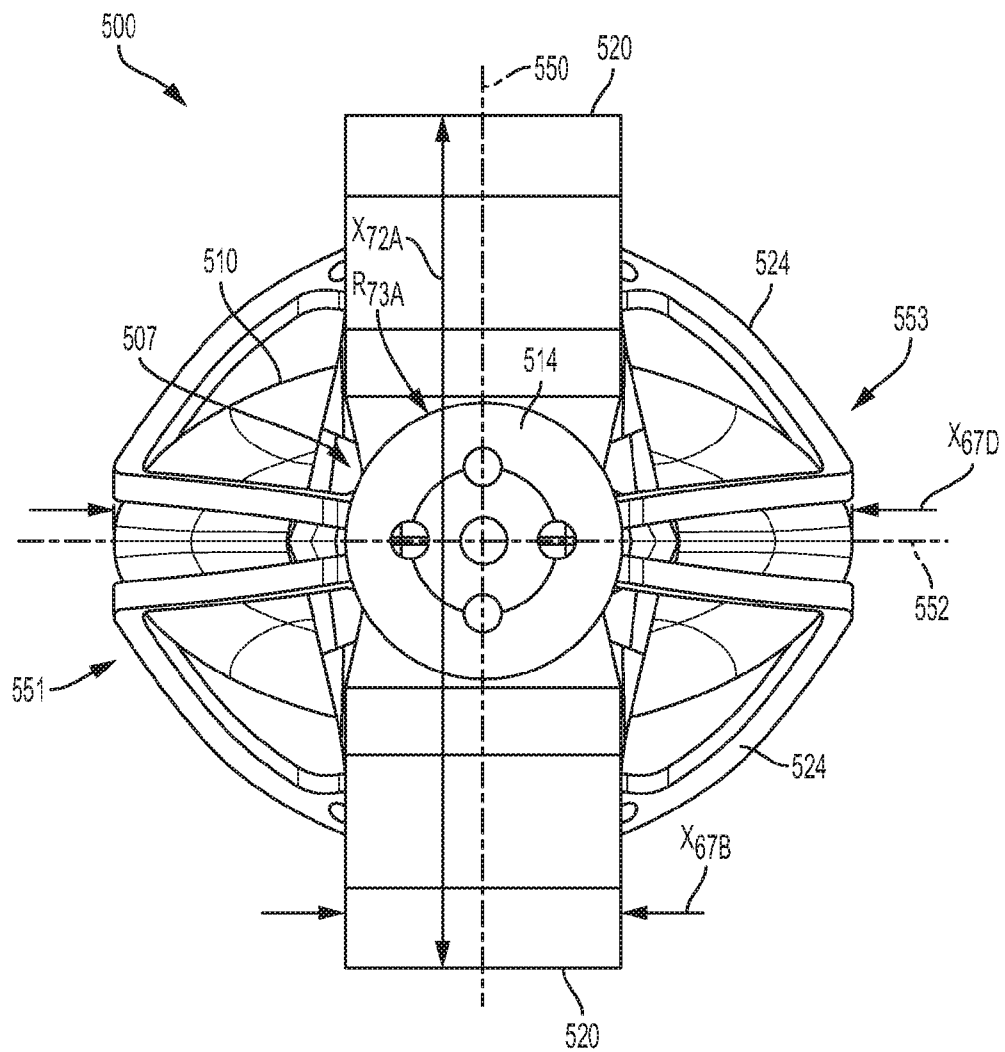
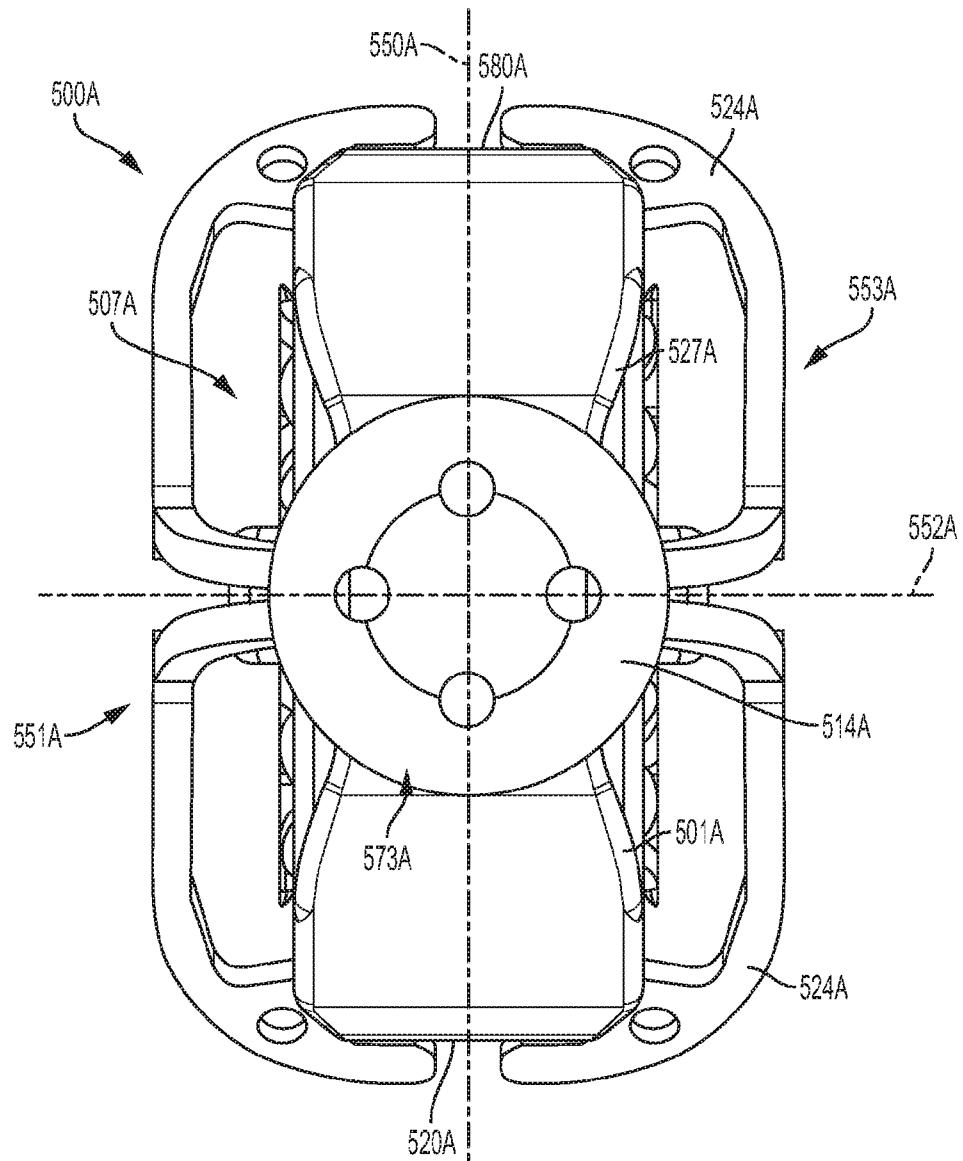


Fig. 72A

**Fig. 73**

**Fig. 73A**

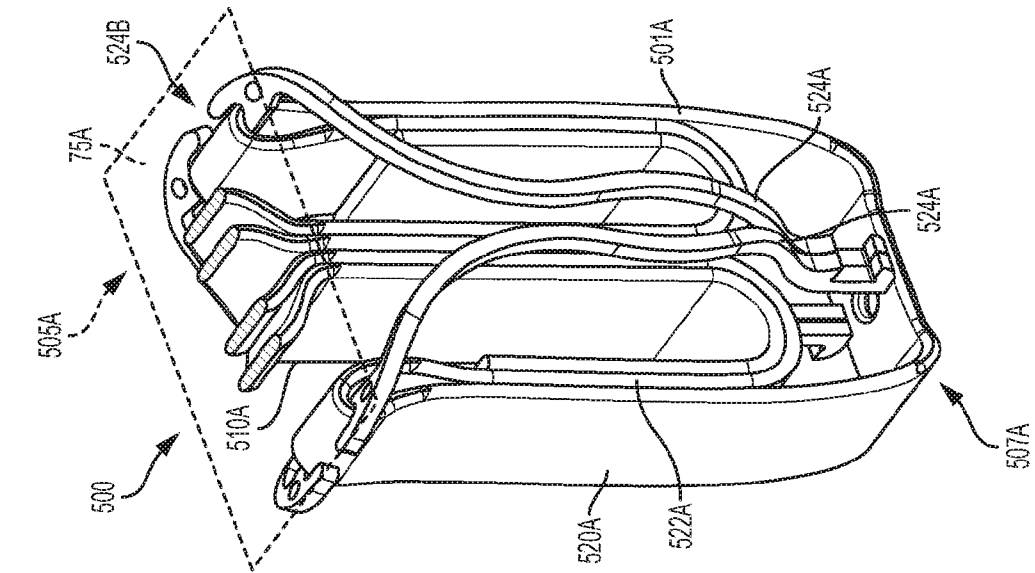


Fig. 74A

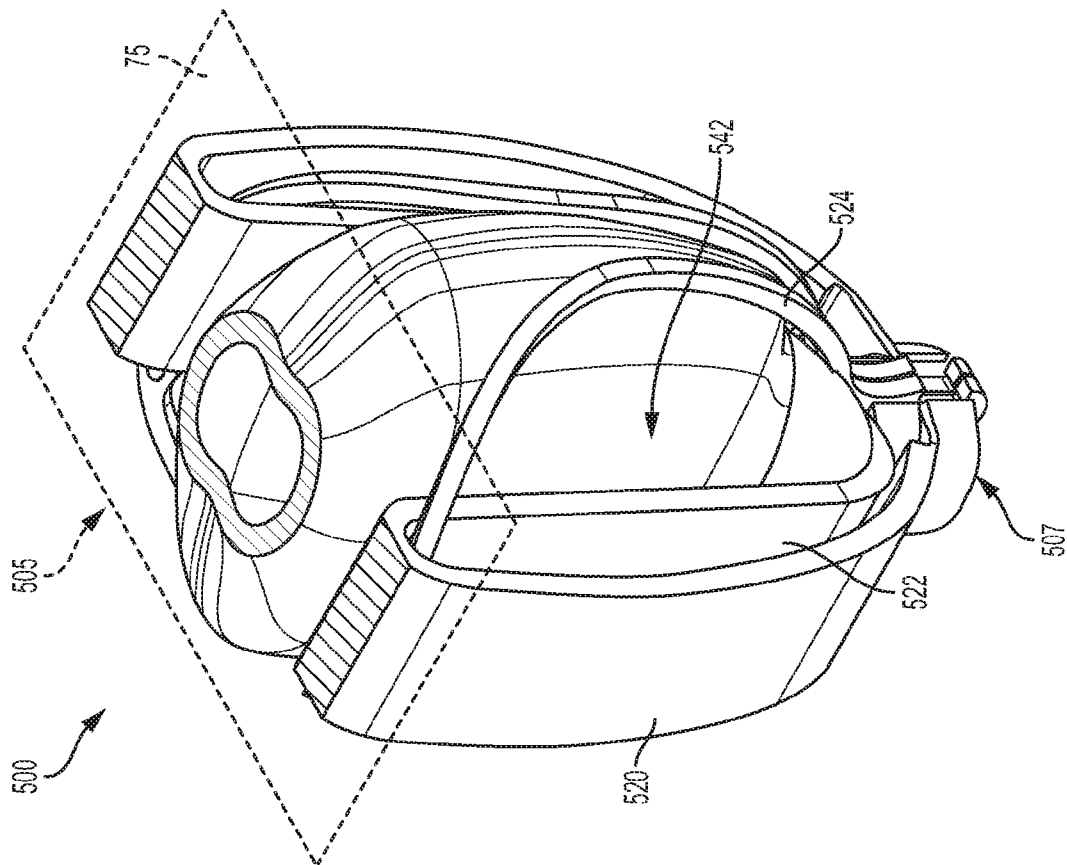
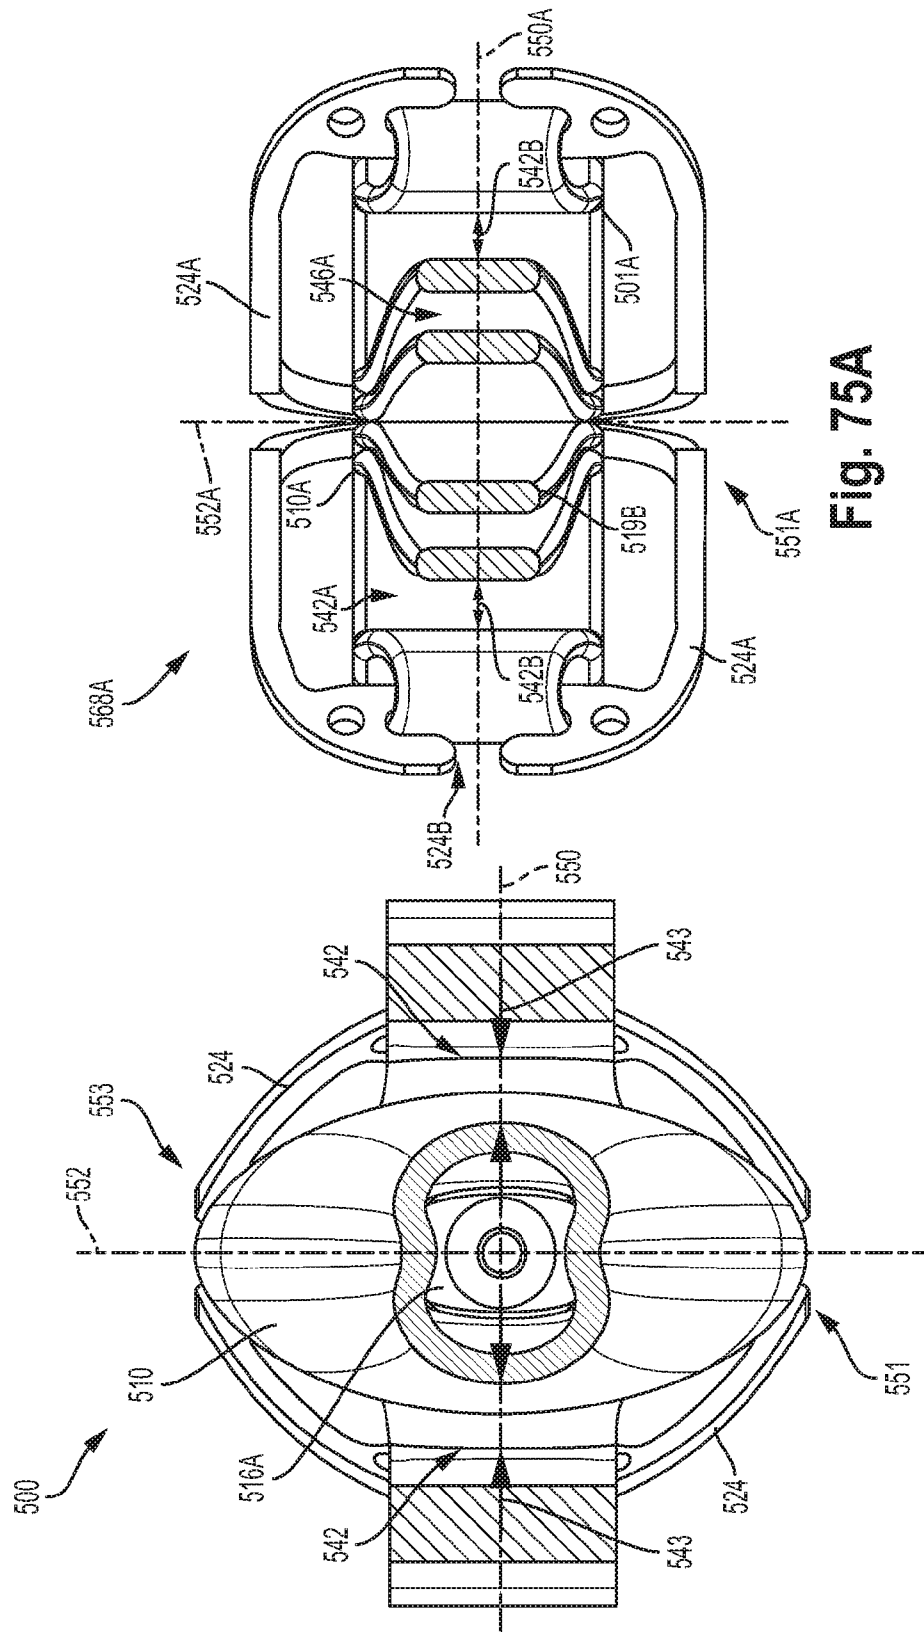


Fig. 74



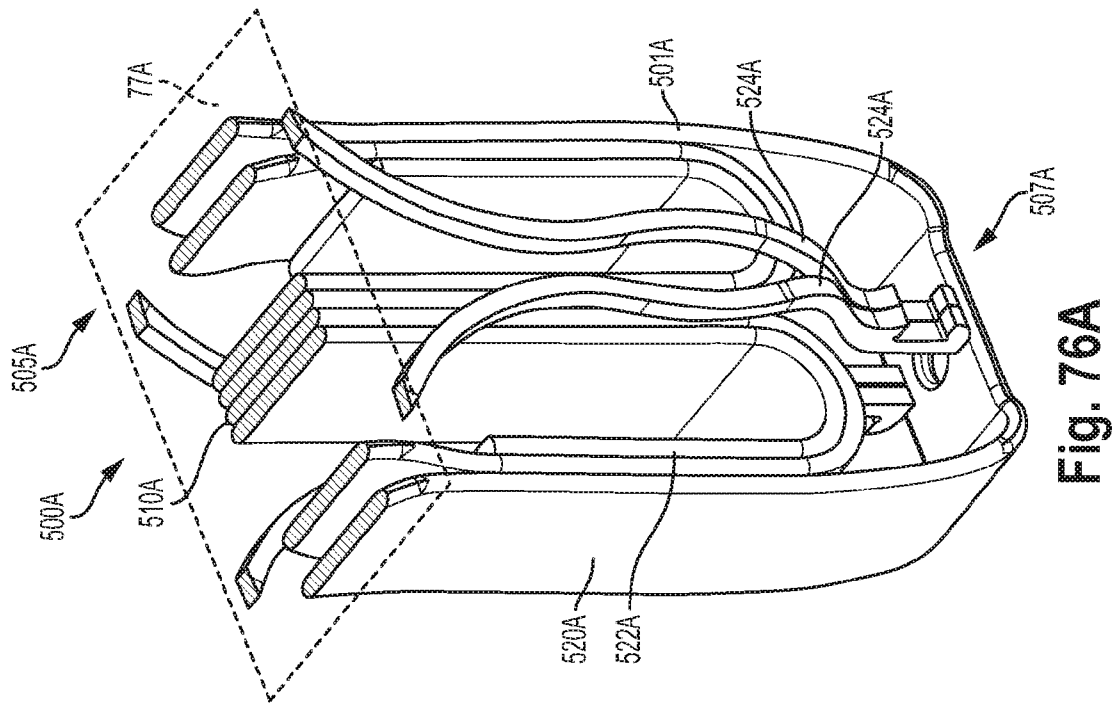


Fig. 76A

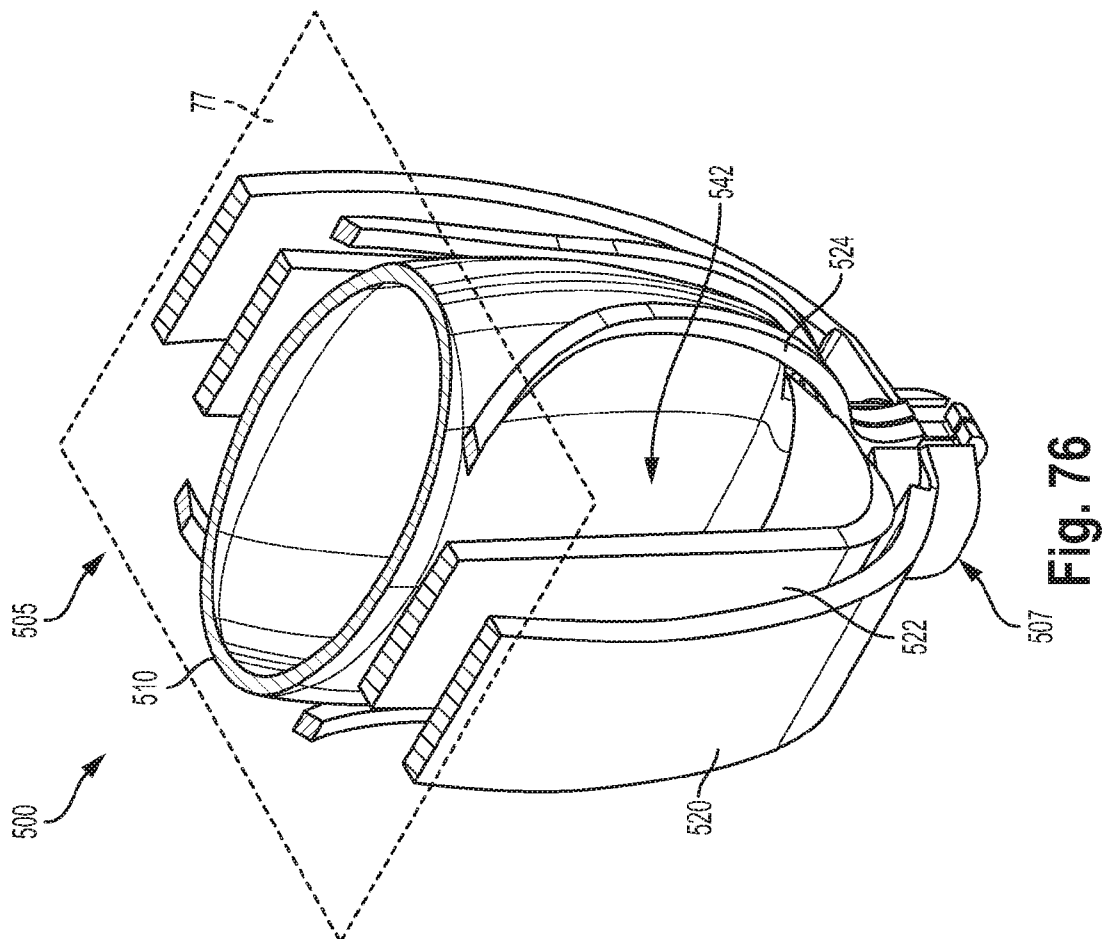


Fig. 76

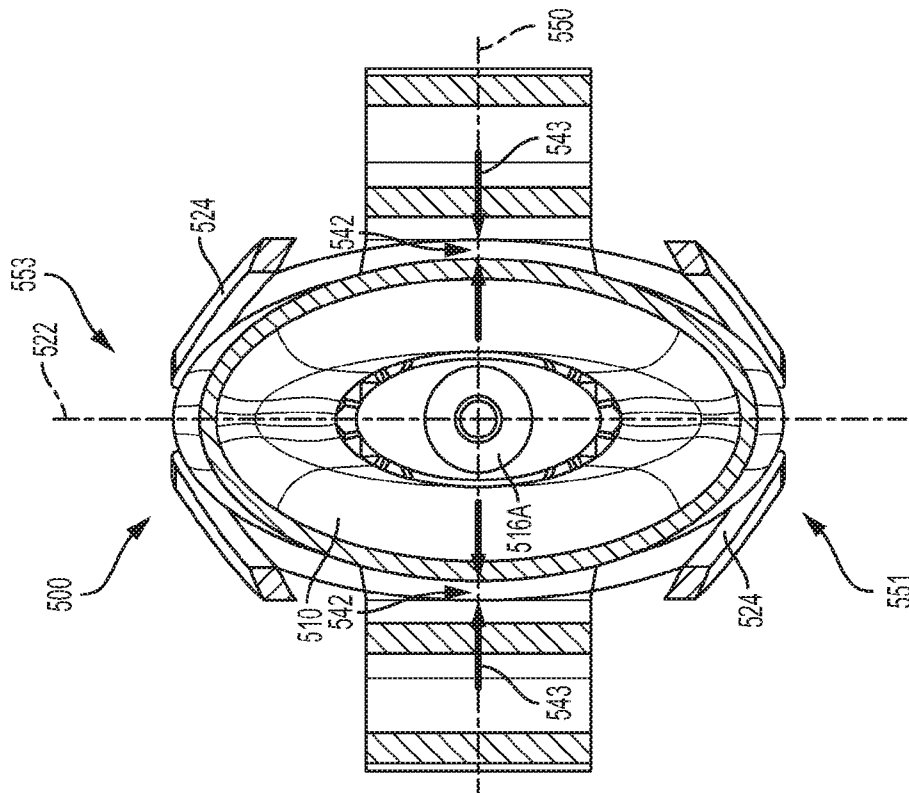


Fig. 77

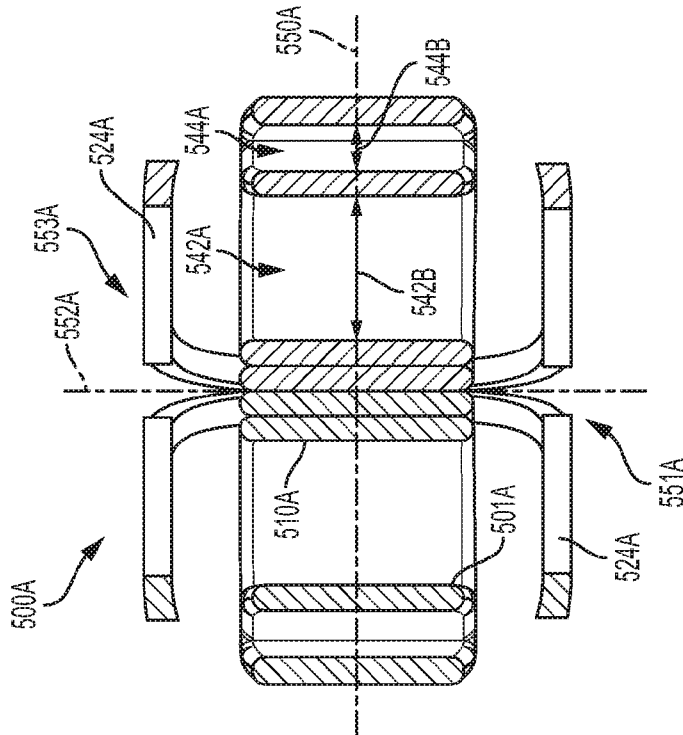
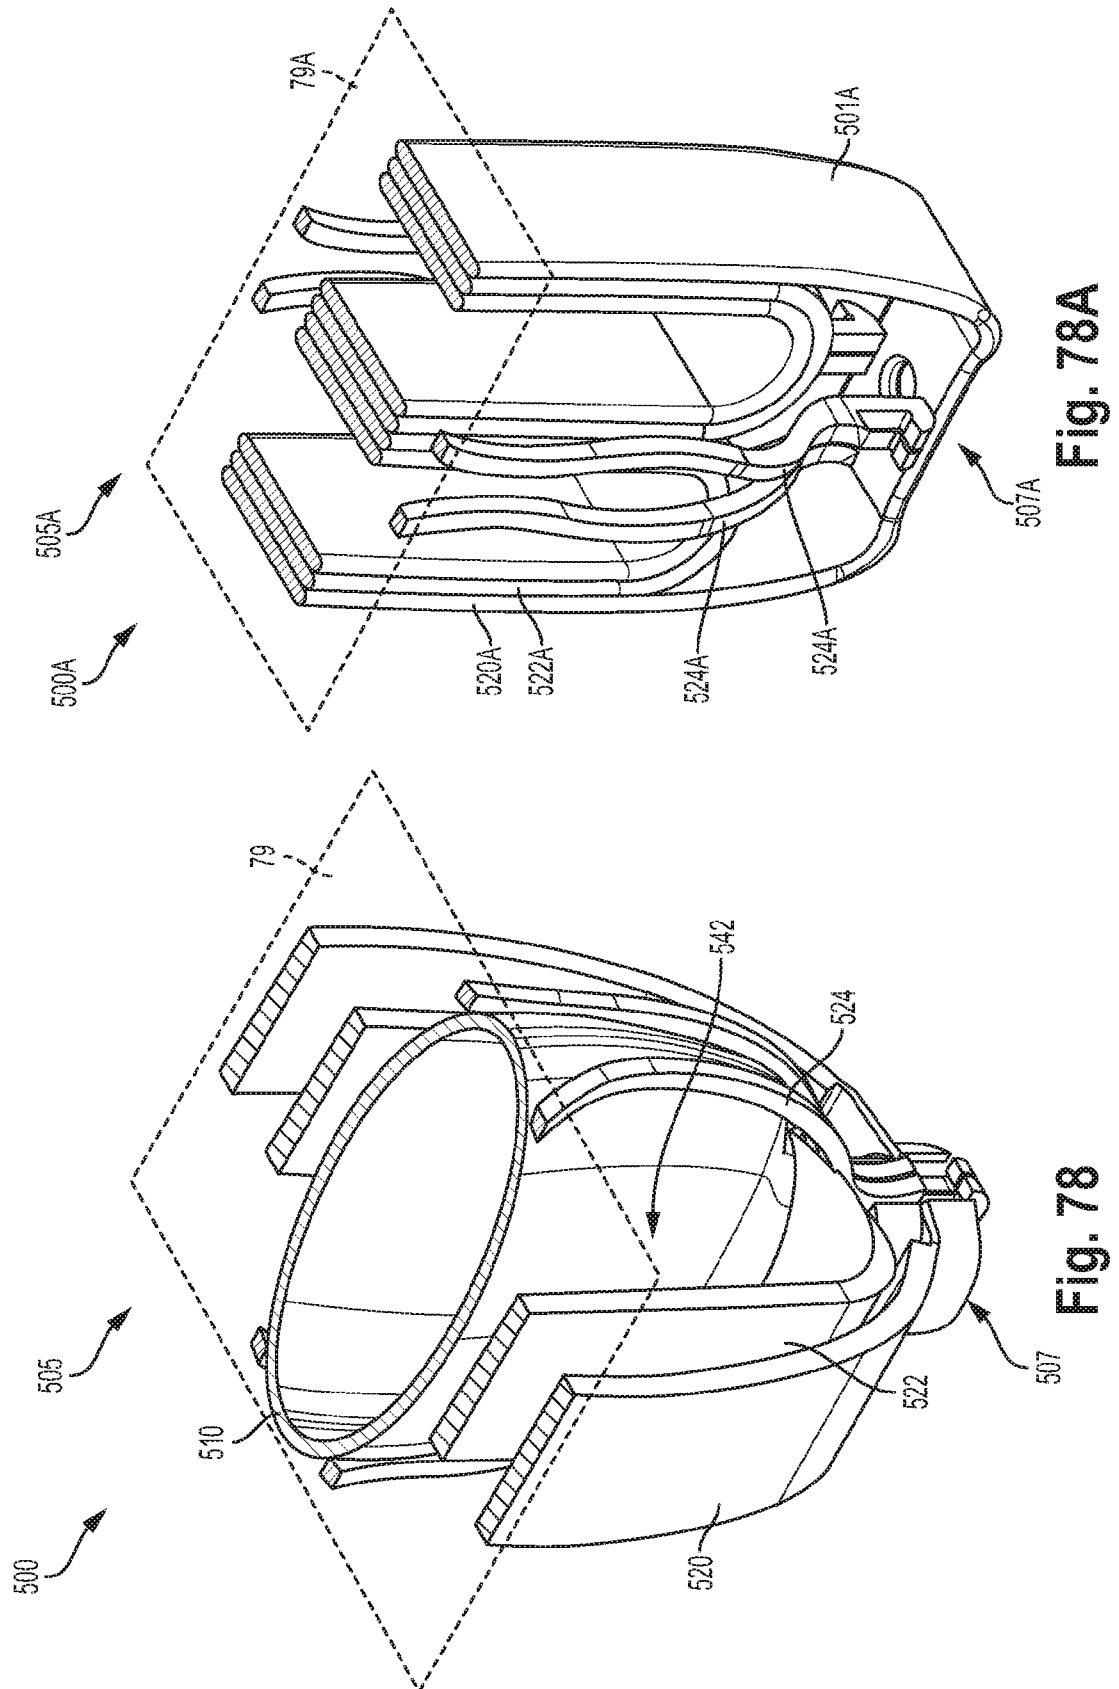


Fig. 77A



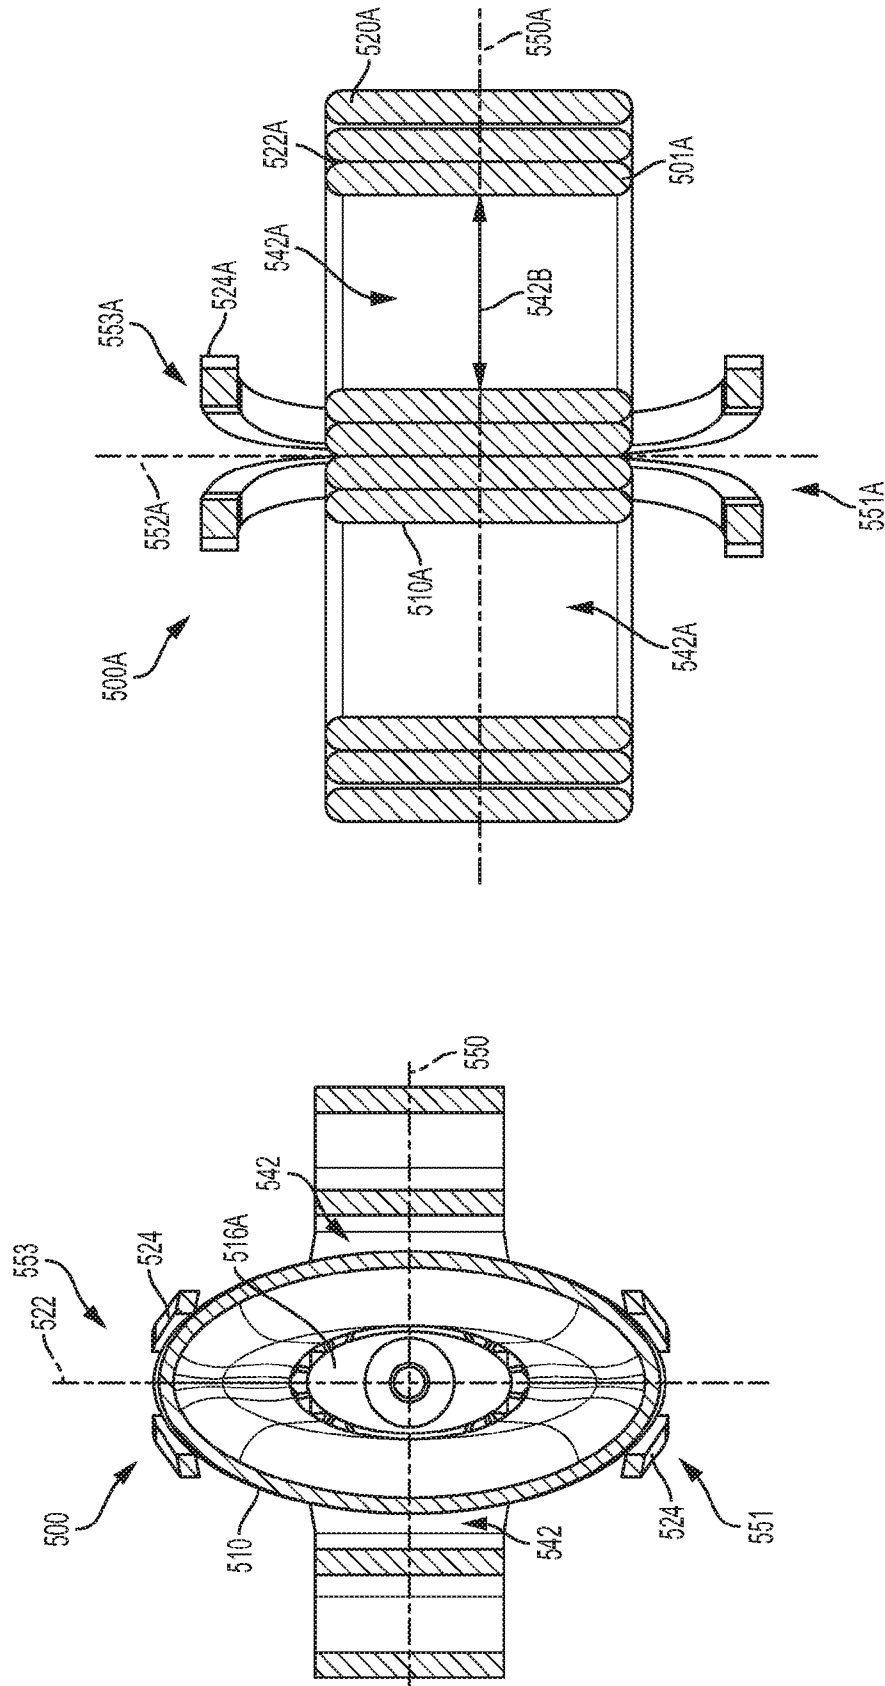


Fig. 79A

Fig. 79

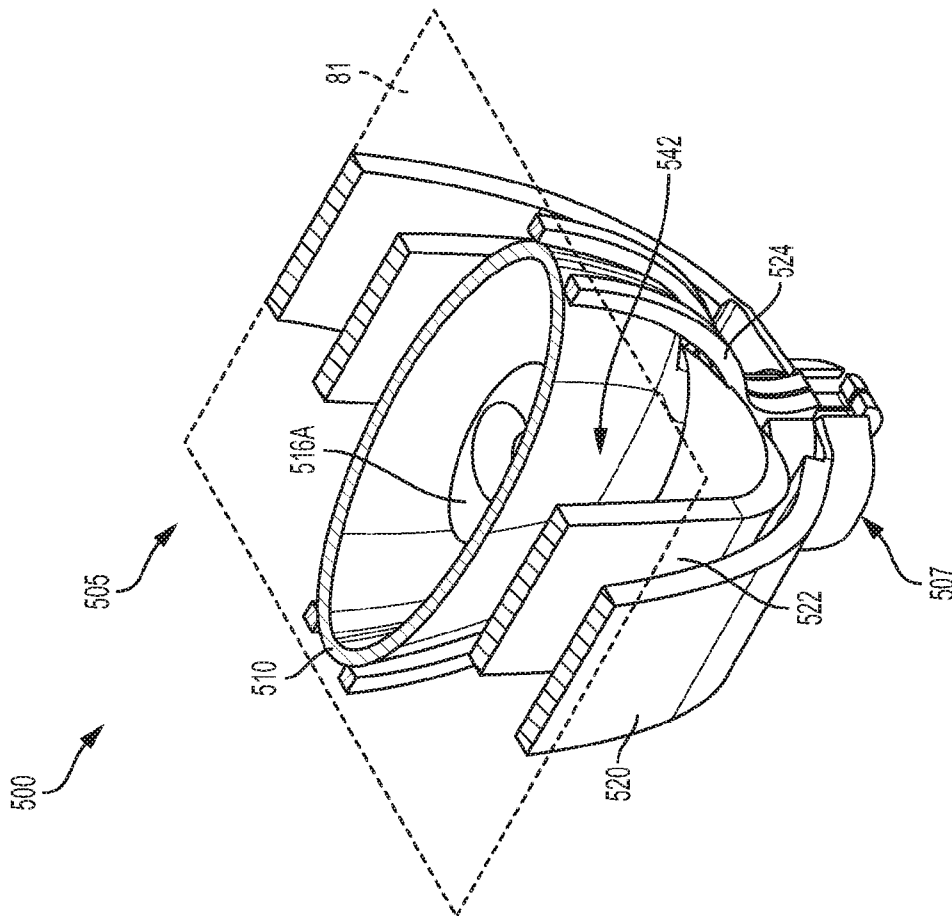


Fig. 80

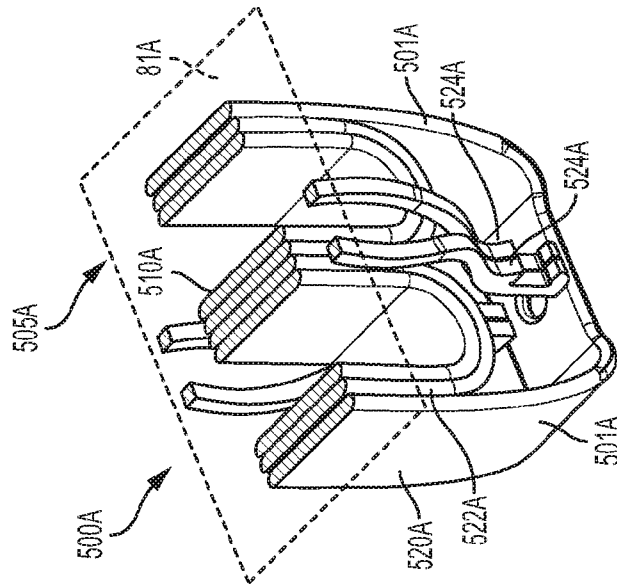


Fig. 80A

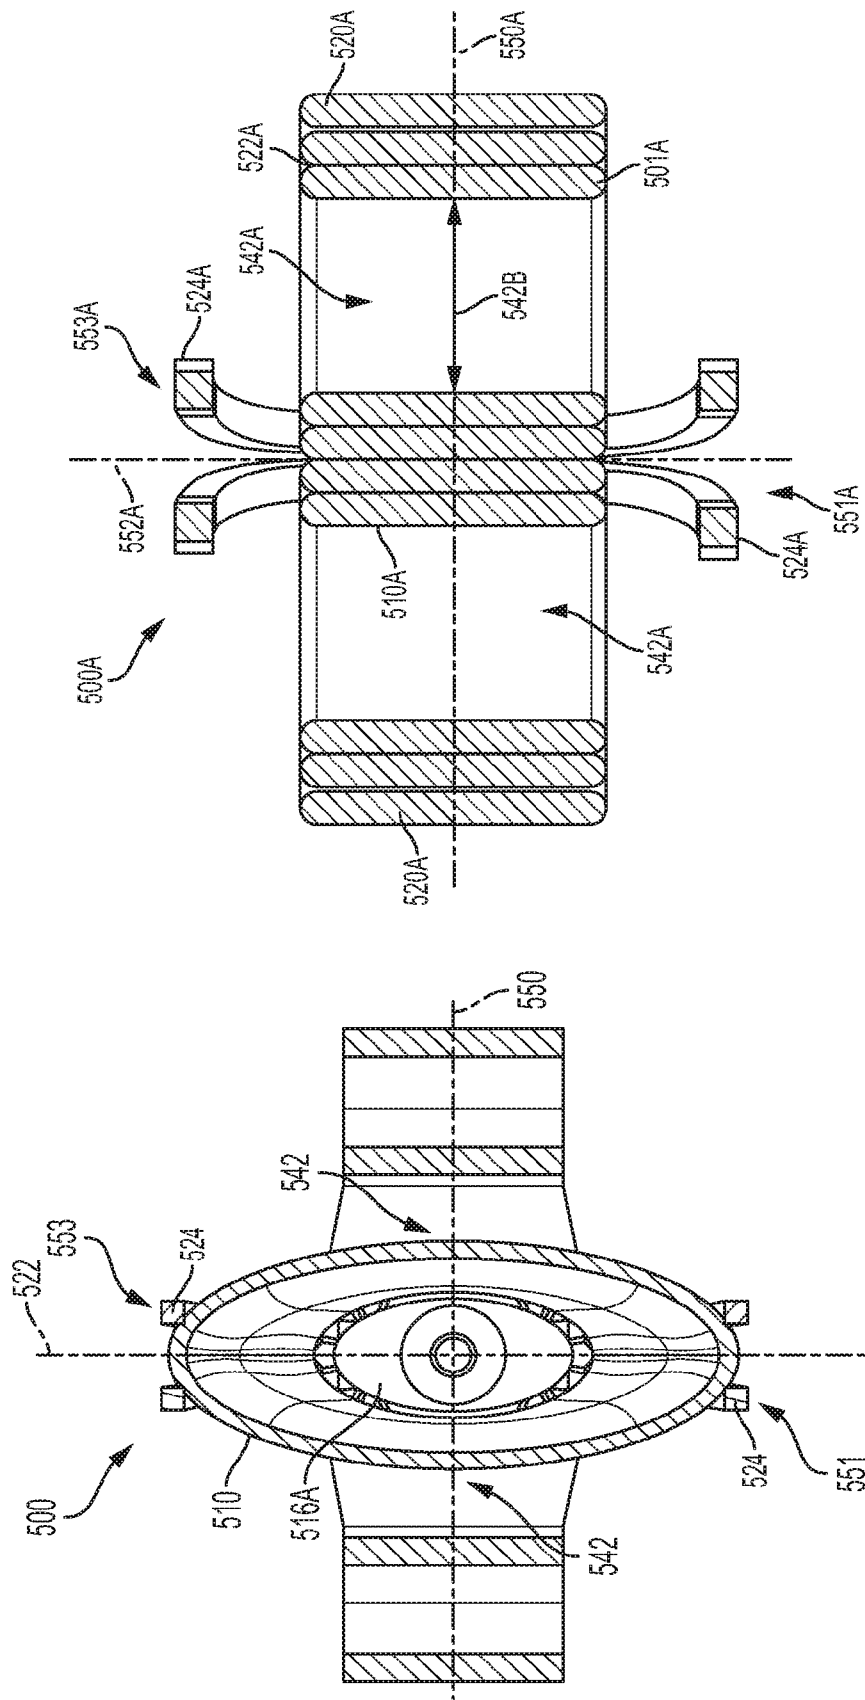


Fig. 81

Fig. 81A

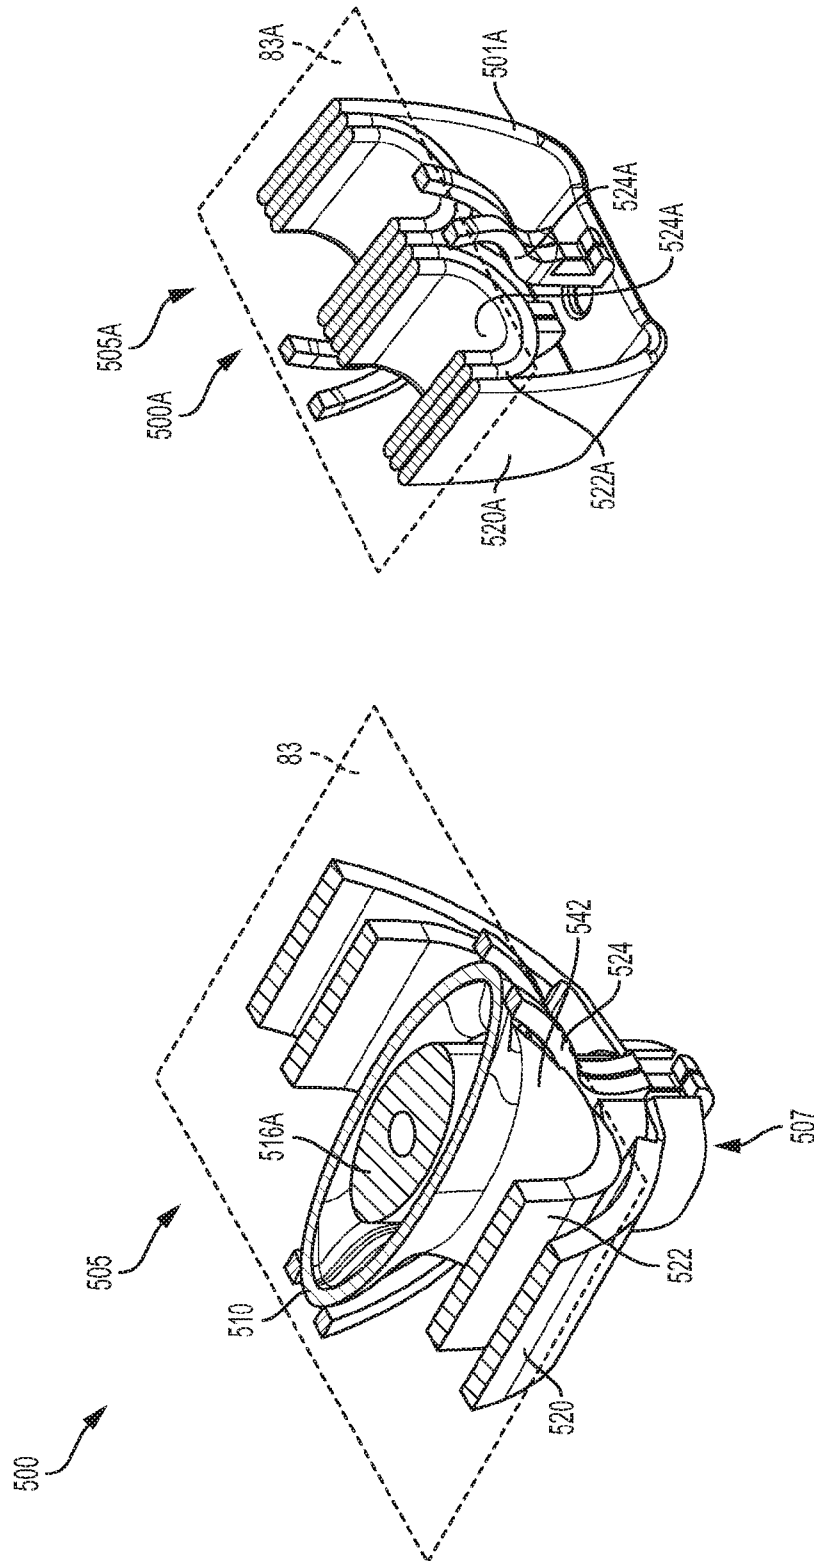


Fig. 82A

Fig. 82

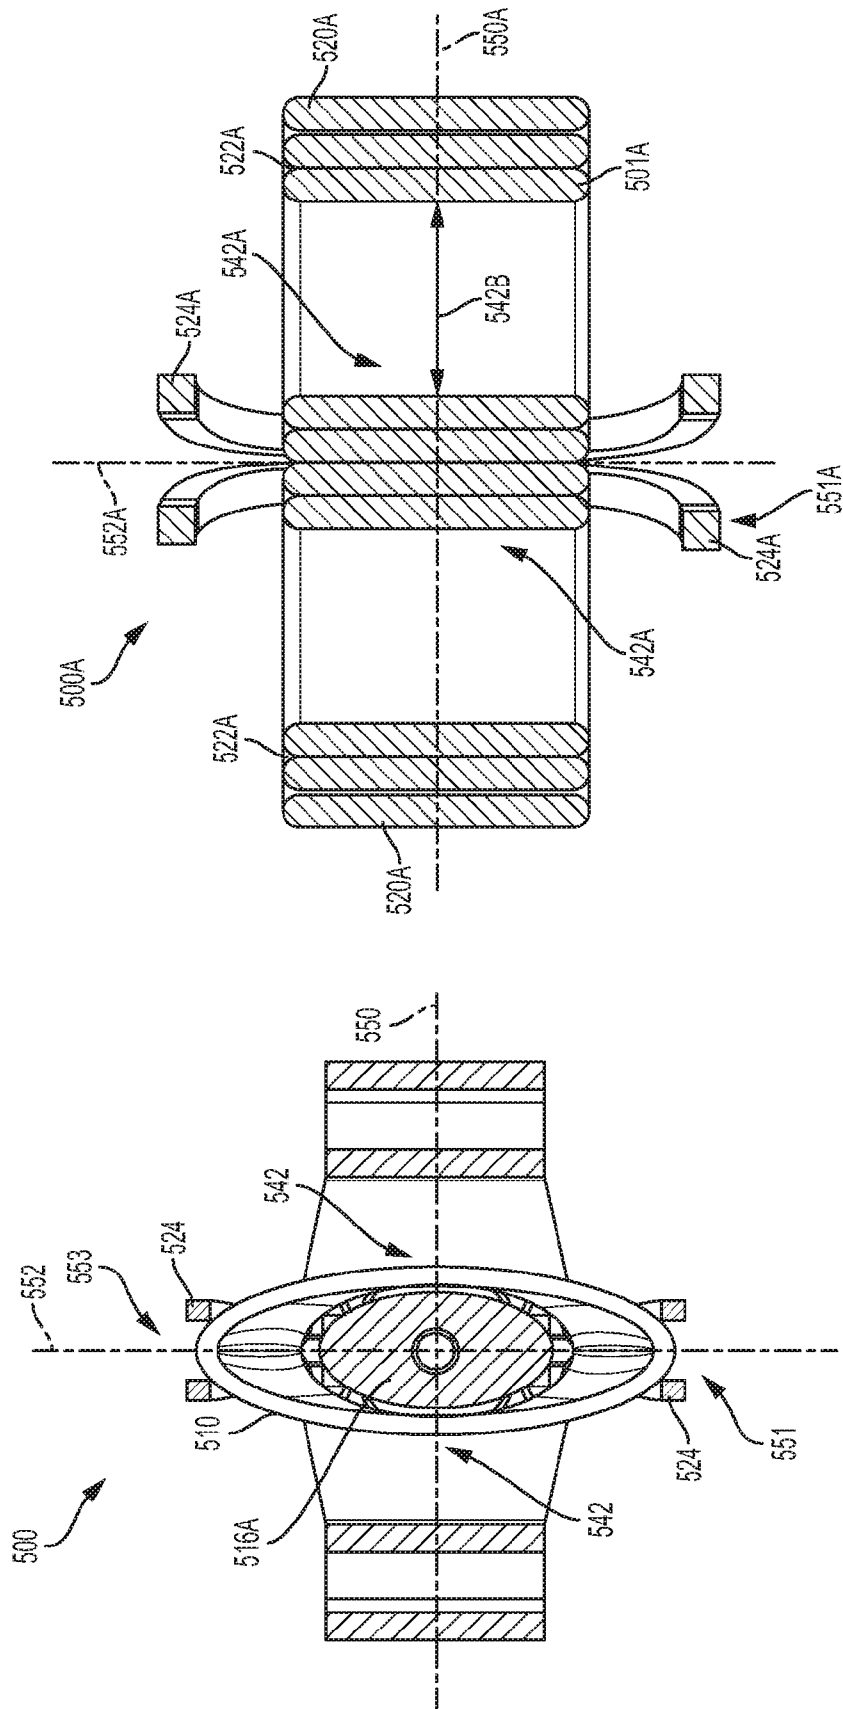


Fig. 83A

Fig. 83

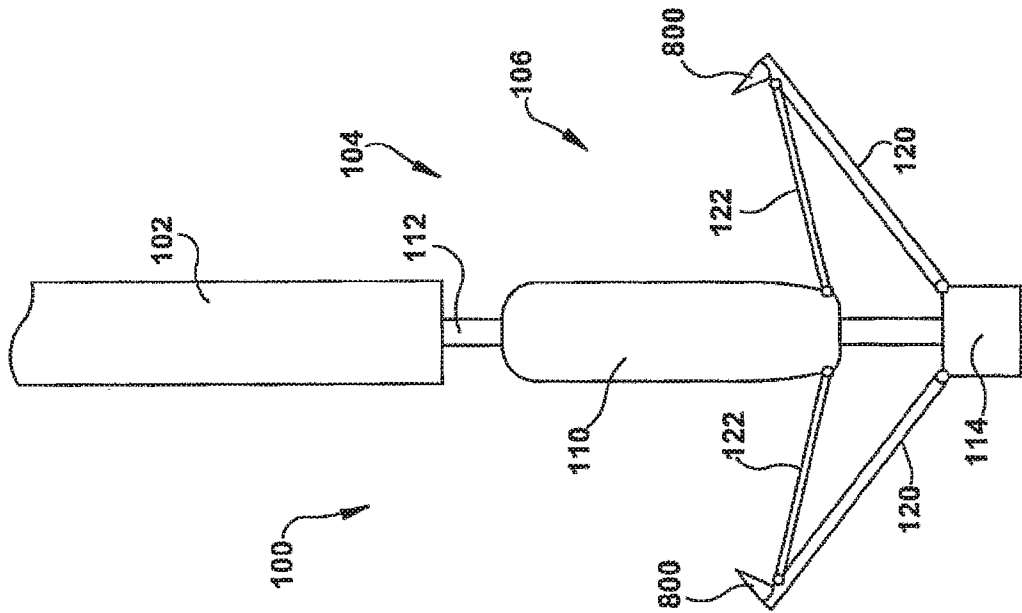


Fig. 85

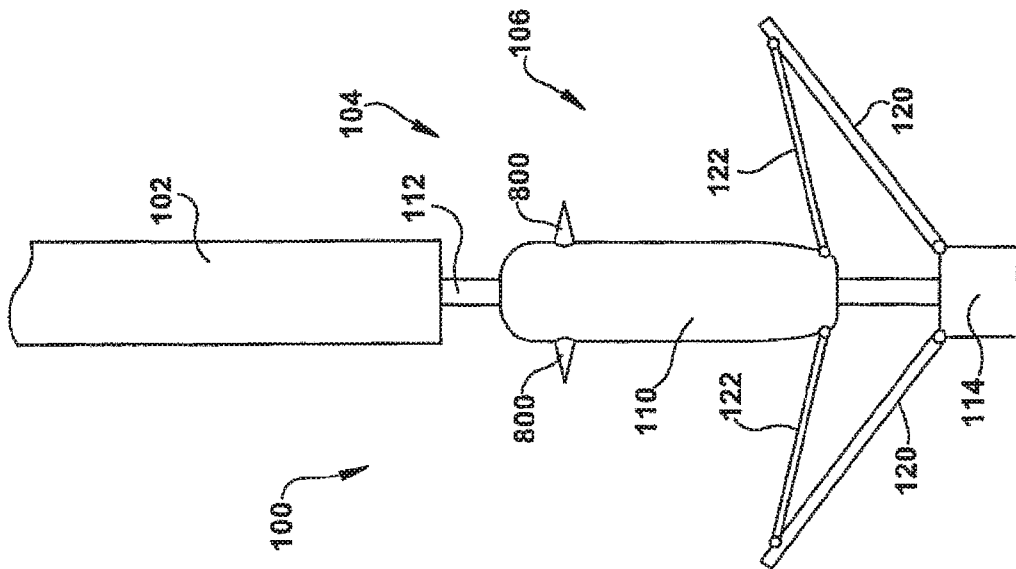


Fig. 84

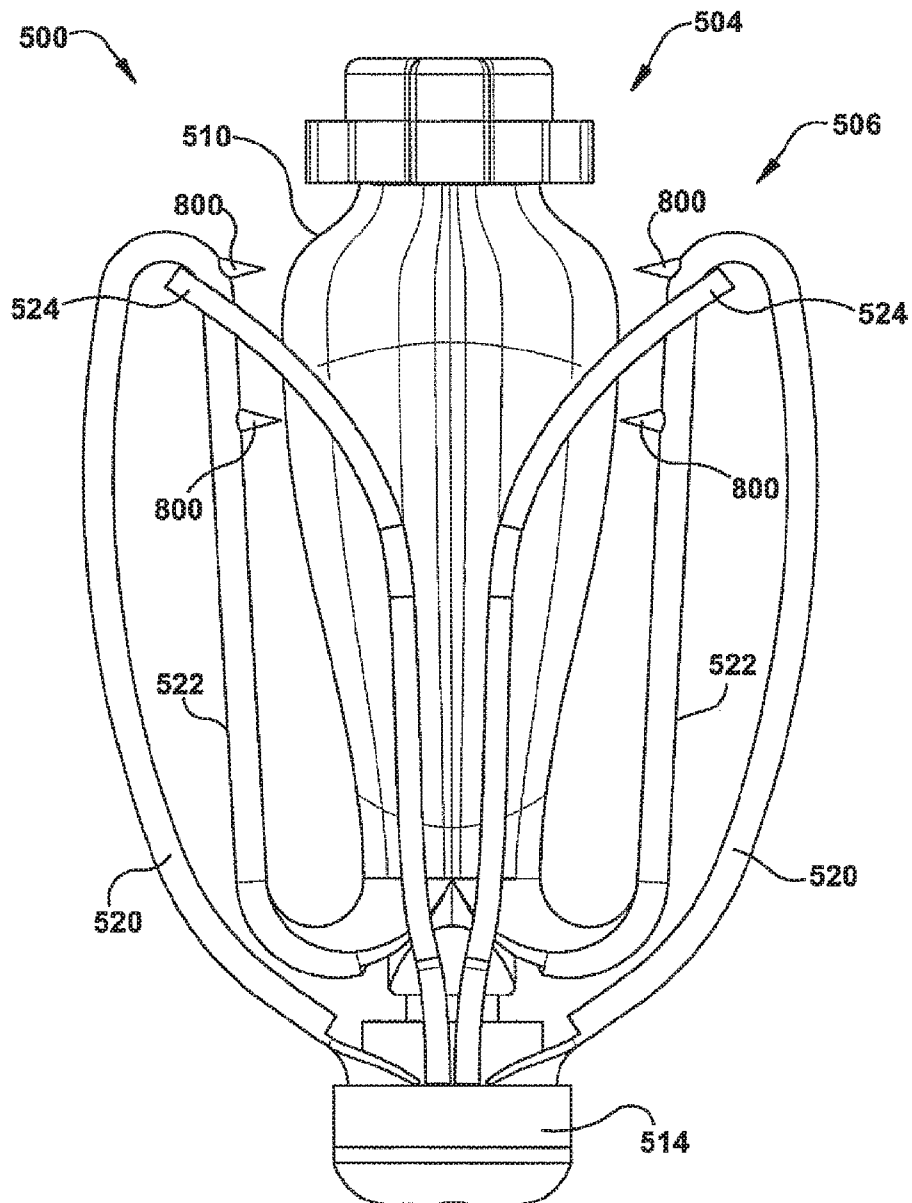
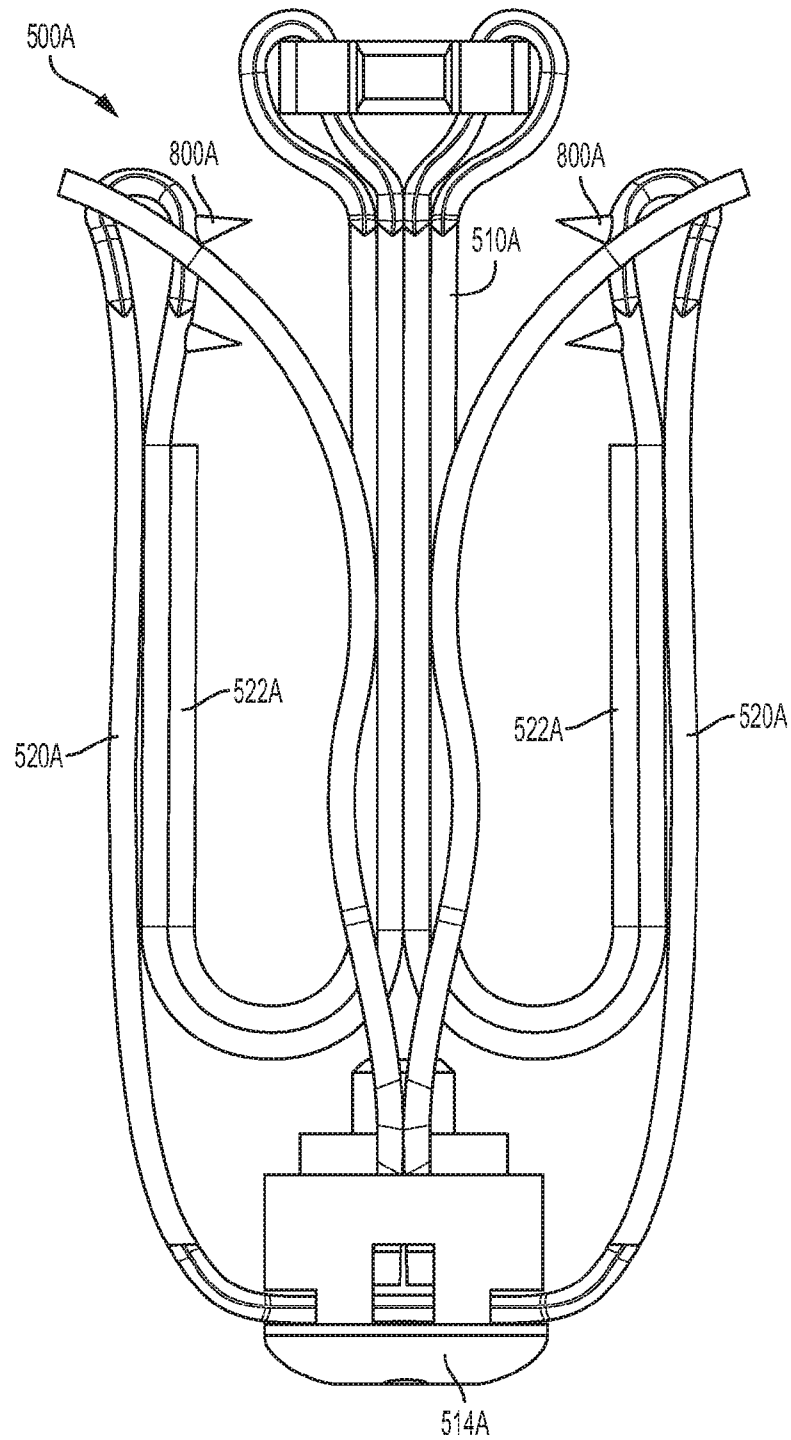
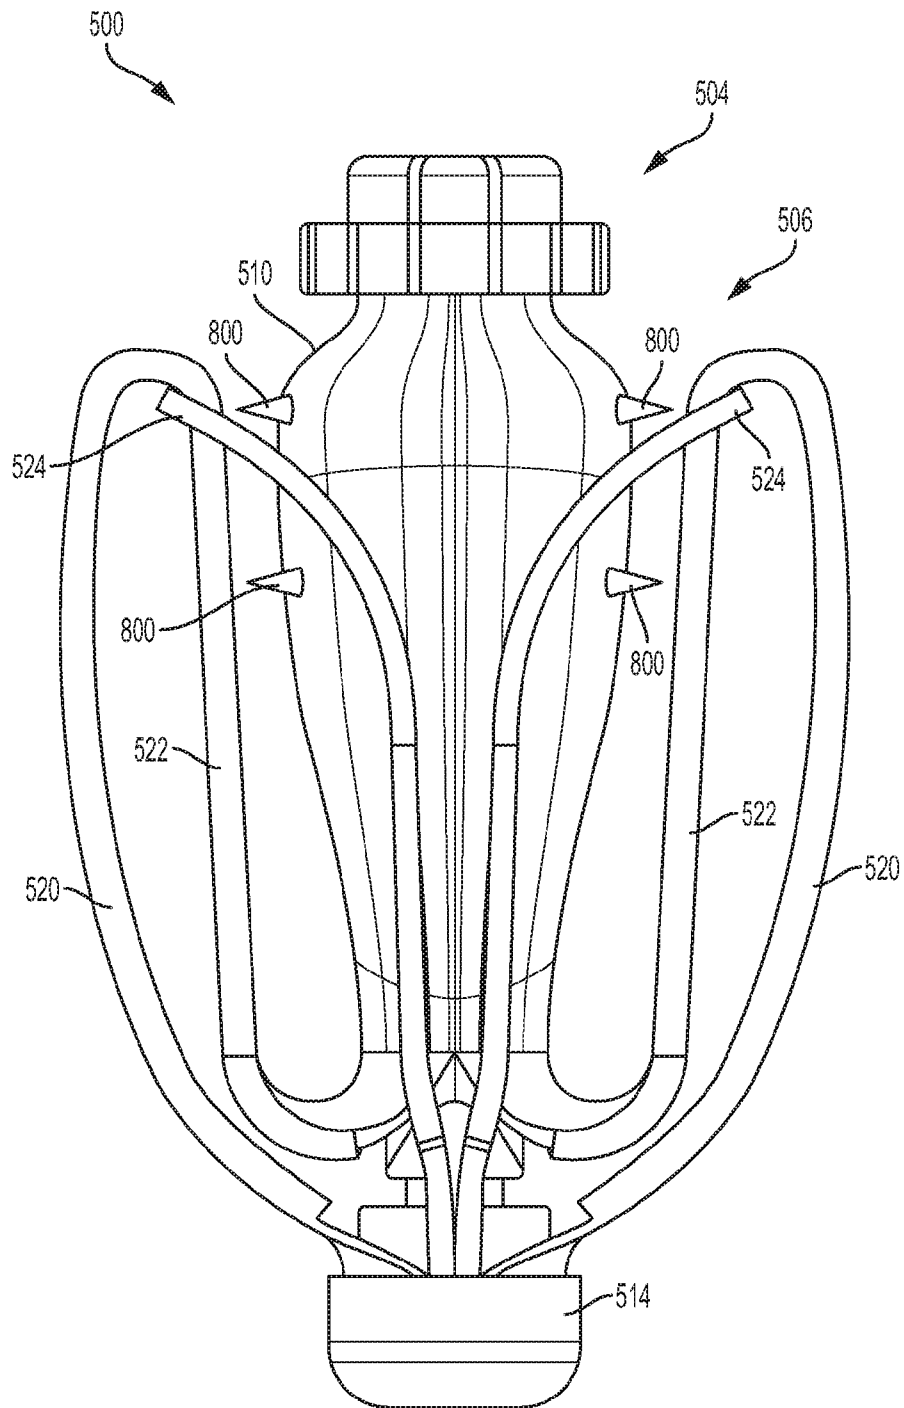
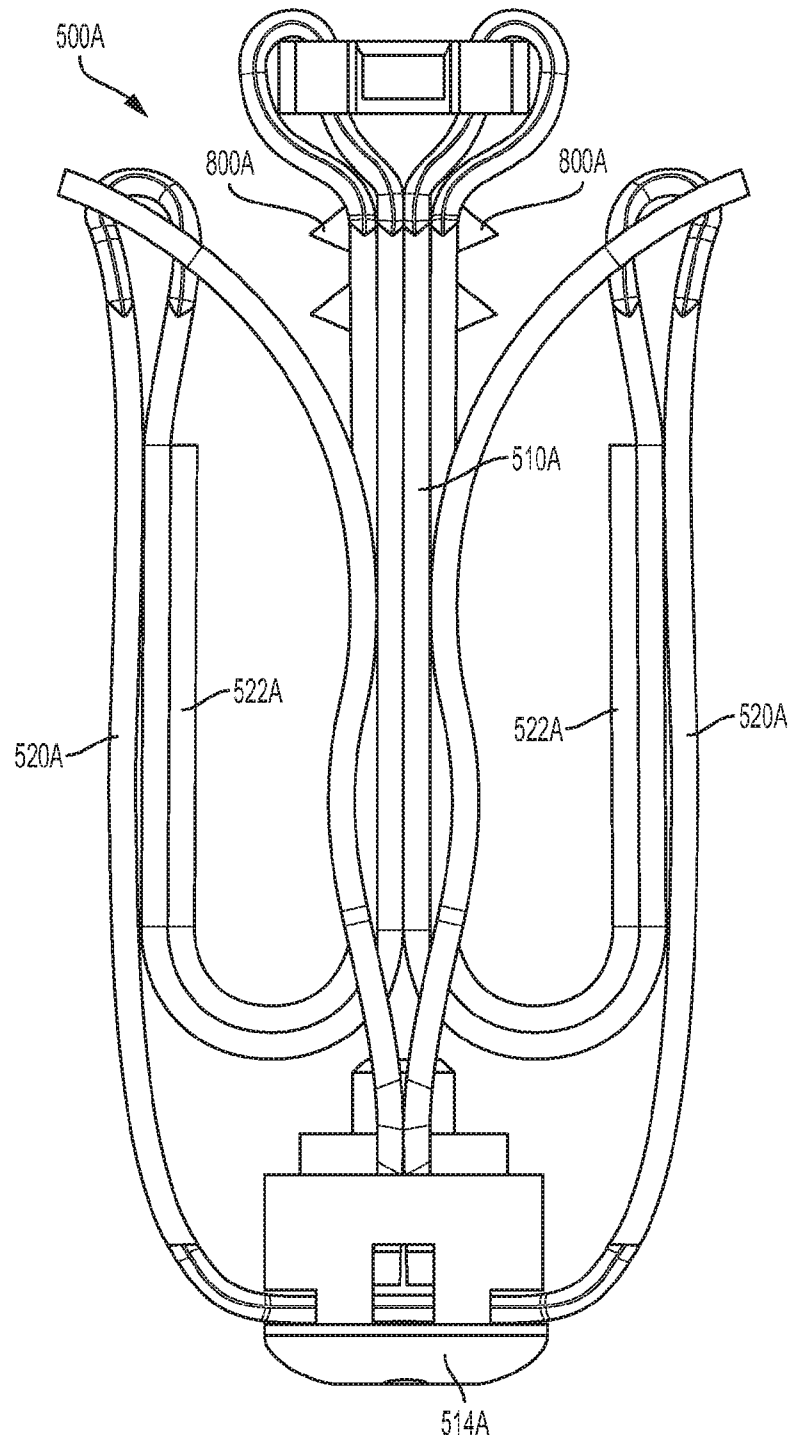
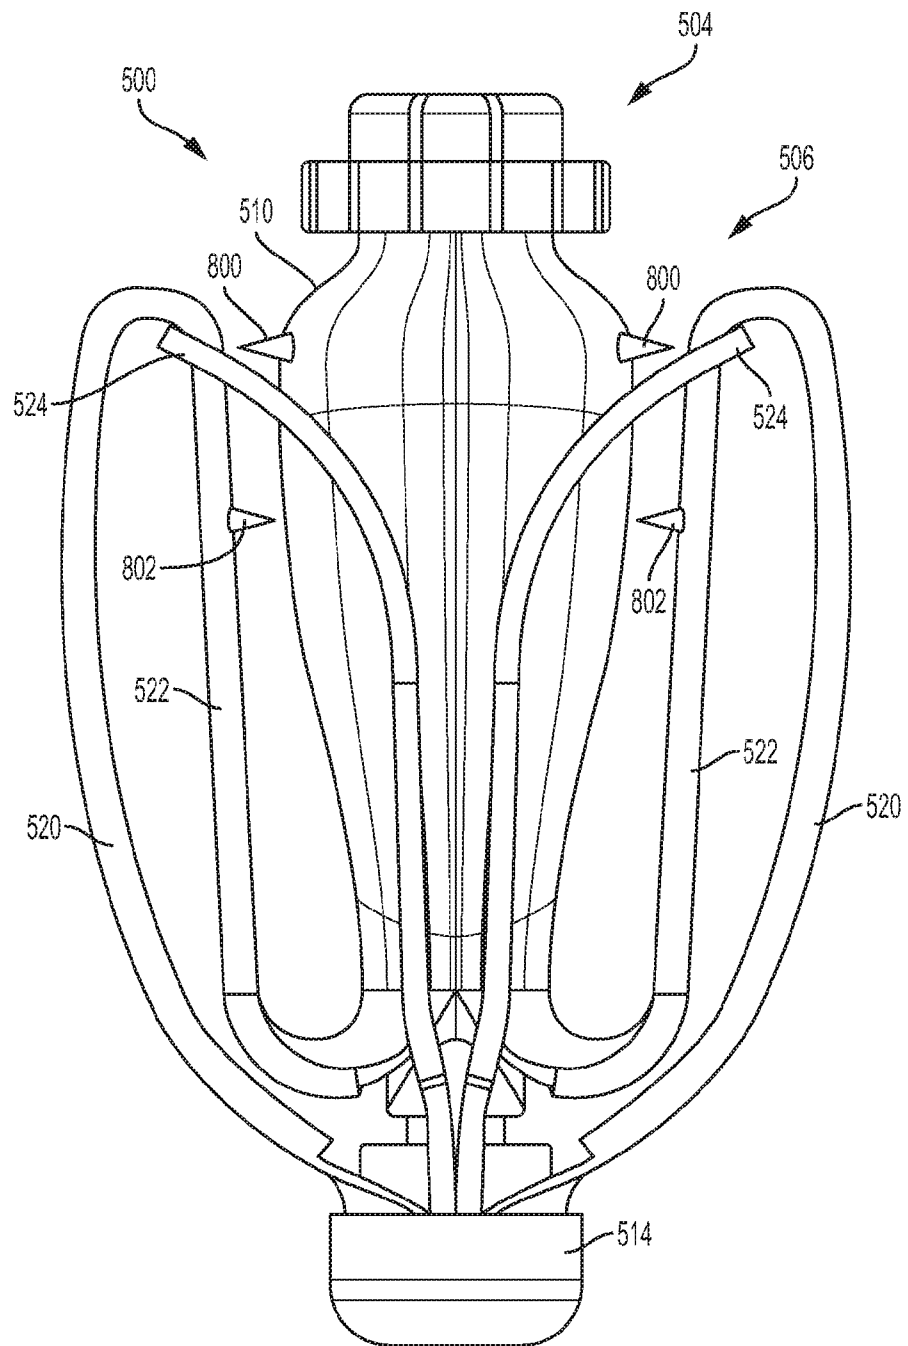



Fig. 86

**Fig. 86A**


**Fig. 87**


**Fig. 87A**

**Fig. 88**

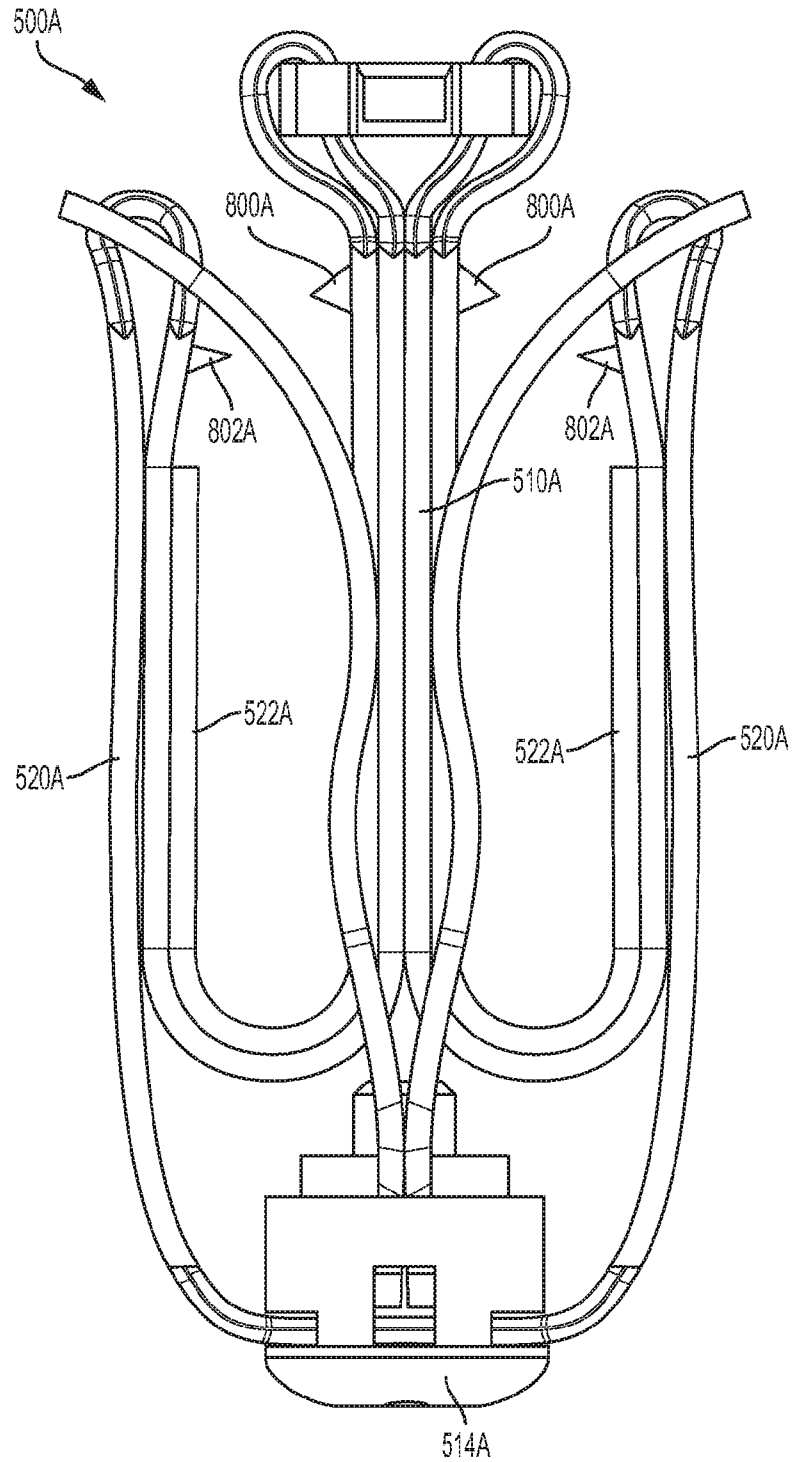**Fig. 88A**

119/262

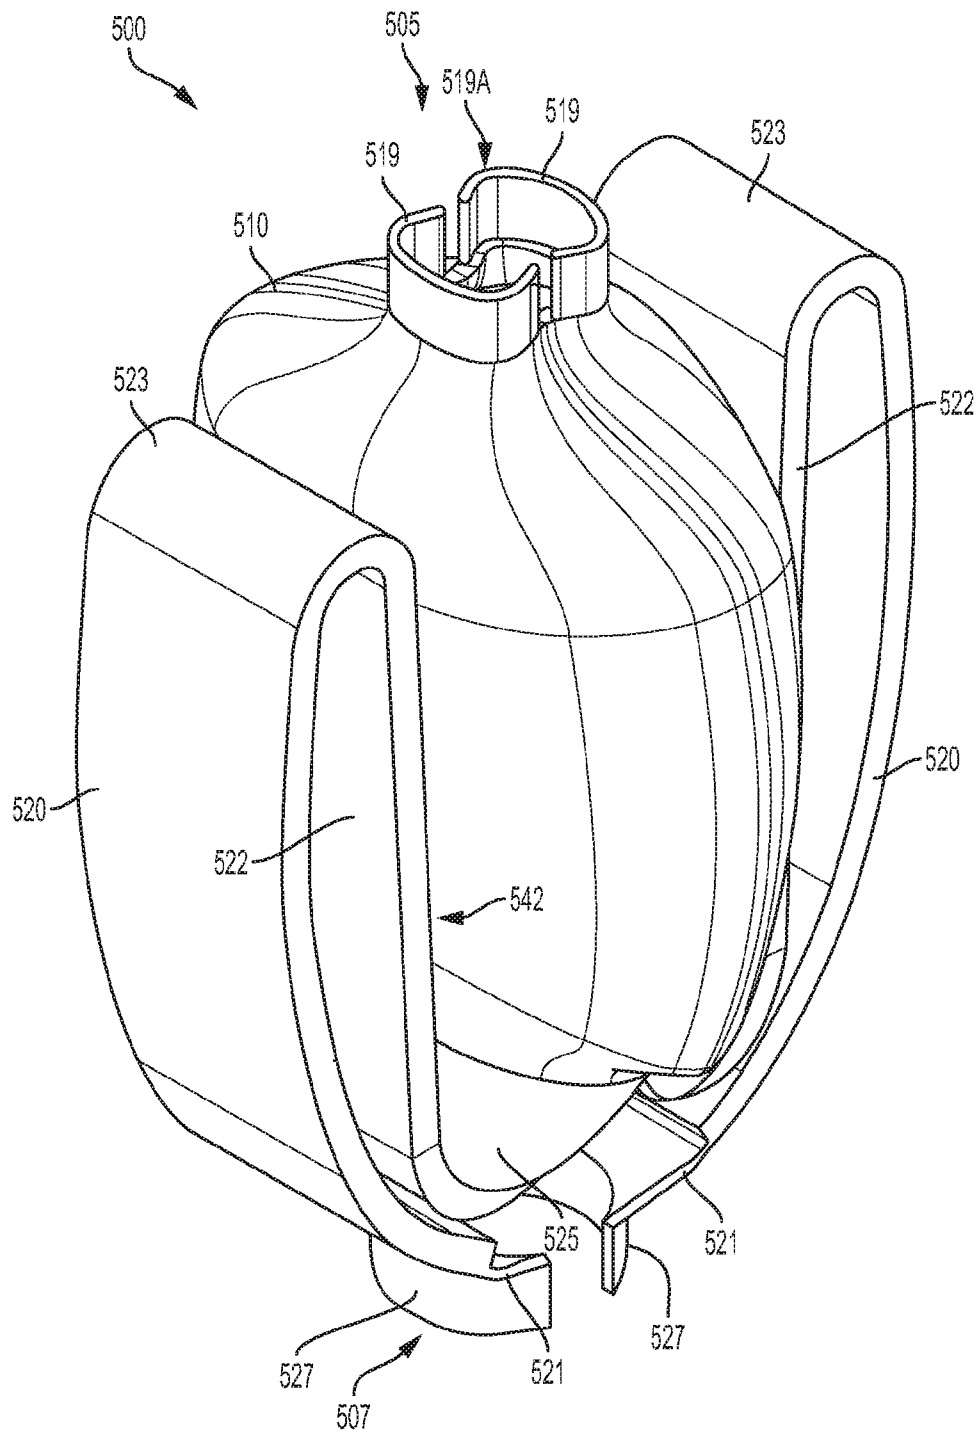**Fig. 89**

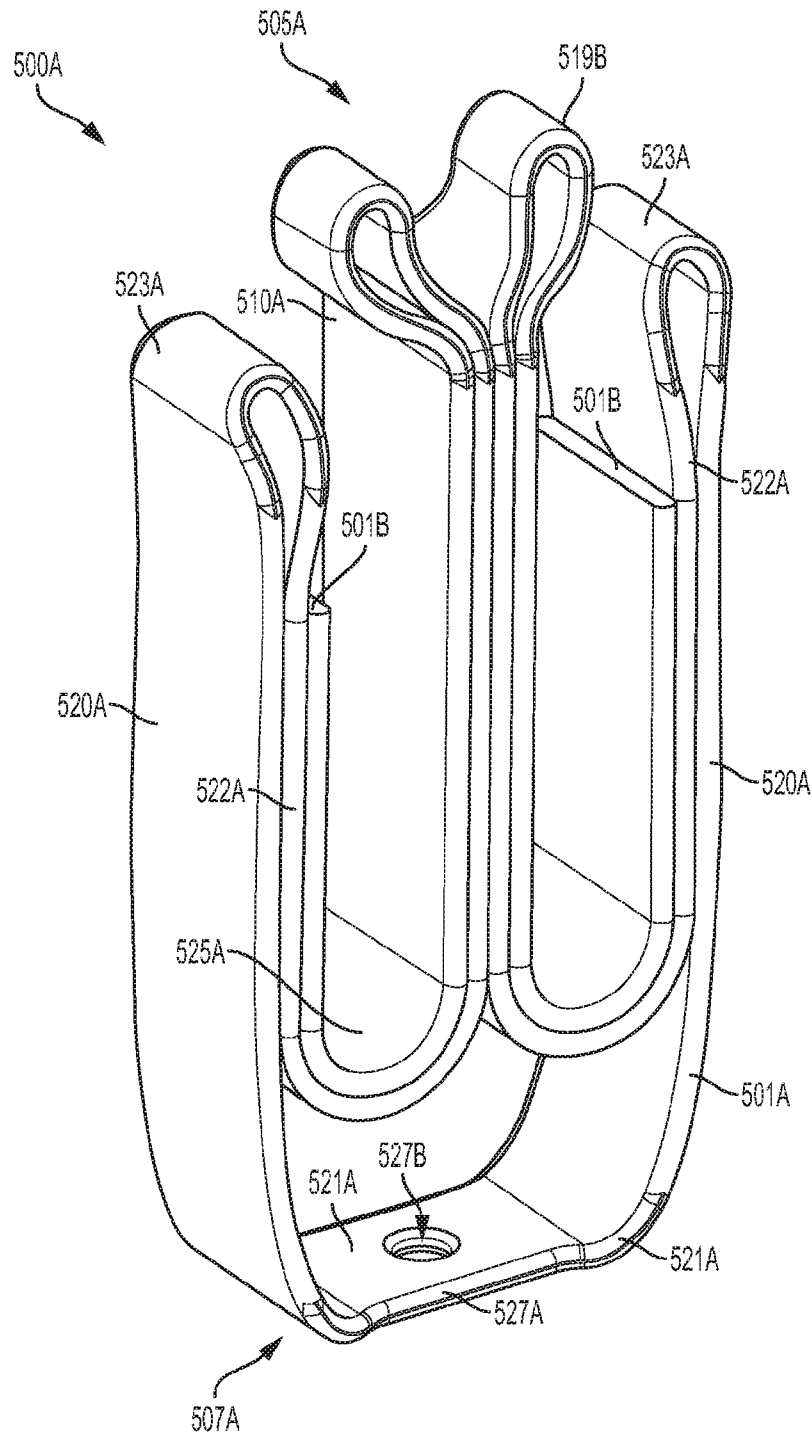**Fig. 89A**

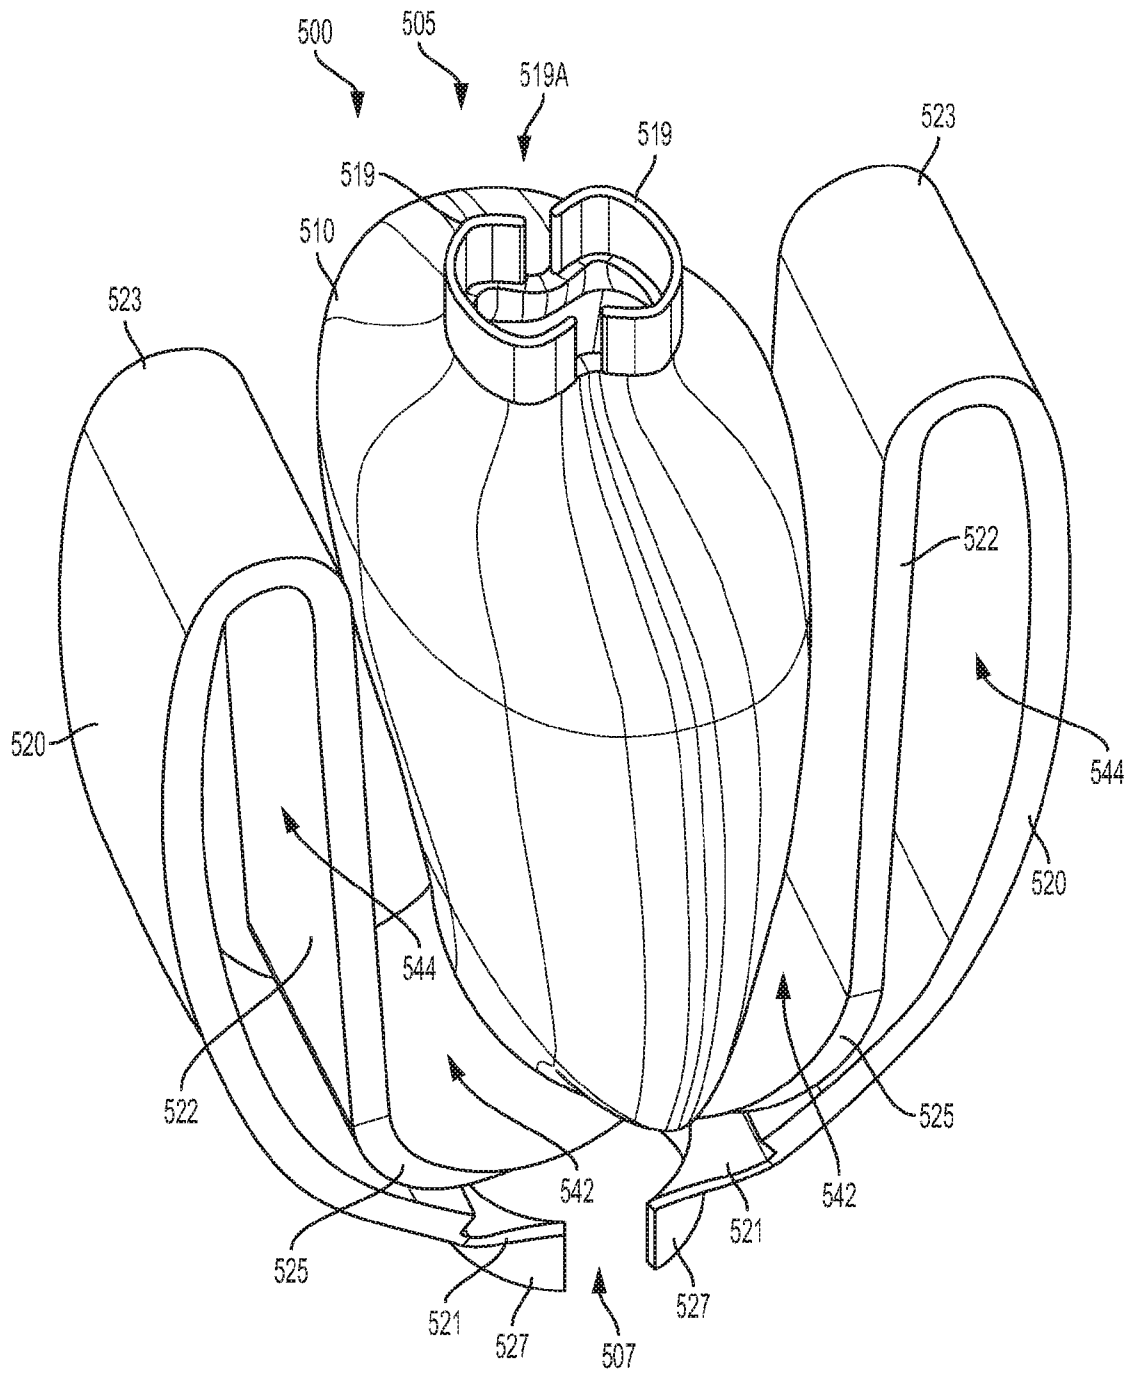
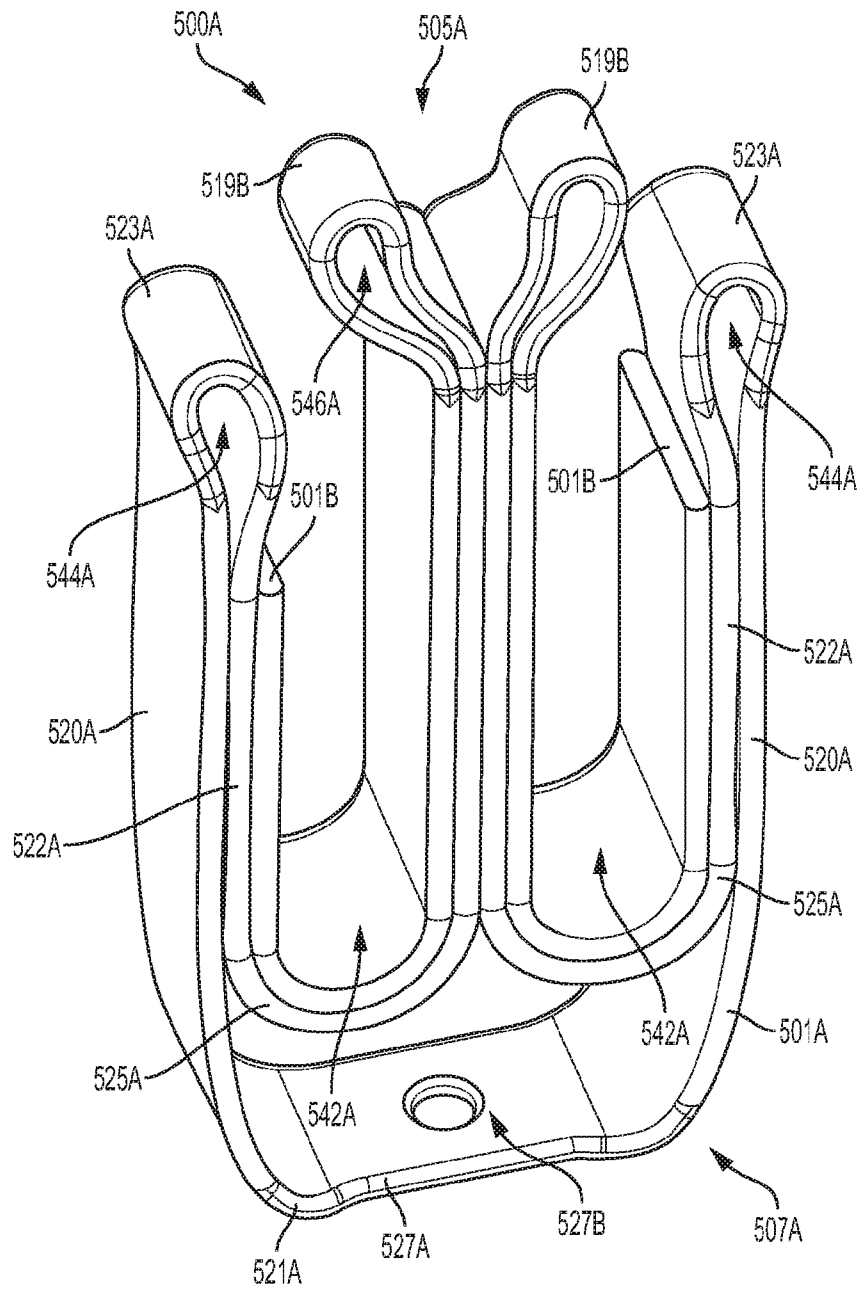


Fig. 90

**Fig. 90A**

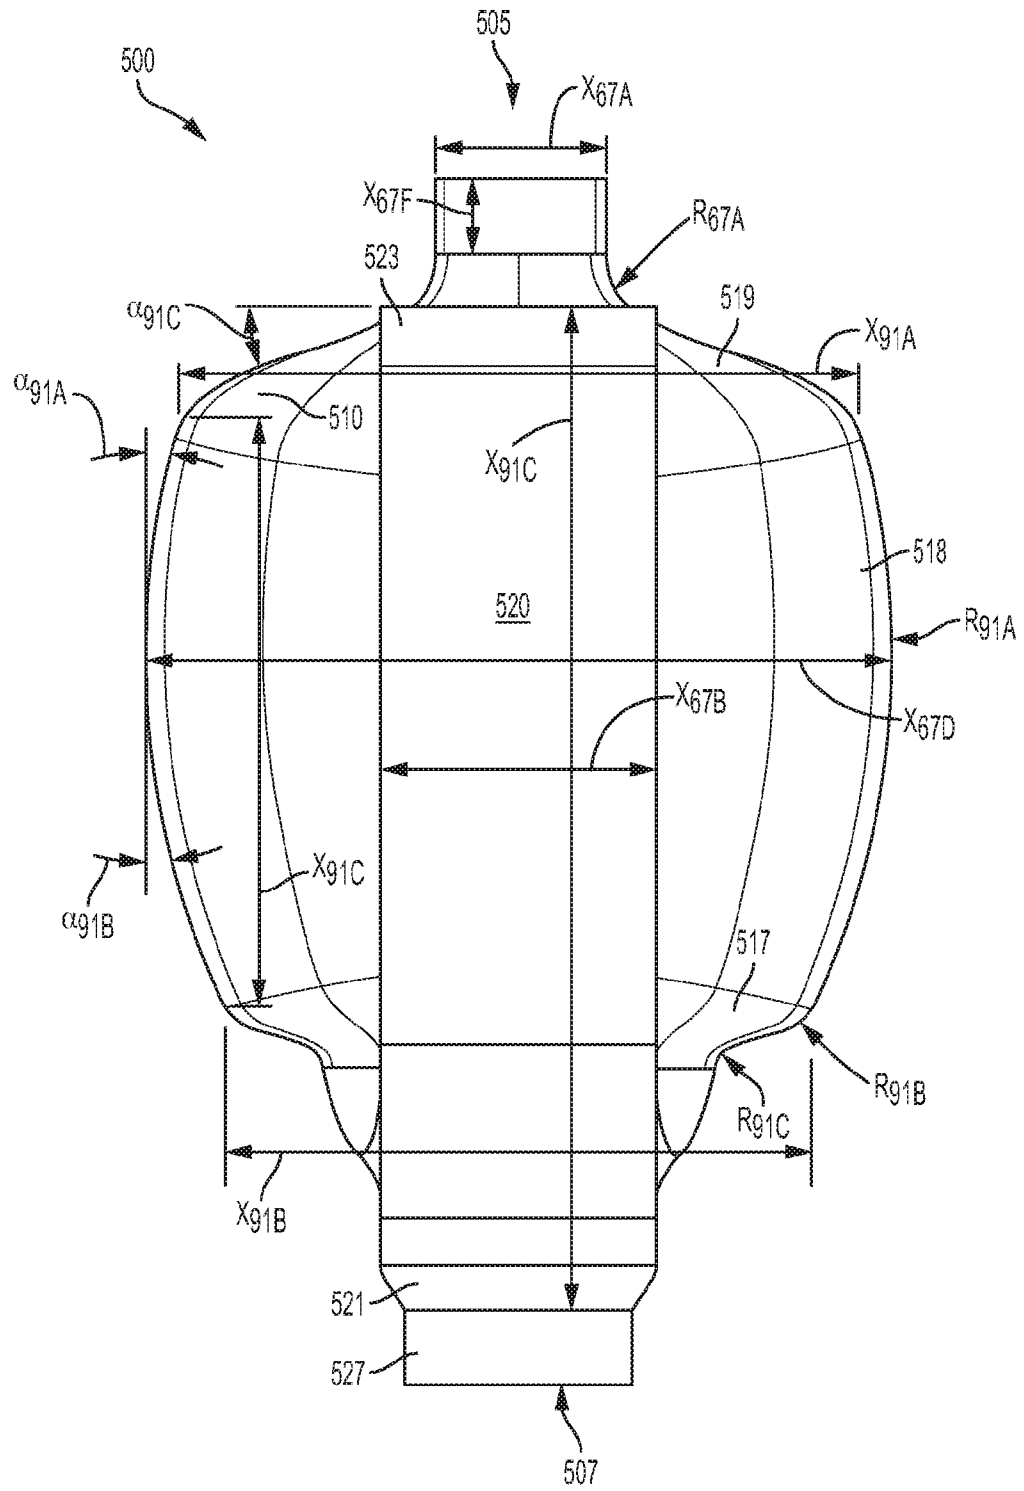
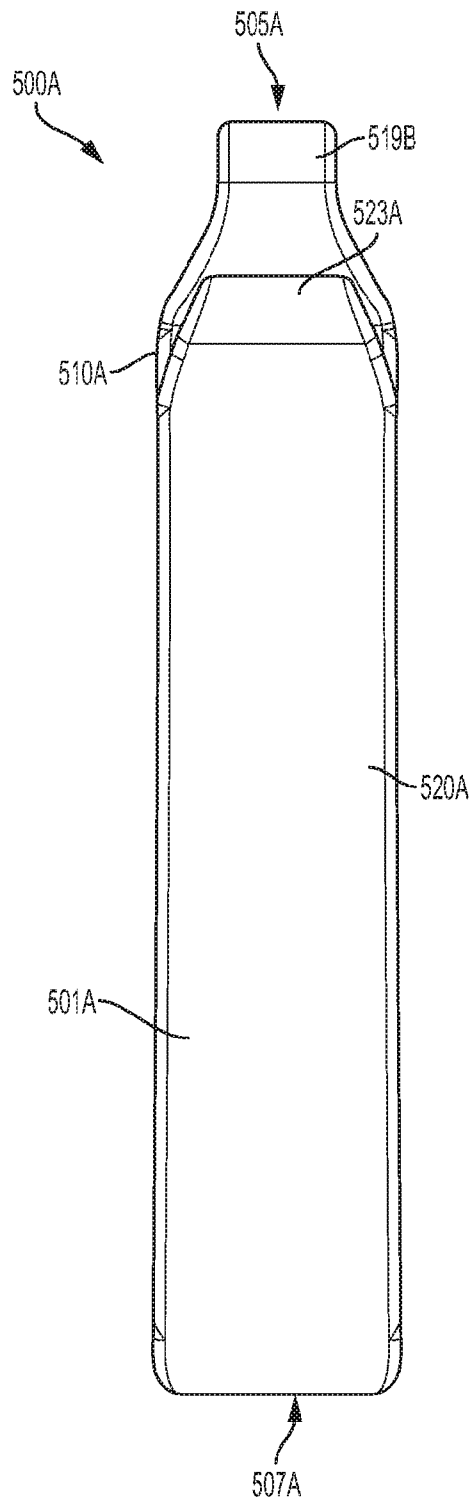


Fig. 91

124/262

**Fig. 91A**

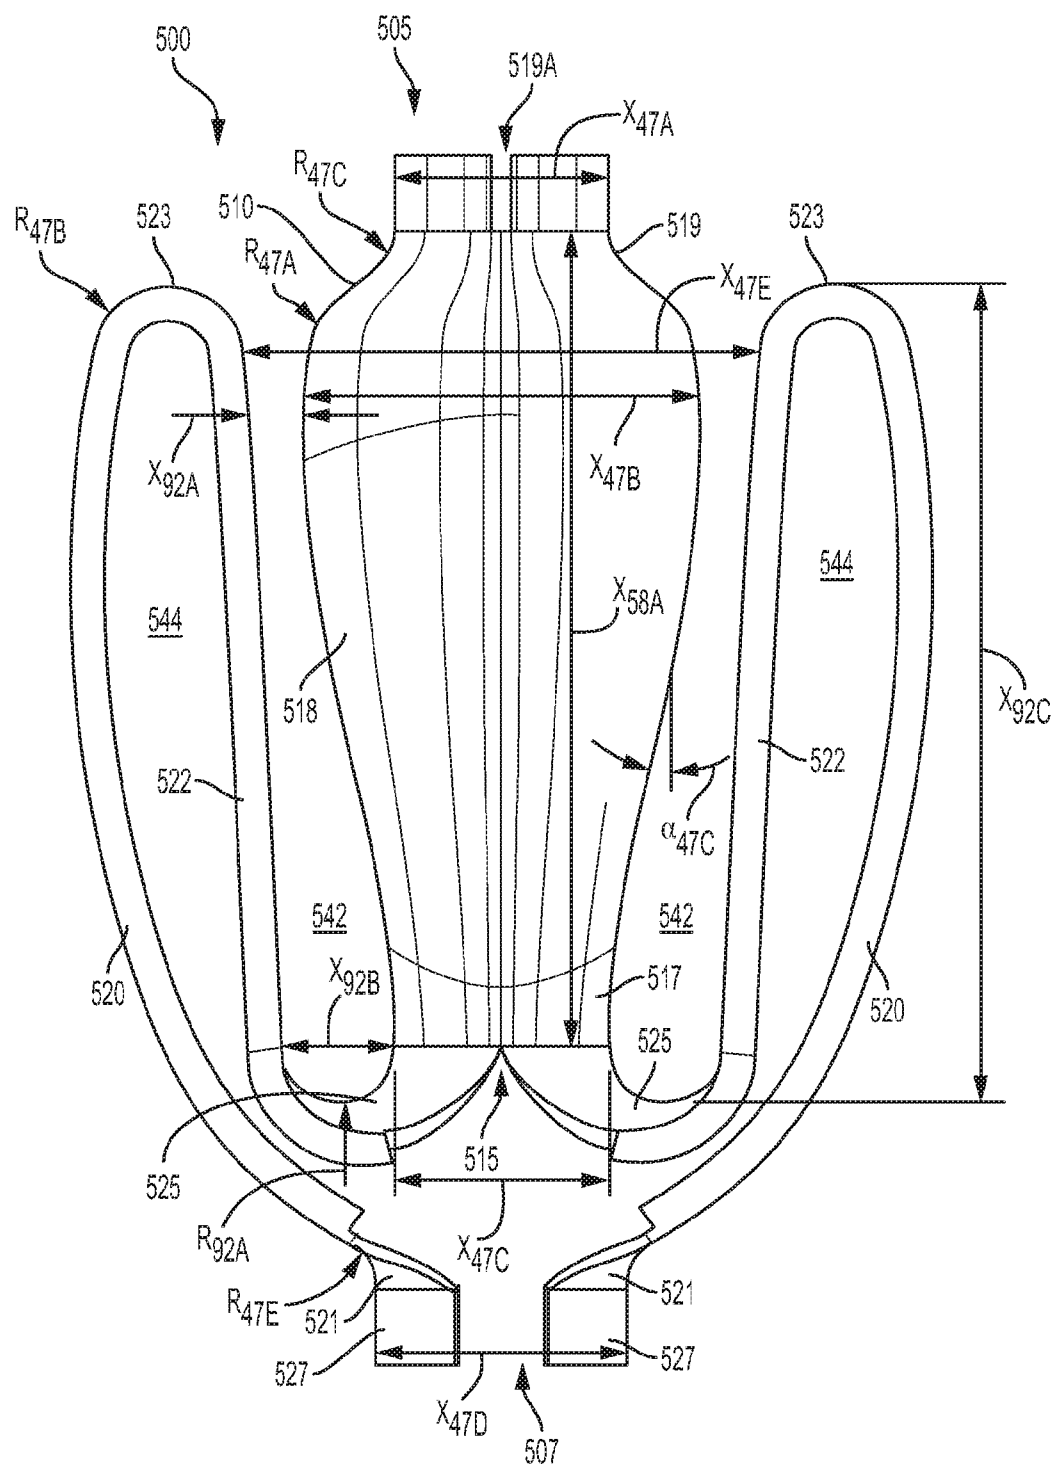


Fig. 92

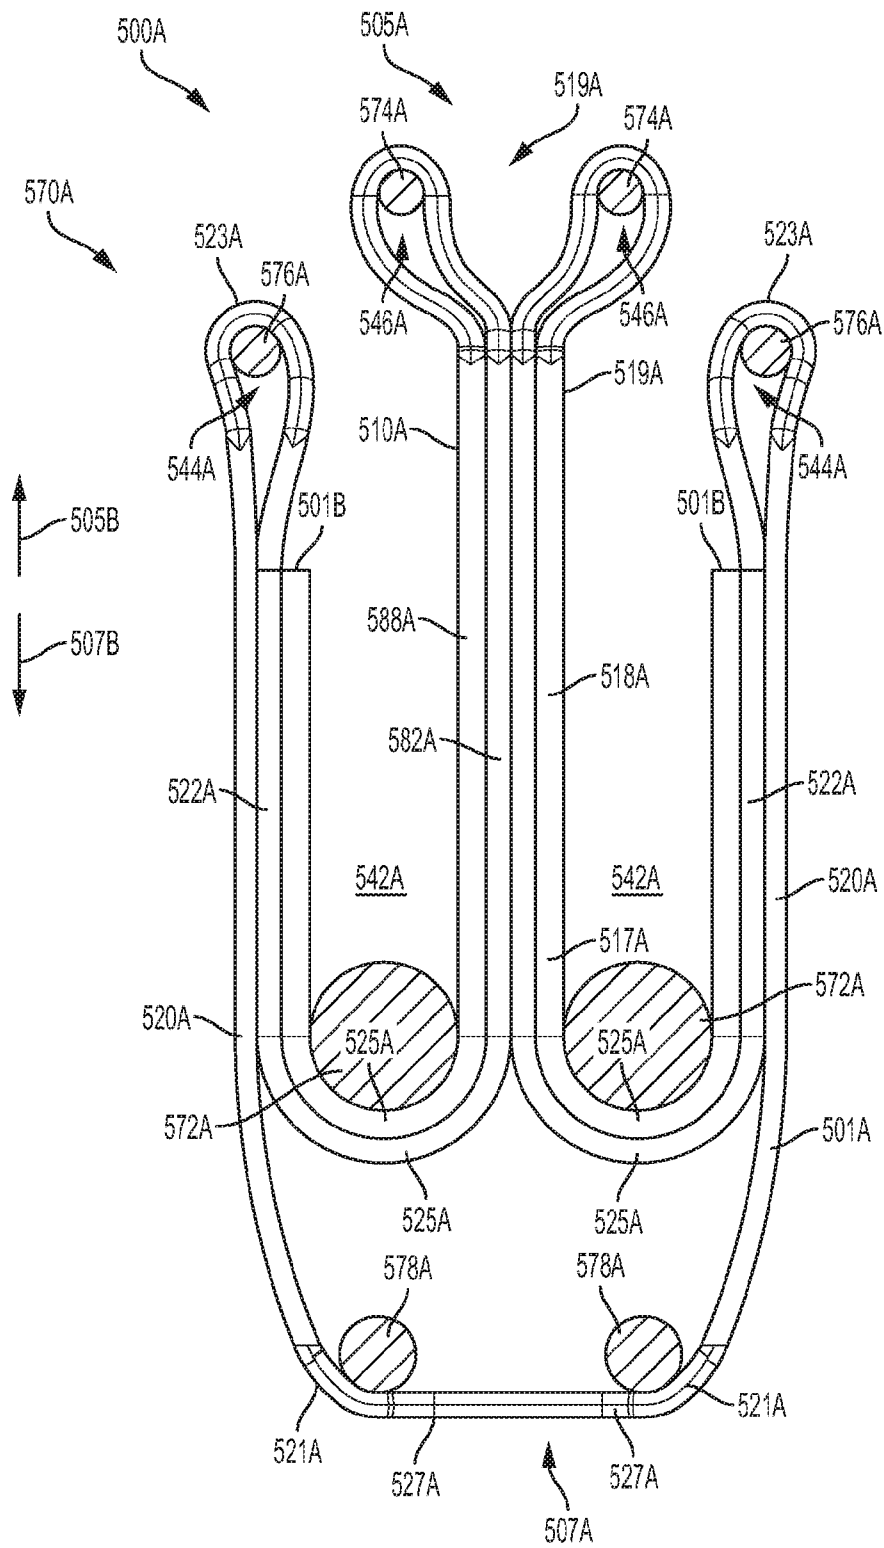
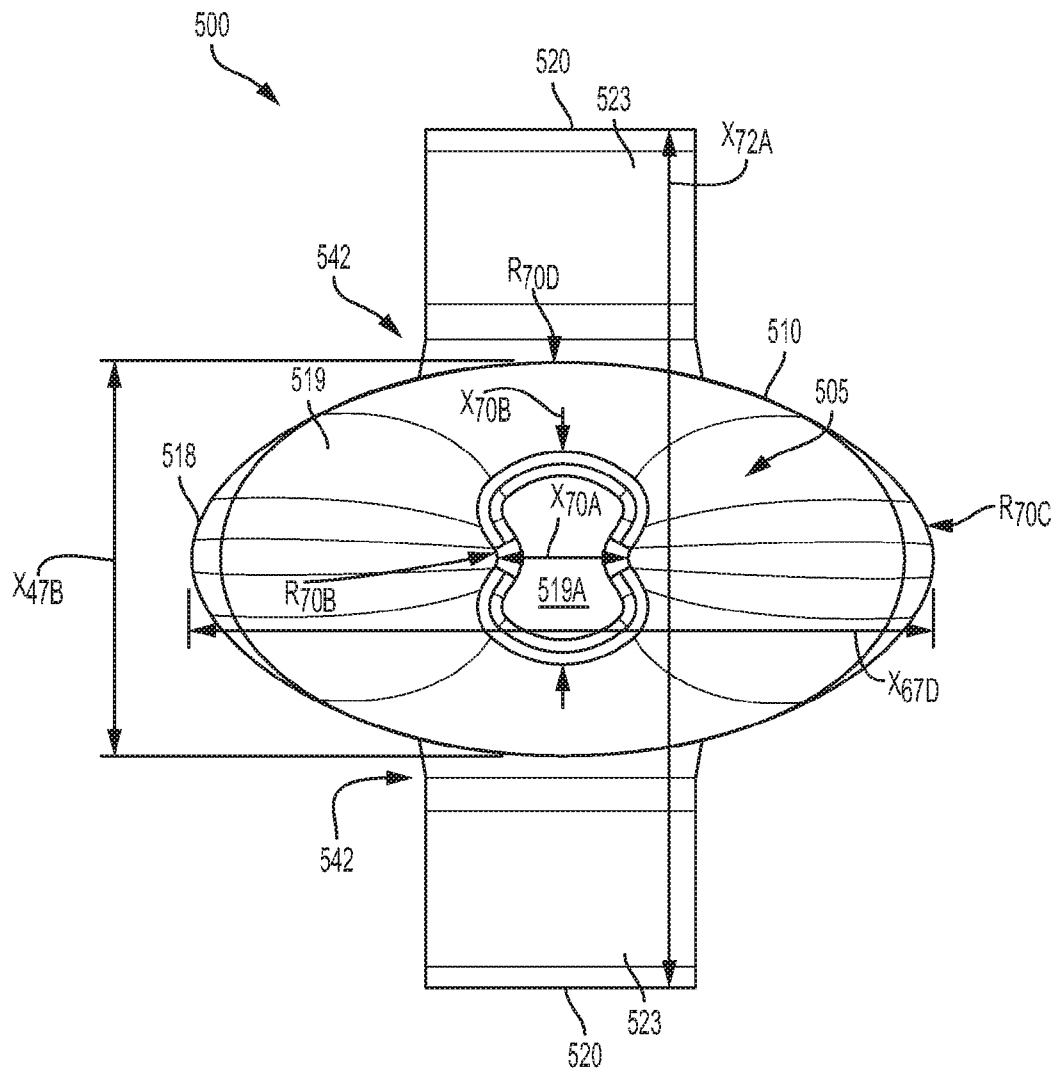
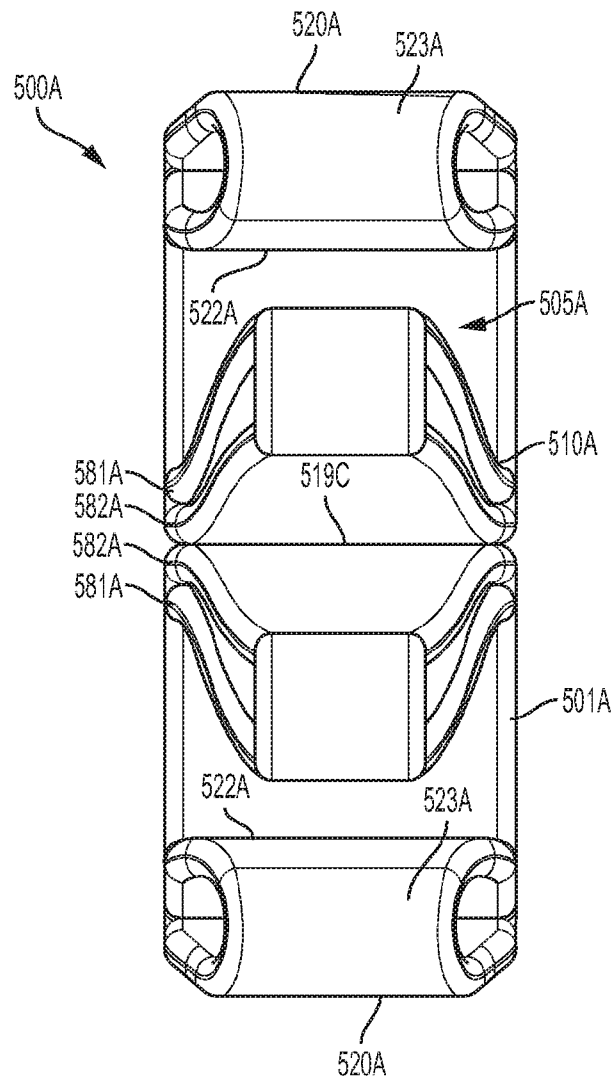


Fig. 92A

**Fig. 93**

**Fig. 93A**

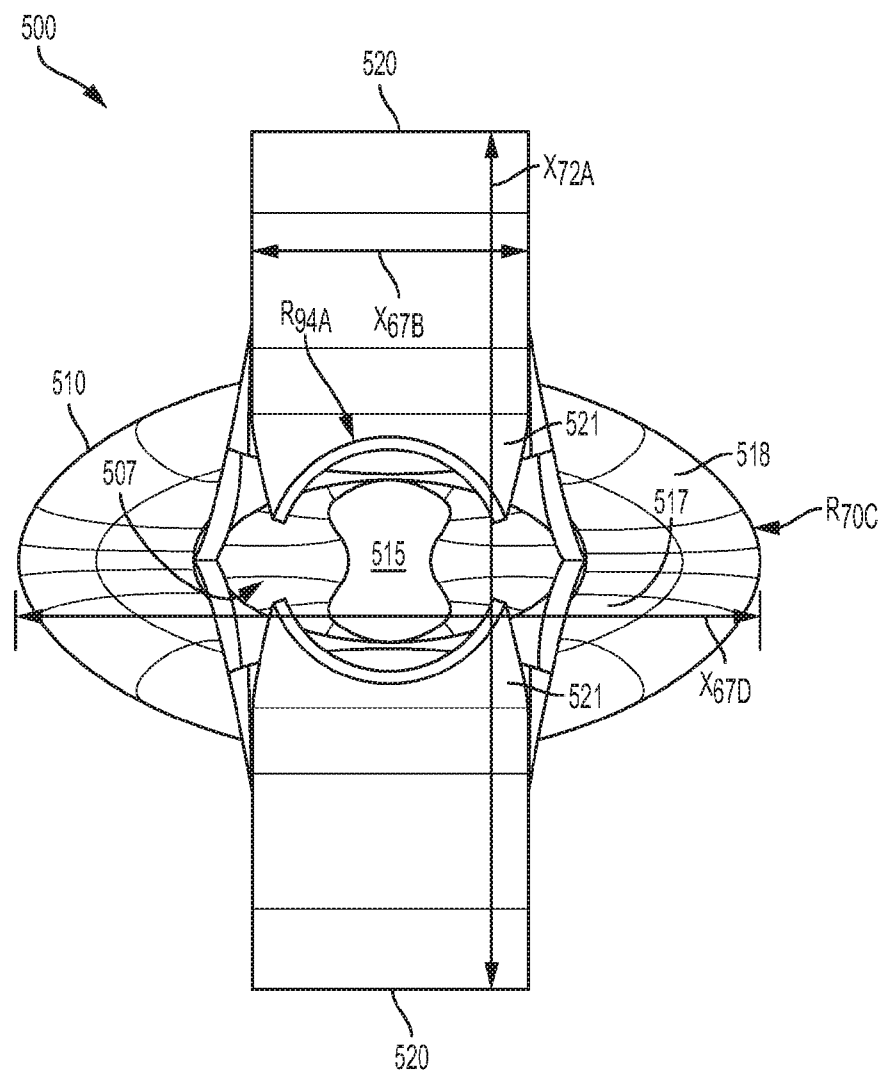
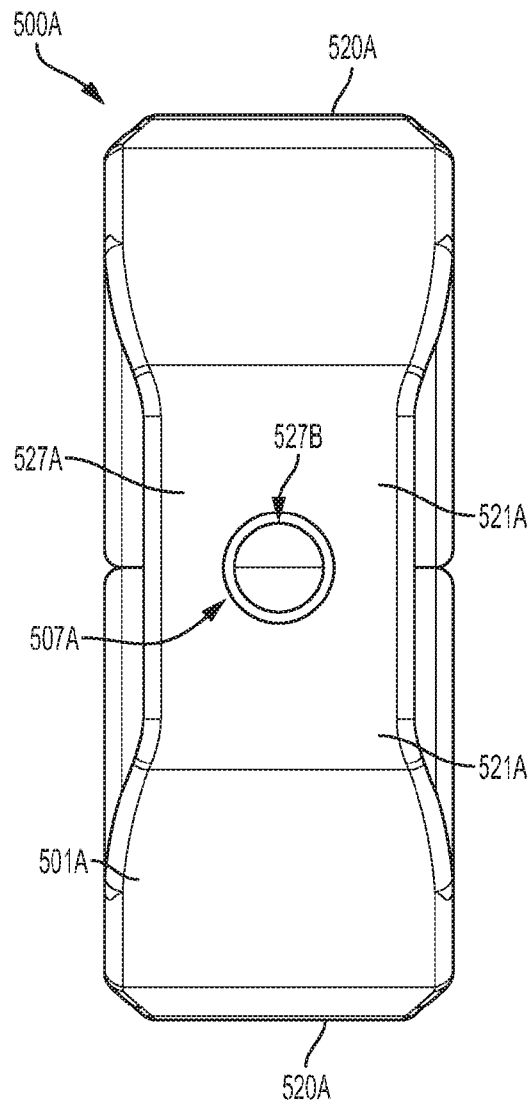


Fig. 94

130/262

**Fig. 94A**

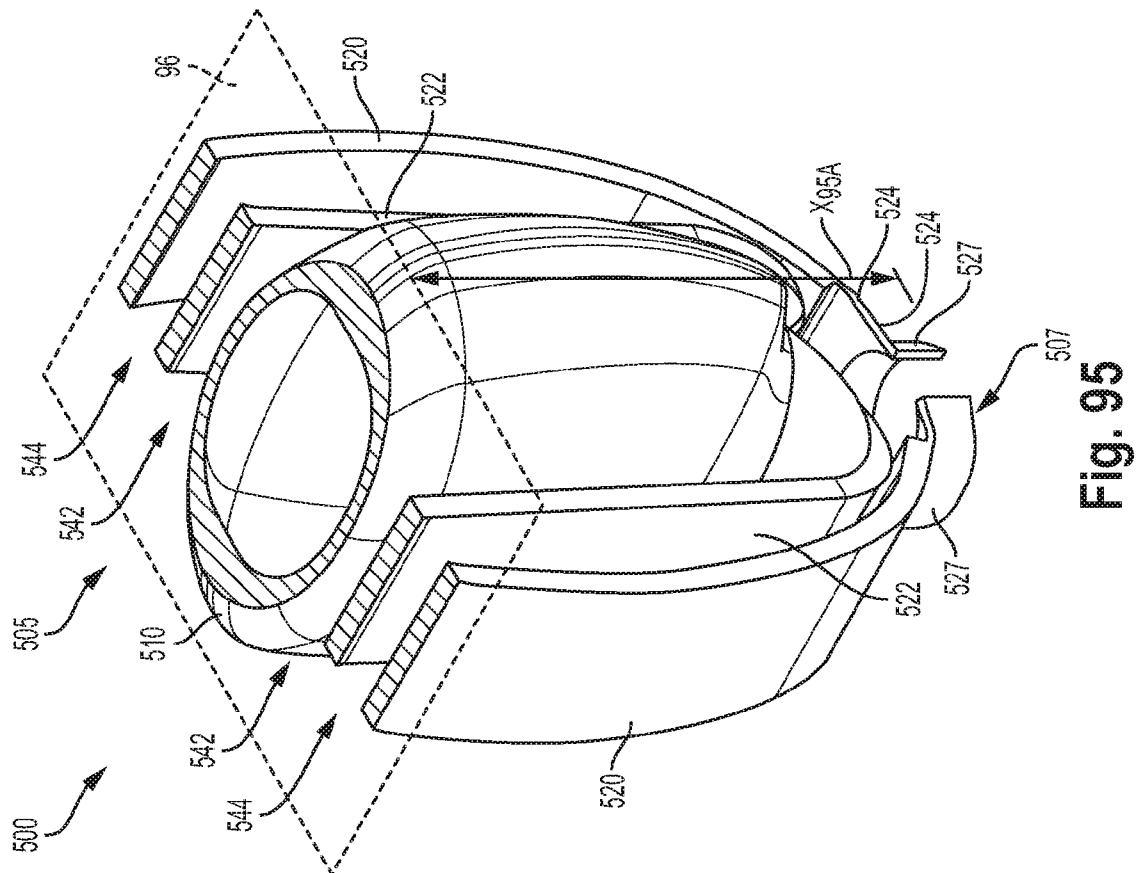


Fig. 95

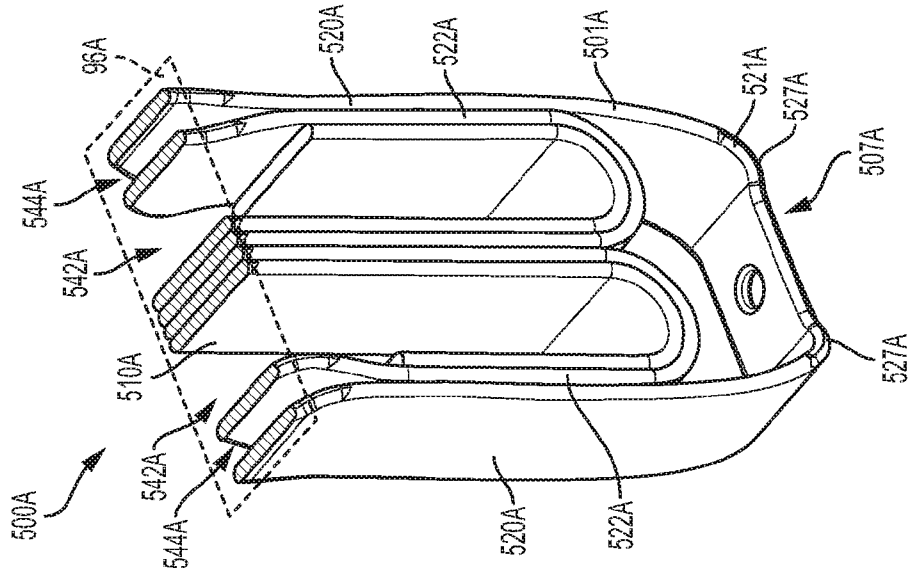


Fig. 95A

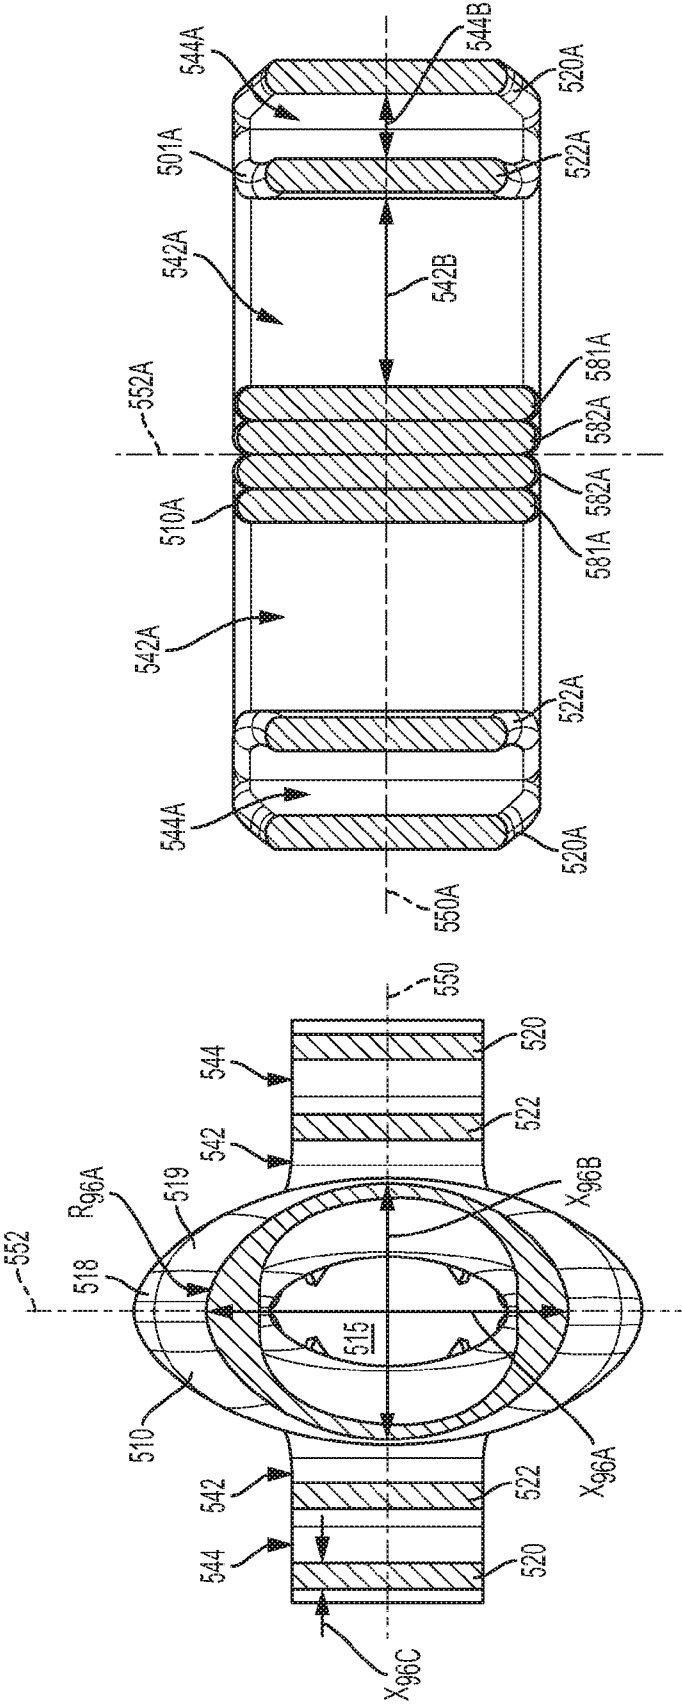


Fig. 96A

Fig. 96

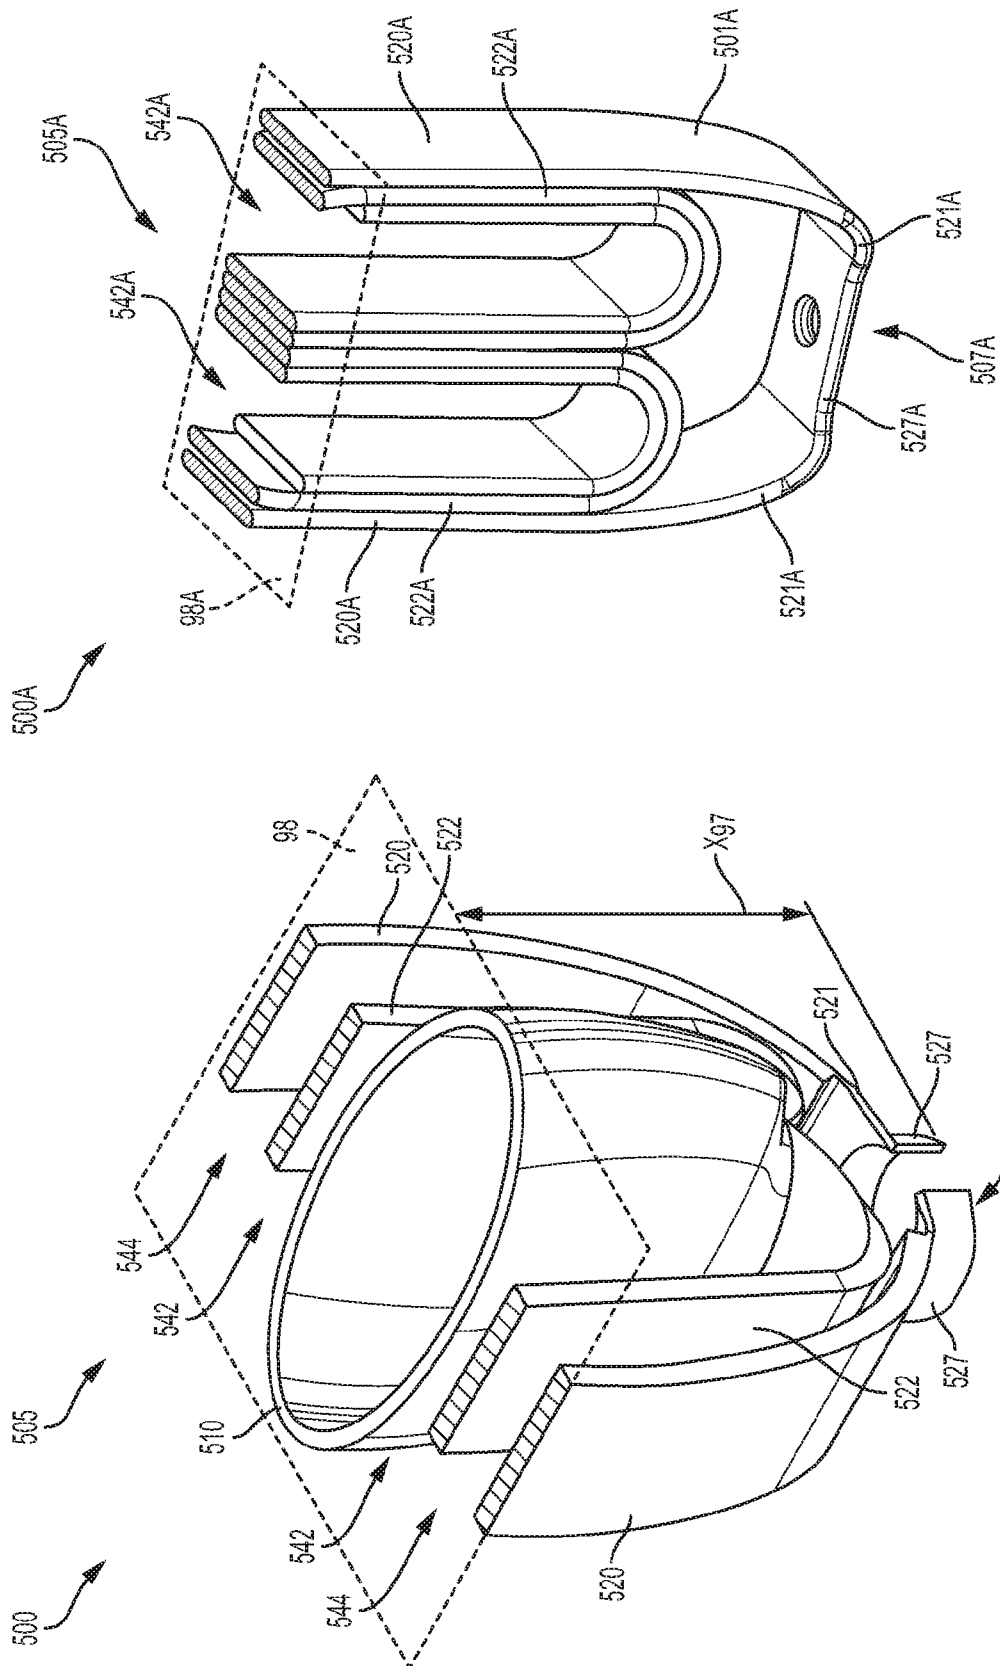


Fig. 97A

Fig. 97

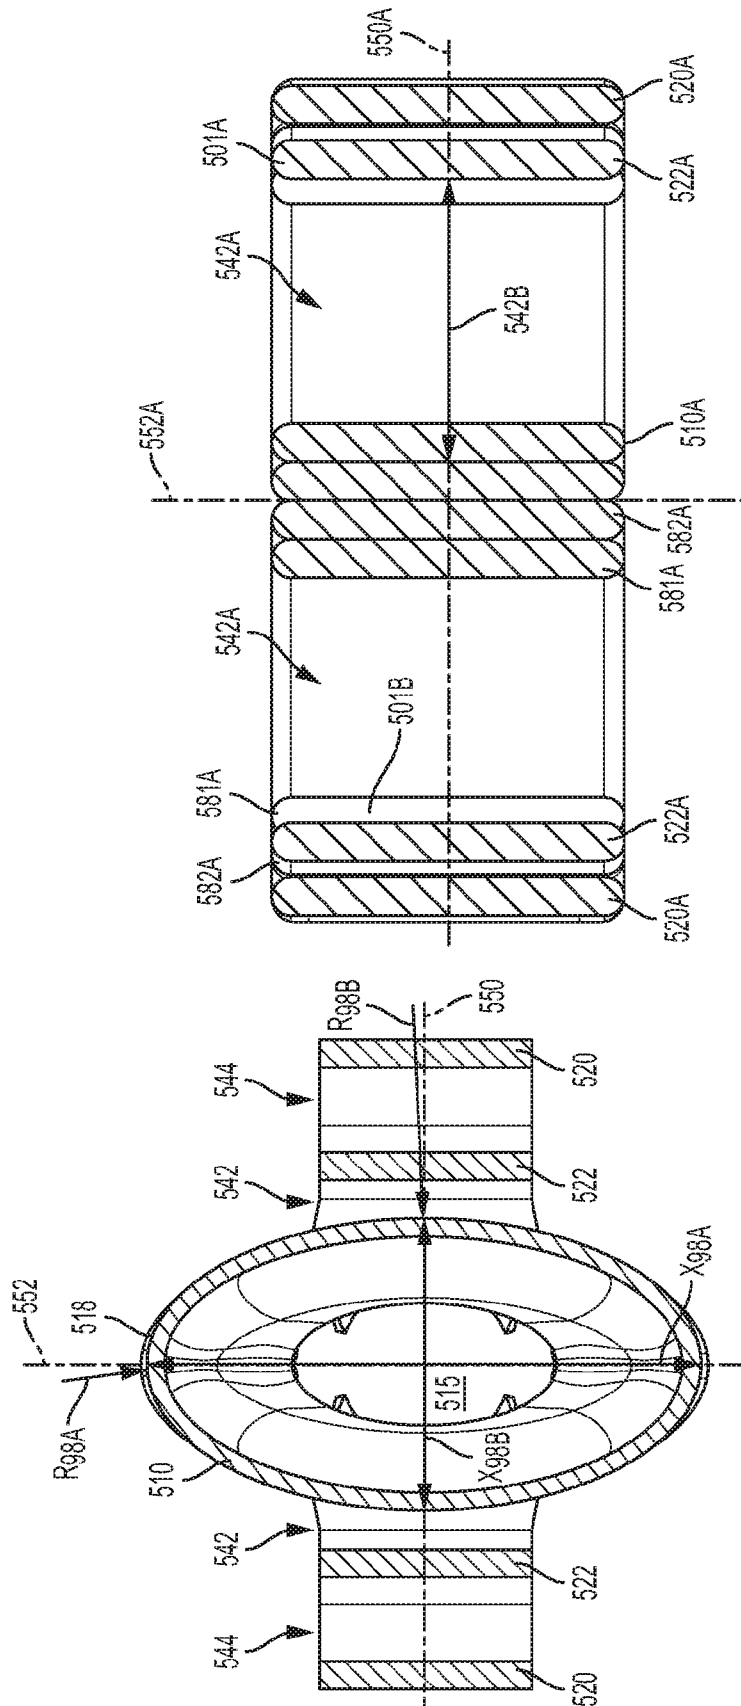


Fig. 98A

Fig. 98

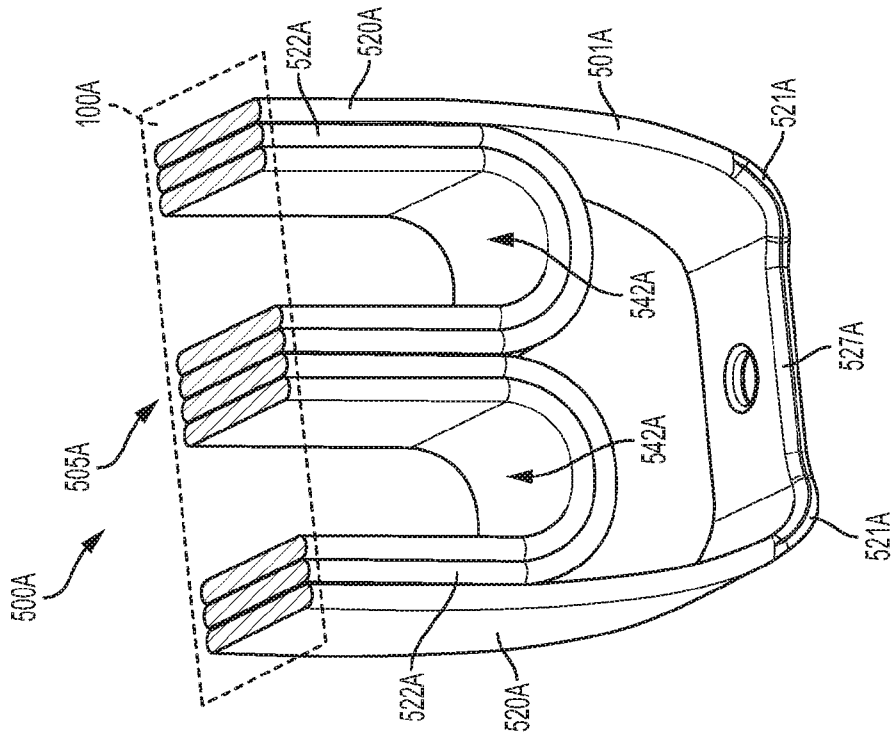


Fig. 99A

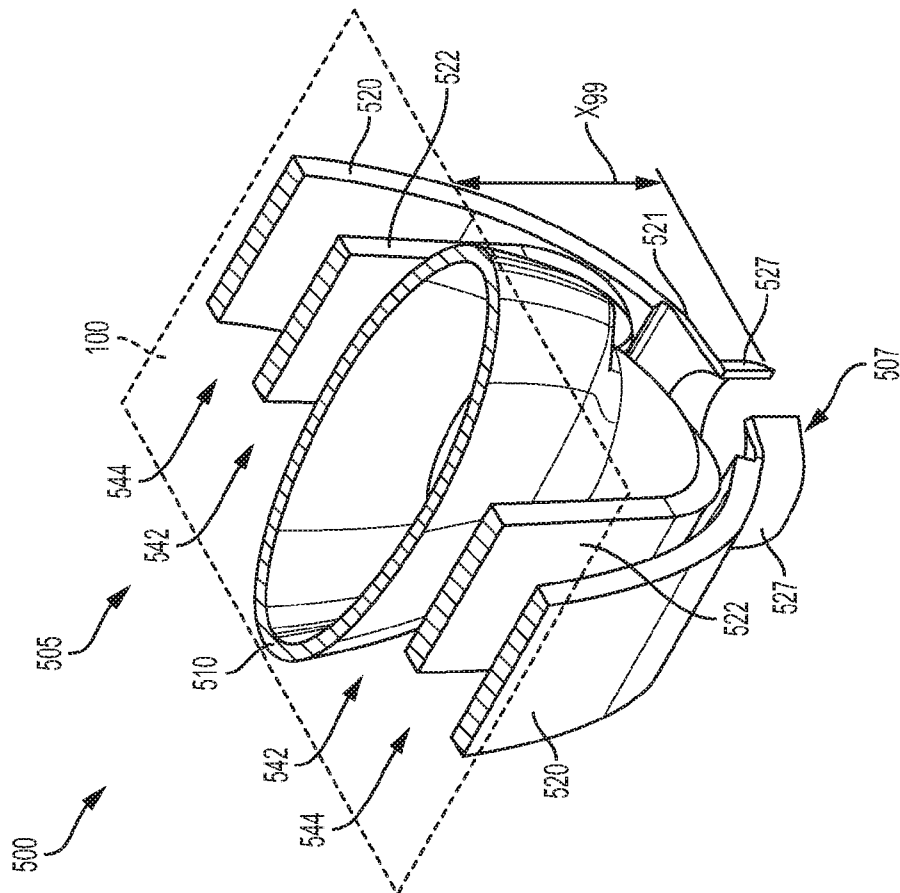


Fig. 99

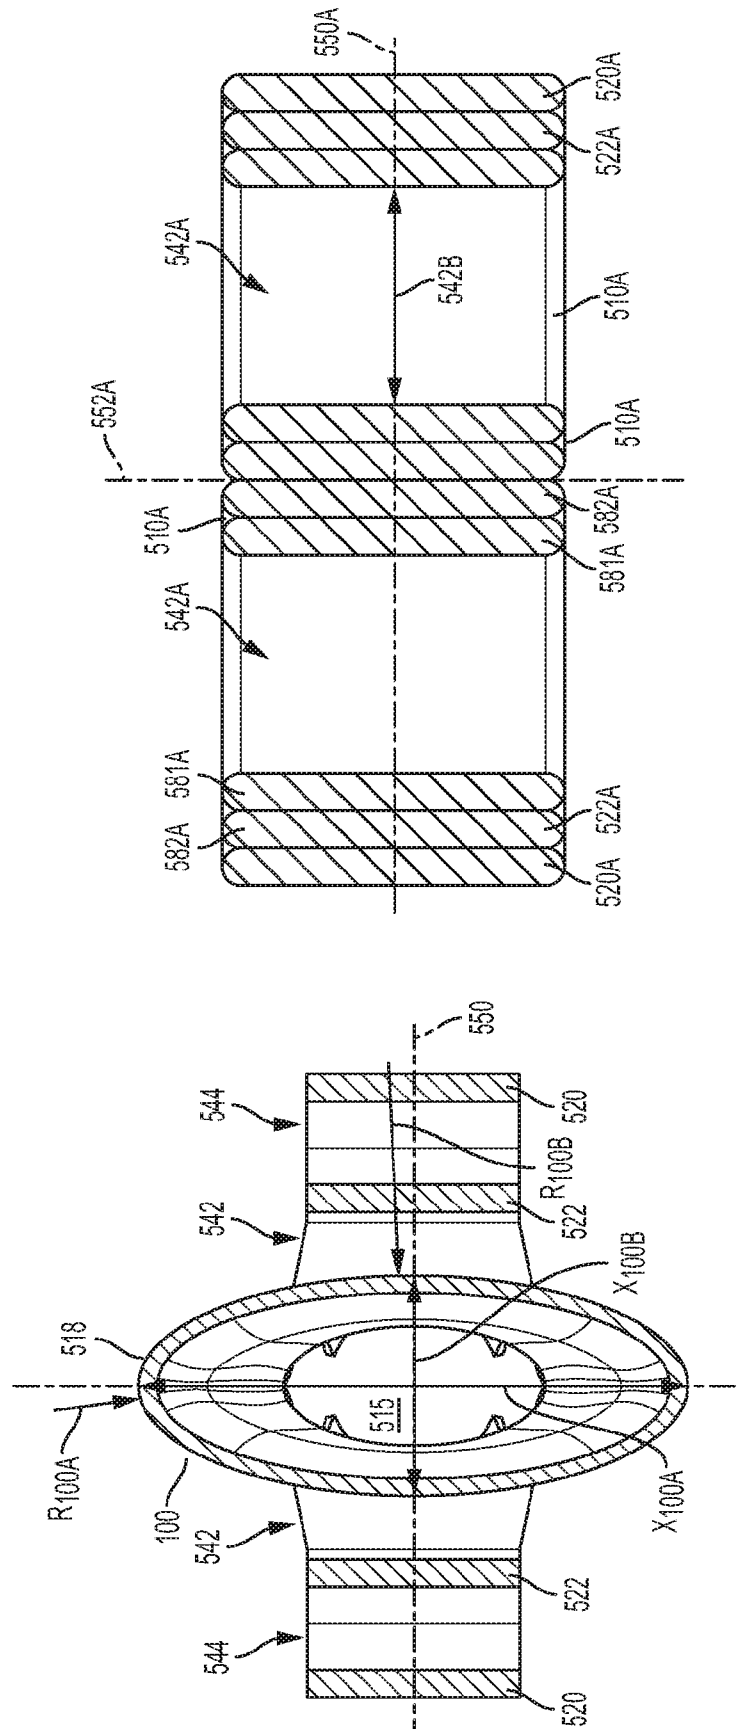
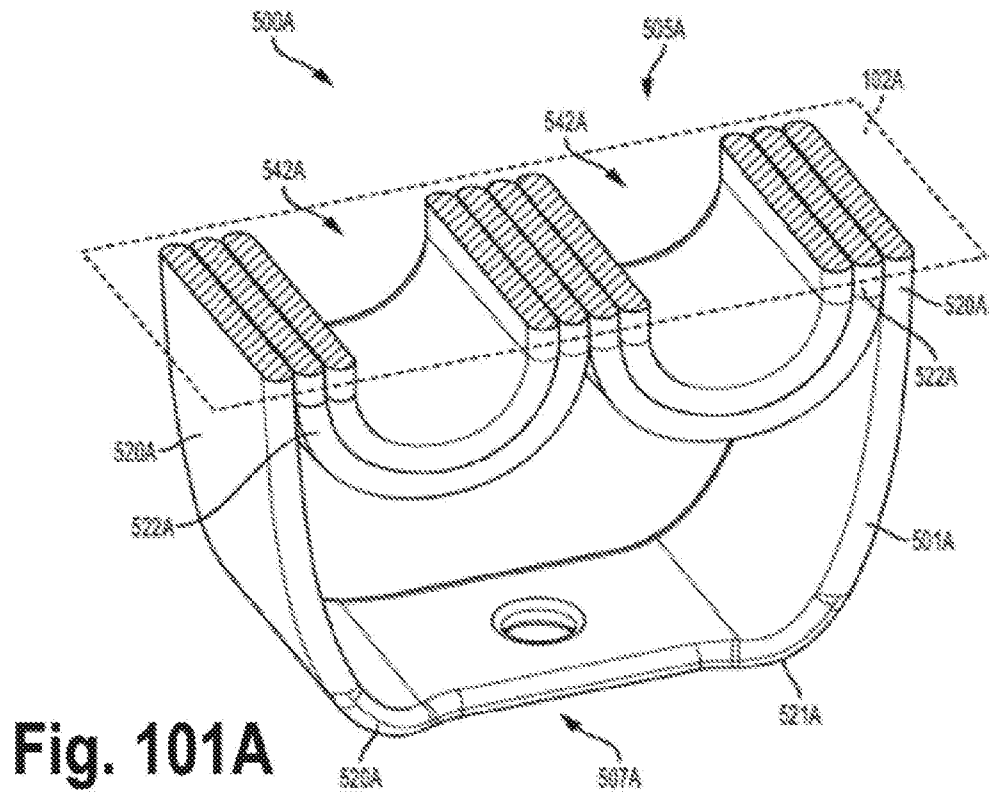
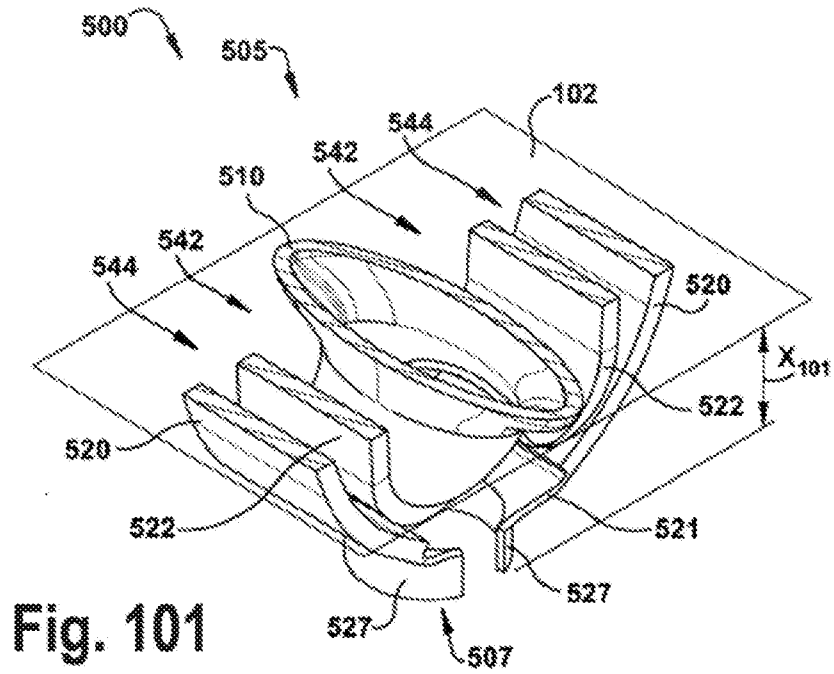


Fig. 100

Fig. 100A



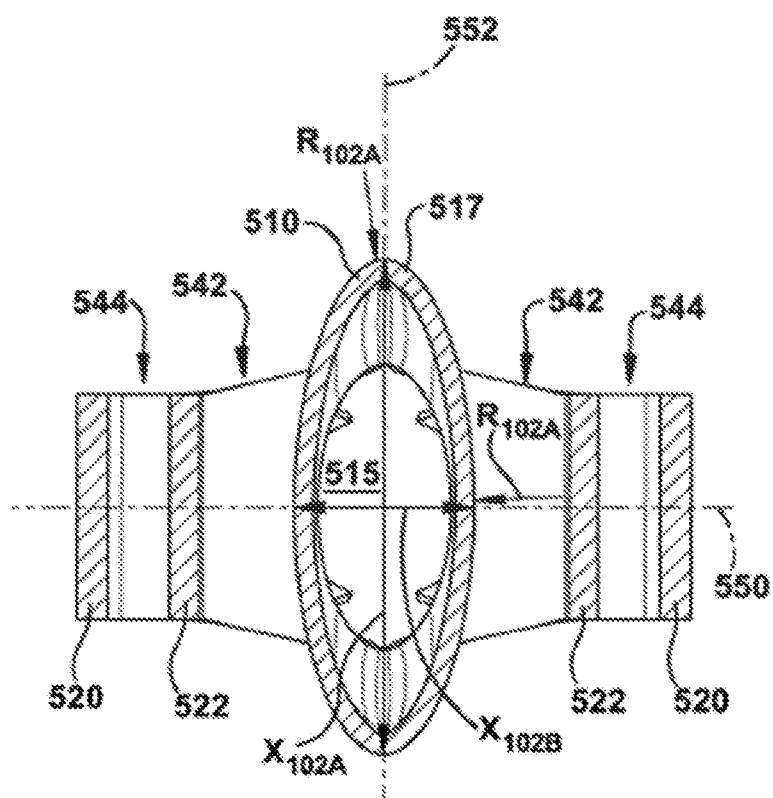


Fig. 102

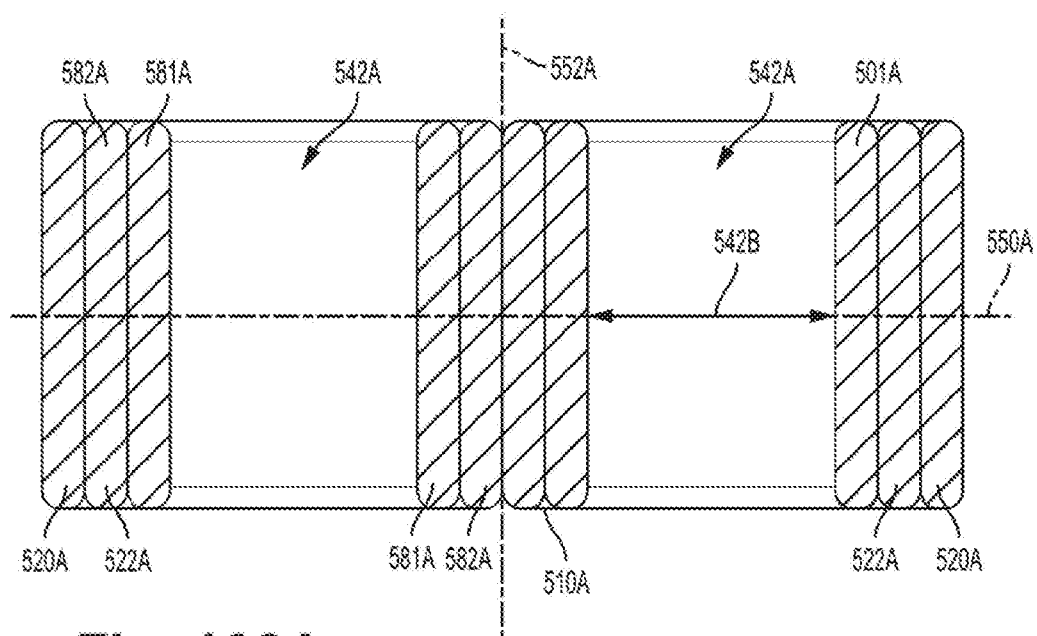


Fig. 102A

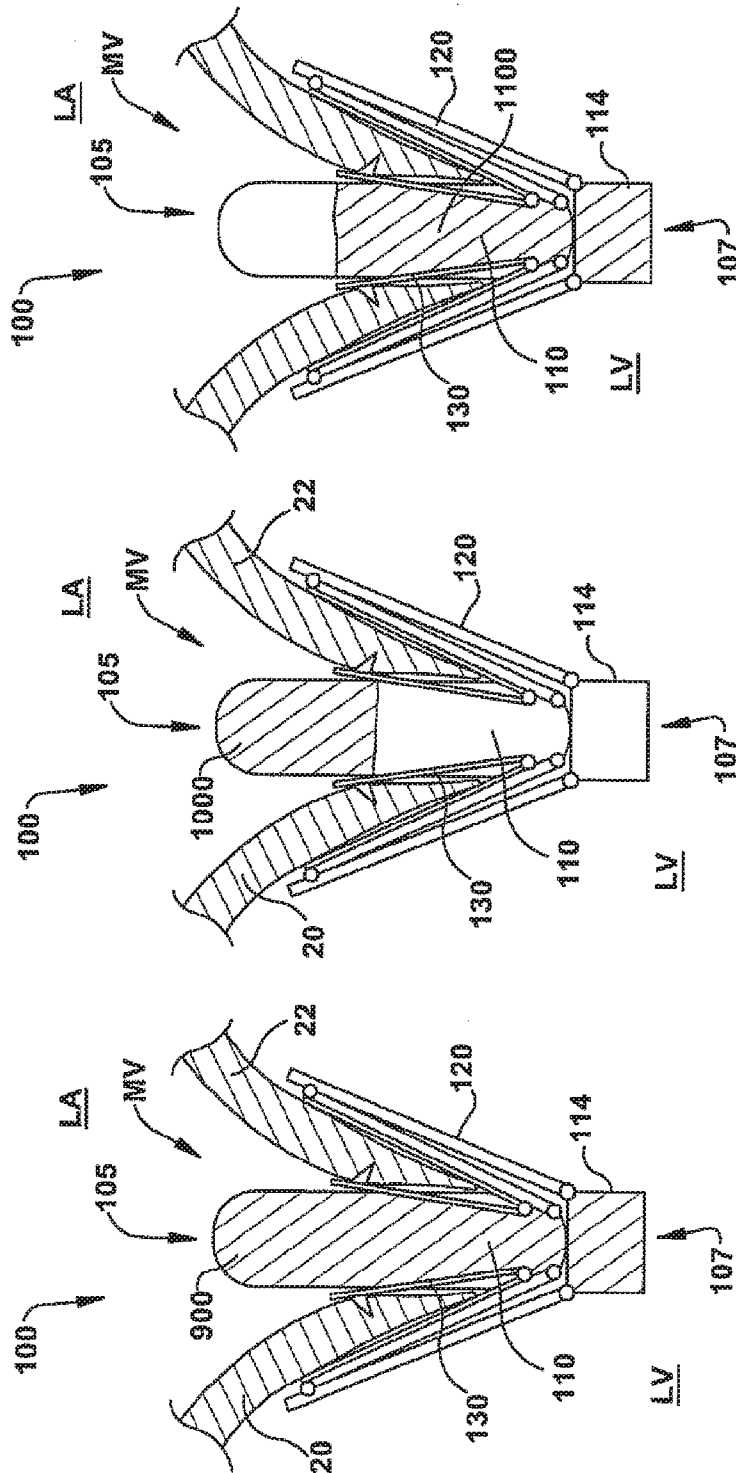
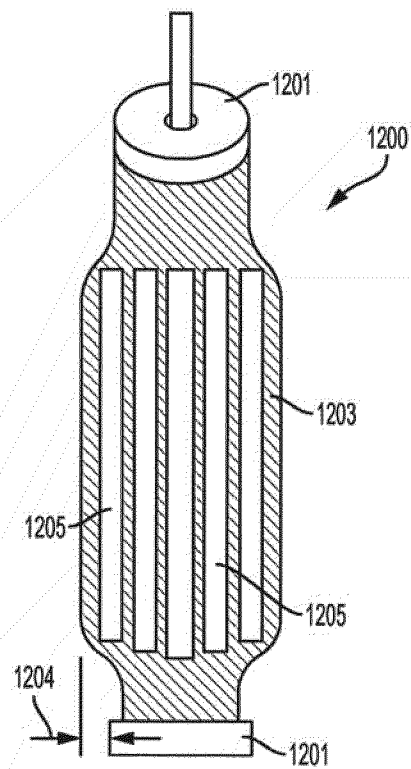
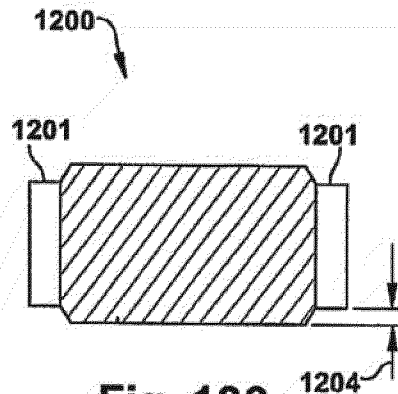


Fig. 105

Fig. 104

Fig. 103

140/262



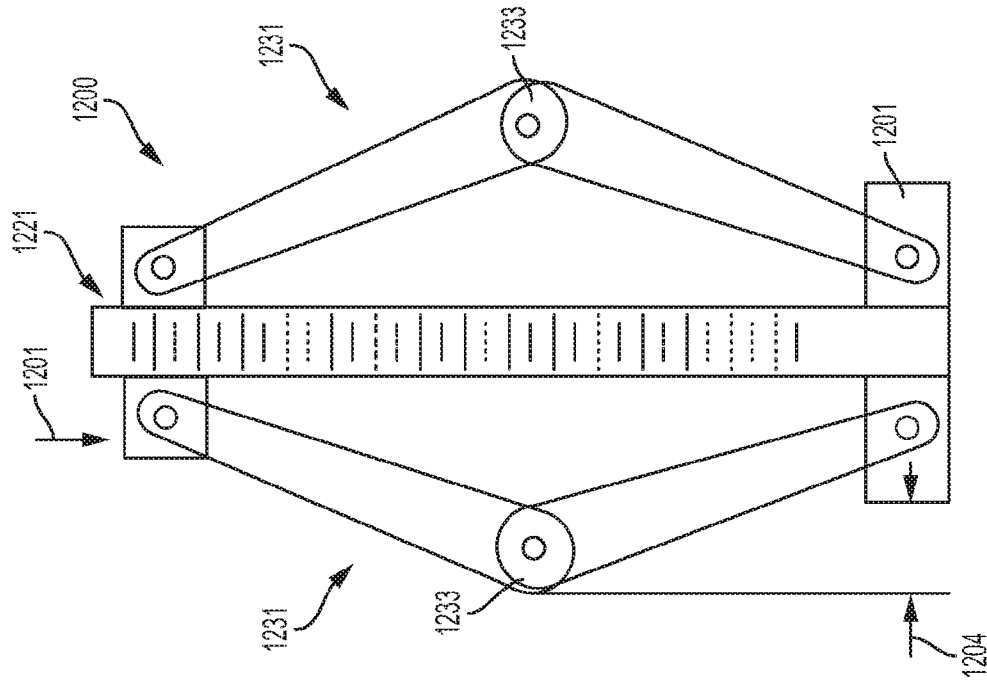


Fig. 106C

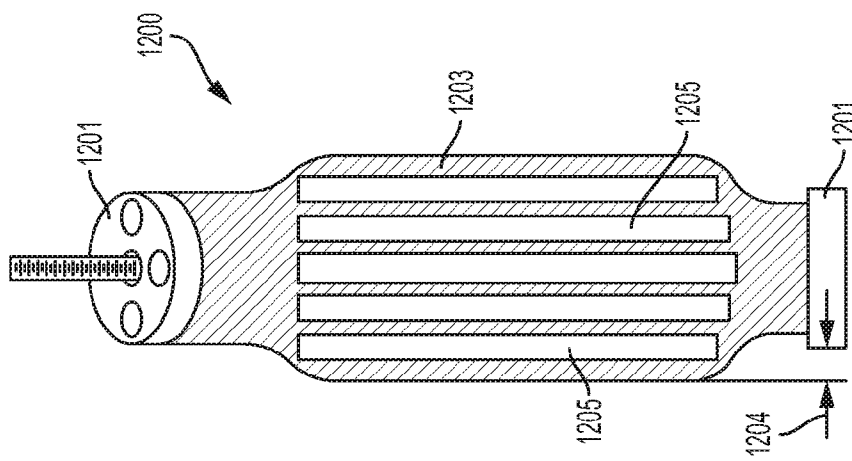


Fig. 106B

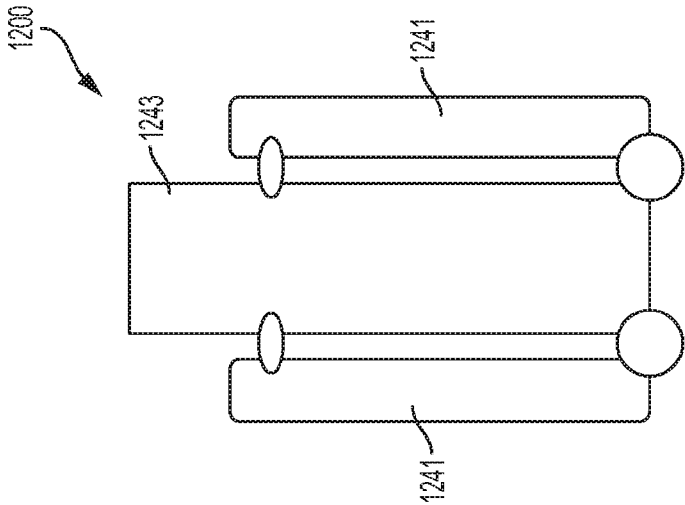


Fig. 106E

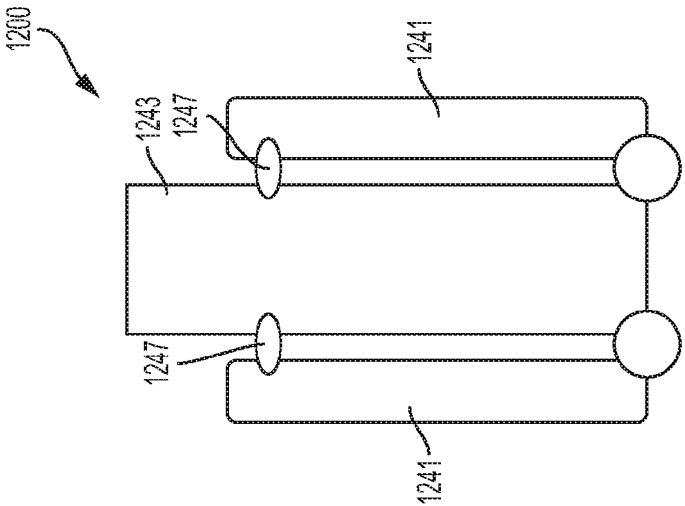
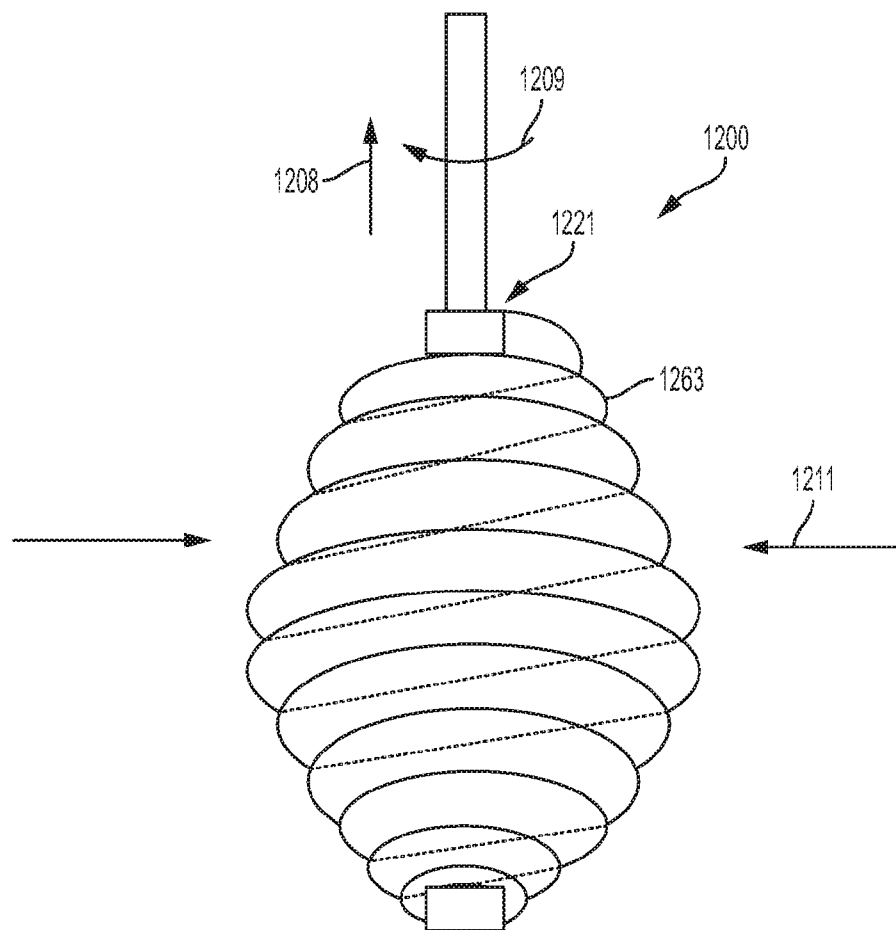
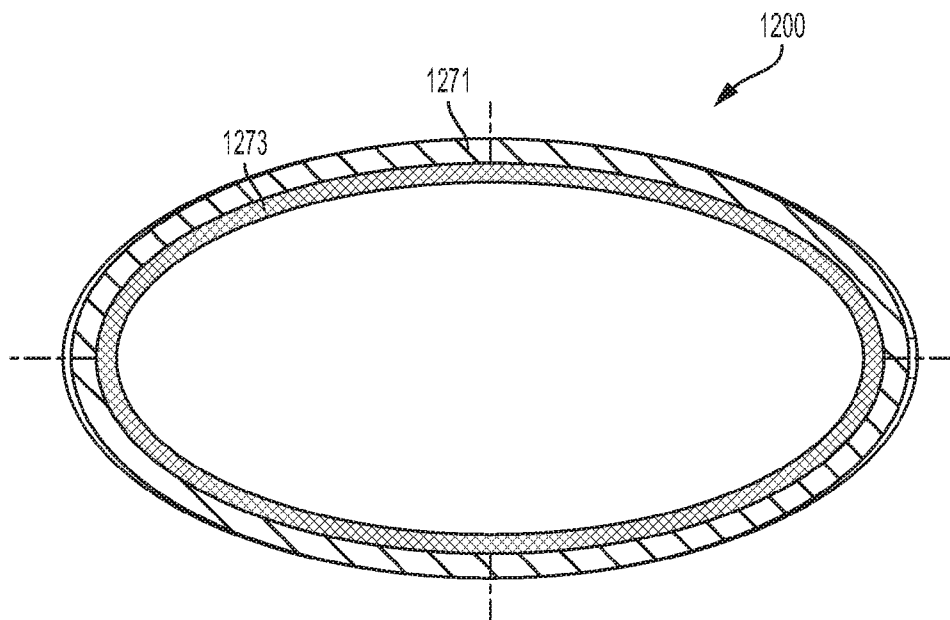
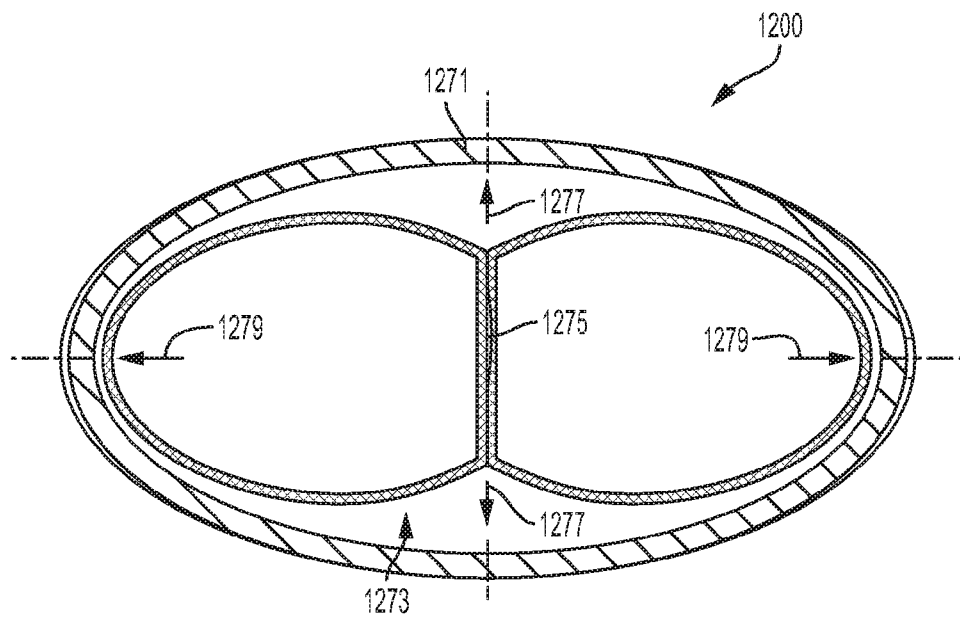



Fig. 106D

143/262



**Fig. 106F**




**Fig. 106G**

**Fig. 106H**

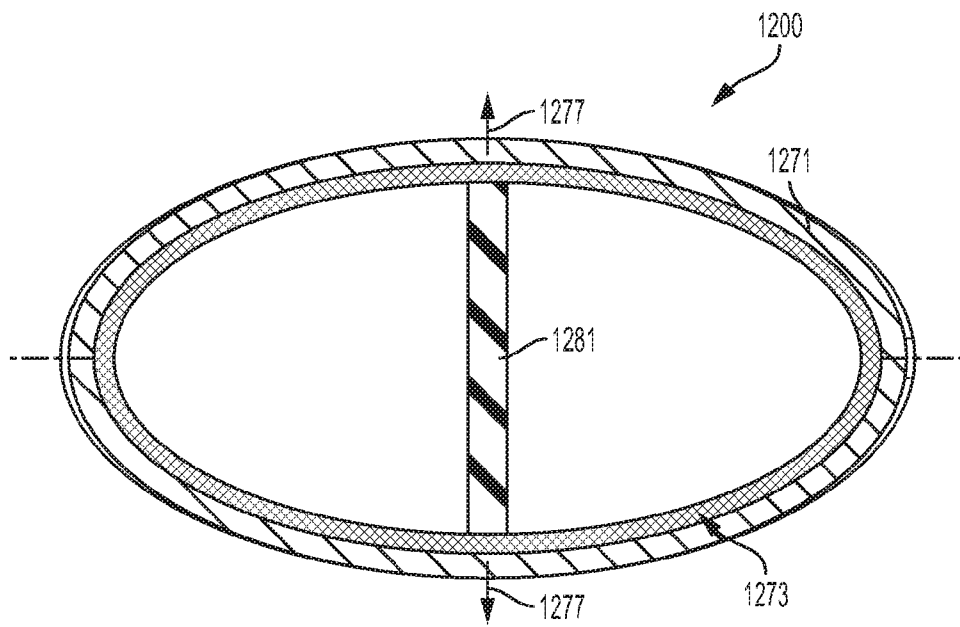**Fig. 106I**

147/262

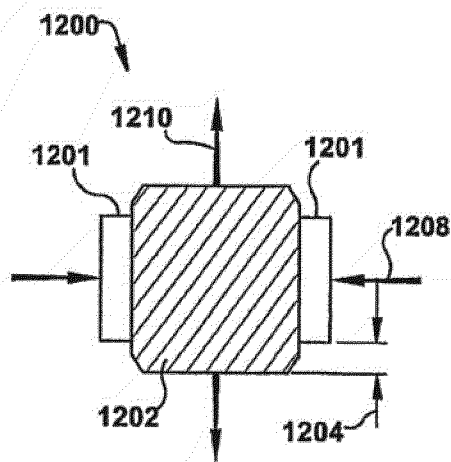**Fig. 107****Fig. 108**

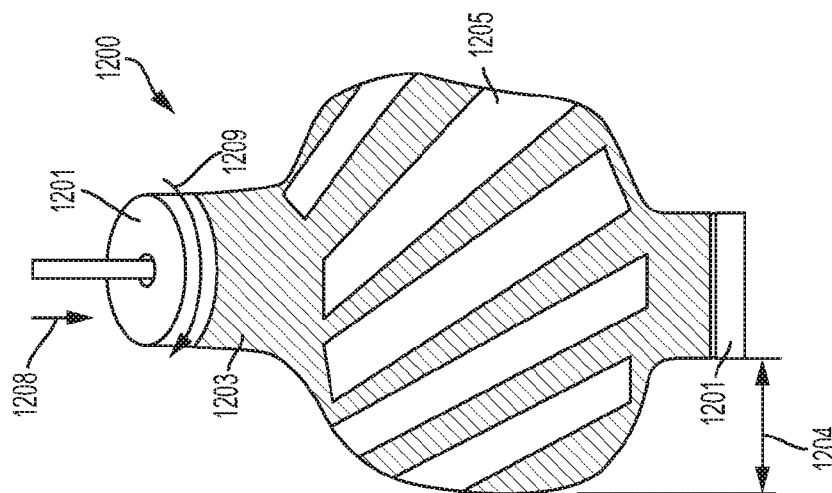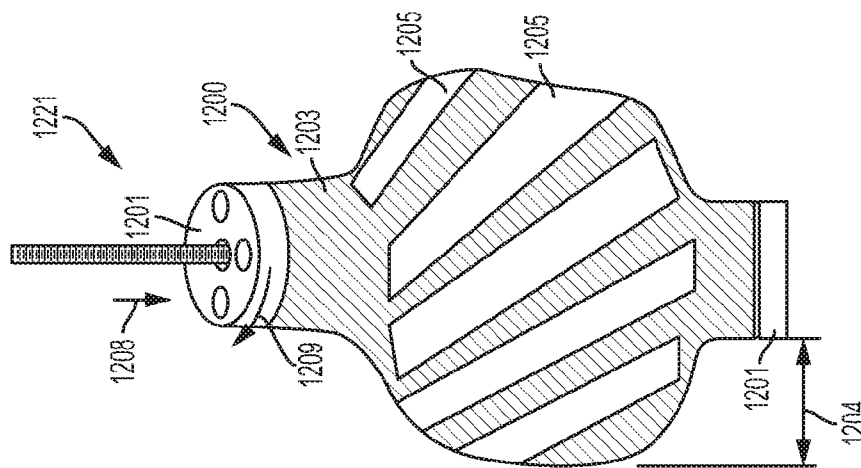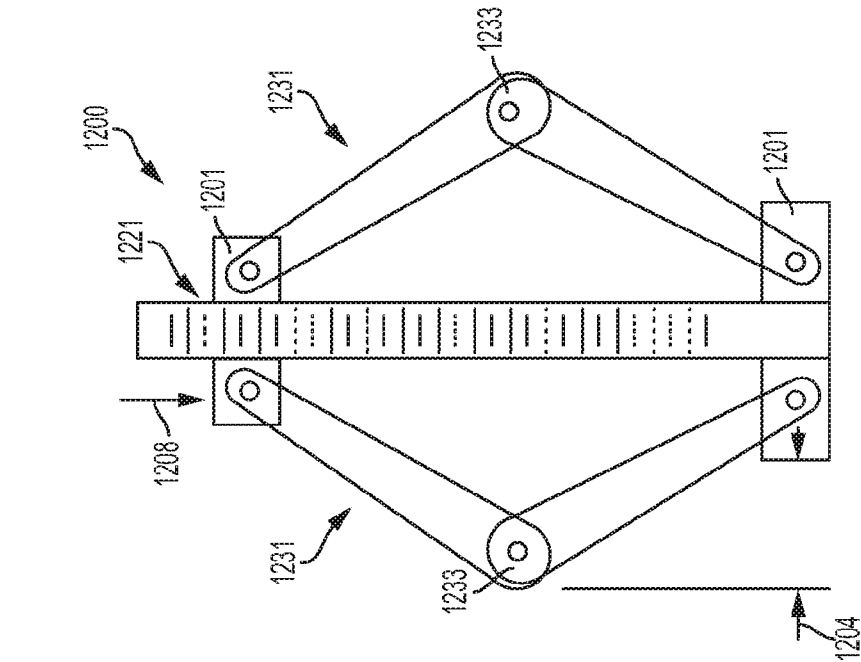

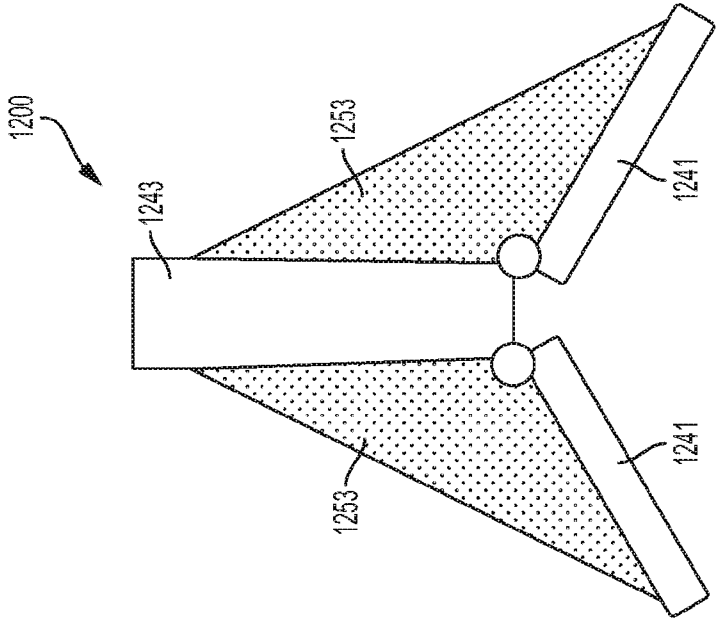


Fig. 108E

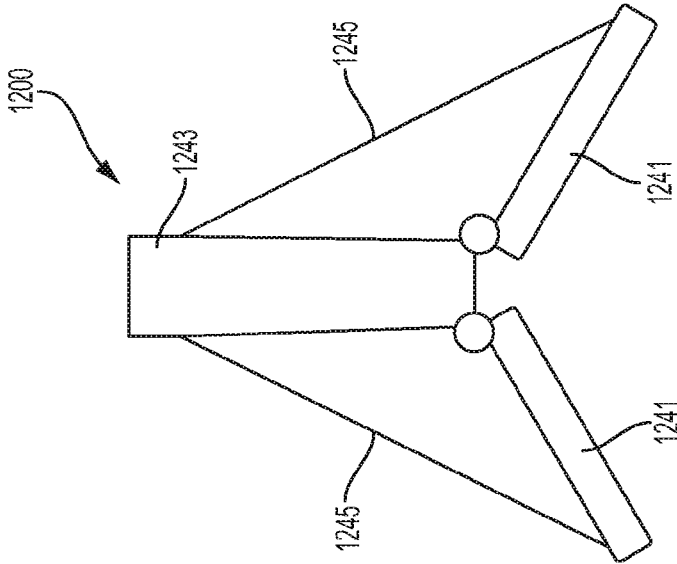
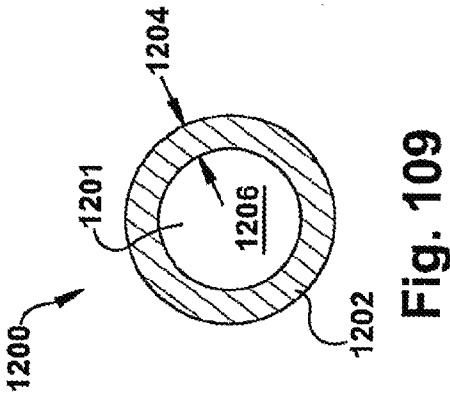
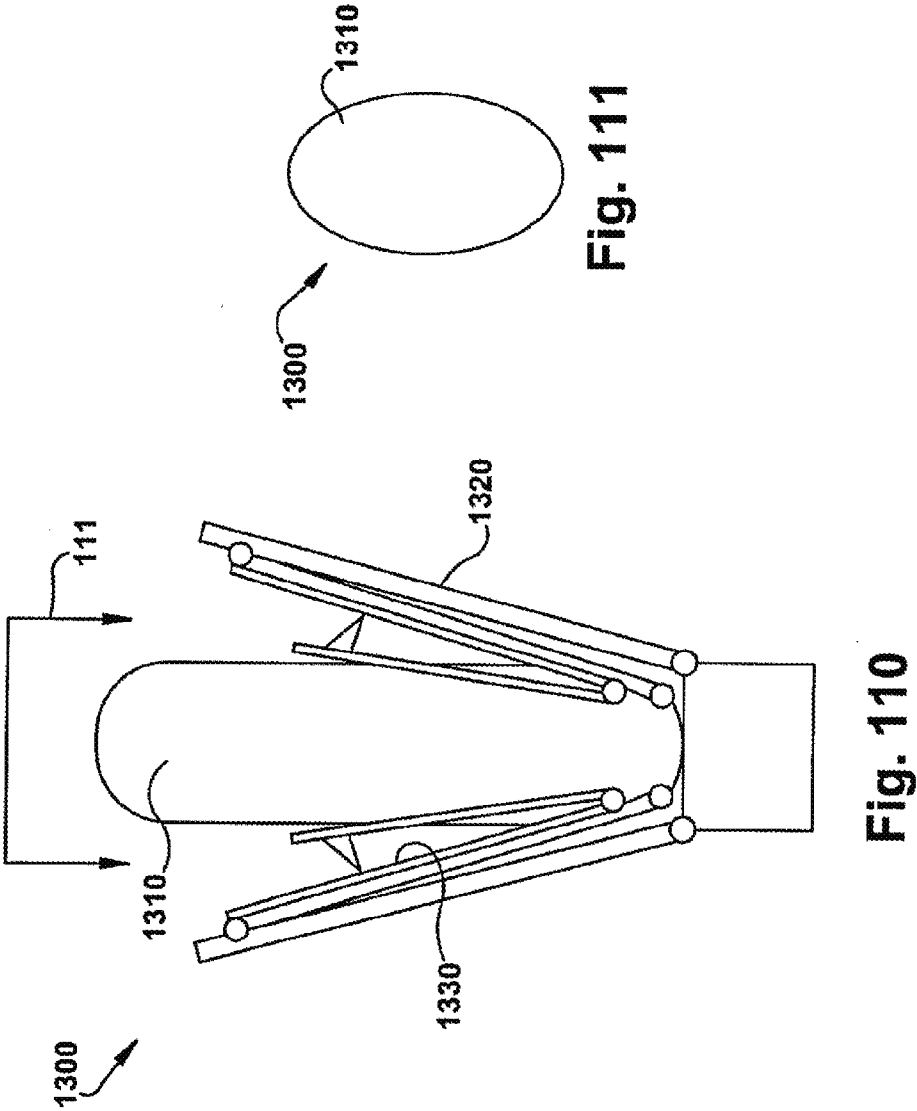
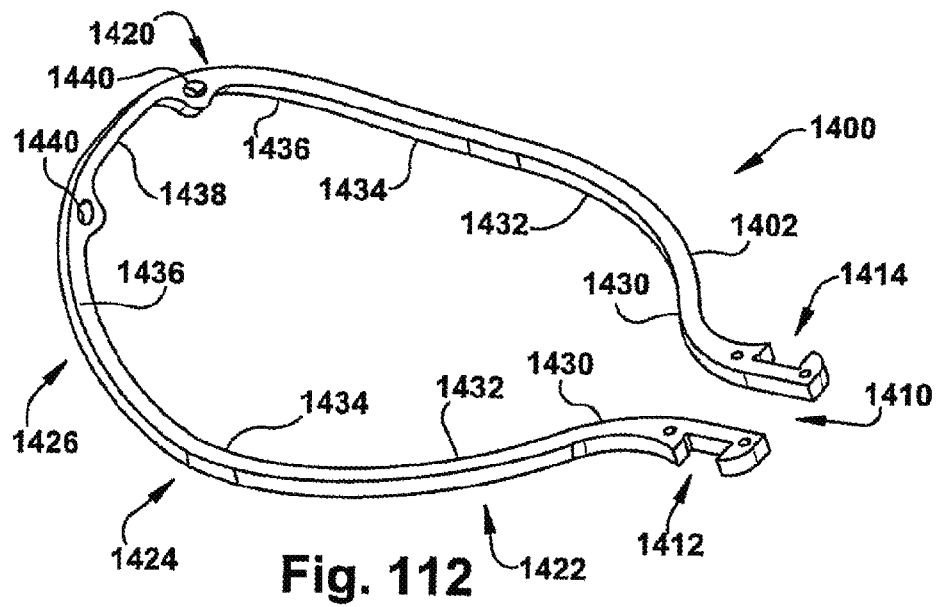


Fig. 108D










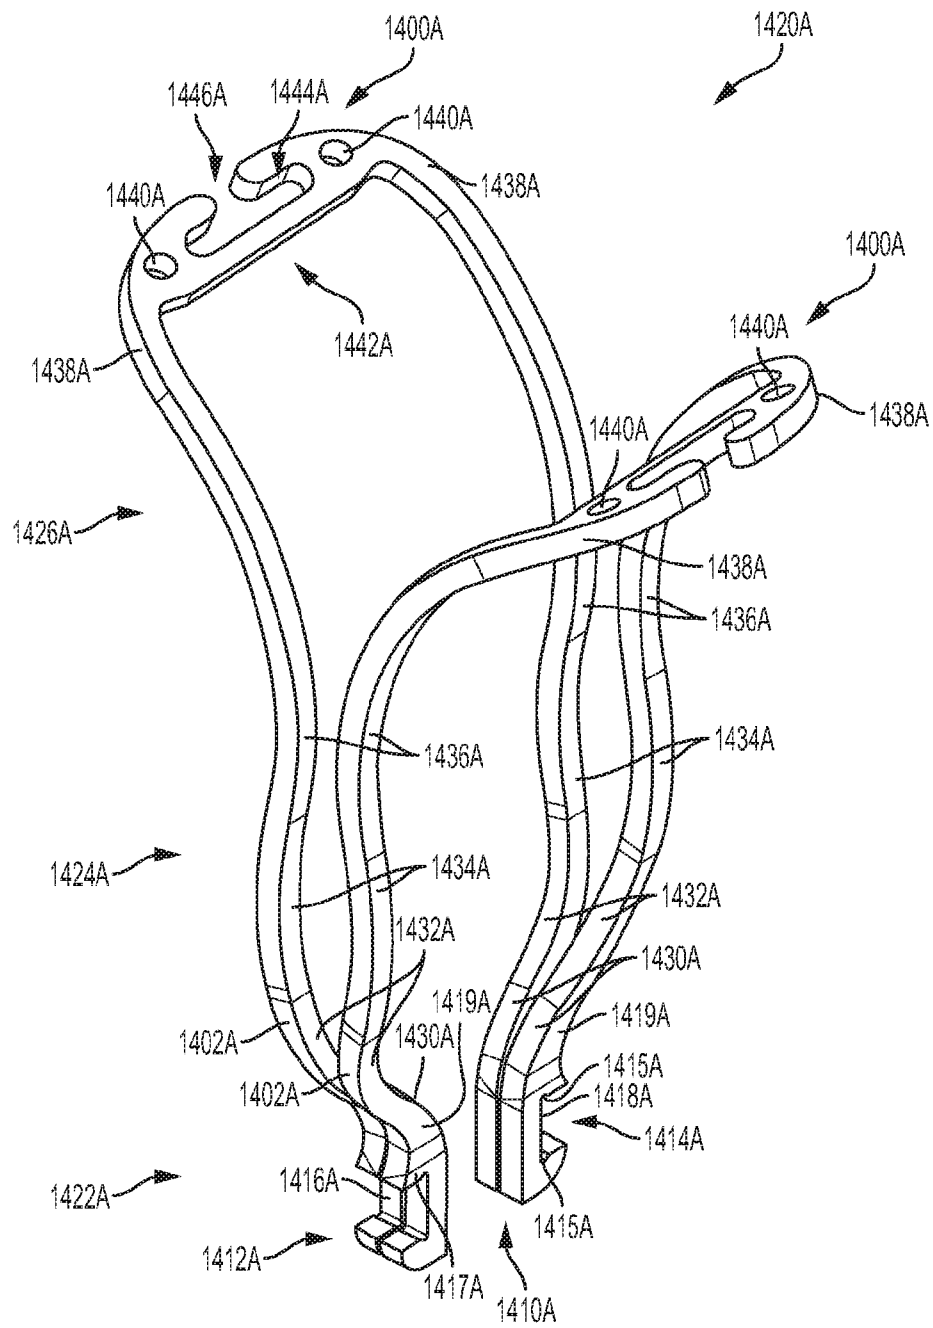


Fig. 112A

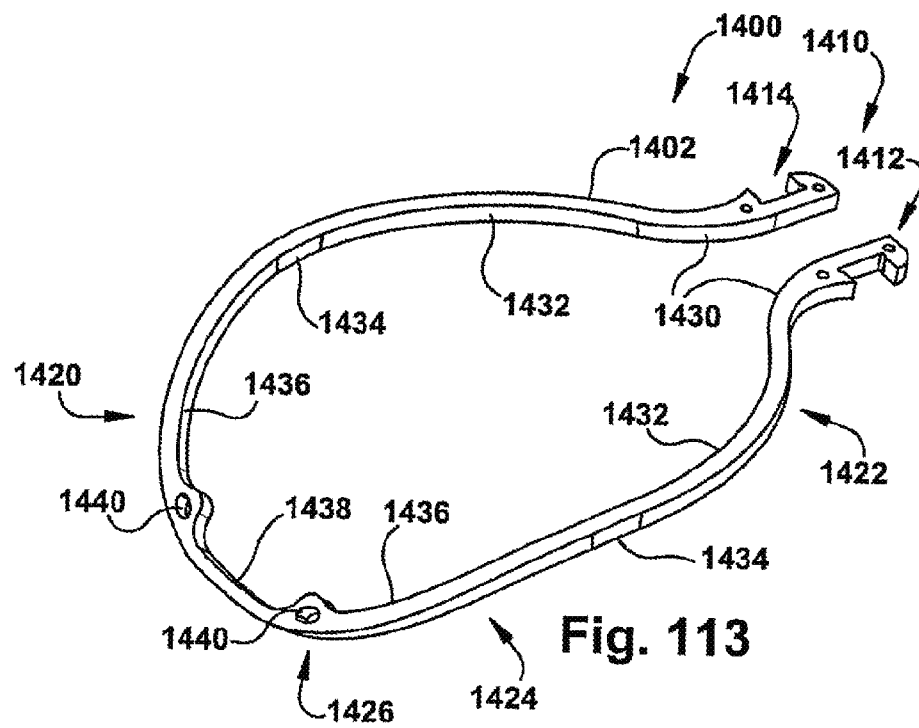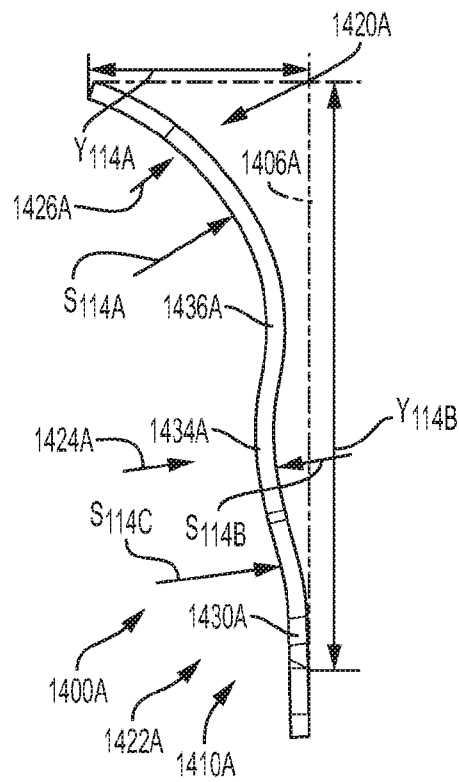
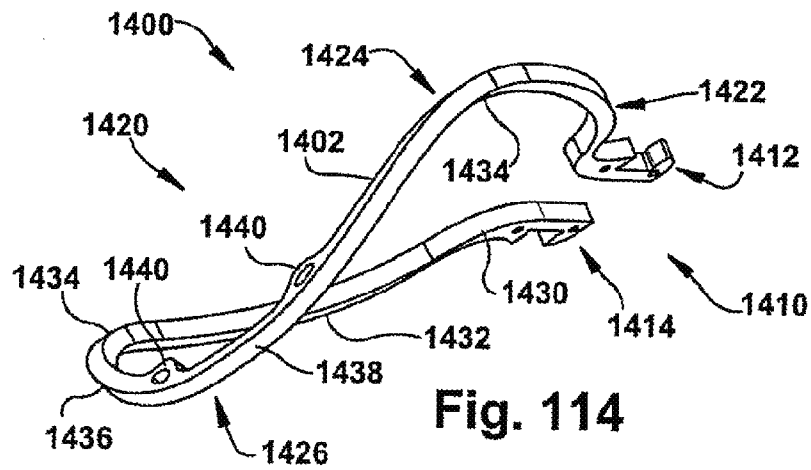


154/262

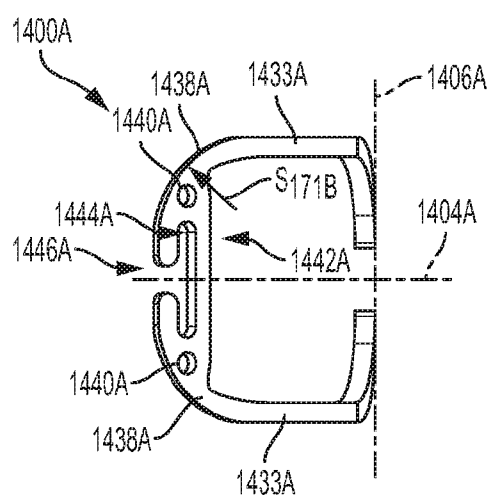

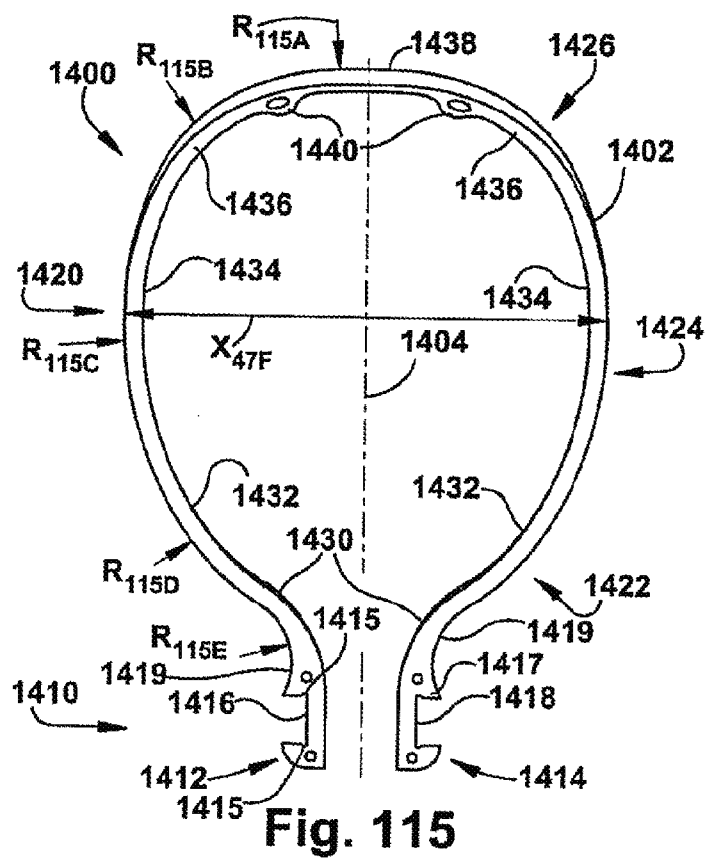

156/262

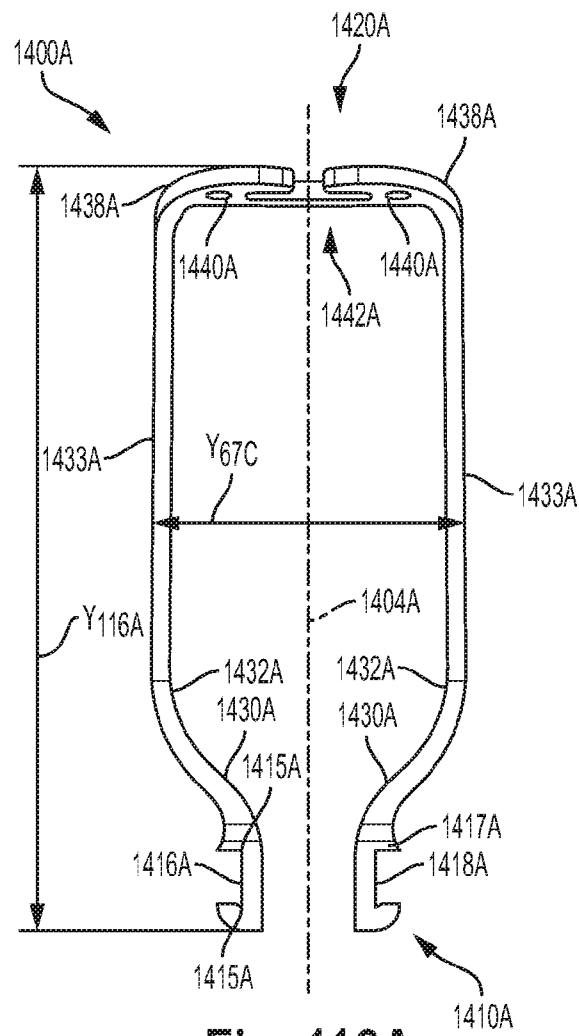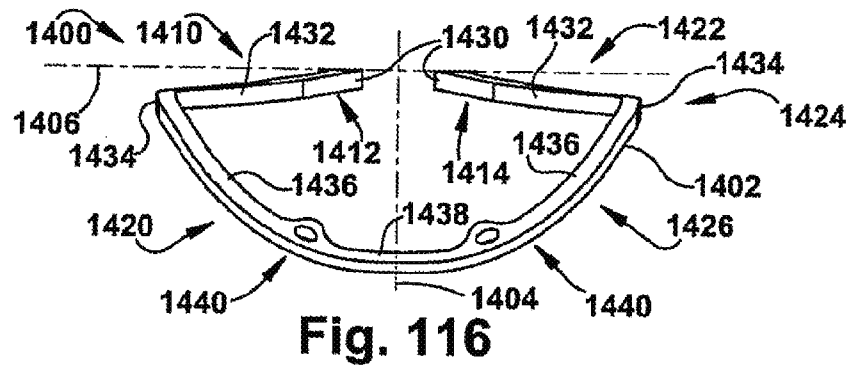

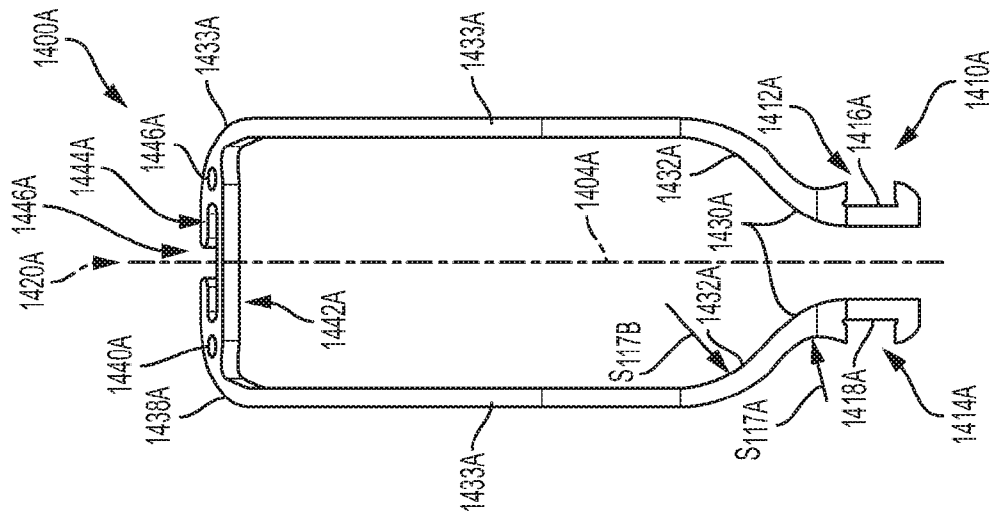


FIG. 117A

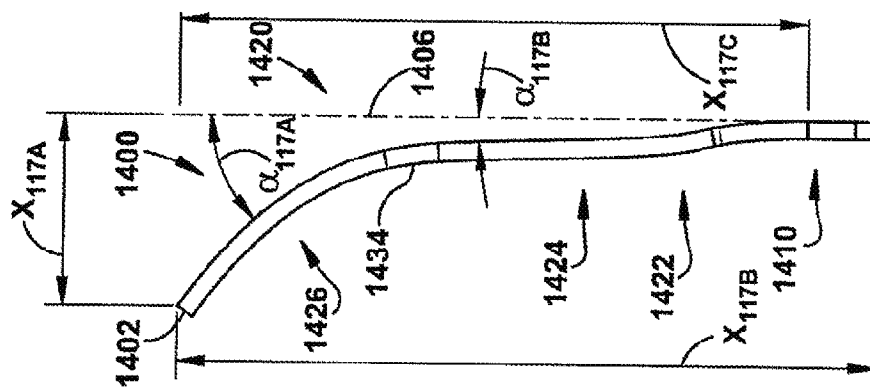
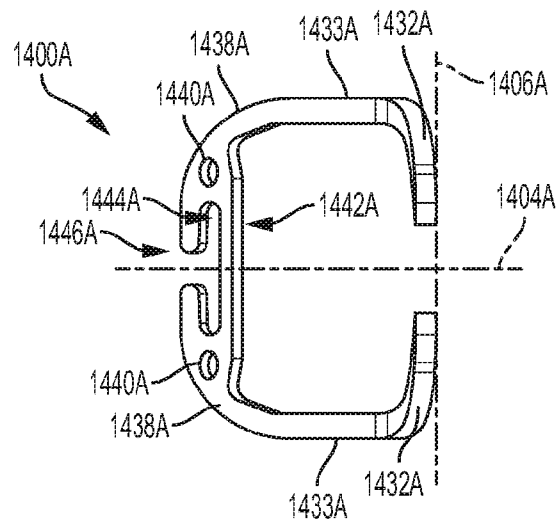
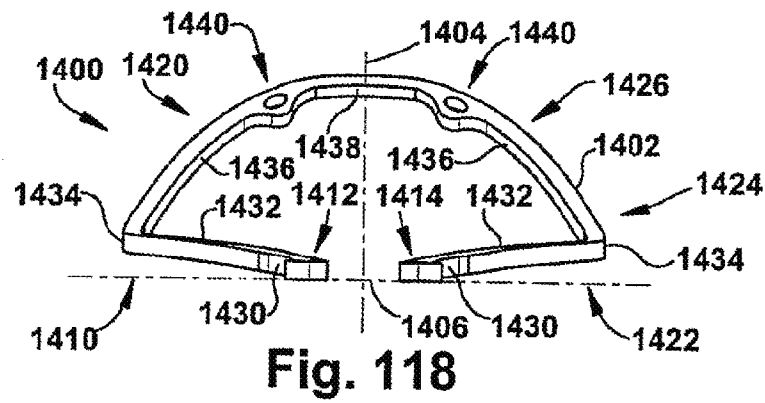


Fig. 117

158/262



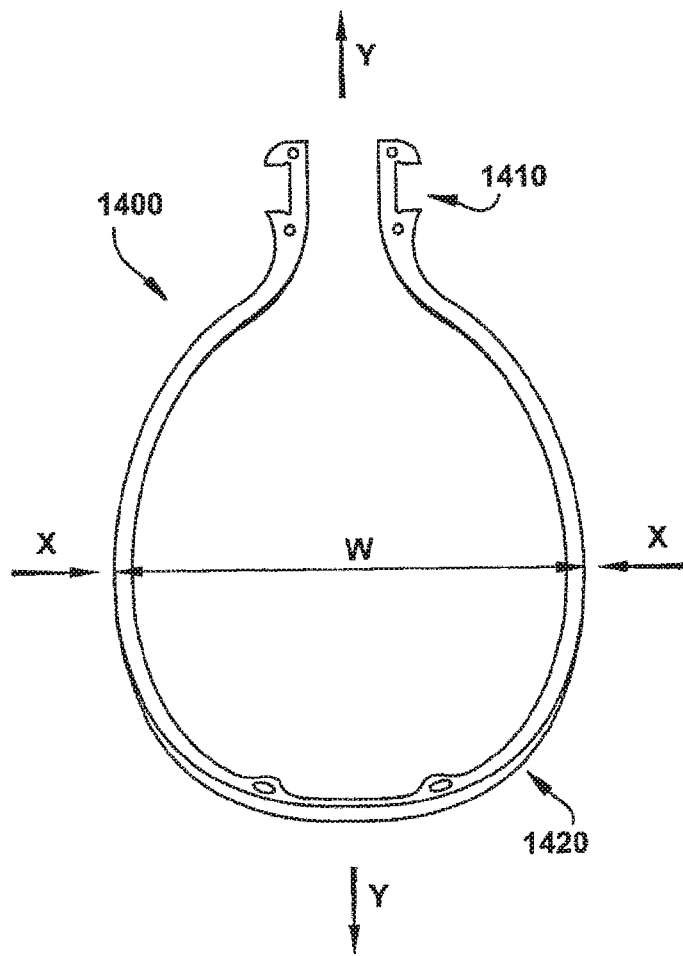


Fig. 119











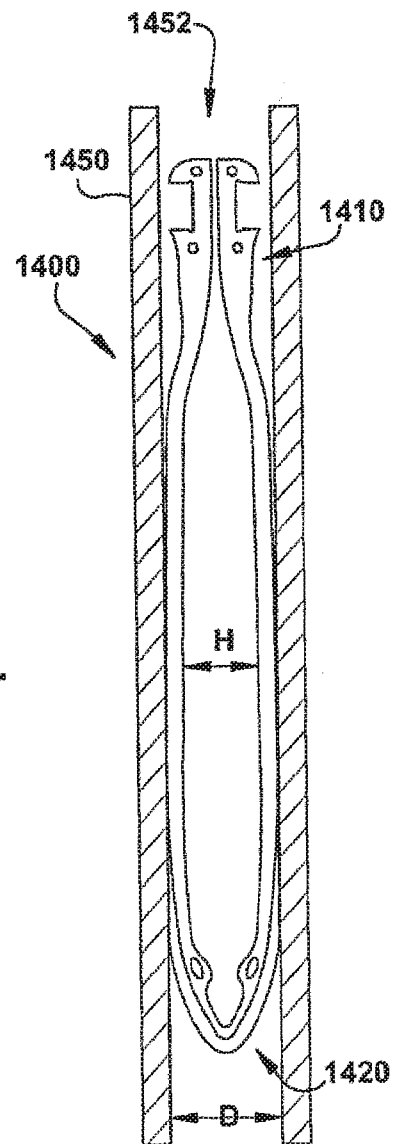



Fig. 120



**Fig. 121****Fig. 122****Fig. 123****Fig. 124**



**Fig. 125****Fig. 126****Fig. 127****Fig. 128**

**Fig. 129**

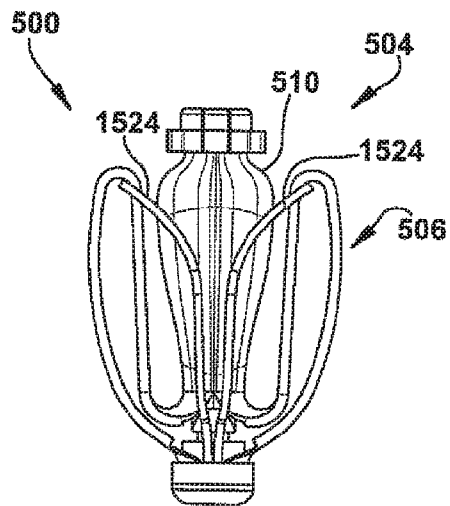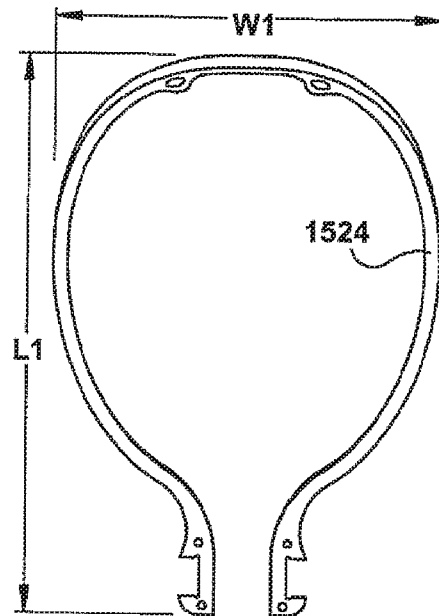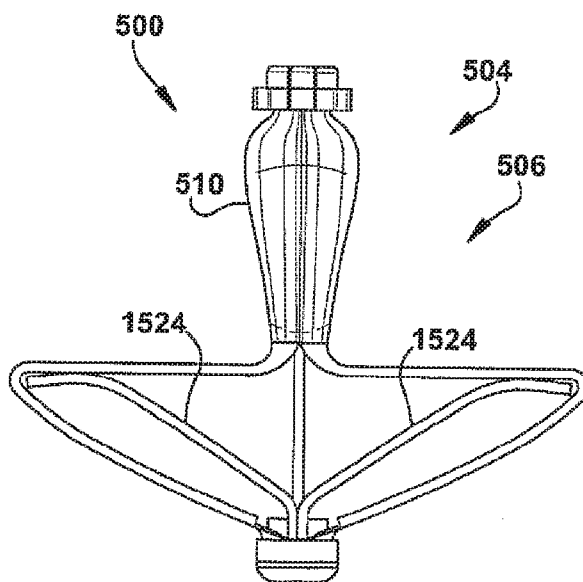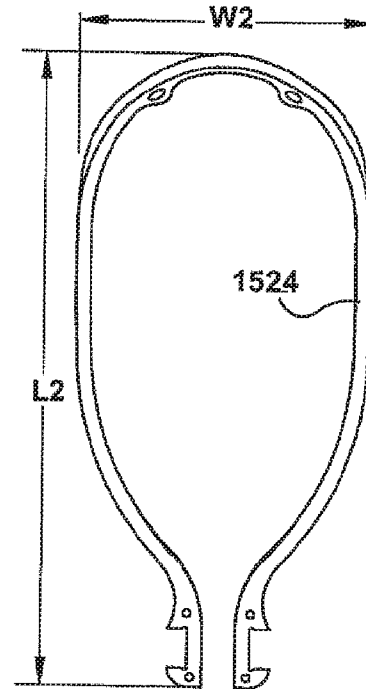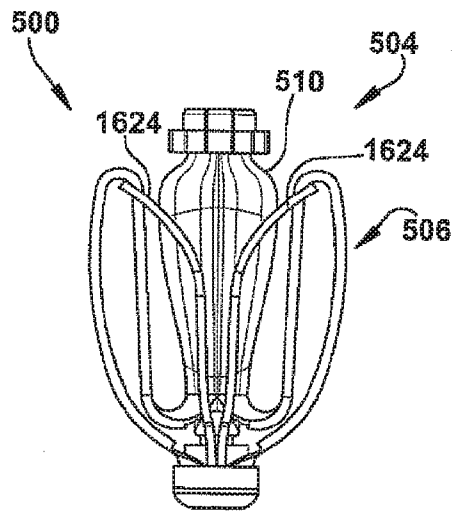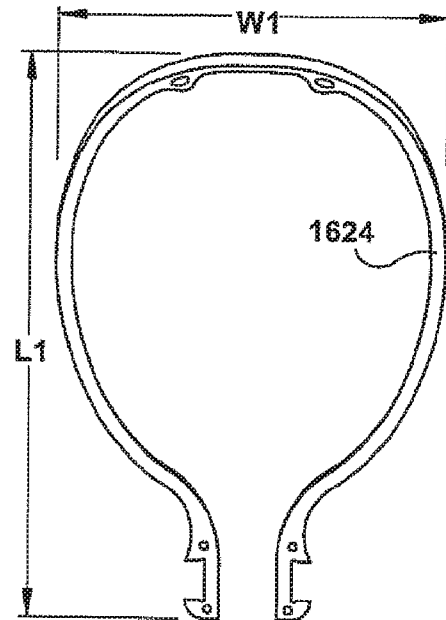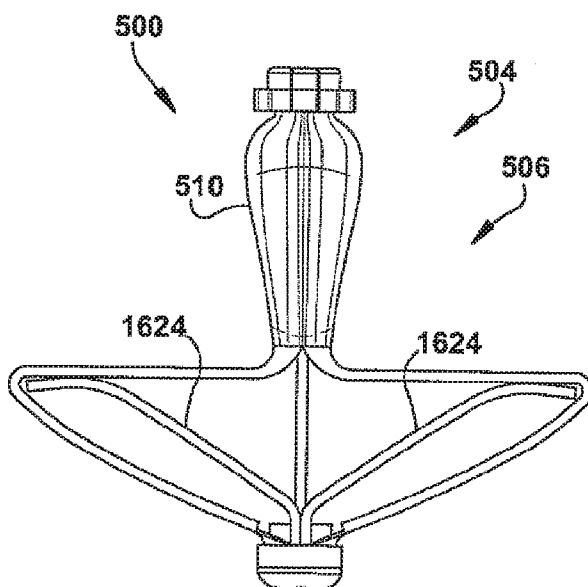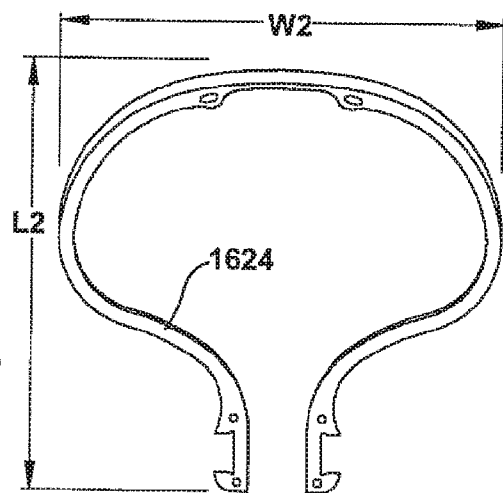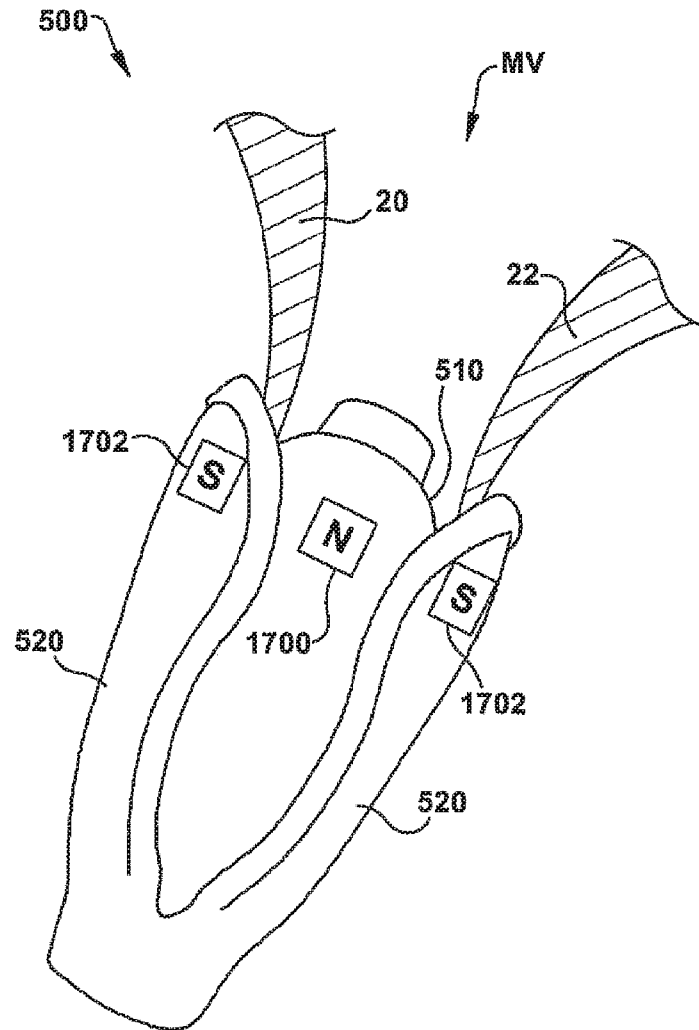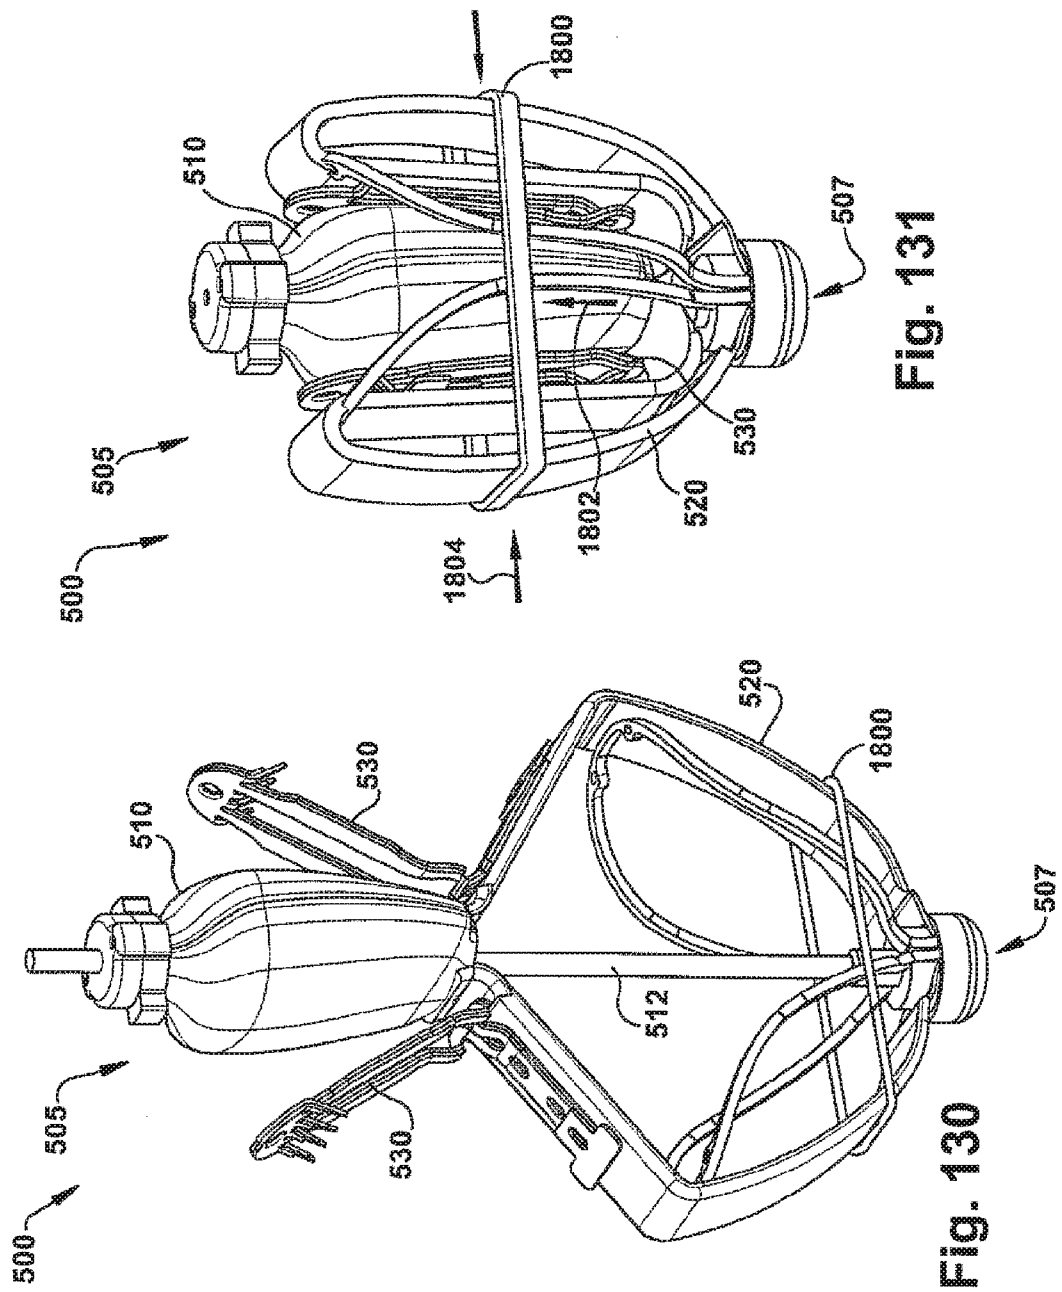

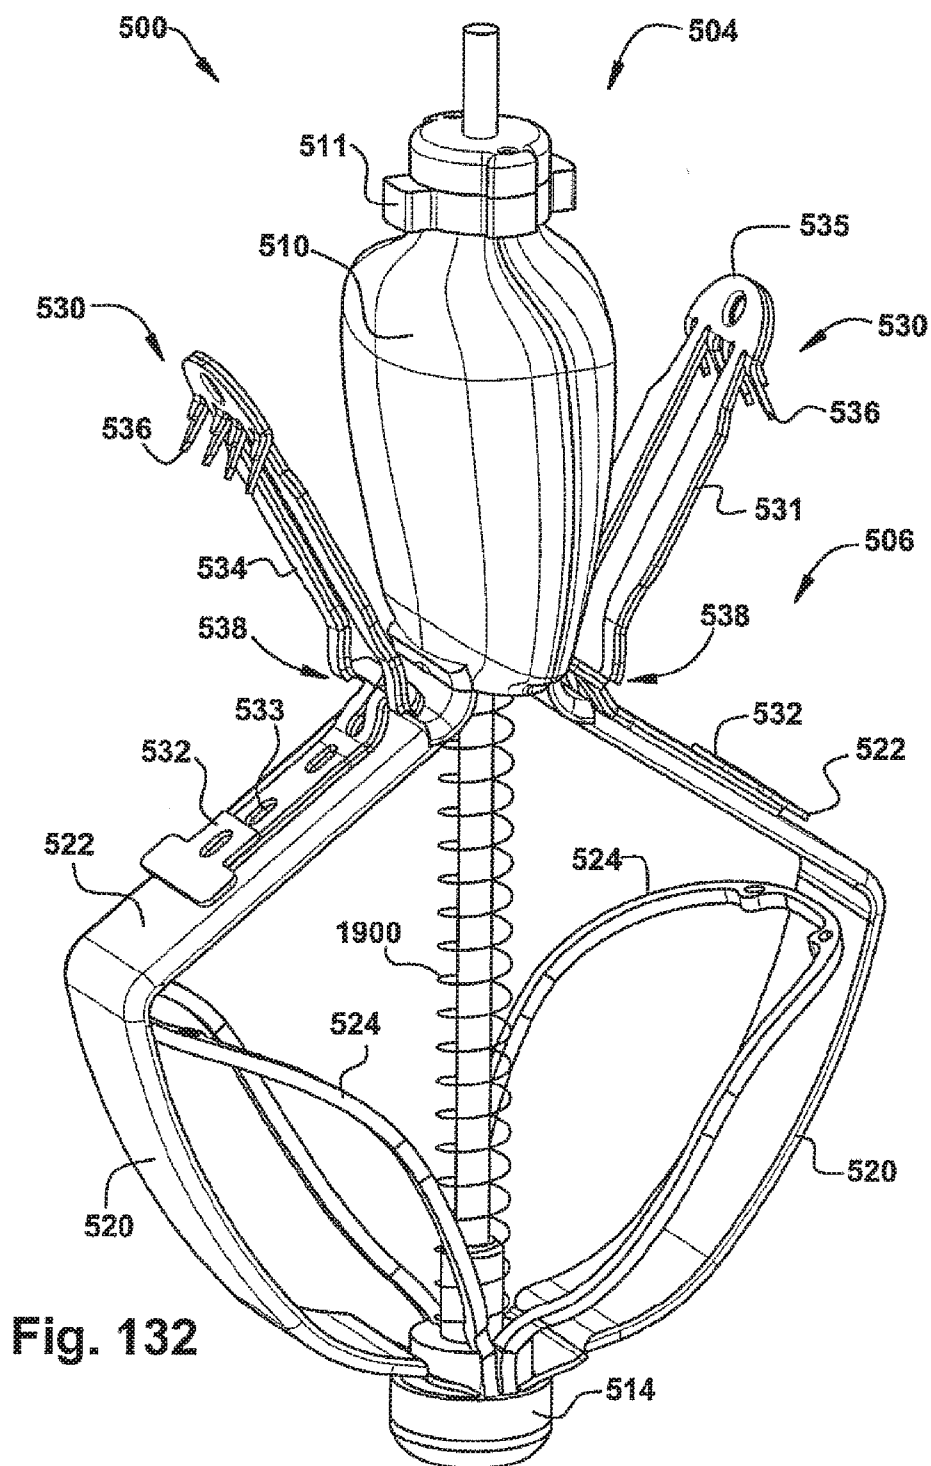

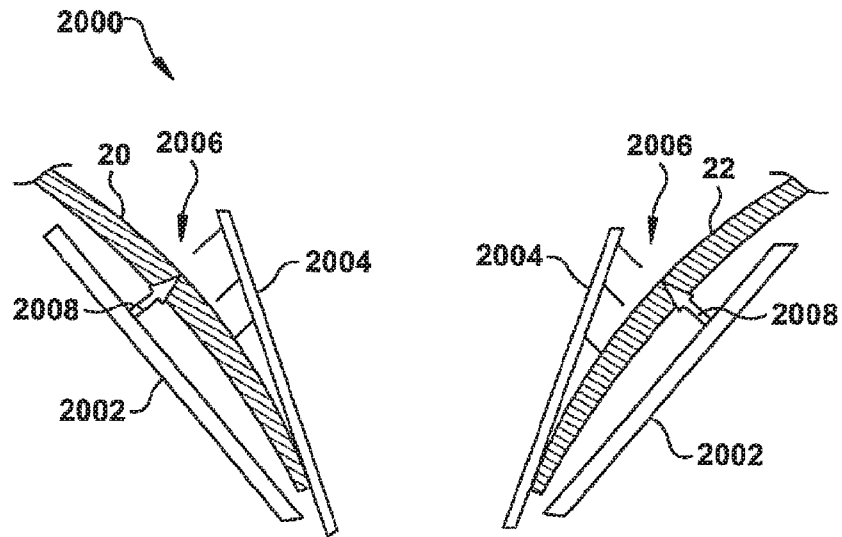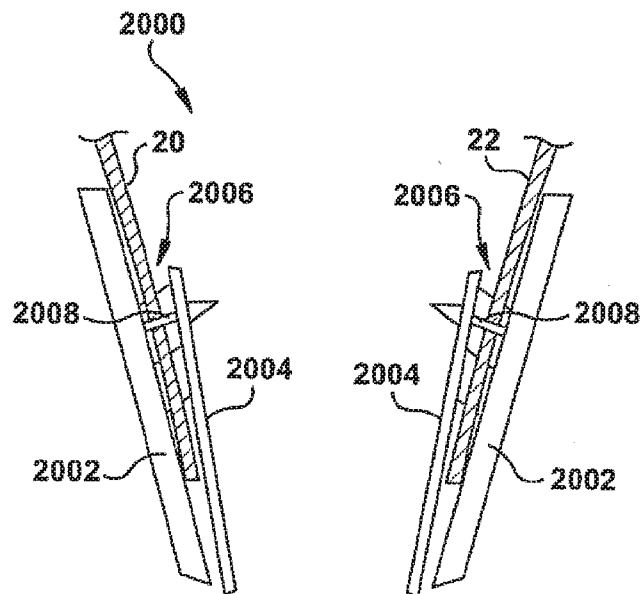**Fig. 133****Fig. 134**

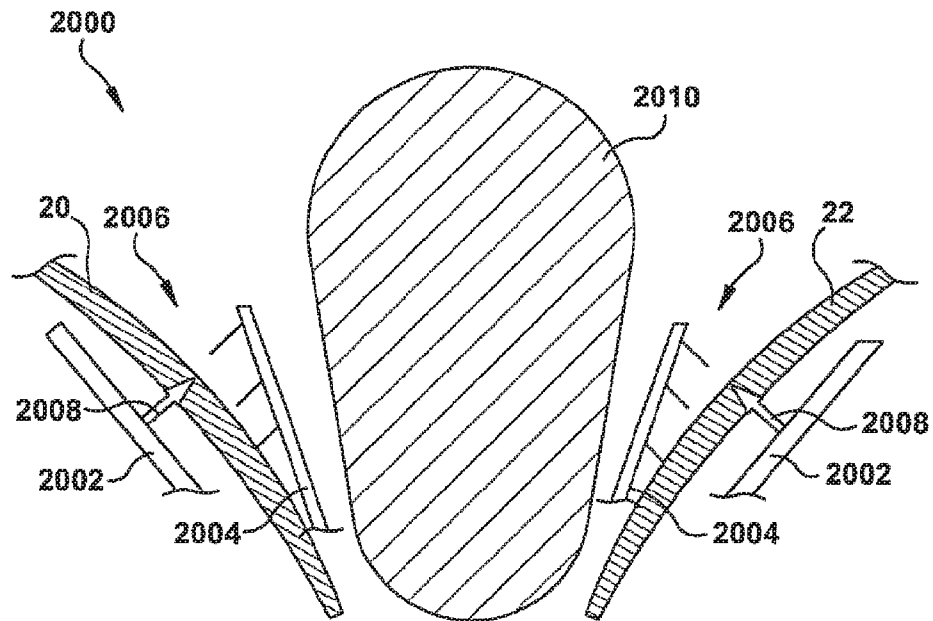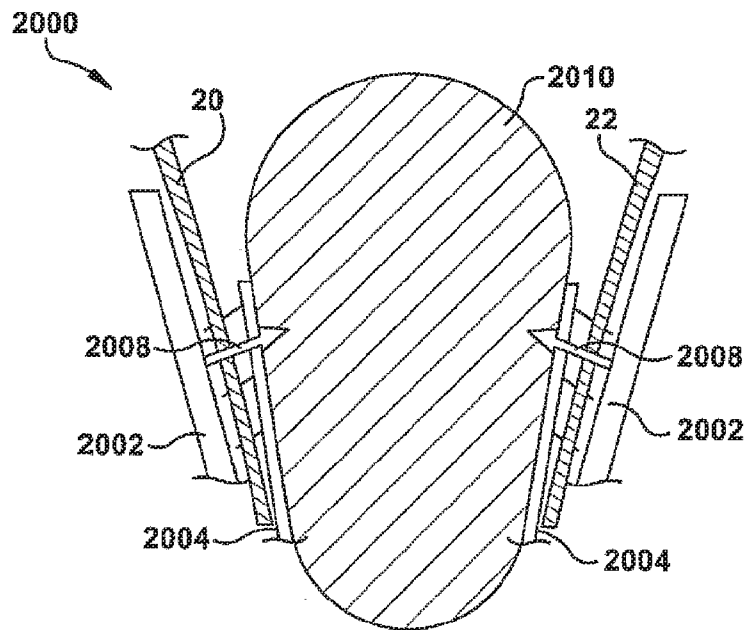**Fig. 135****Fig. 136**

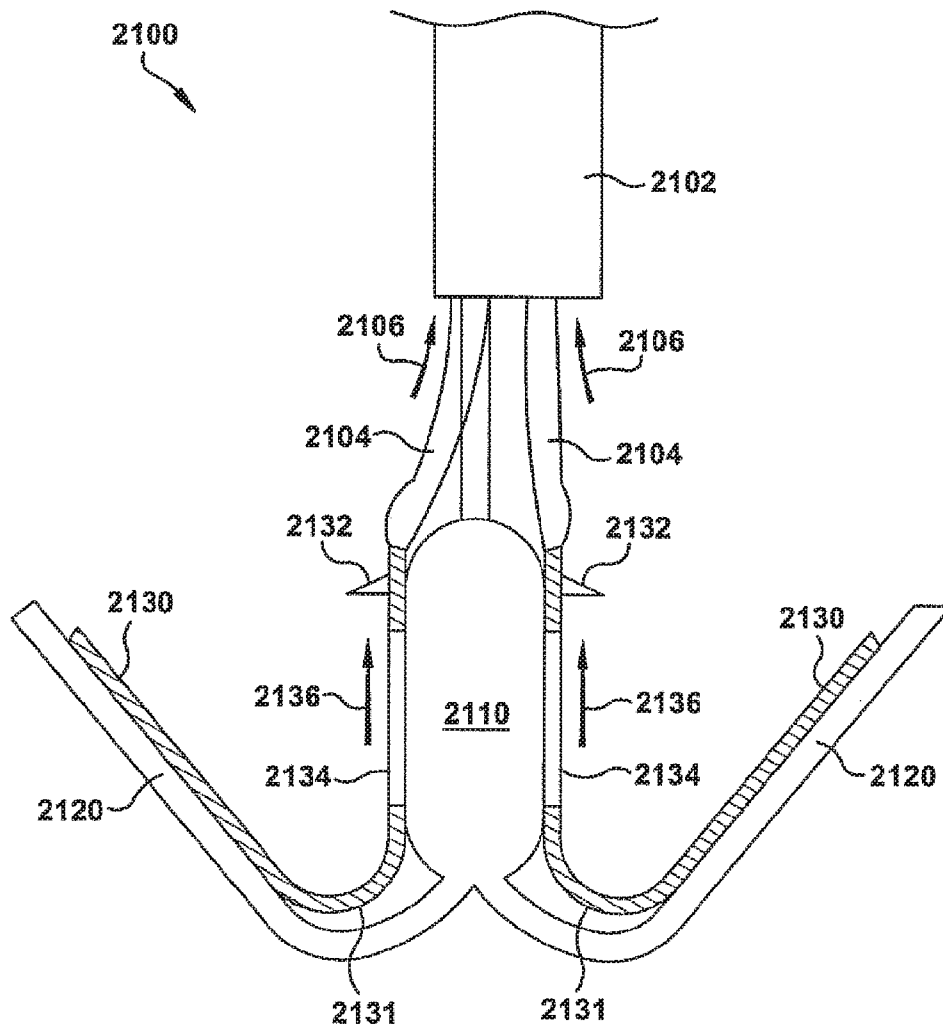


Fig. 137

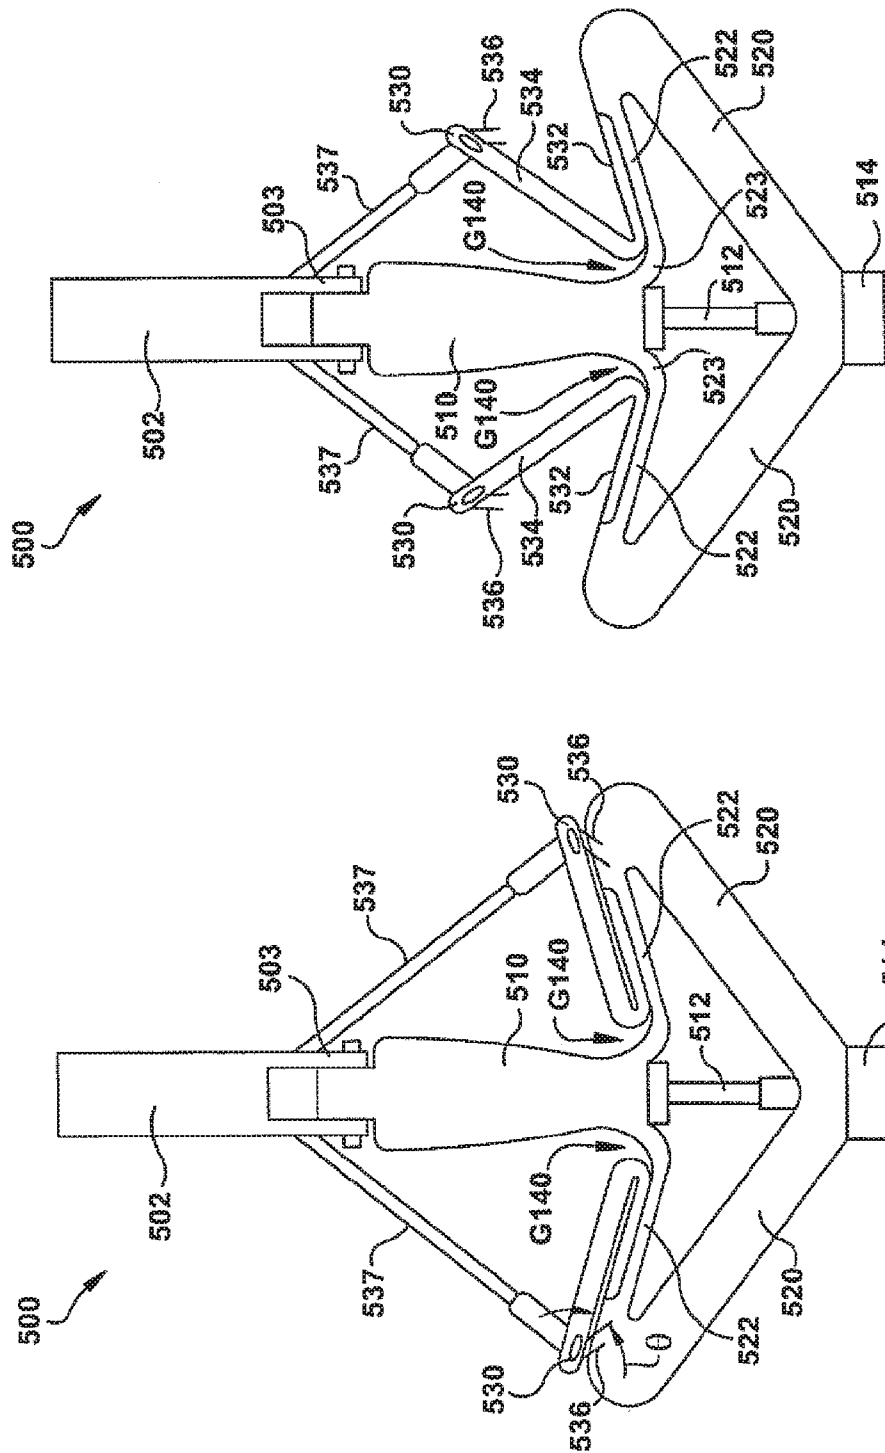


Fig. 139

Fig. 138

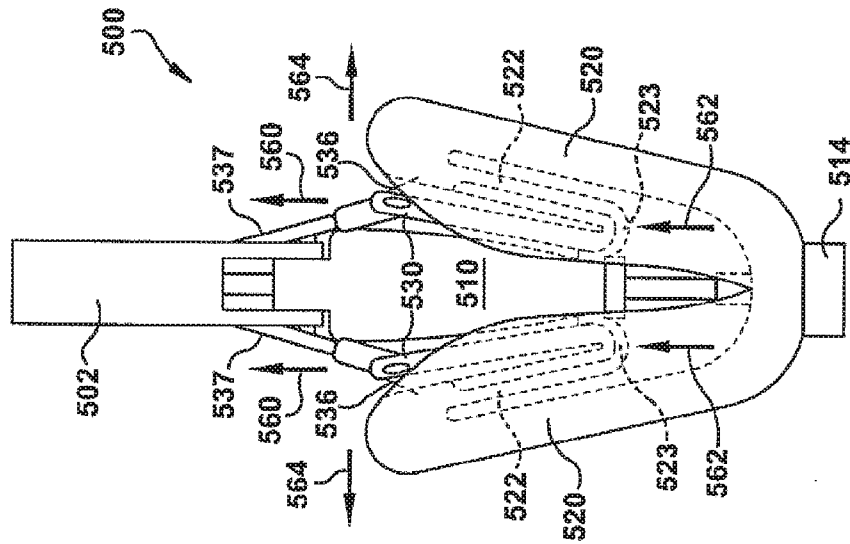


Fig. 143

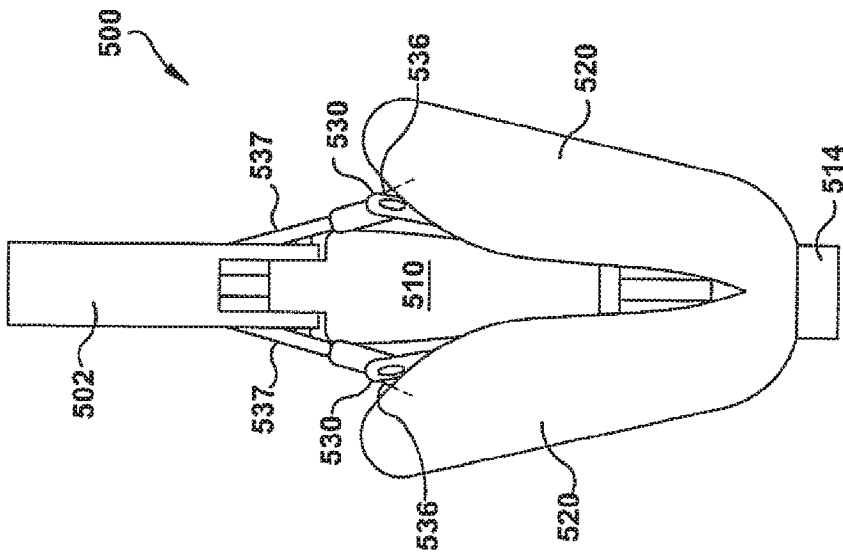
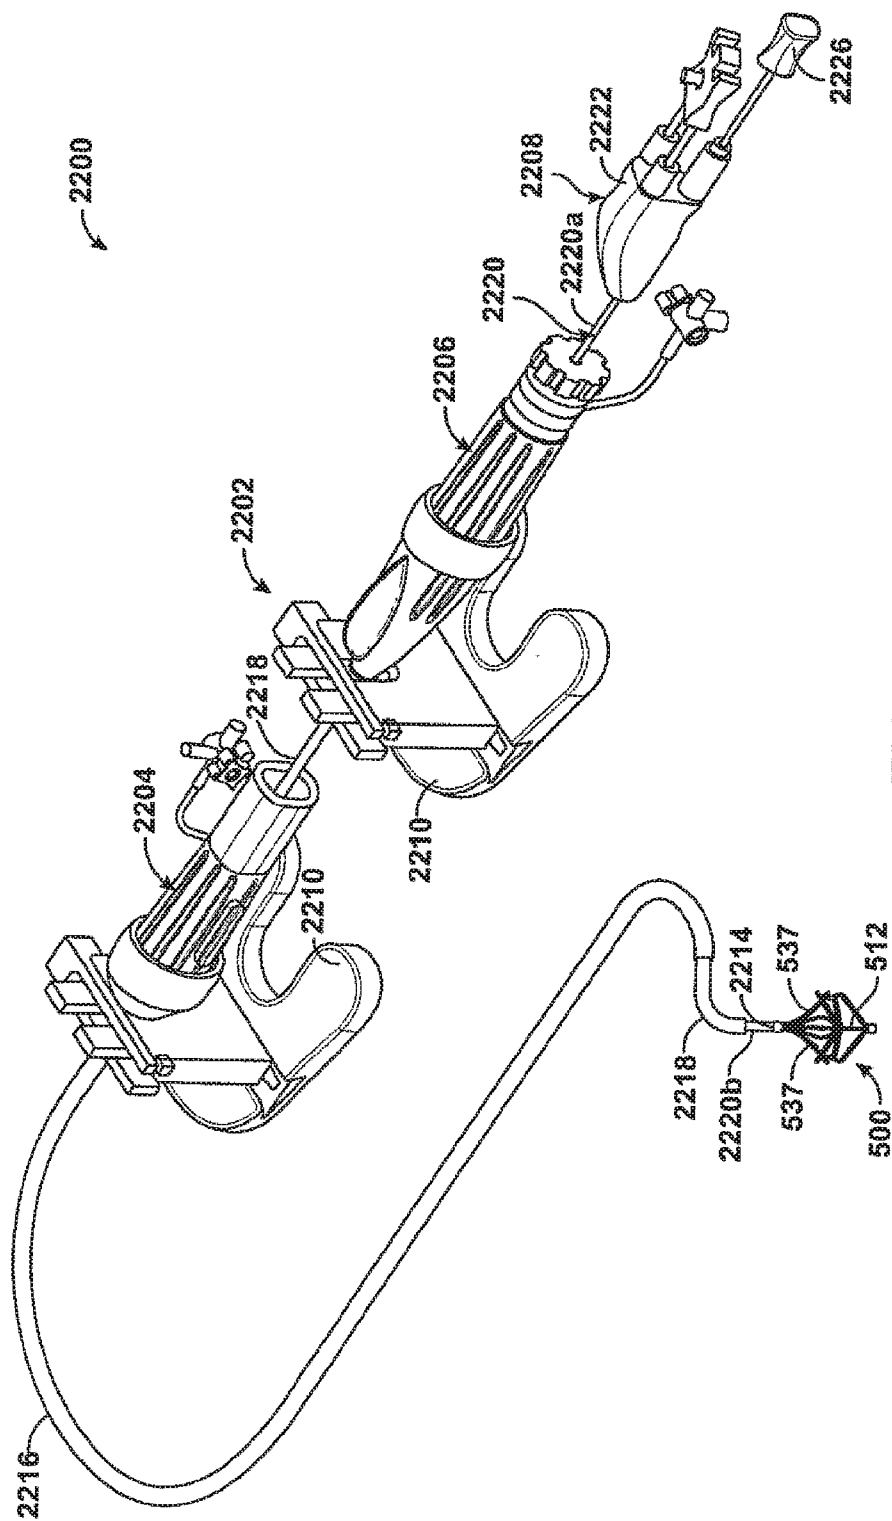
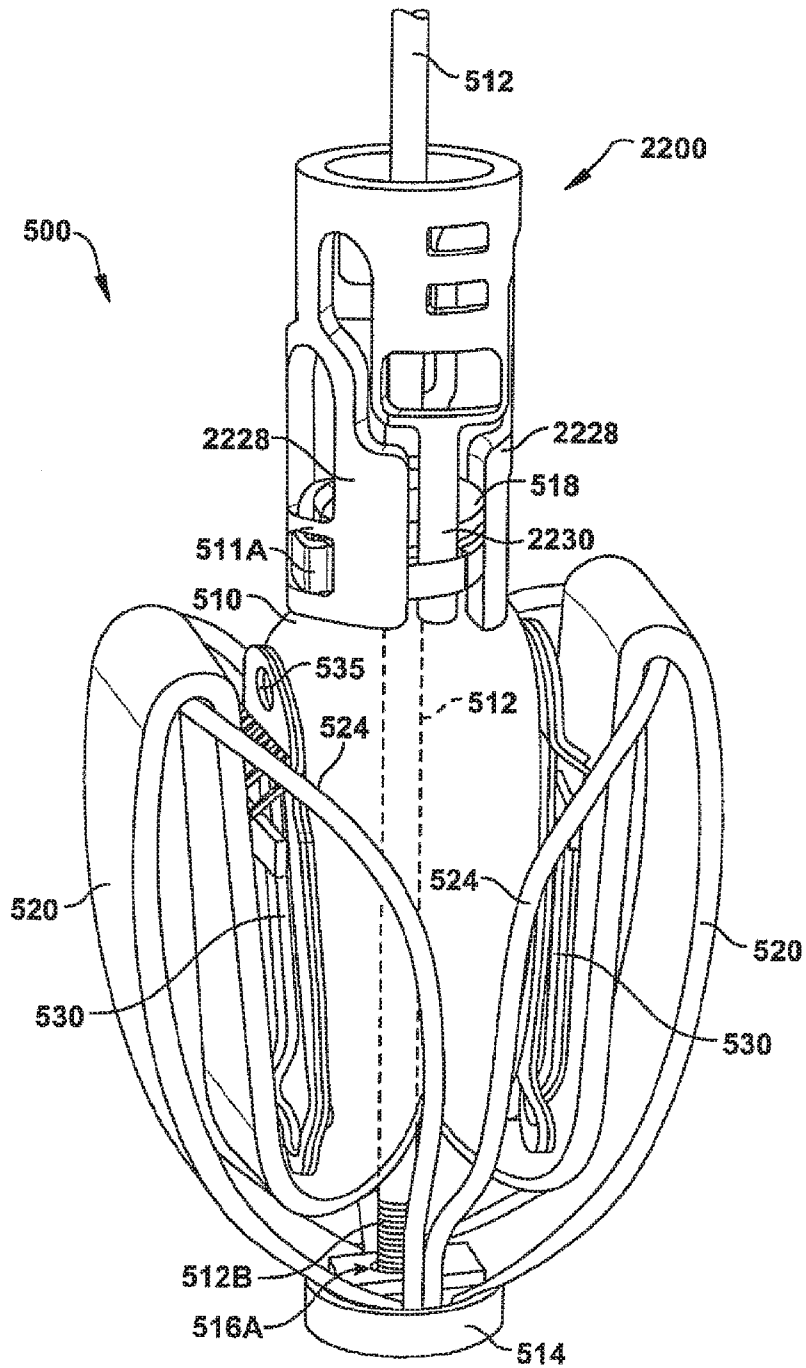


Fig. 142

14
G
L

**FIG.145**

173/262

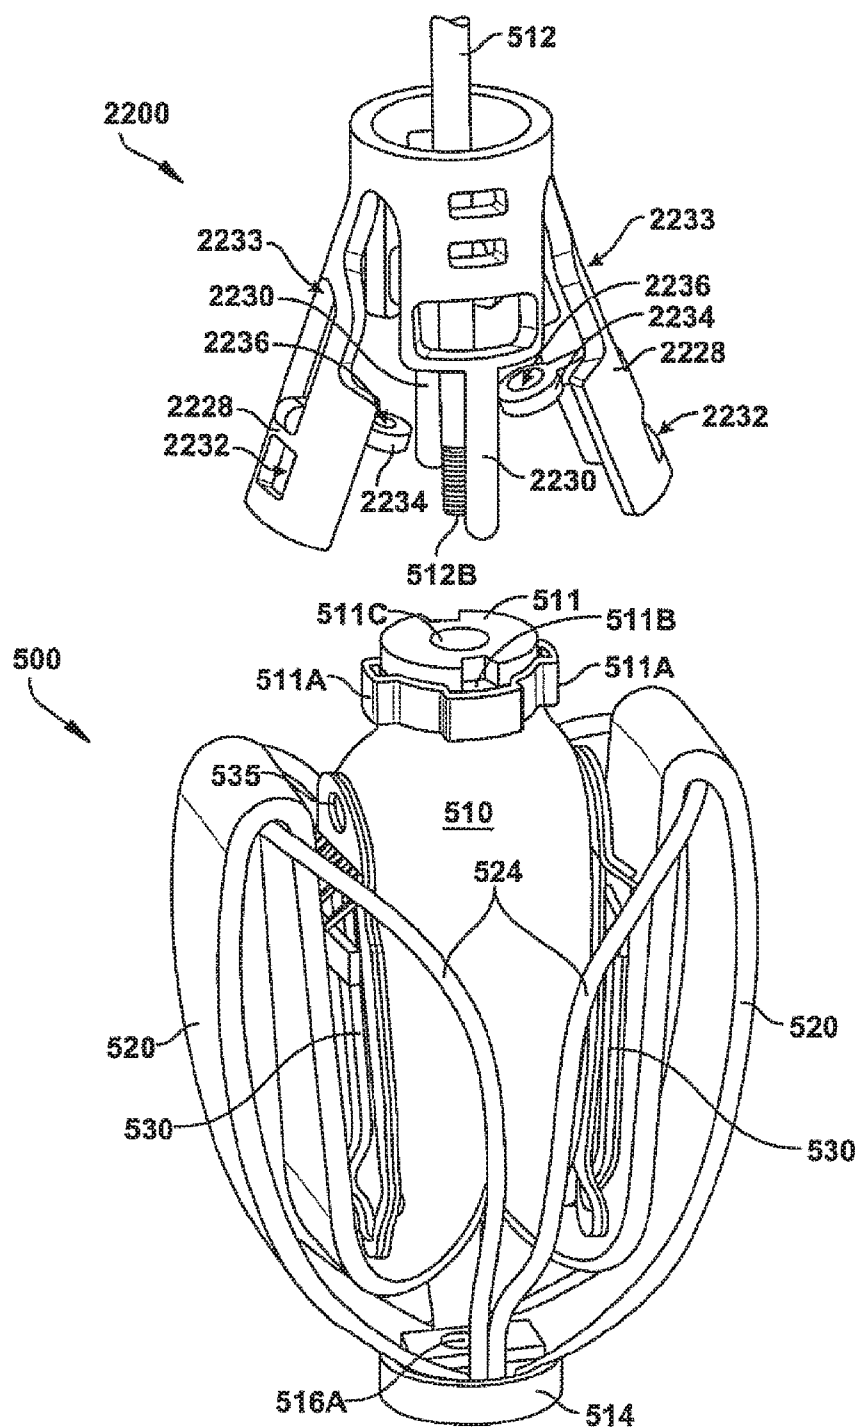


FIG.146

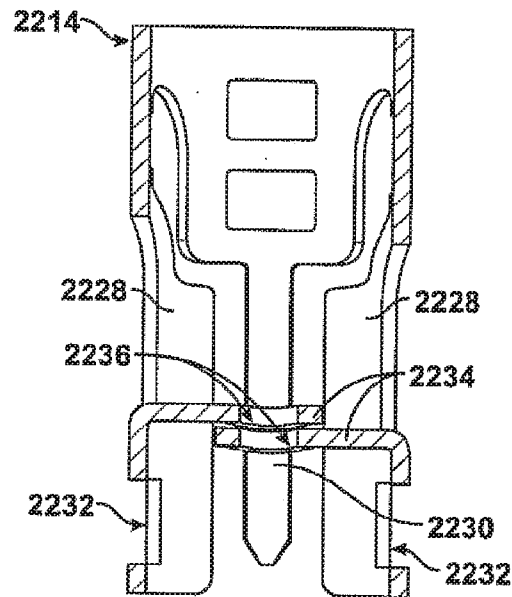


FIG. 147

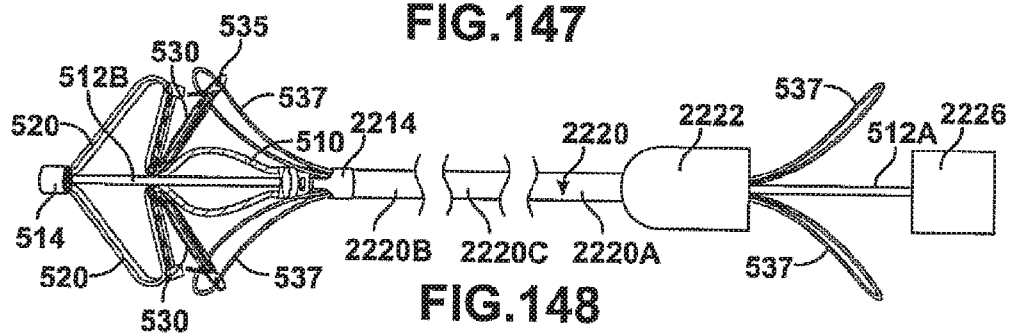


FIG. 148

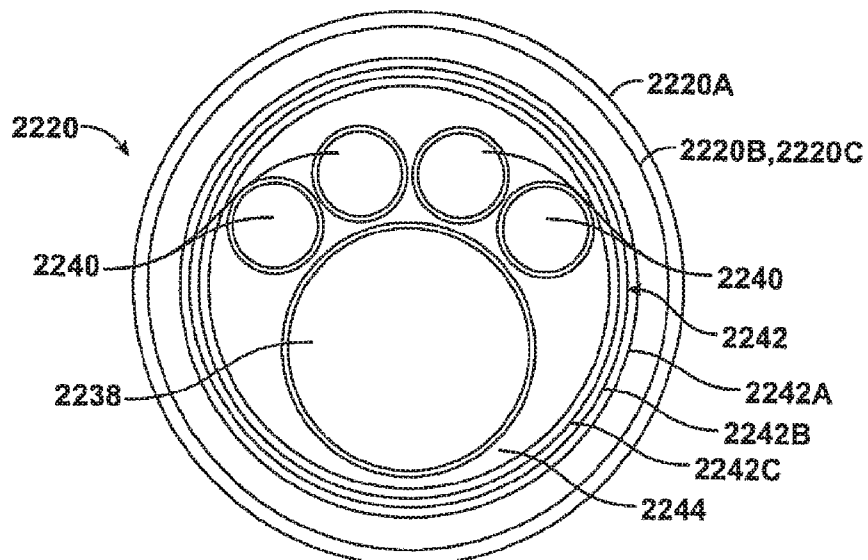


FIG. 149

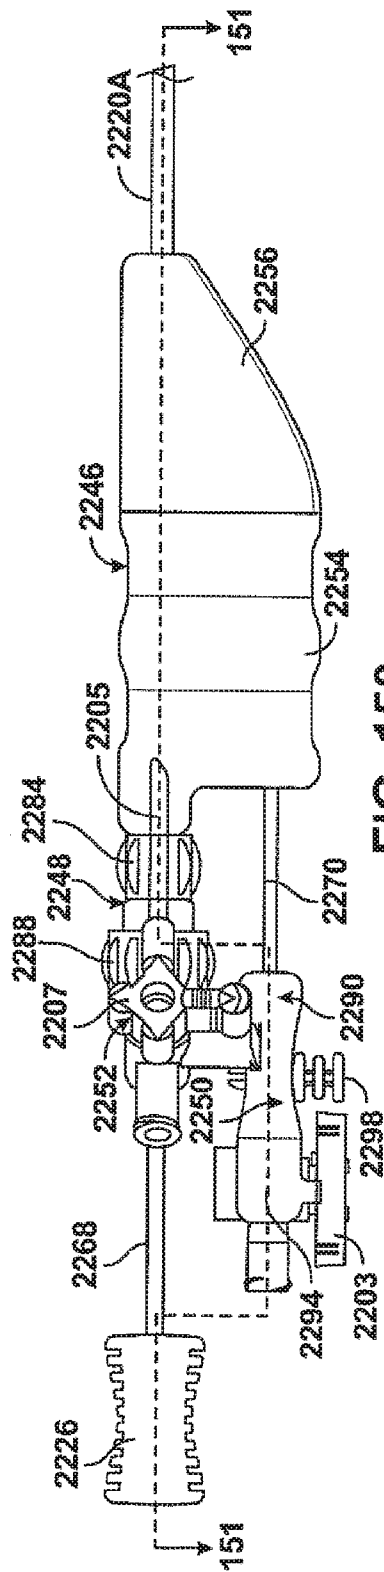


FIG. 150

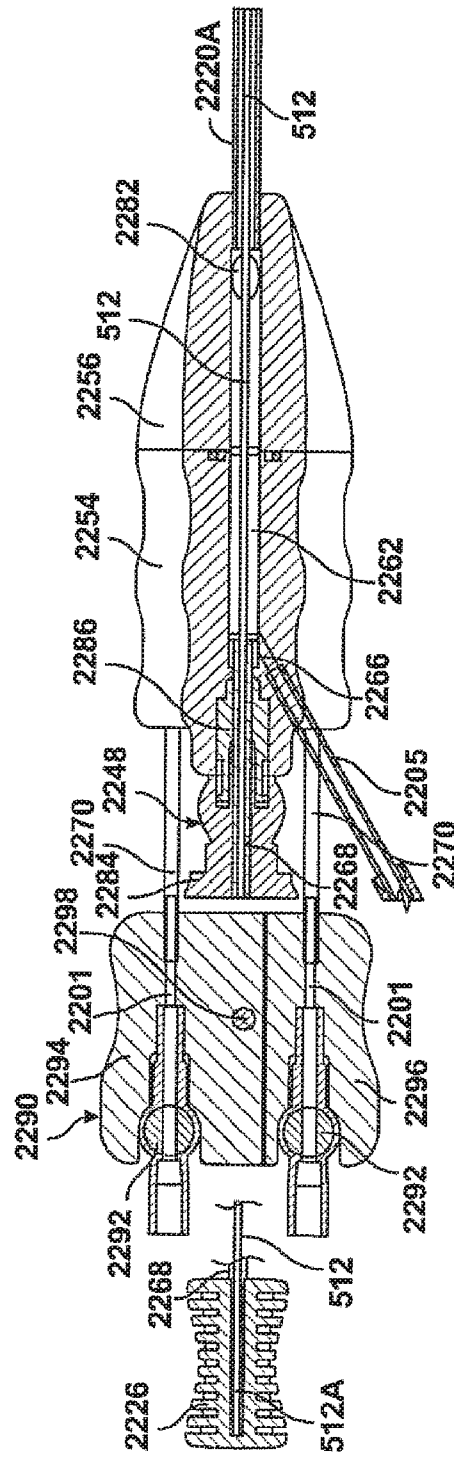


FIG. 151

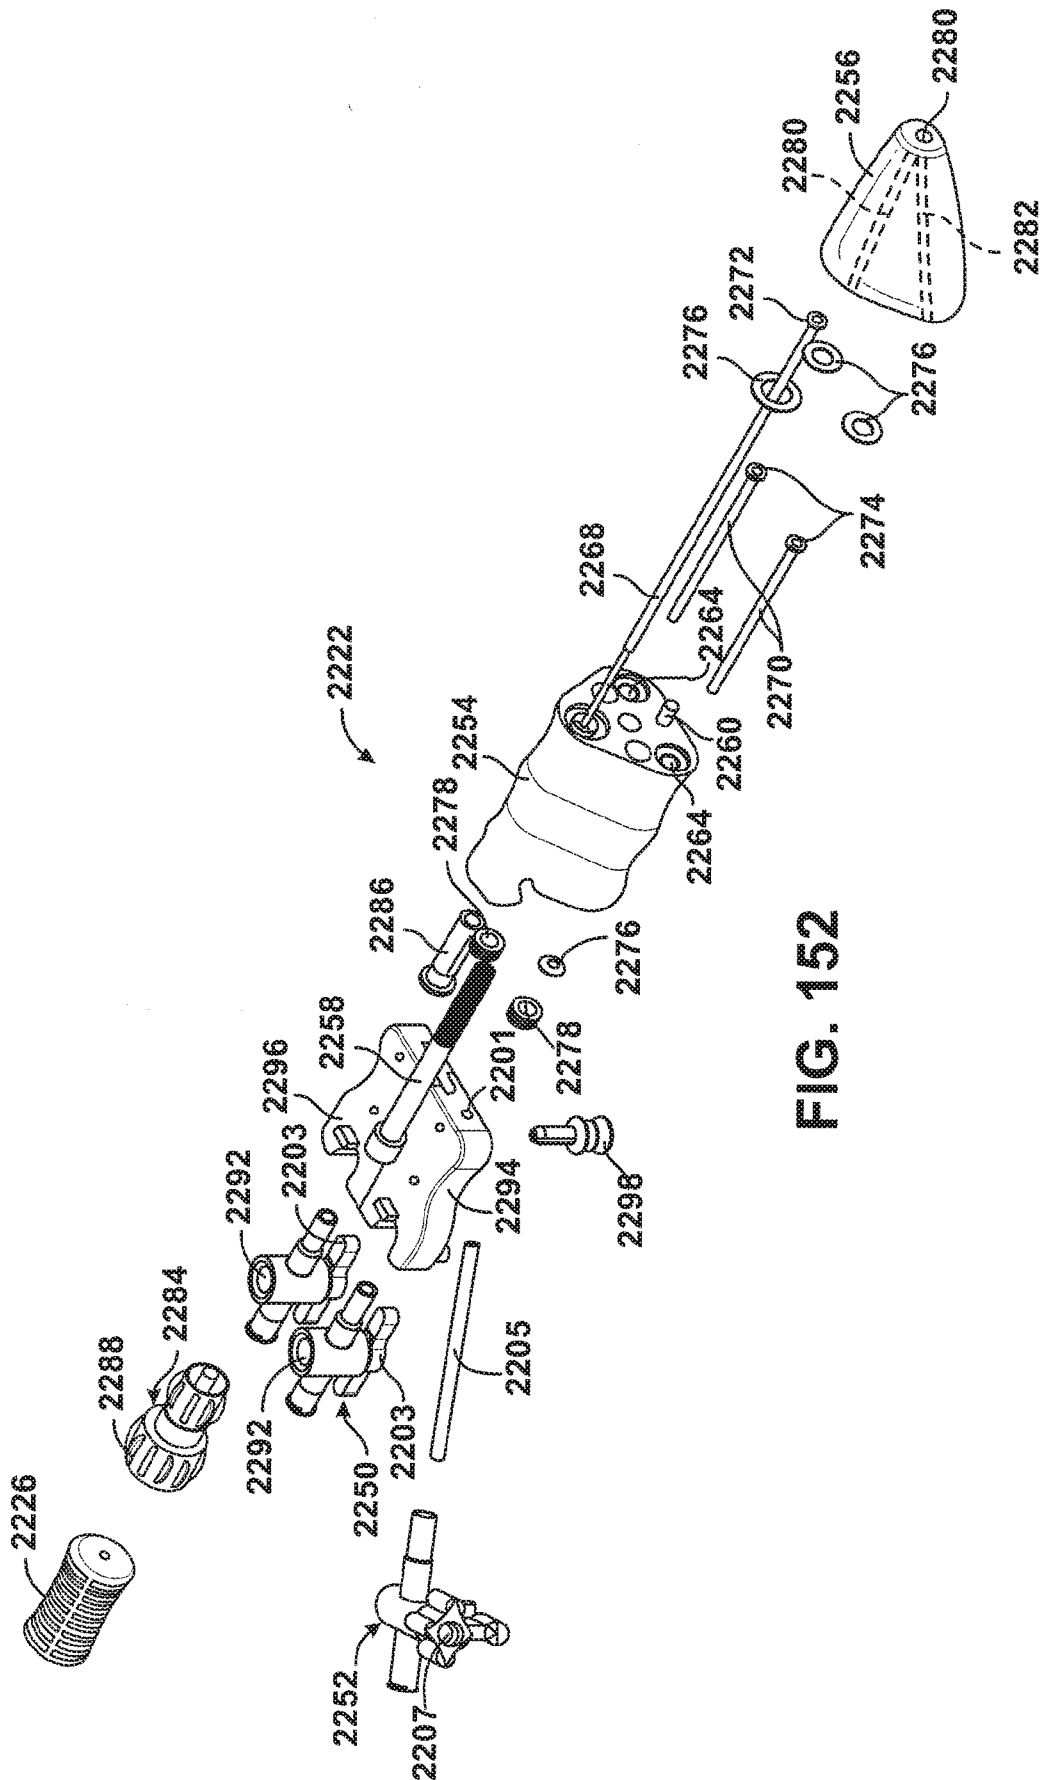
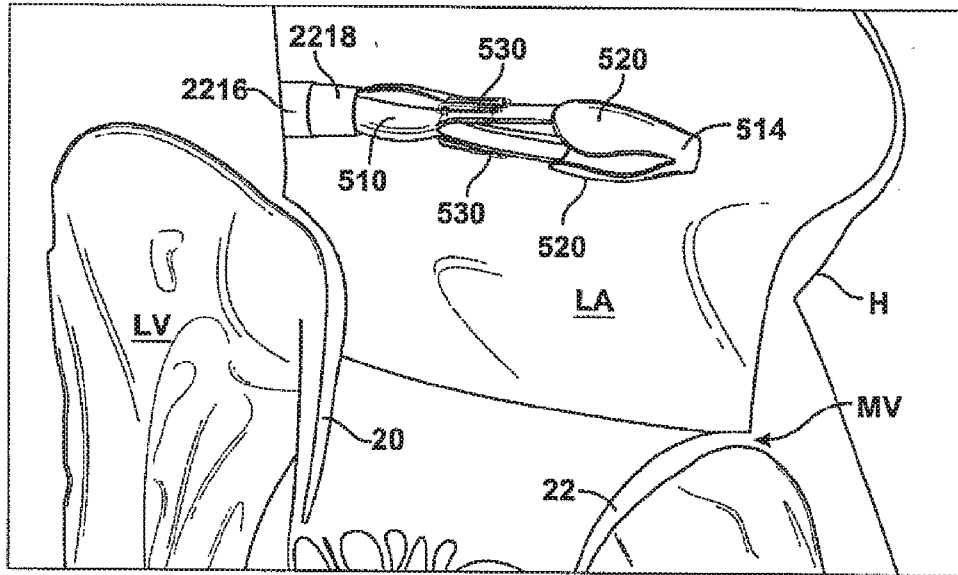
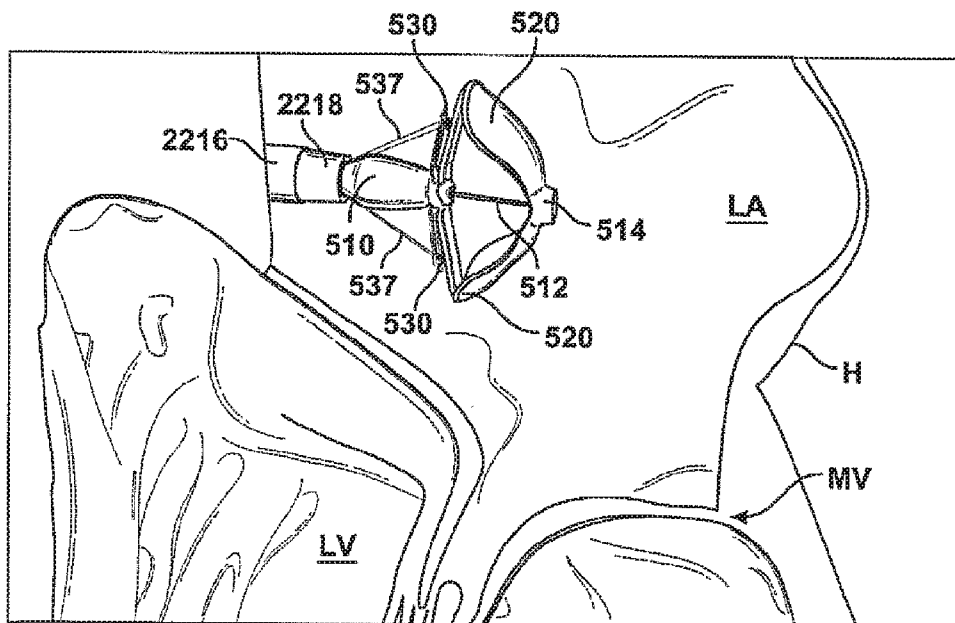


FIG. 152

177/262

**Fig. 153****Fig. 154**

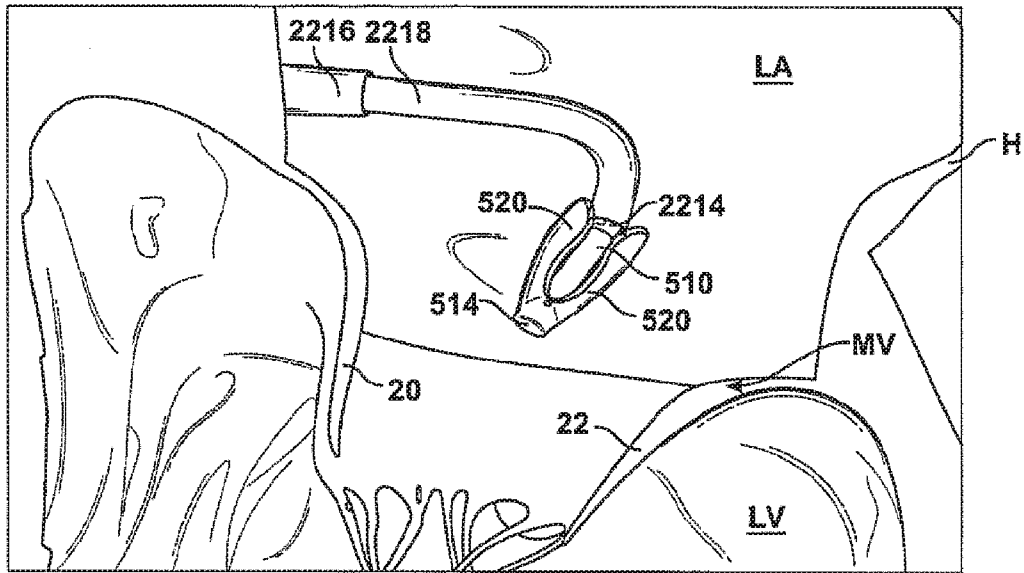


Fig. 155









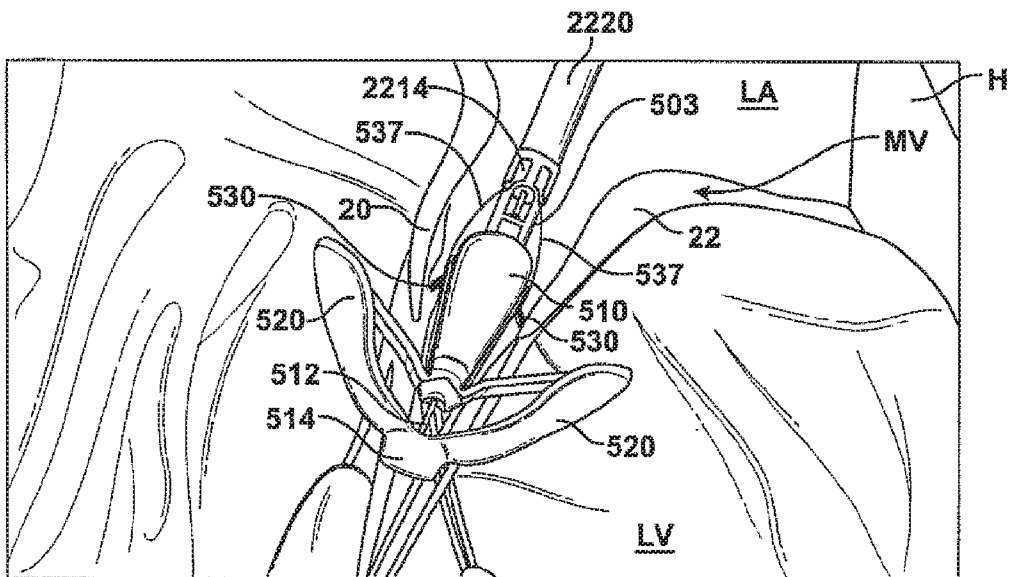


Fig. 156



**Fig. 157****Fig. 158**



**Fig. 159****Fig. 160**

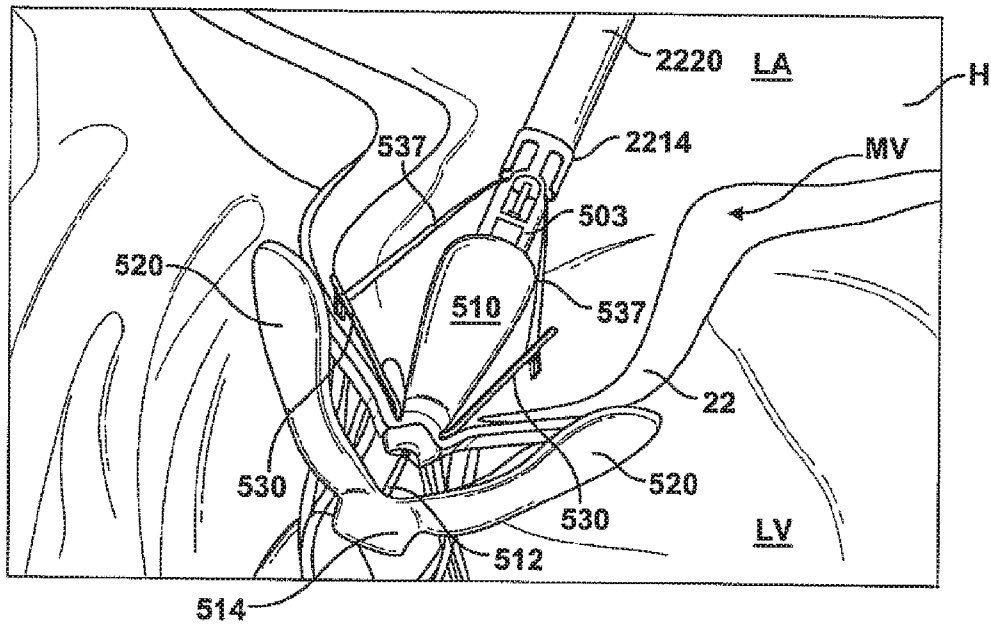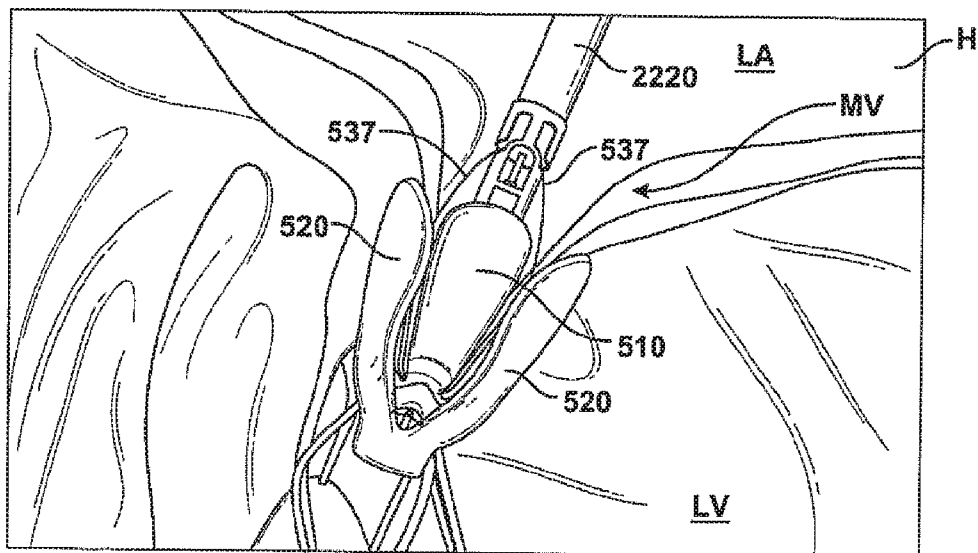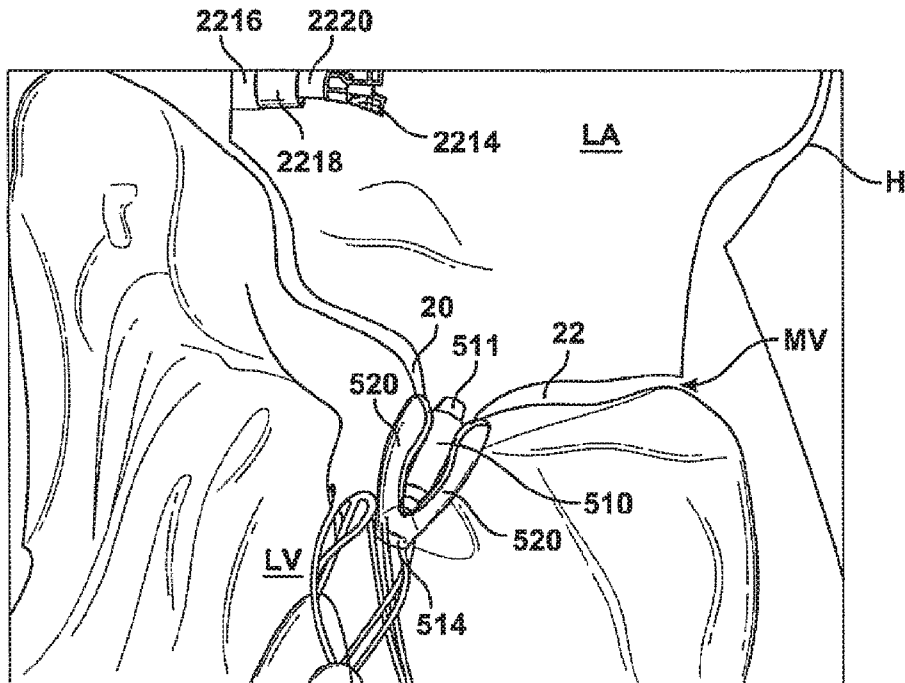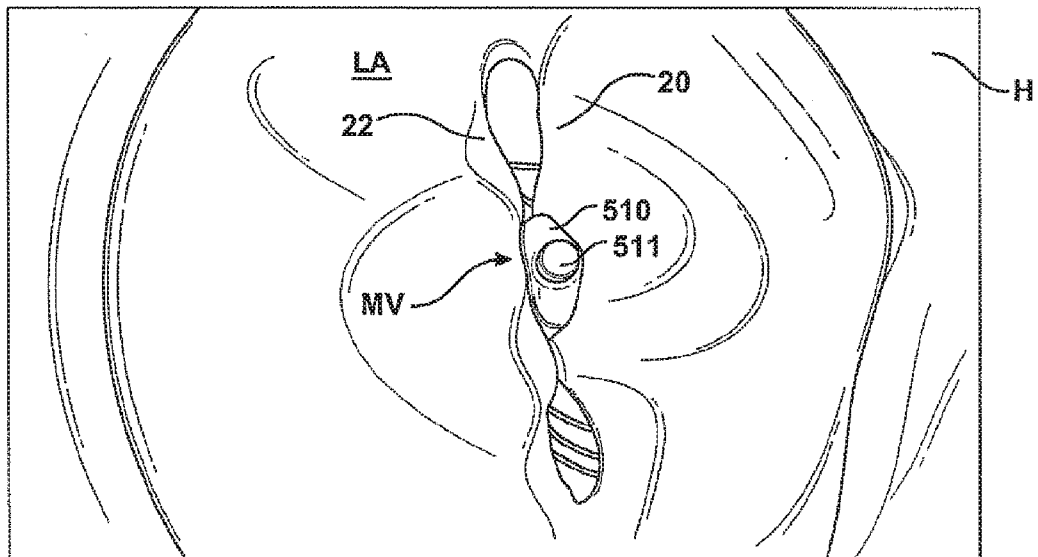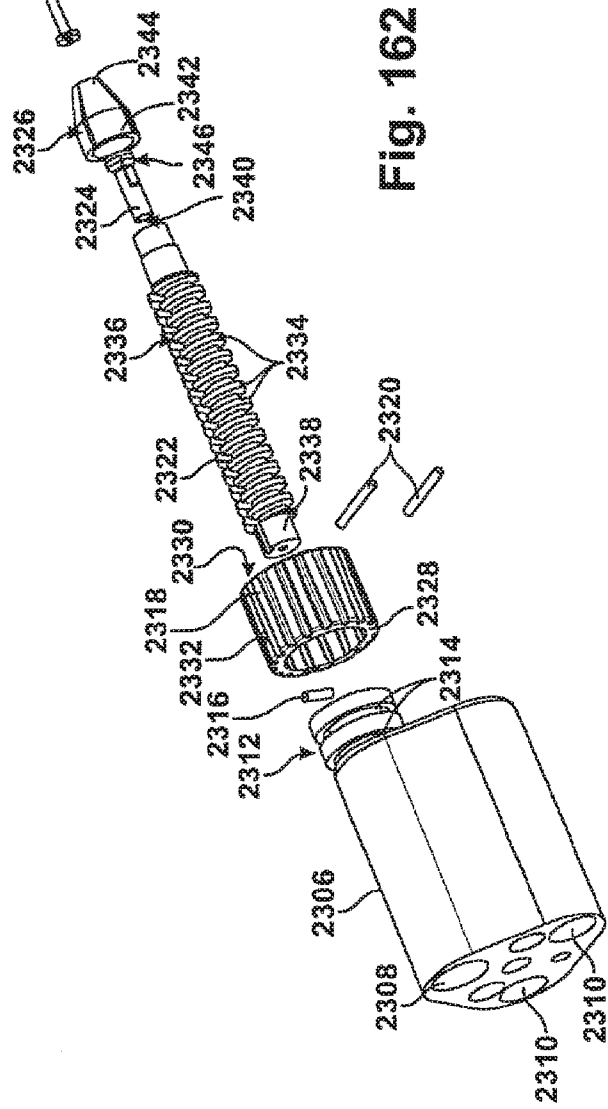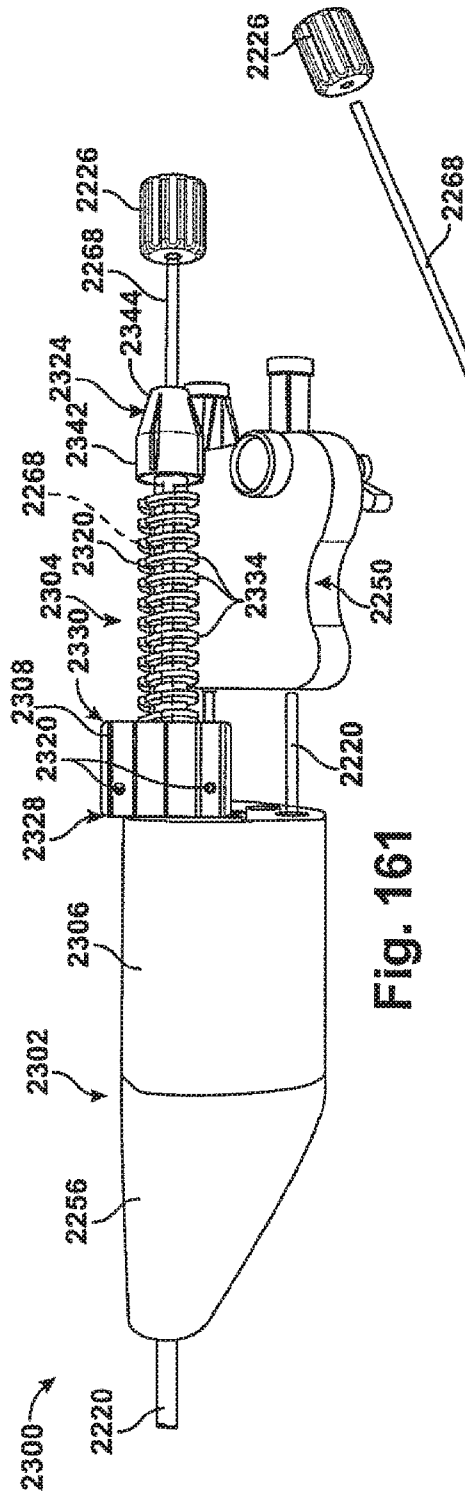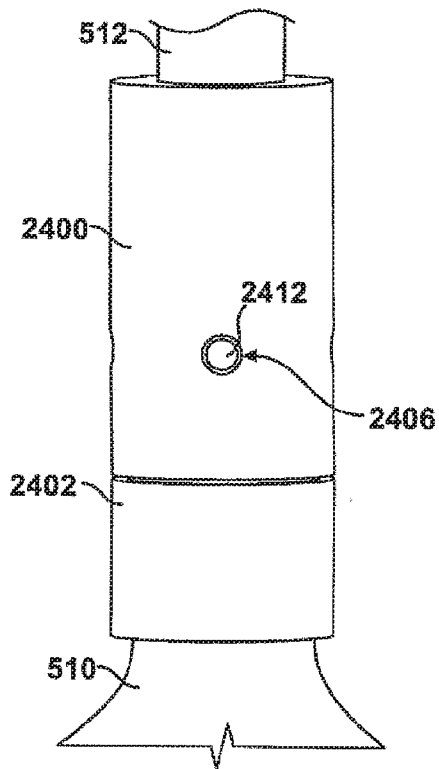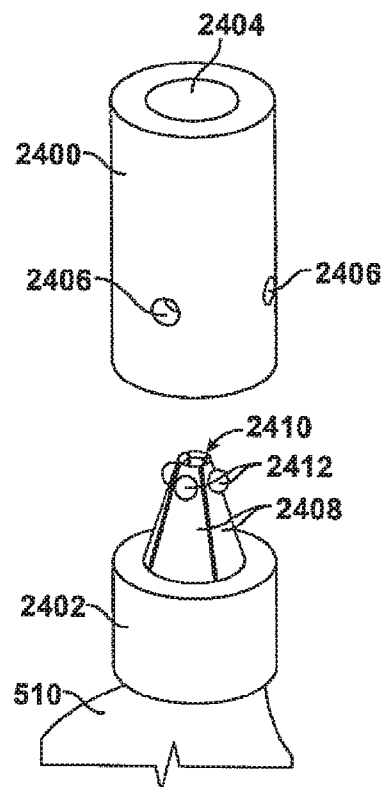

**Fig. 163****Fig. 164**

183/262

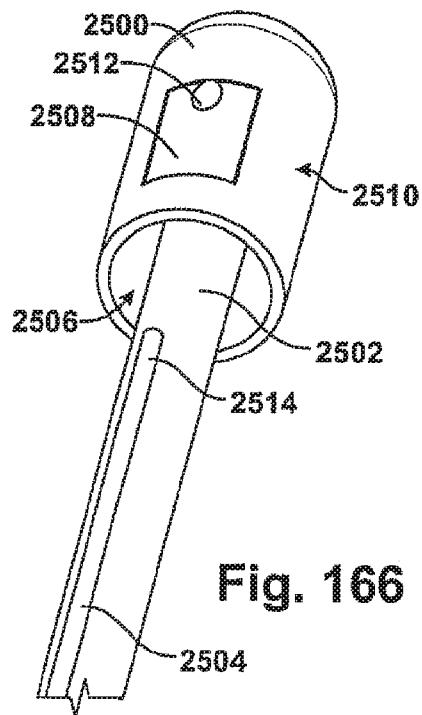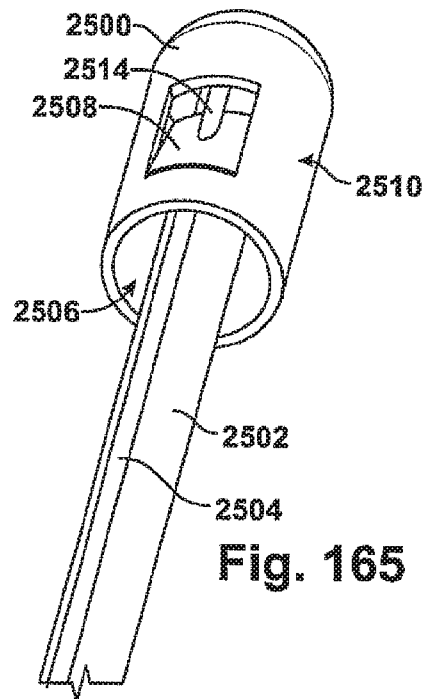

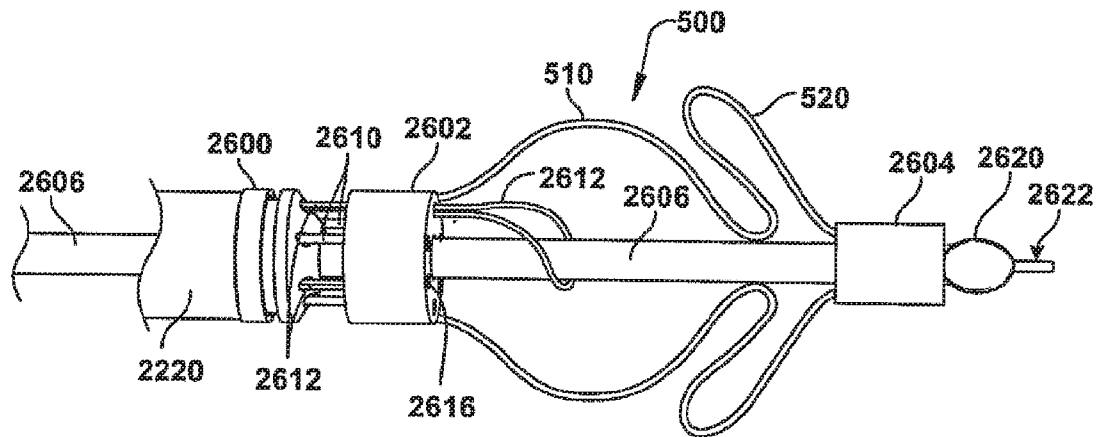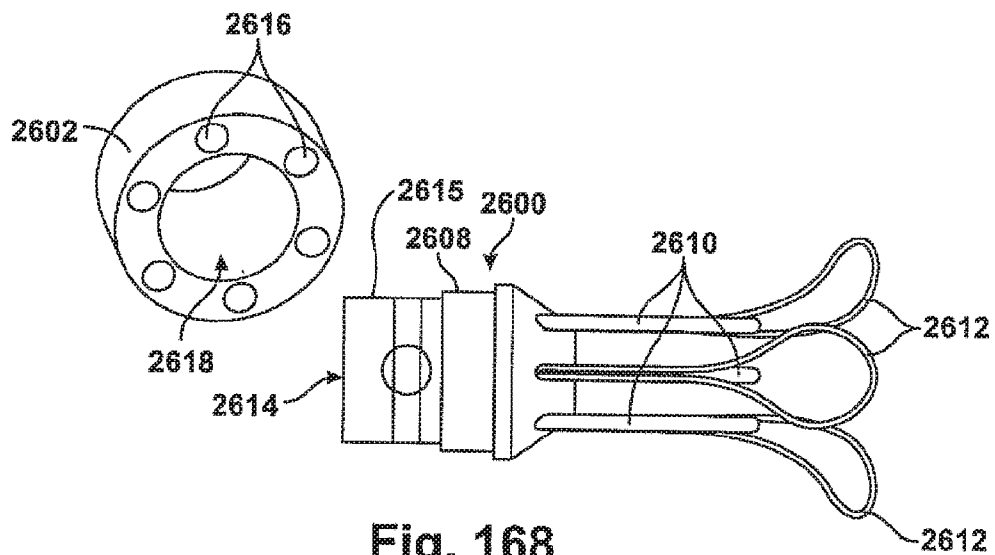**Fig. 167****Fig. 168**

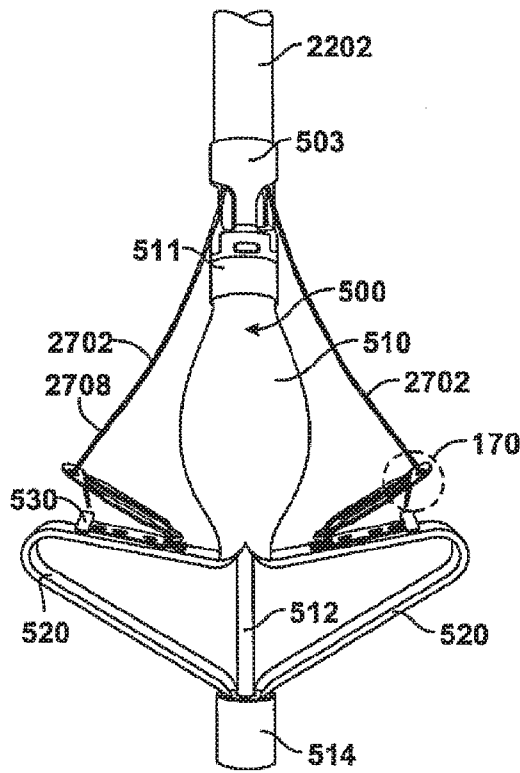


Fig. 169

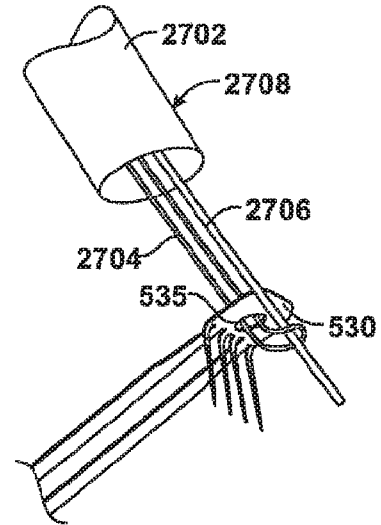


Fig. 170

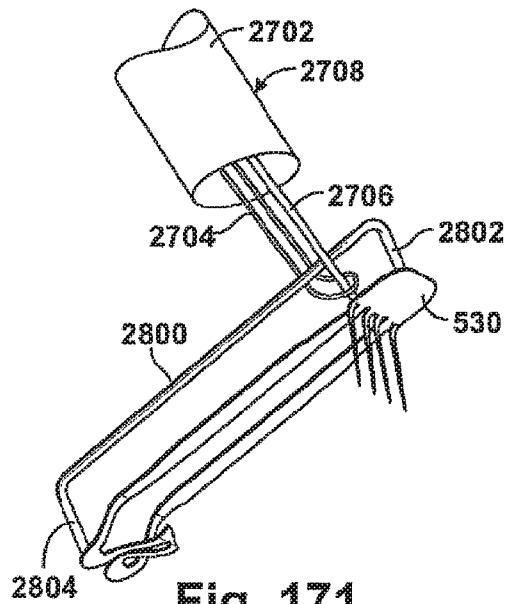


Fig. 171




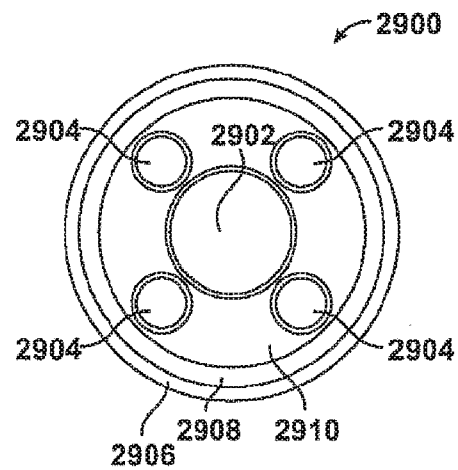



Fig. 172

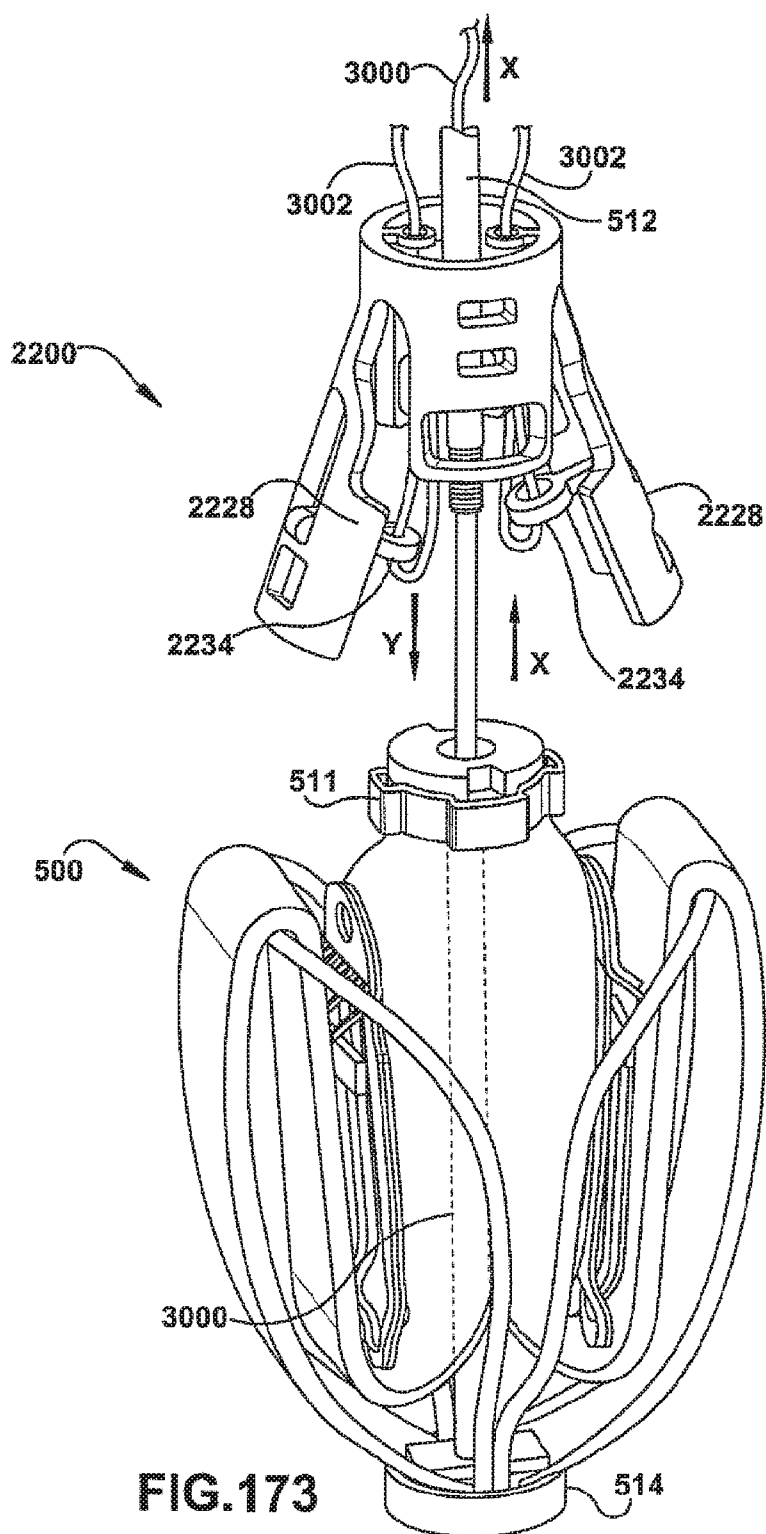

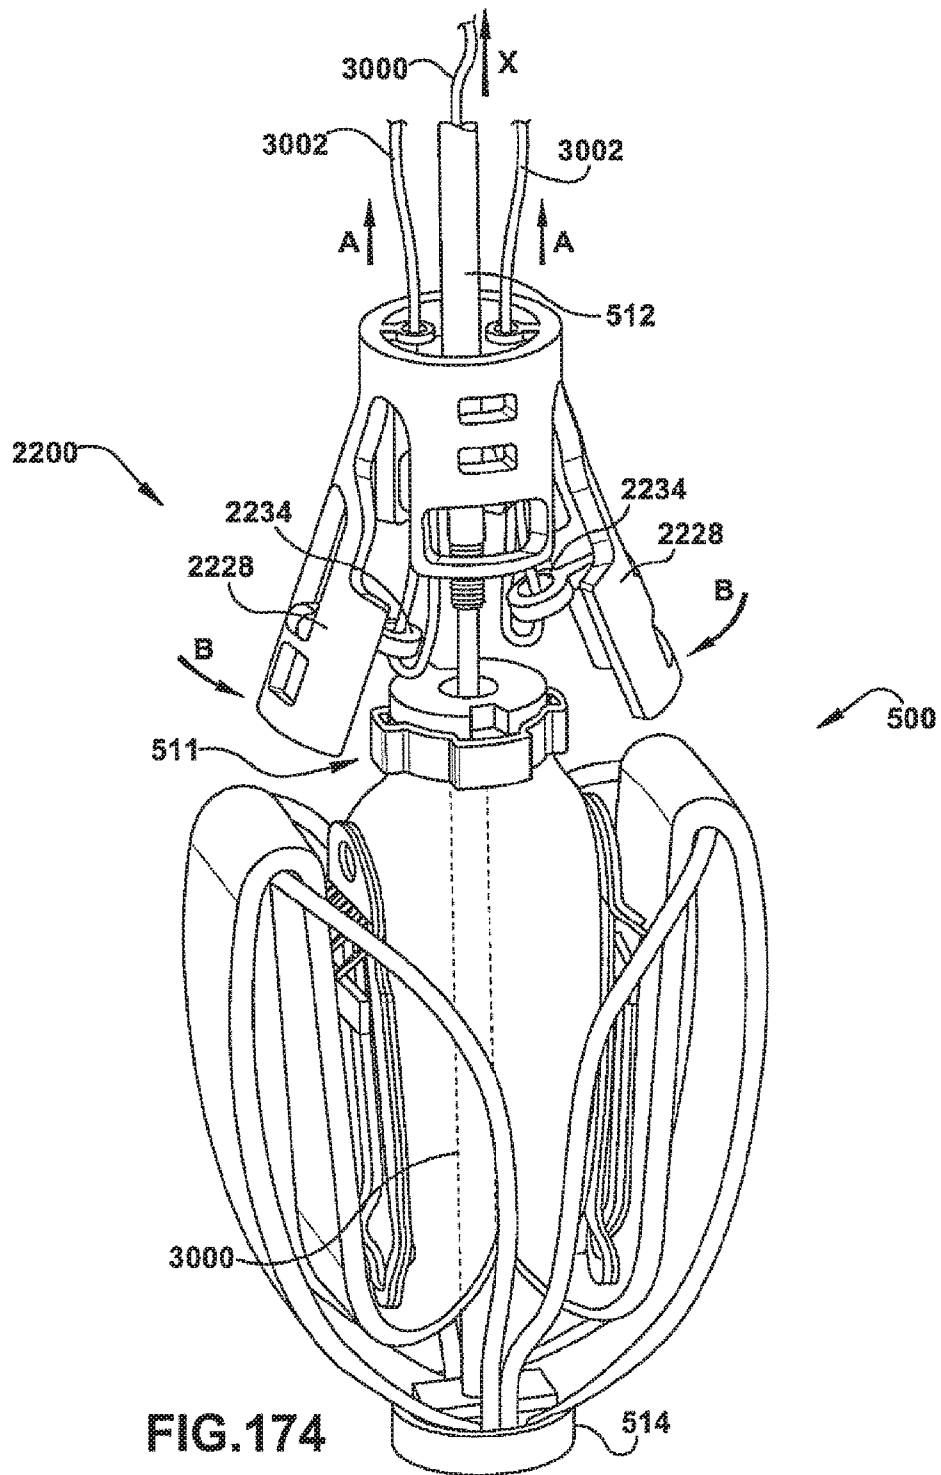

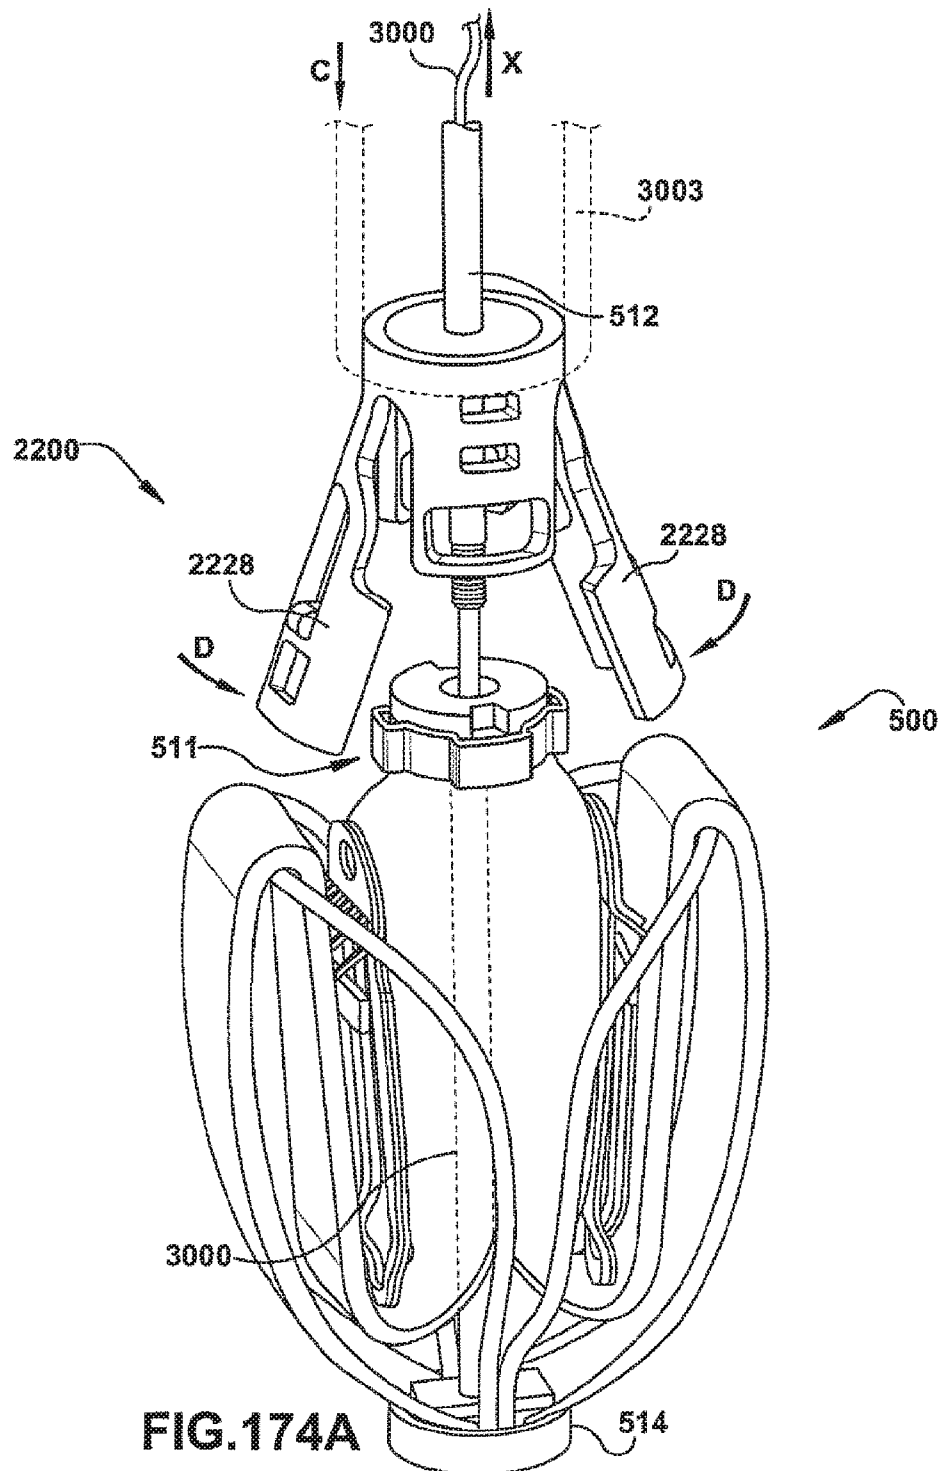

189/262

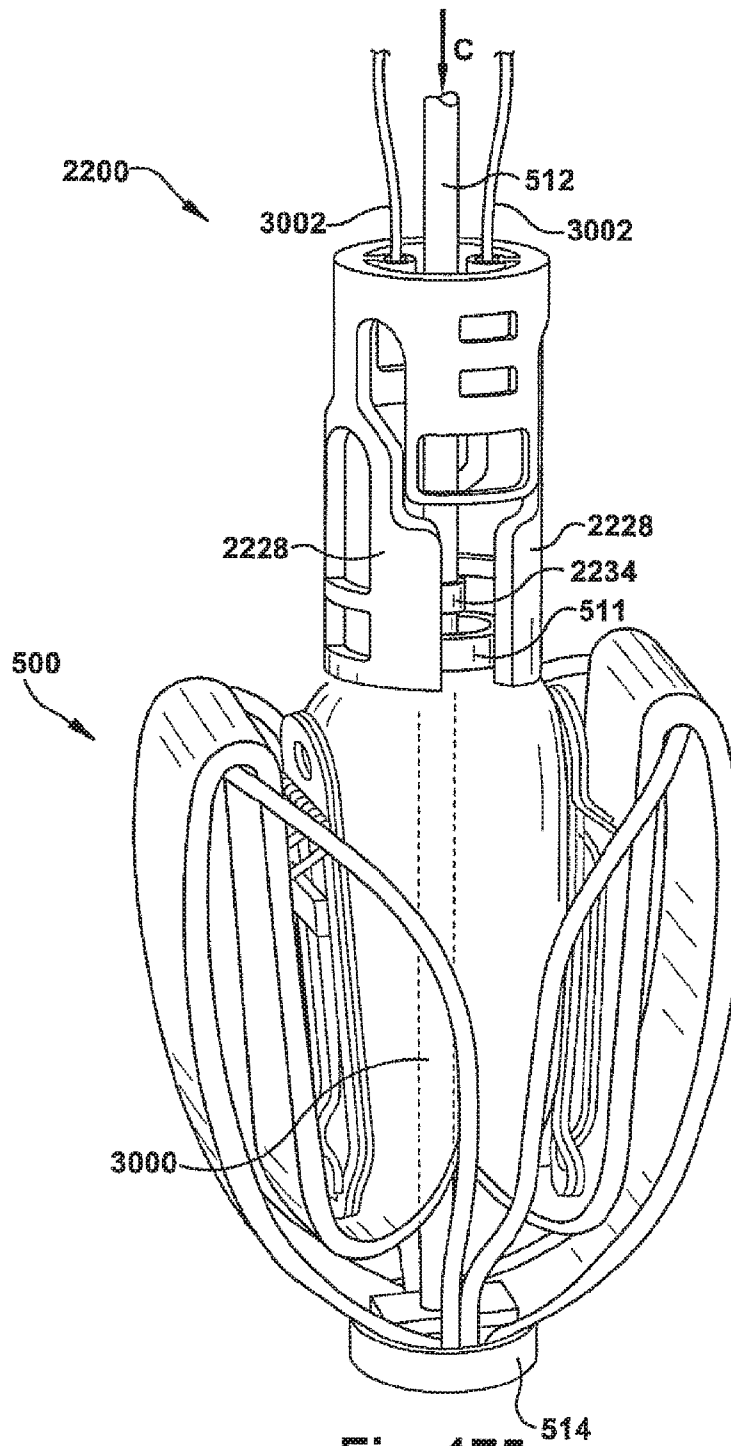

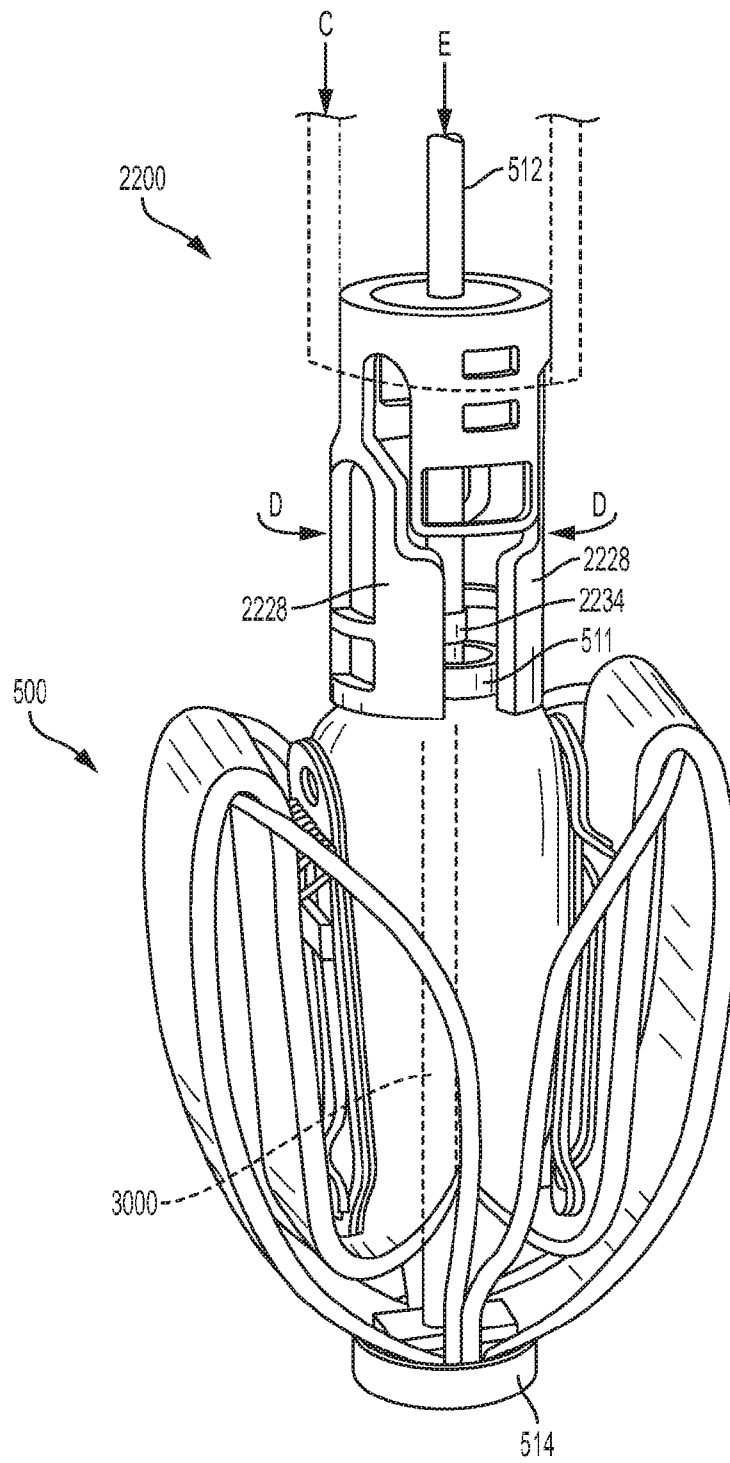
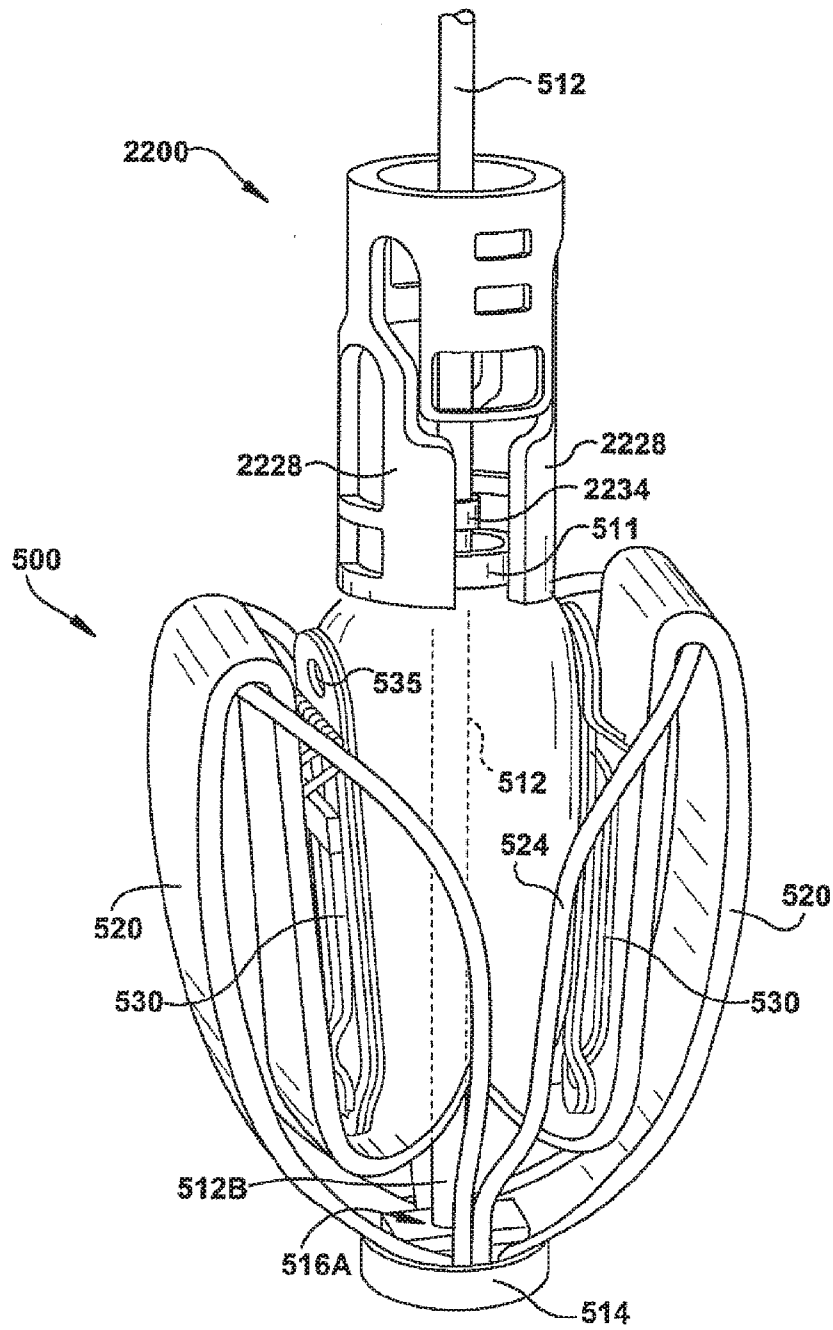


Fig. 175A

**Fig. 176**

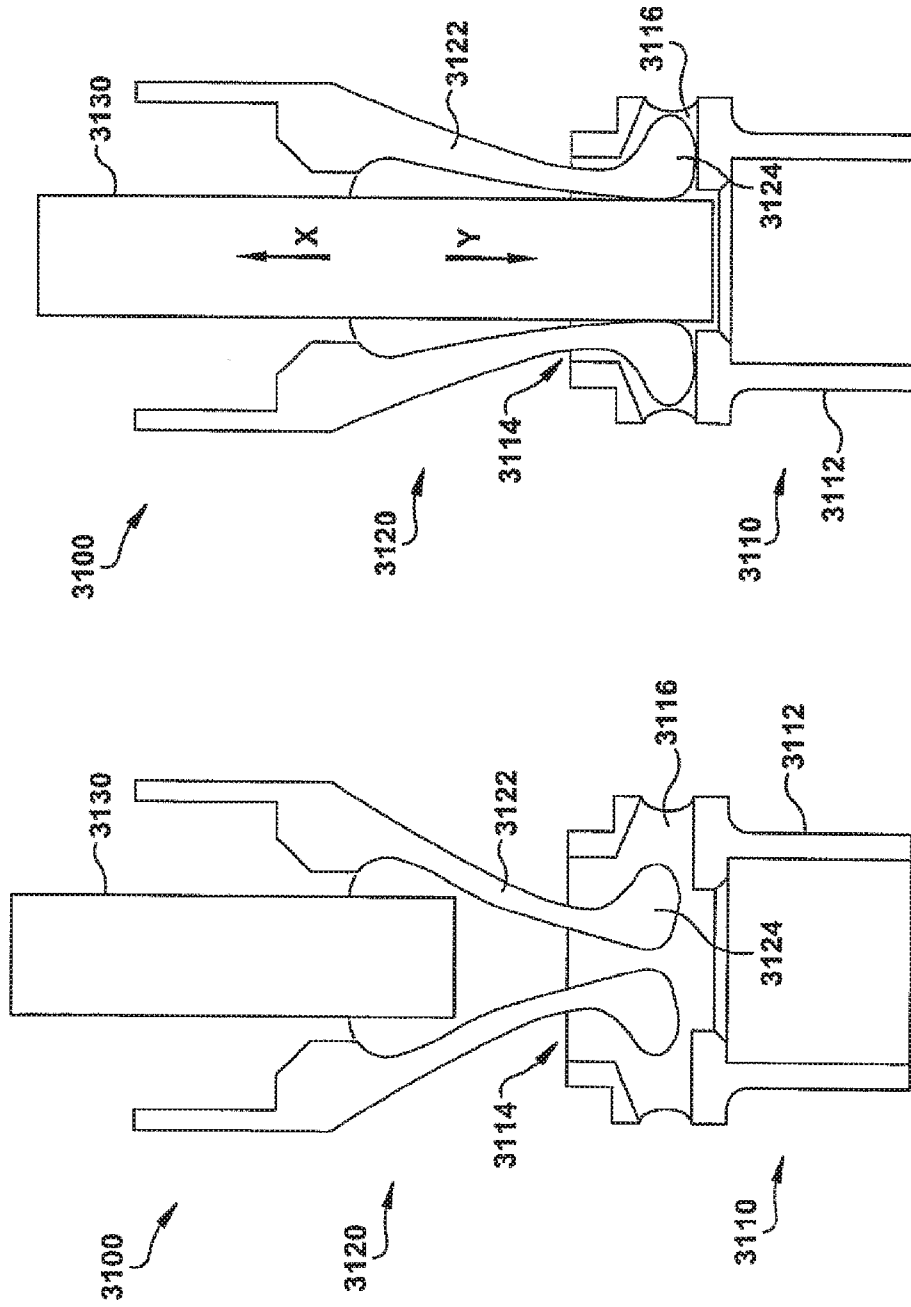
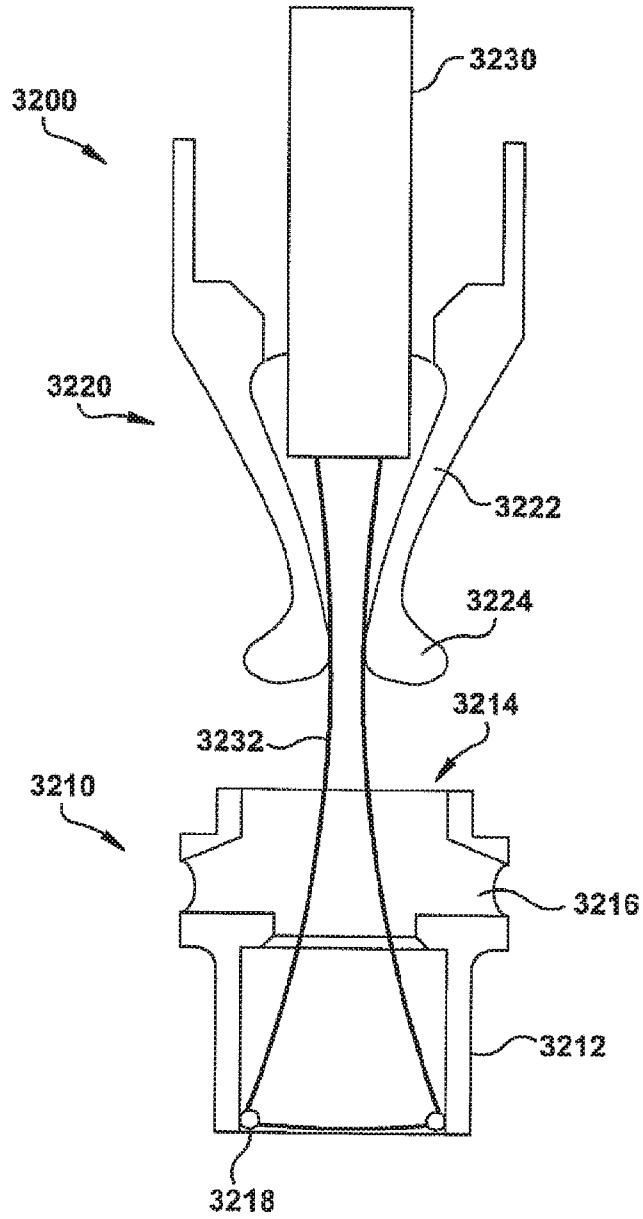
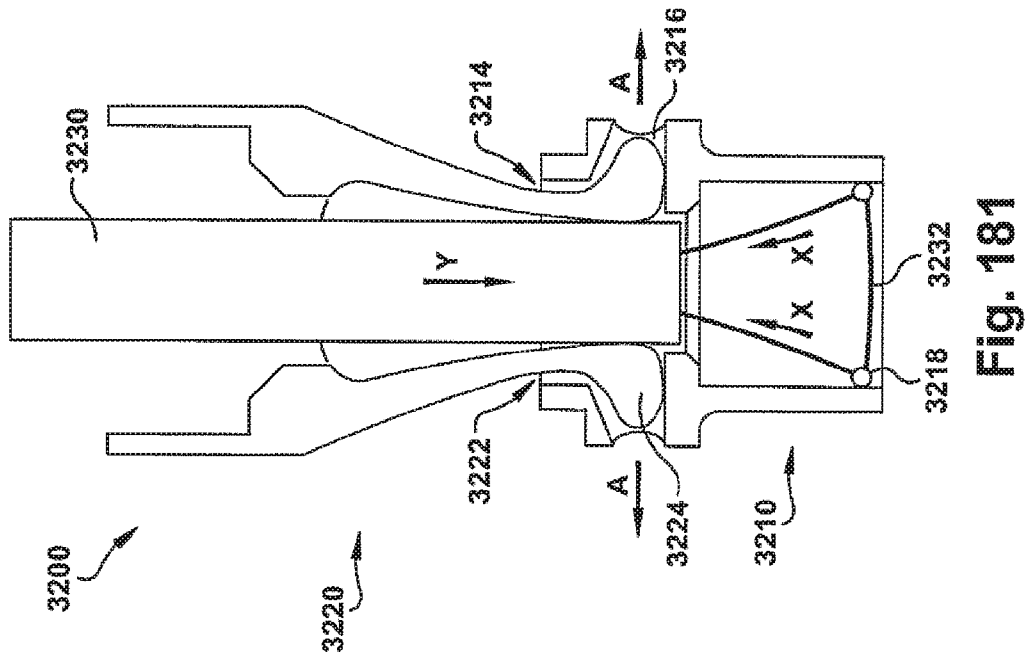
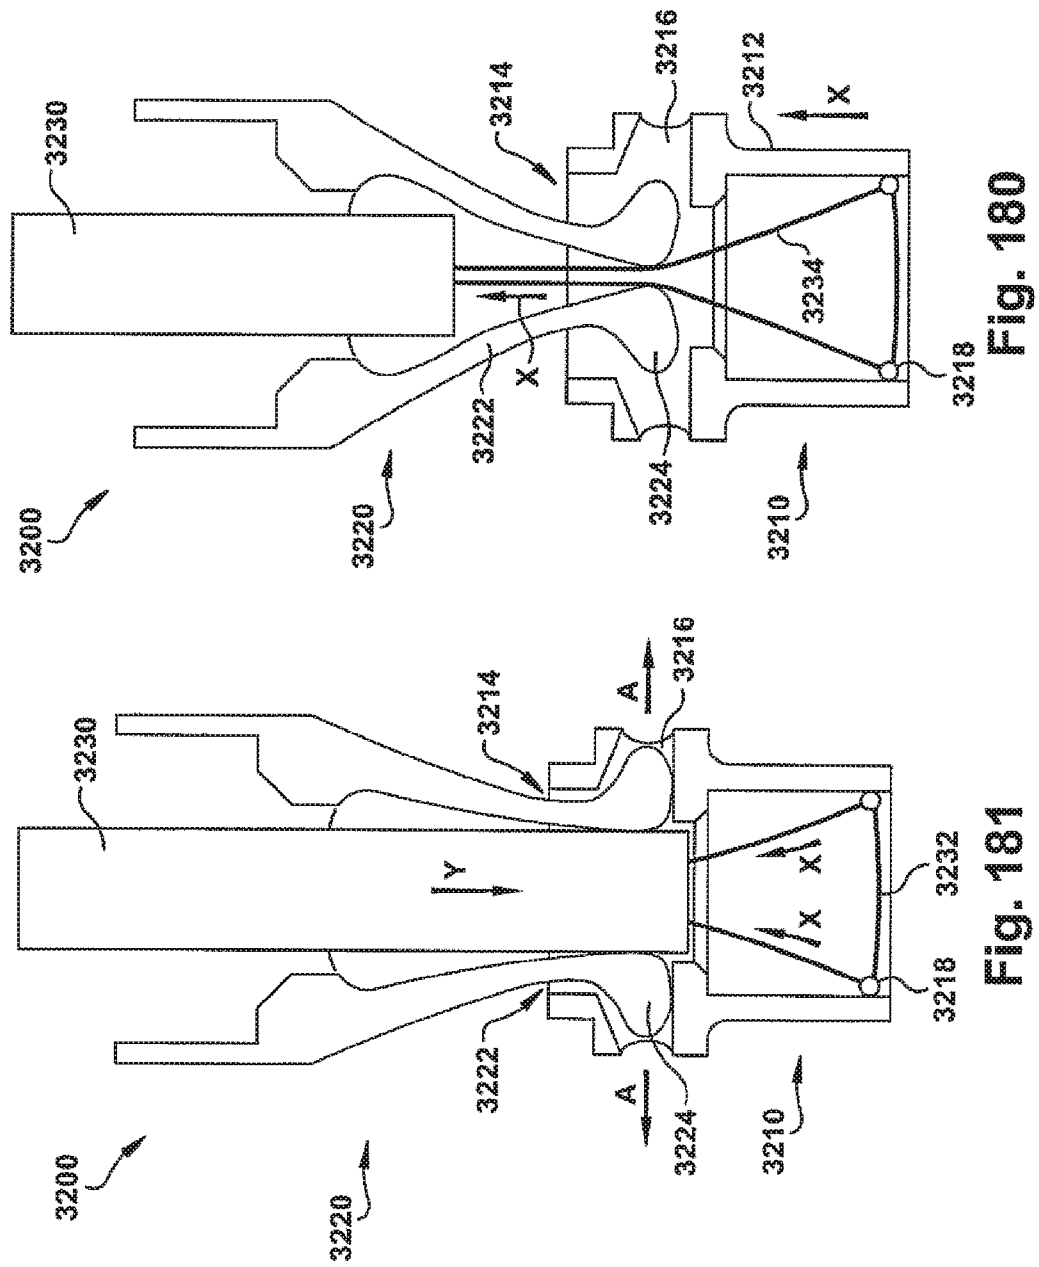
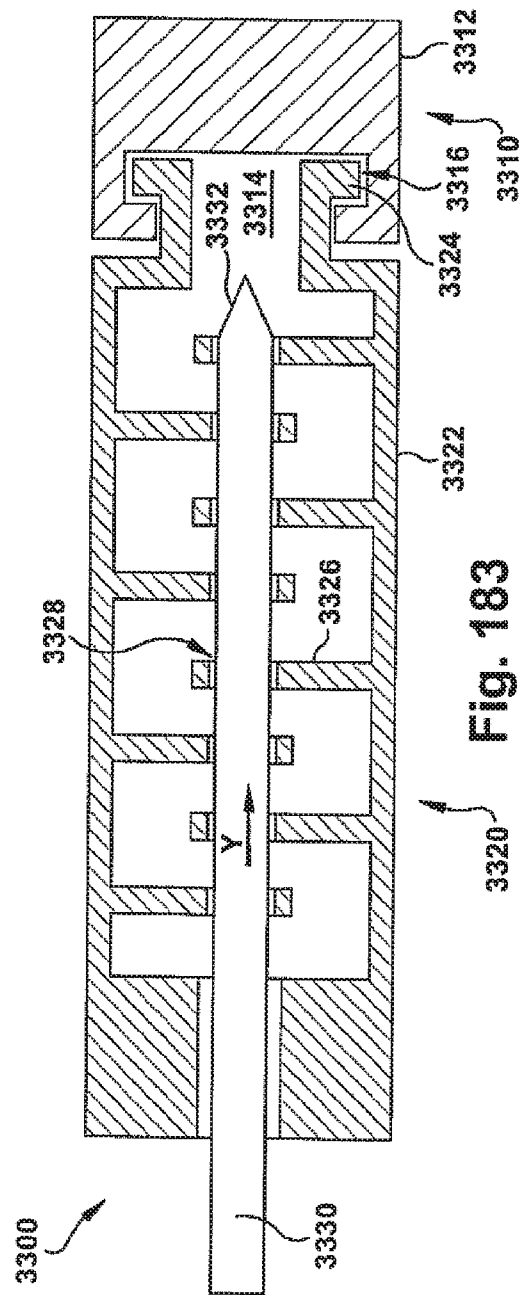
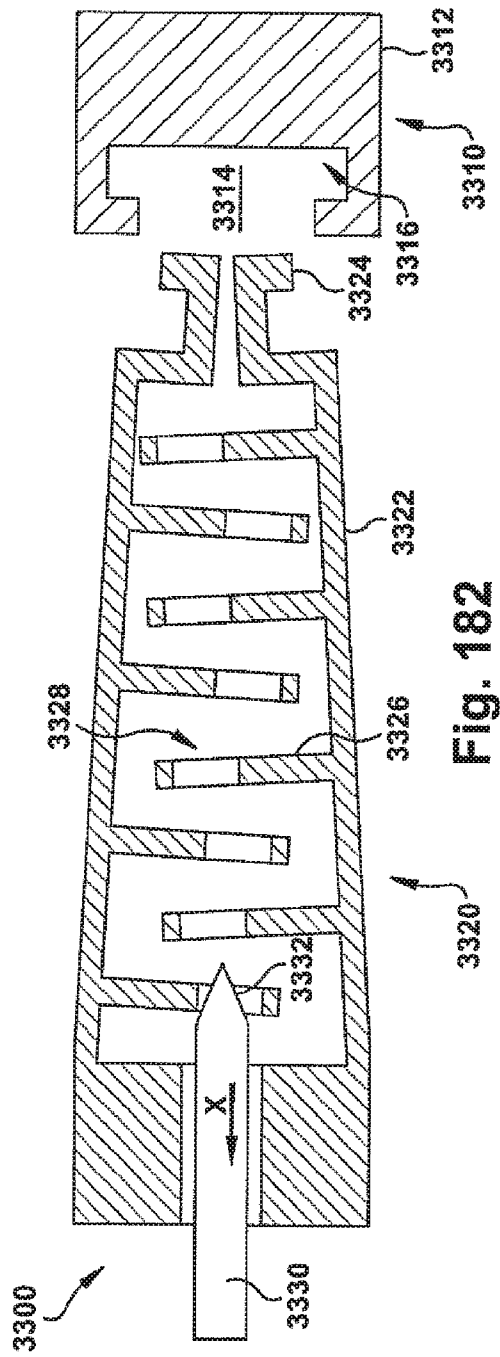


Fig. 178

Fig. 177

**Fig. 179**





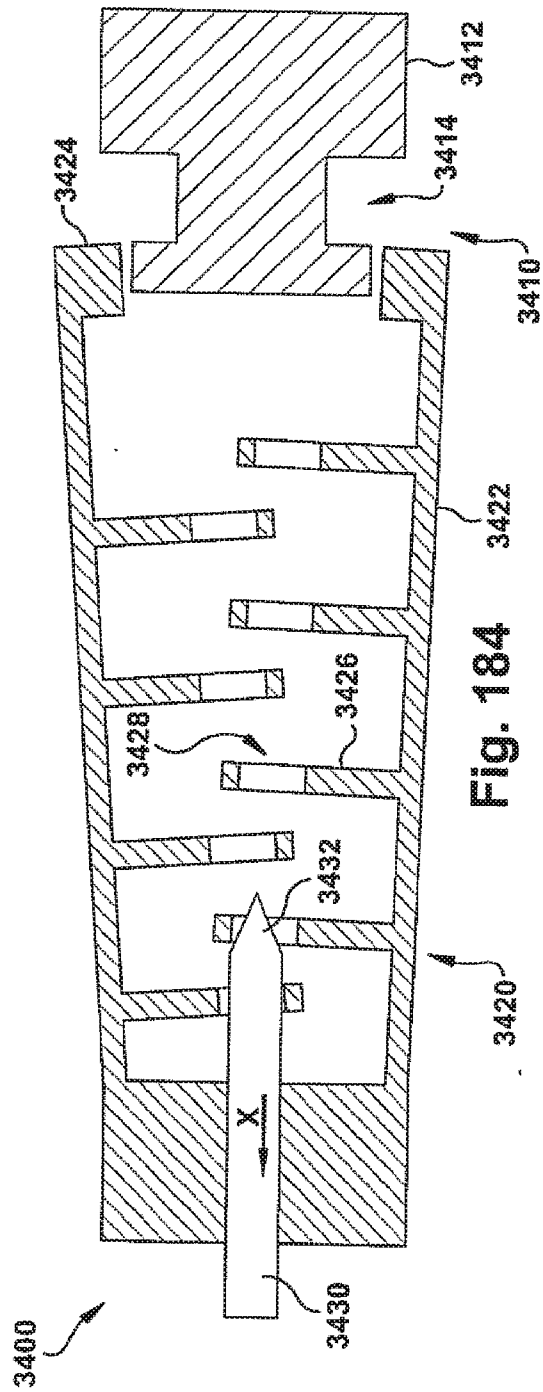


Fig. 184

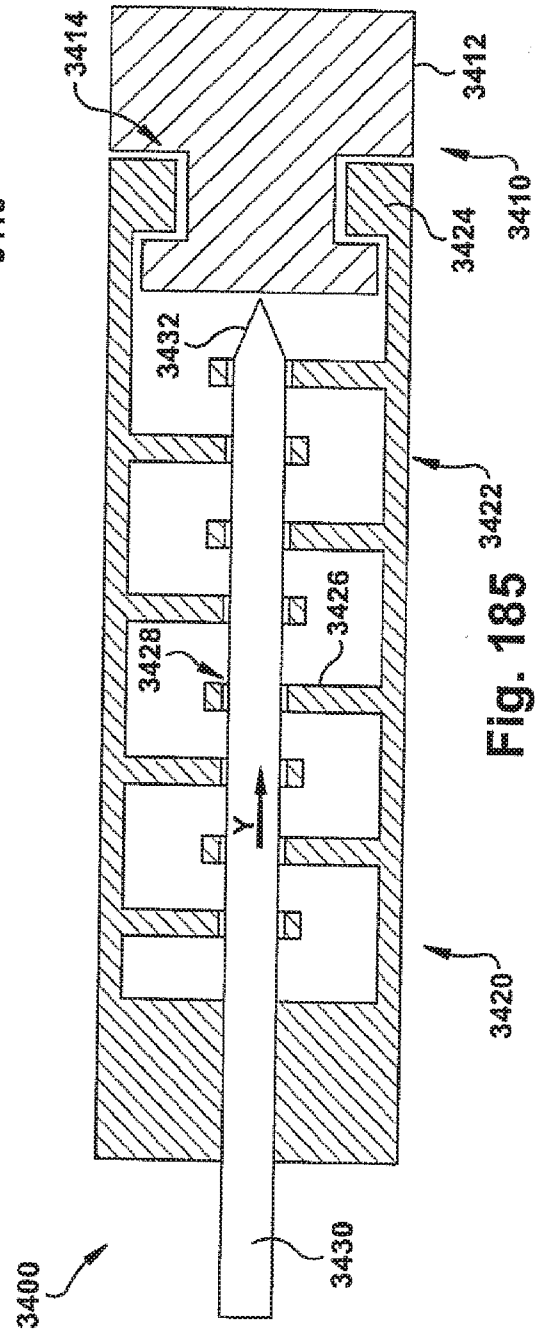


Fig. 185

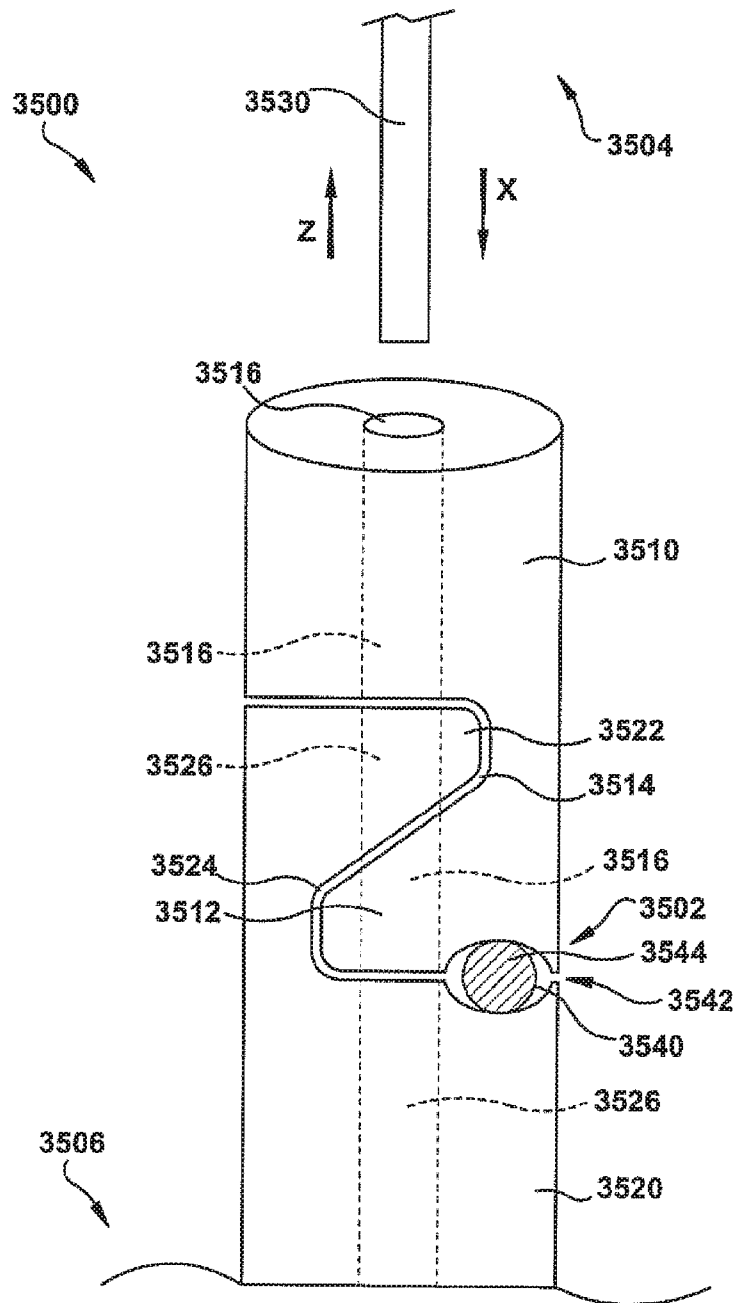


Fig. 186

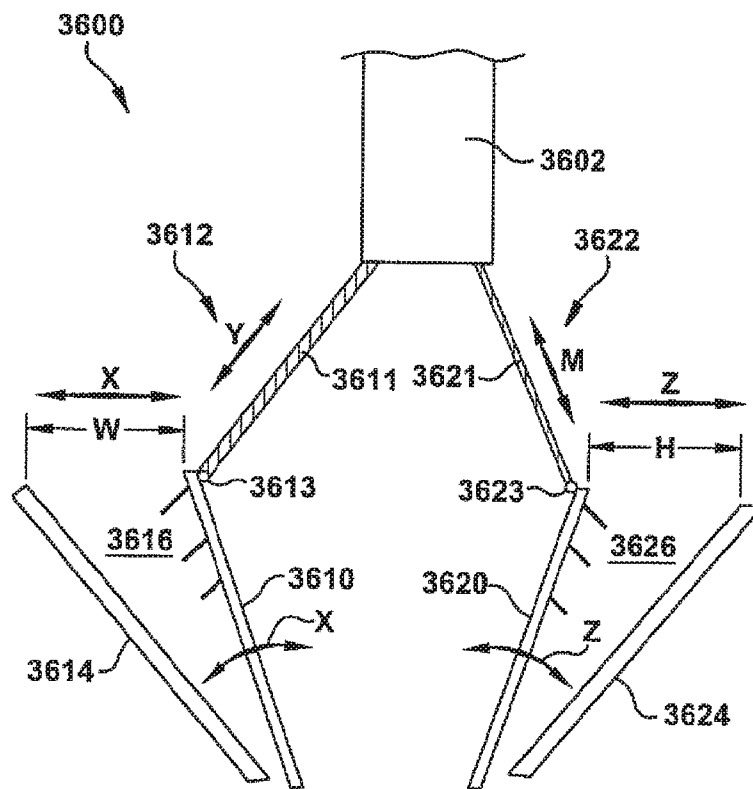
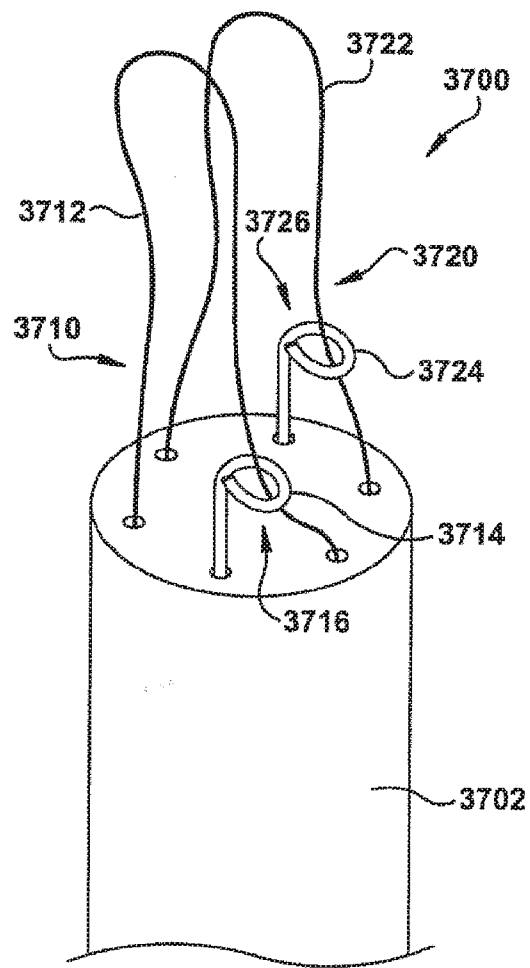


Fig. 187

**Fig. 188**

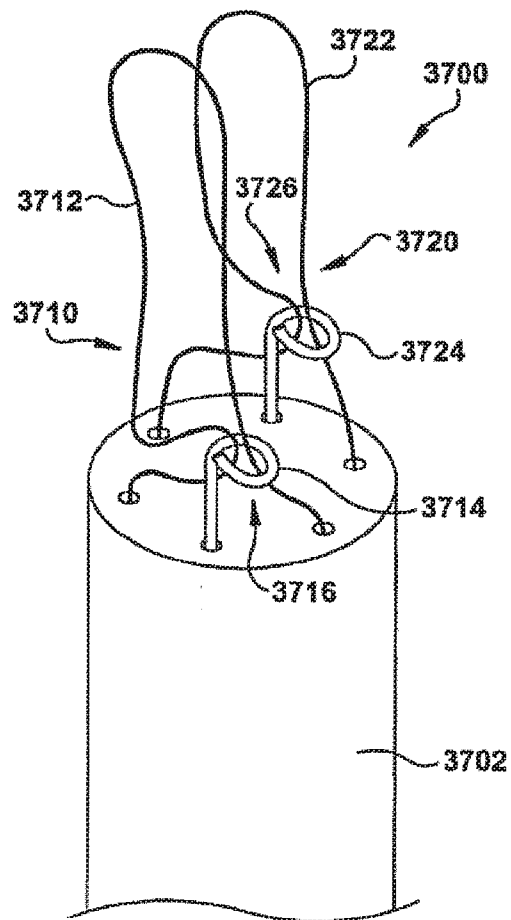


Fig. 188A

201/262

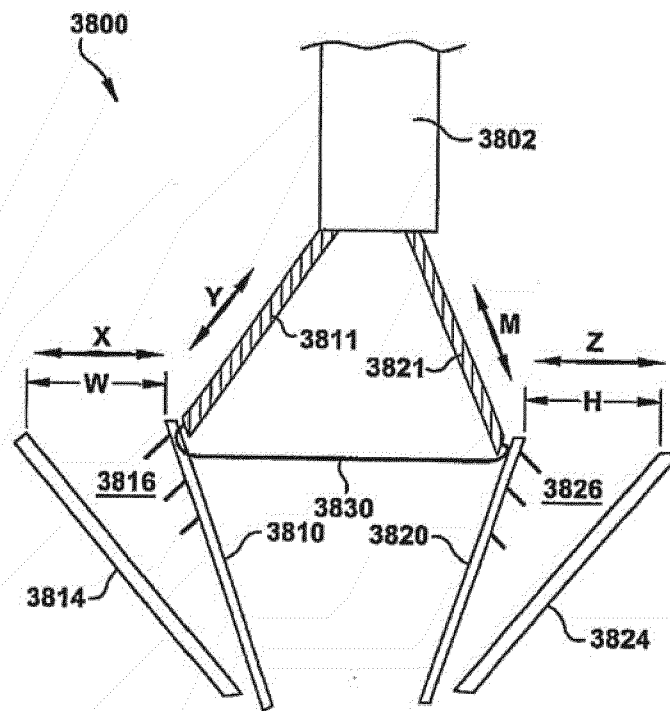


Fig. 189

202/262

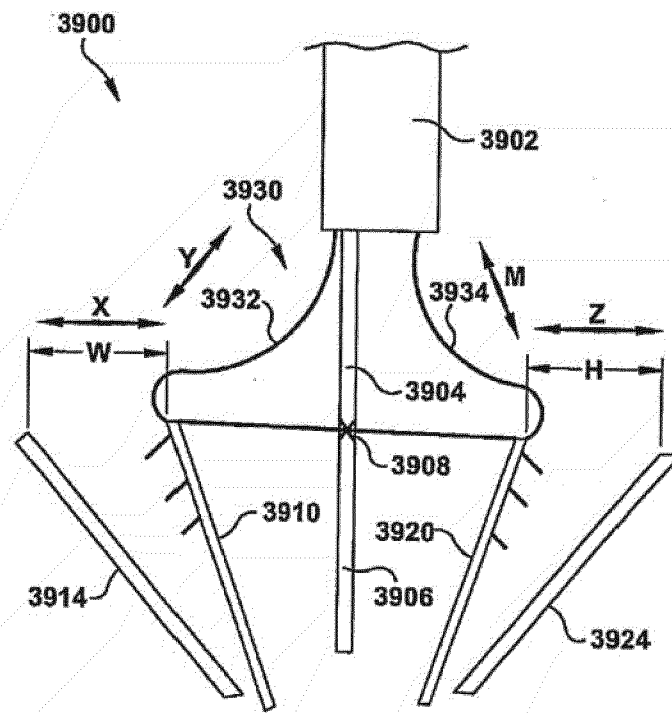


Fig. 190

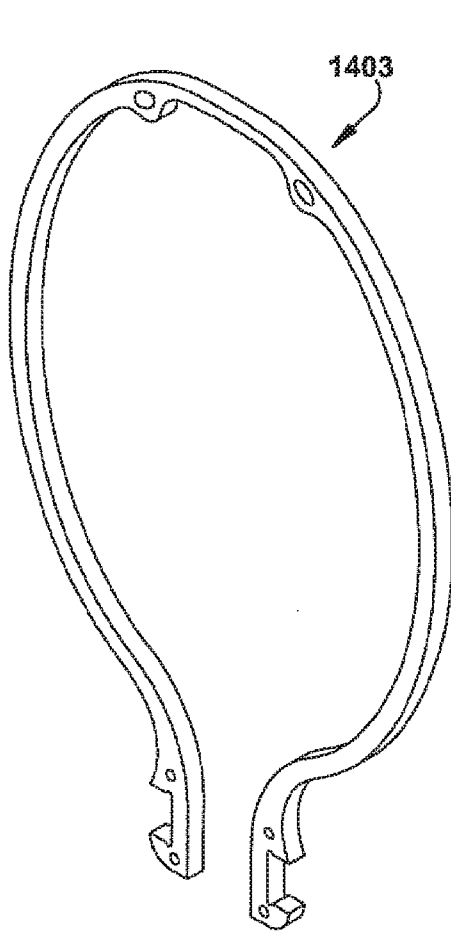


Fig. 191

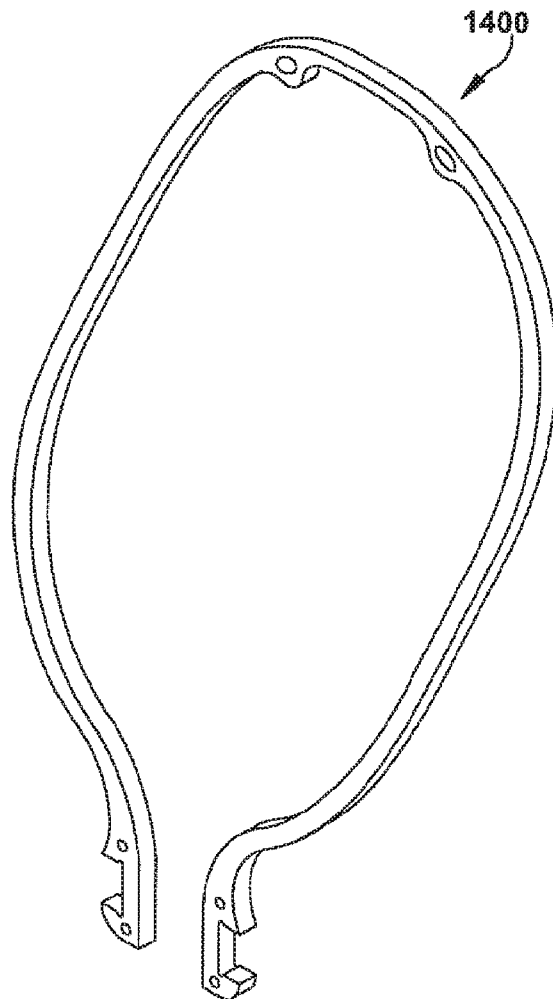
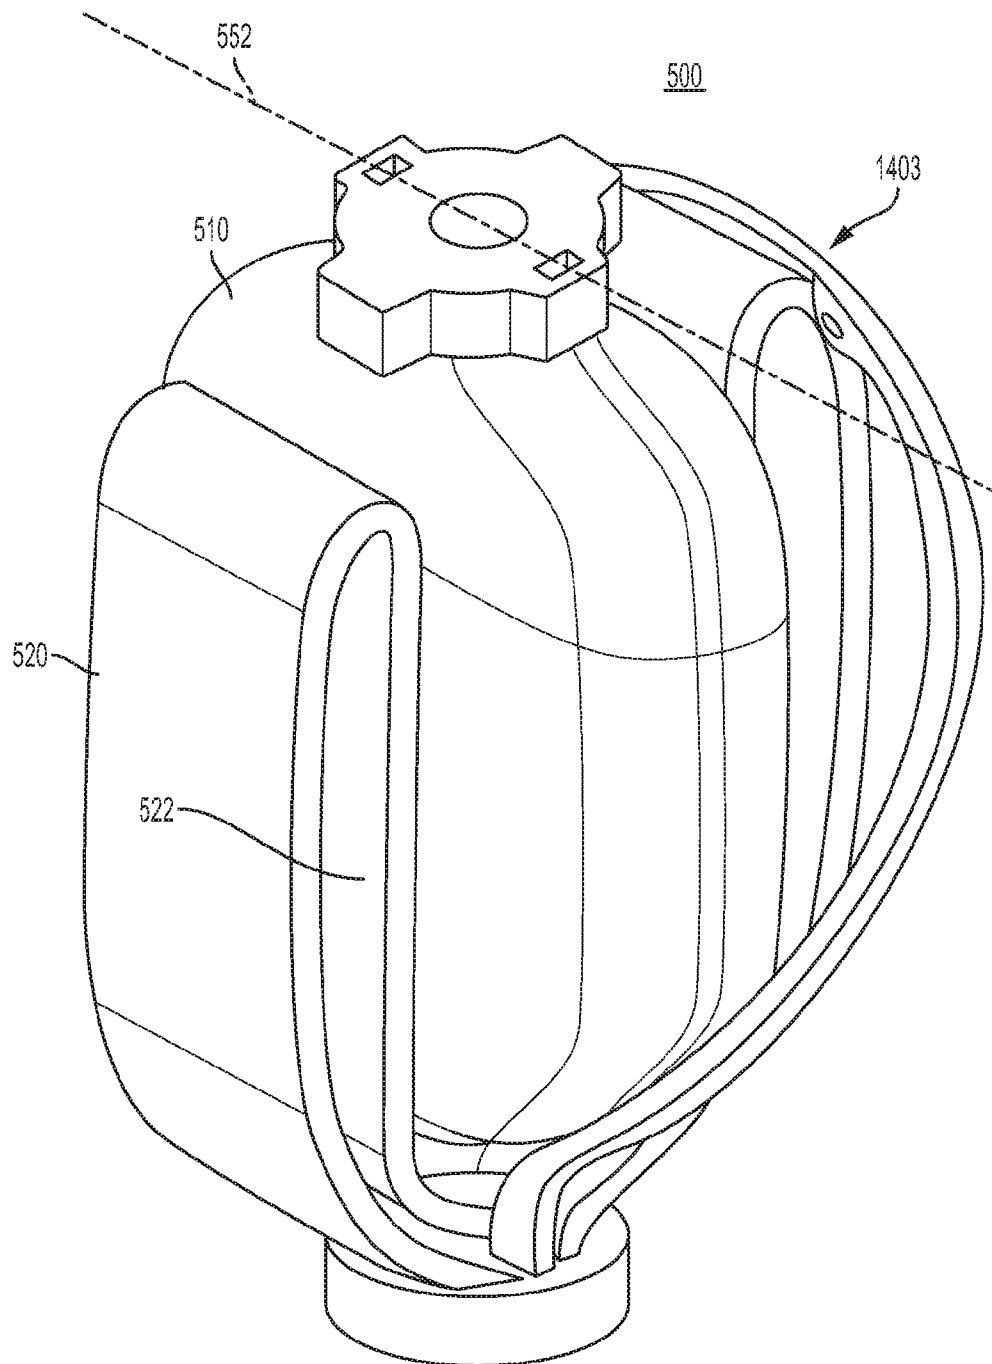
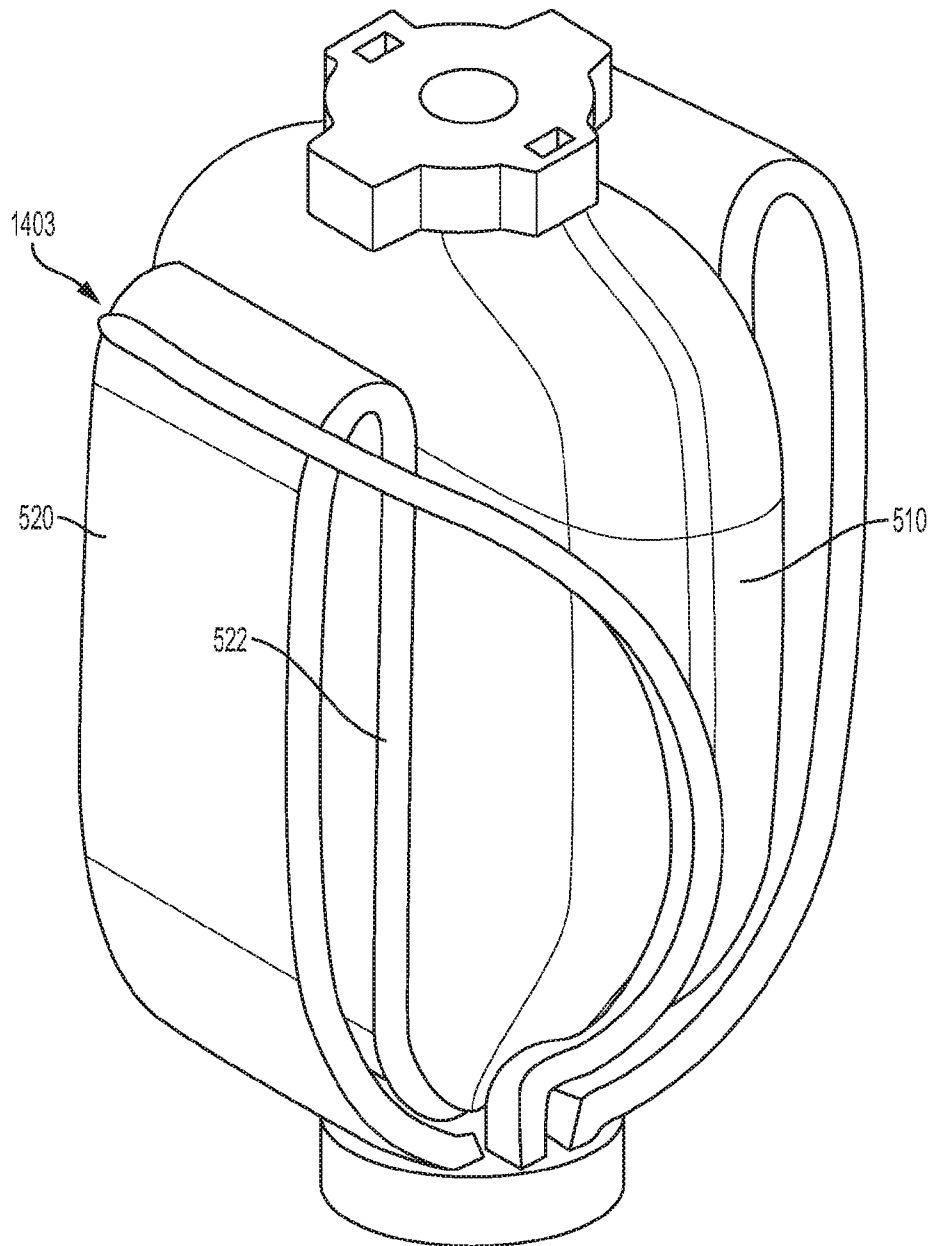
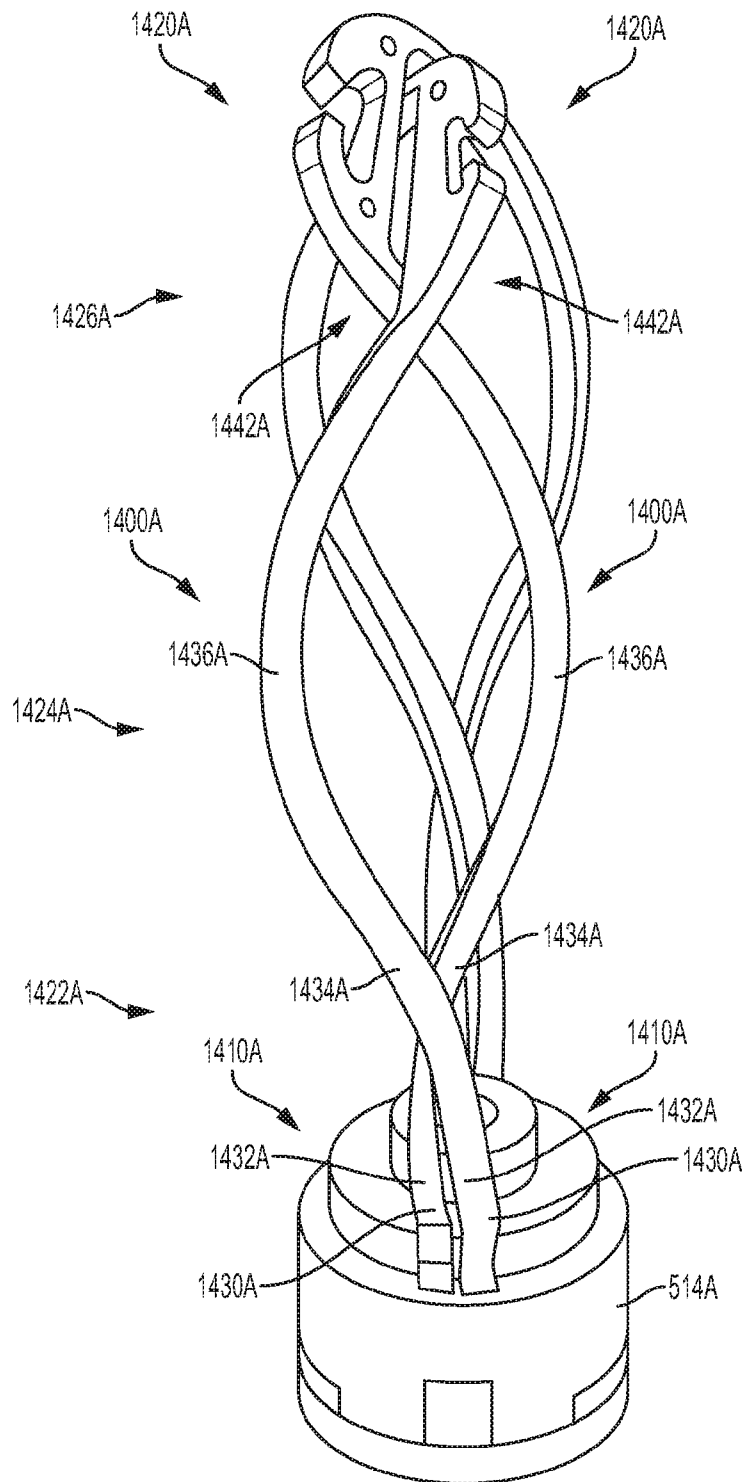
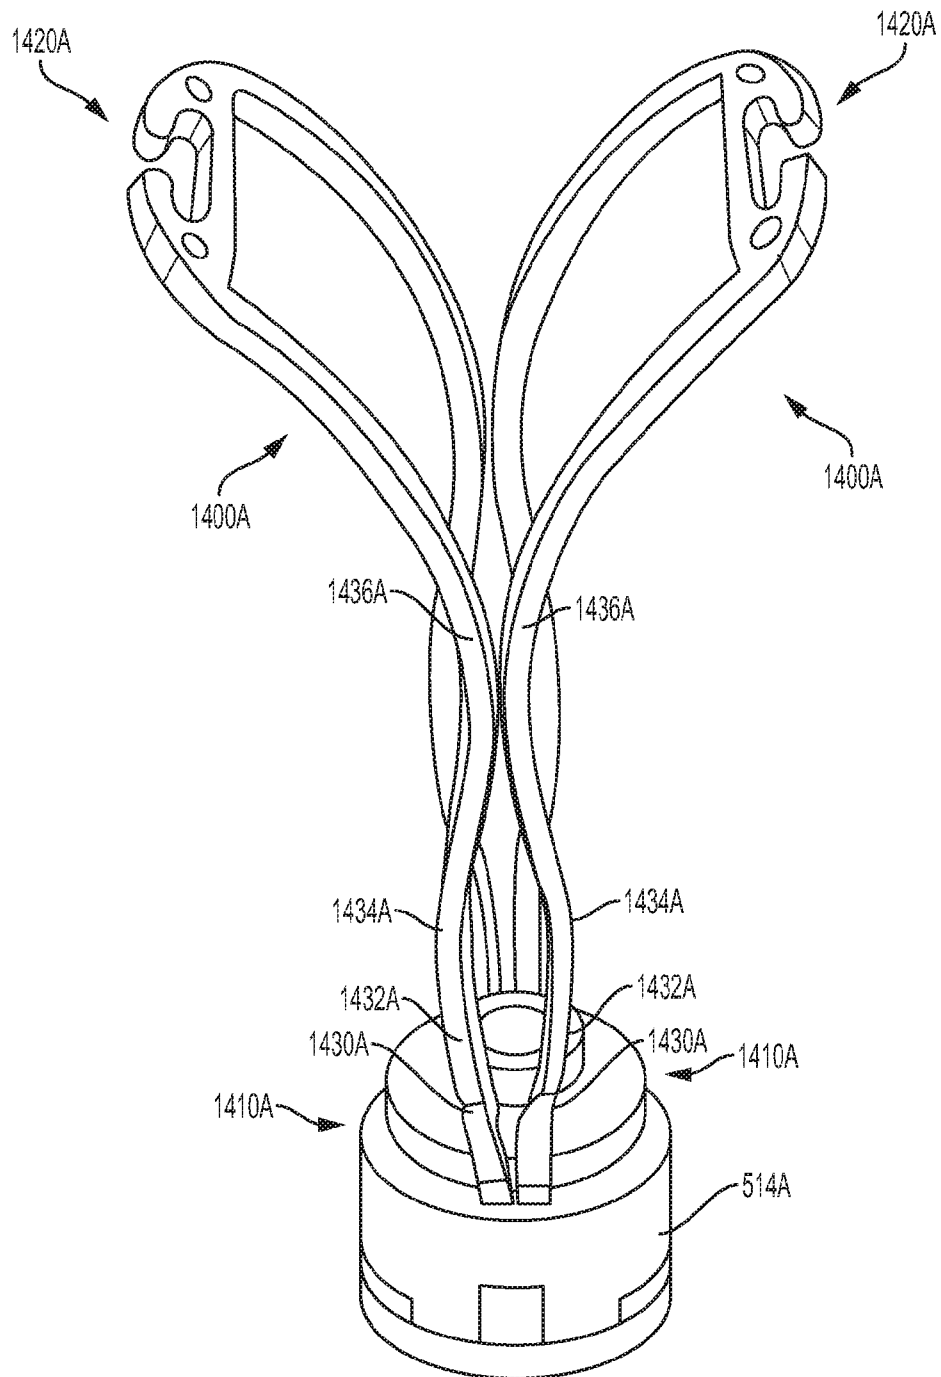



Fig. 192


**Fig. 193**

**Fig. 194**

**Fig. 195**

**Fig. 196**

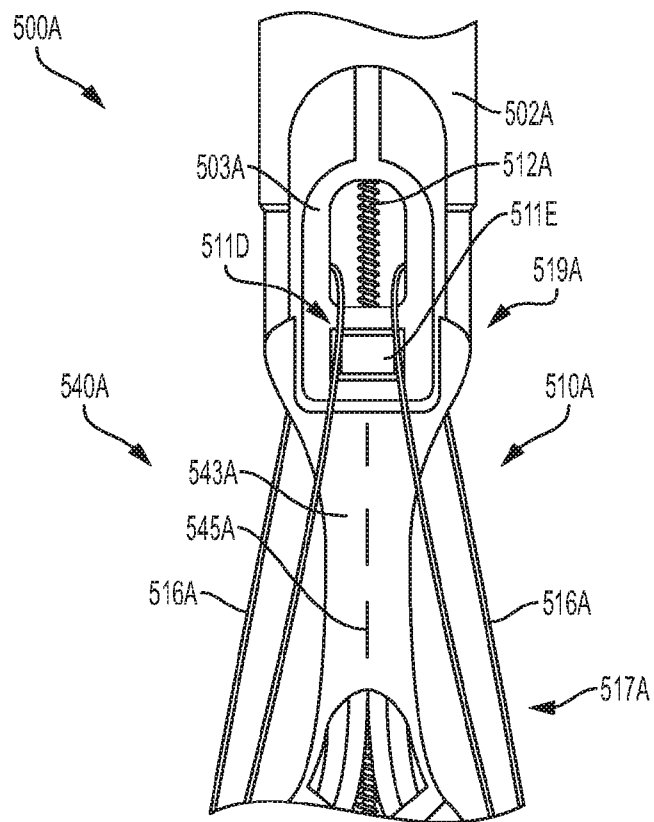**Fig. 197**

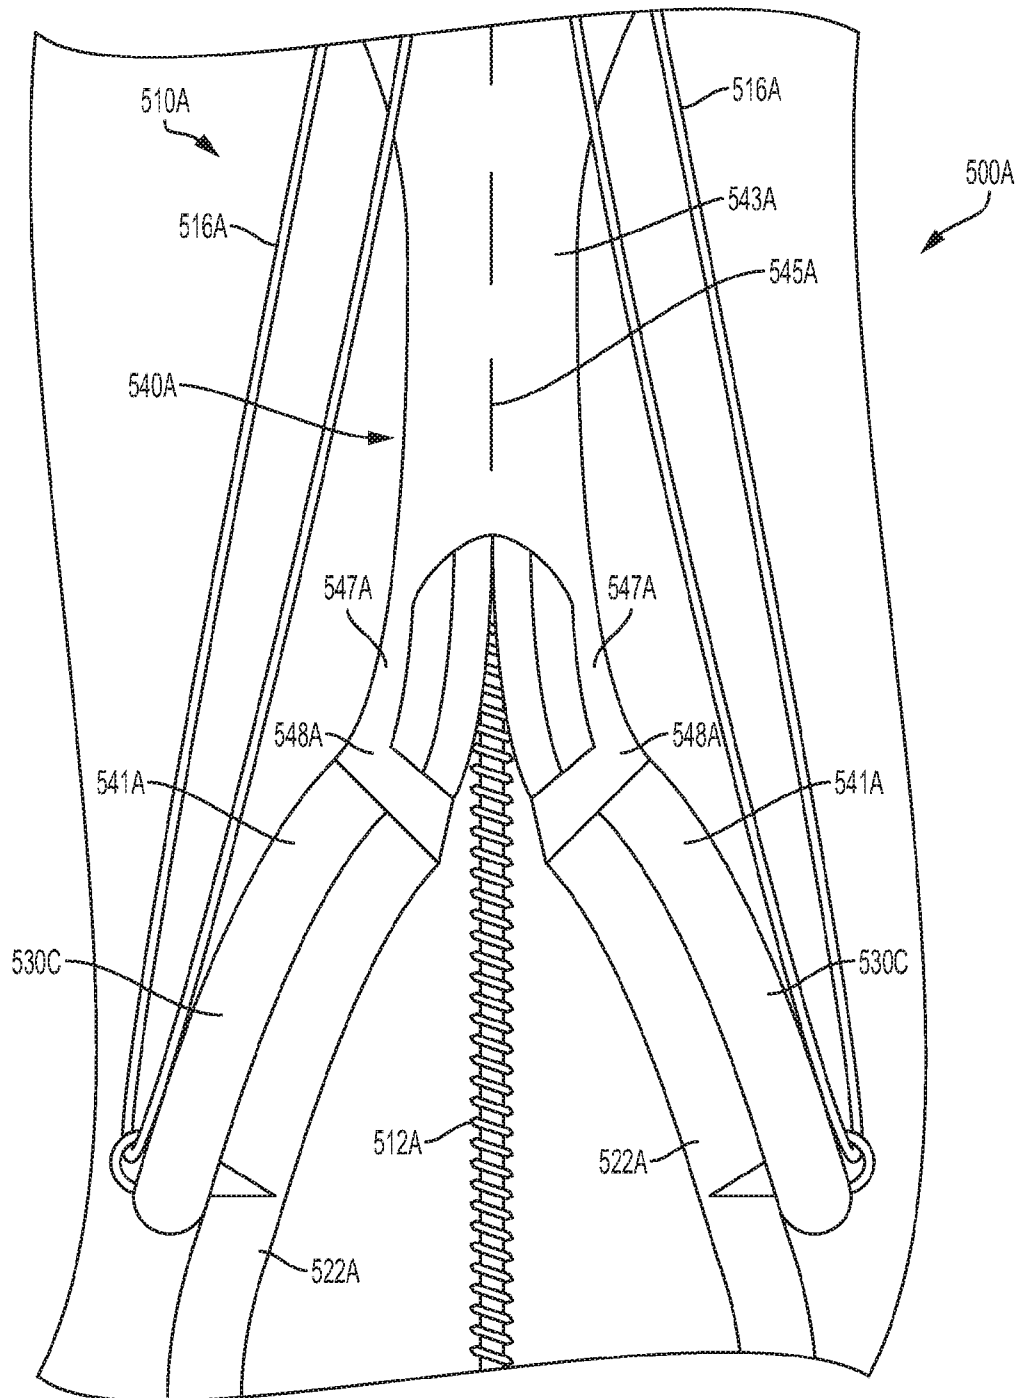**Fig. 198**

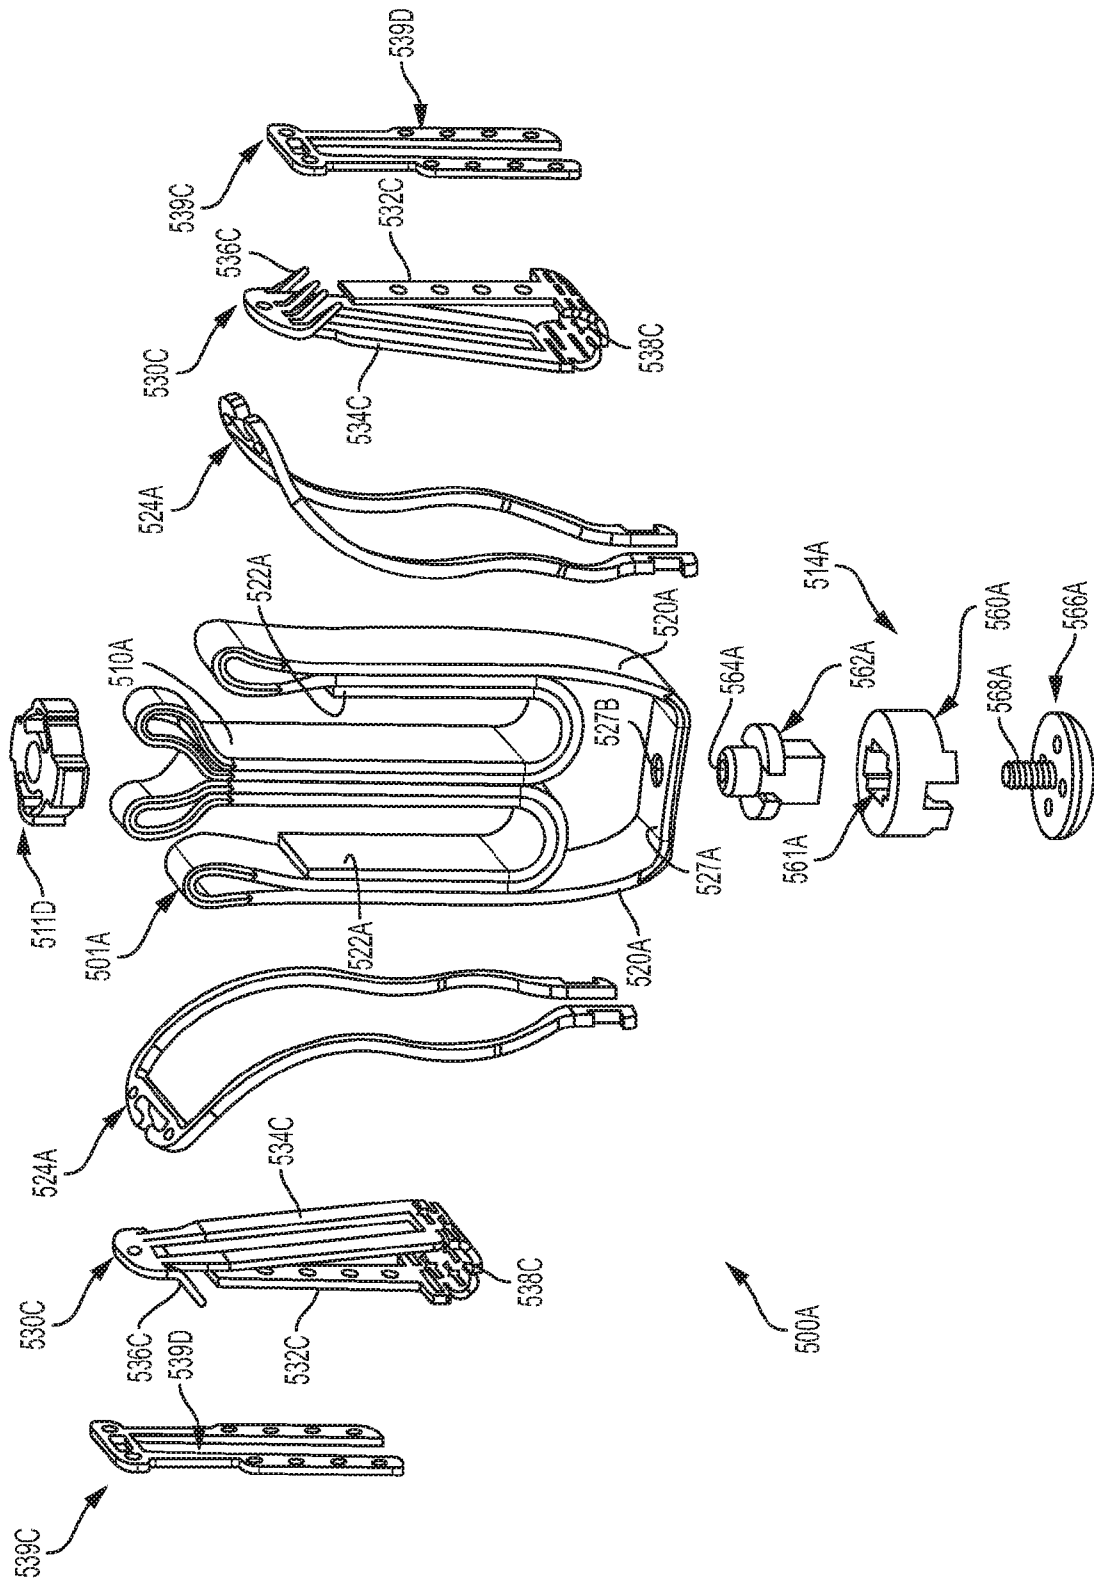
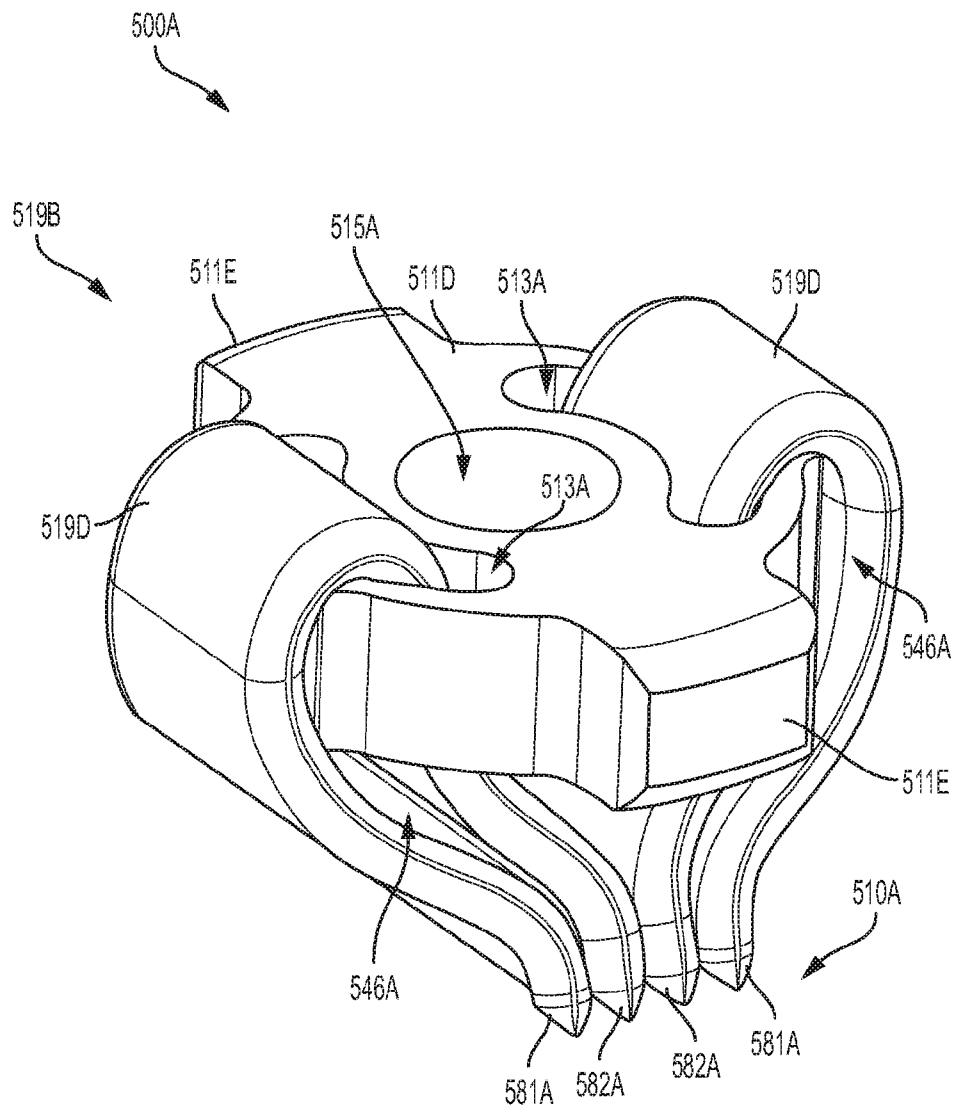


Fig. 199

**Fig. 200**

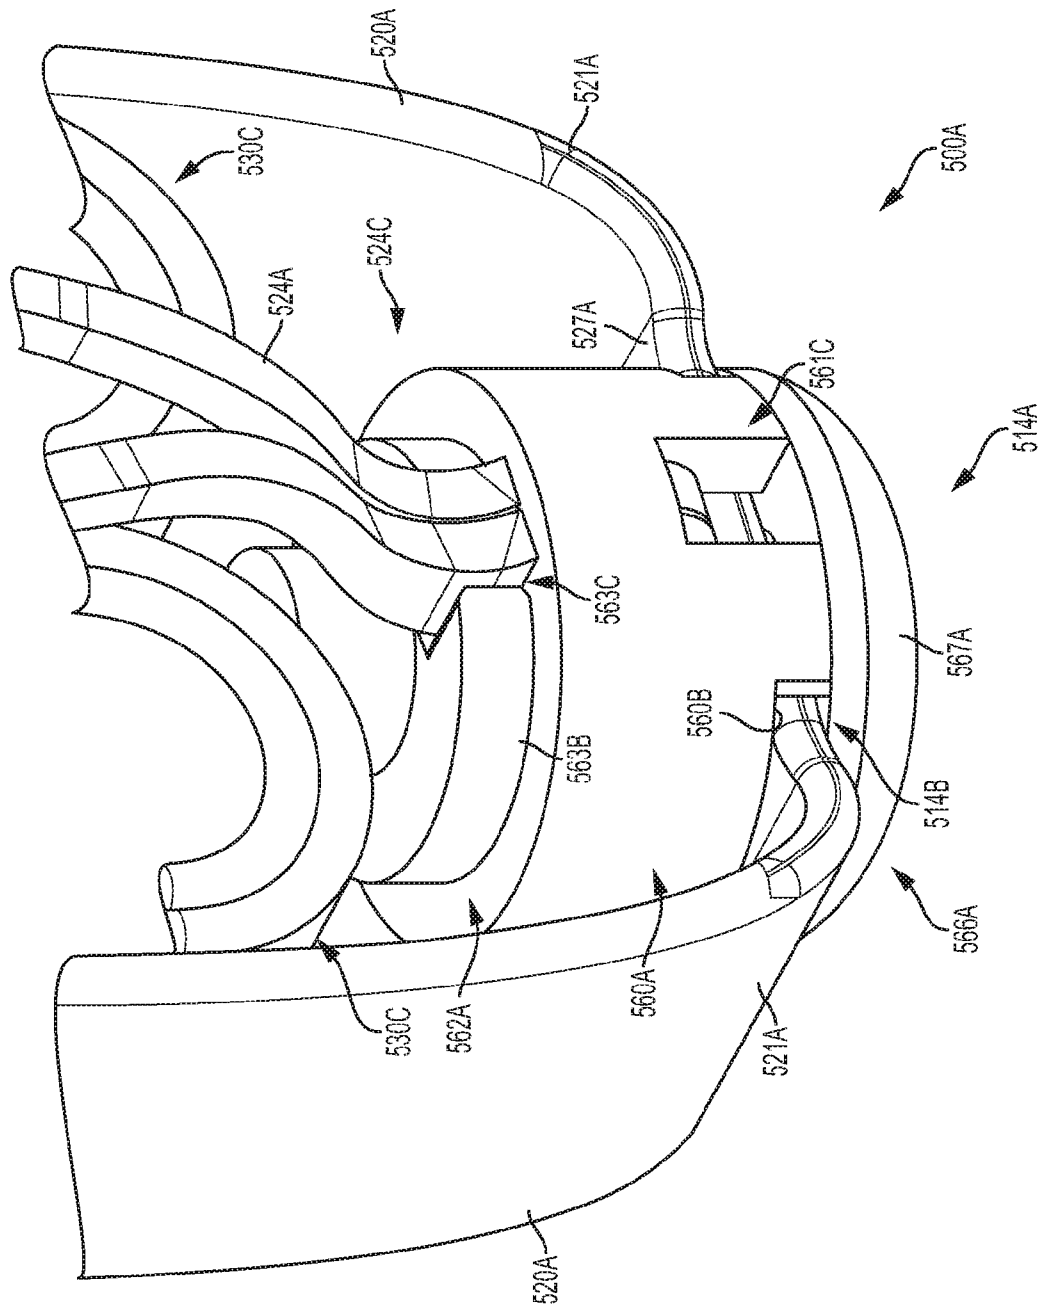


Fig. 201

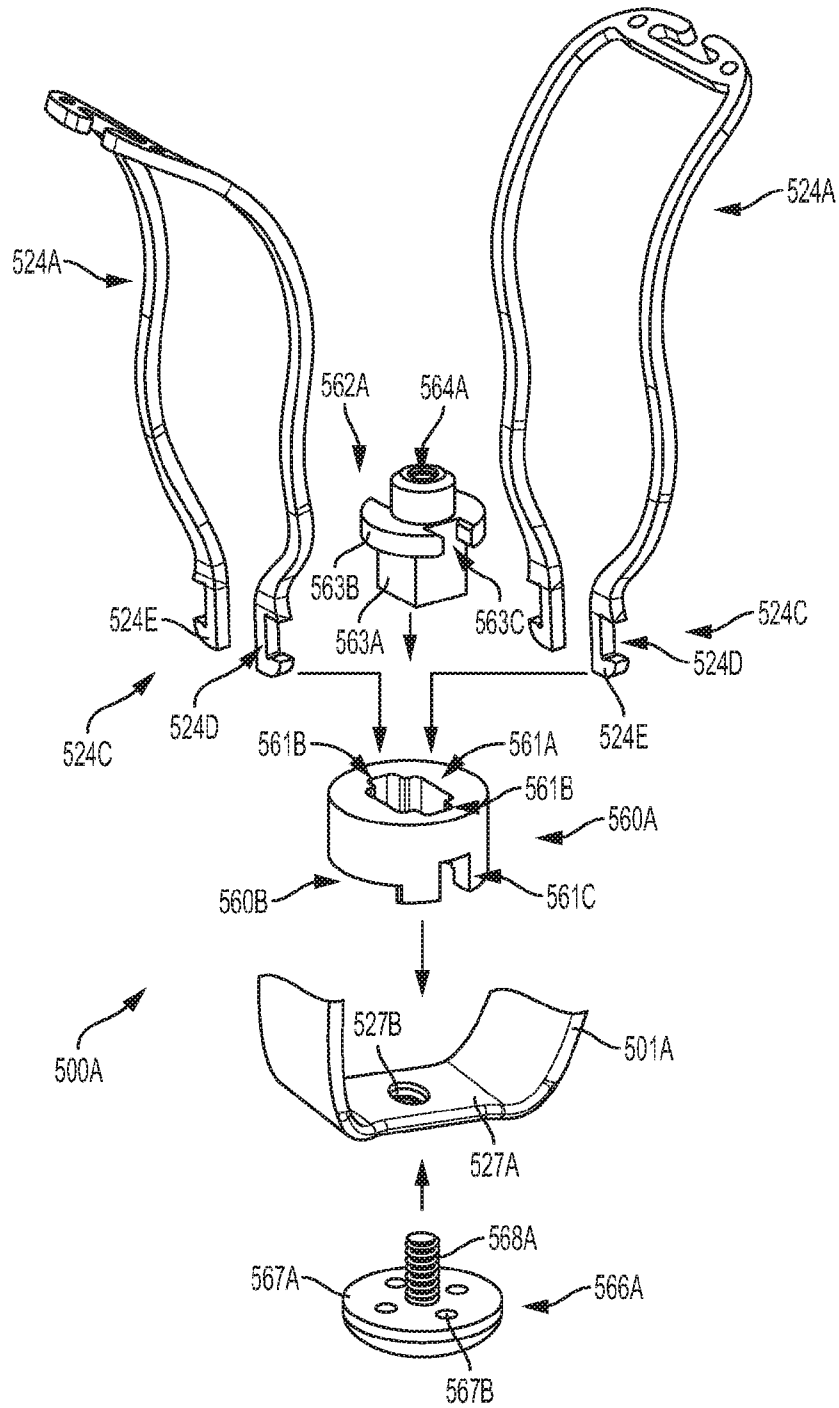


Fig. 202

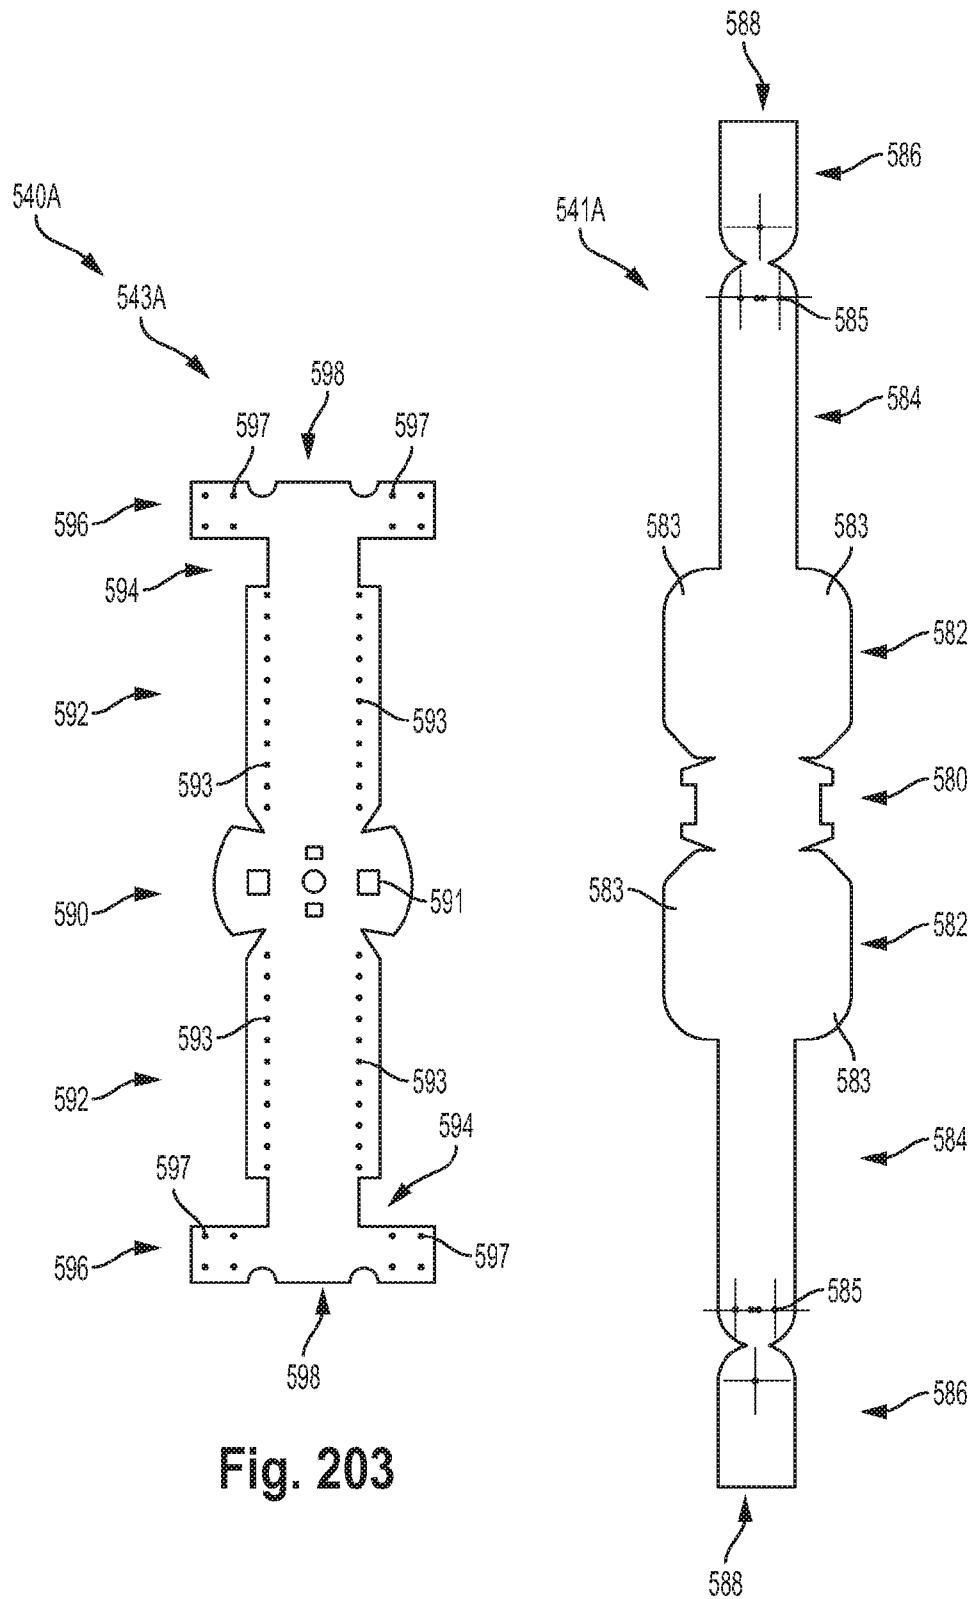


Fig. 203

Fig. 204

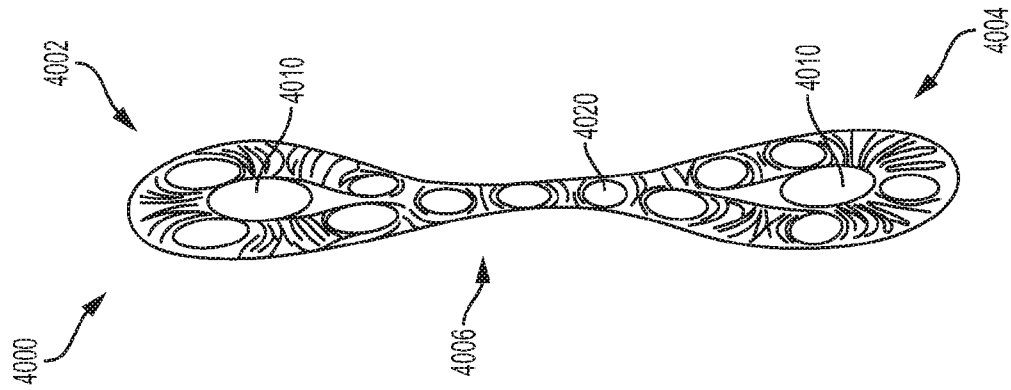


Fig. 206

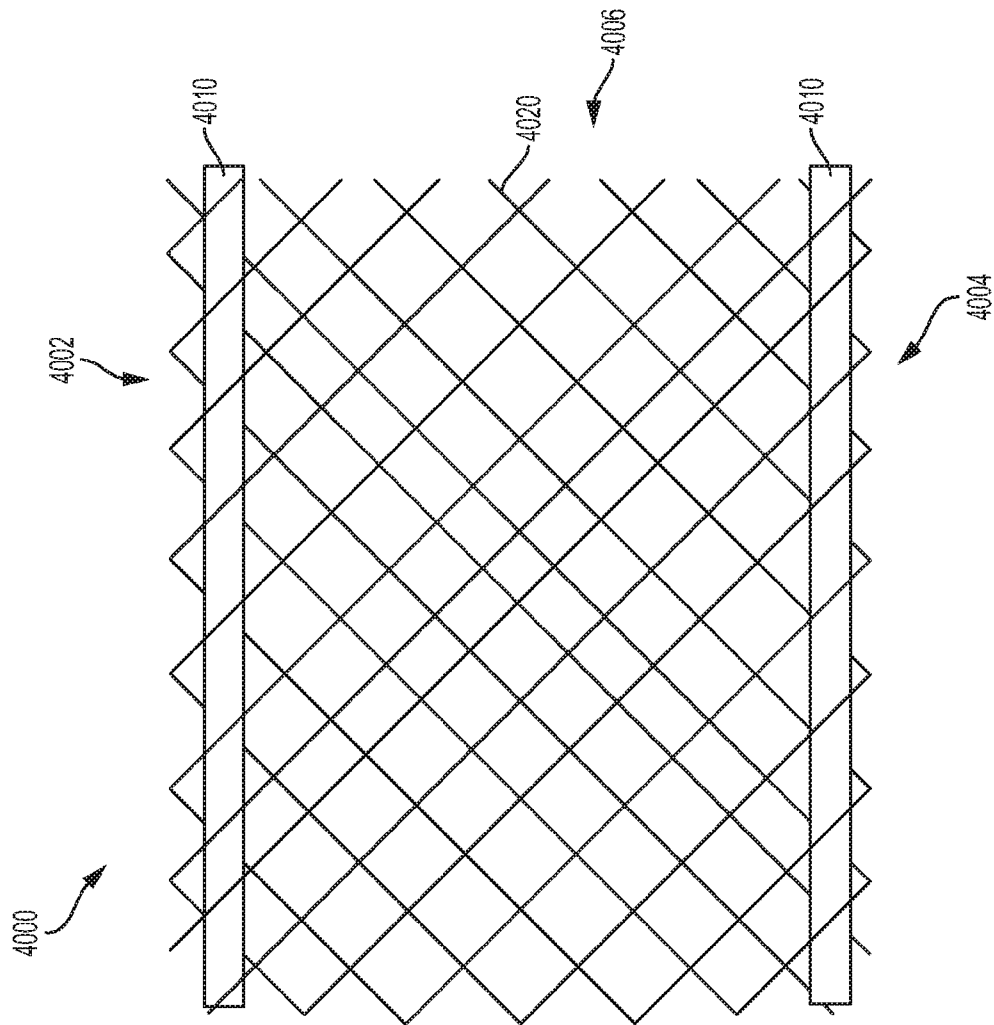
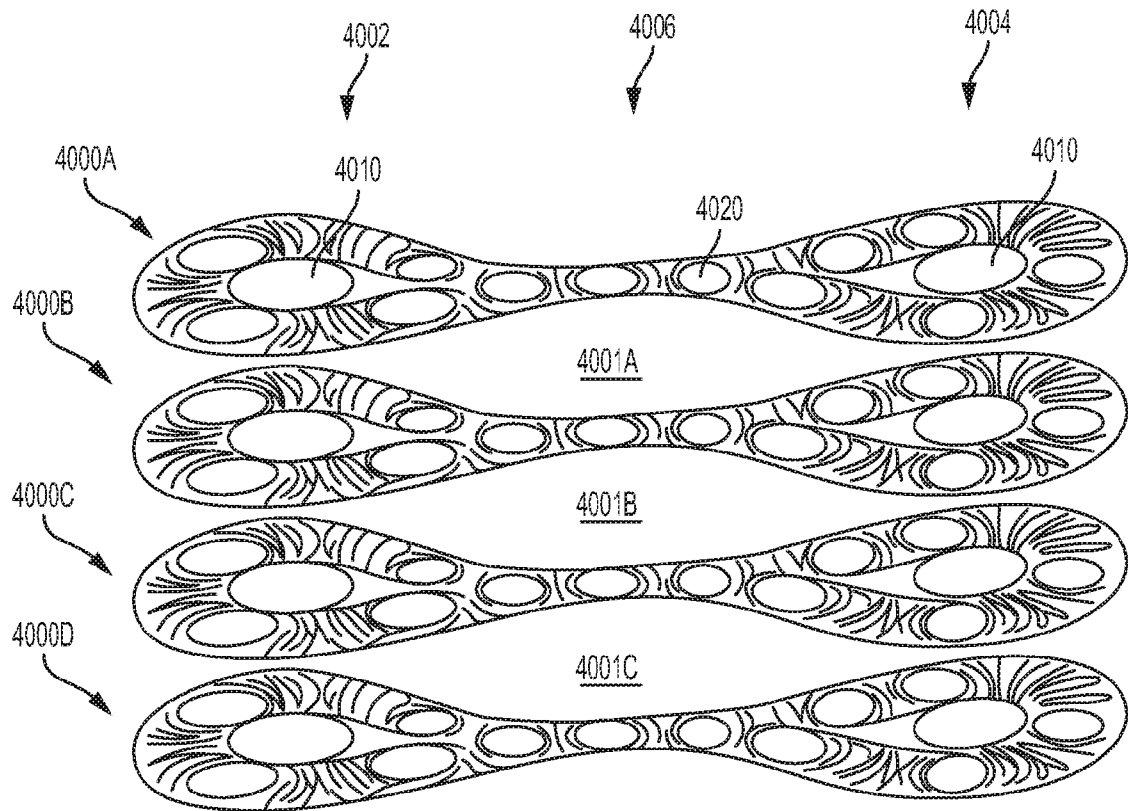


Fig. 205

**Fig. 207**

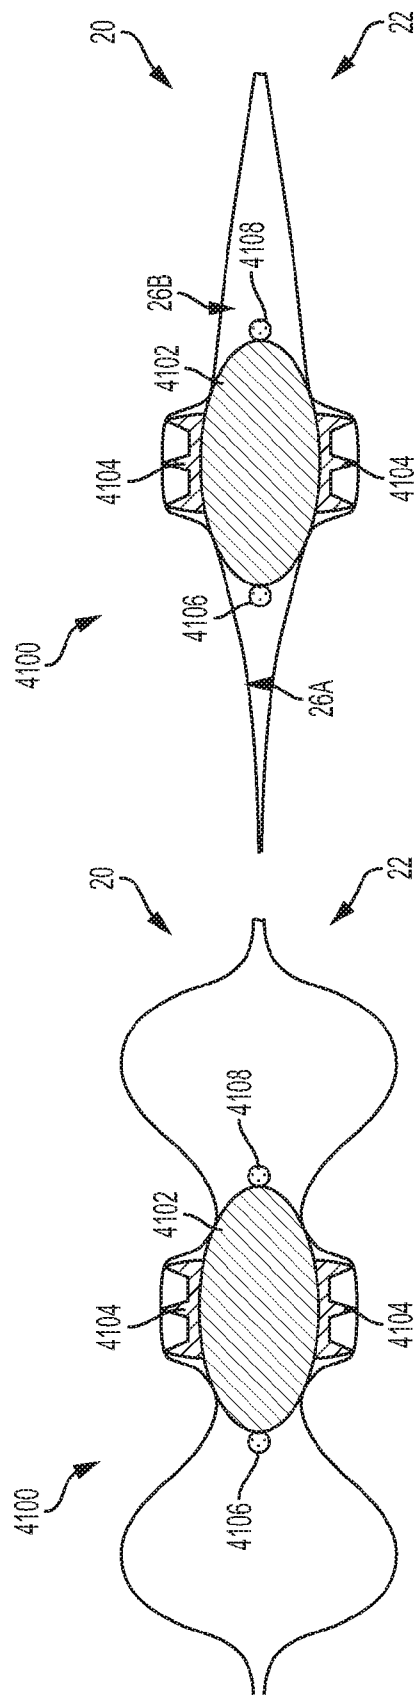


Fig. 208B

Fig. 208A

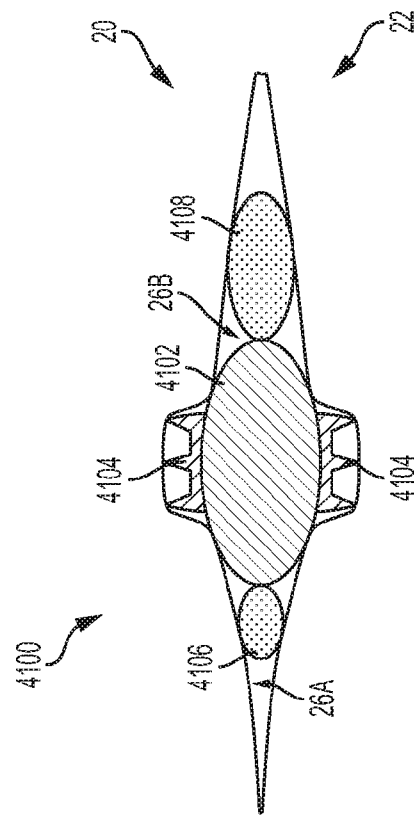


Fig. 209B

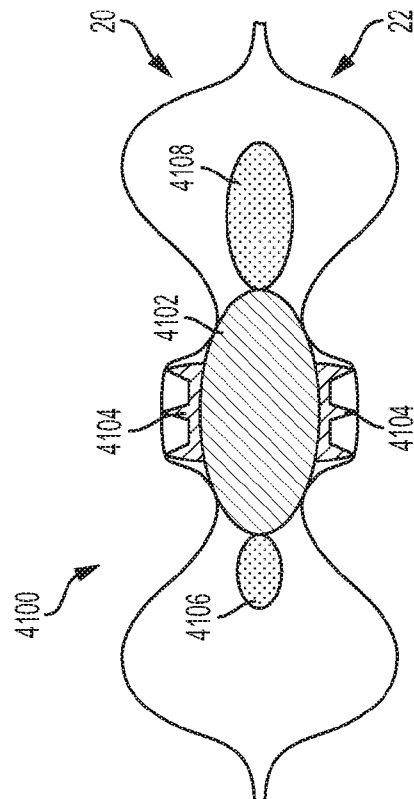


Fig. 209A

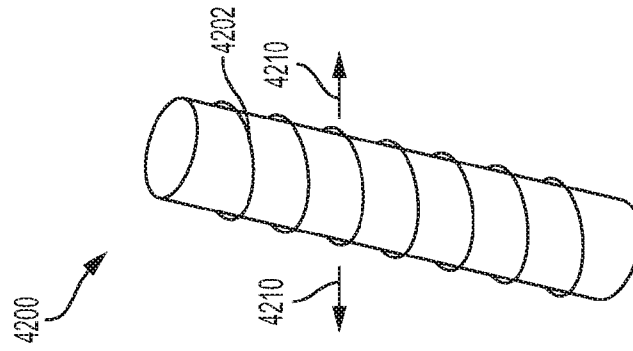


Fig. 210B

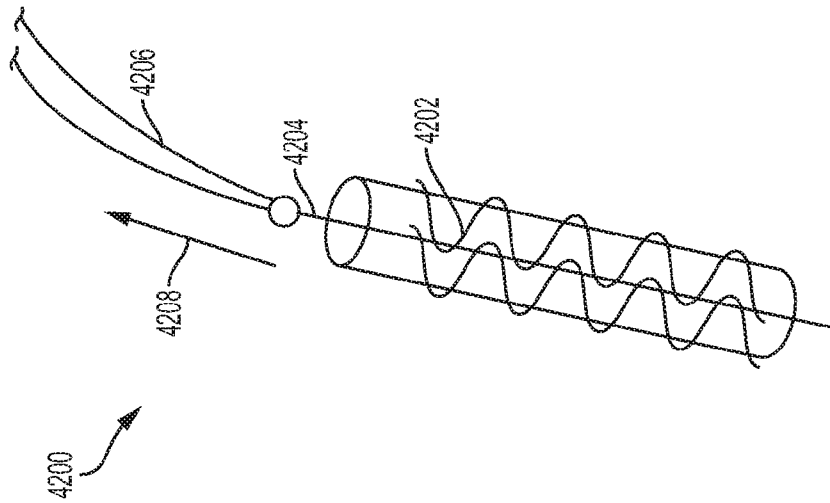


Fig. 210A

220/262

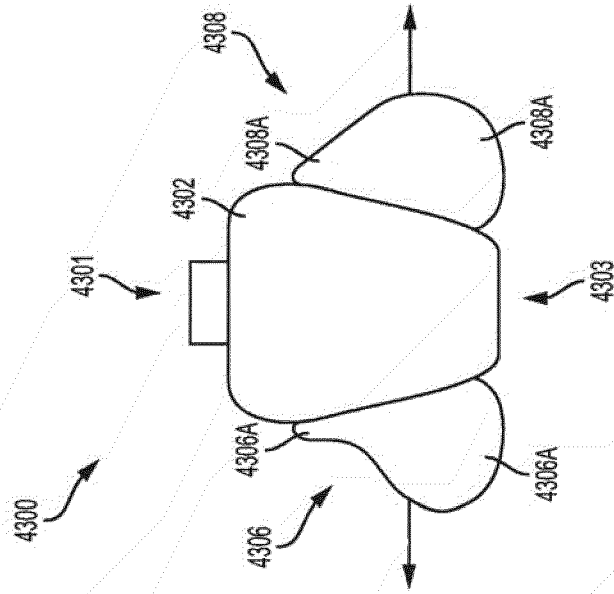


Fig. 211B

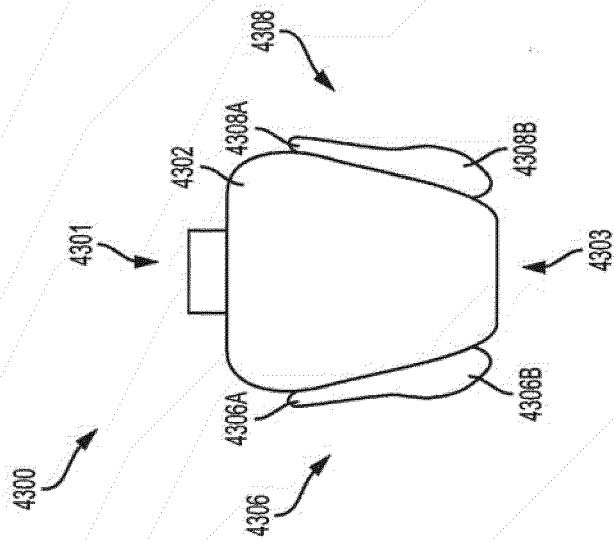
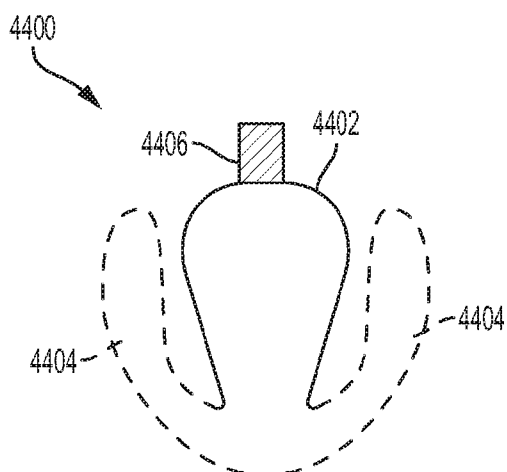
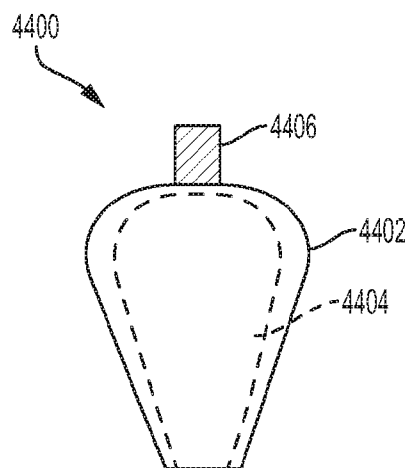
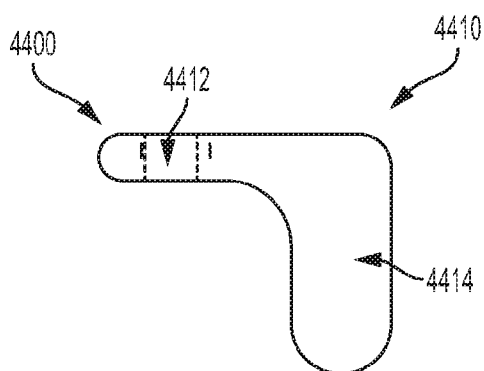
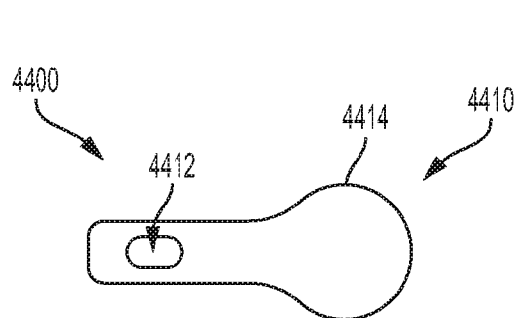
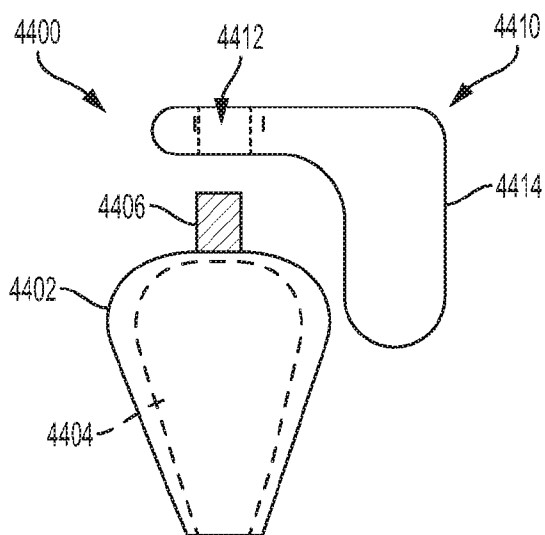
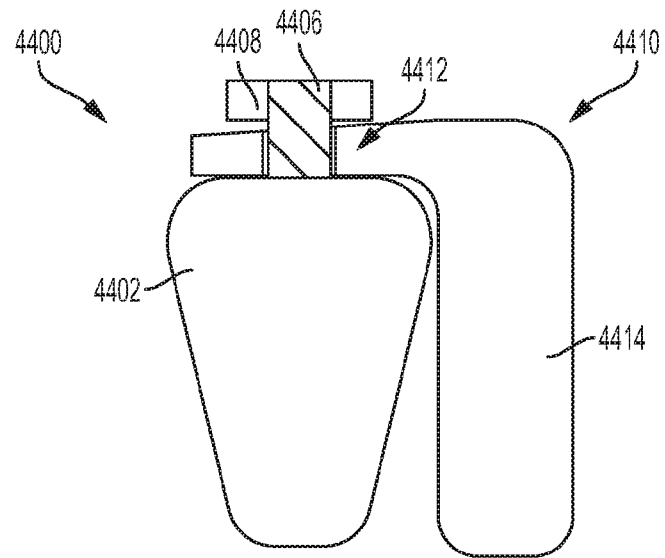
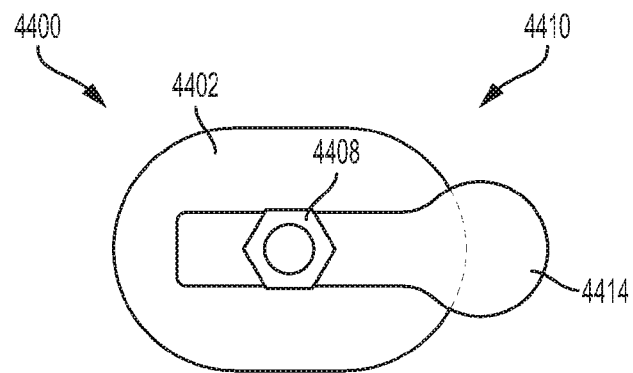


Fig. 211A

**Fig. 212A****Fig. 212B****Fig. 213A****Fig. 213B****Fig. 214**

**Fig. 215A****Fig. 215B**

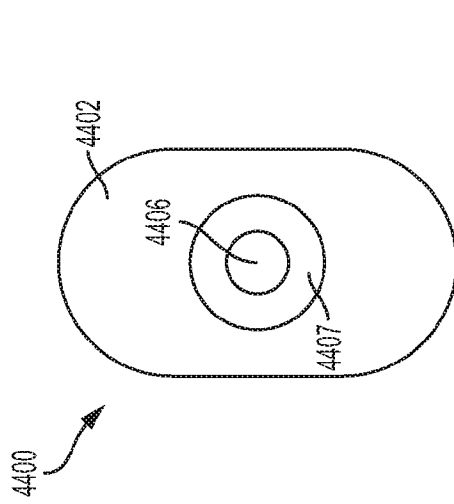


Fig. 216B

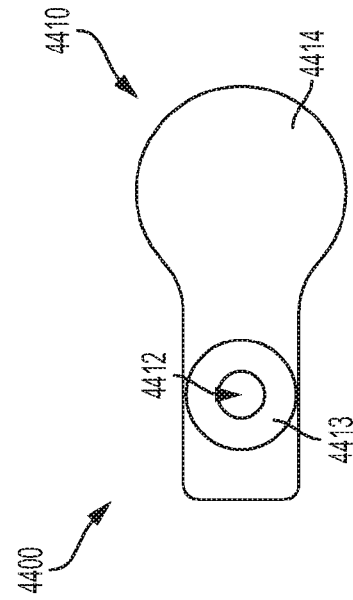


Fig. 217B

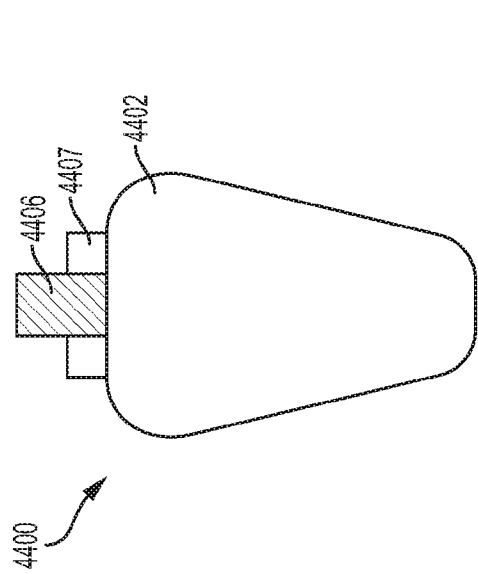


Fig. 216A

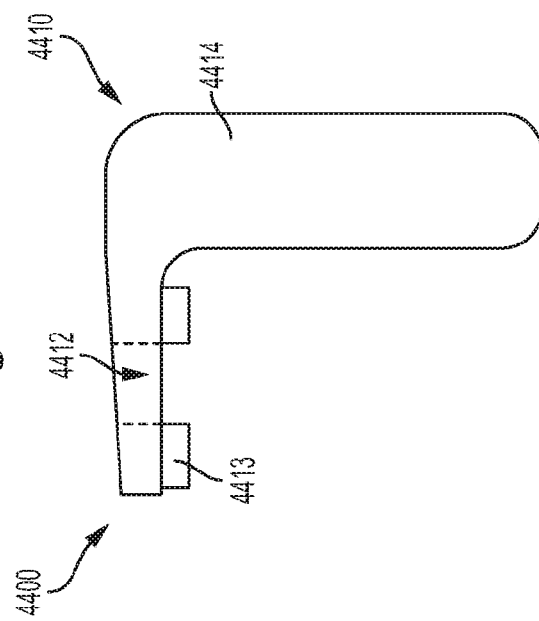
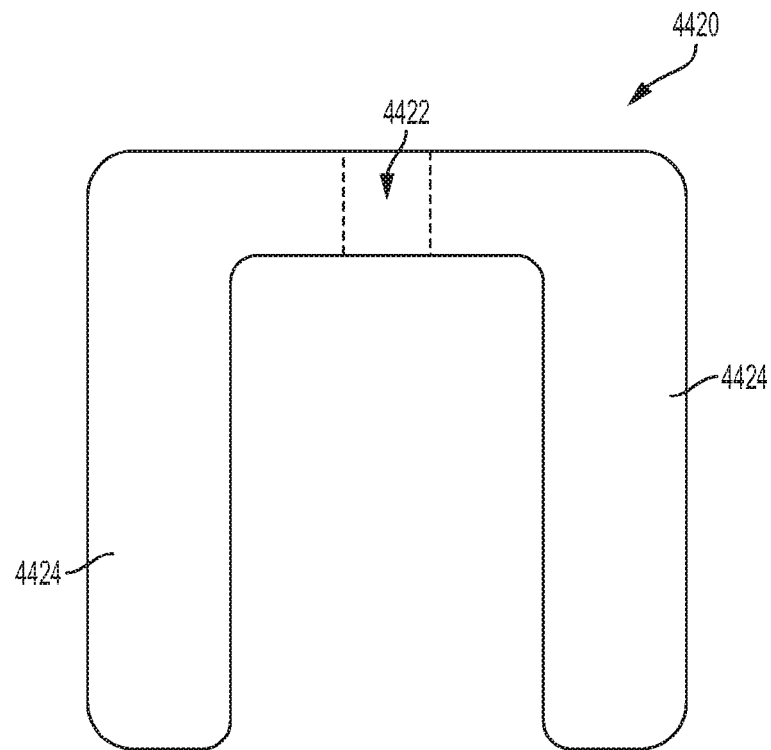
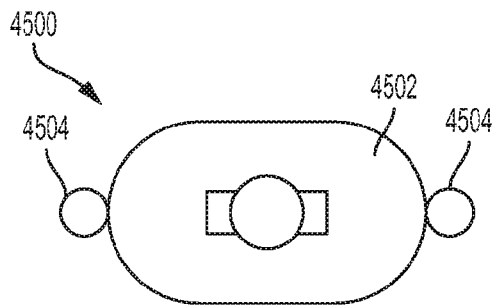
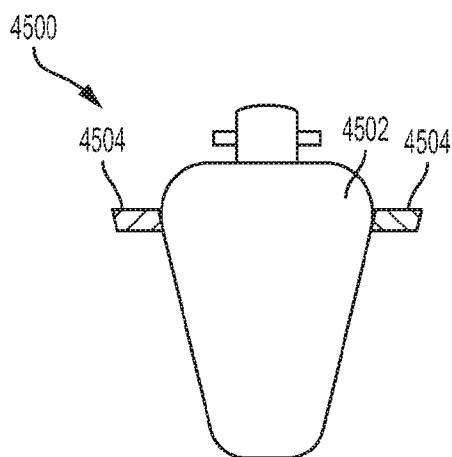
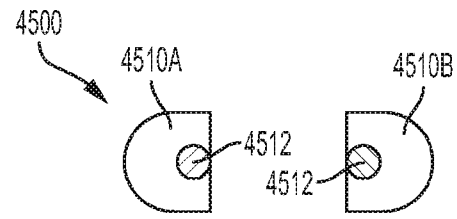
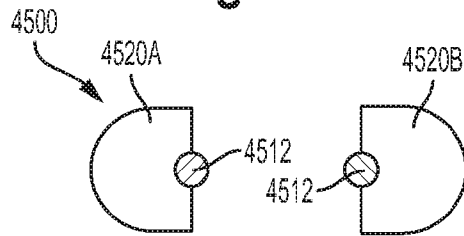
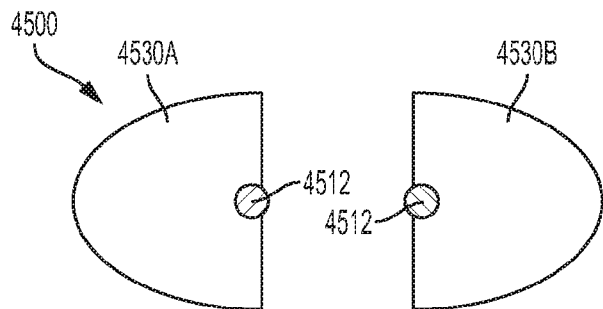
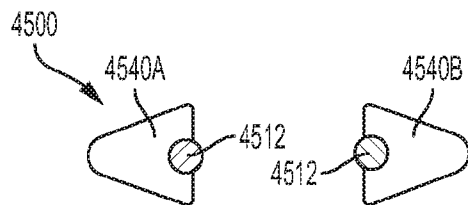
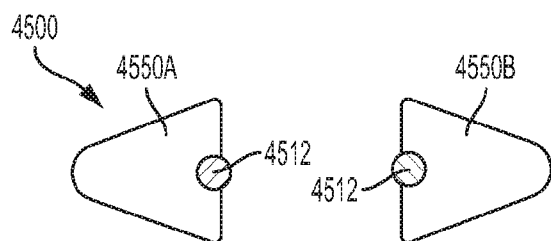
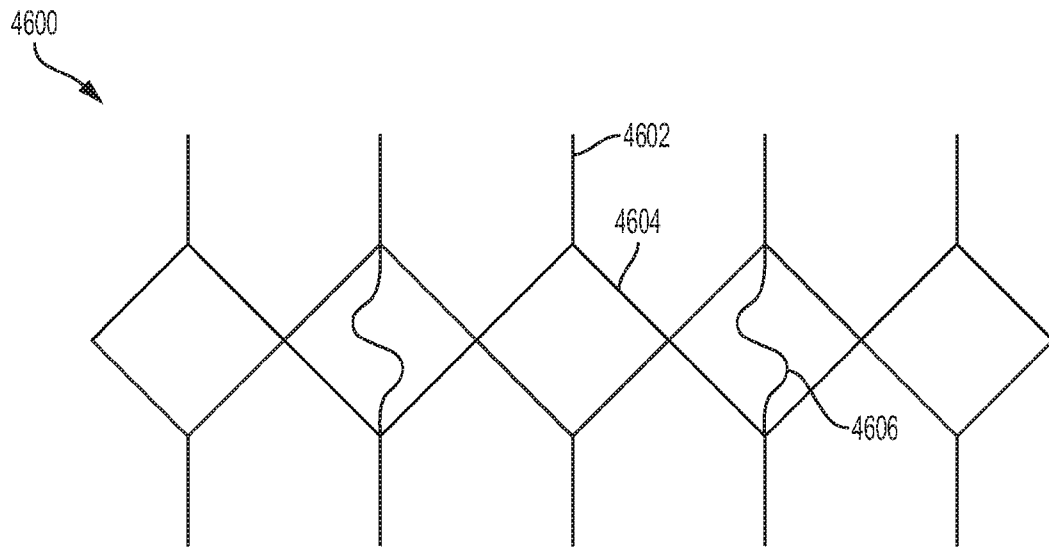
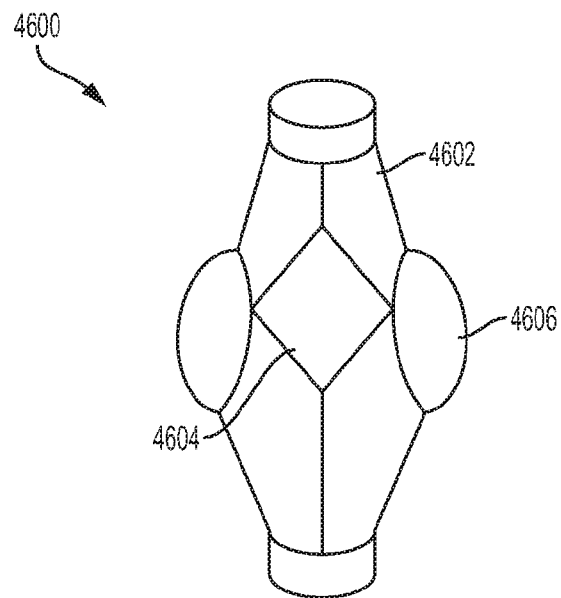
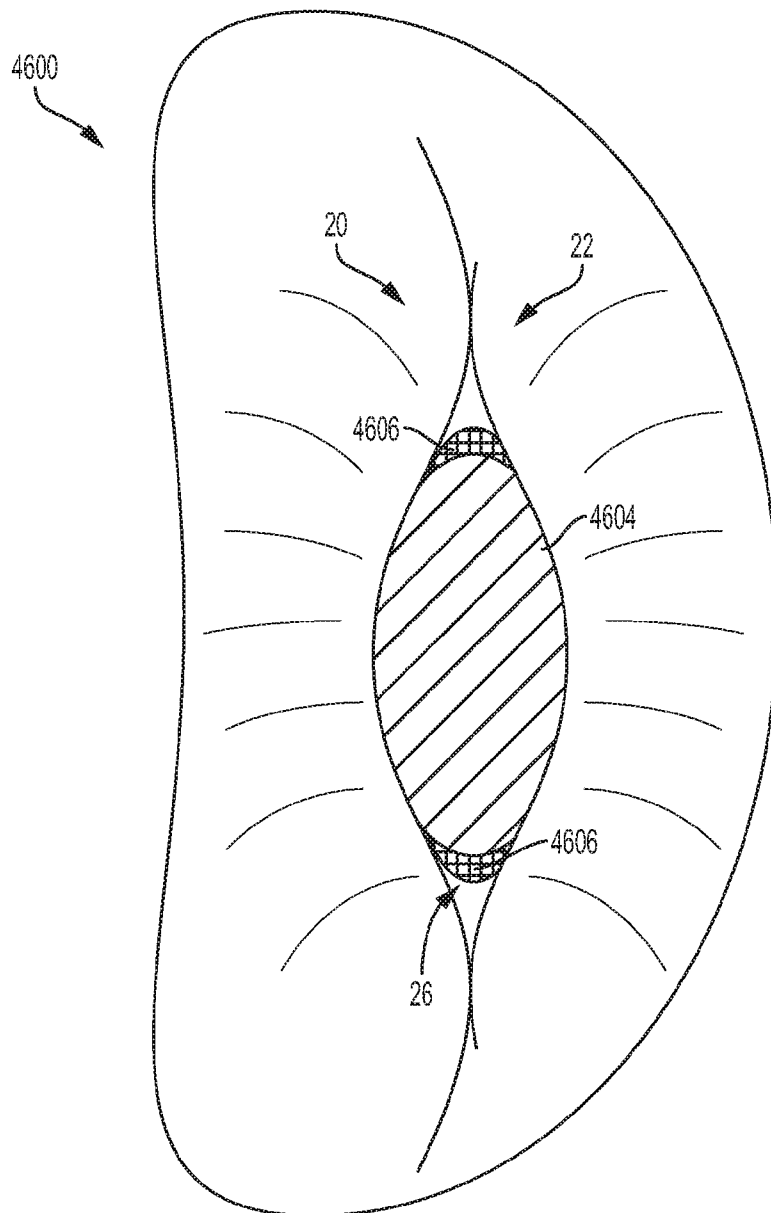



Fig. 217A

**Fig. 218**

**Fig. 219A****Fig. 219B****Fig. 220A****Fig. 220B****Fig. 220C****Fig. 220D****Fig. 220E**

**Fig. 221****Fig. 222**

**Fig. 223**

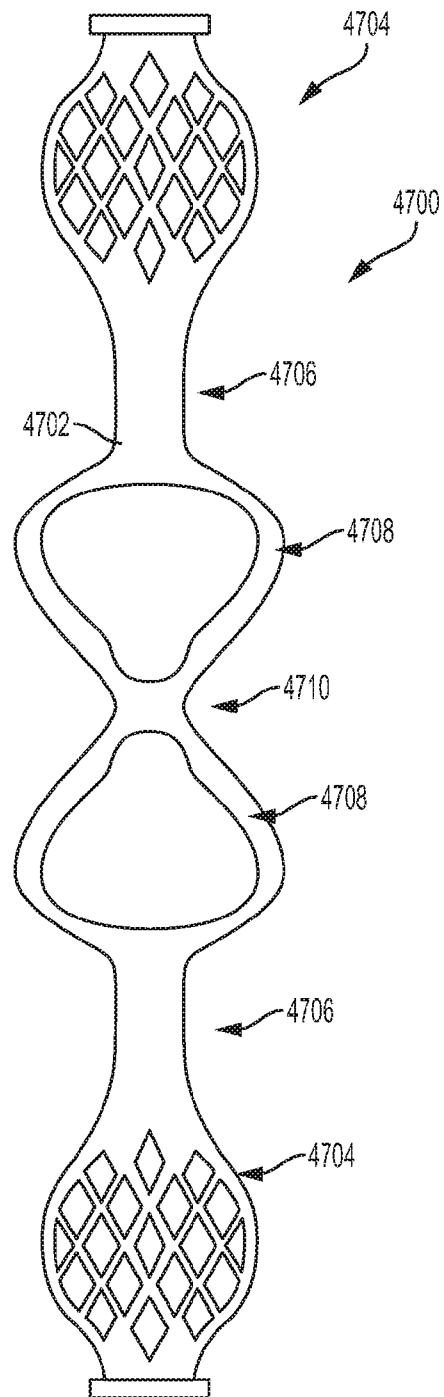**Fig. 224**

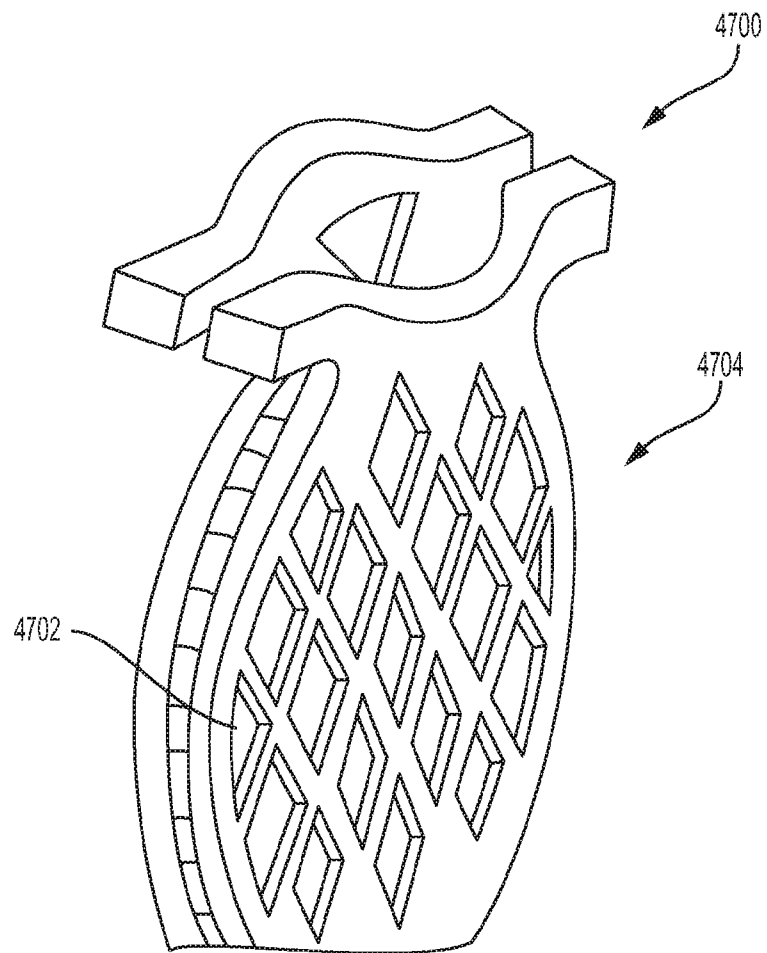
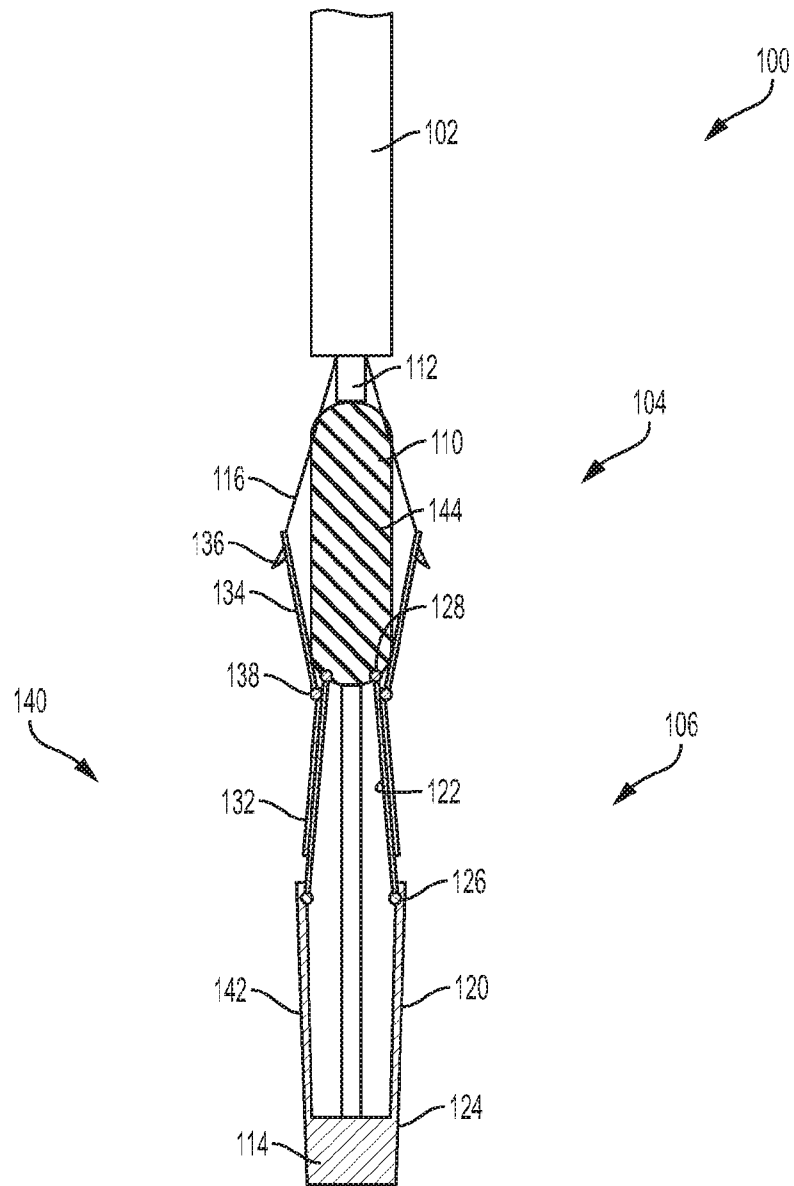


Fig. 225

**FIG. 227**

232/262

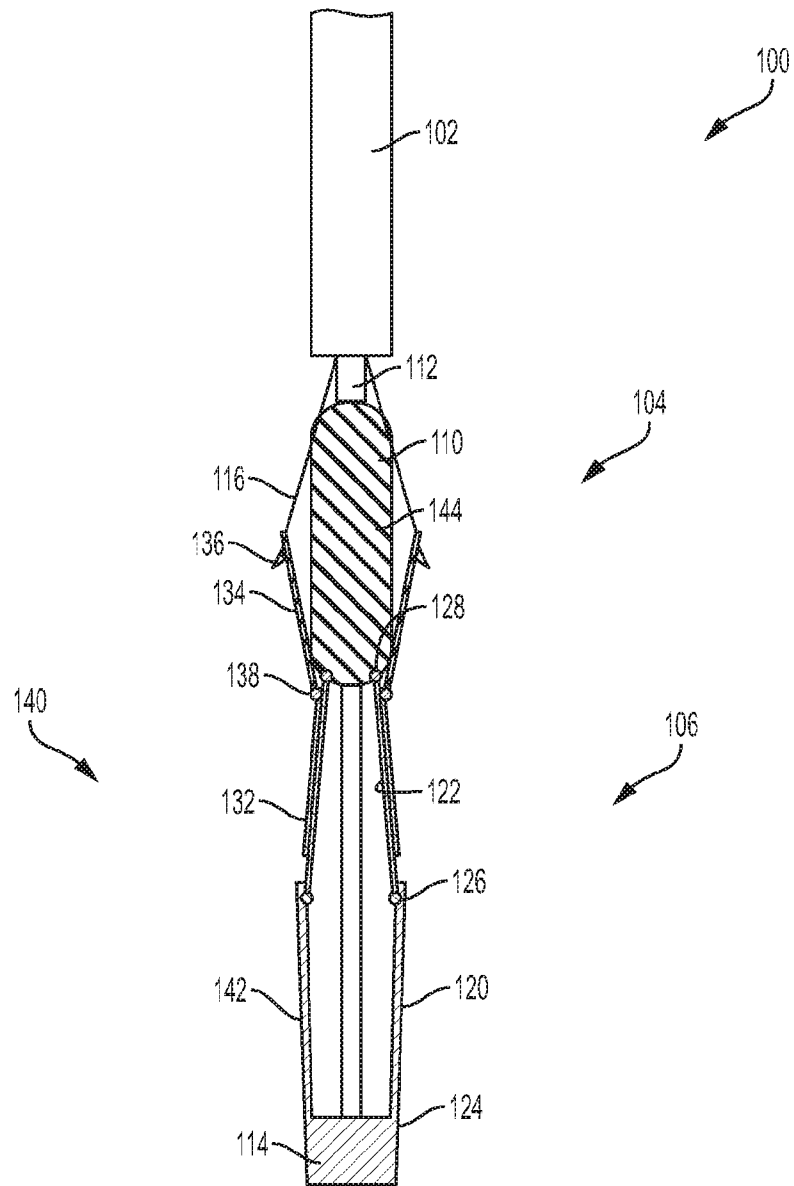
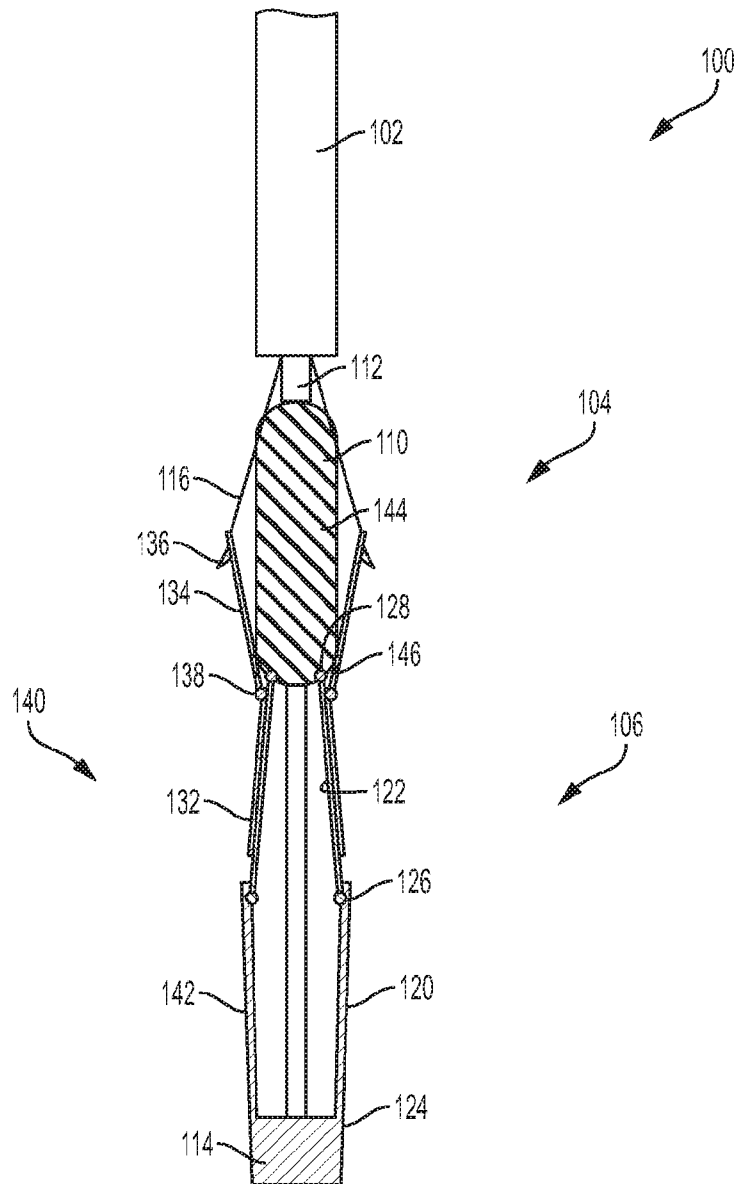
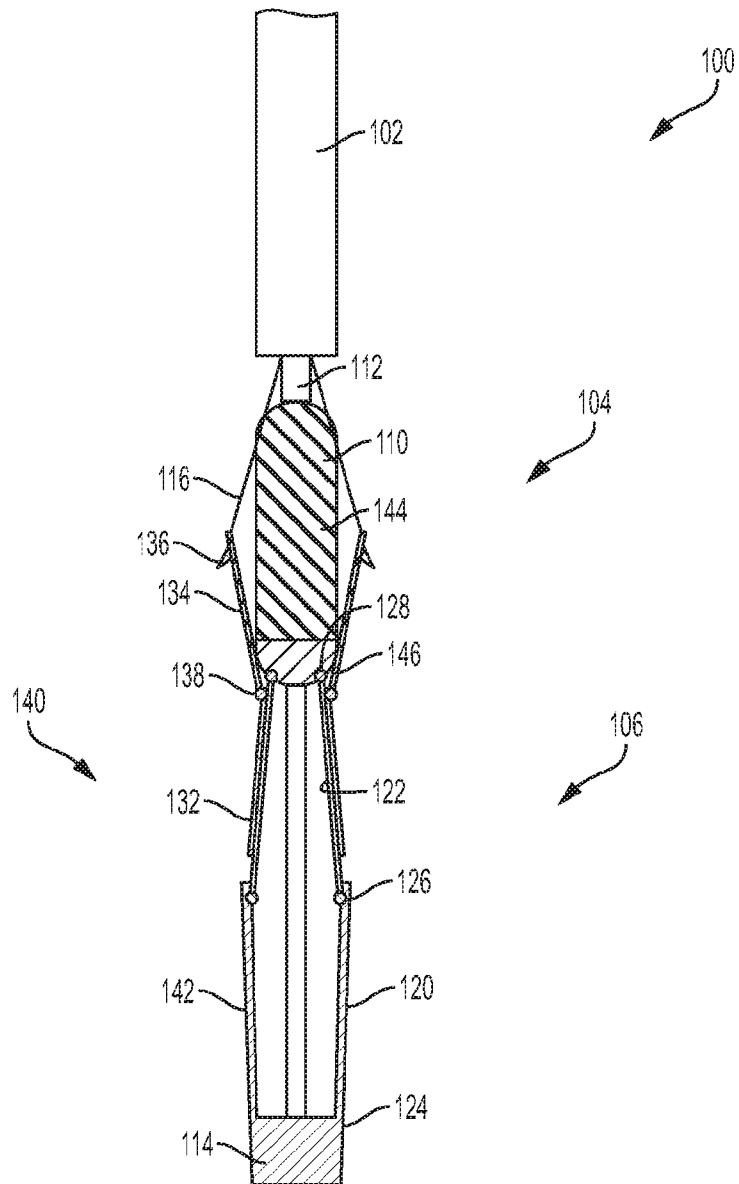


FIG. 228

234/262

**FIG. 230**

235/262

**FIG. 231**

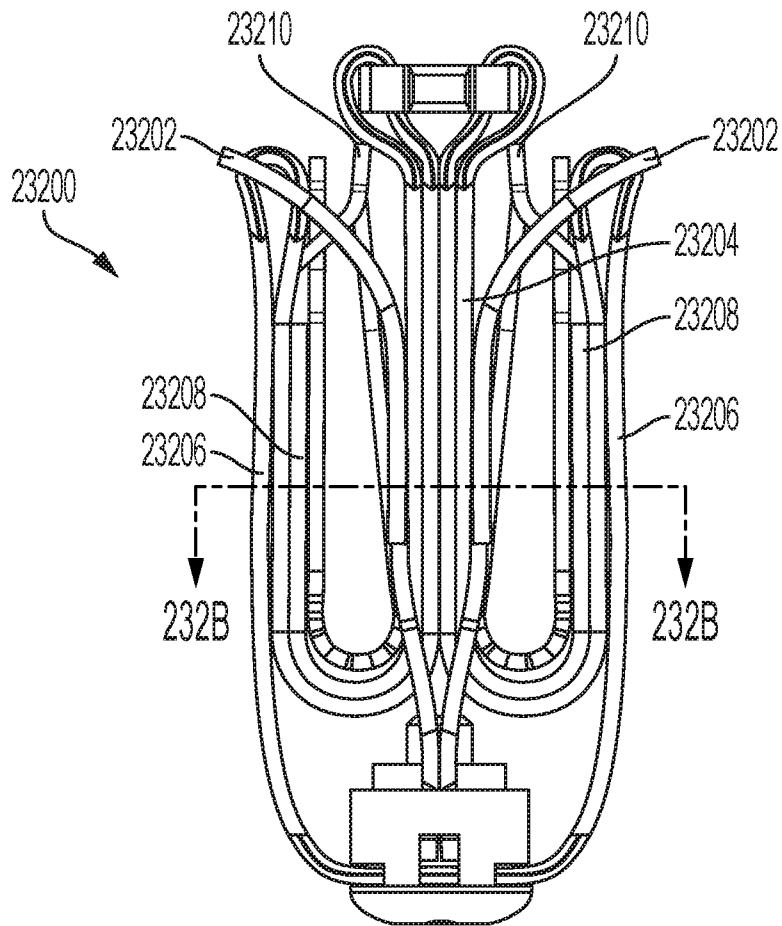


Fig. 232A

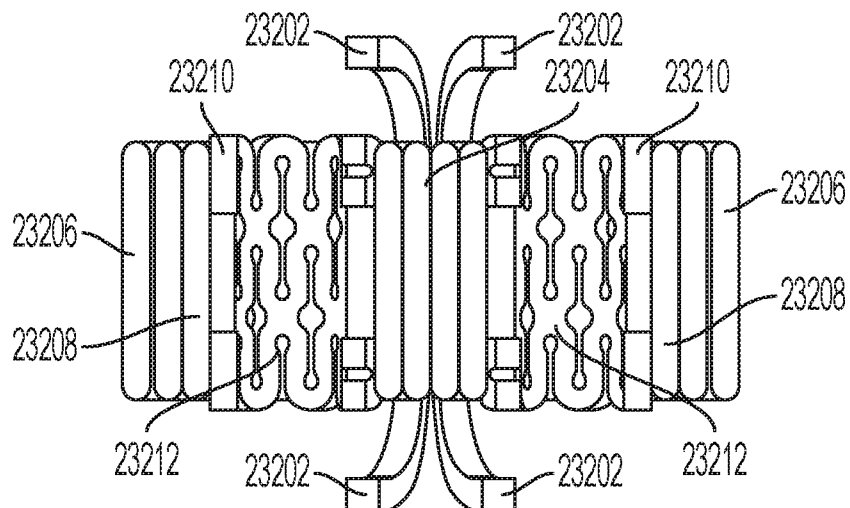


Fig. 232B

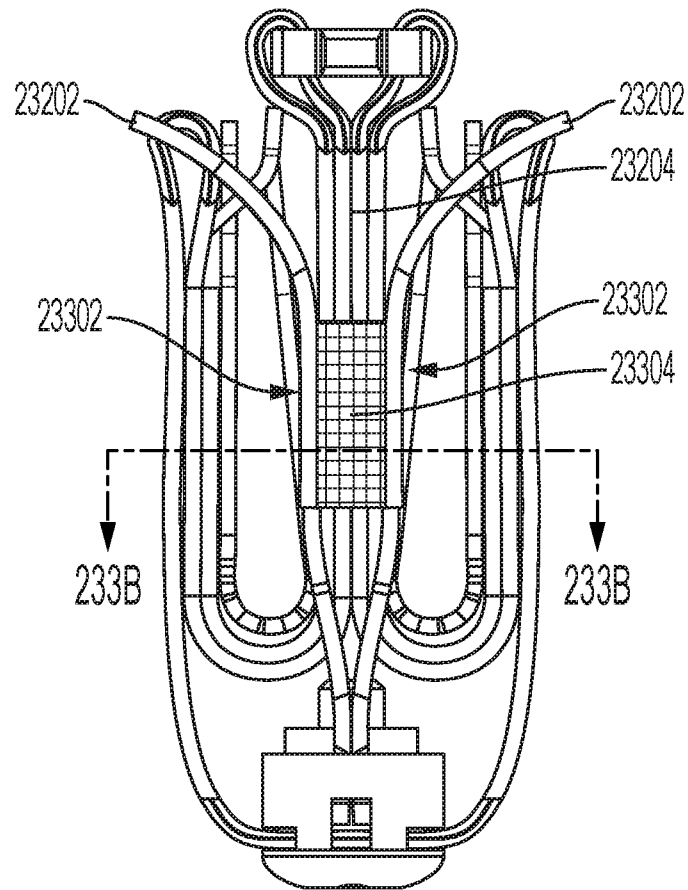


Fig. 233A

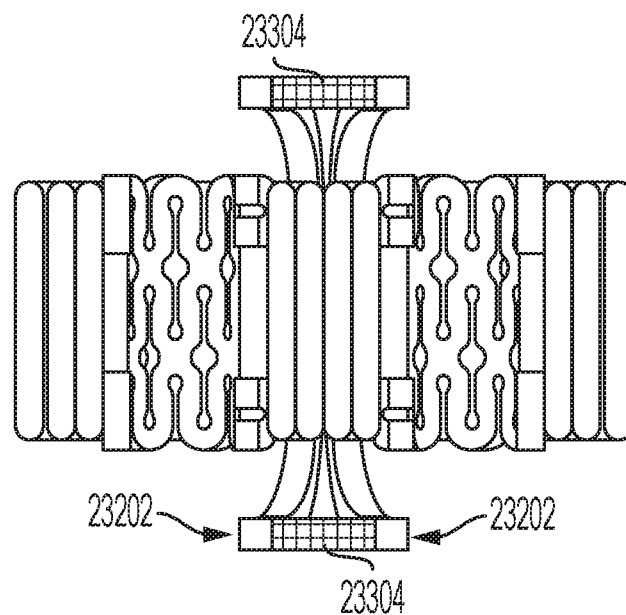


Fig. 233B

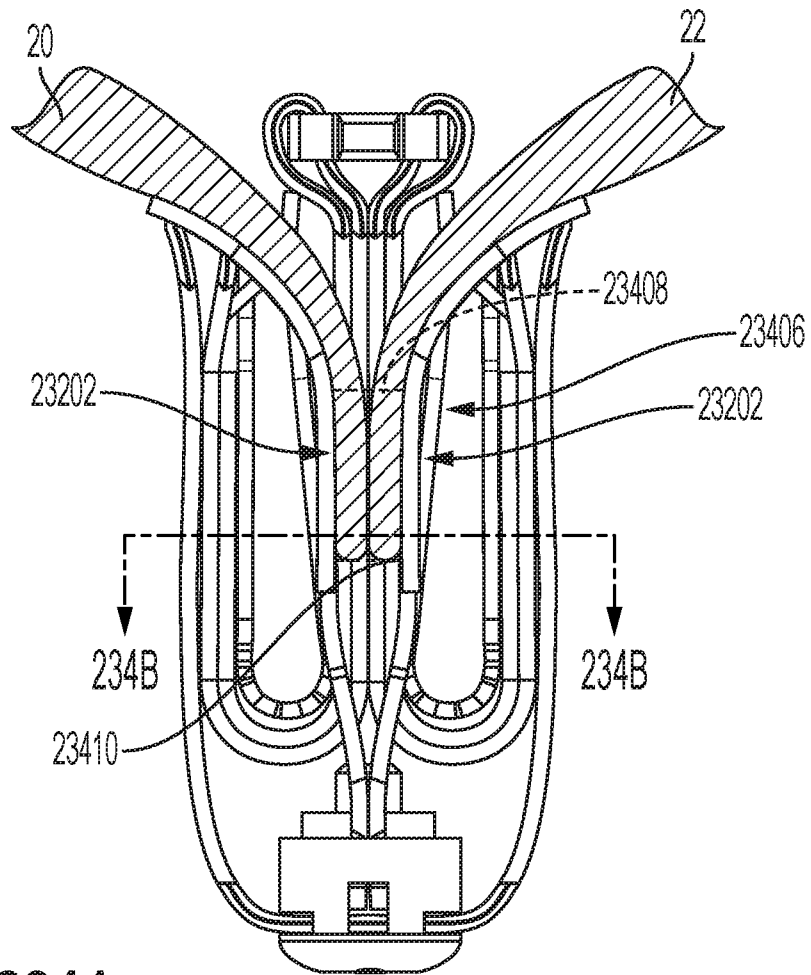


Fig. 234A

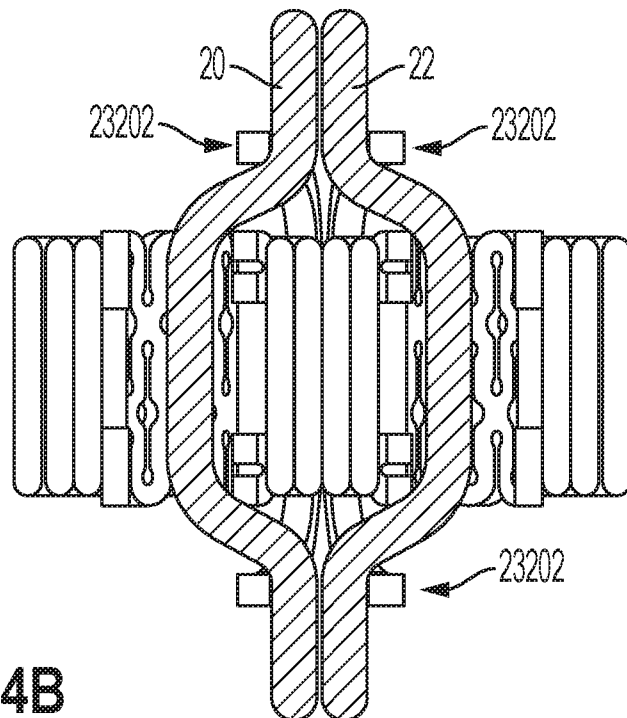


Fig. 234B

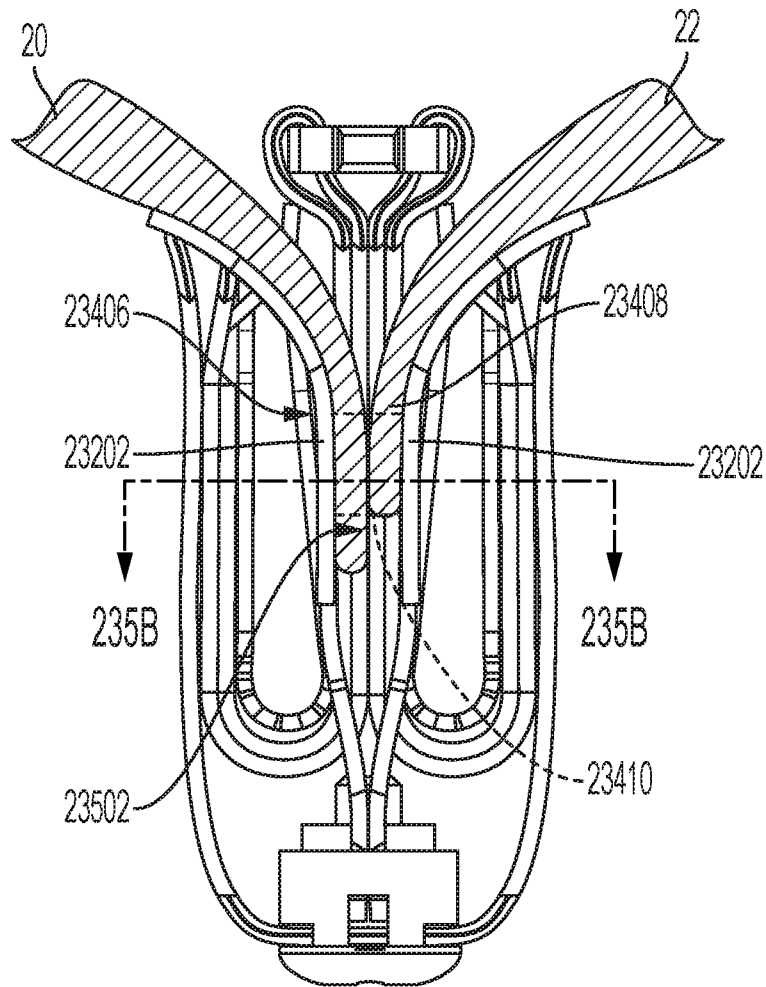


Fig. 235A

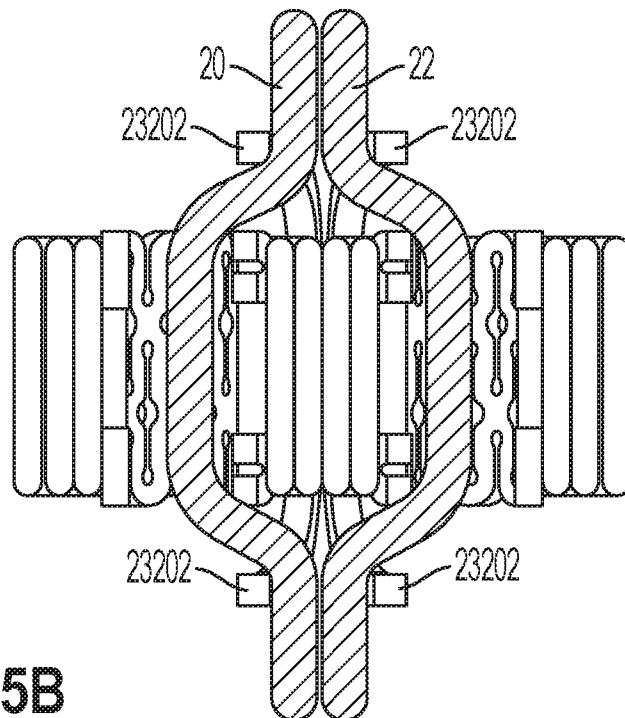


Fig. 235B

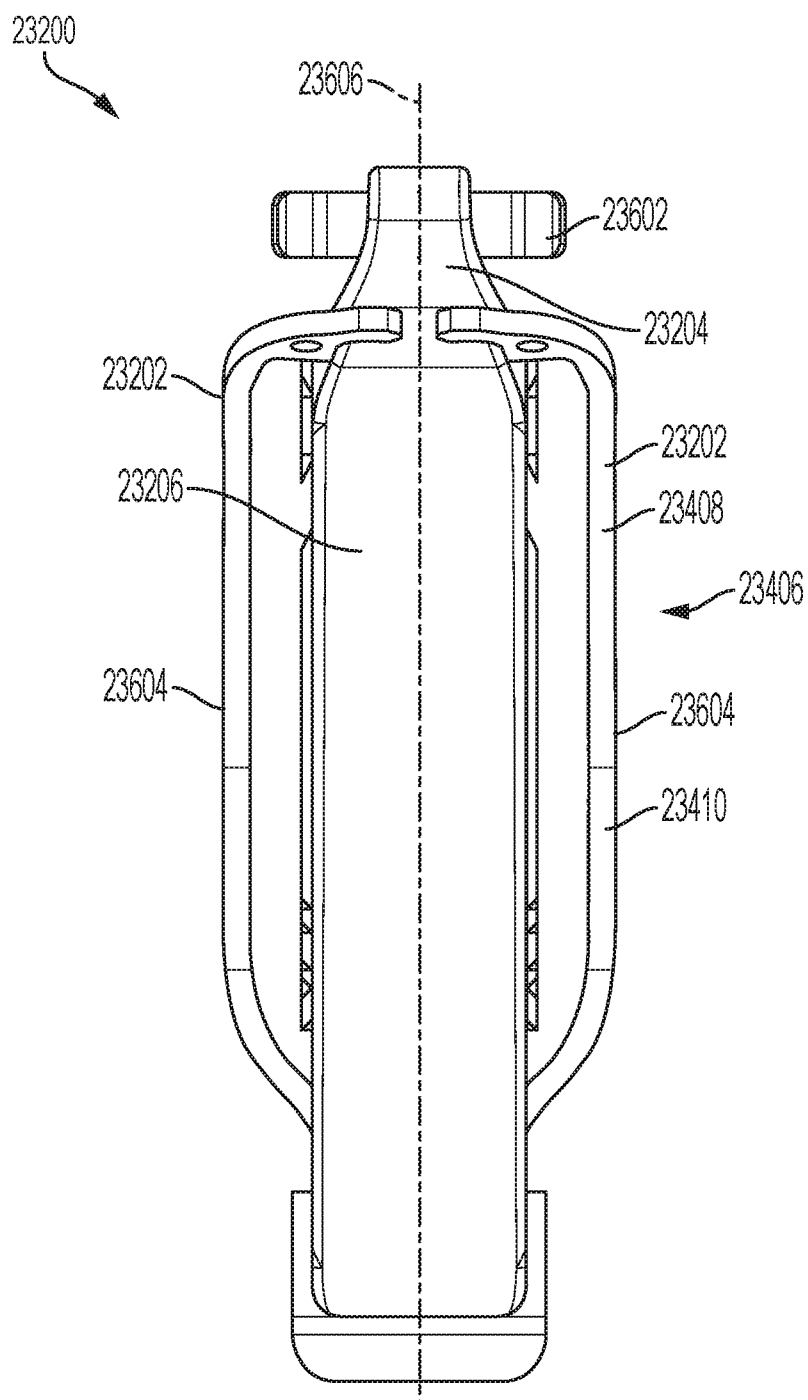


Fig. 236

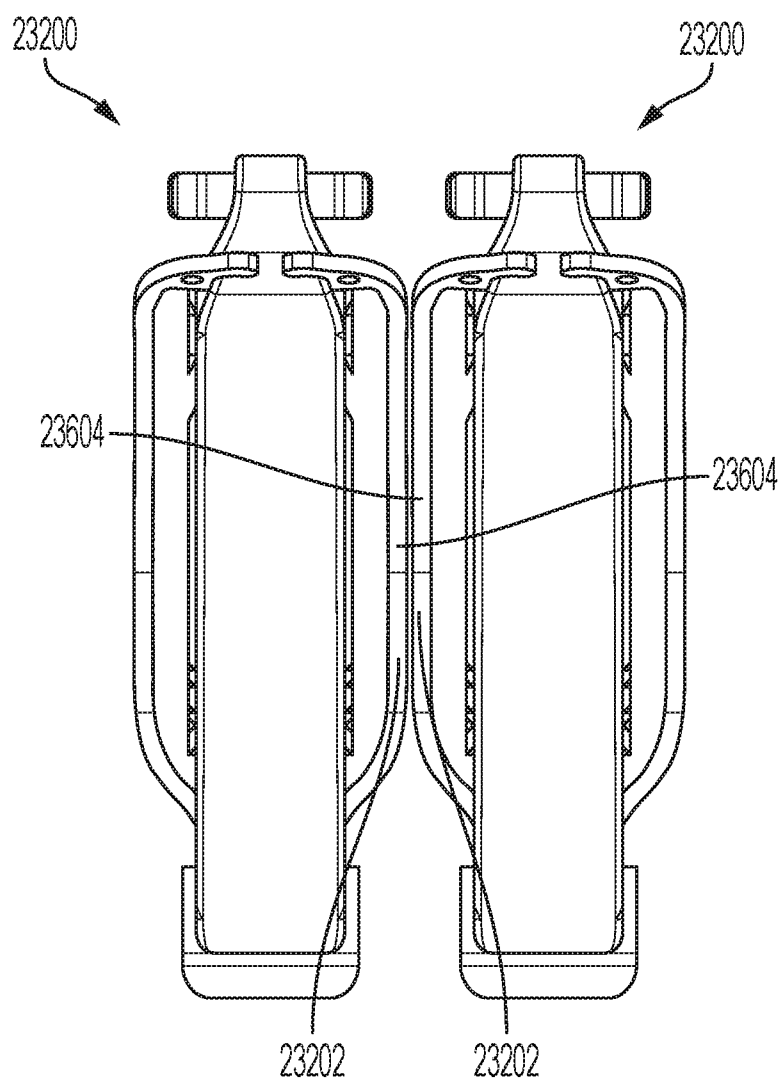


Fig. 237

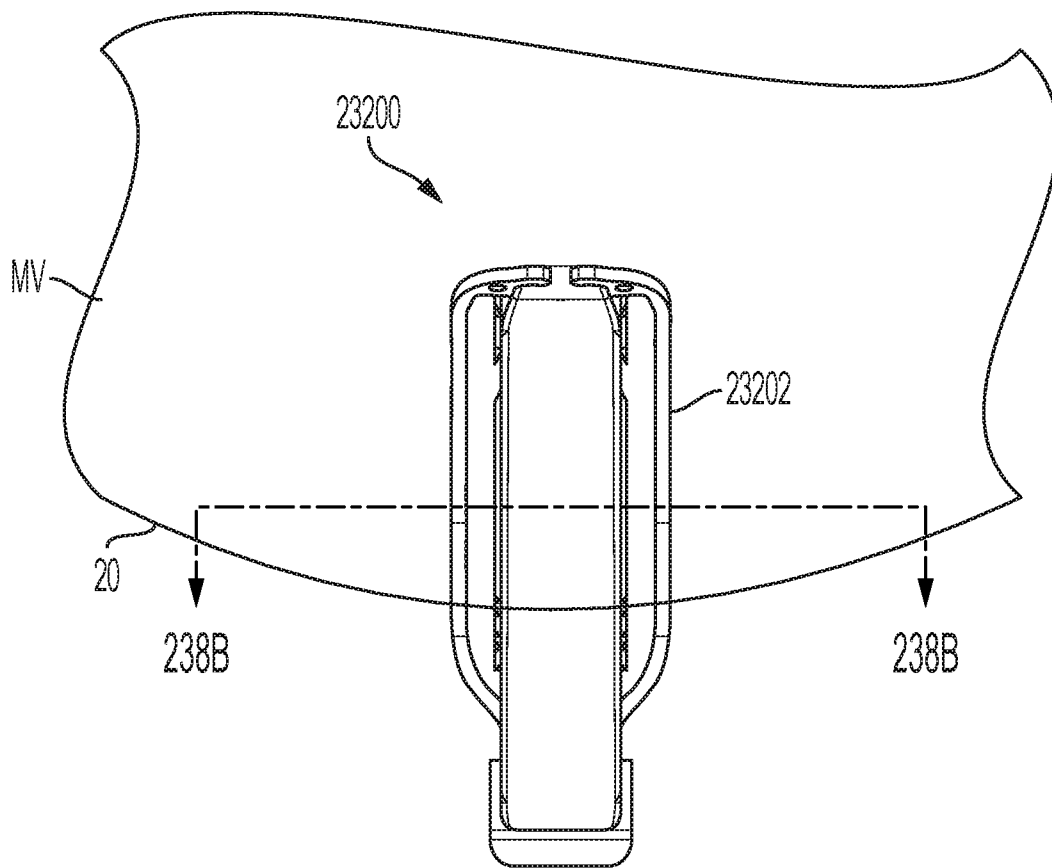


Fig. 238A

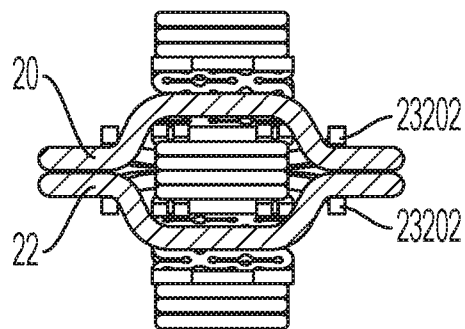


Fig. 238B

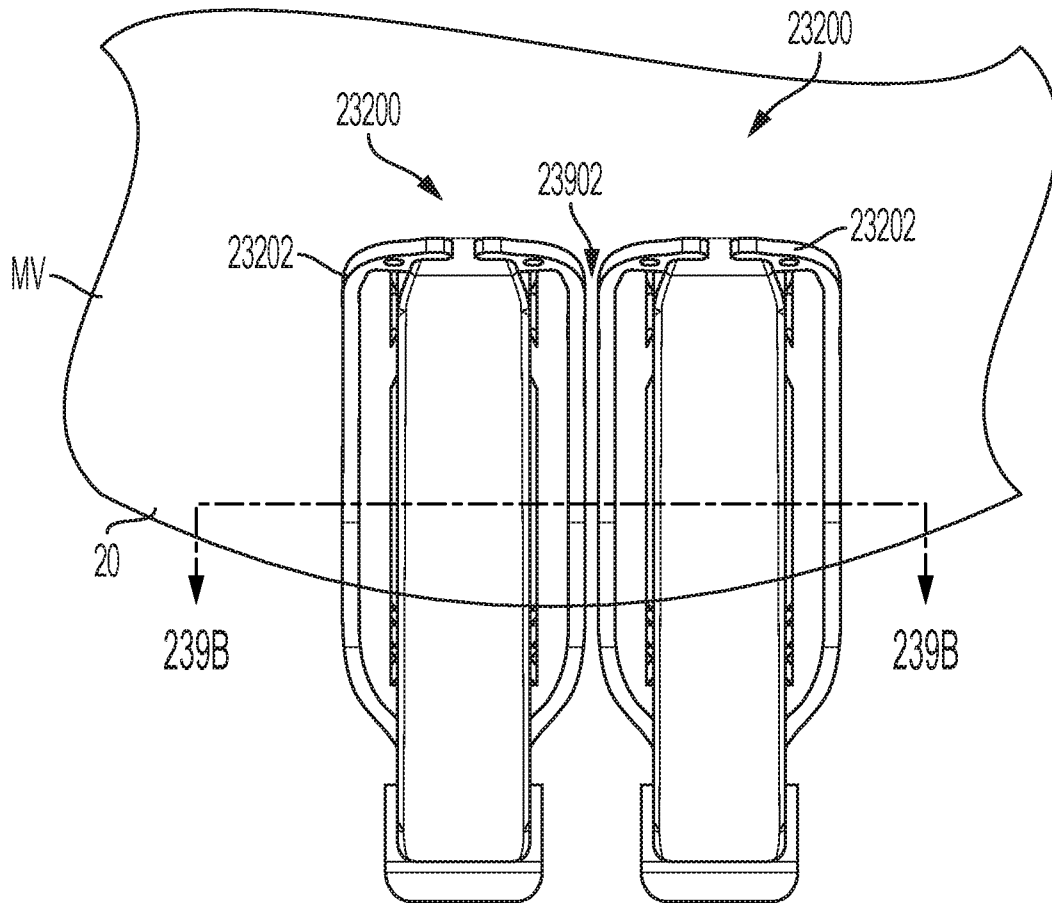


Fig. 239A

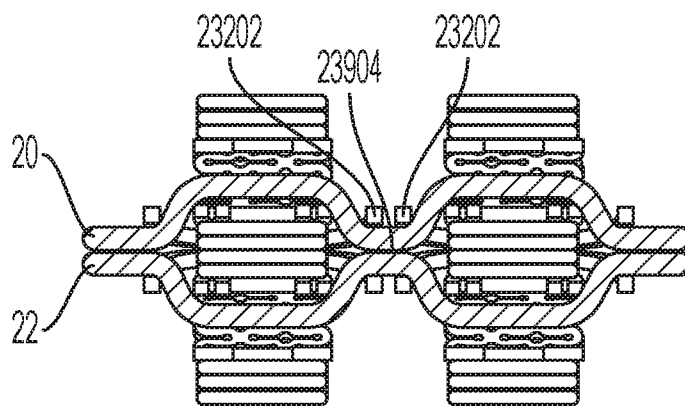


Fig. 239B

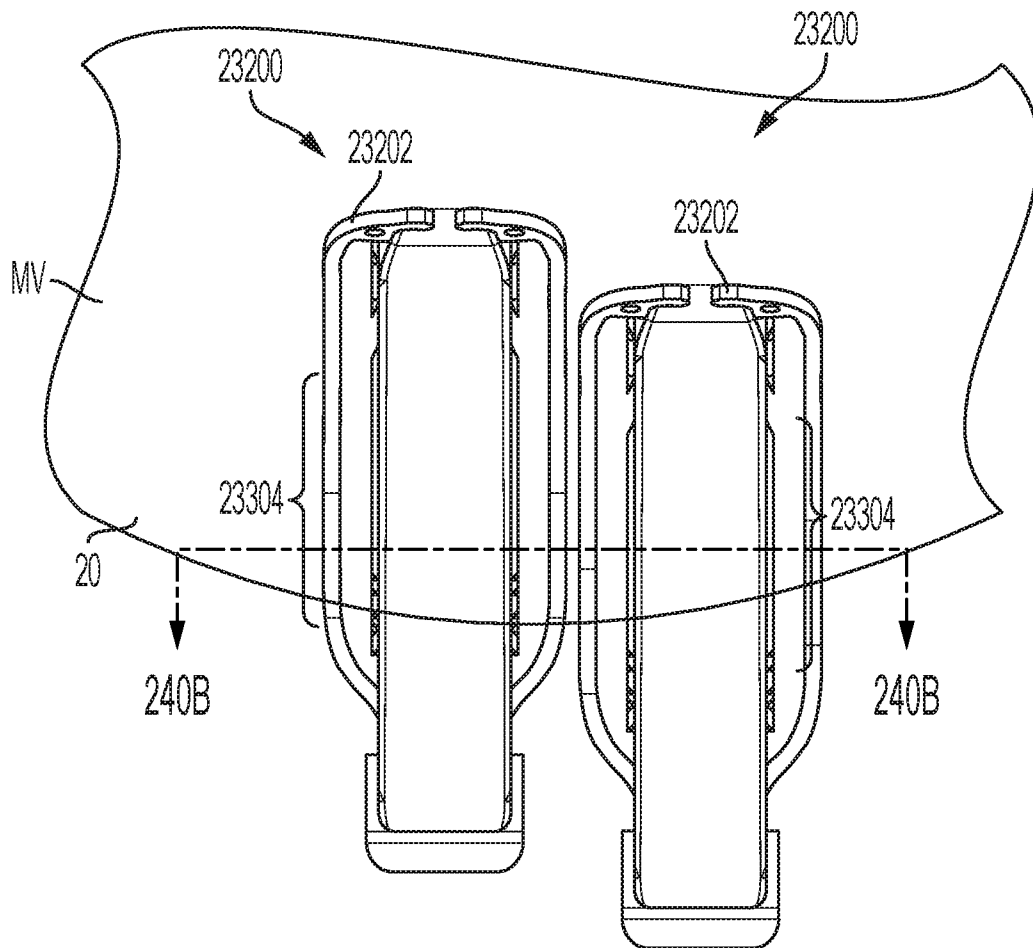


Fig. 240A

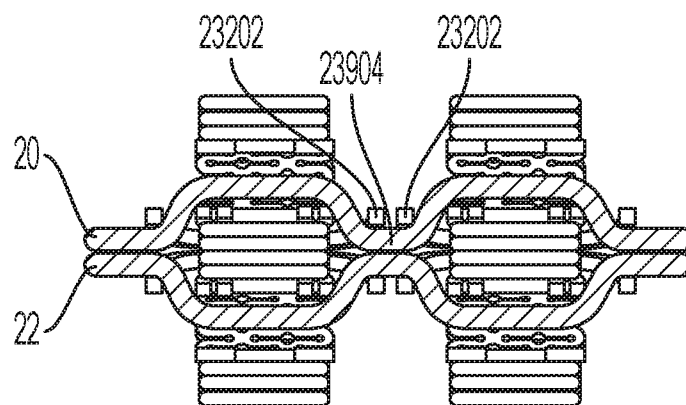


Fig. 240B

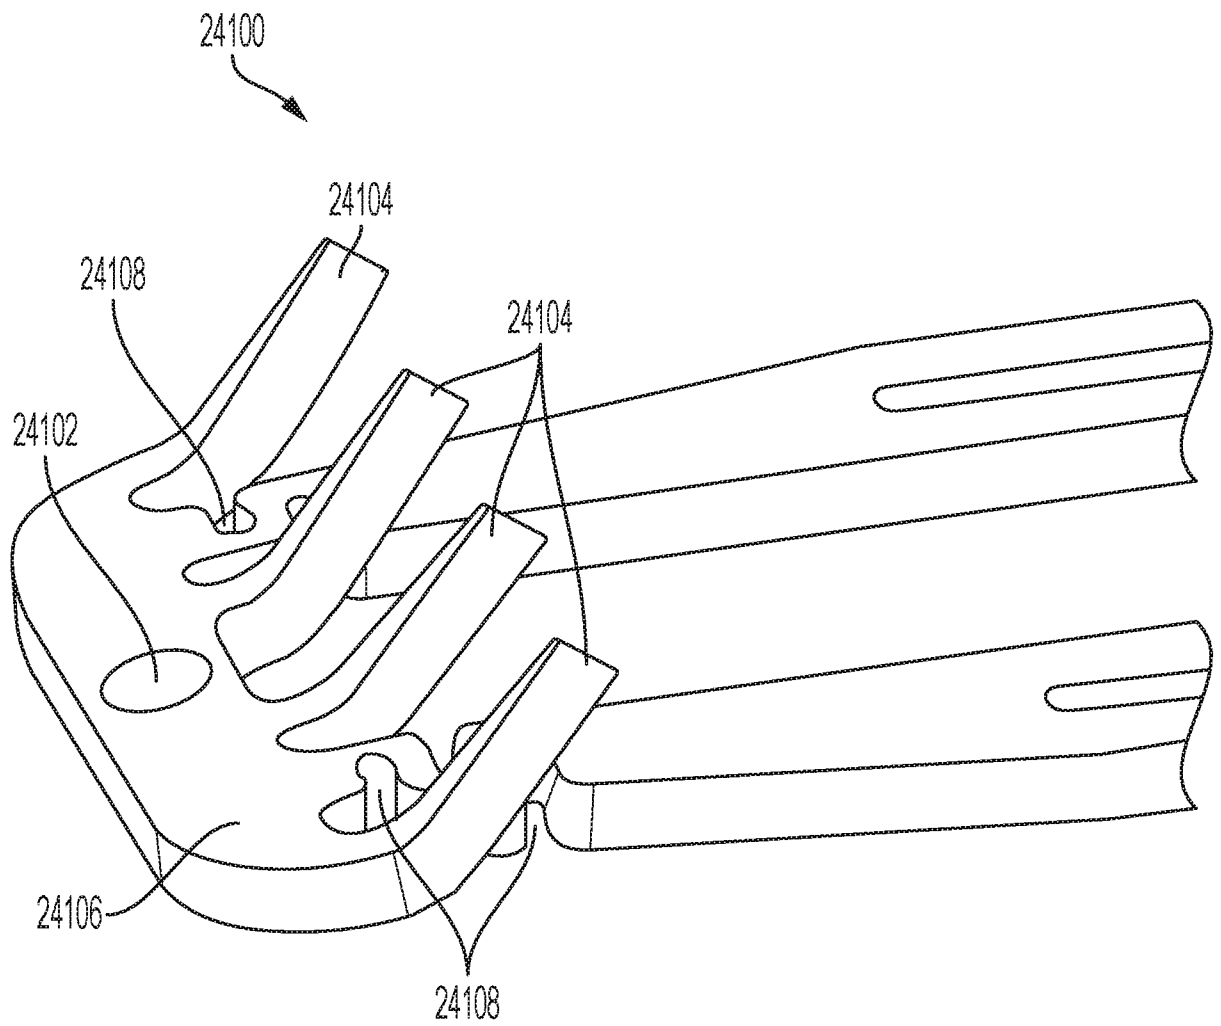


Fig. 241

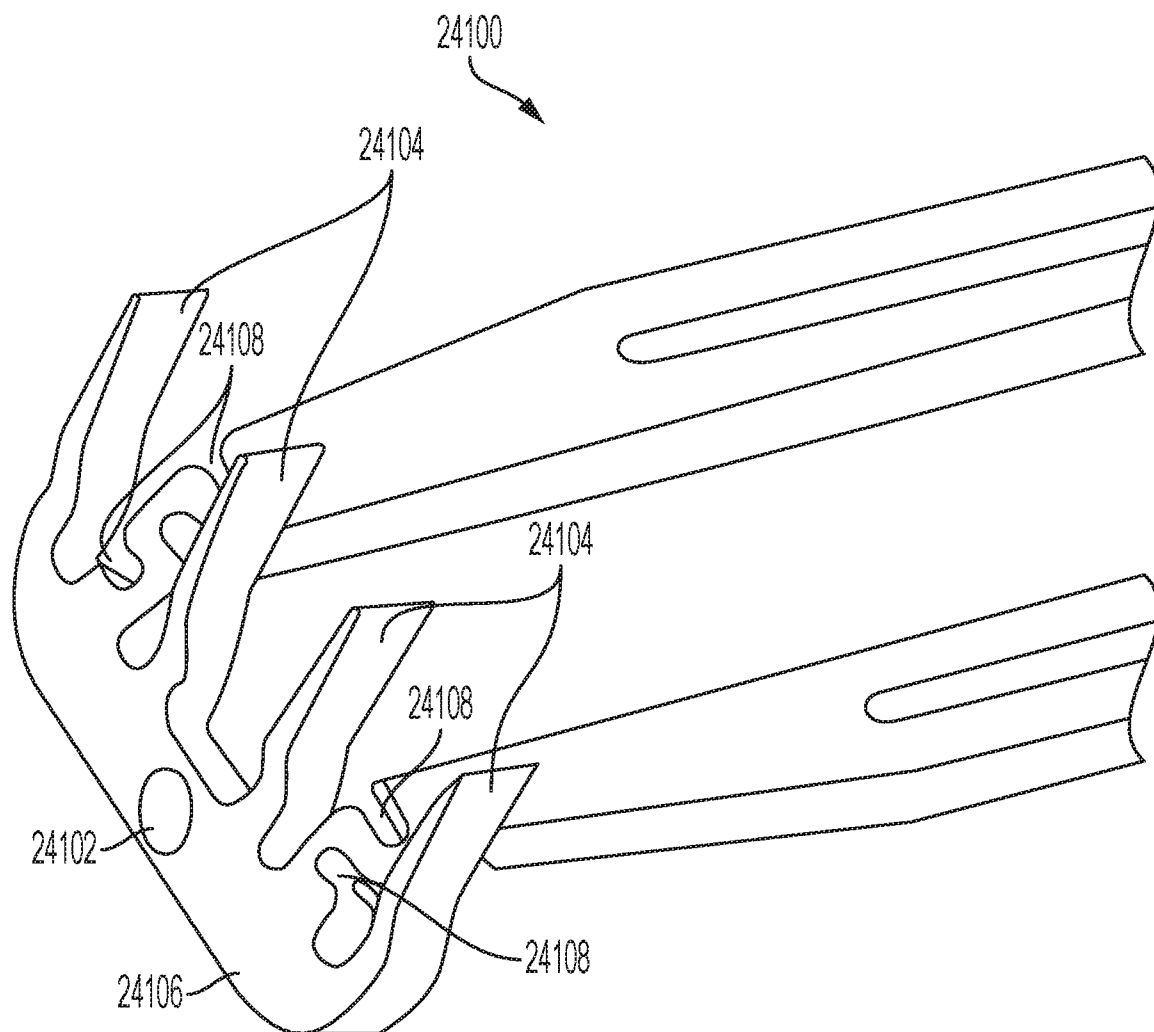


Fig. 242

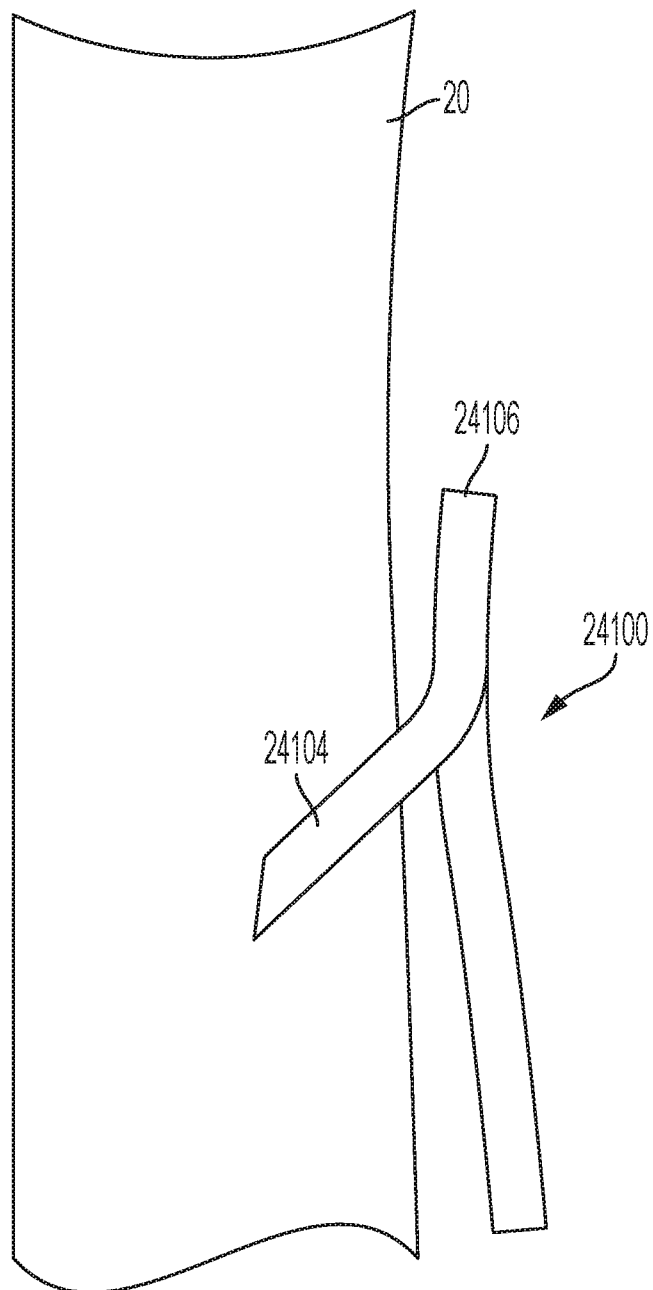


Fig. 243A

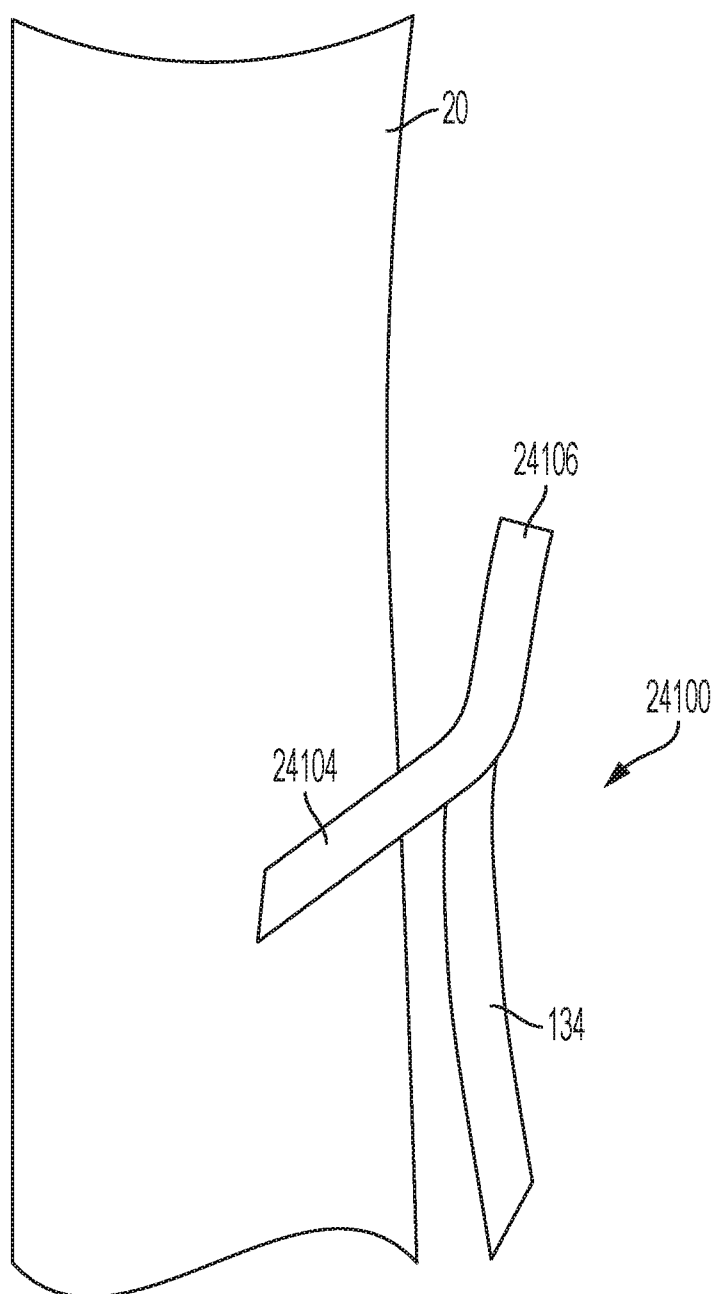


Fig. 243B

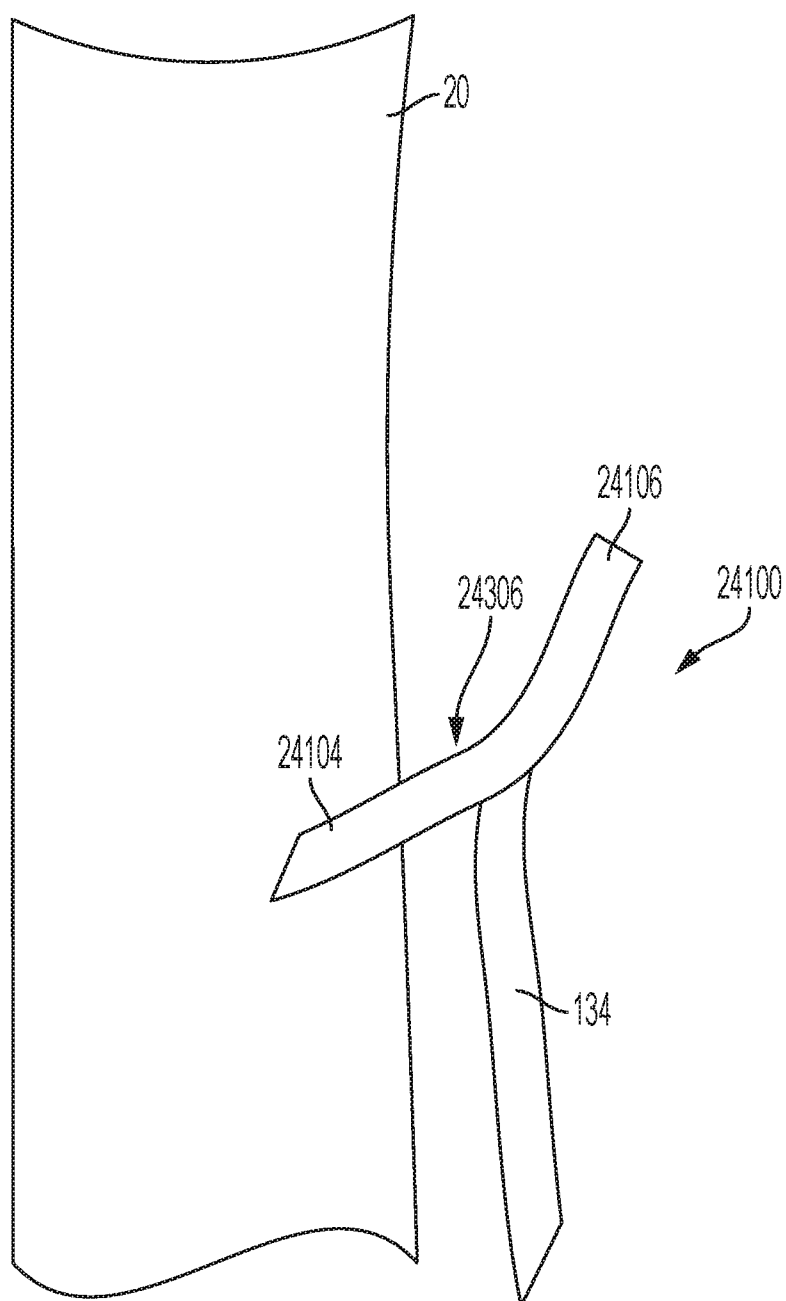


Fig. 243C

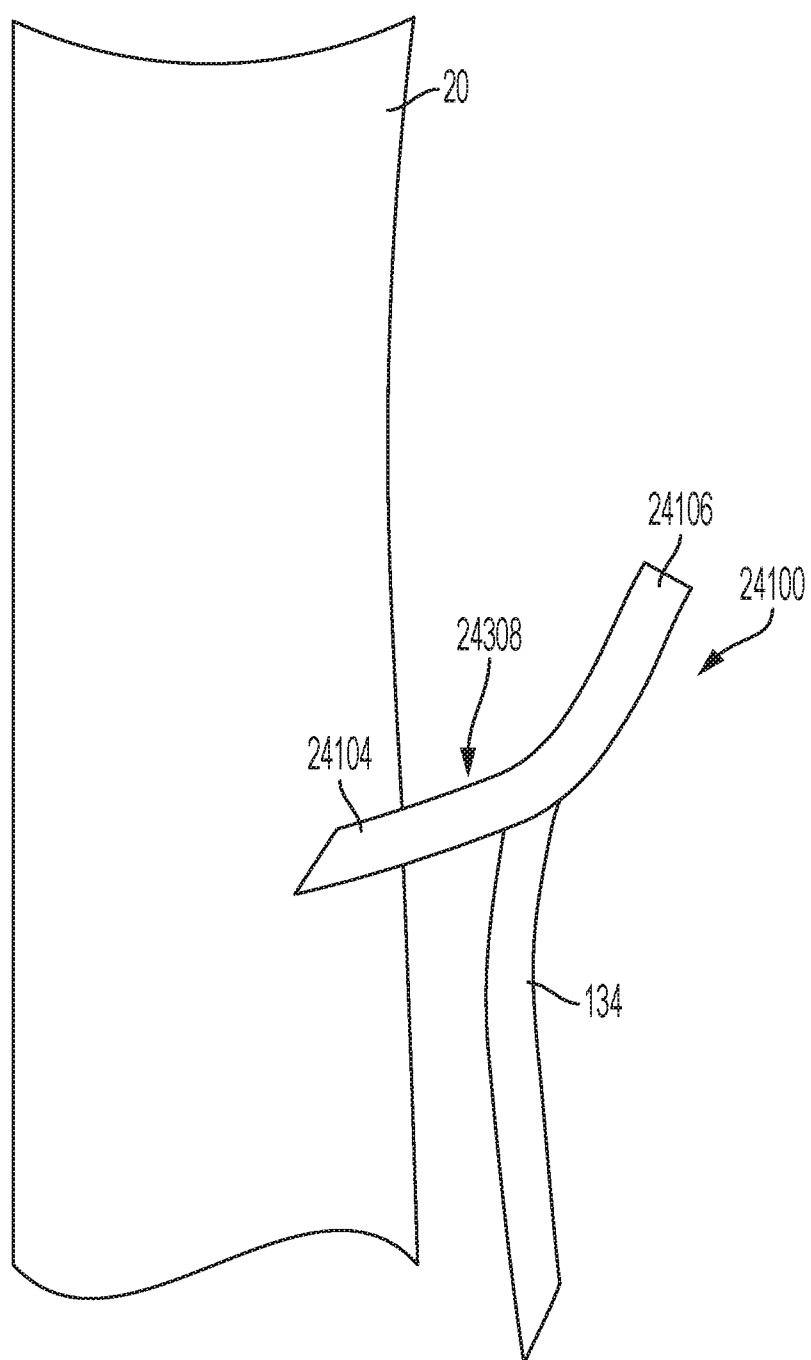


Fig. 243D

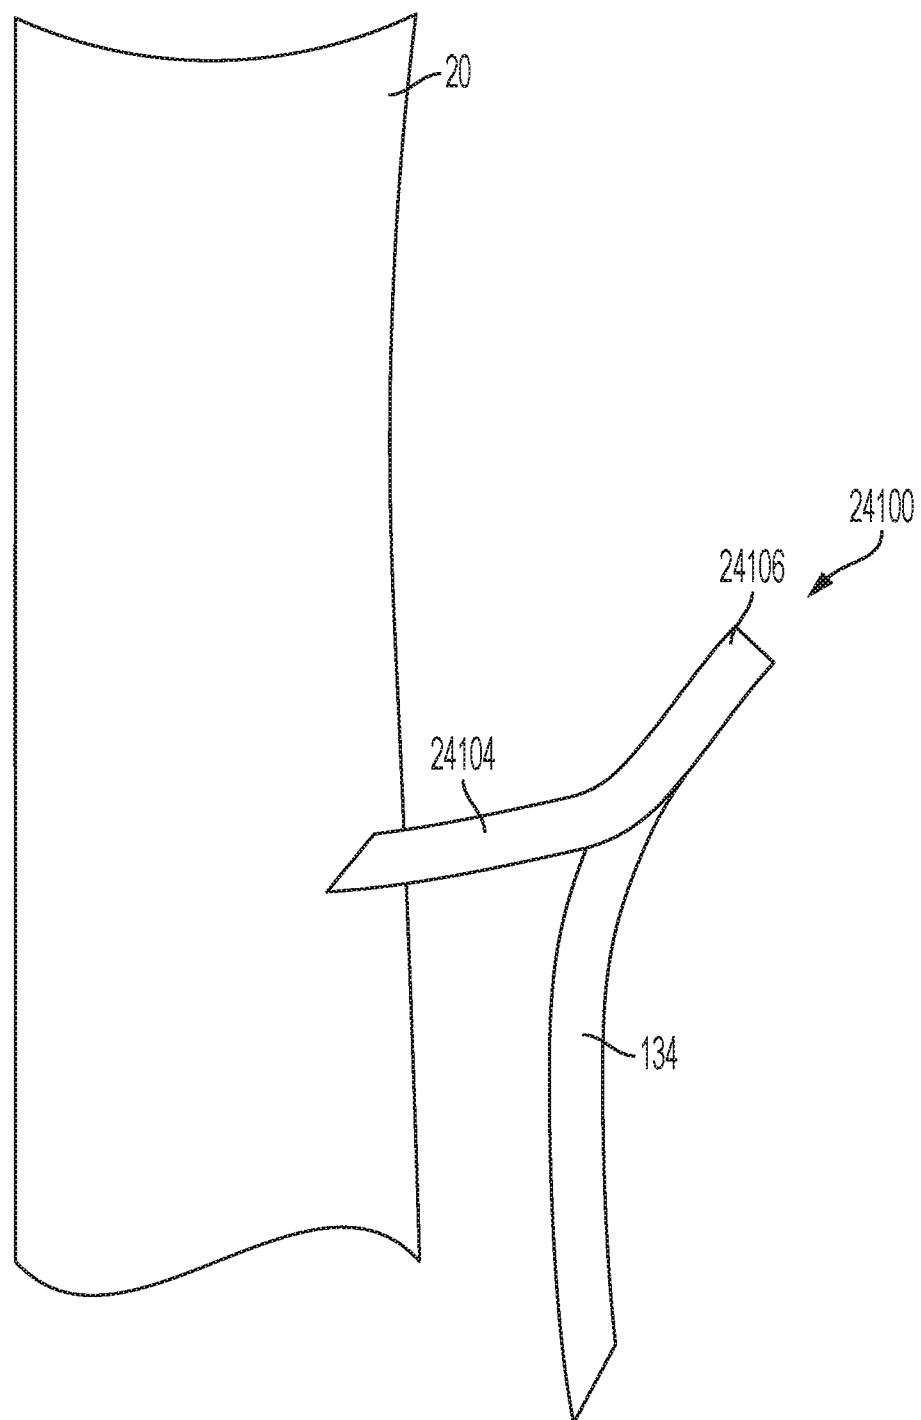


Fig. 243E

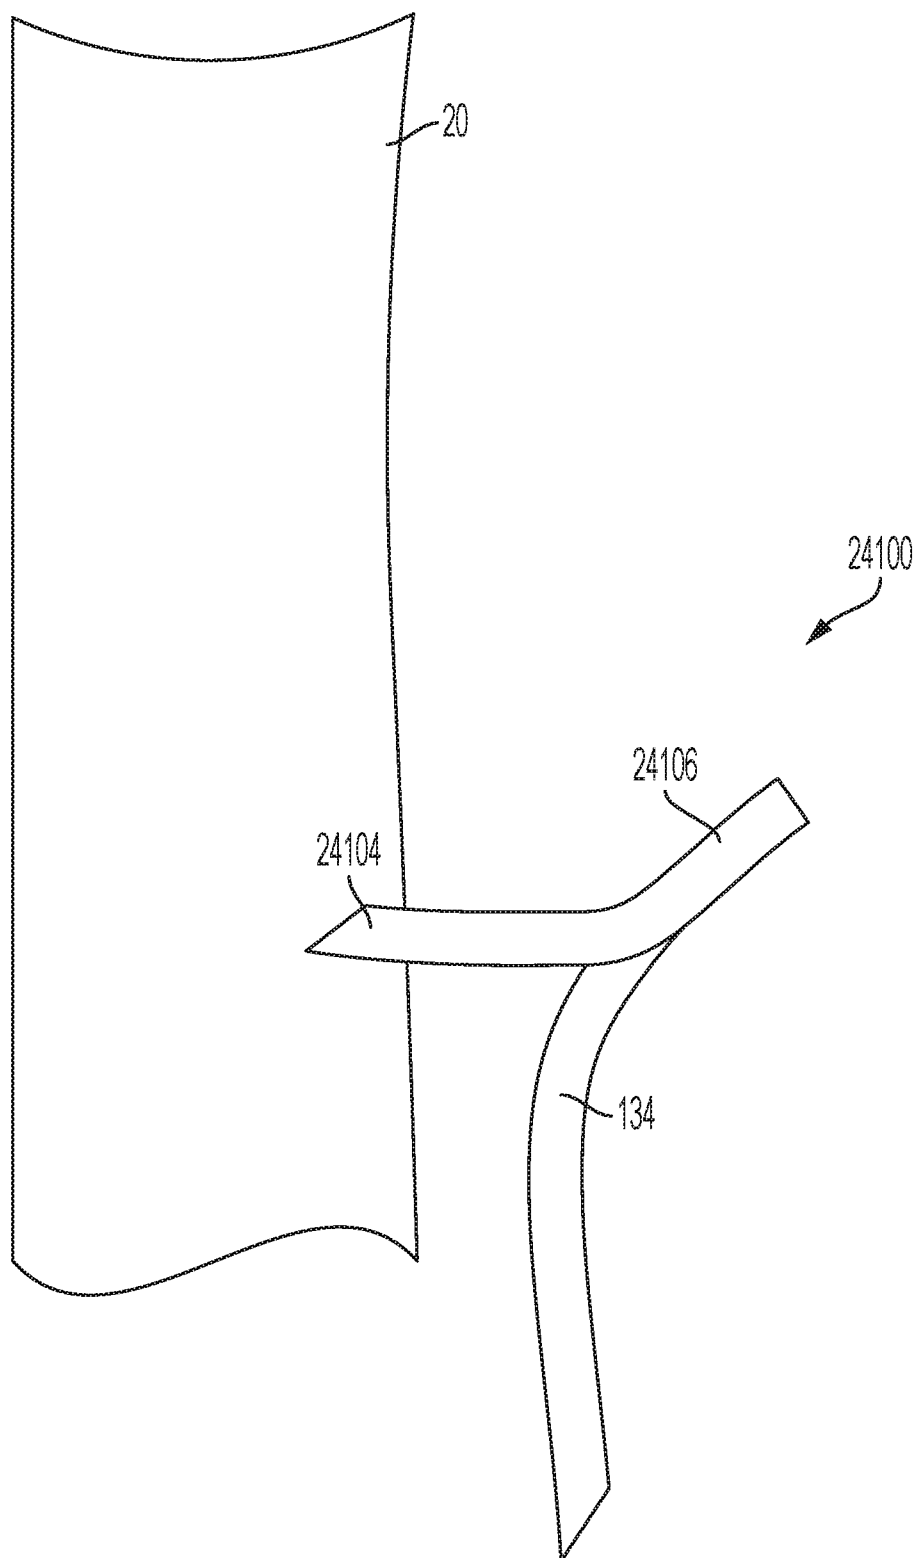


Fig. 243F

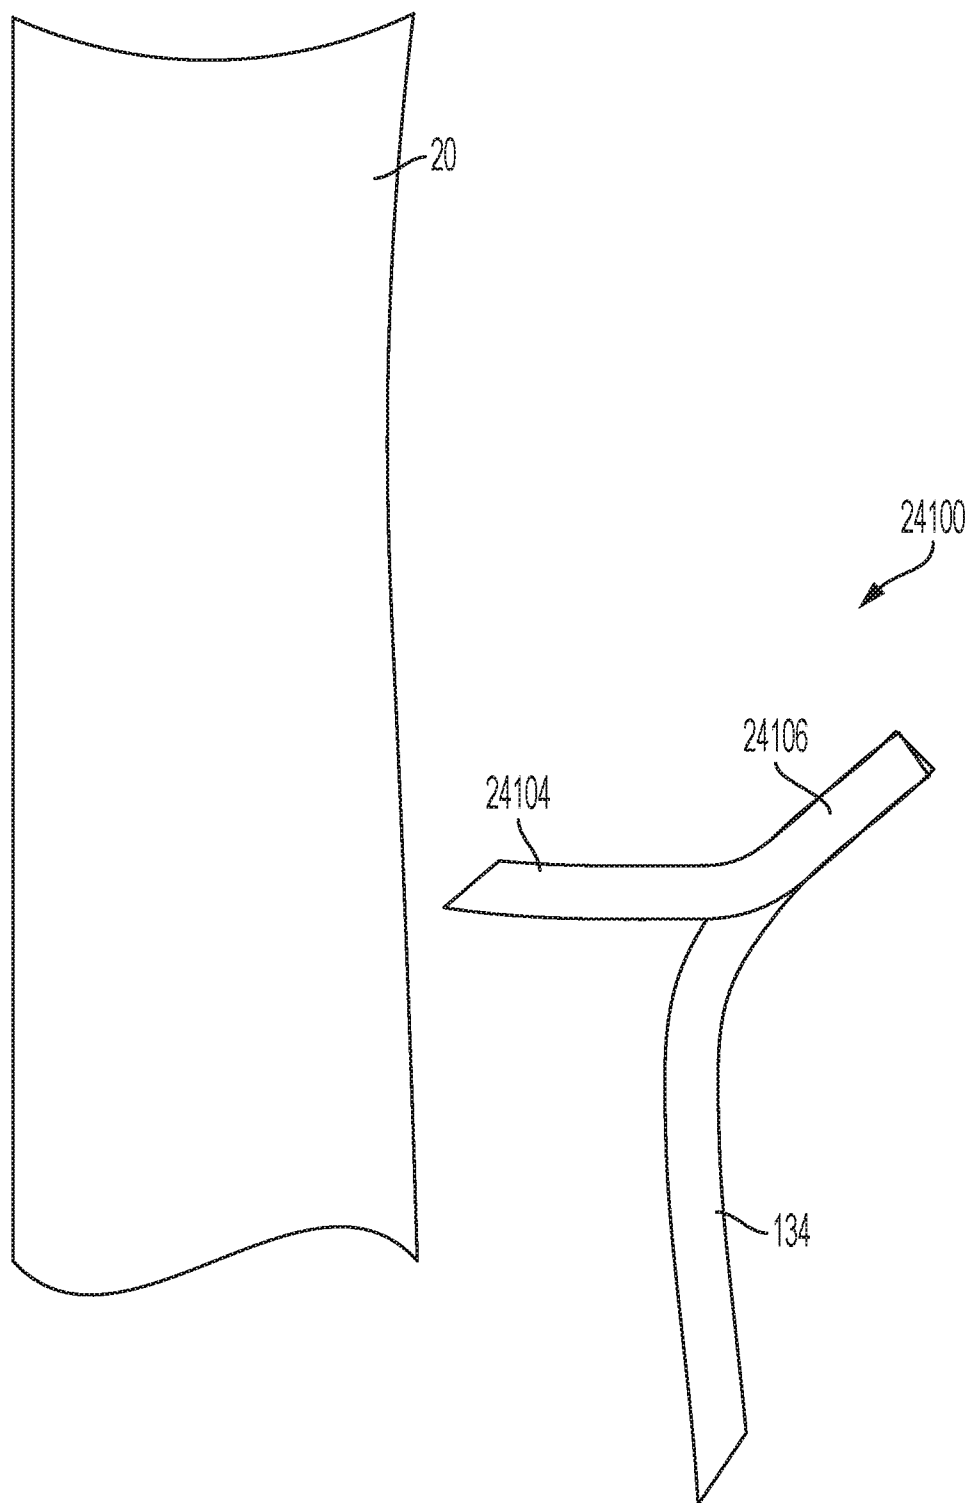


Fig. 243G

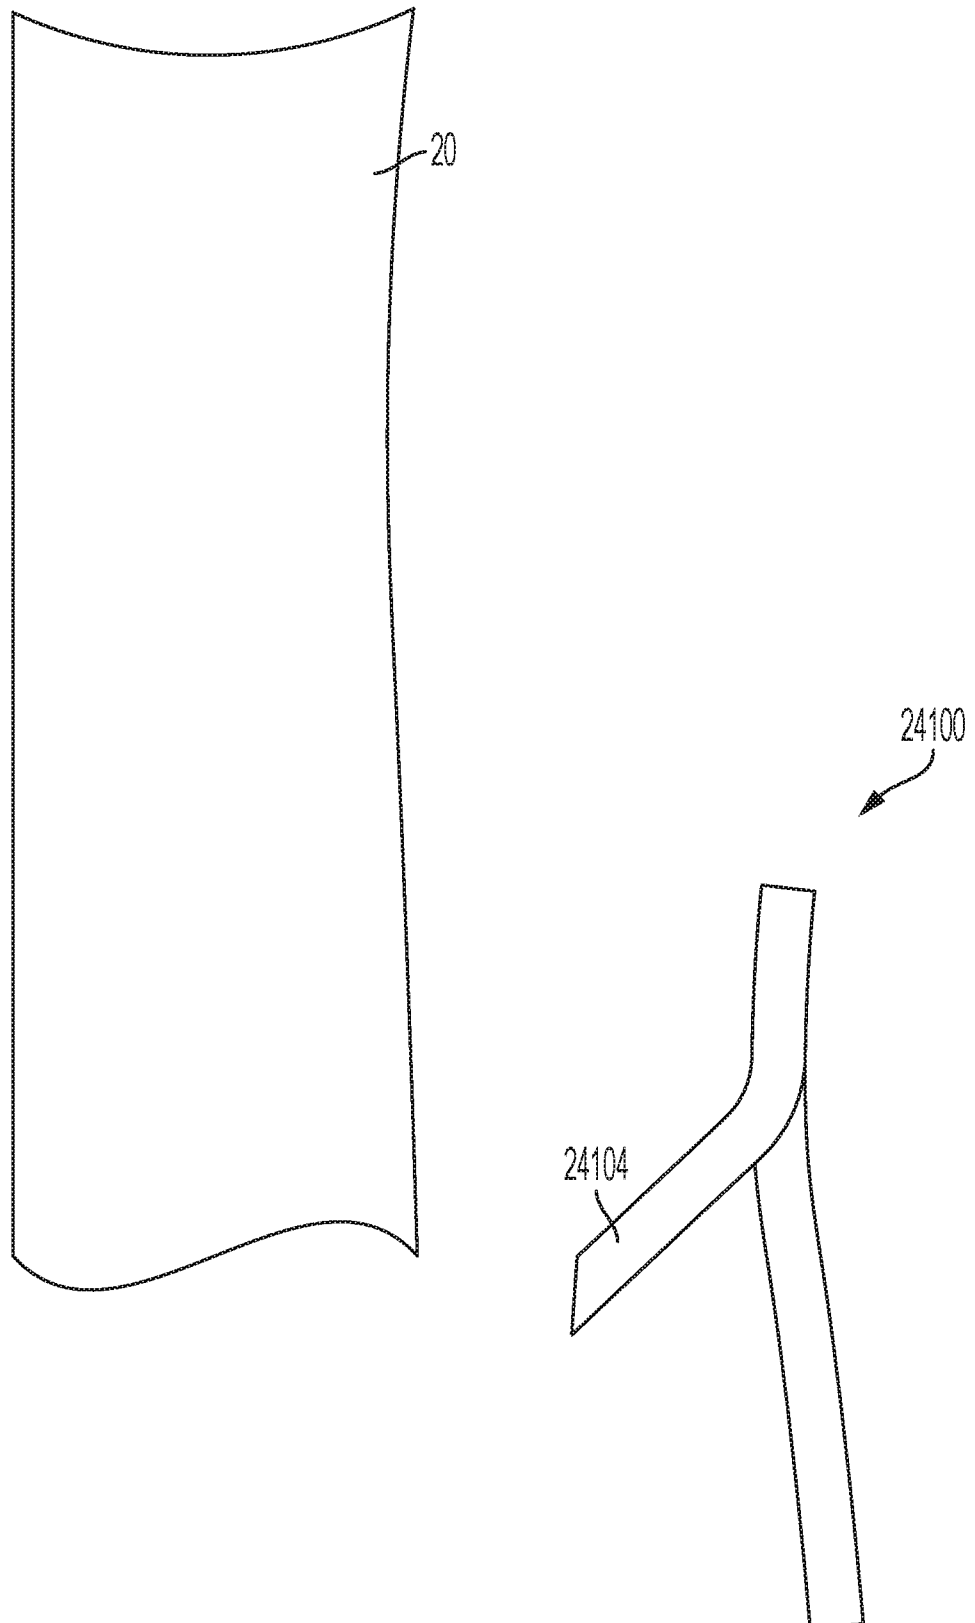


Fig. 243H

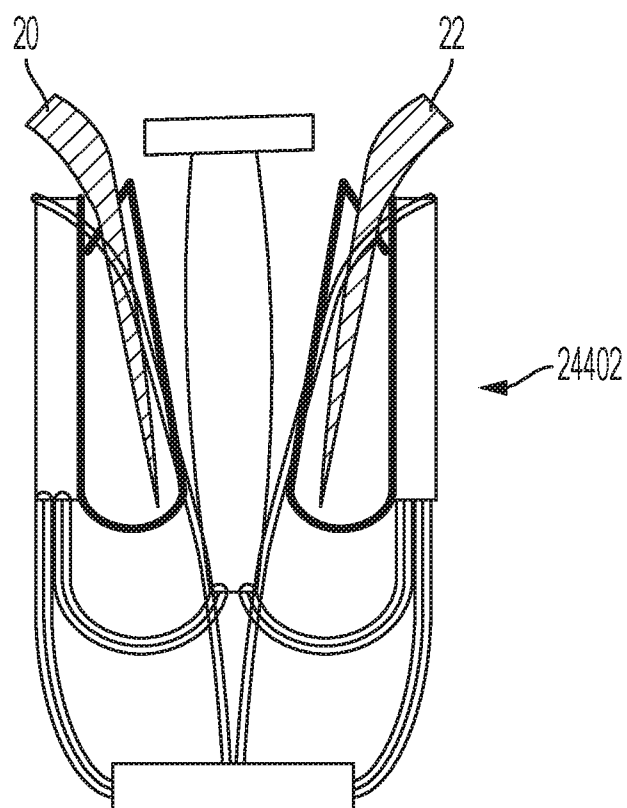


Fig. 244A

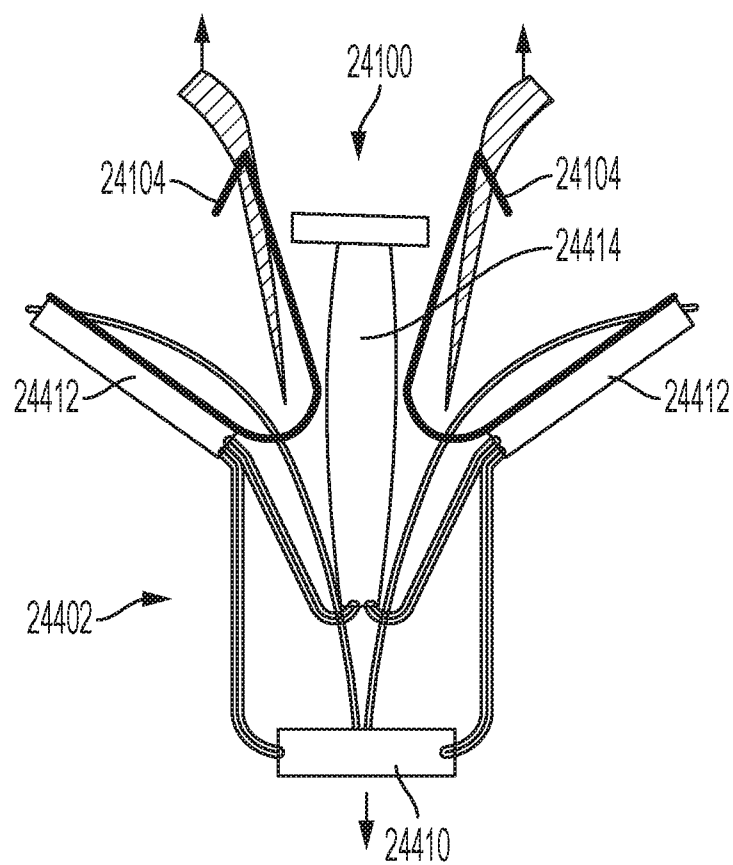


Fig. 244B

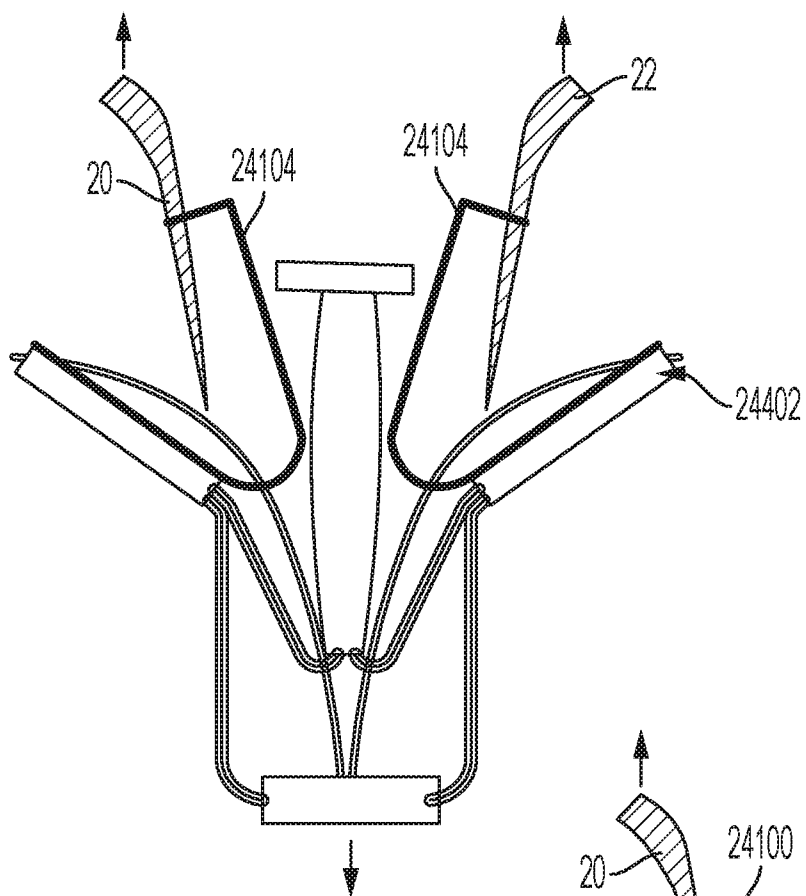


Fig. 244C

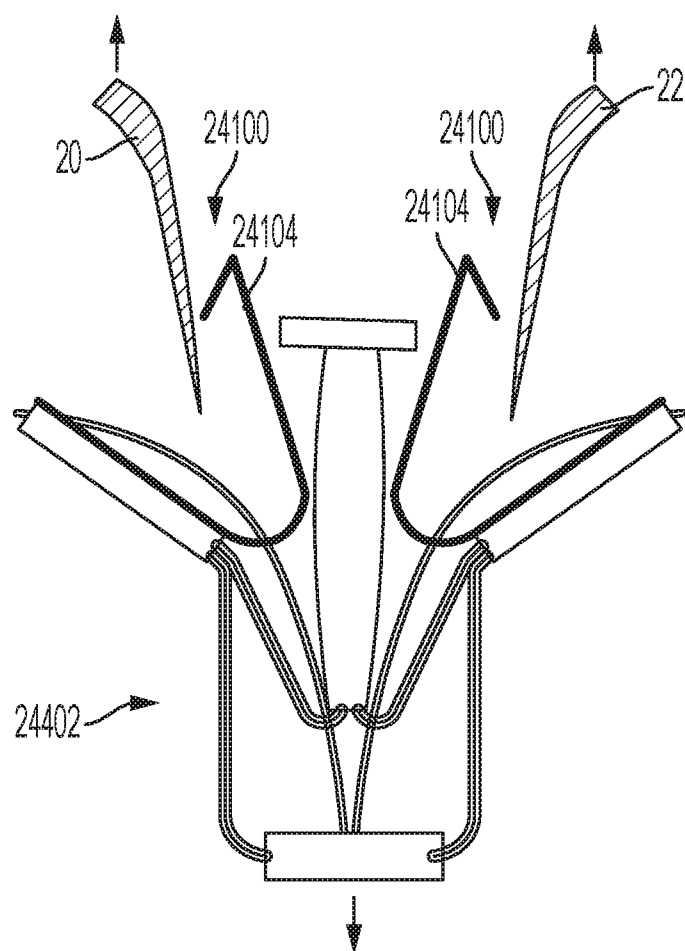


Fig. 244D

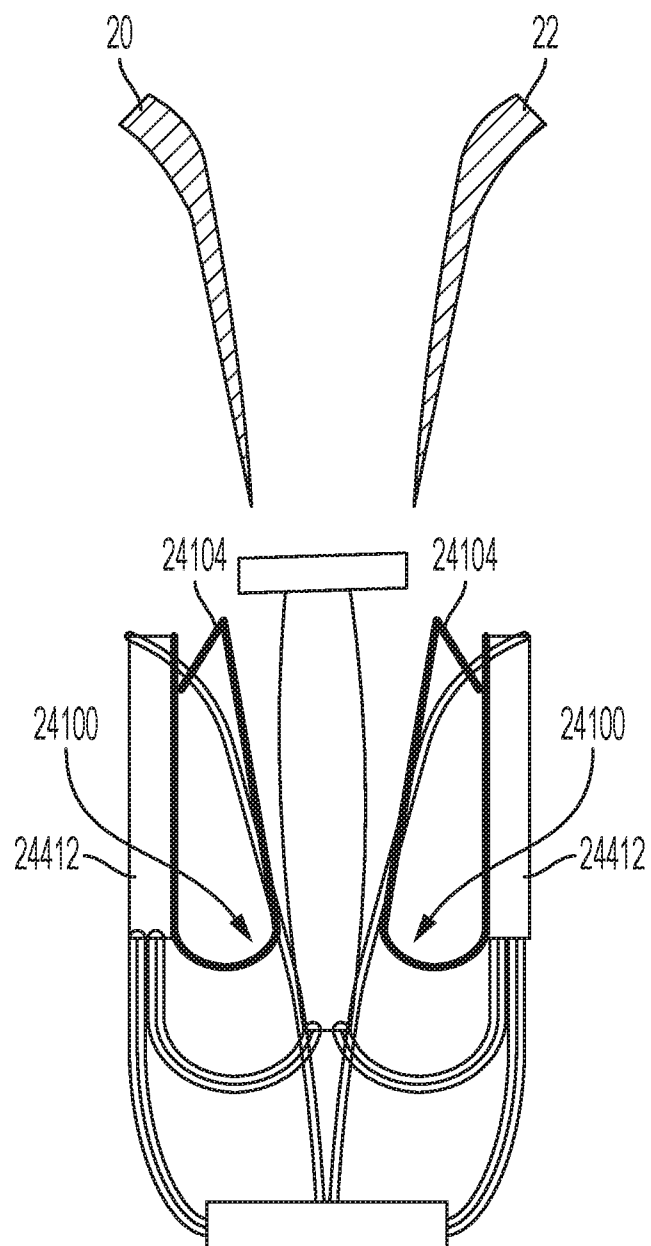


Fig. 244E

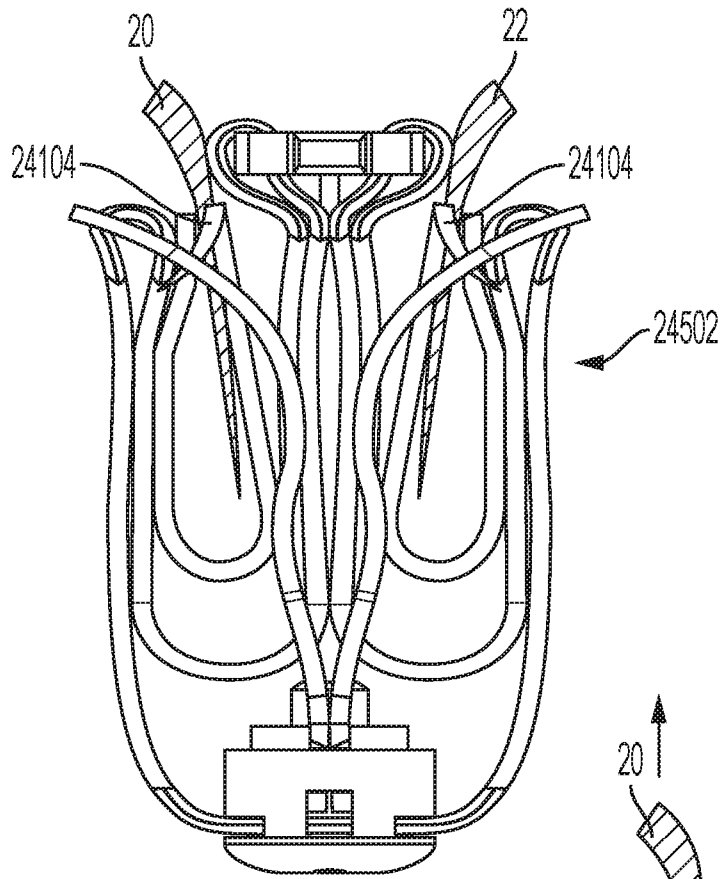


Fig. 245A

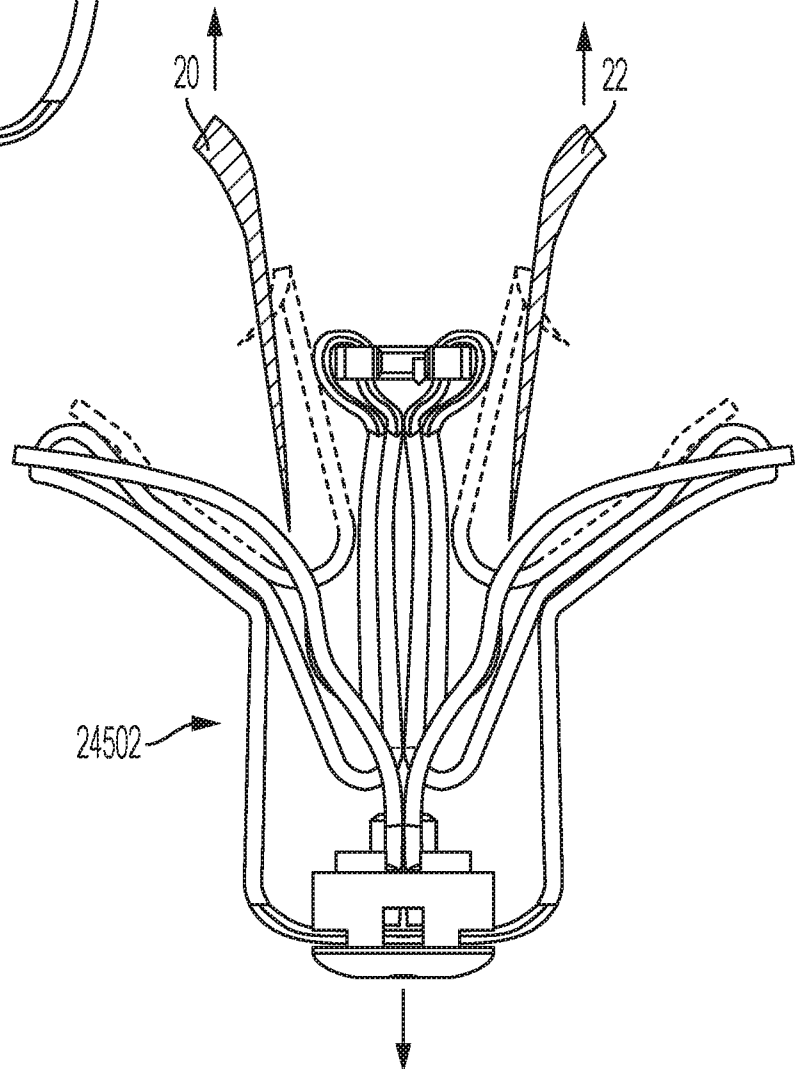


Fig. 245B

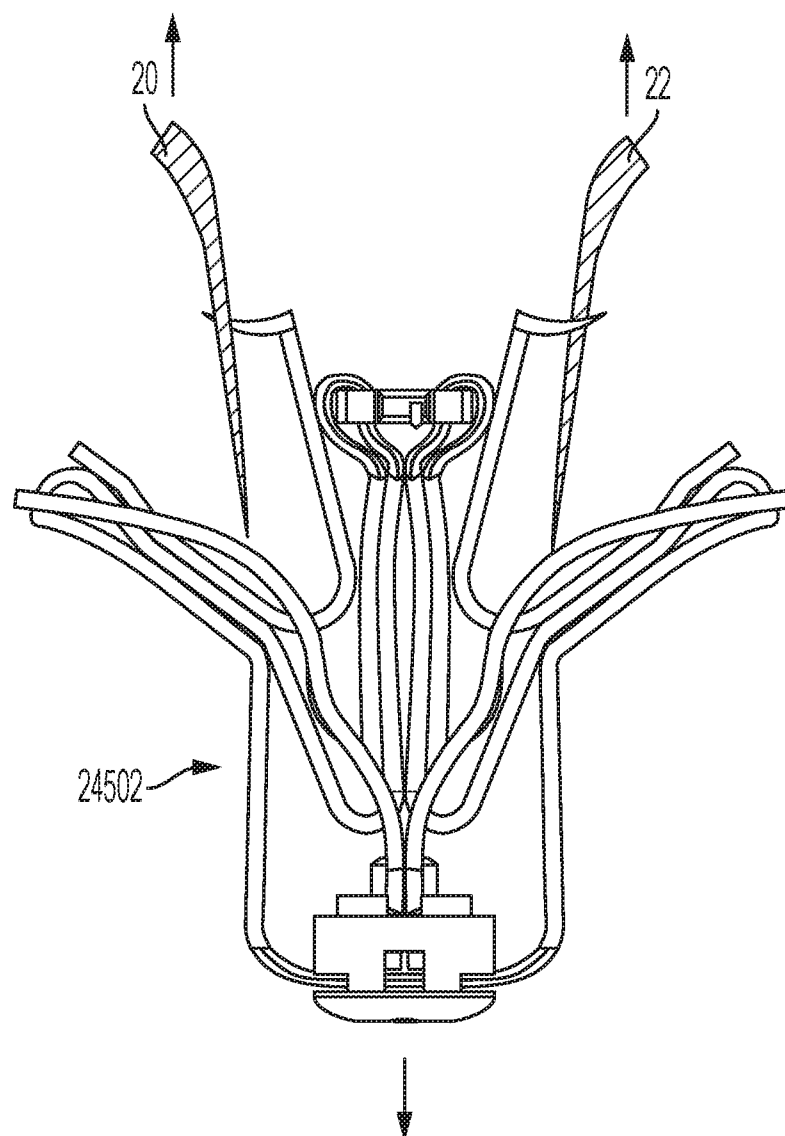


Fig. 245C

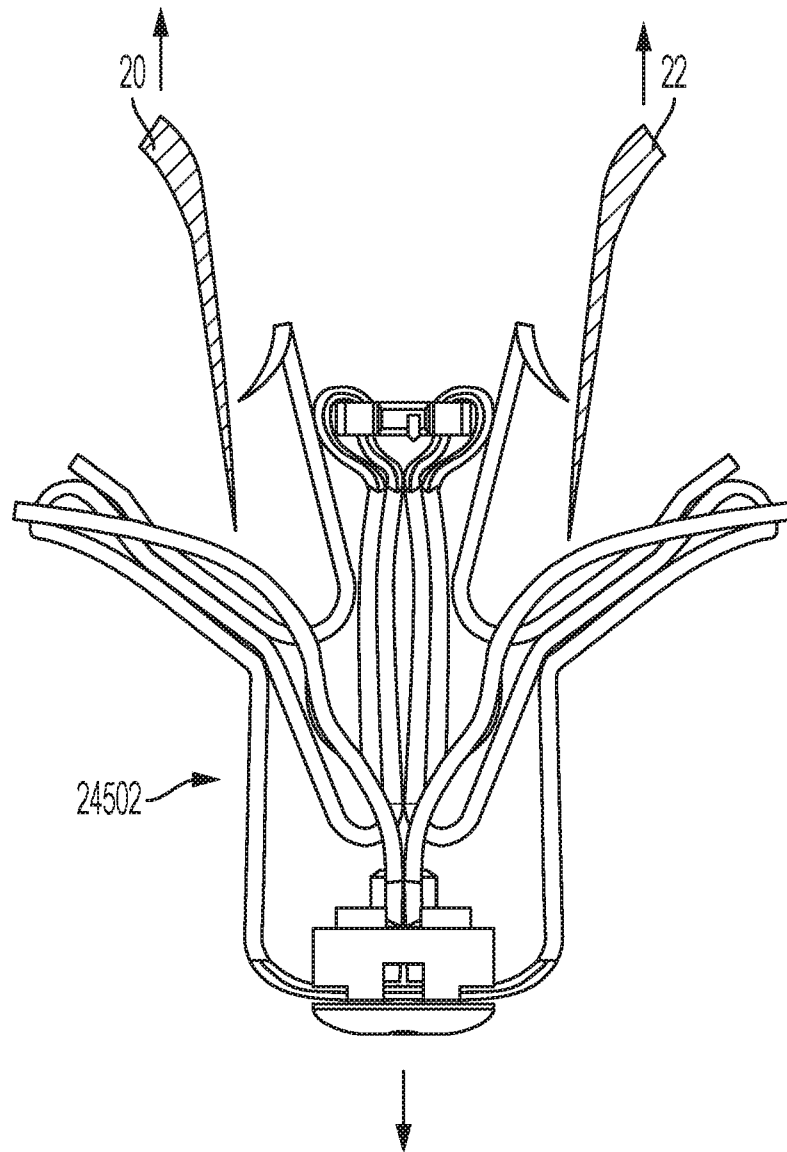


Fig. 245D

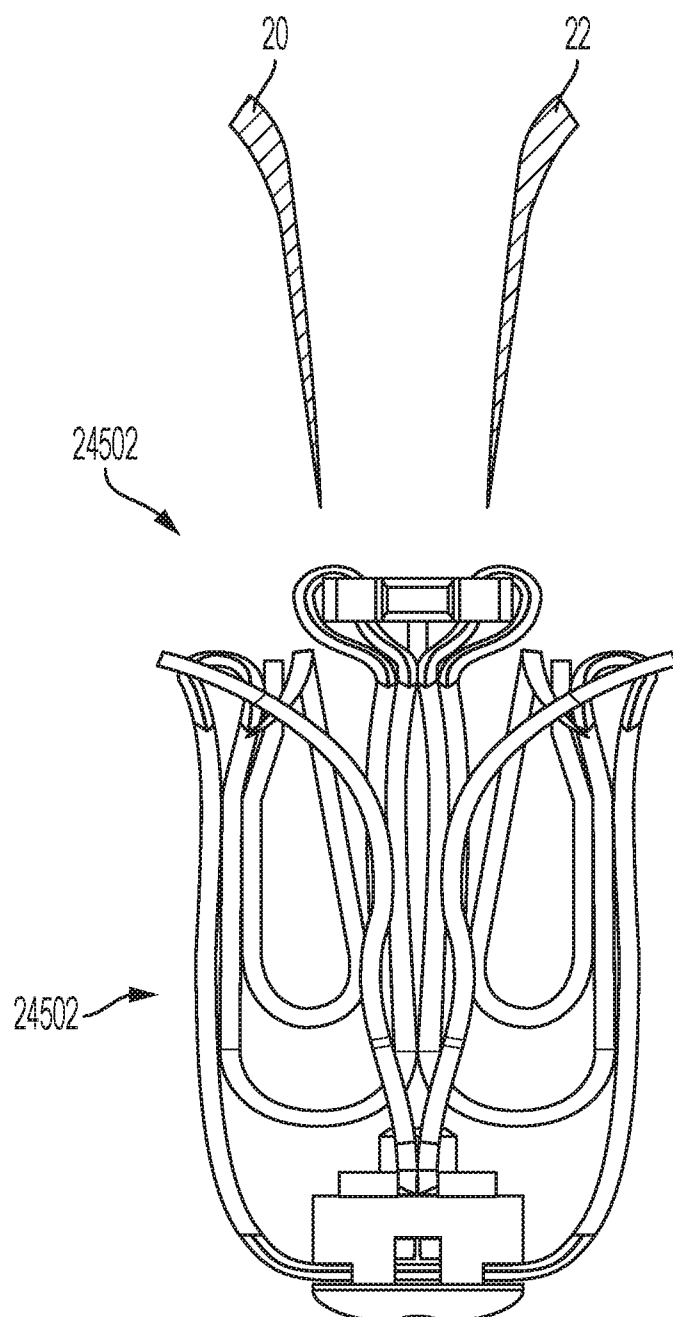


Fig. 245E

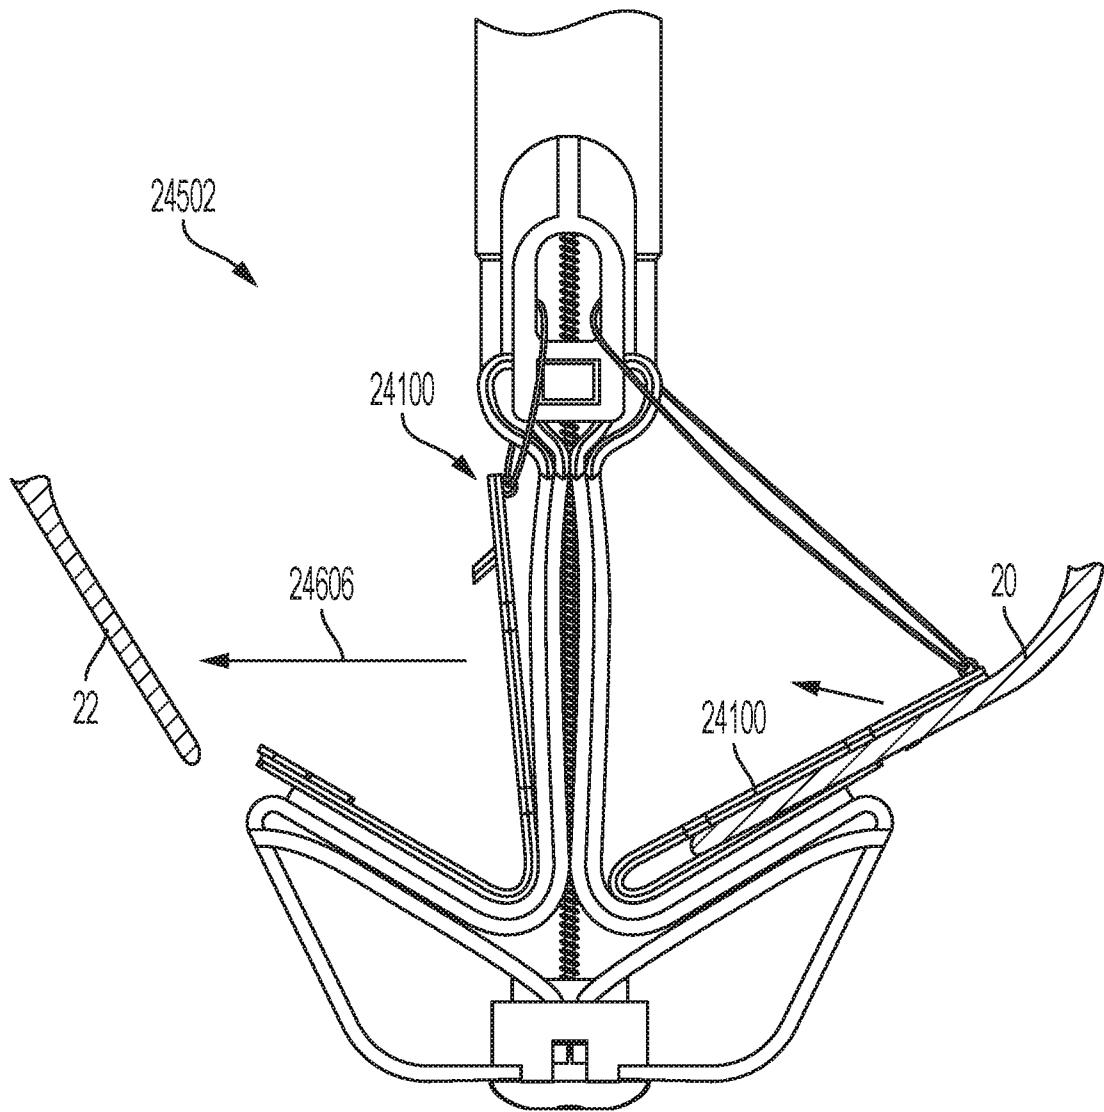


Fig. 246

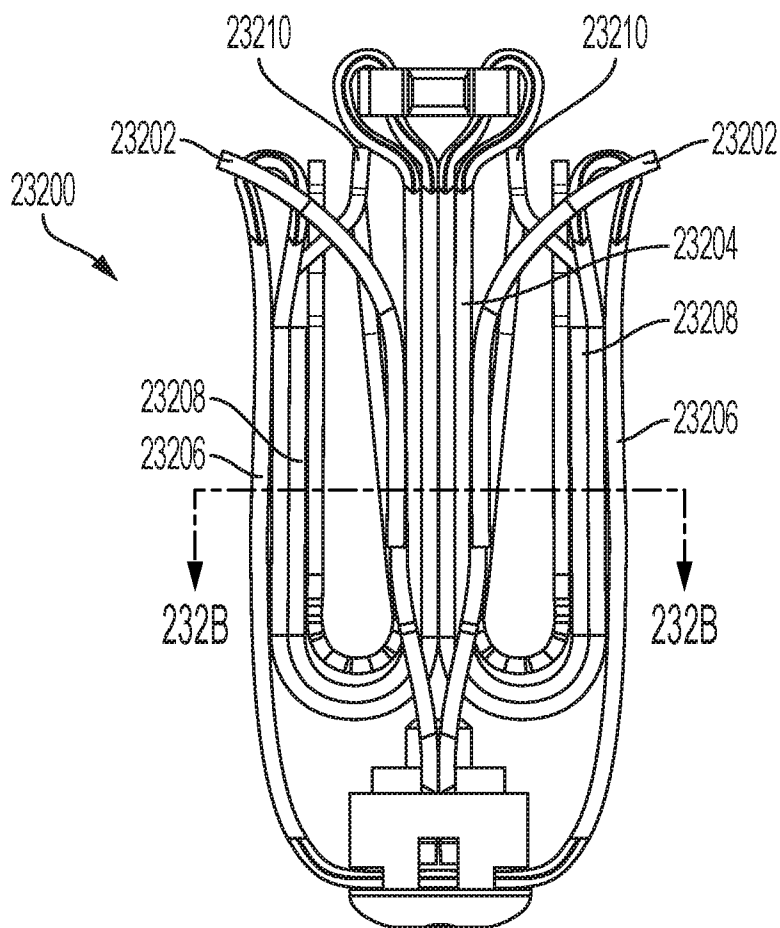


Fig. 232A