


No. 849,605.

PATENTED APR. 9, 1907.

P. R. GLASS.
METHOD OF COVERING EYELETS WITH A FLEXIBLE MATERIAL.

APPLICATION FILED JUNE 14, 1905.

2 SHEETS—SHEET 1.

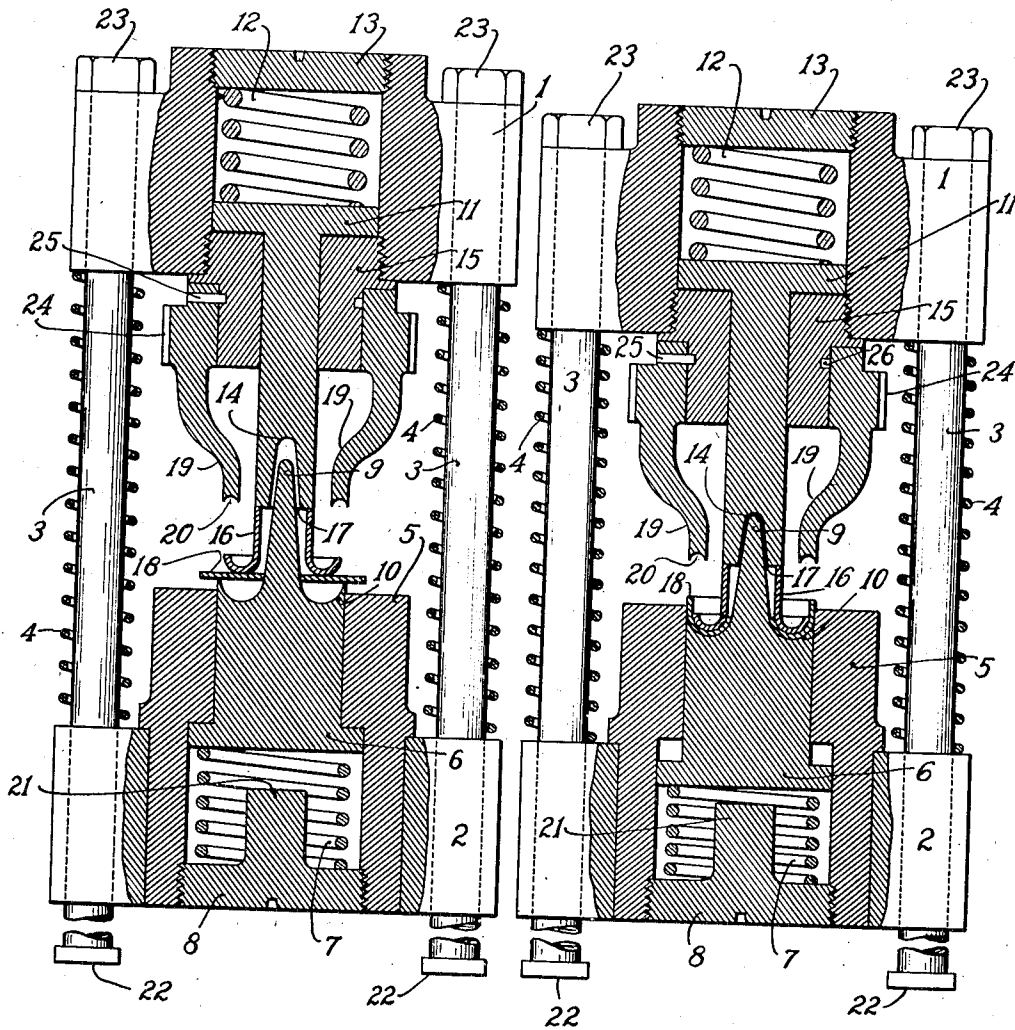

WITNESSES
A. T. Palmer
N. M. Kelso.

INVENTOR
Perley R. Glass
By Richard D. Elliott
Attorney

No. 849,605.

PATENTED APR. 9, 1907.

P. R. GLASS.

METHOD OF COVERING EYELETS WITH A FLEXIBLE MATERIAL.

APPLICATION FILED JUNE 14, 1905.

2 SHEETS—SHEET 2.

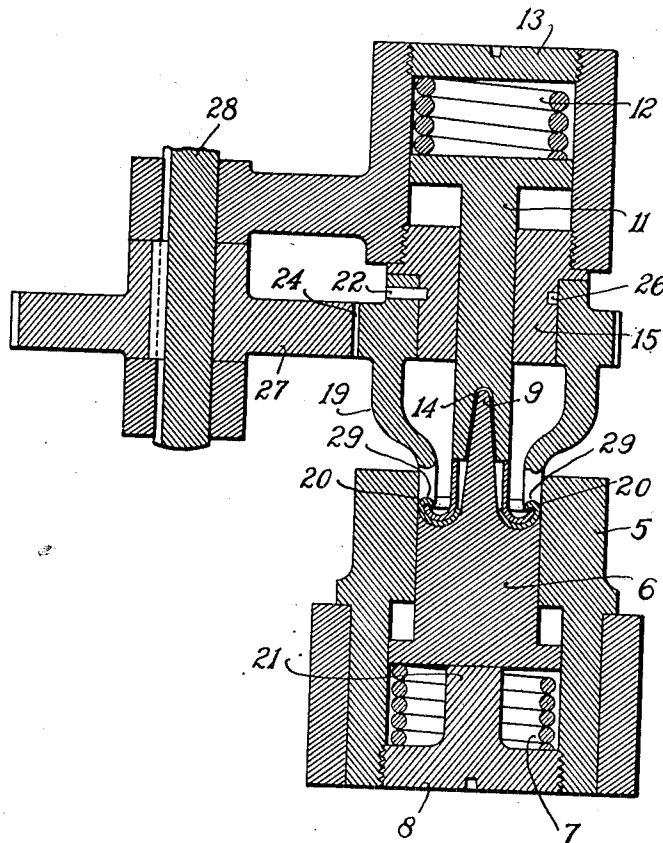


FIG. 3.

WITNESSES
A. T. Palmer
H. M. Keller.

INVENTOR
Perley R. Glass
By Richard P. Elliott
Attorney

UNITED STATES PATENT OFFICE.

PERLEY R. GLASS, OF BOSTON, MASSACHUSETTS, ASSIGNOR TO PEERLESS MACHINERY COMPANY, A CORPORATION OF MASSACHUSETTS.

METHOD OF COVERING EYELETS WITH A FLEXIBLE MATERIAL.

No. 849,605.

Specification of Letters Patent.

Patented April 9, 1907.

Application filed June 14, 1905. Serial No. 265,181.

To all whom it may concern:

Be it known that I, PERLEY R. GLASS, a citizen of the United States, residing in Boston, county of Suffolk, Commonwealth of Massachusetts, have invented certain new and useful Improvements in a Method for Covering Eyelets with a Flexible Material, of which the following is a specification, reference being had to the drawings accompanying the same.

My invention relates to a method for covering eyelets with a flexible material, such as celluloid or rubber or a like material.

The objects of my invention are as follows: to provide a method for covering eyelets with a material cut or formed of the proper size and thickness to form the covering for an eyelet.

My invention comprehends the covering of eyelets with celluloid or rubber when in a hardened or flexible condition by forming or shaping the material to the proper shape and thickness and thereafter pressing it upon the head of an eyelet with a former shaped to cover said head with a uniform thickness and to form it around the head by a rubbing frictional contact with the material and to produce sufficient friction with the material to develop a frictional heat that will soften and prevent the material from cracking, so as to assist in shaping it to the form of the head of the eyelet.

In the drawings accompanying this specification, Figure 1 is a sectional elevation of an eyelet-covering apparatus, showing the eyelet and the material in position ready to be formed around the head of the eyelet. Fig. 2 is a sectional elevation same as Fig. 1, showing the dies partially closed and the material partially bent or formed around the head of the eyelet. Fig. 3 is a partial sectional elevation of the forming-dies, taken at right angles to the elevation shown in Fig. 1 and shows the completion of the process of forming the material around the head of the eyelet and the eyelet in cross-section as completed.

In the drawings, 1 represents the upper-die holder, and 2 the lower-die holder.

3 3 represent the rods connecting the upper and lower die holders, which rods have for their purpose to keep the die-holders in proper alinement and to limit their movement away from each other.

4 4 represent spiral springs surrounding the rods 3 3 and pressing against the upper and lower die holders 1 and 2 and serve to press them apart.

5 represents the lower-die-holding block, in which there is a bearing in which the lower forming-die 6 is free to move vertically.

7 is a spiral spring pressing upwardly against the bottom of the lower forming-die 6, its lower end pressing against the adjusting-screw 8. The adjusting-screw 8 is threaded into the bottom of the die-holder 5.

9 is an upwardly-projecting point in the forming-die 6, adapted to receive and center the material and the eyelet.

10 is a concave annular groove in the top of the forming-die 6, formed in the shape of a covered eyelet.

11 is a pressing-die which has a sliding bearing in the upper forming-die 15. It is pressed downwardly by the spiral spring 12, which contacts with its top portion. The spiral spring 12 has a bearing at its upper end against the adjusting-screw 13, which is screw-threaded into the top of the die-holder 1. The recess 14 is arranged to receive the projecting point 9. The part 15 is threaded into the die-holder 1. 16 represents an eyelet, and 17 the lower end of the presser-die 11, which is adapted to press against the top of the eyelet 16 to move it downwardly to form the material 18 around the head of the eyelet in the annular forming portion 10 of the die 6.

19 19 represent the upper forming-die, and 20 20 represent the concave lower end of said upper forming-die. The forming-die 19 19 is adapted to press against the upper edge of the covering material 18 and turn it inwardly and form it around the edge of the head of the eyelet, as shown in Fig. 3.

21 is a stop on the adjusting-screw 8, which is adapted to contact with the bottom of the lower forming-die 6 and limit its downward movement.

22 22 represent heads on the lower ends of the rods 3 3 to limit the movement of the holding-dies 1 and 2 away from each other, and 23 23 are nuts on the upper end of said rods 3 3, serving the same purpose as the heads 22 22—i. e., to limit the movement of the holding-dies 1 and 2 away from each other.

The method of covering an eyelet by the ap-

paratus shown herein is as follows: The holding-dies 1 and 2 are moved a sufficient distance away from each other to allow the placing of the material 18 and the eyelet 16 upon the end of the centering-point 9. Thereafter the presser-die 11 is moved downwardly by any suitable means, as a power-press, to press the eyelet 16 downwardly against the material 18, thereby pressing it into the concave forming portion 10 of the lower die 6 to bend it, as shown in Fig. 2. This pressure continues until the forming-die 6 contacts with the stop 21. Thereafter the spring 12 will be compressed, the upper forming-dies 19 19 continuing downward until the concave edges 20 20 contact with the upper edge of the material. The upper forming-dies 19 19 are mounted on the portion 15 in such manner as to revolve freely thereon and are held in their adjusted position by means of the pin 25, projecting into the groove 26. The forming-dies 19 19 have gear-teeth 24 on their upper edge adapted to enmesh with the revolving gear 27, which is revolved in any suitable manner through the medium of the shaft 28.

The frictional revolving contact of the upper forming-grooves 20 20 against the edge of the material will gradually spin and turn it inwardly around the outer edge of the eyelet 16 until it is in the form shown in Fig. 3.

What I claim is—

A method of covering eyelets, consisting in forming the covering material of the proper shape and thickness to cover an eyelet; of placing the eyelet and material in a holding and centering device; of pressing the eyelet upon the material into a lower forming-die to partially form the material around the head of an eyelet; and thereafter pressing an upper forming-die upon the partially-formed material and rotating said die upon the material to complete the shaping of the material to cover the head of an eyelet.

In testimony whereof I have hereunto set my hand, in the presence of two subscribing witnesses, this the 27th day of May, 1905.

PERLEY R. GLASS.

Witnesses:

R. P. ELLIOTT,
H. M. KELSO.