

(19)



(11)

EP 0 963 171 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
27.06.2007 Bulletin 2007/26

(51) Int Cl.:
A47G 1/00^(2006.01) E04C 2/54^(2006.01)

(21) Application number: **98906273.2**

(86) International application number:
PCT/US1998/002533

(22) Date of filing: **06.02.1998**

(87) International publication number:
WO 1998/034521 (13.08.1998 Gazette 1998/32)

(54) **A WINDOW AND GLAZING FOR A WINDOW**

FENSTER UND FENSTERVERGLASUNG

FENETRE ET VITRAGE POUR FENETRE

(84) Designated Contracting States:
BE DE ES FR GB IT LU NL

• **HARTEVELD, Jan, Aalbert**
NL-4708 CB Bergen Op Zoom (NL)

(30) Priority: **10.02.1997 NL 1005224**

(74) Representative: **Goode, Ian Roy et al**
London Patent Operation
General Electric International, Inc.
15 John Adam Street
London WC2N 6LU (GB)

(43) Date of publication of application:
15.12.1999 Bulletin 1999/50

(73) Proprietor: **GENERAL ELECTRIC COMPANY**
Schenectady, NY 12345 (US)

(56) References cited:
WO-A-96/33334 DE-A- 2 835 669
US-A- 4 149 348 US-A- 4 368 226
US-A- 5 097 642 US-A- 5 368 904
US-A- 5 544 465 US-A- 5 553 440
US-A- 5 644 894

(72) Inventors:
• **SMITH, Dominic, Patrick**
NL-4614 EB Bergen Op Zoom (NL)

EP 0 963 171 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This application claims rights of priority based on Dutch Patent Application Serial No. NL 1005224 filed on February 10, 1997.

Background of the Invention

[0002] The present invention relates generally to window glazing units, and more particularly, to window glazing units comprising a shatter-resistant thermoplastic sheet positioned parallel to, and between two glass sheets.

[0003] Conventional double-paned window glazing units are frequently employed in construction due to their favorable insulating properties. Such double glazed windows have advantageous thermal insulating properties because a space exists between the two panes of glass. This space acts as a thermal barrier. Such windows have a serious drawback however, in that they remain susceptible to being easily broken.

[0004] Triple glazed windows are also known as described, for example in U.S. Patent No. 5,553,440. Such windows may also be broken easily, particularly if all three sheets of glazing are glass. A further disadvantage of such units is that moisture may condense between the sheets of glazing. Moreover, such window units may fail if the panes are made from different materials, because the pane materials may differ in their coefficient of thermal expansion. A further triple glazed window with desiccated connecting rib is disclosed in WO9633334.

[0005] For the foregoing reasons, there is a need for a window glazing unit that is shatter resistant, is thermally efficient, is relatively light and which avoids developing water condensate between its panes. There is a further need for a bullet-resistant glazing having these same properties.

Summary of the Invention

[0006] There is provided, in accordance with the invention, an improved window glazing unit which may be bullet-resistant, which avoids the disadvantages of the prior art, and which offers the advantages of being shatter-resistant (and possibly bullet resistant). The improved window glazing unit also has the ability to remain hermetically sealed through normal atmospheric temperature variations (i.e., -30° F to 100° F), resisting any tendency to separate due to differences in the thermal expansion coefficient of the glazing sheets. Because these windows remain sealed, they do not develop moisture between the panes. Moreover, the windows remain dry inside because they may contain a desiccant as described further below.

[0007] In the preferred embodiment of the invention, the window glazing unit comprises two glass sheets and a shatter resistant thermoplastic sheet held parallel to, and between both glass sheets. The thermoplastic

sheets are separated from the glass sheet by a U-shaped connecting rib which contacts both glass sheets and the thermoplastic sheet, U-shaped connecting rib may contain a desiccant which is exposed to the spaces between the thermoplastic sheet, and the first and second ribs. Specifically, the sides of the ribs exposed to the interior space of the window may be perforated, or they may have a gas permeable barrier. Said U-shaped rib also contains a channel which is extended to accommodate thermal expansion of the thermoplastic sheet.

[0008] In a second embodiment of the invention, the window glazing unit again comprises two glass sheets and a shatter-resistant thermoplastic sheet held between, and parallel to both glass sheets. The edge of the thermoplastic sheet is held within a channel of a U-shaped connecting rib, which runs around the edge of the thermoplastic sheet, and separates the thermoplastic sheet from both glass sheets. The U-shaped connecting rib optionally is surrounded on its outer circumference opposite the edge of the thermoplastic sheet by a supporting strip made from a material permeable to moisture, such as metal or plastic. The remaining space between the edges of the glass sheets and the optional supporting strip on the outer edge of the U-shaped connecting rib is typically filled with a sealant.

[0009] Both of the above-described embodiments may be built of sufficiently robust materials to act as bullet-resistant glazing. Specifically, the glazing functions as described below. Upon being impacted by a bullet, the first glass surface (i.e. the attack surface) shatters, causing deformation of the bullet. The deformed bullet then impacts the bullet-resistant thermoplastic sheet, and is stopped by said sheet. The thermoplastic sheet deforms, but does not touch the surface of the inner glass sheet or cause breakage thereof. It is thought that the glass sheet at the attack surface causes deformation of the bullet, which helps the thermoplastic sheet to stop the bullet because the impact on the thermoplastic sheet is spread out over a wider area. It should be noted that extreme caution should be exercised in testing any bullet-resistant glazing.

[0010] The present invention may be employed to advantage in standard construction glazing applications as well as bullet-proof glazing applications.

[0011] These, and other features, aspects, and advantages of the present invention will become better understood with reference to the following description, appended claims, and accompanying drawings.

Brief Description of the Drawings

[0012]

Fig. 1 shows a perspective view of a corner portion of a window similar to the invention.

Fig. 2 shows a sectional view of an edge portion of an embodiment of a glazing according to the window shown in Fig. 1.

Fig. 3 shows a sectional view corresponding to Fig. 1. This embodiment employs a U-shaped connecting rib.

Fig. 4 shows a sectional view of a window glazing according to the invention. This embodiment employs a U-shaped connecting rib having an extended channel.

Detailed Description

[0013] In Fig. 1, Glazing 2 according to the invention is placed in the casing 1. This glazing 2 comprises a pair of panes 3 and 4 made of glass, which are placed at a distance from, and parallel to, each other. In a preferred embodiment of the invention, the panes 3 and 4 are heat tempered glass. The thickness of the glass panes relates to impact resistance and weight requirements. In one embodiment of the invention, the thickness of the glass varies between 4 and 6 mm. The glass panes may themselves comprise several sheets of glass laminated together. A sheet of plastic 5 is installed parallel to, and between, the panes 3 and 4. The sheet of plastic 5 is positioned at a distance from said panes 3 and 4. The sheet of plastic 5 is preferably manufactured from polycarbonate. Alternatively, the plastic may be made from polymethyl methacrylate, polyethylene terephthalates, and other transparent plastics having greater impact resistance than glass.

[0014] In Fig. 2, the edges of panes 3 and 4 project beyond the edge of the sheet 5. Near the edge of the sheet 5 and panes 3 and 4, spacing devices 6 are installed between the sheets of glazing which, for example, may consist of the square or rectangular shapes used in common double glazing. These spacing devices 6 have one side facing the interior space between the plastic sheet 5 and the two panes 3 and 4 which is partially open, coupled by a membrane permeable to moisture, or perforated. The spacing devices may be filled with a desiccant. The space between the panes projecting beyond the peripheral edge of the sheet 5 is filled with a sealant 7, such as hot fusible butyl or silicone, etc. A butyl rubber layer 8 may be applied to the sides of the spacing devices facing the panes 3 and 4 and the sheet 5. This butyl rubber layer 8 deforms to help prevent failure due to differences in thermal expansion between the panes 3 and 4, and the plastic sheet 5.

[0015] It should be clear that glazing 2 composed of the panes 3 and 4 with the thermoplastic sheet 5 placed between them with the spacing devices 6 and the butyl sealant 7 can be manufactured to size as a unit in a workshop suitable for this purpose and then placed in the casing to form the window. In such case, a partial vacuum may be created in the spaces between the sheet 5 and the panes 3 and 4. Alternatively, this space may be filled with a gas having a lower thermal conductivity than air. Both of these procedures will make the window more thermally efficient.

[0016] Fig. 3 shows an embodiment of the invention

wherein a U-shaped connecting rib 9 is attached to the first and second glass panes 3 and 4. The U-shaped connecting rib 9 fastens the first and second panes 3 and 4 substantially parallel to the thermoplastic sheet 5. A supporting strip 10 is oriented substantially perpendicular to, and joins the first and second panes 3 and 4. The supporting strip 10 separates the U-shaped connecting rib 9 from a sealant 11, which fills the remaining space extending to the edges of the first and second panes 3 and 4.

[0017] This U-shaped connecting rib 9 can be manufactured from a butyl rubber or similar material, and is preferably reinforced by a metal (e.g., aluminum) strip 10, which is attached to the side of the U-shaped connecting rib 9 facing away from the peripheral edge of the thermoplastic sheet 5.

[0018] The sealant 11 may comprise hot fusible butyl rubber, silicone rubber, or other known sealants.

[0019] In the embodiment shown in Figure 4, the U-shaped connecting rib 9 has a channel 12 which allows for expansion and contraction of the thermoplastic sheet 5.

[0020] In the glazings described herein, it is possible to use sheets of a thermoplastic 5 having a coefficient of expansion which differs from that of the panes 3 and 4. It is also possible to use laminated glass sheets to enhance bullet-resistance properties of the glazing.

[0021] Many other variants and modifications of the invention will be apparent to those skilled in the art without departing from the spirit and scope of the invention. For example, the glazing could be a fixed window, a window which may be opened, a swing door, a sliding door, or another transparent structural article. The above-described embodiments of the invention are intended to be merely exemplary, and all such variations are intended to be within the scope of the invention as defined in the appended Claims.

Claims

1. A window glazing unit comprising:

- a first glass sheet (3),
- a shatter resistant thermoplastic sheet (5) having an outer edge and
- a second glass sheet (4),
- wherein the first and second glass sheets (3, 4) have a larger area than the thermoplastic sheet (5), and the outer edge of the thermoplastic sheet (5) is engaged within a channel (12) of a U-shaped connecting rib (9), which rib (9) surrounds the outer edge of said shatter-resistant thermoplastic sheet (5),
- wherein said U-shaped connecting rib (9) is attached to said first and second glass sheets (3, 4) and fastens said shatter-resistant thermoplastic sheet (5) between, and substantially parallel to, said first and second glass sheets (3, 4),

characterized in that said U-shaped connecting rib (9) comprises a desiccant which is exposed to spaces between said first and second glass sheets (3, 4) and said thermoplastic sheet (5), and **in that** the channel (12) of the U-shaped connecting rib (9) is extended by means of two projections extending along each side of the thermoplastic sheet (5), such that they extend beyond the main body of connecting rib (9), to have sufficient length to accommodate thermal expansion of the thermoplastic sheet (5) over a normal environmental temperature range.

2. A window glazing unit according to Claim 1, further comprising a supporting strip (10) which is oriented substantially, perpendicular to, and joins said first and second glass sheets (3, 4), wherein said supporting strip (10) divides a sealant (11) from the U-shaped connecting rib (9).
3. A window glazing unit according to Claim 1, wherein said U-shaped connecting rib (9) is fastened to said thermoplastic sheet (5) or said first and second glass sheets (3, 4) by a material capable of stretching to accommodate the differences in thermal expansion coefficient between the glass sheets (3, 4) and the thermoplastic sheet (5) over a normal environment temperature range.
4. A window glazing unit according to Claim 2, wherein the supporting strip (10) is metal or plastic.
5. A window glazing unit according to Claim 4, wherein the U-shaped spacer (9) is metal or plastic.
6. A window glazing unit according to Claim 1, wherein the glass sheets (3, 4) are heat tempered glass.

Patentansprüche

1. Fensterverglasungseinheit aufweisend:

eine erste Glasplatte (3)
 eine splittersichere thermoplastische Platte (5) mit einem äußeren Rand und einer zweiten Glasplatte (4),
 wobei die erste und zweite Glasplatte (3, 4) eine größere Fläche haben als die thermoplastische Platte (5) und der äußere Rand der thermoplastischen Platte (5) in einen Kanal (12) einer U-förmigen Verbindungsrippe (9) eingelassen ist, und die Rippe (9) den äußeren Rand der bruchfesten thermoplastischen Platte (5) einfasst, wobei die U-förmige Verbindungsrippe (9) an der ersten und zweiten Glasplatte (3, 4) befestigt ist und die splittersichere thermoplastische Platte (5) zwischen der ersten und zweiten Glasplat-

te (3, 4) und im Wesentlichen parallel dazu befestigt ist, **dadurch gekennzeichnet, dass** die U-förmige Verbindungsrippe ein Trockenmittel aufweist, das gegenüber den Räumen zwischen der ersten und zweiten Glasplatte (3, 4) und der thermoplastischen Platte (5) frei liegt und **dadurch, dass**

der Kanal (12) der U-förmigen Verbindungsrippe (9) mittels zweier Auskragungen, die sich entlang jeder Seite der thermoplastischen Platte (5) erstrecken, so dass sie sich über den Grundkörper der Verbindungsrippe (9) hinaus erstrecken, verlängert ist, und eine ausreichende Länge haben, um die thermische Ausdehnung der thermoplastischen Platte (5) über den normalen Bereich der Umgebungstemperatur hinaus aufzunehmen.

2. Fensterverglasungseinheit nach Anspruch 1, die weiterhin einen Auflagestreifen (10) aufweist, der im Wesentlichen senkrecht zu den Fügestellen der ersten und zweiten Glasscheibe (3, 4) orientiert ist, wobei der Auflagestreifen (10) eine Dichtung (11) von der U-förmigen Verbindungsrippe (9) trennt.
3. Fensterverglasungseinheit nach Anspruch 1, wobei die U-förmige Verbindungsrippe (9) an der thermoplastischen Platte (5) oder der ersten und zweiten Glasplatte (3, 4) durch ein Material befestigt ist, das sich ausdehnen kann, um die Unterschiede der Wärmeausdehnungskoeffizienten zwischen den Glasplatten (3, 4) und der thermoplastischen Platte (5) über den normalen Bereich der Umgebungstemperaturen hinaus auszugleichen.
4. Fensterverglasungseinheit nach Anspruch 2, wobei der Auflagestreifen (10) aus Metall oder Plastik ist.
5. Fensterverglasungseinheit nach Anspruch 4, wobei der U-förmige Abstandshalter aus Metall oder Plastik ist.
6. Fensterverglasungseinheit nach Anspruch 1, wobei die Glasplatten (3, 4) aus wärmegetempertem Glas sind.

Revendications

1. Vitrage pour fenêtre, comprenant :

une première vitre (3),
 une feuille de matière thermoplastique incassable (5) ayant un bord extérieur, et
 une seconde vitre (4),
 les première et seconde vitres (3, 4) ayant une superficie plus grande que celle de la feuille de matière thermoplastique (5), et le bord extérieur

- de la feuille de matière thermoplastique (5) étant engagé dans une rainure (12) d'une nervure de raccordement en U (9), laquelle nervure (9) entoure le bord extérieur de ladite feuille de matière thermoplastique incassable (5), 5
- ladite nervure de raccordement en U (9) étant fixée auxdites première et seconde vitres (3, 4) et assujettissant entre elles ladite feuille de matière thermoplastique incassable (5), et étant sensiblement parallèle auxdites première et seconde vitres (3, 4), **caractérisé en ce que** ladite nervure de raccordement en U (9) contient un agent déshydratant qui est exposé à des espaces entre lesdites première et seconde vitres (3, 4) et ladite feuille de matière thermoplastique (5), et **en ce que** la rainure (12) de la nervure de raccordement en U (9) se prolonge, au moyen de deux prolongements s'étendant sur chaque face de la feuille de matière thermoplastique (5), de manière à se prolonger au-delà du corps principal de la nervure de raccordement (9), pour avoir une longueur suffisante pour absorber la dilatation thermique de la feuille de matière thermoplastique (5) sur un intervalle normal de températures ambiantes. 10 15 20 25
2. Vitrage selon la revendication 1, comprenant en outre une bande de soutien (10) qui est orientée sensiblement perpendiculairement auxdites première et seconde vitres (3, 4) et réunit celles-ci, ladite bande de soutien (10) séparant un mastic (11) de la nervure de raccordement en U (9). 30
3. Vitrage selon la revendication 1, dans lequel ladite nervure de raccordement en U (9) est fixée à ladite feuille de matière thermoplastique (5) ou auxdites première et seconde vitres (3, 4) par une matière apte à s'étirer pour absorber les différences de coefficient de dilatation thermique entre les vitres (3, 4) et la feuille de matière thermoplastique (5) sur un intervalle normal de températures ambiantes. 35 40
4. Vitrage selon la revendication 2, dans lequel la bande de soutien (10) est en métal ou en matière plastique. 45
5. Vitrage selon la revendication 4, dans lequel la nervure d'espacement en U (9) est en métal ou en matière plastique. 50
6. Vitrage selon la revendication 1, dans lequel les vitres (3, 4) sont du verre trempé. 55

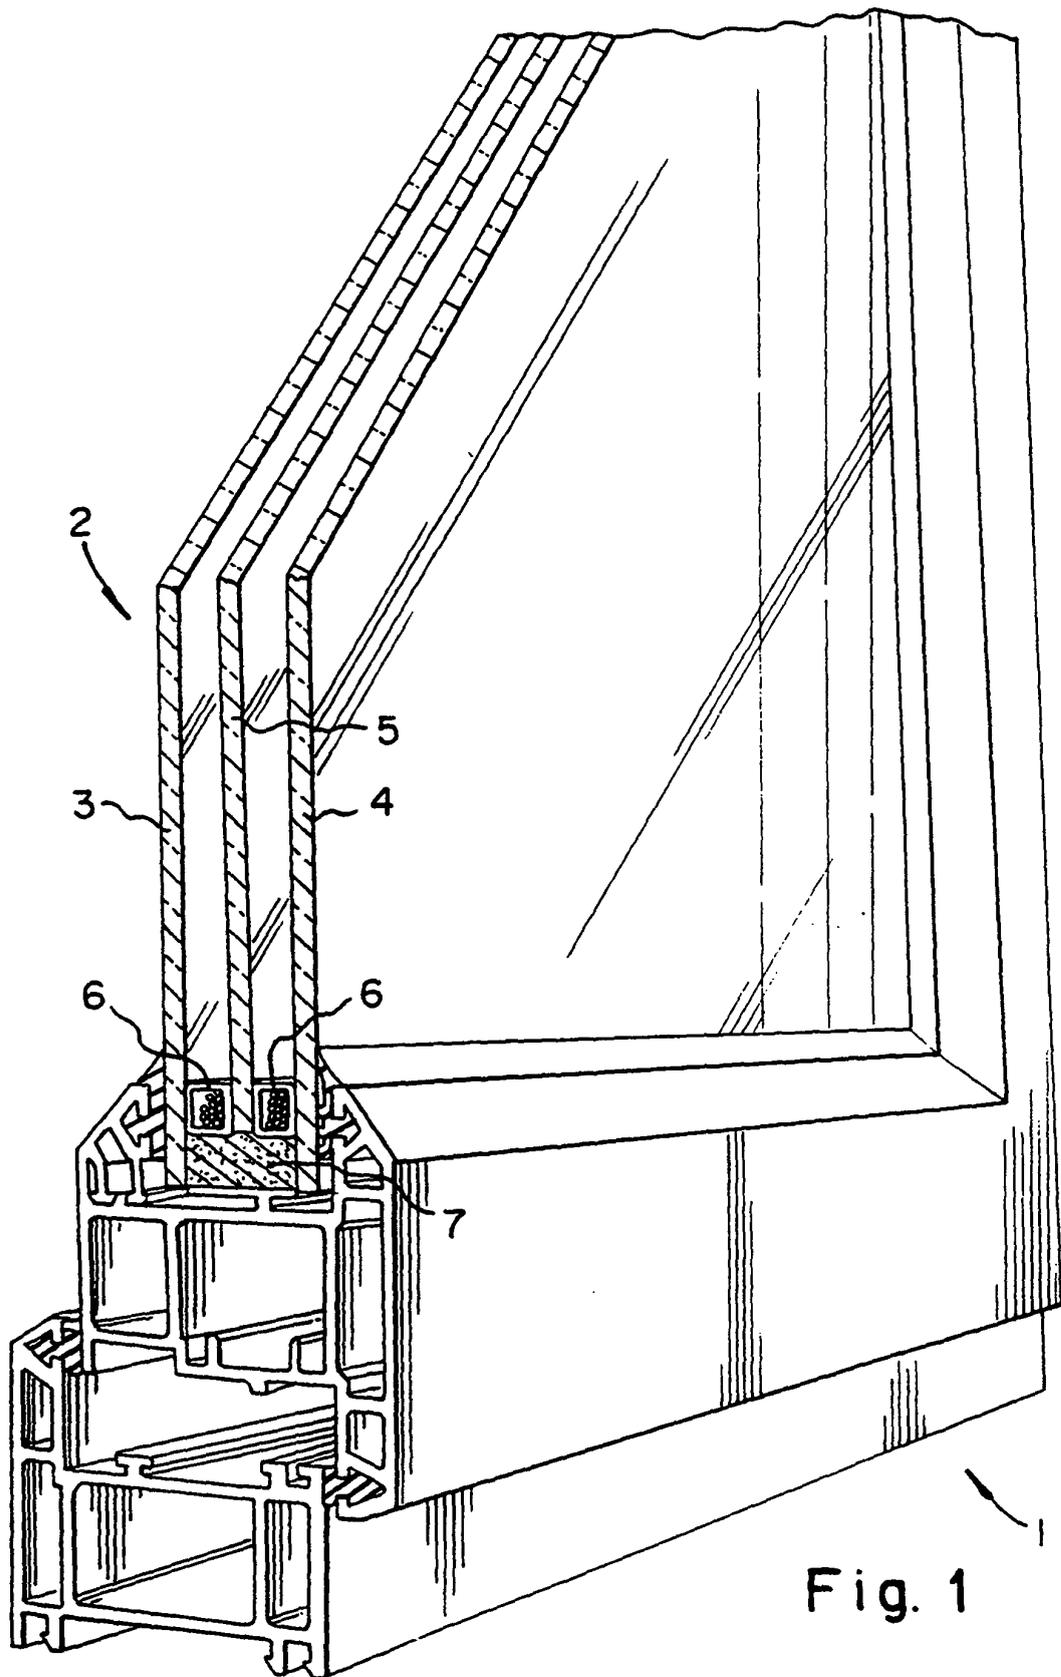


Fig. 2

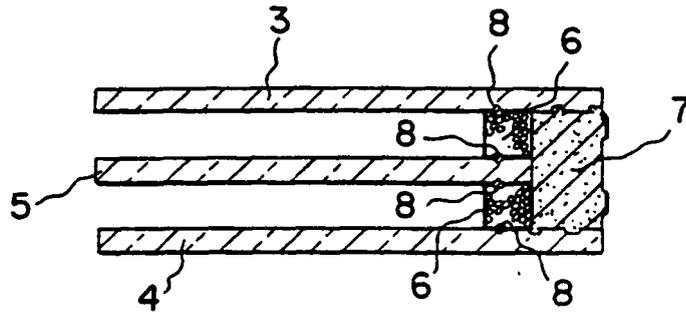


Fig. 3


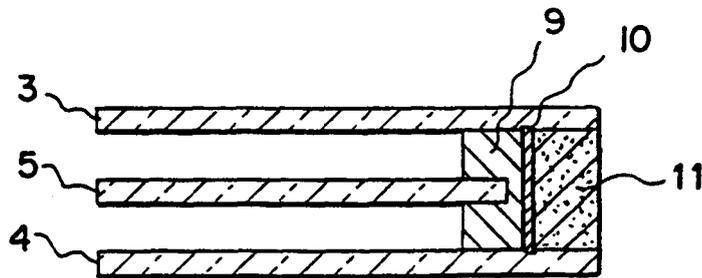


Fig. 4

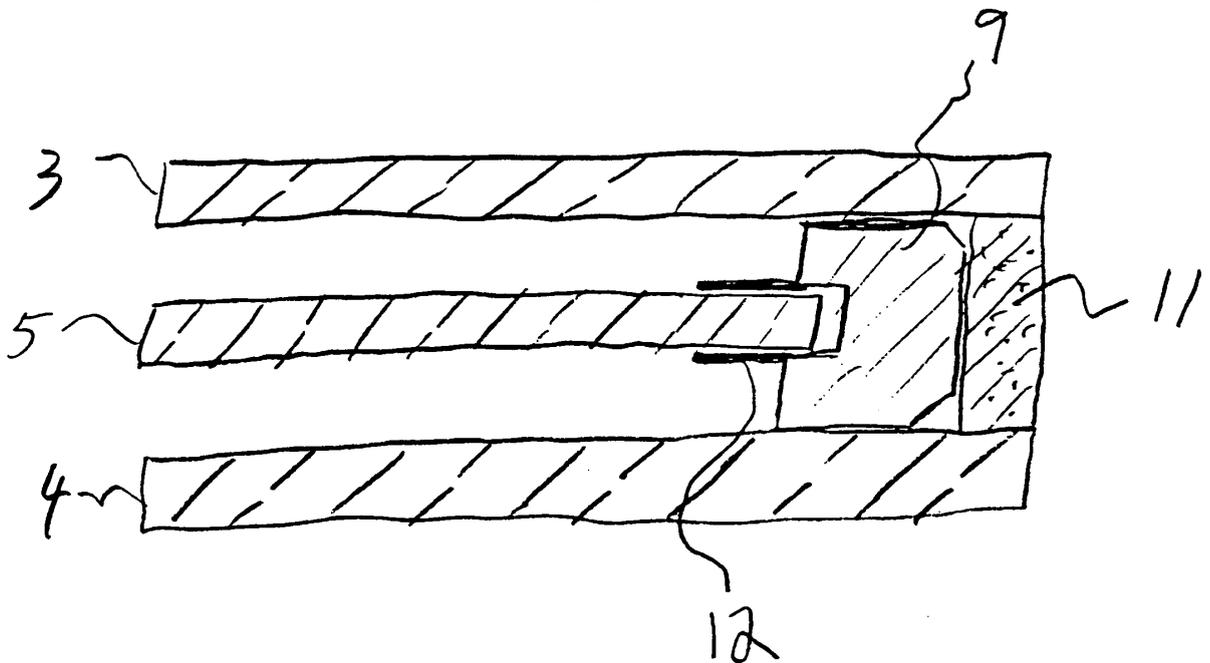

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5553440 A [0004]
- WO 9633334 A [0004]