



(51) International Patent Classification:

B05B 1/30 (2006.01) **B05B 11/00** (2006.01)
A47K 5/12 (2006.01) **G01F 11/08** (2006.01)
B05B 1/32 (2006.01)

(21) International Application Number:

PCT/US20 13/020079

(22) International Filing Date:

3 January 2013 (03.01.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/583,673 6 January 2012 (06.01.2012) US

(71) Applicant: **GOJO INDUSTRIES, INC.** [US/US]; One Gojo Plaza, Suite 500, P.O. Box 91, Akron, OH 44309 (US).

(72) Inventor: **RAY, Eugene, W.**; 1178 Noble Avenue, Barberton, OH 44203 (US).

(74) Agents: **BONNER, Chet, J.** et al; Calfee, Halter & Griswold LLP, 1405 East Sixth Street, Cleveland, OH 44114-1607 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on nextpage]

(54) Title: LIQUID DISPENSER PUMP

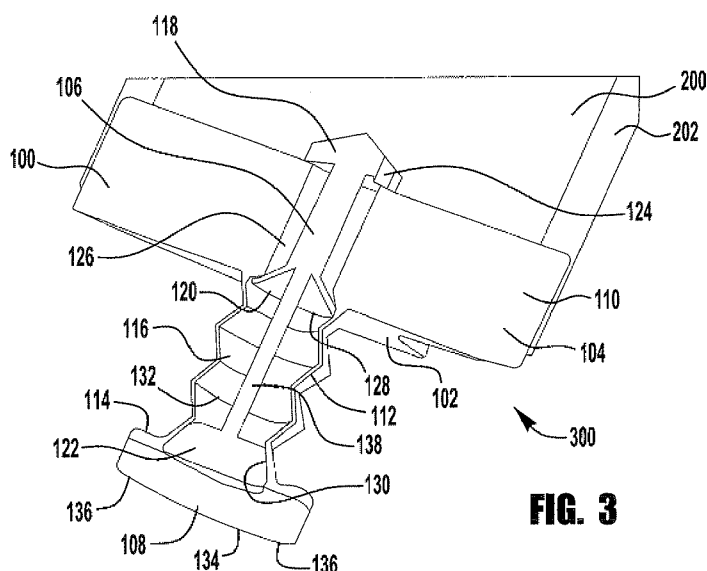


FIG. 3

(57) Abstract: Liquid dispenser systems, pumps (100) for use in liquid dispenser systems, and disposable / replaceable liquid container units (300) for use in liquid dispenser systems are disclosed. A refill unit (300) for refilling a liquid dispenser system comprises a container (200) for holding a supply of liquid and a pump (100) connected to the container (200). The pump (100) comprises a fitment portion (110) configured for attachment to a liquid container (200), and a pump portion (112) which comprises an upper valve member (120) and a lower valve member (122) disposed along a common longitudinal axis, such that the fitment portion (110) and the pump portion (112) are formed as one integral piece.

- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

LIQUID DISPENSER PUMP

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This continuation application claims priority to, and the benefits of, U.S. Provisional Patent Application Serial No 61/583,673, filed on Jan 6, 2012, which is also entitled LIQUID DISPENSER PUMP, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present invention relates generally to liquid dispenser systems and more particularly to a liquid pump, as well as a disposable refill / replacement liquid container unit which includes such a pump.

BACKGROUND OF THE INVENTION

[0003] Liquid dispenser systems, such as liquid soap and sanitizer dispensers, provide a user with a predetermined amount of liquid upon actuation of the dispenser. Such liquid dispenser systems often include a disposable / replacement liquid container unit which may be easily removed from the system when the liquid container is empty, to be replaced by a filled unit

SUMMARY

[0004] Liquid dispenser systems, pumps for use in liquid dispenser systems and disposable / replaceable liquid container units for use in liquid dispenser systems are disclosed herein. In one embodiment, a refill unit for refilling a liquid dispenser system comprises a container for holding a supply of liquid and a pump connected to the container. The pump comprises a fitment portion configured for attachment to a liquid container and a pump portion which comprises an upper valve member and a lower valve member disposed along a common longitudinal axis, such that the fitment portion and the pump portion are formed as one integral piece.

[0005] In this way, a simple and economical liquid dispenser system, as well as a pump and a refill unit, are provided.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] These and other features and advantages of the present invention will become better understood with regard to the following description and accompanying drawings in which:

[0007] Figure 1 is a perspective view of a first exemplary embodiment of a liquid pump 100;

[0008] Figure 2 is a different perspective view of the liquid pump 100 of Figure 1, attached to a liquid container 200 which is shown in partial cross-section; and

[0009] Figure 3 is a cross-sectional illustration of the liquid pump 100 of Figure 1, attached to a liquid container 200 which is shown in partial cross-section.

DETAILED DESCRIPTION

[0010] Figures 1-3 illustrate a first exemplary embodiment of a liquid pump 100, which in Figures 2-3 is shown attached to a liquid container 200. The liquid pump 100 and liquid container 200 together form a disposable / replaceable refill unit 300 which may be used in combination with a dispensing system (not shown). As such, the liquid pump 100 includes two locking members 102, which in this embodiment are in the form of tabs. More generally, the locking members 102 may take any form which allows the liquid pump 100 to be connected to corresponding members in the dispensing system in a secure manner, such as a lock and key fit. In that way, in the event the liquid stored in the chamber 202 of the installed disposable refill unit 300 runs out, or the installed disposable refill unit 300 otherwise has a failure, the installed disposable refill unit 300 may be removed from the liquid dispenser system. The empty or failed disposable refill unit 300 may then be replaced with a new disposable refill unit 300 including a liquid storage chamber 202.

[0011] The dispensing system (not shown) includes a housing which contains one or more actuating members (not shown) to activate the liquid pump 100. The liquid dispenser system may be a wall-mounted system, a counter-mounted system, an un-mounted portable system movable from place to place or any other kind of liquid dispenser system. The dispensing

system may additionally have other elements, such as a foaming unit which turns the liquid received from the liquid pump 100 into a foam for dispensing to a user.

[0012] The liquid container 200 of the disposable refill unit 300 forms a liquid storage chamber 202. The liquid container 200 may be a bag made from a thin plastic material. The liquid storage chamber 202 contains a supply of a liquid within the disposable refill unit 300. In various embodiments, the contained liquid could be for example a soap, a sanitizer, a cleanser, a disinfectant or some other liquid. In the exemplary refill unit 300, the liquid storage chamber is formed by a flexible and collapsible pouch 204. In other embodiments, the liquid storage chamber 202 may be formed by an uncollapsible rigid housing member, a collapsible rigid housing member, or have any other suitable configuration for containing the liquid without leaking. Further, the liquid container 200 may be provided with an air inlet valve (not shown) to prevent creating a vacuum in the chamber 202 as liquid is being dispensed. The liquid container 200 may advantageously be refillable, replaceable or both refillable and replaceable. In other embodiments, the liquid container 200 within the disposable refill unit 300 may be neither refillable nor replaceable.

[0013] The exemplary liquid pump 100 is a bellows pump. In other embodiments, the liquid pump may have different means of pumping liquid, such as, for example, a dome pump. The liquid pump 100 is made from any convenient material such as a plastic material; for example, a linear low-density polyethylene (LLDPE). The pump 100 has a housing 104, a valve stem 106 and, optionally, an outlet cap 108. The housing 104 includes a canoe fitment 110, the locking members 102, a bellows 112 and an outlet flange 114, all together in one integral construction. The canoe fitment 110 of the housing 104 is received within a bottom end 206 of the container 200 to form the disposable refill unit 300. The canoe fitment 110 may be attached to the liquid container 200 using any method, such as, for example, ultrasonic welding or heat welding, a press fit connection or a mechanical connection.

[0014] In some prior systems, a canoe fitment is manufactured as a separate component from the pump mechanism, and the two are then connected together by a snap-fit or closure interface. Forming these components as one integral construction, as in the exemplary pump 100, is simpler and less expensive than the prior art systems.

[0015] The valve stem 106 is disposed within a channel 116 of the housing 104, and may move longitudinally up and down within the channel 116 as described further below. In one embodiment, the valve stem 106 includes a valve cap 118, an upper valve member 120 and a lower valve member 122 as one integral piece. The valve cap 118 extends out of the channel 116 and up into the liquid storage chamber 202 and has an outer periphery which is wider than the width of the channel 116. The valve cap 118 is flexible and resilient, allowing the valve stem 106 to be pushed up through the channel 116 so that the cap 118 compresses and then expands to retain the valve stem 106 within the pump housing 104. One or more passages 124 within the valve cap 118 permit liquid stored within the chamber 202 to flow down into an intermediate chamber 126 of the channel 116, located within the canoe fitment 110 between the valve cap 118 and the upper valve member 120.

[0016] The upper valve member 120 of the valve stem 106 may be received within an upper valve seat 128 formed at the intersection between the canoe fitment 110 and the bellows 112. The lower valve member 122 of the valve stem 106 may be received within a lower valve seat 130 formed at the intersection between the bellows 112 and the outlet flange 114. Thus, the bellows 112 defines a bellows chamber 132 of the channel 116 between the two valve members 120 and 122. The upper and lower valves open and close as the valve stem 106 reciprocates up and down within the channel 116, as described further below.

[0017] In some embodiments, such as the one in Figures 2-3, an outlet cap 108 of the liquid pump 100 is connected to the outlet flange 114 of the housing 104. Other embodiments may not include an outlet cap 108. When used, the bottom surface 134 of the outlet cap 108 contains one or more apertures 136 for dispensing liquid out of the liquid pump 100. In some embodiments, the apertures 136 are simply channels leading out of the outlet cap 108. In other embodiments, the apertures 136 may include one or more one-way check valves to prevent back flow of liquid from outside of the pump 100 back through the apertures 136.

[0018] The liquid pump 100 operates as follows. Figure 3 illustrates the pump 100 in a primed position. In that position, liquid is free to flow under the force of gravity from the liquid storage chamber 202 down into the intermediate chamber 126 through the passages 124 in the valve cap 118. However, liquid within the intermediate chamber 126 is prevented from flowing into the

bellows chamber 132 by the closed upper valve member 120 being received within the upper valve seat 128. More specifically, the upper valve member 120 is made from a flexible and resilient material. The upper valve member 120 is resilient enough that it remains in the "closed" position shown in Figure 3, so long as the only force acting on it is the downward force of gravity by the liquid in the intermediate chamber 126. However, the upper valve member 120 is flexible enough so that when a suction force is applied by the bellows chamber 132 underneath the member 120, the member 120 will separate from the upper valve seat 128 and permit liquid to flow from the intermediate chamber 126 into the bellows chamber 132.

[0019] Still describing the primed position of Figure 3, the lower valve member 122 of the valve stem 106 is received within the lower valve seat 130. In that way, a supply of liquid is trapped within the bellows chamber 132 between the two valve members 120 and 122, and is prevented from leaking out of the refill unit 300. The lower valve member 122 may be biased to its closed position in any number of ways. In one embodiment, the lower stem portion 138 of the valve stem 106 may be elastically stretched in the closed position of Figure 3, so that the lower valve member 122 is held firmly against the lower valve seat 130. In other embodiments, a separate biasing member (not shown) such as a coil spring may instead or in addition be used to help bias the lower valve member 122 into the closed position. The natural resiliency of the bellows 112 expanding itself to an extended position may also help to create a seal at the lower valve. The biasing mechanism(s) hold the lower valve member 122 in the closed position of Figure 3 at all times, except when liquid is being dispensed out of the pump 100.

[0020] Although not shown in the Figures, the liquid dispenser system in which the liquid pump 100 is situated has a pump actuator mechanism. There are many different kinds of pump actuators which may be employed in the liquid dispenser system. The pump actuator of the liquid dispenser system may be any type of actuator, such as, for example, a manual lever, a manual pull bar, a manual push bar, a manual rotatable crank, an electrically-activated actuator, or other means for actuating the liquid pump 100 within the liquid dispenser system. Electronic pump actuators may additionally include a motion detector to provide for a hands-free dispenser system with touchless operation.

[0021] Various mechanical and/or electronic intermediate linkages connect an external actuator member to an internal actuator member (all not shown). A user operates the external actuator in order to actuate the pump 100. As a result, the internal actuator member exerts a force on the outlet flange 114 of the liquid pump 100, perhaps via an outlet cap 108 if used, to move it upwardly toward the liquid container 200. The interface between the locking members 102 and the liquid dispenser system holds the canoe fitment 110 firmly in place, so that the bellows 112 contracts as the outlet flange 114 is forced upward.

[0022] As the bellows 112 contracts, the upper valve member 120 remains in the closed position of Figure 3, which has two consequences. First, it continues to prevent the liquid within the intermediate chamber 126 from flowing down into the bellows chamber 132. Second, due to the contracting bellows chamber 132, the liquid which is already disposed within the bellows chamber 132 is forced past the closed biasing of the lower valve member 122 to be dispensed. The internal actuator stops the upward movement of the outlet flange 114 when the bellows 112 reaches a fully contracted position, or has contracted far enough to dispense a desired amount of liquid.

[0023] When a desired amount of liquid has been dispensed, the internal actuator stops the upward movement of the outlet flange 114. At that time, the outlet flange 114 is free to move downwardly back to the primed position shown in Figure 3. Such movement may occur due to the natural resiliency of the bellows 112 extending to mat position, or under the forceful direction of the internal actuator, or by a separate biasing member such as a coil spring, or some other means.

[0024] As the bellows 112 expands, a vacuum suction force is generated within the bellows chamber 132 by the closed lower valve member 122. That force is sufficient to overcome the cracking pressure or resiliency of the upper valve member 120 and separate it from the upper valve seat 128. Thus, during the downward stroke, liquid passes from the intermediate chamber 126 down into the bellows chamber 132. Once the downward stroke ends, returning the pump 100 to the primed configuration of Figure 3, the vacuum suction force ceases. At that time, the upper valve member 120 returns to its resting and closed position shown in Figure 3. Thus, the pump 100 is ready for another actuation.

[0025] As just described, in the specific embodiment of Figures 3, the valve stem 106 which includes the valve cap 118, the upper valve member 120 and the lower valve member 122 is formed of one integral construction. In an alternative embodiment (not shown), the valves may be formed by an assembly of one or more separate pieces. As one example, such a valve assembly may be comprised of two pieces, an inner valve stem 106a and an outer valve sheath 106b. The inner valve stem 106a includes the lower valve member 122 and the lower stem portion 138. The outer valve stem 106b includes the valve cap 118, the upper valve member 120, and an intermediate body which has a central channel to slidably receive the lower stem portion 138. The inner valve stem 106a slides up and down in the outer valve sheath 106b and the channel 116 to operate the pump, while the sheath 106b remains stationary within the channel 116.

[0026] More specifically, when the internal actuator initially moves the outer flange 114 upwardly to operate the pump, the inner valve stem 106a remains in place within the channel 116. As a result, the stationary lower valve member 122 is separated from the upwardly moving lower valve seat 130. In that way, the lower valve is opened to permit liquid to flow downwardly out of the bellows chamber 132. If an outlet cap 108 is employed, the liquid can then exit the pump through the apertures 136 in the bottom surface 134 of the outlet cap 108.

[0027] Eventually, the outer flange 114 is moved far enough upwardly that the bottom surface 134 of the outlet cap 108 contacts the lower valve member 122 of the inner valve stem 106a. Further upward movement of the outlet flange 114 continues to contract the bellows 112, but also moves the inner valve stem 106a upwardly within the outer valve sheath 106b and the channel 116. The lower stem portion 138 of the inner valve stem 106a may be short enough that its upper end always remains disposed within the outer valve sheath 106b. Alternatively, the lower stem portion 138 may extend upwardly out of the outer valve sheath 106b and into the liquid storage chamber 202. In such a case, the valve stem 106a may include a seal to prevent liquid from flowing from chamber 202a past valve stem 106a.

[0028] When a desired amount of liquid has been dispensed, the internal actuator stops the upward movement of the outlet flange 114, which is then free to move downwardly back to the primed position shown in Figure 3. During the initial downward and expanding movement of

the bellows 112, the inner valve stem 106a remains in an upper position within the outer valve sheath 106b and the channel 116. As a result, the stationary lower valve member 122 comes into contact with the downwardly moving lower valve seat 130. In that way, the lower valve is closed to prevent liquid and air from flowing past the lower valve. Further downward movement of the outlet flange 114 continues to expand the bellows 112, but also moves the inner valve stem 106a downwardly within the outer valve sheath 106b and the channel 116, which creates a vacuum to refill bellows chamber 132. Once the downward stroke ends, the pump 100 returns to the primed configuration of Figure 3, and the pump is ready for another actuation.

[0029] If an outlet cap 108 is used in conjunction with an inner valve stem 106a and an outer valve sheath 106b, the apertures 136 may be disposed outside of the periphery of the lower valve member 122. In other embodiments using an outlet cap 108, the apertures 136 may instead or additionally be placed in the center area of the bottom surface 134. In such an embodiment, the valve surface of the lower valve member 122 may also have apertures, so that liquid may reach the central apertures 136 when the lower valve member 122 is contacting the bottom surface 134. When the lower valve is closed as shown in Figure 3, the apertures within the lower valve member 122 are closed off by the lower valve seat 130.

[0030] The rest position of the embodiment shown in Figures 1-3 is a primed pump. In yet other alternative embodiments (not shown), the rest position may be an unprimed state, such that actuation both primes the pump and then dispenses the primed liquid.

[0031] In the embodiment of Figures 1-3, the passages 124 in the valve cap 118 are wide enough that liquid is free to move from the liquid storage chamber 202 to the intermediate chamber 126 at all times. In an alternative embodiment (not shown), the passages 124 may be small enough that the surface tension of the liquid in chamber 202 prevents the liquid from flowing down into the intermediate chamber 126 by the force of gravity alone. In some such embodiments, the passages 124 may function as the upper valve, so that the upper valve member 120 may not be needed. That is, the surface tension of the liquid in the chamber 202 keeps the liquid there until the bellows 112 expands in a downward stroke, creating a vacuum suction force to overcome the surface tension.

[0032] The liquid pump 100 of Figures 1-3, or any other liquid pump embodiment disclosed herein, may be manufactured in any number of ways. As one example, the housing 104 and the valve stem 106 may be separately molded from suitable plastic material(s). Then the valve stem 106 may be inserted into the channel 116 of the housing 104, because the valve cap 118 resiliency collapses as it passes through the channel 116 and then expands when it exits the channel 116 to hold the valve stem 106 in place. Then the outlet cap 108, if desired, may be placed on the housing 104.

[0033] The liquid pump 100 may be attached to a filled liquid container 200 in any number of ways. As one example, the pump housing 104 may be first attached to the container 200, which is then filled through the channel 116 before the valve stem 106 is inserted. Or, the pump 100 may be manufactured entirely separately from the container 200 and then attached thereto, before filling the container with liquid from an open top end which is then welded or otherwise sealed shut. As yet another option, the liquid container 200 may be filled with liquid and then held upside-down as a completed pump assembly 100 is attached to the container at its bottom end 206.

[0034] The exemplary liquid pump 100 may allow for a simple and inexpensive replacement of the liquid supply in a liquid dispenser system. Once the supply of liquid in the liquid storage chamber 202 runs out, the now-empty disposable refill unit 300 may be replaced with a new refill unit 300 containing a supply of liquid.

[0035] While the present invention has been illustrated by the description of embodiments thereof and while the embodiments have been described in considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. For example, in a very simple embodiment, what has been described above as a refill unit 300 for use in conjunction with a separate liquid dispensing system may instead be used alone as the entire pumping system. The locking members 102 may simply be received in a mounting bracket, and the pump 100 actuated by a user pressing his or her hand on the outlet flange 114 to dispense liquid. Moreover, elements described with one embodiment may be readily adapted for use with other embodiments. Therefore, the invention, in its broader aspects, is not limited to the

specific details,, the representative apparatus and illustrative examples shown and described.. Accordingly,, departures may be made from such details without departing from the spirit or scope of the general inventive concept.

CLAIMS

I claim:

1. A refill unit for a liquid dispenser system, the refill unit comprising:
a liquid container for holding a supply of liquid; and
a pump connected to the liquid container,
the pump comprising a fitment portion and a pump portion,
wherein the fitment portion is configured for attachment to the liquid container, and the
pump portion comprises an upper valve member and a lower valve member
disposed along a common longitudinal axis;
wherein the fitment portion and the pump portion are formed as one integral piece.
2. The refill unit of claim 1 wherein the pump portion comprises a bellows.
3. The refill unit of claim 1 wherein the upper valve and the lower valve are formed of one
integral piece.
4. The refill unit of claim 1 wherein the upper valve and the lower valve are connected to
each other by a resilient member.
5. The refill unit of claim 1 wherein the upper valve and the lower valve are separate pieces
but are connected to each other.
6. The refill unit of claim 1 further comprising an outlet cap.
7. The refill unit of claim 1 wherein the liquid container is in the form of a plastic bag.
8. The refill unit of claim 1 wherein the fitment further comprises one or more locking tabs.
9. A pump comprising:
a unitary pump body including a fitment portion and a bellows portion;
a substantially straight passage extending through the pump body;
the passage having a proximal inlet end near the fitment portion and a distal outlet end
opposite the fitment portion; and
an inlet valve located near the proximal inlet end and an outlet valve located near the
distal outlet end;
wherein the inlet valve and the outlet valve extend along a common longitudinal axis.

10. The refill unit of claim 9 wherein the inlet valve and the outlet valve are connected to each other.
11. The refill unit of claim 9 wherein the inlet valve and the outlet valve are joined to one another by a resilient member.
12. The refill unit of claim 9 further comprising a container secured to the pump.
13. The refill unit of claim 9 further comprising a valve cap, wherein the valve cap, the inlet valve and the outlet valve are linked together.
14. The refill unit of claim 9 wherein the inlet valve and outlet valve are joined together by one or more pieces.
15. A refill unit comprising:
 - a container,
 - a unitary pump body including a fitment portion and a bellows portion;
 - the fitment portion connected to the container,
 - a substantially straight channel extending through the pump body;
 - a valve stem located at least partially within the substantially straight channel; and
 - the valve stem including an inlet valve member, an outlet valve member, and a stem connecting the inlet valve member to the outlet valve member.
16. The refill unit of claim 15 wherein the stem is a resilient member.
17. The refill unit of claim 15 wherein the stem is formed of two or more pieces.
18. The refill unit of claim 15 further comprising an end cap and the stem is connected to the end cap.
19. The refill unit of claim 18 further comprising one or more apertures in the valve cap for fluid to flow through.
20. The refill unit of claim 18 further comprising an intermediary chamber located between the valve cap.

1/1

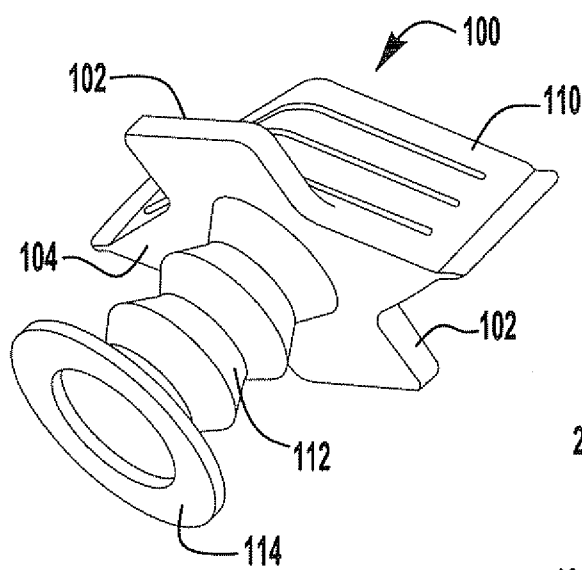


FIG. 1

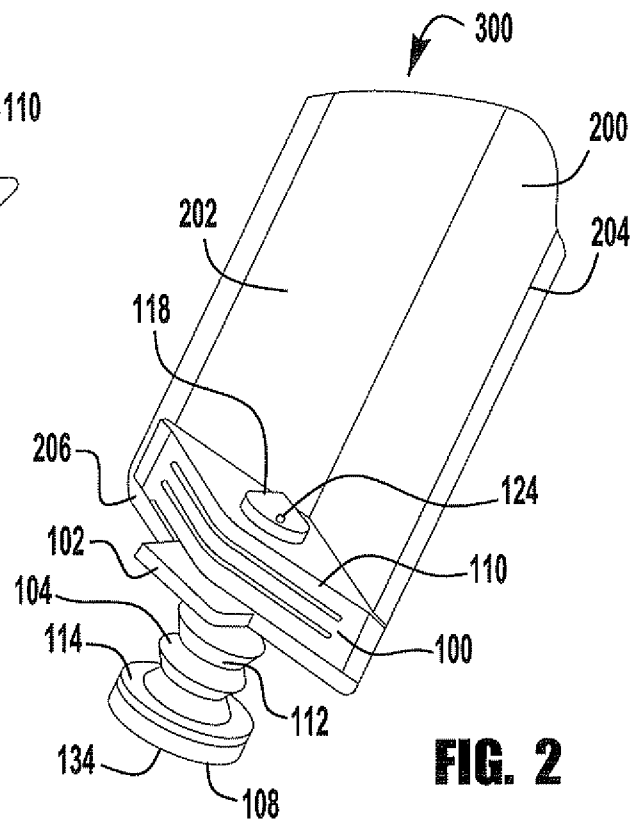


FIG. 2

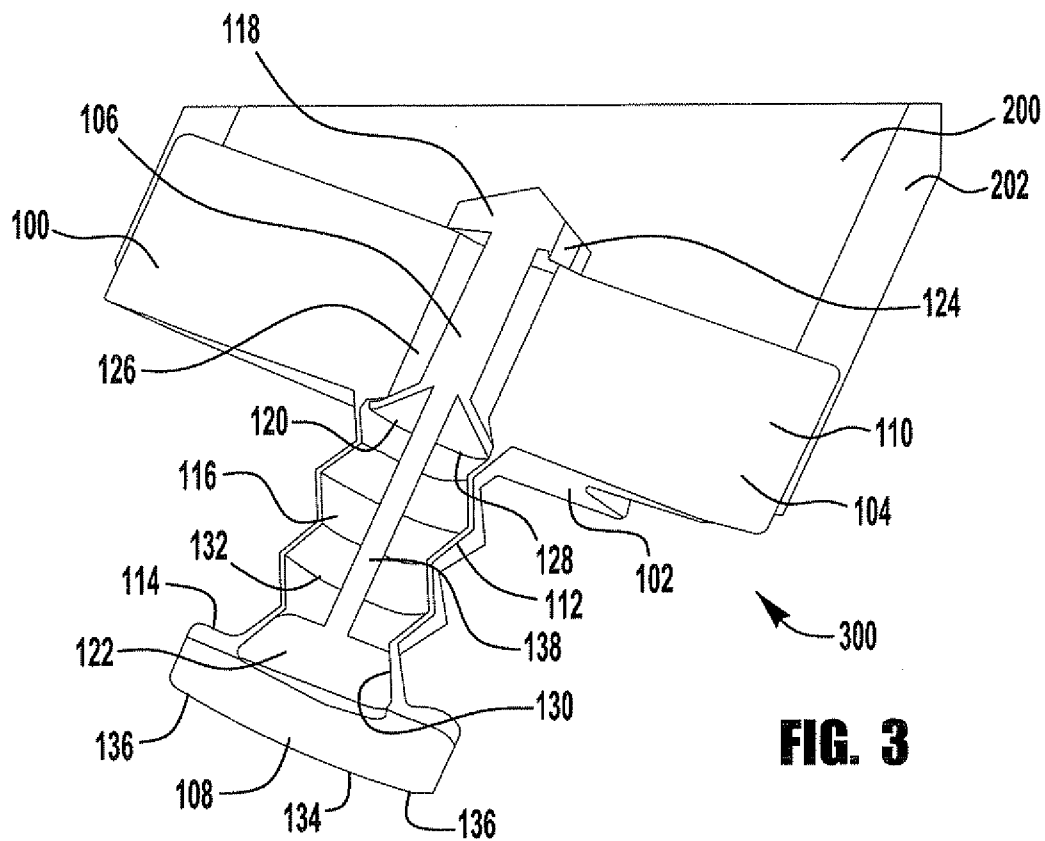


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/020079

A. CLASSIFICATION OF SUBJECT MATTER

INV. B05B1/30 A47K5/12 B05B1/32 B05B11/00 G01F11/08
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B05B A47K B65D F04B G01F A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 952 924 A (BENSON GUSTAV ERIC VALDEMAR) 27 April 1976 (1976-04-27) column 2, line 42 - column 4, line 11; figures -----	1-20
X	EP 2 039 621 A2 (SANKI KK [JP]) 25 March 2009 (2009-03-25) paragraph [0039] - paragraph [0043] ; figures 20-21 -----	1,2,4-18
X	US 2010/301070 A1 (ALLEF PETRA [DE] ET AL) 2 December 2010 (2010-12-02) paragraph [0025] - paragraph [0038] sentence 46; figure 3 ----- -/- .	1,2, 4-10, 12-15 , 17-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 2013

Date of mailing of the international search report

08/05/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Endri zzi , Si lvi o

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/020079

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/031278 A1 (HAN DE MAN EELCO [NL]) 10 February 2011 (2011-02-10) paragraph [0078] - paragraph [0094] ; figures 11a-15 paragraph [0100] - paragraph [0107] ; figures 19-30 -----	1-17
X	W0 2011/130763 A1 (HAGLEITNER HANS GEORG [AT]) 27 October 2011 (2011-10-27) page 3, line 10 - page 4, line 20; figures -----	1, 2, 4-14
X	FR 2 199 588 A1 (MELZASSARD LOUI ETS [MC]) 12 April 1974 (1974-04-12) page 2 - page 3; figures -----	1, 2, 4-14
X	DE 20 2009 006603 U1 (HUEBNER GMBH [DE]) 24 September 2009 (2009-09-24) paragraph [0019] - paragraph [0023] ; figures -----	1, 2, 4, 5, 7, 9-12, 14
X	DE 20 2011 105790 U1 (HUEBNER GMBH [DE]) 1 December 2011 (2011-12-01) paragraph [0034] - paragraph [0043] ; figures -----	1, 2, 4-14
X	W0 2009/104992 A1 (SCA HYGIENE PROD AB [SE]; NILSSON HUGO [SE]) 27 August 2009 (2009-08-27) figures -----	1, 3-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/020079

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3952924	A	27-04-1976	NONE
EP 2039621	A2	25-03-2009	CN 101391671 A 25-03-2009
			EP 2039621 A2 25-03-2009
			HK 1128449 A1 30-11-2012
			JP 2009214933 A 24-09-2009
			KR 20090030208 A 24-03-2009
			US 2009071977 A1 19-03-2009
US 2010301070	A1	02-12-2010	AU 2009216864 A1 27-08-2009
			CA 2712442 A1 24-08-2009
			CN 101917889 A 15-12-2010
			DE 102008002773 A1 20-08-2009
			EP 2312982 A1 27-04-2011
			KR 20110008012 A 25-01-2011
			RU 2010139155 A 27-03-2012
			TW 201008541 A 01-03-2010
			US 2010301070 A1 02-12-2010
			WO 2009103583 A1 27-08-2009
US 2011031278	A1	10-02-2011	US 2011031278 A1 10-02-2011
			WO 2012094049 A1 12-07-2012
WO 2011130763	A1	27-10-2011	AT 509748 A1 15-11-2011
			EP 2560532 A1 27-02-2013
			US 2013043280 A1 21-02-2013
			WO 2011130763 A1 27-10-2011
FR 2199588	A1	12-04-1974	NONE
DE 202009006603	U1	24-09-2009	DE 202009006603 U1 24-09-2009
			DE 202010003159 U1 24-06-2010
DE 202011105790	U1	01-12-2011	DE 102011014169 A1 20-09-2012
			DE 202011100895 U1 02-08-2011
			DE 202011105790 U1 01-12-2011
			EP 2499950 A2 19-09-2012
			US 2012237377 A1 20-09-2012
WO 2009104992	A1	27-08-2009	AU 2008350973 A1 27-08-2009
			CA 2715994 A1 27-08-2009
			CN 101952178 A 19-01-2011
			EP 2259982 A1 15-12-2010
			US 2011036863 A1 17-02-2011
			WO 2009104992 A1 27-08-2009