

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 May 2009 (07.05.2009)

PCT

(10) International Publication Number
WO 2009/056809 A2

(51) International Patent Classification:

D06M 10/02 (2006.01) D06M 14/24 (2006.01)
D06M 14/18 (2006.01) D06M 14/26 (2006.01)
D06M 14/20 (2006.01) D06M 14/28 (2006.01)
D06M 14/22 (2006.01) D06M 14/30 (2006.01)

(74) Agents: LELAND, Emma, Clare et al.; Greaves Brewster LLP, Indigo House, Cheddar Business Park, Wedmore Road, Cheddar, Somerset BS27 3EB (GB).

(21) International Application Number:

PCT/GB2008/003640

(22) International Filing Date: 28 October 2008 (28.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0721202.0 30 October 2007 (30.10.2007) GB

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): COULSON, Stephen [GB/GB]; 18 Neave Mews, Abingdon, Oxfordshire OX14 5FP (GB).

Published:

— without international search report and to be republished upon receipt of that report

WO 2009/056809 A2

(54) Title: NOVEL METHOD

(57) Abstract: A method for treating an item which, in use, is subjected to flexing, to reduce its susceptibility to water penetration over time during use, said method comprising forming a water repellent coating or surface modification on the surface of the item by ionisation or activation technology.

Novel Method

The present invention relates to a method for treating items which, in use, are subjected to flexing, to reduce their 5 susceptibility to water penetration over time during use and to items which have been so treated.

Plasma deposition techniques have been quite widely used for the deposition of polymeric coatings onto a range of surfaces, 10 and in particular onto fabric surfaces. This technique is recognised as being a clean, dry technique that generates little waste compared to conventional wet chemical methods. Using this method, plasmas are generated from organic molecules, which are subjected to an electrical field. When 15 this is done in the presence of a substrate, the radicals of the compound in the plasma polymerise onto the substrate.

Conventional polymer synthesis tends to produce structures containing repeat units that bear a strong resemblance to the 20 monomer species, whereas a polymer network generated using a plasma can be extremely complex. The properties of the resultant coating can depend upon the nature of the substrate as well as the nature of the monomer used and conditions under which it is deposited.

25 The use of plasma polymerisation technology in the treatment of a range of fashion accessories, including shoes, so as to protect in particular delicate fabrics from oil or water damage and to make items such as shoes essentially waterproof is 30 described in WO 2007/083124.

The present inventors have now found that by using plasma enhancement technology, not only can a high degree of water-proofing protection be achieved but also the durability of the 35 resistance to water penetration of the item in use is significantly enhanced.

Accordingly, the present invention provides a method for treating an item which, in use, is subjected to flexing, to reduce its susceptibility to water penetration over time during use, said method comprising forming a water repellent coating 5 or surface modification on the surface of the item .

The water repellent coating may be formed by ionisation or activation technology such as plasma processing

10 The water repellent coating may be applied by other methods, for example, by dipping or pad applied. The repellent coating may comprise a fluoropolymer, for example polytetrafluoroethylene (PTFE). Alternatively, the repellent coating may comprise a hydrocarbon or silicon based finish.

15 Examples include TeflonTM manufactured by Dupont and OleophobolTM manufactured by Ciba.

By means of the invention, a method is provided for enhancing the durability of the resistance of an item to water 20 penetration during flexing in use. This is of particular benefit in the case, for example, of items of footwear, such as shoes and particularly sports shoes such as running shoes or trainers, which are subject to considerable flexing strains during everyday use.

25 The upper of an item of footwear, such as a shoe, typically includes stitching, either to join different component parts of the upper or as a decorative feature. The stitching is often provided at the front of the shoe for aesthetic reasons and the 30 majority of stitching tends to be located at the flex point of the item of footwear. During use, flexing of the item of footwear causes the needle holes created from the stitching to distort and increase in size. The method of the present invention provides a water repellent coating which is durable 35 to distortion or increase in size of needle holes in the upper, due to flexing.

The method of the present invention provides a water repellent coating to an item of footwear or constructed upper whilst allowing the item of footwear or constructed upper to remain 5 air permeable.

By treating the whole item of footwear or constructed upper of an item of footwear, improved water repellence results. Furthermore, treatment of the whole item of footwear or 10 constructed upper of an item of footwear ensures that regions of the upper which are provided with holes, for example needle holes and seams, are treated. These are regions which come under stress during flexing.

15 The method may, however, suitably be applied to other items which are subject to flexing in use and for which a high degree of water-proofing protection combined with durability of resistance to water penetration in use is desired. Suitable items include, for example, tents, awnings, umbrellas and 20 sleeping bags.

Enhancing the durability of resistance to water penetration of the item according to the method of the present invention has the advantage that it enables less expensive items to be used 25 without compromising the degree and durability of water-proofing protection achieved. In the case of sports' shoes, for example, treating the shoes according to the present method avoids the need for complex manufacturing techniques to introduce physical barriers such as membranes and means that 30 cheaper shoes can be used.

In one embodiment, the item comprises an item of footwear or a constructed upper for an item of footwear. Thus the complete item of footwear, for example a complete shoe, may be treated. 35 Alternatively, a constructed upper, for example of a shoe, may be treated and then attached to a sole to form an item of

footwear. The item of footwear or constructed upper may further comprise laces.

5 In one embodiment, the ionisation or activation technology used is plasma processing, particularly plasma deposition.


According to one embodiment, therefore, the method of the invention comprises exposing the item to plasma in a gaseous state for a sufficient period of time to allow a protective 10 layer to be created on the surface of the item.

The expression "protective layer" refers to a layer, especially a polymeric layer, which provide some protection against liquid damage, and in particular are liquid (such as oil- and water-) 15 repellent. Sources of liquids from which the items are protected include environmental liquids such as water, and in particular rain, as well as any other oil or liquid, which may be accidentally spilled.

20 Any monomeric compound or gas which undergoes plasma polymerisation to form a water-repellent polymeric coating layer on the surface of the item may suitably be used. Suitable monomers which may be used include those known in the art to be capable of producing water-repellent polymeric 25 coatings on substrates by plasma polymerisation including, for example, carbonaceous compounds having reactive functional groups, particularly substantially $-CF_3$ dominated perfluoro compounds (see WO 97/38801), perfluorinated alkenes (Wang et al., Chem Mater 1996, 2212-2214), hydrogen containing 30 unsaturated compounds optionally containing halogen atoms or perhalogenated organic compounds of at least 10 carbon atoms (see WO 98/58117), organic compounds comprising two double bonds (WO 99/64662), saturated organic compounds having an optionally substituted alky chain of at least 5 carbon atoms optionally 35 interposed with a heteroatom (WO 00/05000), optionally substituted alkynes (WO 00/20130), polyether substituted

alkenes (US 6,482,531B) and macrocycles containing at least one heteroatom (US 6,329,024B), the contents of all of which are herein incorporated by reference.

5 Preferably, the item such as the shoe, is provided with a polymeric coating formed by exposing the item to plasma comprising a compound of formula (I)

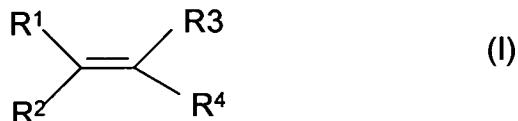

10 where R^1 , R^2 and R^3 are independently selected from hydrogen, alkyl, haloalkyl or aryl optionally substituted by halo; and R^4 is a group $X-R^5$ where R^5 is an alkyl or haloalkyl group and X is a bond; a group of formula $-C(O)O-$, $-C(O)O(CH_2)_nY-$ where n is an integer of from 1 to 10 and Y is a bond or a sulphonamide group; or a group $-(O)_pR^6(O)_q(CH_2)_t-$ where R^6 is aryl optionally substituted by halo, p is 0 or 1, q is 0 or 1 and t is 0 or an integer of from 1 to 10, provided that where q is 1, t is other than 0., for a sufficient period of time to allow a protective polymeric layer to form on the surface of the item.

Suitable haloalkyl groups for R^1 , R^2 , R^3 and R^5 are fluoroalkyl groups. The alkyl chains may be straight or branched and may include cyclic moieties.

25 For R^5 , the alkyl chains suitably comprise 2 or more carbon atoms, suitably from 2-20 carbon atoms and preferably from 6 to 12 carbon atoms.

30 For R^1 , R^2 and R^3 , alkyl chains are generally preferred to have from 1 to 6 carbon atoms.

Preferably R^5 is a haloalkyl, and more preferably a perhaloalkyl group, particularly a perfluoroalkyl group of

6

formula C_mF_{2m+1} where m is an integer of 1 or more, suitably from 1-20, and preferably from 4-12 such as 4, 6 or 8.

5 Suitable alkyl groups for R^1 , R^2 and R^3 have from 1 to 6 carbon atoms.

In one embodiment, at least one of R^1 , R^2 and R^3 is hydrogen. In a particular embodiment R^1 , R^2 , R^3 are all hydrogen. In yet a further embodiment however R^3 is an alkyl group such as methyl 10 or propyl.

Where X is a group $-C(O)O- -C(O)O(CH_2)_nY-$, n is an integer which provides a suitable spacer group. In particular, n is from 1 to 5, preferably about 2.

15

Suitable sulphonamide groups for Y include those of formula $-N(R^7)SO_2^-$ where R^7 is hydrogen or alkyl such as C_{1-4} alkyl, in particular methyl or ethyl.

20 In one embodiment, the compound of formula (I) is a compound of formula (II)



25 where R^5 is as defined above in relation to formula (I).


In compounds of formula (II), X in formula (I) is a bond.

However in a preferred embodiment, the compound of formula (I) 30 is an acrylate of formula (III)



where n and R^5 as defined above in relation to formula (I) and 35 R^7 is hydrogen, C_{1-10} alkyl, or C_{1-10} haloalkyl. In particular R^7

is hydrogen or C₁₋₆alkyl such as methyl. A particular example of a compound of formula (III) is a compound of formula (IV)

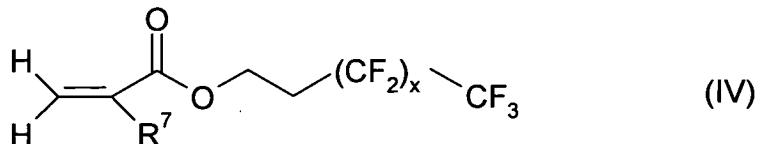

5


where R^7 is as defined above, and in particular is hydrogen and x is an integer of from 1 to 9, for instance from 4 to 9, and preferably 7. In that case, the compound of formula (IV) is 1H,1H,2H,2H-heptadecafluorodecylacrylate.

10

Alternatively, a polymeric coating may be formed by exposing the item to plasma comprising one or more organic monomeric compounds, at least one of which comprises two carbon-carbon double bonds for a sufficient period of time to allow a polymeric layer to form on the surface.

15 polymeric layer to form on the surface.

Suitably the compound with more than one double bond comprises a compound of formula (V)

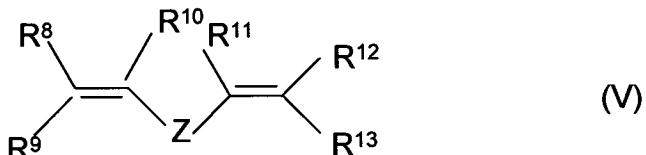

20


where R^8 , R^9 , R^{10} , R^{11} , R^{12} , and R^{13} are all independently selected from hydrogen, halo, alkyl, haloalkyl or aryl optionally substituted by halo; and Z is a bridging group.

25

Examples of suitable bridging groups Z for use in the compound of formula (V) are those known in the polymer art. In particular they include optionally substituted alkyl groups which may be interposed with oxygen atoms. Suitable optional

substituents for bridging groups Z include perhaloalkyl groups, in particular perfluoroalkyl groups.

In a particularly preferred embodiment, the bridging group Z 5 includes one or more acyloxy or ester groups. In particular, the bridging group of formula Z is a group of sub-formula (VI)

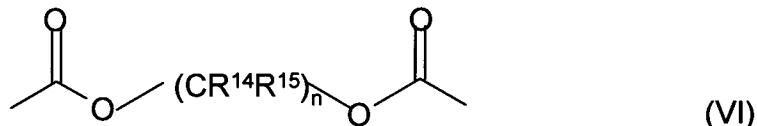


where n is an integer of from 1 to 10, suitably from 1 to 3, each R¹⁴ and R¹⁵ is independently selected from hydrogen, alkyl 10 or haloalkyl.

Suitably R⁸, R⁹, R¹⁰, R¹¹, R¹², and R¹³ are haloalkyl such as fluoroalkyl, or hydrogen. In particular they are all hydrogen.

15 Suitably the compound of formula (V) contains at least one haloalkyl group, preferably a perhaloalkyl group.


Particular examples of compounds of formula (V) include the following:

20

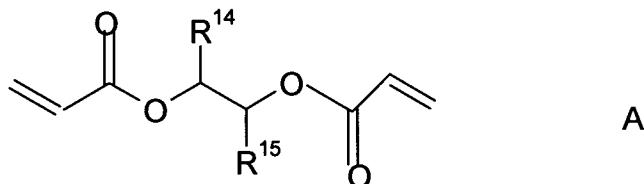

wherein R¹⁴ and R¹⁵ are as defined above, provided that at least one of R¹⁴ or R¹⁵ is other than hydrogen. A particular example of such a compound is a compound of formula B.


25

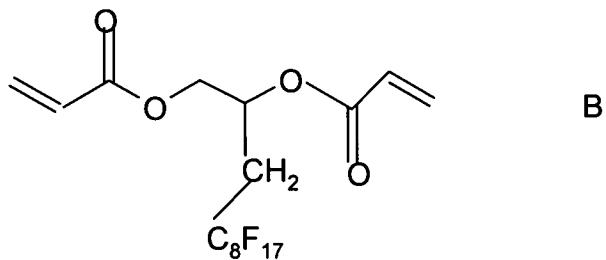

In a further aspect, the polymeric coating is formed by exposing the item to plasma comprising a monomeric saturated organic compound, said compound comprising an optionally 5 substituted alkyl chain of at least 5 carbon atoms optionally interposed with a heteroatom for a sufficient period of time to allow a polymeric layer to form on the surface.

The term "saturated" as used herein means that the monomer does 10 not contain multiple bonds (i.e. double or triple bonds) between two carbon atoms which are not part of an aromatic ring. The term "heteroatom" includes oxygen, sulphur, silicon or nitrogen atoms. Where the alkyl chain is interposed by a nitrogen atom, it will be substituted so as to form a secondary 15 or tertiary amine. Similarly, silicones will be substituted appropriately, for example with two alkoxy groups.

Particularly suitable monomeric organic compounds are those of formula (VII)



(VII)

where R^{16} , R^{17} , R^{18} , R^{19} and R^{20} are independently selected from hydrogen, halogen, alkyl, haloalkyl or aryl optionally 25 substituted by halo; and R^{21} is a group $X-R^{22}$ where R^{22} is an alkyl or haloalkyl group and X is a bond; a group of formula -
 $C(O)O(CH_2)_xY-$ where x is an integer of from 1 to 10 and Y is a bond or a sulphonamide group; or a group $-(O)_pR^{23}(O)_s(CH_2)_t-$ where R^{23} is aryl optionally substituted by halo, p is 0 or 1, 30 s is 0 or 1 and t is 0 or an integer of from 1 to 10, provided that where s is 1, t is other than 0.

Suitable haloalkyl groups for R¹⁶, R¹⁷, R¹⁸, R¹⁹, and R²⁰ are fluoroalkyl groups. The alkyl chains may be straight or branched and may include cyclic moieties and have, for example from 1 to 6 carbon atoms.

5

For R²², the alkyl chains suitably comprise 1 or more carbon atoms, suitably from 1-20 carbon atoms and preferably from 6 to 12 carbon atoms.

10 Preferably R²² is a haloalkyl, and more preferably a perhaloalkyl group, particularly a perfluoroalkyl group of formula C_zF_{2z+1} where z is an integer of 1 or more, suitably from 1-20, and preferably from 6-12 such as 8 or 10.

15 Where X is a group -C(O)O(CH₂)_yY-, y is an integer which provides a suitable spacer group. In particular, y is from 1 to 5, preferably about 2.

20 Suitable sulphonamide groups for Y include those of formula -N(R²³)SO₂⁻ where R²³ is hydrogen, alkyl or haloalkyl such as C₁₋₄alkyl, in particular methyl or ethyl.

25 The monomeric compounds used in the method of the invention preferably comprises a C₆₋₂₅ alkane optionally substituted by halogen, in particular a perhaloalkane, and especially a perfluoroalkane.

30 In yet a further alternative, item is exposed to plasma comprising an optionally substituted alkyne for a sufficient period of time to allow a polymeric layer to form on the surface.

35 Suitably the alkyne compounds used in the method of the invention comprise chains of carbon atoms, including one or more carbon-carbon triple bonds. The chains may be optionally interposed with a heteroatom and may carry substituents

including rings and other functional groups. Suitable chains, which may be straight or branched, have from 2 to 50 carbon atoms, more suitably from 6 to 18 carbon atoms. They may be present either in the monomer used as a starting material, or 5 may be created in the monomer on application of the plasma, for example by the ring opening

Particularly suitable monomeric organic compounds are those of formula (VIII)

10



where R^{24} is hydrogen, alkyl, cycloalkyl, haloalkyl or aryl optionally substituted by halo;

15 X^1 is a bond or a bridging group; and

R^{25} is an alkyl, cycloalkyl or aryl group optionally substituted by halogen.

Suitable bridging groups X^1 include groups of formulae

20 $-(CH_2)_s-$, $-CO_2(CH_2)_p-$, $-(CH_2)_pO(CH_2)_q-$, $-(CH_2)_pN(R^{26})CH_2)_q-$,
 $-(CH_2)_pN(R^{26})SO_2-$, where s is 0 or an integer of from 1 to 20, p and q are independently selected from integers of from 1 to 20; and R^{26} is hydrogen, alkyl, cycloalkyl or aryl. Particular alkyl groups for R^{26} include C_{1-6} alkyl, in particular, methyl 25 or ethyl.


Where R^{24} is alkyl or haloalkyl, it is generally preferred to have from 1 to 6 carbon atoms.

30 Suitable haloalkyl groups for R^{24} include fluoroalkyl groups. The alkyl chains may be straight or branched and may include cyclic moieties. Preferably however R^{24} is hydrogen.

35 Preferably R^{25} is a haloalkyl, and more preferably a perhaloalkyl group, particularly a perfluoroalkyl group of


formula C_rF_{2r+1} where r is an integer of 1 or more, suitably from 1-20, and preferably from 6-12 such as 8 or 10.

5 In a preferred embodiment, the compound of formula (VIII) is a compound of formula (IX)




10 where s is as defined above and R^{27} is haloalkyl, in particular a perhaloalkyl such as a C_{6-12} perfluoro group like C_6F_{13} .

In an alternative preferred embodiment, the compound of formula (VIII) is a compound of formula (X)



where p is an integer of from 1 to 20, and R^{27} is as defined above in relation to formula (IX) above, in particular, a group C_8F_{17} . Preferably in this case, p is an integer of from 1 to 20, 6, most preferably about 2.


Other examples of compounds of formula (I) are compounds of formula (XI)



25 where p is as defined above, but in particular is 1, q is as defined above but in particular is 1, and R^{27} is as defined in relation to formula (IX), in particular a group C_6F_{13} ;


or compounds of formula (XII)

30



where p is as defined above, but in particular is 1, q is as defined above but in particular is 1, R^{26} is as defined above an in particular is hydrogen, and R^{27} is as defined in relation to formula (IX), in particular a group C_7F_{15} ;


or compounds of formula (XIII)



5

where p is as defined above, but in particular is 1, R^{26} is as defined above and in particular is ethyl, and R^{27} is as defined in relation to formula (IX), in particular a group C_8F_{17} .

10 In an alternative embodiment, the alkyne monomer used in the process is a compound of formula (XIV)



where R^{28} is hydrogen, alkyl, cycloalkyl, haloalkyl or aryl
15 optionally substituted by halo, R^{29} , R^{30} and R^{31} are independently selected from alkyl or alkoxy, in particular C_{1-6} alkyl or alkoxy.

Preferred groups R^{28} are hydrogen or alkyl, in particular C_{1-6} alkyl.

Preferred groups R^{29} , R^{30} and R^{31} are C_{1-6} alkoxy in particular ethoxy.

25 Precise conditions under which the plasma polymerization takes place in an effective manner will vary depending upon factors such as the nature of the polymer, the item being treated and so on and will be determined using routine methods known in the art.

30

Suitable plasmas for use in the method of the invention include non-equilibrium plasmas such as those generated by radiofrequencies (RF), microwaves or direct current (DC). They may operate at atmospheric or sub-atmospheric pressures as are known in the art. In particular however, they are generated by radiofrequencies (Rf).

Various forms of equipment may be used to generate gaseous plasmas. Generally these comprise containers or plasma chambers in which plasmas may be generated. Particular 5 examples of such equipment are described for instance in WO2005/089961 and WO02/28548, but many other conventional plasma generating apparatus are available.

In the method, in general, the substrate to be treated is 10 placed within a plasma chamber together with one or more monomers, which are able to generate the target polymeric substance, in an essentially gaseous state, a glow discharge is ignited within the chamber and a suitable voltage, which may preferably be pulsed, is applied.

15

As used herein, the expression "in an essentially gaseous state" refers to gases or vapours, either alone or in mixture, as well as aerosols.

20 The gas present within the plasma chamber may comprise a vapour of the monomeric compound alone, but it may be combined with a carrier gas, in particular, an inert gas such as helium or argon. In particular helium is a preferred carrier gas, if a carrier is required, as this can minimise fragmentation of the 25 monomer.

When used as a mixture, the relative amounts of the monomer vapour to carrier gas is suitably determined in accordance with procedures which are conventional in the art. The amount of 30 monomer added will depend to some extent on the nature of the particular monomer being used, the nature of the substrate, the size of the plasma chamber and so forth. Generally, in the case of conventional chambers, monomer is delivered in an amount of from 50-1000mg/minute, for example at a rate of from 35 10-150mg/minute. It will be appreciated, however, that the rate will very much depends on the reactor size chosen and the

number of substrates required to be processed at once; this in-turn depends on considerations such as the annual through-put required and the capital out-lay.

5 Carrier gas such as helium is suitably administered at a constant rate for example at a rate of from 5-90 standard cubic centimetres per minute (sccm), for example from 15-30 sccm. In some instances, the ratio of monomer to carrier gas will be in the range of from 100:0 to 1:100, for instance in the range of
10 from 10:0 to 1:100, and in particular about 1:0 to 1:10. The precise ratio selected will be so as to ensure that the flow rate required by the process is achieved.

15 In some cases, a preliminary continuous power plasma may be struck for example for from 15 seconds to 10 minutes within the chamber. This may act as a surface pre-treatment or activation step, ensuring that the monomer attaches itself readily to the surface, so that as polymerisation occurs, the deposition "grows" on the surface. The pre-treatment step may be
20 conducted before monomer is introduced into the chamber, in the presence of only an inert gas.

25 The plasma is then suitably switched to a pulsed plasma to allow polymerisation to proceed, at least when the monomer is present.

30 In all cases, a glow discharge is suitably ignited by applying a high frequency voltage, for example at 13.56MHz. This is applied using electrodes, which may be internal or external to the chamber, generally used for large and small chambers respectively.

35 Suitably the gas, vapour or gas mixture is supplied at a rate of at least 1 standard cubic centimetre per minute (sccm) and preferably in the range of from 1 to 100sccm.

In the case of the monomer vapour, this is suitably supplied at a rate of from 80-1000mg/minute whilst the continuous or pulsed voltage is applied. It may, however, be more appropriate for industrial scale use to have a fixed total monomer delivery 5 that will vary with respect to the defined process time and will also depend upon the nature of the monomer and the technical effect required.

Gases or vapours may be delivered into the plasma chamber using 10 any conventional method. For example, they may be drawn, injected or pumped into the plasma region. In particular, where a plasma chamber is used, gases or vapours may be drawn into the chamber as a result of a reduction in the pressure within the chamber, caused by use of an evacuating pump. 15 Alternatively, they may be pumped, sprayed, dripped, electrostatically ionises or injected into the chamber or delivered by any other known means for delivering a liquid or vapour to a vessel.

20 Polymerisation is suitably effected using vapours of compounds of formula (I), which are maintained at pressures of from 0.1 to 400mtorr.

The applied fields are suitably of power of from 5 to 500W, 25 suitably at about 10 - 200 W peak power, applied as a continuous or pulsed field. If pulses are required, they can be applied in a sequence which yields very low average powers, for example in a sequence in which the ratio of the time on : time off is in the range of from 1:500 to 1:1500. Particular 30 examples of such sequence are sequences where power is on for 20-50 μ s, for example about 30 μ s, and off for from 1000 μ s to 30000 μ s, in particular about 20000 μ s. Typical average powers obtained in this way are 0.01W.

35 The total RF power required for the processing of a batch of shoes is suitably applied from 30 seconds to 90 minutes,

preferably from 1 minute to 10 minutes, depending upon the nature of the compound of formula (I) and the type and number of items being enhanced in the batch.

5 Suitably a plasma chamber used is of sufficient volume to accommodate items such as tents and sleeping bags.

A particularly suitable apparatus and method for treating items in accordance with the invention is described in WO2005/089961, 10 the content of which is hereby incorporated by reference.

In particular, when using high volume chambers of this type, the plasma is created with a voltage as a pulsed field, at an average power of from 0.001 to 500W/m³, for example at from 15 0.001 to 100W/m³ and suitably at from 0.005 to 0.5W/m³.

These conditions are particularly suitable for depositing good quality uniform coatings, in large chambers, for example in chambers where the plasma zone has a volume of greater than 20 500cm³, for instance 0.1m³ or more, such as from 0.5m³-10m³ and suitably at about 1m³. The layers formed in this way have good mechanical strength.

The dimensions of the chamber will be selected so as to 25 accommodate the particular items being treated. For instance, generally cylindrical chambers may be suitable for a wide range of applications, but if necessary, elongate or rectangular chambers may be constructed or indeed cuboid, or of any other suitable shape.

30

The chamber may be a sealable container, to allow for batch processes, or it may comprise inlets and outlets for the items, to allow it to be utilised in a semi-continuous process. In particular in the latter case, the pressure conditions 35 necessary for creating a plasma discharge within the chamber are maintained using high volume pumps, as is conventional for

example in a device with a "whistling leak". However it will also be possible to process items of footwear at atmospheric pressure, or close to, negating the need for "whistling leaks"

- 5 The applied fields are suitably of power of from 20 to 500W, suitably at about 100W peak power, applied as a pulsed field. The pulses are applied in a sequence which yields very low average powers, for example in a sequence in which the ratio of the time on : time off is in the range of from 1:3 to 1:1500,
- 10 depending upon the nature of the monomer gas employed. Although for monomers which may be difficult to polymerise, time on : time off ranges may be at the lower end of this range, for example from 1:3 to 1:5, many polymerisations can take place with a time on:time off range of 1:500 to 1:1500.
- 15 Particular examples of such sequence are sequences where power is on for 20-50 μ s, for example about 30 μ s, and off for from 1000 μ s to 30000 μ s, in particular about 20000 μ s. Typical average powers obtained in this way are 0.01W.
- 20 The fields are suitably applied from 30 seconds to 90 minutes, preferably from 5 to 60 minutes, depending upon the nature of the monomer and the substrate, and the nature of the target coating required.
- 25 Items which have been treated in accordance with the method described above and which are novel form a further aspect of the invention.

- 30 Thus in particular, the invention provides a shoe treated in accordance with the method as described above. Preferred treatments are as outlined above.

The invention will now be particularly described by way of example.

35


Example 1

Four pairs of golf shoes were placed into a plasma chamber with a processing volume of ~ 300 litres. The chamber was connected to supplies of the required gases and or vapours, via a mass flow controller and/or liquid mass flow meter and a mixing injector or monomer reservoir as appropriate.

The chamber was evacuated to between 3 - 10 mtorr base pressure before allowing helium into the chamber at 20 sccm until a 10 pressure of 80 mtorr was reached. A continuous power plasma was then struck for 4 minutes using RF at 13.56 MHz at 300 W.

After this period, 1H,1H,2H,2H-heptadecafluorodecylacrylate (CAS # 27905-45-9) of formula

15

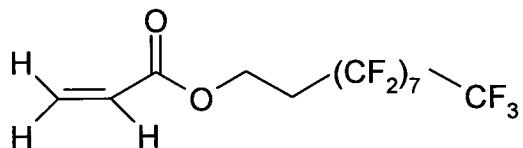

was brought into the chamber at a rate of 120 milligrams per minute and the plasma switched to a pulsed plasma at 30 micro 20 seconds on-time and 20 milliseconds off-time at a peak power of 100 W for 40 minutes. On completion of the 40 minutes the plasma power was turned off along with the processing gases and vapours and the chamber evacuated back down to base pressure. The chamber was then vented to atmospheric pressure and the 25 shoes removed.

These were tested for durability of resistance to water penetration after extended flexing (50,000 flexes at 20 mm immersion depth) according to standard test methods. The 30 results were compared for the same shoes but without treatment.


In most cases, the number of flexes before water penetration occurs was significantly higher for the treated shoe than the

untreated shoe, as can be seen from the results presented in Figure 1. In this Figure, column A shows the results obtained for a membrane, seam sealed, waterproof leather shoe treated according to the above method (unshaded) compared to an 5 untreated shoe (shaded). Columns B, C and D show the results obtained for seam sealed, waterproof leather shoes without a membrane (B), waterproof leather shoes only (that is, without a membrane or seam sealing) (C) and non waterproof leather shoes (D) and the corresponding untreated counterparts. In all cases, 10 the durability of the treated shoe to water penetration exceeded the industry standard requirements whereas all of the untreated shoes, including those containing membranes, exhibited unacceptable durability of resistance to water penetration.

Claims

1. A method for treating an item of footwear or a constructed upper for an item of footwear which, in use, is subjected to flexing, to reduce its susceptibility to water penetration over time during use, said method comprising forming a water repellent coating or surface modification on the surface of the item of footwear or constructed upper.
- 10 2. A method according to claim 1 wherein the water repellent coating or surface modification is formed by ionisation or activation technology.
- 15 3. A method according to claim 1 or claim 2 wherein the item of footwear or constructed upper further comprises laces.
4. A method according to any of claims 1 to 3 wherein the item of footwear or constructed upper is a sports shoe or a
- 20 constructed upper for a sports shoe.
5. A method according to any preceding claim wherein the ionisation or activation technology is plasma processing.
- 25 6. A method according to claim 4 wherein the plasma processing uses a plasma which comprises a monomeric compound which undergoes plasma polymerisation to form a water-repellent polymer, and the item of footwear or constructed upper is exposed for a sufficient period of time to allow a polymeric
- 30 layer to form on the surface thereof.
7. A method according to claim 5 or claim 6 wherein the item of footwear or constructed upper is exposed to pulsed plasma within a plasma deposition chamber.

8. A method according to claim 6 or claim 7 wherein the monomeric compound is a compound of formula (I)

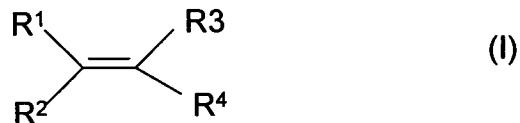

5 where R^1 , R^2 and R^3 are independently selected from hydrogen, alkyl, haloalkyl or aryl optionally substituted by halo; and R^4 is a group $X-R^5$ where R^5 is an alkyl or haloalkyl group and X is a bond; a group of formula $-C(O)O-$, $-C(O)O(CH_2)_nY-$ where n is an integer of from 1 to 10 and Y is a bond or a sulphonamide group; or a group $-(O)_pR^6(O)_q(CH_2)_t-$ where R^6 is aryl optionally substituted by halo, p is 0 or 1, q is 0 or 1 and t is 0 or an integer of from 1 to 10, provided that where q is 1, t is other than 0, for a sufficient period of time to allow a protective polymeric layer to be created on the surface of the item.

15

9. A method according to claim 8, wherein the compound of formula (I) is a compound of formula (II)



20


where R^5 is as defined in claim 8 or a compound of formula (III)



25

wherein n and R^5 as defined in claim 8 and R^7 is hydrogen, C_{1-10} alkyl, or C_{1-10} haloalkyl.

10. A method according to claim 9 wherein the compound of 30 formula (III) is a compound of formula (IV)

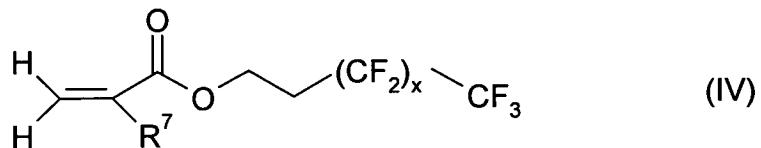

where R^7 is as defined in claim 8 and x is an integer of from 1 to 9.

5

11. A method according to claim 8 wherein the compound of formula (IV) is 1H,1H,2H,2H-heptadecafluorodecylacrylate.

12. A method according to any preceding claim, wherein the item 10 of footwear or constructed upper to be treated is placed within a plasma chamber together with one or more monomers, which are able to generate the target polymeric substance, in an essentially gaseous state, a glow discharge is ignited within the chamber and a suitable pulsed voltage is applied

15

13. A method according to claim 12, wherein pulses are applied in a sequence in which the ratio of the time on : time off is in the range of from 1:500 to 1:1500.

20 14. Use of a plasma polymerisation deposition process to reduce the susceptibility of an item of footwear or a constructed upper for an item of footwear to water penetration over time during use.

25

15. Use of a monomeric compound which undergoes plasma polymerisation to form a water-repellent polymer to reduce the susceptibility of an item of footwear or a constructed upper for an item of footwear to water penetration over time during use.

30

16. A shoe or a constructed upper, treated by a method according to any one of claims 1 to 13.

1/1

Figure 1

