



(11) **EP 2 831 210 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
14.11.2018 Bulletin 2018/46

(51) Int Cl.:
C10M 111/04 ^(2006.01) **C10N 30/04** ^(2006.01)
C10N 40/12 ^(2006.01)

(21) Application number: **13715104.9**

(86) International application number:
PCT/US2013/033965

(22) Date of filing: **27.03.2013**

(87) International publication number:
WO 2013/148743 (03.10.2013 Gazette 2013/40)

(54) **USE OF AN ALIPHATIC POLYETHER**

VERWENDUNG EINES ALIPHATISCHEN POLYETHERS

UTILISATION D'UN POLYÉTHÉR ALIPHATIQUE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **29.03.2012 US 201213434356**
13.07.2012 US 201261671278 P

(43) Date of publication of application:
04.02.2015 Bulletin 2015/06

(73) Proprietor: **American Chemical Technologies, Inc.**
Fowlerville, MI 48836 (US)

(72) Inventors:
• **KOVANDA, Kevin, P.**
Hartland, MI 48353 (US)
• **LATUNSKI, Mark, D.**
Morrice, MI 48857 (US)

(74) Representative: **Müller-Boré & Partner**
Patentanwälte PartG mbB
Friedenheimer Brücke 21
80639 München (DE)

(56) References cited:
WO-A1-2006/019548 WO-A1-2013/003405

- **GOVIND KHEMCHANDANI: "Non-varnishing and tribological characteristics of polyalkylene glycol-based synthetic turbine fluid", LUBRICATION SCIENCE, vol. 24, no. 1, 10 January 2012 (2012-01-10), pages 11-21, XP055065824, ISSN: 0954-0075, DOI: 10.1002/ls.165**
- **"UCON Fluids an Lubricants", , 1 November 2001 (2001-11-01), XP055065780, Retrieved from the Internet:
URL:http://msdssearch.dow.com/PublishedLiteratureDOWCOM/dh_003a/0901b8038003a7af.pdf?filepath=ucon/pdfs/noreg/118-01346.pdf&fromPage=GetDoc [retrieved on 2013-06-07]**
- **MARTIN GREAVES ET AL: "Performance properties of oil-soluble synthetic polyalkylene glycols", LUBRICATION SCIENCE, vol. 24, no. 6, 15 March 2012 (2012-03-15) , pages 251-262, XP055065854, ISSN: 0954-0075, DOI: 10.1002/ls.1179**
- **MARTIN GREAVES: "Oil Soluble Synthetic Polyalkylene Glycols - A New Type of Group V Base Oil", LUBE MAGAZINE, vol. 104, 1 August 2011 (2011-08-01), pages 21-24, XP055065784,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 831 210 B1

Description

FIELD OF THE INVENTION

[0001] The present invention is useful in the field of hydrocarbon-based lubricants.

INTRODUCTION TO THE DISCLOSURE

[0002] This section provides information helpful in understanding the invention but that is not necessarily prior art.

[0003] Hydrocarbon lubricants such as hydrocarbon oils are susceptible to oxidation and varnish formation during high temperature uses. The petroleum industry over the years has eliminated some of the impurities from crude oil via hydrocracking or produced synthetic hydrocarbons to minimize oxidation problems later on. In another measure taken to address the problem, nitrogen has been used to blanket the reservoir to prevent a hydrocarbon oil from coming in contact with oxygen. More recently, companies have developed varnish prediction test methods and varnish removal filters to filter out the soluble varnish. In spite of such efforts it still becomes necessary after a period of time in use to remove used oil that has filled with sludge and varnish and recharge the system with new oil. Further, varnish deposits onto machine parts can cause the parts to stick and interfere with operation of a machine.


[0004] Both draining and refilling a lubrication system and use of a varnish removal filtration system are expensive options and cannot guarantee that varnish is not deposited onto working machine parts. While there has been progress slowing the oxidation process, predicting the varnish formation, and removing some of the varnish via filtration, varnish can only be removed by filtration if the oil makes its way back to the filter. Oil out in the lines of a lubrication system can continue to degrade and deposit varnish, causing problems with operation of machinery. Dispersants may help keep soft varnish particles suspended in a hydrocarbon lubricant, but the dispersant micelles formed increase lubricant viscosity and affect performance of the lubricant. Martin Greaves, et al. discloses oil-soluble PAG base oils (Lubrication Science 2012; 24:251-262).

SUMMARY OF THE DISCLOSURE

[0005] The invention is set out in the appended set of claims.


[0006] Disclosed are methods in which an aliphatic polyether selected from: polyalkylene oxides with monomer units having 3 to 6 carbon atoms, preferably 3 to 5 carbon atoms, more preferably 3 or 4 carbon atoms, and most preferably 3 carbon atoms is added to a hydrocarbon lubricants, particularly hydrocarbon oils; such methods in which the hydrocarbon lubricant, particularly a hydrocarbon oil, comprises oxidation products that are dissolved by the addition of the aliphatic polyether; hydrocarbon lubricant, particularly hydrocarbon oil, containing an aliphatic polyether selected from: polyalkylene oxides with monomer units having 3 to 6 carbon atoms, preferably 3 to 5 carbon atoms, more preferably 3 or 4 carbon atoms, and most preferably 3 carbon atoms; lubrication systems including these hydrocarbon lubricants or hydrocarbon oils; machines including these lubrication systems; and methods of operating machines including these lubrication systems.

[0007] In various embodiments of these, the aliphatic polyether is selected from aliphatic polyethers having a formula



wherein R and R² are independently selected from aliphatic hydrocarbyl groups having one to four carbon atoms and hydrogen, with the caveat that at least one of R and R² is a hydrocarbyl group; R¹ is an aliphatic hydrocarbylene group having from 3 to 6 carbon atoms, preferably 3 to 5 carbon atoms, more preferably 3 or 4 carbon atoms, and most preferably 3 carbon atoms; and n is an integer from 4 to 50. The polyether has a number average molecular weight of from 300 to 3000 as determined by gel permeation chromatography using polystyrene standards. The polyether may be added to the hydrocarbon lubricant or hydrocarbon oil or included in a hydrocarbon lubricant or hydrocarbon oil in an amount from 2 wt% to 20 wt% of the polyether, preferably from 5 wt% to 20 wt% of the polyether, based on total lubricant weight.

[0008] In the practice of the invention, a hydrocarbon lubricant or oil containing oxidation products or varnish is treated by adding to the lubricant or oil an aliphatic polyether selected from polyalkylene oxide homopolymers having a formula



wherein R and R² are independently selected from aliphatic hydrocarbyl groups having one to four carbon atoms and hydrogen, with the caveat that at least one of R and R² is a hydrocarbyl group; R¹ is an aliphatic hydrocarbylene group having from 3 to 6 carbon atoms, preferably 3 to 5 carbon atoms, more preferably 3 or 4 carbon atoms, and most preferably 3 carbon atoms; and n is an integer from 4 to 50. The polyether has a number average molecular weight of from 300 to 3000 as determined by gel permeation chromatography using polystyrene standards. The hydrocarbon lubricant or hydrocarbon oil containing oxidation products or varnish may be treated with from 2 wt% to 20 wt% of the polyether, preferably from 5 wt% to 20 wt% of the polyether, based on total treated lubricant weight.

[0009] In various embodiments, the polyether-containing hydrocarbon lubricants, particularly hydrocarbon oils, are used in lubrication systems in which the lubricant or oil reaches temperatures above about 100°C. or in which the hydrocarbon lubricant or oil is subject to oxidative conditions.

[0010] The lubricants, particularly the hydrocarbon oils, may be used in lubrication systems for turbines, hydraulics, hydrostatic drives, in mobile equipment hydraulics, and in other such machines where cleanliness of the oil lubricant is an issue.

[0011] The disclosed lubricant compositions and methods minimize or prevent varnish formation and extend oil life of hydrocarbon oils used in applications in which they are exposed to high temperatures or oxidative conditions during use. In one method, the lubricant is a hydrocarbon oil used to lubricate a power generation turbine. The lubricant dissolves lubricant oxidation products (pre-varnish) and reduces pentane insolubles. This prevents build up of varnish on lubricated surfaces such as turbine system surfaces, which can cause sticky valves and turbine trips of the power generator.

[0012] While not wishing to be bound by theory, it is believed that the polyalkylene oxide homopolymers or polyvinyl ethers do not behave as dispersants for the oxidation products and varnish particles but instead increase the polarity of the base hydrocarbon oil to allow the hydrocarbon oil to dissolve the oxidation products and varnish particles. The dissolved oxidation products do not agglomerate.

[0013] The disclosed lubricant compositions and methods revitalize used oils (reduced VPR rating) so they do not have to be drained and refilled, which saves on waste disposal, eliminates the need to purchase expensive varnish removal filtration systems, and prevents or diminishes future varnish formation to extend oil life.

[0014] "A," "an," "the," "at least one," and "one or more" are used interchangeably to indicate that at least one of the item is present; a plurality of such items may be present unless the context clearly indicates otherwise.

[0015] Further areas of applicability will become apparent from the description provided herein. It should be understood that the description and specific examples are intended for purposes of illustration only and are not intended to limit the scope of the present disclosure.


DETAILED DESCRIPTION

[0016] A detailed description of exemplary, nonlimiting embodiments follows.

[0017] A hydrocarbon lubricant base stock is used in these methods and compositions. Hydrocarbon base stocks may be manufactured using a variety of different processes including, but not limited to, distillation, solvent refining, hydrogen processing, oligomerization, esterification, and re-refining. Nonlimiting examples of hydrocarbon base stocks are aliphatic hydrocarbon oils, hydrocracked and severely hydrotreated hydrocarbon oils, furfural-refined paraffinic oil, solvent-refined naphthenic oil, and solvent-refined aromatic oil; synthetic hydrocarbon oils, such as poly(alpha-olefin) oils like hydrogenated or partially hydrogenated olefins including hydrogenated hexene oligomers, hydrogenated octene oligomers, hydrogenated decene oligomers, hydrogenated C₆₋₁₀ oligomers, and hydrogenated C₈₋₁₀ oligomers; mineral oils such as liquid petroleum oils and solvent-treated or acid-treated mineral lubricating oils of the paraffinic, naphthenic or mixed paraffinic-naphthenic types such as paraffinic neutral 100", and oils derived from coal or shale; alkylbenzenes such as dodecylbenzenes, tetradecylbenzenes, dinonylbenzenes, di-(2-ethylhexyl)-benzenes; polyphenyls like biphenyls, terphenyls, alkylated polyphenyls; alkylated diphenyl ethers, and mixtures of these.

[0018] The polyether-containing hydrocarbon lubricant may be made using a hydrocarbon oil base stock or a fully formulated hydrocarbon lubricant, particularly a fully formulated hydrocarbon oil. The polyether-containing hydrocarbon lubricant or oil is made from used hydrocarbon lubricant or oil containing oxidation products, such as varnish particles or soft bodies, which may further include one or more lubricant additives.

[0019] The hydrocarbon base oil or lubricant is combined with a polyether selected from polyalkylene oxide homopolymers. The polyalkylene oxide homopolymers have a formula



wherein R and R² are independently selected from aliphatic hydrocarbyl groups having one to four carbon atoms and hydrogen, with the caveat that at least one of R and R² is a hydrocarbyl group; R¹ is an aliphatic hydrocarbylene group

having from 3 to 6 carbon atoms, preferably 3 to 5 carbon atoms, more preferably 3 or 4 carbon atoms, and most preferably 3 carbon atoms; and n is an integer from 4 to 50, preferably from about 10 or from about 15 to about 25 or to about 30 or to about 35 or to about 40, especially preferably from about 10 to about 40 or from about 10 to about 35 or from about 15 to about 35. The polyalkylene oxide homopolymer has a number average molecular weight of at least 300. The polyalkylene oxide homopolymer has a number average molecular weight of up to 3000, more preferably up to about 2000, and particularly preferably from about 500 to about 1200. The number average molecular weight is determined by gel permeation chromatography using polystyrene standards.

[0020] Nonlimiting examples include polypropylene oxide and polybutylene oxide having optionally one hydroxyl end-group and one alkoxide endgroup or, if there is no hydroxyl end group, two alkoxide endgroups, where the alkoxide endgroups may be methoxide, ethoxide, propoxide, isopropoxide, n-butoxide, isobutoxide, sec-butoxide and tert-butoxide endgroups. Such polyalkylene oxide polymers may be prepared using an alcohol as an initiator molecule by anionic polymerization of an alkylene oxide with base catalysts, e.g. alkali metal hydroxides like potassium hydroxide and sodium hydroxide, sodium methoxide, or metal sodium, or by cationic polymerization of an alkylene oxide with acid catalysts such as aluminum chloride, antimony pentachloride, boron trifluoride, iron(III) chloride, or tin(IV) chloride. Many alkoxide-terminated polyalkylene oxides are commercially available, for example from BASF under the tradename PLURASAFE® and from Dow Chemical under the tradename UCON™.

[0021] In various embodiments, the polyether-containing hydrocarbon oil or other lubricant that is prepared by combining the hydrocarbon oil or other hydrocarbon lubricant and polyether may contain from 2 wt% to 20 wt% of the polyether, preferably from 5 wt% to 20 wt% of the polyether, based on total polyether-containing hydrocarbon lubricant weight.

[0022] The polyether is not amphiphilic so as to form micelles as would a surfactant. Rather, it is understood that the polyether changes the characteristics of the lubricant to permit oxidation products and varnish particles to dissolve in the oil or other hydrocarbon lubricant.

[0023] The hydrocarbon oil or other hydrocarbon lubricant is preferably free of detergents, surfactants, and dispersants. The oil or lubricant may include one or more additives other than detergents, surfactants, and dispersants. Nonlimiting examples of suitable additives include antioxidants, anti-wear agents, extreme-pressure agents, friction-reducing agents, metal inactivating agents such as benzotriazoles, viscosity modifiers, pour point depressants, stabilizers, corrosion inhibitors, and flammability suppressants. Such additives may be used alone or in any combination of two or more. There are no particular restrictions on the inclusion of such additives. Generally, additives such as these may be present at less than or equal to about 10% by weight of the lubricant composition. Various embodiments of the lubricant composition may include about 0.1 to about 5% by weight of an additive or a combination of additives or about 0.2 to about 2% by weight of an additive or a combination of additives.

[0024] Nonlimiting examples of the antioxidants that can be used include phenolic antioxidants such as 2,6-di-t-butyl-4-methylphenol and 4,4'-methylenebis(2,6-di-t-butylphenol), and bisphenol A; amine and thiazine antioxidants such as p,p'-dioctylphenylamine, mono-octyldiphenylamine, phenothiazine, 3,7-dioctylphenothiazine, N,N-di(2-naphthyl)-p-phenylenediamine, phenyl-1-naphthylamine, phenyl-2-naphthylamine, alkylphenyl-1-naphthylamines, and alkylphenyl-2-naphthylamines; and sulfur-containing antioxidants such as alkyl disulfide, thiodipropionic acid esters and benzothiazole. The lubricant composition may comprise up to about 5.0 weight % antioxidants, about 0.1 to about 5 weight %, about 0.1 to about 2.0 weight %, or about 0.2 to about 0.8 weight % antioxidants. The lubricant compositions may include one or a combination of two or more antioxidant compounds.

[0025] In certain embodiments, the hydrocarbon lubricant and hydrocarbon oil compositions may include one or more extreme pressure or anti-wear additives. Nonlimiting examples of suitable extreme pressure/antiwear additives include sulfur- and phosphorous-containing types such as phosphoric acid esters, acidic phosphoric acid esters, branched alkyl amine phosphates containing 5 to 20 carbon atoms, thiophosphoric acid esters, acidic phosphoric acid ester amine salts, and chlorinated phosphoric acid esters and phosphorous acid esters that are esters of phosphoric acid or phosphorous acid with alkanols or polyether alcohols. Specific, nonlimiting examples of phosphoric acid esters include tributyl phosphate, tripropyl phosphate, trihexyl phosphate, triheptyl phosphate, trioctyl phosphate, trinonyl phosphate, tridecyl phosphate, triundecyl phosphate, tridodecyl phosphate, tritridecyl phosphate, tritetradecyl phosphate, tripentadecyl phosphate, trihexadecyl phosphate, triheptadecyl phosphate, trioctadecyl phosphate, trioleyl phosphate, triphenyl phosphate, tricresyl phosphate, trixylenyl phosphate, cresyldiphenyl phosphate, and xylenyldiphenyl phosphate. Specific, nonlimiting examples of acidic phosphoric acid esters there may be mentioned monobutyl acid phosphate, monopentyl acid phosphate, monohexyl acid phosphate, monoheptyl acid phosphate, mono-octyl acid phosphate, monononyl acid phosphate, monodecyl acid phosphate, monoundecyl acid phosphate, monododecyl acid phosphate, monotridecyl acid phosphate, monotetradecyl acid phosphate, monopentadecyl acid phosphate, monohexadecyl acid phosphate, monoheptadecyl acid phosphate, mono-octadecyl acid phosphate, monooleyl acid phosphate, dibutyl acid phosphate, dipentyl acid phosphate, dihexyl acid phosphate, diheptyl acid phosphate, dioctyl acid phosphate, dinonyl acid phosphate, didecyl acid phosphate, diundecyl acid phosphate, didodecyl acid phosphate, ditridecyl acid phosphate, ditetradecyl acid phosphate, dipentadecyl acid phosphate, dihexadecyl acid phosphate, diheptadecyl acid phosphate, dioctadecyl acid phosphate,

and dioleil acid phosphate. Specific, nonlimiting examples of thiophosphoric acid esters include tributyl phosphorothionate, triphenyl phosphorothionate, trihexyl phosphorothionate, triheptyl phosphorothionate, trioctyl phosphorothionate, trinonyl phosphorothionate, tridecyl phosphorothionate, triundecyl phosphorothionate, tridodecyl phosphorothionate, tritridecyl phosphorothionate, tritetradecyl phosphorothionate, tripentadecyl phosphorothionate, trihexadecyl phosphorothionate, triheptadecyl phosphorothionate, trioctadecyl phosphorothionate, trioleil phosphorothionate, triphenyl phosphorothionate, tricresyl phosphorothionate, trixylenyl phosphorothionate, cresyldiphenyl phosphorothionate, and xylene-diphenyl phosphorothionate. Specific, nonlimiting examples of amine salts of acidic phosphoric acid esters include salts of acidic phosphoric acid esters with amines such as methylamine, ethylamine, propylamine, butylamine, pentylamine, hexylamine, heptylamine, octylamine, dimethylamine, diethylamine, dipropylamine, dibutylamine, dipentylamine, dihexylamine, diheptylamine, dioctylamine, trimethylamine, triethylamine, tripropylamine, tributylamine, tripentylamine, trihexylamine, triheptylamine, and trioctylamine. Specific, nonlimiting examples of chlorinated phosphoric acid esters include tris(dichloropropyl) phosphate, tris(chloroethyl) phosphate, tris(chlorophenyl) phosphate, and polyoxyalkylene bis[di(chloroalkyl)]phosphate. As phosphorous acid esters there may be mentioned dibutyl phosphite, dipentyl phosphite, dihexyl phosphite, diheptyl phosphite, dioctyl phosphite, dinonyl phosphite, didecyl phosphite, diundecyl phosphite, didodecyl phosphite, dioleil phosphite, diphenyl phosphite, dicresyl phosphite, tributyl phosphite, triphenyl phosphite, trihexyl phosphite, triheptyl phosphite, trioctyl phosphite, trinonyl phosphite, tridecyl phosphite, triundecyl phosphite, tridodecyl phosphite, trioleil phosphite, triphenyl phosphite, and tricresyl phosphite. The extreme pressure/antiwear additives may be used individually or in any combination, in any desired amount. In various embodiments, the lubricant or oil composition may include about 0.01 weight % to about 5.0 weight %, about 0.01 weight % to about 4.0 weight %, about 0.02 weight % to about 3.0 weight %, or 0.1 weight % to about 5.0 weight % each of extreme pressure additives and antiwear additives. These additives may be used alone or in any combination.

[0026] In various embodiments, the hydrocarbon lubricant or hydrocarbon oil may include one or more corrosion inhibitors, such as those selected from isomeric mixtures of N,N-bis(2-ethylhexyl)-4-methyl-1H-benzotriazole-1-methylamine and N,N-bis(2-ethylhexyl)-5-methyl-1H-benzotriazole-1-methylamine. The hydrocarbon lubricant or hydrocarbon oil may include about 0.01 to about 1.0 weight % of one or more corrosion inhibitors, about 0.01 to about 0.5 weight % of one or more corrosion inhibitors, or about 0.05 to about 0.15 weight % of one or more corrosion inhibitors.

[0027] Viscosity modifiers (or viscosity index improvers) are polymeric materials, typical examples of these being polyolefins, such as ethylene-propylene copolymers, hydrogenated styrene-isoprene block copolymers, hydrogenated copolymers of styrenebutadiene, copolymers of ethylene and propylene, acrylic polymers produced by polymerization of acrylate and methacrylate esters, hydrogenated isoprene polymers, polyalkyl styrenes, hydrogenated alkenyl arene conjugated diene copolymers, polyolefins, esters of maleic anhydride-styrene copolymers, and polyisobutylene.

[0028] Nonlimiting examples of pour point depressants include polyalkyl methacrylates, polyalkyl acrylates, polyvinyl acetate, polyalkylstyrenes, polybutene, condensates of chlorinated paraffin and naphthalene, and condensates of chlorinated paraffin and phenol

[0029] Nonlimiting examples of flammability suppressants include trifluorochloromethane, trifluoroiodomethane, phosphate esters and other phosphorous compounds, and iodine- or bromine-containing hydrocarbons, hydrofluorocarbons, or fluorocarbons.

[0030] A hydrocarbon lubricant or hydrocarbon oil may be treated by adding to the lubricant or oil a polyether selected from polyalkylene oxide homopolymers as described. The hydrocarbon lubricant or hydrocarbon oil that is treated contains an oxidation product, e.g. varnish or pre-varnish oxidation products, and the polyether is added in an amount sufficient to cause the oxidation products to dissolve in the lubricant. In various embodiments, the polyether is added in an amount such that the lubricant or oil comprises from 2 wt% to 20 wt% or from 5 wt% to 20 wt% of the polyether. In various embodiments the viscosity of a hydrocarbon oil or other lubricant containing varnish, pre-varnish, or other oxidation products is reduced by the addition of the polyether to a greater degree that would be expected based on a weighted average of the viscosity of the hydrocarbon oil or lubricant and the viscosity of the polyether.

[0031] A hydrocarbon lubricant or hydrocarbon oil treatment composition for treating hydrocarbon lubricant or hydrocarbon oil containing varnish or other oxidation products includes the polyether as described and at least one additive other than detergents, surfactants, and dispersants. In various embodiments, the additive is selected from antioxidants, anti-wear agents, extreme-pressure agents, friction-reducing agents, metal inactivating agents such as benzotriazoles, viscosity modifiers, pour point depressants, stabilizers, corrosion inhibitors, flammability suppressants, and combinations of these. In particular embodiments, the lubricant or oil treatment composition comprises the polyether and an antioxidant. The lubricant or oil treatment composition reduces the viscosity of a hydrocarbon lubricant or hydrocarbon oil containing varnish, pre-varnish, or other oxidation products to a greater degree that would be expected based on a weighted average of the viscosity of the hydrocarbon lubricant or hydrocarbon oil and the viscosity of the polyether treatment composition.

[0032] The oxidation products dissolve and do not agglomerate in the hydrocarbon lubricant or hydrocarbon oil containing the polyether. This is demonstrated in the following examples in which testing for Varnish Potential shows condemned 'used' oil returning to good working condition. Viscosity of used hydrocarbon oil decreases, ISO cleanliness codes decrease, pentane insolubles decrease, lubrication properties increase, and VPR (varnish potential rating) is

reduced to 'as new fluid' acceptable for use.

Examples

Example 1. Remediation of Used Turbine Oil

[0033] A sample of used Chevron GST-32 turbine oil was removed from a system that had been experiencing system trips and varnish problems. The parameters of the used oil were measured according to the following published test methods.

VP Pentane Insolubles -ASTM D 893

Ultra-Centrifuge Sediment Rating -Mobil Method 1169

Filter Patch Colorimetry - ASTM W K 27308

Ruler %- ASTM D 6971

Varnish Potential Rating- ASTM D 4378

Viscosity (SUS)- ASTM D 445

Total Acid Number- ASTM D 664

Water Content- ASTM E 203

Particle Count-ISO 4406.

[0034] The measured values of the used Chevron GST-32 turbine oil as removed from the system are shown in Table 1. The parameters of a new, unused sample of Chevron GST-32 turbine oil were also measured and are shown in Table 1.

[0035] A portion of 90 parts by weight of the used Chevron GST-32 turbine oil was combined with 10 parts by weight of polypropylene oxide, terminated with one butylether group and one hydroxyl group, having a number average molecular weight of 1000, and containing 0.6 wt% of the butylated reaction product of p-cresol and dicyclopentadiene (CAS # 68610-51-5) and 0.01 wt% Cobrateg 122 (available from PMC Specialties Group Inc., Cincinnati, OH) to make a remediated turbine oil. The parameters of this remediated Chevron GST-32 turbine oil were measured and are shown in Table 1.

[0036] Theoretical values of the parameters were determined for a combination of 90 parts by weight of the used Chevron GST-32 turbine oil combined with 10 parts by weight of the polypropylene oxide by taking a weighted average of the values of the individual fluids. The theoretical values represent oil property values that would be expected if the polyether had no effect on the varnish particles contained in the used Chevron GST-32 turbine oil. These values are also shown in Table 1. The difference between the theoretical parameter values and the values actually obtained by combining the used turbine oil with the polypropylene oxide demonstrate that the added polypropylene oxide eliminated the soft varnish particles from the used turbine oil. The used Chevron GST-32 turbine oil remediated with 10 wt% polypropylene oxide had a 75% elimination of pentane insolubles, an ultra-centrifuge sediment rating equivalent to the new oil, and a reduction in measured color bodies. Results of the Ruler test show a 10% boost over the expected value in the antioxidant content of the original Chevron GST-32 antioxidant, which differs from the antioxidant that was combined with the polypropylene added to remediate the used oil. A 10-unit SUS drop in viscosity for the remediated oil is also evidence that the soft varnish particles have been dissolved into the oil. The polypropylene oxide also releases other polar molecules, such as water, as the varnish breaks up.

	New Chevron GST-32 turbine oil	Used Chevron GST-32 turbine oil	Actual 90 wt% Chevron GST-32 turbine oil to 10 wt% Polypropylene oxide	Theoretical 90 wt% used Chevron GST-32 turbine oil to 10 wt% Polypropylene oxide
VP Pentane Insolubles (mg/L)	74	92	21	83
Ultra-Centrifuge Sediment Rating	1	3	1	2.7
Filter Patch Colorimetry	1	32	12	28
Ruler %	100	74	72	67
Varnish Potential Rating	Low	Elevated	Low	Elevated

EP 2 831 210 B1

(continued)

	New Chevron GST-32 turbine oil	Used Chevron GST-32 turbine oil	Actual 90 wt% Chevron GST-32 turbine oil to 10 wt% Polypropylene oxide	Theoretical 90 wt% used Chevron GST-32 turbine oil to 10 wt% Polypropylene oxide
Viscosity (SUS), cSt	161	176	163	172
Total Acid Number (mg KOH/g)	0.07	0.44	0.10	0.42
Water (ppm)	137	137	384	183.4
Particle Count	17/14/11	20/16/12	19/17/13	20/16/12

Example 2. Remediation of Used Turbine Oil

[0037] A sample of used Mobil SHC-824 turbine oil was removed from a system that had excessive varnish. The parameters of the used oil were measured and are given in Table 2. A portion of 90 parts by weight of the used Mobil SHC-824 turbine oil was combined with 10 parts by weight of polypropylene oxide, terminated with one butyl ether group and one hydroxyl group, having a number average molecular weight of 1000, and containing 0.6 wt% of the butylated reaction product of p-cresol and dicyclopentadiene (CAS # 68610-51-5) and 0.01 wt% Cobrattec 122 (available from PMC Specialties Group Inc., Cincinnati, OH) to make a remediated turbine oil. The parameters of this remediated Mobil SHC-824 turbine oil were measured and are shown in Table 2. Finally, theoretical values of replenishing the lubrication system with new Mobil SHC-824 turbine oil are shown in Table 2.


	Used Mobil SHC-824 turbine oil	Actual 90 wt% Mobil SHC-824 turbine oil to 10 wt% Polypropylene oxide	Replenishing with new Mobil SHC-824 turbine oil
Viscosity (SUS), cSt	161	148	158
Total Acid Number (mg KOH/g)	0.98	0.29	0.91
Water (ppm)	81	211	133
Particle Count	24/21/21	23/18/18	24/21/21

[0038] The addition of the polypropylene oxide reduced the viscosity of the turbine oil by 3 cSt (10 SUS) below a theoretical value. This demonstrates that the addition of the polypropylene oxide significantly reduced the effective molecular weight of the lubricant by reducing the agglomeration of polar bodies that had formed soft varnish particles in the used oil. A reduction in total acid number demonstrates a re-established balance between aminic and phenolic antioxidants active in the used turbine fluid. The reduction in particle count for the remediated used oil shows that the added polypropylene oxide removed varnish particles from the used turbine oil by dissolving them.

[0039] The foregoing description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention.

Claims

1. Use of an aliphatic polyether selected from polyalkylene oxide homopolymers having a formula



wherein R and R² are independently selected from hydrocarbyl groups having one to four carbon atoms and hydrogen, with the caveat that at least one of R and R² is a hydrocarbyl group, R¹ is an aliphatic hydrocarbylene group having from 3 to 6 carbon atoms, and n is an integer from 4 to 50, wherein the polyether has a number average molecular weight of from 300 to 3000,

for dissolving oxidation products or varnish in a hydrocarbon lubricant containing oxidation products or varnish, particularly a hydrocarbon oil, by increasing the polarity of the hydrocarbon lubricant to allow the hydrocarbon lubricant to dissolve the oxidation products or varnish particles,


wherein the polyether is added in an amount such that the lubricant comprises from 2 wt% to 20 wt% of the polyether.

2. The use according to claim 1, wherein the polyalkylene oxide homopolymer comprises a butoxide-terminated polypropylene oxide.

3. The use according to claim 1 or 2, wherein the polyether is added in an amount such the lubricant comprises from 5 wt% to 20 wt% of the polyether.

Patentansprüche

1. Verwendung eines aliphatischen Polyethers, ausgewählt aus Polyalkylenoxidhomopolymeren mit einer Formel



worin R und R² unabhängig voneinander ausgewählt sind aus Kohlenwasserstoffgruppen mit einem bis vier Kohlenstoffatomen und Wasserstoff, mit der Maßgabe, dass mindestens eines von R und R² eine Kohlenwasserstoffgruppe ist, R¹ eine aliphatische Hydrocarbylengruppe mit 3 bis 6 Kohlenstoffatomen ist und n eine ganze Zahl von 4 bis 50 ist, wobei der Polyether ein zahlenmittleres Molekulargewicht von 300 bis 3000 aufweist, zum Lösen von Oxidationsprodukten oder Lack in einem Kohlenwasserstoffschmiermittel, enthaltend Oxidationsprodukte oder Lack, insbesondere einem Kohlenwasserstofföl, durch Steigern der Polarität des Kohlenwasserstoffschmiermittels, um zuzulassen, dass das Kohlenwasserstoffschmiermittel die Oxidationsprodukte oder Lackteilchen löst,


wobei der Polyether in einer Menge derart zugegeben wird, dass das Schmiermittel von 2 Gew.-% bis 20 Gew.-% des Polyethers umfaßt.

2. Verwendung gemäß Anspruch 1, wobei das Polyalkylenoxidhomopolymer ein Butoxid-terminiertes Polypropylenoxid umfaßt.

3. Verwendung gemäß Anspruch 1 oder 2, wobei der Polyether in einer Menge derart zugegeben wird, dass das Schmiermittel von 5 Gew.-% bis 20 Gew.-% des Polyethers umfaßt.

Revendications

1. Utilisation d'un polyéther aliphatique sélectionné parmi des homopolymères d'oxyde de polyalkylène ayant une formule

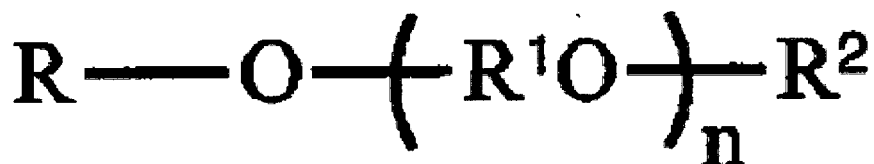

dans laquelle R et R² sont indépendamment sélectionnés parmi des groupes hydrocarbyle ayant un à quatre atomes de carbone et hydrogène, avec la mise en garde qu'au moins un de R et R² est un groupe hydrocarbyle, R¹ est un groupe hydrocarbylène aliphatique ayant 3 à 6 atomes de carbone et n est un entier de 4 à 50, dans

laquelle le polyéther a un poids moléculaire moyen en nombre de 300 à 3000,
pour dissoudre des produits d'oxydation ou du vernis dans un lubrifiant d'hydrocarbure contenant des produits
d'oxydation ou du vernis, notamment un hydrocarbure liquide, en augmentant la polarité du lubrifiant d'hydro-
carbure pour permettre au lubrifiant d'hydrocarbure de dissoudre les produits d'oxydation ou particules de vernis,
dans laquelle le polyéther est ajouté en une quantité telle que le lubrifiant comprend de 2 % en poids à 20 %
en poids du polyéther.

2. Utilisation selon la revendication 1, dans laquelle l'homopolymère d'oxyde de polyalkylène comprend un oxyde de
polypropylène à terminaison butoxyde.

3. Utilisation selon la revendication 1 ou 2, dans laquelle le polyéther est ajouté en une quantité telle que le lubrifiant
comprend de 5 % en poids à 20 % en poids du polyéther.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **MARTIN GREAVES et al.** oil-soluble PAG base oils.
Lubrication Science, 2012, vol. 24, 251-262 [0004]