



(51) International Patent Classification:
H01Q 13/00 (2006.01)

(21) International Application Number:

PCT/US2011/041817

(22) International Filing Date:

24 June 2011 (24.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/358,750	25 June 2010 (25.06.2010)	US
61/358,756	25 June 2010 (25.06.2010)	US

(71) Applicant (for all designated States except US): **DREXEL UNIVERSITY** [US/US]; 3141 Chestnut Street, Philadelphia, PA 19104 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOOKIAH, Prathaban** [LK/US]; 4224 Osage Avenue, #302, Philadelphia, PA 19104 (US). **DANDEKAR, Kapil** [US/US]; 1912 Pemberton Street, Philadelphia, PA 19146 (US).

(74) Agents: **CALDWELL, John, W.** et al.; Woodcock Washburn LLP, Cira Centre, 12th Floor, 2929 Arch Street, Philadelphia, PA 19104 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BI-DIRECTIONAL MAGNETIC PERMEABILITY ENHANCED METAMATERIAL (MPER) SUBSTRATE FOR ANTENNA MINIATURIZATION

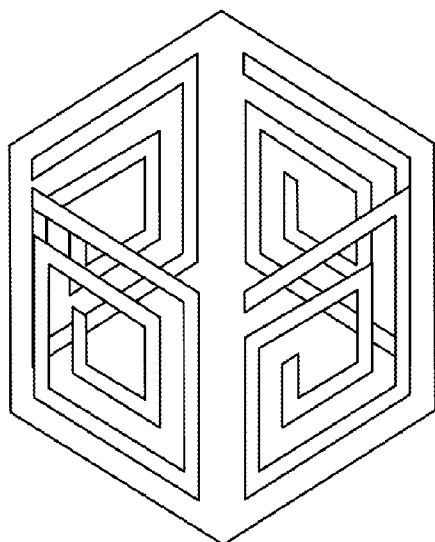


FIG. 2

(57) Abstract: A bi-directional antenna includes a plurality of unit cells stacked in two perpendicular planes (Y-X and Z-X planes) to form cube shaped unit cells whereby inductive loops are placed on four faces corresponding to the Y-X and Z-X planes. Each unit cell includes a magnetic permeability enhanced metamaterial. The resulting antenna has the ability to couple magnetic fields oriented in both the X and Y directions with increased permeabilities and can be used to realize a variety of different antenna architectures that do not have their magnetic field confined in a single direction.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

BI-DIRECTIONAL MAGNETIC PERMEABILITY ENHANCED METAMATERIAL (MPEM) SUBSTRATE FOR ANTENNA MINIATURIZATION

RELATED APPLICATIONS

[0001] The present application claims the benefit of United States Provisional Patent Application Nos. 61/358,750, filed June 25, 2010, and 61/358,756, filed June 25, 2010. The entireties of these disclosures are incorporated herein by reference for any and all purposes. The present application is also related by subject matter to the invention described in PCT/US2009/066280 by the same inventors and assignee.

STATEMENT OF FEDERALLY SPONSORED RESEARCH

[0002] Portions of the disclosure herein may have been supported in part by grants from the National Science Foundation, Grant Nos. CNS-0322795 and ECS-0524200. The United States Government may have certain rights in the invention.

TECHNICAL FIELD

[0003] The present invention relates generally to the field of MIMO antenna systems. Specifically, the present invention relates to MIMO antenna arrays built on metamaterial substrates and to related antenna designs for wireless equipment and microwave devices.

BACKGROUND

[0004] Wireless communication systems have become pervasive and ubiquitous to the point where data rate and quality of service requirements have become comparable to

those of wired communication systems. Next generation wireless systems incorporate multiple-input multiple-output (MIMO) techniques to achieve their performance goals. MIMO systems promise higher channel capacities compared to single antenna systems by exploiting the spatial characteristics of the multipath wireless propagation channel. The theoretical performance gain achievable by MIMO systems is limited due to a number of practical design factors, including the design of the antenna array and the amount of inter-array element mutual coupling. While mutual coupling can be alleviated by increasing the spacing between array elements, accommodating multiple antennas with large spacing in modern consumer devices may be impossible due to stringent space constraints. In order to meet such demanding, and often contradictory, design criteria, antenna designers have been constantly driven to seek better materials on which to build antenna systems.

[0005] As disclosed in US Patent 6,933,812, metamaterials are a broad class of synthetic materials that could be engineered to wield permittivity and permeability characteristics to system requirements. It has been theorized that by embedding specific structures (usually periodic structures) in some host media (usually a dielectric substrate), the resulting material can be tailored to exhibit desirable characteristics. These materials have drawn a lot of interest recently due to their promise to miniaturize antennas by a significant factor while operating at acceptable efficiencies.

[0006] Metamaterials having permeabilities and permittivities greater than that of a host dielectric have been used to design miniaturized patch antennas. For example, Buell, Mosallaei, and Sarabandi disclose such patch antennas in an article entitled "A Substrate for Small Patch Antennas Providing Tunable Miniaturization Factors," IEEE Transactions on Microwave Theory and Techniques, Vol. 54, No. 1, January 2006. Buell et al. describe a metamaterial spiral loop unit cell that achieves permeability enhancement by aligning the magnetic field along the axis perpendicular to the spiral loop unit cell. Buell et al. further teach that a two-dimensional array of resonant spirals may be formed and the resulting substrate layers stacked to form a three-dimensional effective medium that approximates an infinite magnetic medium. Permittivity enhancement only occurs for electric fields directed in the two-dimensional plane of the spiral loop unit cell. Thus, the patch antenna described by Buell exhibits orientation-dependent permeability and permittivity at orientations that may support the modes of a microstrip patch antenna.

[0007] Though such magnetic permeability enhanced metamaterial (MPeM) substrates used for antenna miniaturization do reduce the size of the antenna, they are mostly considered unsuitable for many devices due to the accompanying increase in the substrate

thickness. Also, magnetic permeability enhancement in known implementations of magnetic permeability enhanced metamaterial (MPEM) substrates are uni-directional. This is due to the uni-directional alignment of the unit cells. Only magnetic fields that are oriented in a direction perpendicular to the plane of the unit cells couple energy to them. This imposes the limitation that only antenna designs that generate uni-directional magnetic fields can fully utilize the permeability enhancement provided by the substrate, thus seriously limiting the utility of the substrate.

[0008] A multi-directional substrate is desirable that provides multi-directional permeability enhancement at a given frequency in the substrate without being restricted to a unique solution. In particular, a substrate that allows the substrate designer to pick dimensions that are more suitable for the target platform is desired.

SUMMARY

[0009] By leveraging current micro-fabrication technologies, techniques are provided that can yield a thin MPEM substrate suitable for use in many space constrained devices. The homogeneity of the MPEM substrate of the invention is a function of the number of unit cells in the substrate. The size of the unit cell also imposes a limit on the number of unit cells that can be included in the resulting MPEM substrates. This affects the homogeneity of the material in terms of permittivity and permeability, which results in non-linear field effects within the substrate that may result in poor bandwidth properties. The MPEM substrate in accordance with the invention allows the designer to pick unit cell dimensions that allow for an inclusion of a larger number of unit cells within a given material volume thus achieving greater homogeneity. The resulting substrate will give the antenna array designer a higher degree of analytical fidelity. The substrate of the invention further allows antenna designers to use methods developed for conventional substrates to predict and design antennas instead of relying on time consuming and computationally expensive simulations. The same dimension selection technique can be applied to pick the unit cell configuration that has the ability to reduce the amount of metal in the unit cells that can lead to lower ohmic losses, which results in a more efficient substrate.

[0010] In an exemplary embodiment of the invention, the unit cells are stacked in two perpendicular planes (Y-X and Z-X planes) to form a bi-directional MPEM substrate that achieves bi-directional permeability enhancement. Unlike the planar unit cell layout employed in existing MPEM substrates, the bi-directional MPEM substrate of the invention uses cube shaped unit cells where the inductive loops are placed on four faces corresponding

to the Y-X and Z-X planes. This structure provides the ability to couple magnetic fields oriented in both the X and Y directions. The resulting material can be used to realize a variety of different antenna architectures that do not have their magnetic field confined in a single direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Figure 1 shows one embodiment of a unit cell structure for an antenna designed in accordance with the invention.

[0012] Figure 2 shows an embodiment of a cube shaped unit cell structure in accordance with the invention.

[0013] Figure 3 shows an embodiment of a three-dimensional MPEM substrate in accordance with the invention formed from a plurality of the cube shaped unit cell structures of Figure 2.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0014] A detailed description of illustrative embodiments of the present invention will now be described with reference to Figures 1-3. Although this description provides a detailed example of possible implementations of the present invention, it should be noted that these details are intended to be exemplary and in no way delimit the scope of the invention.

[0015] Magnetic permeability enhanced metamaterials are constructed by stacking up unit cells that can store magnetic energy by virtue of their structure. A unit cell for the material used in embodiments of the invention contains an inductive spiral loop embedded in a host dielectric material. Magnetic energy storage is created in the unit cell when a magnetic field passes normal to the plane of the spiral, inducing a current in the loop. This phenomenon effectively creates an inductance within the host substrate material. The material is formed by arranging these unit cells in three dimensions as will be described in more detail below. A resonance behavior is generated at frequencies dictated by the inductance of the loop and capacitances that exist between adjacent arms in the loop. Thus, at resonance, a significant net magnetic energy storage is induced within the 3D structure and the magnetic permeability of the otherwise non-magnetic substrate material is enhanced. In order to realize a miniaturized antenna, it is therefore necessary to match the resonance frequency of the material and the antenna. The resonance frequency of this structure can be controlled by tuning the spiral and substrate dimensions.

[0016] A unit cell structure designed to resonate in the 2.48 GHz band is

shown in Figure 1 along with its dimensions. FR4 ($\epsilon_r = 4.4$, $\mu_r = 1$, loss tangent $\tan \delta = 0.02$) is used as the host material for the metamaterial substrate in an exemplary embodiment. The effective μ_r was found to be approximately 4.2 in the direction perpendicular to the plane of the unit cell. This substrate also experiences an enhancement in permittivity due to its geometry. The extracted effective ϵ_r was 9.7 and the resulting electric and magnetic $\tan \delta$ are 0.2 and 0.05. These values imply a lossy substrate leading to poor antenna efficiencies.

[0017] The antenna geometry embodying exemplary embodiments of the invention is a rectangular patch antenna with a recessed microstrip feed line, backed by a ground plane and operating in the TM_{010} mode built on the magnetic permeability enhanced metamaterial substrate. TM refers to the transverse mode of the electromagnetic radiation. FR4 was chosen as the host material in the magnetic permeability enhanced substrate as well as the conventional substrate used for comparison.

[0018] Current is induced in the spiral loop only by magnetic fields oriented in a direction perpendicular to the plane of the spiral. Hence, magnetic permeability enhancement is unidirectional in the substrate. Since the magnetic field in the near field of a rectangular patch antenna would be in a direction perpendicular to its radiating edge, this antenna design can fully utilize the permeability available in this direction. The substrate and the antenna were designed to resonate at 2.48GHz. The effective μ_r derived theoretically for this structure is approximately 3.7 in the direction perpendicular to the plane of the unit cell.

[0019] The MPEM substrate of Figure 1, for example, is designed using low loss commercially available host materials for a wide range of frequencies. The designed MPEM substrate designs can be made using micro-fabrication facilities and can be bonded together to form sturdy 3D structures. These MPEM substrates can then be evaluated through a wide range of antenna designs for its miniaturization capabilities, bandwidth enhancement and efficiency. Such an MPEM substrate allows the antennas to be significantly thinner, making them a candidate for inclusion in more space constrained devices such as mobile phones. The material will be more homogeneous in terms of electromagnetic properties than existing designs that allows for improved device properties in terms of bandwidth and matching. The homogeneous property of the MPEM substrate also will allow a design engineer to analytically design and predict the performance of antennas and other devices without having to resort to more time consuming simulation methods. Moreover, it will be appreciated by

those skilled in the art that the antennas and other devices formed from such unit cells will be more efficient due to the lower amount of metal in the unit cells.

[0020] Table 1 shows different unit cell dimensions and realized permeability at 2.48 GHz for unit configurations that yield a substrate thickness less than or equal to 1.5mm.

X (mm)	Y (mm)	Z (mm)	Cell Volume (mm ³)	μ_r
11.4	1.5	0.6	10.3	14.0
10.8	1.5	0.9	14.6	7.3
11.4	1.5	0.9	15.4	1.0
10.8	3.0	0.9	29.2	11.2
10.8	1.5	1.2	19.4	10.4
11.4	1.5	1.2	20.5	3.3
12.0	1.5	1.2	21.6	3.3
10.8	3.0	1.2	38.9	2.6
10.8	4.5	1.2	58.3	2.6
10.8	6.0	1.2	77.8	14.2
10.8	1.5	1.5	24.3	8.2
11.4	1.5	1.5	25.7	7.0
12.0	1.5	1.5	27.0	6.4
10.2	3.0	1.5	45.9	6.2
10.8	3.0	1.5	48.6	1.0

Table 1: Different Unit Cell Dimensions and Realized Permeability at 2.48 GHz for Unit Configurations that Yield a Substrate Thickness less than or equal to 1.5mm

[0021] The aforementioned PCT/US2009/066280 describes a rectangular patch antenna array including such unit cells mounted on a substrate such that the rectangular inductive spiral loops are embedded uniformly and uni-directionally within a host dielectric substrate to form a magnetic permeability enhanced metamaterial. The unit cells are uniformly stacked on each other to form a three-dimensional resonance structure that is oriented orthogonally to a magnetic field of the antennas. Dimensions of the rectangular inductive spiral loops are selected whereby the metamaterial has a resonance frequency that matches a resonance frequency of the antennas. The dimensions of the rectangular inductive spiral loops of the unit cells may be tuned whereby the resonance frequency of the

metamaterial matches the resonance frequency of the antenna. Each unit cell is spaced from each other unit cell by a spacing of $\lambda/2$ or $\lambda/20$ in an azimuthal plane of the substrate, where $\lambda=c/f$, where c is the speed of light and f is the resonance frequency of the substrate. The rectangular inductive spiral loops of each unit cell have the same dimensions and same resonance frequency. However, as noted above, with such an arrangement, only magnetic fields that are oriented in a direction perpendicular to the plane of the unit cells couple energy to them. This imposes the limitation that only antenna designs that generate uni-directional magnetic fields can fully utilize the permeability enhancement provided by the substrate, seriously limiting the utility of the substrate.

[0022] Unlike such a substrate formed by stacking the unit cells of Figure 1 uniformly on each other to form a three-dimensional resonance structure that is oriented orthogonally to a magnetic field of the antennas, the unit cell structure of the invention includes a plurality of unit cells that are stacked in two perpendicular planes (Y-X and Z-X planes) to form cube shaped unit cells where the inductive loops are placed on four faces corresponding to the Y-X and Z-X planes. Figure 2 shows an embodiment of such a three-dimensional unit cell structure in accordance with the invention, while Figure 3 shows an embodiment of a three-dimensional MPEM substrate in accordance with the invention formed from a plurality of the cube shaped unit cells of Figure 2. A desired antenna design may be formed by configuring a plurality of such cube shaped unit cells in a desired configuration and bonding the cube shaped unit cell structures together to form sturdy 3D structures having the desired transmission characteristics. The resulting antenna has the ability to couple magnetic fields oriented in both the X and Y directions with increased permeabilities. It will be appreciated by those skilled in the art that the resulting material can be used to realize a variety of different antenna architectures that do not have their magnetic field confined in a single direction.

[0023] In one embodiment of the invention, the MPEM substrate of Figure 3 couples magnetic fields oriented in both X and Y directions which results in magnetic permeability enhancement in two directions compared to existing designs that yield only uni-directional enhancement. The design gives antenna engineers greater flexibility in applying the MPEM substrates for designing different antenna architectures where the fields are not confined to a single plane. Preferably, the bi-directional MPEM substrate of Figure 3 can be designed using low loss commercially available host materials for a wide range of frequencies. The resulting MPEM substrate may be tried in different configurations of antenna designs for its miniaturization capabilities.

[0024] Those skilled in the art also will readily appreciate that many additional modifications are possible in the exemplary embodiment without materially departing from the novel teachings and advantages of the invention. For example, while the inductive loops of the exemplary unit cells include rectangular inductive spiral loops embedded uniformly and uni-directionally within a host dielectric substrate to form magnetic permeability enhanced metamaterial, those skilled in the art will appreciate that other inductive loop designs may be used without departing from the teachings of the invention. For example, the inductive loops and unit cells need not be shaped as squares and the cube shaped unit cells need not be cubes having sides of equal dimensions. The unit square may comprise rectangular substrates with embedded rectangular inductive spiral loops and the cubes may have rectangular sides with different dimensions. Accordingly, any such modifications are intended to be included within the scope of this invention as defined by the following exemplary claims.

What is Claimed:

1. A bi-directional antenna comprising a plurality of unit cells stacked in two perpendicular planes to form a cube shaped unit cell, each unit cell comprising a magnetic permeability enhanced metamaterial formed into an inductive loop in a substrate and each unit cell forming a face of the cube shaped unit cell whereby inductive loops of respective unit cells are situated on four perpendicular faces of said cube shaped unit cell formed by said two perpendicular planes.
2. A bi-directional antenna as in claim 1, wherein a thickness of the substrate in each unit cell is less than or equal to 1.5 mm.
3. A bi-directional antenna comprising a plurality of the cube shaped unit cells of claim 1 bonded together to form a three-dimensional antenna structure having desired transmission characteristics.
4. A bi-directional antenna as in claim 3, wherein said inductive loops comprise rectangular inductive spiral loops embedded uniformly and uni-directionally within a host dielectric substrate so as to form said magnetic permeability enhanced metamaterial.
5. A bi-directional antenna as in claim 4, wherein dimensions of said rectangular inductive spiral loops are selected whereby said metamaterial has a resonance frequency that matches a resonance frequency of said antennas.
6. A bi-directional antenna as in claim 4, wherein the rectangular inductive spiral loops of each unit cell have the same dimensions and same resonance frequency.

1/2

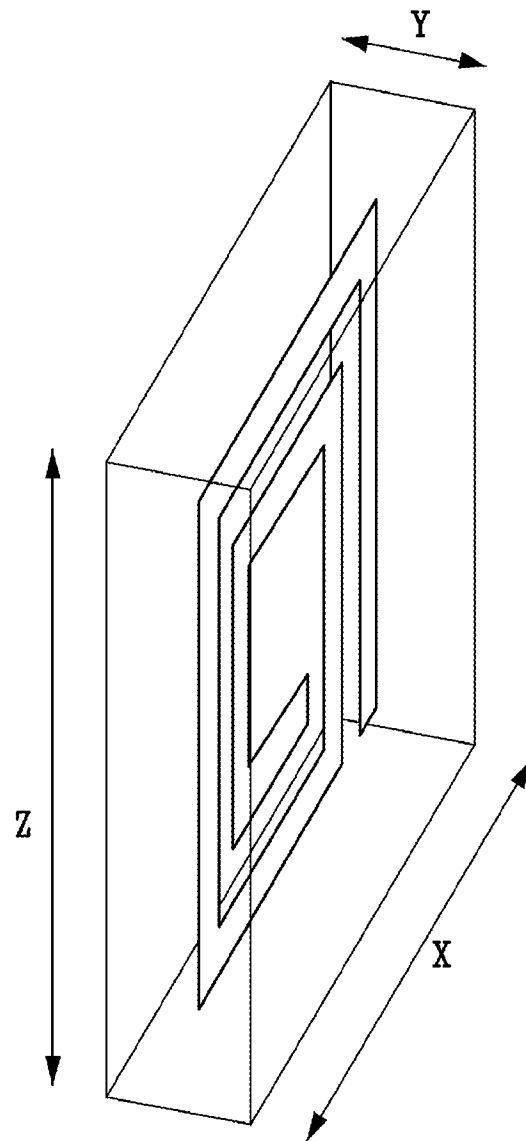


FIG. 1

2/2

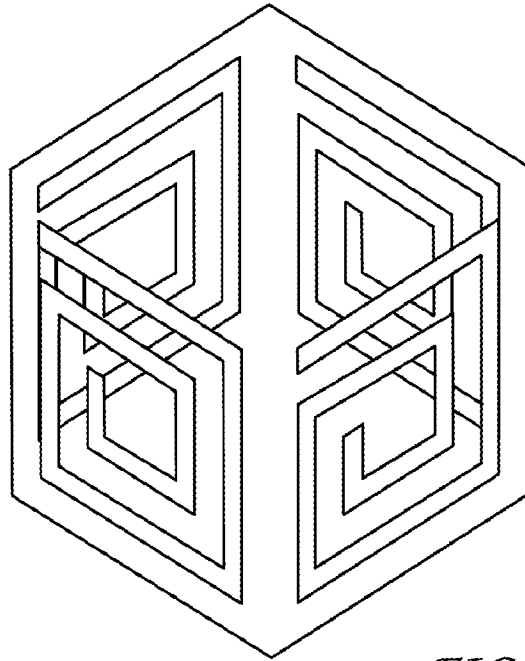


FIG. 2

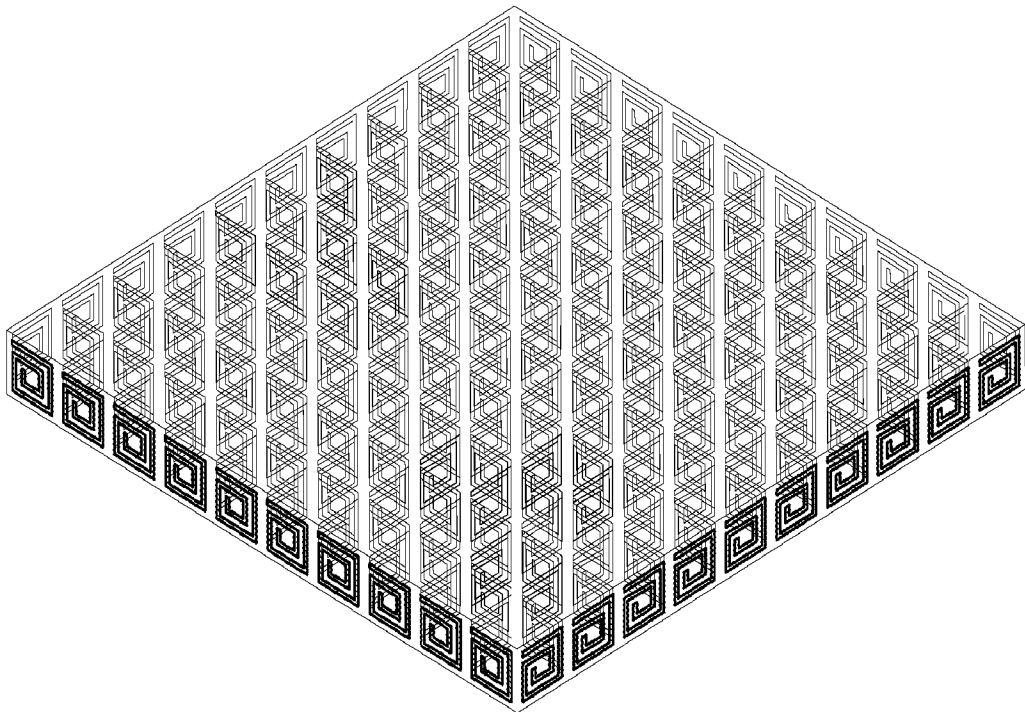


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2011/041817

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01Q 13/00 (2011.01)

USPC - 343/783

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - H01P 7/00, H01Q 1/00, and H01Q 13/00 (2011.01)

USPC - 333/219, 343/783, and 343/787

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent, Google Patents, and ACM

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2010/065555 A1 (DANDEKAR et al) 10 June 2010 (10.06.2010) entire document	1-6
Y	US 5,442,366 A (SANFORD) 15 August 1995 (15.08.1995) entire document	1-6
A	US 2007/0030207 A1 (IBI et al) 08 February 2007 (08.02.2007) entire document	1-6
A	US 6,933,812 B2 (SARABANDI et al) 23 August 2005 (23.08.2005) entire document	1-6

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 November 2011

Date of mailing of the international search report

29 NOV 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774