



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/11/05
(87) Date publication PCT/PCT Publication Date: 2020/05/14
(85) Entrée phase nationale/National Entry: 2021/05/05
(86) N° demande PCT/PCT Application No.: US 2019/059779
(87) N° publication PCT/PCT Publication No.: 2020/097018
(30) Priorité/Priority: 2018/11/06 (US62/756,555)

(51) Cl.Int./Int.Cl. *H01M 4/38* (2006.01),
H01M 10/056 (2010.01)
(71) Demandeur/Applicant:
QUANTUMSCAPE BATTERY, INC., US
(72) Inventeurs/Inventors:
ARNOLD, THOMAS, US;
BECK, LARRY, US;
HO, TIFFANY, US;
YANG, ARAM, US
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : CELLULES ELECTROCHIMIQUES COMPORTANT DES ADDITIFS DE CATHOLYTE ET DES
SEPARATEURS EN GRENAT REMPLIS DE LITHIUM
(54) Title: ELECTROCHEMICAL CELLS WITH CATHOLYTE ADDITIVES AND LITHIUM-STUFFED GARNET
SEPARATORS

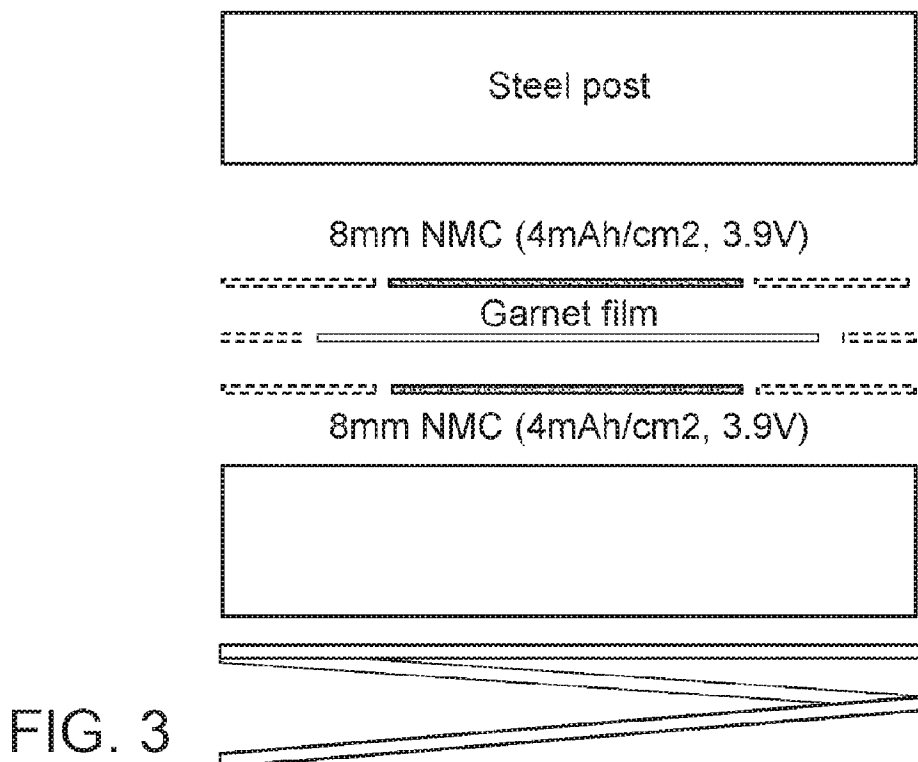


FIG. 3

(57) Abrégé/Abstract:

Set forth herein are processes for making and using electrolytes (also known as catholytes when the electrolytes are mixed with cathode active materials) for a positive electrode of an electrochemical cell. The catholytes include additives that prevent surface fluorination of lithium-stuffed garnet solid-state separators in contact with the positive electrode. Also set forth herein are electrochemical devices which include the catholytes in addition to a lithium-stuffed garnet solid-state electrolyte separator.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

14 May 2020 (14.05.2020)



(10) International Publication Number

WO 2020/097018 A1

(51) International Patent Classification:

H01M 4/38 (2006.01) *H01M 10/056* (2010.01)

(21) International Application Number:

PCT/US2019/059779

(22) International Filing Date:

05 November 2019 (05.11.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/756,555 06 November 2018 (06.11.2018) US

(71) Applicant: **QUANTUMSCAPE CORPORATION**

[US/US]; 1730 Technology Drive, San Jose, California 95110 (US).

(72) Inventors: **ARNOLD, Thomas**; c/o QuantumScape Corporation, 1730 Technology Drive, San Jose, California 95110 (US).**BECK, Larry**; c/o QuantumScape Corporation, 1730 Technology Drive, San Jose, California 95110 (US). **HO, Tiffany**; c/o QuantumScape Corporation, 1730 Technology Drive, San Jose, California 95110 (US). **YANG, Aram**; c/o QuantumScape Corporation, 1730 Technology Drive, San Jose, California 95110 (US).(74) Agent: **OSTOMEL, Todd et al.**; Squire Patton Boggs (US)

LLP, 275 Battery Street, Suite 2600, San Francisco, California 94111 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: ELECTROCHEMICAL CELLS WITH CATHOLYTE ADDITIVES AND LITHIUM-STUFFED GARNET SEPARATORS

FIG. 3

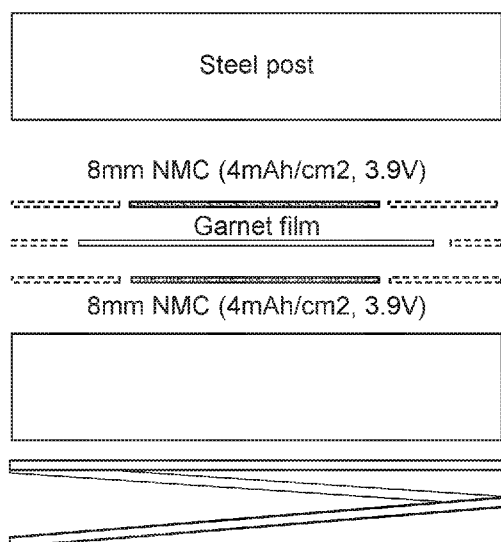

(57) Abstract: Set forth herein are processes for making and using electrolytes (also known as catholytes when the electrolytes are mixed with cathode active materials) for a positive electrode of an electrochemical cell. The catholytes include additives that prevent surface fluorination of lithium-stuffed garnet solid-state separators in contact with the positive electrode. Also set forth herein are electrochemical devices which include the catholytes in addition to a lithium-stuffed garnet solid-state electrolyte separator.

[Continued on next page]

WO 2020/097018 A1

WO 2020/097018 A1

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

ELECTROCHEMICAL CELLS WITH CATHOLYTE ADDITIVES AND LITHIUM-STUFFED GARNET SEPARATORS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to, and the benefit of, US Provisional Patent Application No. 62/756,555, which was filed November 6, 2018, the entire contents of which are herein incorporated by reference in its entirety for all purposes.

BACKGROUND

[0002] Conventional rechargeable batteries use liquid electrolytes to physically separate and thereby electrically insulate the positive and negative electrodes (*i.e.*, cathodes and anodes, respectively). However, liquid electrolytes suffer from several problems including flammability during thermal runaway, outgassing at high voltages, and chemical incompatibility with lithium metal negative electrodes. As an alternative, solid electrolytes have been proposed for next generation rechargeable batteries. For example, Li⁺ ion-conducting ceramic oxides, such as lithium-stuffed garnets (*e.g.*, Li₃La₇Zr₂O₁₂, *aka* LLZO), have been considered as electrolyte separators. *See*, for example, US Patent Application Publication No. 2015/0099190, published April 9, 2015, and filed October 7, 2014, titled GARNET MATERIALS FOR LI SECONDARY BATTERIES AND METHODS OF MAKING AND USING GARNET MATERIALS; US Patent Nos. 8,658,317; 8,092,941; and 7,901,658; also US Patent Application Publication Nos. 2013/0085055; 2011/0281175; 2014/0093785; and 2014/0170504; also Bonderer, *et al.* “Free-Standing Ultrathin Ceramic Foils,” *Journal of the American Ceramic Society*, 2010, 93(11):3624 – 3631; and Murugan, *et al.*, *Angew Chem. Int. Ed.* 2007, 46, 7778-7781).

[0003] When LLZO is exposed to certain cathode architectures which include a liquid electrolyte in the cathode, *i.e.*, a so-called catholyte, the interface of the cathode-LLZO may be contaminated with surface species which may negatively affect Li⁺ ion-conductivity. This surface contamination effect may be particularly problematic when the rechargeable battery is held at a high voltage for an extended period of time.

[0004] A commercial requirement for rechargeable batteries is that they maintain a high voltage and high state of charge without losing capacity or increasing resistance. To date, this is an unmet challenge in the field to which the instant invention pertains.

[0005] There is a need for cathode architectures and catholytes useful for decreasing the interfacial resistance of LLZO electrolytes. There is a need for cathode architectures and catholytes useful for passivating the LLZO surface, with respect to surface reactions that result in surface contaminants that negatively affect Li^+ ion conductivity and area-specific resistance. Set forth herein are solutions to these and other problems.

SUMMARY

[0006] In one embodiment, set forth herein is an electrochemical cell that includes a positive electrode, a negative electrode, and a solid-state electrolyte therebetween. The positive electrode includes a catholyte, which includes a lithium salt; a first solvent selected from sulfolane, 1,3-propane sultone, sulfolene, thiophene, or combinations thereof; a second solvent; and a strong Lewis acid additive. The solid-state electrolyte includes lithium-stuffed garnet; and the negative electrode includes lithium metal.

[0007] In a second embodiment, set forth herein is a process for making an electrochemical cell, including (a) providing a positive electrode infiltrated with a catholyte, the catholyte including (1) a lithium salt; (2) a first solvent selected from sulfolane, 1,3-propane sultone, sulfolene, thiophene, or combinations thereof; a second solvent; and a strong Lewis acid additive. The solid-state electrolyte comprises lithium-stuffed garnet. The process includes (b) providing a sintered lithium-stuffed garnet solid-state separator; and (c) contacting the sintered lithium-stuffed garnet solid-state separator to the positive electrode.

[0008] In a third embodiment, set forth herein is a method of using an electrochemical cell set forth herein, the method including holding the electrochemical cell at a voltage of 3.9 V (v. Li) or greater. In some examples, the interfacial ASR at the interface between the lithium-stuffed garnet and the positive electrode does not increase by more than 10 % over at least a day at room temperature.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[0009] **FIG. 1** shows a plot of viscosity (mPa-s) as a function of the volume ratio of ethylene carbonate:sulfolane (left side); and of sulfolane:ethyl methyl sulfone (right side).

[00010] **FIG. 2** shows a plot of normalized median charge area-specific resistance (ASR) as a function of cumulative hold time for a series of full electrochemical pouch cells

having lithium-stuffed garnet solid-state separators and three catholyte solutions, as described in Example 2.

[00011] **FIG. 3** shows a symmetric electrochemical cell tested in Example 2.

[00012] **FIG. 4** shows an Electrical Impedance Spectroscopy (EIS) plot, as described in Example 2, from a symmetric Swagelok cell.

[00013] **FIG. 5** shows the ASR resulting when lithium-stuffed garnet solid-state separators are exposed to catholytes having or not having additives that prevent and/or reduce fluoride concentrations and fluorination reactions.

[00014] **FIG. 6** shows scanning electron microscopy (SEM) images for a lithium-stuffed garnet solid-state separators exposed to catholytes having a high amount of HF, as described in Example 4.

[00015] **FIG. 7** shows a scanning electron microscopy (SEM) image with energy dispersive elemental analysis (EDS) elemental spatial mapping of a lithium-stuffed garnet solid-state separator, as described in Example 5.

[00016] **FIG. 8** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 7**.

[00017] **FIG. 9** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 7** but at a different location than that analyzed in **FIG. 8**.

[00018] **FIG. 10** shows a scanning electron microscopy (SEM) image of a lithium-stuffed garnet solid-state separator, as described in Example 5.

[00019] **FIG. 11** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 10**.

[00020] **FIG. 12** shows a scanning electron microscopy (SEM) image of a lithium-stuffed garnet solid-state separator, as described in Example 5.

[00021] **FIG. 13** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 12**.

[00022] **FIG. 14** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 12** but at a different location than that analyzed in **FIG. 13**.

[00023] **FIG. 15** shows a scanning electron microscopy (SEM) image of a lithium-stuffed garnet solid-state separator, as described in Example 5.

[00024] **FIG. 16** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 15**.

[00025] **FIG. 17** shows energy dispersive elemental analysis (EDS) of the sample observed in **FIG. 15** but at a different location than that analyzed in **FIG. 16**.

DETAILED DESCRIPTION

[00026] The following description is presented to enable one of ordinary skill in the art to make and use the invention and to incorporate it in the context of particular applications. Various modifications, as well as a variety of uses in different applications will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to a wide range of embodiments. Thus, the inventions herein are not intended to be limited to the embodiments presented, but are to be accorded their widest scope consistent with the principles and novel features disclosed herein.

[00027] All the features disclosed in this specification, (including any accompanying claims, abstract, and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

[00028] Please note, if used, the labels left, right, front, back, top, bottom, forward, reverse, clockwise and counter clockwise have been used for convenience purposes only and are not intended to imply any particular fixed direction. Instead, they are used to reflect relative locations and/or directions between various portions of an object.

I. GENERAL

[00029] The instant disclosure set forth electrolytes, called catholytes, which are useful in positive electrodes (*i.e.*, cathodes) of electrochemical cells (*e.g.*, rechargeable batteries) that include lithium-stuffed garnet solid-state separators between the positive and negative electrodes. The catholytes set forth herein prevent and/or reduce increases in area-specific resistance (ASR) in these electrochemical cells at the interface between the lithium-stuffed garnet solid-state electrolyte separator and a positive electrode in direct contact with the lithium-stuffed garnet solid-state electrolyte. In some examples, the catholytes set forth herein prevent and/or reduce increases in area-specific resistance (ASR) in these electrochemical cells at the interface between the lithium-stuffed garnet solid-state electrolyte separator and a positive electrode in direct contact with the lithium-stuffed garnet solid-state electrolyte when the electrochemical cell is stored at high voltage (*e.g.*, 4.2 V v. Li or higher) for an extended period of time (*e.g.*, 1-30 days). In some examples, the catholytes set forth herein prevent and/or reduce increases in area-specific resistance (ASR) by preventing and/or

reducing fluorination of the surface of the lithium-stuffed garnet solid-state separator that is in contact with the positive electrode, and the catholyte therein.

[00030] Catholytes which include ethylene carbonate (EC), sulfolane (S), and lithium hexafluorophosphate (LiPF_6), are suitable for use in electrochemical cells having lithium-stuffed garnet solid-state separators. However, these catholytes may react detrimentally with the surface of lithium-stuffed garnet, resulting in fluorination of that surface. This fluorination may cause high impedance to grow over time as the lithium-stuffed garnet is continually exposed to the catholyte. The instant disclosure shows that additives which getter fluorine anions or dissolve fluoride layers improve ASR stability and reduce the variability of garnet surface charge transfer impedance. The instant disclosure demonstrates, for example, that tris(trimethylsilyl) phosphite and other such additives reduce interfacial ASR increases, which may result from HF contamination. The instant disclosure also demonstrates that these additives mitigate ASR growth during a voltage hold at high state of charge. In some examples, the additives include a linear sulfone co-solvent with TTSPi, and this additives improves the homogeneity of the final electrolyte solution.

[00031] Commercially viable rechargeable batteries are required to maintain a high voltage and high state of charge without losing capacity or increasing resistance. However, this is a problem for solid-state batteries which include lithium-stuffed garnet solid-state separators. The instant disclosure demonstrates low and stable ASR growth after a high voltage hold has been applied to a full electrochemical cell which included a lithium-stuffed garnet solid-state separator and a cathode with liquid electrolyte. The instant disclosure demonstrates, for example, that Lewis Acid type additives may passivate lithium-stuffed garnet surfaces which are in contact with catholytes and result in low impedance interfaces. The additives may reduce harm to the garnet surface from anion attack. PF_6^- , for example, can decompose thermally, at high voltage, and/or within the presence of water. The lithium-stuffed garnet surface will react with several of the decomposition by-products of PF_6^- . Some of the additives herein may, without being bound by theory, mitigate PF_6^- decomposition by forming complexes with reactive anions, such as but not limited to PF_6^- decomposition products; by stabilizing the garnet surface with an SEI-like passivating film; and by dissolving LiF or AlF_3 which may form on the surface of the LLZO. One example is TTSPi, which can complex with anions and passivate the garnet surface, or dissolve LiF. Borate and phosphite based strong Lewis acid additives are shown herein to have similar effects to TTSPi.

II. DEFINITIONS

[00032] As used herein, the term “about,” when qualifying a number, *e.g.*, 15 % w/w, refers to the number qualified and optionally the numbers included in a range about that qualified number that includes $\pm 10\%$ of the number. For example, about 15 % w/w includes 15 % w/w as well as 13.5 % w/w, 14 % w/w, 14.5 % w/w, 15.5 % w/w, 16 % w/w, or 16.5 % w/w. For example, “about 75 °C,” includes 75 °C as well 68 °C, 69 °C, 70 °C, 71 °C, 72 °C, 73 °C, 74 °C, 75 °C, 76 °C, 77 °C, 78 °C, 79 °C, 80 °C, 81 °C, 82 °C, or 83 °C.

[00033] As used herein, the phrase “ambient conditions,” refers to room temperature and a natural atmosphere such as the atmosphere of planet Earth that includes approximately 78% N₂ & 21% O₂; and/or with moisture also present. Ambient conditions include standard temperature and pressure, with a relative humidity of at least 1%.

[00034] As used herein, the term “annealing” refers to a process wherein a sintered electrolyte thin film is heated from 200°C to 1000°C in a reducing atmosphere such as but not limited to Argon, hydrogen, or a combination thereof. Example anneal processes are described in US Patent No. 9,966,630 B2, which issued May 8, 2018 and is titled ANNEALED GARNET ELECTROLYTE SEPARATORS, the entire contents of which are herein incorporated by reference in its entirety for all purposes.

[00035] As used herein, the phrase “at least one member selected from the group” includes a single member from the group, more than one member from the group, or a combination of members from the group. At least one member selected from the group consisting of A, B, and C includes, for example, A, only, B, only, or C, only, as well as A and B as well as A and C as well as B and C as well as A, B, and C or any combination of A, B, and C.

[00036] As used herein, the term “ASR” refers to area specific resistance.

[00037] As used herein, the term “contaminant” refers to a chemical deviation from a pristine material. A contaminant in a lithium-stuffed garnet may include any material other than lithium-stuffed garnet such as, but not limited to, a lithium carbonate, a lithium hydroxide, a lithium oxide, a lithium peroxide, a hydrate thereof, an oxide thereof, or a combination thereof, wherein oxide and lithium oxide do not include a lithium-stuffed garnet. Contaminants of a garnet may include, but are not limited to, hydroxides, peroxides, oxides, carbonates, and combination thereof, which are not lithium-stuffed garnet.

[00038] As used herein, the term “electrolyte” refers to an ionically conductive and electrically insulating material. Electrolytes are useful for electrically insulating the positive

and negative electrodes of a rechargeable battery while allowing for the conduction of ions, *e.g.*, Li^+ , through the electrolyte.

[00039] As used herein, the term “catholyte” refers to a liquid or gel electrolyte confined within the positive electrode space of an electrochemical cell. Catholyte also refers to a Li ion conductor that is intimately mixed with, or that surrounds and contacts, or that contacts the positive electrode active materials and provides an ionic pathway for Li^+ to and from the active materials. Catholytes may also be liquid, gel, semi-liquid, semi-solid, polymer, and/or solid polymer ion conductors. In some examples, the catholyte includes a gel set forth herein. In some examples, the gel electrolyte includes any electrolyte set forth herein, including a nitrile, dinitrile, organic sulfur-including solvent, or combination thereof set forth herein.

[00040] As used herein, the phrases “gel electrolyte” unless specified otherwise, refers to a suitable Li^+ ion conducting gel or liquid-based electrolyte, for example, those set forth in US Patent No. 5,296,318, entitled RECHARGEABLE LITHIUM INTERCALATION BATTERY WITH HYBRID POLYMERIC ELECTROLYTE. A gel electrolyte has a lithium ion conductivity of greater than 10^{-5}S/cm at room temperature, a lithium transference number between 0.05-0.95, and a storage modulus greater than the loss modulus at some temperature. A gel electrolyte may comprise a polymer matrix, a solvent that gels the polymer, and a lithium containing salt that is at least partly dissociated into Li^+ ions and anions. Alternately, a gel electrolyte may comprise a porous polymer matrix, a solvent that fills the pores, and a lithium containing salt that is at least partly dissociated into Li^+ ions and anions where the pores have one length scale less than $10\mu\text{m}$.

[00041] As used herein, the phrases “electrochemical cell” or “battery cell” shall, unless specified to the contrary, mean a single cell including a positive electrode and a negative electrode, which have ionic communication between the two using an electrolyte. In some embodiments, a battery or module includes multiple positive electrodes and/or multiple negative electrodes enclosed in one container, *i.e.*, stacks of electrochemical cells. A symmetric cell unless specified to the contrary is a cell having two Li metal anodes separated by a solid-state electrolyte.

[00042] As used herein the phrase “electrochemical stack,” refers to one or more units which each include at least a negative electrode (*e.g.*, Li, LiC_6), a positive electrode (*e.g.*, Li-nickel-manganese-oxide or FeF_3 , optionally combined with a catholyte or a gel electrolyte), and a solid electrolyte (*e.g.*, lithium-stuffed garnet electrolyte set forth herein) between and in contact with the positive and negative electrodes. In some examples, between the solid

electrolyte and the positive electrode, there is an additional layer comprising a gel electrolyte. An electrochemical stack may include one of these aforementioned units. An electrochemical stack may include several of these aforementioned units arranged in electrical communication (*e.g.*, serial or parallel electrical connection). In some examples, when the electrochemical stack includes several units, the units are layered or laminated together in a column. In some examples, when the electrochemical stack includes several units, the units are layered or laminated together in an array. In some examples, when the electrochemical stack includes several units, the stacks are arranged such that one negative electrode is shared with two or more positive electrodes. Alternatively, in some examples, when the electrochemical stack includes several units, the stacks are arranged such that one positive electrode is shared with two or more negative electrodes. Unless specified otherwise, an electrochemical stack includes one positive electrode, one solid electrolyte, and one negative electrode, and optionally includes a gel electrolyte layer between the positive electrode and the solid electrolyte.

[00043] As used herein, the phrase “directly contacts” refers to the juxtaposition of two materials such that the two materials contact each other sufficiently to conduct either an ion or electron current. As used herein, direct contact refers to two materials in contact with each other and which do not have any materials positioned between the two materials which are in direct contact.

[00044] As used herein, the phrase “electrochemical device” refers to an energy storage device, such as, but not limited to a Li-secondary battery that operates or produces electricity or an electrical current by an electrochemical reaction, *e.g.*, a conversion chemistry reaction such as $3\text{Li} + \text{FeF}_3 \leftrightarrow 3\text{LiF} + \text{Fe}$.

[00045] As used herein, the phrase “film” or “thin film” refers to a thin membrane of less than 0.5 mm in thickness and greater than 10 nm in thickness. A thin film is also greater than 5 mm in a lateral dimension. A “film” or “thin-film” may be produced by a continuous process such as tape-casting, slip casting, or screen-printing.

[00046] As used herein, the phrase “film thickness” refers to the distance, or median measured distance, between the top and bottom faces of a film. As used herein, the top and bottom faces refer to the sides of the film having the largest surface area. As used herein, thickness is measured by cross-sectional scanning electron microscopy.

[00047] As used herein, the term “pellet” refers to a small unit of bulky material compressed into any of several shapes and sizes, *e.g.*, cylindrical, rectangular, or spherical. The compressed material is disc-shaped and may be 5 – 20 cm in diameter and 0.5 to 2 cm in

height. Typically, the compressed material is disc-shaped and 10 cm in diameter and 1 cm in height. Pellets may also include additional agents to help bind the material compressed into the pellet. In some examples, these additional agents are referred to as binding agents and may include, but are not limited to, polymers such as poly(ethylene)oxide. In some examples, polyvinyl butyral is used as a binding agent. Pellets are typically made by pressing a collection of powder materials in a press. This pressing makes the powder materials adhere to each other and increases the density of the collection of powder material when compared to the density of the collection of powder material before pressing. In some instances, the powder material is heated and/or an electrical current is passed through the powder material during the pressing.

[00048] As used herein, the term “pressed pellet” refers to a pellet having been submitted to a pressure (*e.g.*, 5000 PSI) to further compress the pellet.

[00049] As used herein, the phrase “lithium stuffed garnet” refers to oxides that are characterized by a crystal structure related to a garnet crystal structure. U.S. Patent Application Publication No. U.S. 2015/0099190, which published April 9, 2015 and was filed October 7, 2014 as 14/509,029, is incorporated by reference herein in its entirety. This application describes Li-stuffed garnet solid-state electrolytes used in solid-state lithium rechargeable batteries. These Li-stuffed garnets generally having a composition according to $\text{Li}_a\text{La}_b\text{M}'_c\text{M}''_d\text{Zr}_e\text{O}_f$, $\text{Li}_a\text{La}_b\text{M}'_c\text{M}''_d\text{Ta}_e\text{O}_f$, or $\text{Li}_a\text{La}_b\text{M}'_c\text{M}''_d\text{Nb}_e\text{O}_f$, wherein $4 < a < 8.5$, $1.5 < b < 4$, $0 \leq c \leq 2$, $0 \leq d \leq 2$, $0 \leq e < 2.5$, $10 < f < 13$, and M' and M'' are each, independently in each instance selected from Ga, Al, Mo, W, Nb, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta, or $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Me}''_e\text{O}_f$, wherein $5 < a < 8.5$; $2 < b < 4$; $0 < c \leq 2.5$; $0 \leq d < 2$; $0 \leq e < 2$, and $10 < f < 13$ and Me'' is a metal selected from Ga, Nb, Ta, V, W, Mo, and Sb and as otherwise described in U.S. Patent Application Publication No. U.S. 2015/0099190. As used herein, lithium-stuffed garnets, and garnets, generally, include, but are not limited to, $\text{Li}_{7.0}\text{La}_3(\text{Zr}_{t1} + \text{Nb}_{t2} + \text{Ta}_{t3})\text{O}_{12} + 0.35\text{Al}_2\text{O}_3$; wherein $(t1+t2+t3 = 2)$ so that the La:(Zr/Nb/Ta) ratio is 3:2. Also, garnets used herein include, but are not limited to, $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_f + y\text{Al}_2\text{O}_3$, wherein x ranges from 5.5 to 9; and y ranges from 0.05 to 1. In these examples, subscripts x , y , and F are selected so that the garnet is charge neutral. In some examples x is 7 and y is 1.0. In some examples, x is 5 and y is 1.0. In some examples, x is 6 and y is 1.0. In some examples, x is 8 and y is 1.0. In some examples, x is 9 and y is 1.0. In some examples x is 7 and y is 0.35. In some examples, x is 5 and y is 0.35. In some examples, x is 6 and y is 0.35. In some examples, x is 8 and y is 0.35. In some examples, x is 9 and y is 0.35. In some examples x is 7 and y is 0.7. In some examples, x is 5 and y is 0.7. In some examples, x is 6 and y is 0.7. In some examples, x is 8

and y is 0.7. In some examples, x is 9 and y is 0.7. In some examples x is 7 and y is 0.75. In some examples, x is 5 and y is 0.75. In some examples, x is 6 and y is 0.75. In some examples, x is 8 and y is 0.75. In some examples, x is 9 and y is 0.75. In some examples x is 7 and y is 0.8. In some examples, x is 5 and y is 0.8. In some examples, x is 6 and y is 0.8. In some examples, x is 8 and y is 0.8. In some examples, x is 9 and y is 0.8. In some examples x is 7 and y is 0.5. In some examples, x is 5 and y is 0.5. In some examples, x is 6 and y is 0.5. In some examples, x is 8 and y is 0.5. In some examples, x is 9 and y is 0.5. In some examples x is 7 and y is 0.4. In some examples, x is 5 and y is 0.4. In some examples, x is 6 and y is 0.4. In some examples, x is 8 and y is 0.4. In some examples, x is 9 and y is 0.4. In some examples x is 7 and y is 0.3. In some examples, x is 5 and y is 0.3. In some examples, x is 6 and y is 0.3. In some examples, x is 8 and y is 0.3. In some examples, x is 9 and y is 0.3. In some examples x is 7 and y is 0.22. In some examples, x is 5 and y is 0.22. In some examples, x is 6 and y is 0.22. In some examples, x is 8 and y is 0.22. In some examples, x is 9 and y is 0.22. Also, garnets as used herein include, but are not limited to, $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} + y\text{Al}_2\text{O}_3$. In one embodiment, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12}$. In another embodiment, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12} \cdot \text{Al}_2\text{O}_3$. In yet another embodiment, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12} \cdot 0.22\text{Al}_2\text{O}_3$. In yet another embodiment, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12} \cdot 0.35\text{Al}_2\text{O}_3$. In certain other embodiments, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12} \cdot 0.5\text{Al}_2\text{O}_3$. In another embodiment, the Li-stuffed garnet herein has a composition of $\text{Li}_7\text{Li}_3\text{Zr}_2\text{O}_{12} \cdot 0.75\text{Al}_2\text{O}_3$.

[00050] As used herein, garnet does not include YAG-garnets (*i.e.*, yttrium aluminum garnets, or, *e.g.*, $\text{Y}_3\text{Al}_5\text{O}_{12}$). As used herein, garnet does not include silicate-based garnets such as pyrope, almandine, spessartine, grossular, hessonite, or cinnamon-stone, tsavorite, uvarovite and andradite and the solid solutions pyrope-almandine-spessartite and uvarovite-grossular-andradite. Garnets herein do not include nesosilicates having the general formula $\text{X}_3\text{Y}_2(\text{SiO}_4)_3$ wherein X is Ca, Mg, Fe, and, or, Mn; and Y is Al, Fe, and, or, Cr.

[00051] As used herein, the phrase “lithium interfacial resistance” refers to the interfacial resistance of a material towards the incorporation of Li^+ ions. A lithium interfacial ASR ($\text{ASR}_{\text{interface}}$) is calculated from the interfacial resistance ($\text{R}_{\text{interface}}$) via $\text{ASR}_{\text{interface}} = \text{R}_{\text{interface}} \cdot A/2$ where A is the area of the electrodes in contact with the separator and the factor of 2 accounts for 2 interfaces, assuming the cell is symmetric.

[00052] As used herein, the phrase “positive electrode” refers to the electrode in a secondary battery towards which positive ions, *e.g.*, Li^+ , conduct during discharge of the

battery. As used herein, the phrase “negative electrode” refers to the electrode in a secondary battery from where positive ions, *e.g.*, Li^+ , conduct during discharge of the battery. In a battery comprised of a Li-metal electrode and a conversion chemistry electrode (*i.e.*, active material; *e.g.*, NiF_x), the electrode having the conversion chemistry materials is referred to as the positive electrode. In some common usages, cathode is used in place of positive electrode, and anode is used in place of negative electrode. When a Li-secondary battery is charged, Li ions conduct from the positive electrode (*e.g.*, NiF_x) towards the negative electrode (Li-metal). When a Li-secondary battery is discharged, Li ions conduct towards the positive electrode (*e.g.*, NiF_x ; *i.e.*, cathode) and from the negative electrode (*e.g.*, Li-metal; *i.e.*, anode).

[00053] As used herein, the terms “separator” refers to a solid electrolyte which conducts Li^+ ions, is substantially insulating to electrons, and is suitable for use as a physical barrier or spacer between the positive and negative electrodes in an electrochemical cell or a rechargeable battery. A separator, as used herein, is substantially insulating to electrons when the separator’s lithium ion conductivity is at least 10^3 times, and typically 10^6 times, greater than the separator’s electron conductivity. Unless explicitly specified to the contrary, a separator as used herein is stable when in contact with lithium metal.

[00054] As used herein, the phrase “ Li^+ ion-conducting separator” refers to an electrolyte which conducts Li^+ ions, is substantially insulating to electrons (*e.g.*, the lithium ion conductivity is at least 10^3 times, and often 10^6 times, greater than the electron conductivity), and which acts as a physical barrier or spacer between the positive and negative electrodes in an electrochemical cell.

[00055] As used herein, the phrases “solid separator,” “solid electrolyte,” “solid-state separator,” and “solid-state electrolyte” refer to Li^+ ion-conducting separators that are solids at room temperature and include at least 50 vol% ceramic material.

[001] As used herein, the term “surface” refers to a material, or portion of a material, that is near or at an interface between two different phases, chemicals, or states of matter. A surface is the area of contact between two different phases or states of matter (*e.g.*, solid-gas, liquid-gas, or solid-liquid). For example, the interface of two solids which are in direct contact with each other is a surface. For example, a thin film garnet separator when exposed to air has a surface described by the periphery or outside portion of the separator which contacts the air. For rectangular-shaped separators, there is a top and a bottom surface which both individually have higher total geometric surface areas than each of the four side surfaces individually. In this rectangular-shaped separator example, there are four side surfaces which

each have geometric surface areas less than either of the top and bottom surfaces. For a disc-shaped separator, there is a top and a bottom surface which both individually have higher geometric surface areas than the circumference-side of the disc-shaped separator. Geometric surface area is calculated for a square or rectangular shaped-surface by multiplying length of the surface by the width of the surface. Geometric surface area is calculated for disc-shaped surface by multiplying π by the squared radius of the disc, *i.e.*, πr^2 wherein r is the radius of the disc surface. Geometric surface area is calculated for the side of a disc by multiplying the disc circumference by the width of the side of the disc. When used as an electrolyte in an electrochemical cell, either the top or bottom surface is the surface of the separator which directly contacts the negative electrode (*e.g.*, Li metal), the positive electrode (*i.e.* cathode or catholyte in the cathode), and/or a layer or adhesive bonding agent disposed between the separator and the positive electrode. A surface is defined by an area that has larger, or more extended, x- and y-axis physical dimensions than it does z-axis physical dimensions, wherein the z-axis dimension is perpendicular to the surface. The depth, roughness or thickness of a surface can be of a molecular order (0.1 to 10 nanometers) of magnitude or up to 1, 2, 3, 4, or 5 μm .

[002] As used herein, the term “top and bottom surfaces” refer to the two surfaces that have the largest total geometric surface area for a material having more than two surfaces. For example, a rectangle has six surfaces – four side surfaces and one top and one bottom surface. In such a rectangle, there is one top and one bottom surface which are parallel to each other. In a rectangle, there are four side surfaces which are perpendicular to both the top and bottom surfaces. In a rectangle, the top and bottom surfaces individually have a larger total geometric surface area than the total geometric surface area of each of the four side surfaces individually.

[003] As used herein, the phrase “fluorinated” refers to the presence of a chemical species that includes fluorine or fluoride.


[004] As used herein, the phrase “fluorinated surface” refers to a surface to which fluoride is bonded or incorporated as determined by XPS or NMR. Unless specified explicitly otherwise, the fluorinated surface feature is determined by XPS.

[005] As used herein, the phrase “oxyfluorinated” refers to the presence of a chemical species that includes oxygen and fluorine or oxygen and fluoride.

[006] As used herein, the phrase “oxyfluorinated surface” refers to a surface to which oxygen and fluorine is bonded or incorporated as determined by XPS or NMR. Unless specified explicitly otherwise, the oxyfluorinated surface feature is determined by XPS.

[007] As used herein, the phrase “substantially free of” refers to the presences of a chemical species below the XPS detectable limit. For example, a lithium-stuffed garnet that is substantially free of Li_2CO_3 on its surface has Li_2CO_3 on the surface in an amount less than 1 atomic % measured by XPS. As used herein, the phrase “trace amounts of contaminants,” refers to the presences of a chemical species below the XPS detectable limit.

[008] As used herein, the phrase “dinitrile” or “dinitrile solvent” refers to a linear hydrocarbon chain where both ends of the chain are terminated with a cyano (*i.e.*, $-\text{C}\equiv\text{N}$) group. Example dinitrile solvents are characterized by Formula (I):

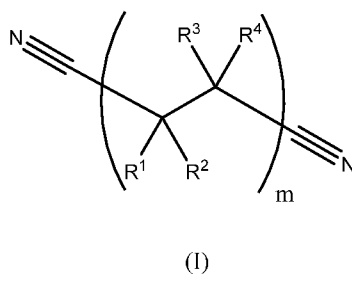

wherein:

R^1 , R^2 , R^3 , and R^4 are, independently in each instance, selected from $-\text{CN}$, $-\text{NO}_2$, $-\text{CO}_2$, $-\text{SO}_4$, $-\text{H}$, $-\text{SO}_3$, $-\text{SO}_2$, $-\text{CH}_2\text{-SO}_3$, $-\text{CHF-SO}_3$, $-\text{CF}_2\text{-SO}_3$, $-\text{F}$, $-\text{Cl}$, $-\text{Br}$, and $-\text{I}$; and wherein subscript m is an integer from 1 to 1000.

[009] Some exemplary nitrile and dinitrile solvents include, but are not limited to, adiponitrile (hexanedinitrile), acetonitrile, benzonitrile, butanedinitrile (succinonitrile), butyronitrile, decanenitrile, ethoxyacetonitrile, fluoroacetonitrile, glutaronitrile, hexanenitrile, heptanenitrile, heptanedinitrile, iso-butyronitrile, malononitrile (propanedinitrile), malonodinitrile, methoxyacetonitrile, nitroacetonitrile, nonanenitrile, nonanedinitrile, octanedinitrile (suberodinitrile), octanenitrile, propanenitrile, pentanenitrile, pentanedinitrile, sebaconitrile (decanedinitrile), succinonitrile, and combinations thereof. In some examples, the combinations are miscible combinations.

[0010] As used herein, the phrase “organic sulfur-including solvent” refers to a solvent selected from ethyl methyl sulfone, dimethyl sulfone, sulfolane, allyl methyl sulfone, butadiene sulfone, butyl sulfone, methyl methanesulfonate, and dimethyl sulfate.

[0011] As used herein, the phrase “bonding layer” refers to an ionically conductive layer between two other layers, *e.g.*, between the cathode and the solid separator. Exemplary bonding layers include the gel electrolytes, and related separator bonding agents, set forth in US Patent Application Publication No. 2017-0331092, which published November 16, 2017,

the entire contents of which are herein incorporated by reference in its entirety for all purposes.

[0012] As used herein, the term “HOMO” or “Highest Occupied Molecular Orbital” refers to the energy of the electron occupying the highest occupied molecular orbital, as referenced to the vacuum energy. As used herein, the term “LUMO” refers to “Lowest Unoccupied Molecular Orbital.” HOMO and LUMO energy levels are calculated by DFT calculations referenced to the vacuum level. Unless otherwise specified, the DFT calculations use a B3LYP functional for exchange and correlation and a 6-311++g** basis set.

[0013] As used herein, the phrase “stability window” refers to the voltage range within which a material exhibits no reaction which materially or significantly degrades the material’s function in an electrochemical cell. It may be measured in an electrochemical cell by measuring cell resistance and Coulombic efficiency during charge/discharge cycling. For voltages within the stability window (i.e. the working electrode vs reference electrode within the stability window), the increase of cell resistance is low. For example, this resistance increase may be less than 1% per 100 cycles. For example, the material is stable at 4V v. Li. For another example, the material is stable at 4V or greater v. Li. For another example, the material is stable at 4V, 4.1V, 4.2V, 4.3V, 4.4V, 4.5V, 4.6V, 4.7V, 4.8V, 4.9V, 5V, 5.1V, or 5.2V v. Li. For example, the material is stable at 5.2V or greater v. Li.

[0014] As used herein, the term “a high voltage-stable catholyte” refers to a catholyte which does not react at high voltage (4.2 V or higher versus Li metal) in a way that materially or significantly degrades the ionic conductivity of the catholyte when held at high voltage at room temperature for one week. Herein, a material or significant degradation in ionic conductivity is a reduction in ionic conductivity by an order of magnitude or more. For example, if the catholyte has an ionic conductivity of 10E-3 S/cm, and when charged to 4.2V or higher the catholyte has an ionic conductivity of 10E-4 S/cm, then the catholyte is not stable at 4.2V or higher since its ionic conductivity materially and significantly degraded at that voltage.” As used herein, high voltage means 4V or larger versus a lithium metal (*i.e.*, v. Li) reference electrode (which is at 0V). High voltage may also refer to higher voltage, *e.g.*, 4.2, 4.3, 4.4, 4.5, 4.6, 4.7, 4.8, 4.9, 5.0 V or higher.

[0015] As used herein, “stable at 4V or greater v. Li” refers to a material that does not react at high voltage 4V or greater with respect to a lithium metal anode in a way that materially or significantly degrades the ionic conductivity. As used herein, “stable at 4V, 4.1V, 4.2V, 4.3V, 4.4V, 4.5V, 4.6V, 4.7V, 4.8V, 4.9V, 5.0V, 5.1V, or 5.2V v. Li,” refers to a

material that does not react at the recited voltage with respect to a lithium metal anode in a way that materially or significantly degrades the ionic conductivity.

[0016] As used herein, the term “chemically compatible” means that two or more materials or chemicals are chemically compatible with each other if the materials can be physically exposed to each other and the materials do not react in a way which materially or significantly degrades the electrochemical performance. Herein, electrochemical performance refers to either ionic conductivity or area-specific resistance (ASR). A material or significant degradation in ionic conductivity is a degradation by an order of magnitude or more. A material or significant degradation in ASR is a degradation by a factor of 2 or more when held at room temperature for one week.

[0017] As used herein, the term “LiBETI” refers to lithium bis(perfluoroethanesulfonyl)imide.

[0018] As used herein, the term “LiTFSI” refers to lithium bis(trifluoromethane)sulfonimide.

[0019] As used herein, the term “LiFSI” refers lithium bis(fluorosulfonyl)imide.

[0020] As used herein, the term “LIBOB” refers to lithium bis(oxalato)borate.

[0021] As used herein, the term “XPS” refers to X-ray photoelectron spectroscopy which is a surface-sensitive quantitative spectroscopic technique that measures the elemental composition at the parts per thousand range, empirical formula, chemical state and electronic state of the elements that exist within a material.

[0022] As used herein, the term “LLZO” refers to a lithium-lanthanum-zirconium-oxygen-containing compound. If the compound is crystallized into the garnet crystal structure, then the LLZO is a lithium-stuffed garnet, as defined above.

[0023] As used herein, the term “GITT” refers to the Galvanostatic Intermittent Titration Technique.

[0024] As used herein, the term “EIS” refers to Electrochemical Impedance Spectroscopy.

[0025] As used herein, the term “ECS” refers to a mixture of ethylene carbonate and sulfolane. Herein, sulfolane refers to tetrahydrothiophene 1,1-dioxide, having the cyclic



sulfone structure shown below:

[0026] As used herein, “EDS” refers to energy dispersive spectroscopy.

- [0027] As used herein, the term “SCN” refers to succinonitrile.
- [0028] As used herein, the term “lithium salt” refers to a lithium-containing compound that is a solid at room temperature that at least partially dissociates when immersed in a solvent such as EMC. Lithium salts may include but are not limited to LiPF₆, LiBOB, LiTFSi, LiFSI, LiAsF₆, LiClO₄, LiI, LiBETI, or LiBF₄.
- [0029] As used herein, the term “carbonate solvent” refers to a class of solvents containing a carbonate group C(=O)(O⁻). Carbonate solvents include but are not limited to ethylene carbonate, dimethyl carbonate, propylene carbonate, diethyl carbonate, ethyl methyl carbonate, dimethyl ethylene carbonate, isobutylene carbonate, nitroethyl carbonate, Monofluoroethylene carbonate, fluoromethyl ethylene carbonate, 1,2-butylene carbonate, methyl propyl carbonate, isopropyl methyl carbonate, etc.
- [0030] As used herein, area-specific resistance (ASR) is measured by electrochemical cycling using Arbin or Biologic unless otherwise specified to the contrary.
- [0031] As used herein, ionic conductivity is measured by electrical impedance spectroscopy methods.
- [0032] As used herein, a “strong Lewis Acid,” refers to a Lewis acid that is able to competitively bind with F, OH, HF, PF₆, and/or H₂O, or their anions, *e.g.*, H⁺, better than H⁺. Lewis acids are known in the art as chemical species which can accept electrons from a donor compound or species. A typical Lewis acid is the cation H⁺. Example strong Lewis acids include, but are not limited to, lithium bis(perfluoroethanesulfonyl)imide (LiBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF₄, LiPF₆, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).

III. ELECTROCHEMICAL CELLS

- [0033] In one embodiment, set forth herein is a electrochemical cell that includes a positive electrode, an negative electrode, and a solid-state electrolyte therebetween. The positive electrode includes a catholyte, which includes a lithium salt; a first solvent selected from the group consisting of sulfolane, 1,3-propane sultone, sulfolene, thiophene, and combinations thereof; a second solvent; and a strong Lewis acid additive. The solid-state electrolyte includes lithium-stuffed garnet; and the negative electrode includes lithium metal.
- [0034] In some examples, including any of the foregoing, the a first solvent selected from sulfolane. In some examples, including any of the foregoing, the a first solvent selected from 1,3-propane sultone. In some examples, including any of the foregoing, the a first

solvent selected from sulfolene. In some examples, including any of the foregoing, the a first solvent selected from thiophene.

[0035] In some examples, including any of the foregoing, the solid-state electrolyte is a thin film.

[0036] In some examples, including any of the foregoing, the solid-state electrolyte is a sintered lithium-stuffed garnet thin film.

[0037] In some examples, including any of the foregoing, the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.

[0038] In some examples, including any of the foregoing, the lithium salt is selected from LiPF_6 . In some examples, including any of the foregoing, the lithium salt is selected from lithium bis(perfluoroethanesulfonyl)imide (LIBETI). In some examples, including any of the foregoing, the lithium salt is selected from bis(trifluoromethane)sulfonimide (LiTFSI). In some examples, including any of the foregoing, the lithium salt is selected from LiBF_4 . In some examples, including any of the foregoing, the lithium salt is selected from LiAsF_6 . In some examples, including any of the foregoing, the lithium salt is selected from lithium bis(fluorosulfonyl)imide (LiFSI).

[0039] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M.

[0040] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M.

[0041] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0M to 1.4 M.

[0042] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M.

[0043] In some examples, including any of the foregoing, the lithium salt is present at a concentration of about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, or about 1.5 M.

[0044] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, about 1.0

M, about 1.05, about 1.10, about 1.15, about 1.2, about 1.25, about 1.30, about 1.35, about 1.4, about 1.45, or about 1.5 M.

[0045] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[0046] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M.

[0047] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M.

[0048] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the

foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[0049] In some examples, including any of the foregoing, the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile, suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO), ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoolane-2-carbonitrile, and combinations thereof. In some examples, the combinations are miscible combinations.

[0050] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate, dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylene carbonate (PC), diethyl carbonate (DEC), fluoroethylene carbonate (FEC), prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), glutaronitrile (GLN), adiponitrile (ADN), and combinations thereof. In some examples, the combinations of solvents are those combinations which are miscible.

[0051] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate.

[0052] In some examples, including any of the foregoing, the catholyte has a viscosity of less than 15 mPa-s at 20 °C.

[0053] In some examples, including any of the foregoing, the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm.

- [0054] In some examples, including any of the foregoing, the electrochemical cell further includes a third solvent selected from a linear sulfone.
- [0055] In some examples, including any of the foregoing, the linear sulfone is present at 0 vol % to 15 vol %.
- [0056] In some examples, including any of the foregoing, the linear sulfone is present at 5 vol % to 10 vol %.
- [0057] In some examples, including any of the foregoing, the linear sulfone is selected from the group consisting of ethyl methyl sulfone, dimethyl sulfone, dibutyl sulfone, allyl methyl sulfone, ethyl sulfone, dipropyl sulfone, ethyl phenyl sulfone, diethyl sulfate, dimethyl sulfate, and combinations thereof. In some examples, the combinations of solvents are those combinations which are miscible.
- [0058] In some examples, including any of the foregoing, the linear sulfone is selected from the group consist of dibutylsulfone, dipropylsulfone, and combinations thereof.
- [0059] In some examples, including any of the foregoing, the catholyte is a eutectic mixture of solvents.
- [0060] In some examples, including any of the foregoing, the eutectic mixture melts at less than 30 °C.
- [0061] In some examples, including any of the foregoing, sulfolane is the solvent present in the catholyte in the largest volume percent.
- [0062] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is from 30:70 vol/vol (v/v) to 50:50 v/v.
- [0063] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is either 50:50 v/v or 45:55 v/v.
- [0064] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is either about 50:50 v/v or about 45:55 v/v.
- [0065] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is from 30:70 v/v to 50:50 v/v.
- [0066] In some examples, the ratio of EC:sulfolane, is 45:55 vol%. In some examples, the ratio - EC:sulfolane - may range from 3:7 to 5:5 v/v, but can be 45:55 vol%.
- [0067] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is either 50:50 or 45:55 v/v.

[0068] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, PF₆, and/or H₂O. In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, PF₆, and/or H₂O stronger than it binds to LiPF₆.

[0069] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, PF₆ and H₂O. In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, PF₆, and H₂O stronger than it binds to LiPF₆.

[0070] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with an anion decomposition product of PF₆. In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, PF₆, and/or H₂O stronger than it binds to LiPF₆.

[0071] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with the surface of lithium-stuffed garnet.

[0072] In some examples, including any of the foregoing, the strong Lewis Acid binds to the surface of lithium-stuffed garnet stronger than it binds to a lithium salt selected from the group consisting of lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF₄, LiPF₆, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).

[0073] In some examples, including any of the foregoing, the strong Lewis acid additive is a F⁻ getter from HF. A F⁻ getter refers to a species which sequesters, or reacts with or bonds with, F⁻ in the presence of HF. A getter may also be referred to as a scavenger. For example, a F⁻ getter refers to a species which scavenges F⁻ in the presence of HF. Example F⁻ getters are disclosed in HAN *et al.*, “Distinct Reaction Characteristics of Electrolyte Additives for High-Voltage Lithium-Ion Batteries: Tris(trimethylsilyl) Phosphite, Borate, and Phosphate,” *Electrochimica Acta* 215 (2016) 455–465 and QI *et al.*, “Lifetime limit of tris(trimethylsilyl) phosphite as electrolyte additive for high voltage lithium ion batteries,” *RSC Adv.*, 2016, 6, 38342-38349, 10.1039/C6RA06555D. This exemplified F⁻ getters in these publications are not exhaustive of all possible F⁻ getters.

[0074] In some examples, including any of the foregoing, the strong Lewis acid additive is an OH⁻ getter from H₂O. A OH⁻ getter refers to a species which sequesters, or reacts with or bonds with, OH⁻ in the presence of H₂O. A getter may also be referred to as a scavenger. For example, a OH⁻ getter refers to a species which scavenges OH⁻ in the presence of H₂O. Example OH⁻ getters are disclosed in HAN *et al.*, “Distinct Reaction Characteristics

of Electrolyte Additives for High-Voltage Lithium-Ion Batteries: Tris(trimethylsilyl) Phosphite, Borate, and Phosphate,” *Electrochimica Acta* 215 (2016) 455–465 and QI *et al.*, “Lifetime limit of tris(trimethylsilyl) phosphite as electrolyte additive for high voltage lithium ion batteries,” *RSC Adv.*, 2016, 6, 38342-38349, 10.1039/C6RA06555D. This exemplified OH⁻ getters in these publications are not exhaustive of all possible OH⁻ getters.

[0075] In some examples, including any of the foregoing, the strong Lewis acid additive is a trivalent phosphite, phosphate, or borate compound.

[0076] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi), tris(trimethylsilyl) phosphate (TTSP), trimethoxyboroxine (C₃H₉B₃O₆, TMOBX), vinylene carbonate (VC), vinyl ethylene carbonate (VEC), methylene methane disulfonate (MMDS), prop-1-ene-1,3 sultone (PES), fluoroethylene carbonate (FEC), LiTFSi, LiBOB, 1,3-propane sultone (PS), succinonitrile, methylene methanedisulfonate (MMDS), trimethylene sulfate (TMS), triallyl phosphate (TAP), tris(trimethylsilyl) borate, (TMSB) or tris(pentafluorophenyl)borane (TPFPB), and combinations thereof. In some examples, the combinations of solvents are those combinations which are miscible.

[0077] In some examples, including any of the foregoing, the strong Lewis acid additive is TTSPi and/or TTSP.

[0078] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting TTSPi and TTSP.

[0079] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of TMOBX and vinylene carbonate.

[0080] In some examples, including any of the foregoing, the strong Lewis acid additive is VC.

[0081] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and MMDS.

[0082] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and/or PES.

[0083] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of PES, MDS, and TTSP.

[0084] In some examples, including any of the foregoing, the strong Lewis acid additive includes 2 wt. % PES.

[0085] In some examples, including any of the foregoing, the strong Lewis acid additive includes 1 wt % MMDS and 1 wt % TTSPi.

[0086] In some examples, including any of the foregoing, the catholyte includes 1.4M LiPF_6 , 45 v/v EC, 50 v/v sulfolane, and 5v/v dibutylsulfone.

[0087] In some examples, including any of the foregoing, the strong Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture.

[0088] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by the chemical formula $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} + y\text{Al}_2\text{O}_3$, wherein x is from 5.8 to 7.0, and y is 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, or 1.0.

[0089] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DZrEO}_F$, $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DTaEO}_F$, and $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DNbEO}_F$, wherein $4 < A < 8.5$, $1.5 < B < 4$, $0 \leq C < 2$, $0 \leq D < 2$, $0 < E < 2$, $10 < F < 14$, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta.

[0090] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by the formula $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DZrEO}_F$, wherein $4 < A < 8.5$, $1.5 < B < 4$, $0 \leq C \leq 2$, $0 \leq D \leq 3$, $0 < E \leq 2$, $10 < F < 14$, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta.

[0091] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Me}''_e\text{O}_f$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $0 \leq e < 2$, $10 < f < 14$, and wherein Me'' is a metal selected from the group consisting of Nb, Ta, V, W, Mo, and Sb.

[0092] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{O}_f$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $10 < f < 14$.

[0093] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.35\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[0094] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.5\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[0095] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.65\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[0096] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot \text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[0097] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte selected from any one of the following: (a) a solution of 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.0 M LiPF_6 ; (b) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.4 M LiPF_6 ; (c) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.5 M LiPF_6 ; (d) ethylene carbonate:sulfolane, and 1.0 M LiPF_6 ; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; (e) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.4 M LiPF_6 ; (f) ethylene carbonate:sulfolane, and 1.5 M LiPF_6 ; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.5 M LiPF_6 ; (g) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.0 M LiPF_6 and 2wt % TTSPi; (h) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.4M LiPF_6 and 2 wt % TTSPi; (i) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.5 M LiPF_6 and 2wt % TTSPi; (j) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1 M LiPF_6 and 0.3 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (k) 5 volume percent (vol %) dipropyl sulfone with 45 vol% ethylene carbonate and 50 vol% sulfolane, and 1 M LiPF_6 and 0.3 weight percent (wt %) TTSPi; (l) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1M LiPF_6 and 2 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (m) 5 volume percent (vol %) dipropyl sulfone with 45 vol% ethylene carbonate and 50 vol% sulfolane, and 1 M LiPF_6 and 2 weight percent (wt %) TTSPi.

[0098] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte selected from any one of the following: (a) a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5 M – 2.0 M LiPF_6 ; (b) 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF_6 ; (c) 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF_6 ; (d) ethylene carbonate:sulfolane, and 0.5-2.0 M LiPF_6 ; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; (e) 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF_6 ; (f) ethylene carbonate:sulfolane, and 0.5-2.0 M LiPF_6 ; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF_6 ; (g) 3-8 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 50 vol% sulfolane; 0.5-2.0 M LiPF_6 and 1-4 wt % TTSPi; (h) 3-7 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 40-60 vol% sulfolane; 0.5-2.0M LiPF_6 and 1-4 wt %

TTSPi; (i) 4-6 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 40-60 vol% sulfolane; 0.5-2.0 M LiPF₆ and 1-3 wt % TTSPi; (j) 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 1 M LiPF₆ and 0.3 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (k) 4-6 volume percent (vol %) dipropyl sulfone with 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆ and 0.1-0.6 weight percent (wt %) TTSPi; (l) 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆ and 1-5 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (m) 4-6 volume percent (vol %) dipropyl sulfone with 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆ and 1-3 weight percent (wt %) TTSPi.

[0099] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte selected from any one of the following: (a) a solution of 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.0 M LiPF₆; (b) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.4 M LiPF₆; (c) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.5 M LiPF₆; (d) ethylene carbonate:sulfolane, and 1.0 M LiPF₆; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; (e) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.4 M LiPF₆; (f) ethylene carbonate:sulfolane, and 1.5 M LiPF₆; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1.5 M LiPF₆; (g) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.0 M LiPF₆ and 2wt % TTSPi; (h) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.4M LiPF₆ and 2 wt % TTSPi; (i) 5 vol% dibutyl or dipropyl sulfone; 45 vol% EC; 50 vol% sulfolane; 1.5 M LiPF₆ and 2wt % TTSPi; (j) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1 M LiPF₆ and 0.3 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (k) 5 vol % dipropyl sulfone with 45 vol% ethylene carbonate and 50 vol% sulfolane, and 1 M LiPF₆ and 0.3 weight percent (wt %) TTSPi; (l) 45 vol% ethylene carbonate and 55 vol% sulfolane, and 1M LiPF₆ and 2 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi); (m) 5 volume percent (vol %) dipropyl sulfone with 45 vol% ethylene carbonate and 50 vol% sulfolane, and 1 M LiPF₆ and 2 weight percent (wt %) TTSPi.

[00100] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5 M – 2.0 M LiPF₆.

[00101] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆.

[00102] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60vol% ethylene carbonate and 40-60vol% sulfolane, and 0.5-2.0 M LiPF₆.

[00103] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of ethylene carbonate:sulfolane, and 0.5-2.0 M LiPF₆; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol.

[00104] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆.

[00105] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of ethylene carbonate:sulfolane, and 0.5-2.0 M LiPF₆; wherein the ratio of ethylene carbonate:sulfolane ranges from 3:7 to 5:5 vol/vol; 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆.

[00106] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 3-8 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 50 vol% sulfolane; 0.5-2.0 M LiPF₆ and 1-4 wt % TTSPi.

[00107] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 3-7 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 40-60 vol% sulfolane; 0.5-2.0M LiPF₆ and 1-4 wt % TTSPi.

[00108] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 4-6 vol% dibutyl or dipropyl sulfone; 40-60 vol% EC; 40-60 vol% sulfolane; 0.5-2.0 M LiPF₆ and 1-3 wt % TTSPi.

[00109] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 1 M LiPF₆ and 0.3 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi).

[00110] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 4-6 volume percent (vol %) dipropyl sulfone with 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆ and 0.1-0.6 weight percent (wt %) TTSPi.

[00111] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF₆ and 1-5 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi).

[00112] In some examples, including any of the foregoing, the electrochemical cell includes a catholyte comprising a solution of 4-6 volume percent (vol %) dipropyl sulfone with 40-60 vol% ethylene carbonate and 40-60 vol% sulfolane, and 0.5-2.0 M LiPF_6 and 1-3 weight percent (wt %) TTSPi.

IV. LITHIUM-STUFFED GARNET ELECTROLYTE SEPARATORS

[00113] In some examples, set forth herein is a lithium-stuffed garnet electrolyte with a surface layer of a strong Lewis acid.

[00114] In some examples, set forth herein is a lithium-stuffed garnet solid-state electrolyte having at least one surface passivated with a strong Lewis Acid.

[00115] In some examples, set forth herein is a lithium-stuffed garnet electrolyte with a surface layer substantially as shown in any one of FIGs. 7-17.

V. PROCESSES FOR MAKING ELECTROCHEMICAL CELLS

[00116] A process for making an electrochemical cell, including: providing a positive electrode infiltrated with a catholyte, the catholyte including: a lithium salt; a first solvent selected from the group consisting of sulfolane, 1,3-propane sultone, sulfolene, thiophene, and combinations thereof; a second solvent; and a strong Lewis acid additive; providing a sintered lithium-stuffed garnet solid-state separator; and contacting the sintered lithium-stuffed garnet solid-state separator to the positive electrode.

[00117] In some examples, including any of the foregoing, the contacting is between one side of the sintered lithium-stuffed garnet thin film or pellet and one side of the positive electrode.

[00118] In some examples, including any of the foregoing, the process includes providing a negative electrode which includes lithium metal.

[00119] In some examples, including any of the foregoing, the solid-state electrolyte is a thin film.

[00120] In some examples, including any of the foregoing, the solid-state electrolyte is a sintered lithium-stuffed garnet thin film.

[00121] In some examples, including any of the foregoing, the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.

[00122] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0 M to 1.4 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0 M to 1.4 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M.

[00123] In some examples, the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), at a concentration of 0.5 M to 2.0 M.

[00124] In some examples, including any of the foregoing, the lithium salt is present at a concentration of about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, or about 1.5 M.

[00125] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, about 1.0 M, about 1.05, about 1.10, about 1.15, about 1.2, about 1.25, about 1.30, about 1.35, about 1.4, about 1.45, or about 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M.

[00126] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5

M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M.

[00127] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[00128] In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the

foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.55 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.6 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.65 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.7 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.75 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.8 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.85 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.9 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.95 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[00129] In some examples, including any of the foregoing, the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile,

suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO), ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoxolane-2-carbonitrile, and combinations thereof. In some examples, the combinations are those combinations which are miscible.

[00130] In some examples, including any of the foregoing, the second solvent is selected from dimethyl carbonate (DMC). In some examples, including any of the foregoing, the second solvent is selected from ethyl-methyl carbonate (EMC). In some examples, including any of the foregoing, the second solvent is selected from propylmethyl carbonate. In some examples, including any of the foregoing, the second solvent is selected from nitroethyl carbonate. In some examples, including any of the foregoing, the second solvent is selected from propylene carbonate (PC). In some examples, including any of the foregoing, the second solvent is selected from diethyl carbonate (DEC). In some examples, including any of the foregoing, the second solvent is selected from methyl propyl carbonate (MPC). In some examples, including any of the foregoing, the second solvent is selected from 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF). In some examples, including any of the foregoing, the second solvent is selected from γ -butyrolactone (GBL). In some examples, including any of the foregoing, the second solvent is selected from gamma butyl-lactone. In some examples, including any of the foregoing, the second solvent is selected from fluoroethylene carbonate (FEC). In some examples, including any of the foregoing, the second solvent is selected from fluoromethyl ethylene carbonate (FMEC). In some examples, including any of the foregoing, the second solvent is selected from trifluoroethyl methyl carbonate (F-EMC). In some examples, including any of the foregoing, the second solvent is selected from fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE). In some examples, including any of the foregoing, the second solvent is selected from fluorinated cyclic carbonate (F-AEC). In some examples, including any of the foregoing, the second solvent is selected from dioxolane. In some examples, including any of the foregoing, the second solvent is selected from prop-1-ene-1,3-sultone (PES). In some examples, including any of the foregoing, the second solvent is selected from sulfolane. In some examples, including any of the foregoing, the second solvent is selected from acetonitrile (ACN). In some examples, including any of the foregoing, the second solvent is selected from succinonitrile (SCN). In some examples, including any of the foregoing, the second solvent is selected from pimelonitrile. In some

examples, including any of the foregoing, the second solvent is selected from suberonitrile. In some examples, including any of the foregoing, the second solvent is selected from propionitrile. In some examples, including any of the foregoing, the second solvent is selected from propanedinitrile. In some examples, including any of the foregoing, the second solvent is selected from glutaronitrile (GLN). In some examples, including any of the foregoing, the second solvent is selected from adiponitrile (ADN). In some examples, including any of the foregoing, the second solvent is selected from hexanedinitrile. In some examples, including any of the foregoing, the second solvent is selected from pentanedinitrile. In some examples, including any of the foregoing, the second solvent is selected from acetophenone. In some examples, including any of the foregoing, the second solvent is selected from isophorone. In some examples, including any of the foregoing, the second solvent is selected from benzonitrile. In some examples, including any of the foregoing, the second solvent is selected from ethyl propionate. In some examples, including any of the foregoing, the second solvent is selected from methyl propionate. In some examples, including any of the foregoing, the second solvent is selected from methylene methanedisulfonate. In some examples, including any of the foregoing, the second solvent is selected from dimethyl sulfate. In some examples, including any of the foregoing, the second solvent is selected from dimethyl sulfoxide (DMSO). In some examples, including any of the foregoing, the second solvent is selected from ethyl acetate. In some examples, including any of the foregoing, the second solvent is selected from methyl butyrate. In some examples, including any of the foregoing, the second solvent is selected from dimethyl ether (DME). In some examples, including any of the foregoing, the second solvent is selected from diethyl ether. In some examples, including any of the foregoing, the second solvent is selected from dioxolane. In some examples, including any of the foregoing, the second solvent is selected from methyl benzoate. In some examples, including any of the foregoing, the second solvent is selected from 2-methyl-5-oxoxolane-2-carbonitrile. In some examples, the combinations are those combinations which are miscible.

[00131] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate, dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylene carbonate (PC), diethyl carbonate (DEC), fluoroethylene carbonate (FEC), prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), glutaronitrile (GLN), adiponitrile (ADN), and combinations thereof.

[00132] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate.

[00133] In some examples, including any of the foregoing, the catholyte has a viscosity of less than 15 mPa-s at 20 °C.

[00134] In some examples, including any of the foregoing, the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm.

[00135] In some examples, including any of the foregoing, the process further includes a third solvent selected from a linear sulfone.

[00136] In some examples, including any of the foregoing, the linear sulfone is present at 0 vol % to 15 vol %.

[00137] In some examples, including any of the foregoing, the linear sulfone is present at 5 vol % to 10 vol %.

[00138] In some examples, including any of the foregoing, the linear sulfone is selected from the group consisting of ethyl methyl sulfone, dimethyl sulfone, dibutyl sulfone, allyl methyl sulfone, ethyl sulfone, dipropyl sulfone, ethyl phenyl sulfone, diethyl sulfate, dimethyl sulfate, and combinations thereof.

[00139] In some examples, including any of the foregoing, the linear sulfone is selected from the group consist of dibutylsulfone, dipropylsulfone, and combinations thereof.

[00140] In some examples, including any of the foregoing, the catholyte is a eutectic mixture of solvents.

[00141] In some examples, including any of the foregoing, the eutectic mixture melts at less than 30 °C.

[00142] In some examples, including any of the foregoing, the sulfolane is the solvent present in the catholyte in the largest volume percent.

[00143] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is from 30:70 v/v to 50:50 v/v.

[00144] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is either 50:50 or 45:55 v/v.

[00145] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is from 30:70 v/v to 50:50 v/v.

[00146] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is either 50:50 or 45:55 v/v.

[00147] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, and/or H₂O.

[00148] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, and H₂O.

[00149] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with the surface of lithium-stuffed garnet.

[00150] In some examples, including any of the foregoing, the strong Lewis Acid binds to the surface of lithium-stuffed garnet stronger than it binds to a lithium salt selected from the group consisting of lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF₄, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).

[00151] In some examples, including any of the foregoing, the strong Lewis acid additive is a F- getter from HF.

[00152] In some examples, including any of the foregoing, the strong Lewis acid additive is an OH- getter from H₂O.

[00153] In some examples, including any of the foregoing, the strong Lewis acid additive is a trivalent phosphite, phosphate, or borate compound.

[00154] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi), tris(trimethylsilyl) phosphate (TTSP), trimethoxyboroxine (C₃H₉B₃O₆, TMOBX), vinylene carbonate (VC), vinyl ethylene carbonate (VEC), methylene methane disulfonate (MMDS), prop-1-ene-1,3 sultone (PES), fluoroethylene carbonate (FEC), LiTFSi, LiBOB, 1,3-propane sultone (PS), succinonitrile, methylene methanedisulfonate (MMDS), trimethylene sulfate (TMS), triallyl phosphate (TAP), tris(trimethylsilyl) borate, (TMSB) or tris(pentafluorophenyl)borane (TPFPB), and combinations thereof.

[00155] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi).

tris(trimethylsilyl) phosphate (TTSP). [00152] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from trimethoxyboroxine

(C₃H₉B₃O₆. [00152] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from TMOBX). [00152] In some examples, including any

of the foregoing, the strong Lewis acid additive is selected from vinylene carbonate (VC).

[00152] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from vinyl ethylene carbonate (VEC). In some examples, including any of

the foregoing, the strong Lewis acid additive is selected from methylene methane disulfonate (MMDS). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from prop-1-ene-1. In some examples, including any of the foregoing, the strong Lewis acid additive is selected from 3 sultone (PES). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from fluoroethylene carbonate (FEC). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from LiTFSi. In some examples, including any of the foregoing, the strong Lewis acid additive is selected from LiBOB. In some examples, including any of the foregoing, the strong Lewis acid additive is selected from 1,3-propane sultone (PS). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from succinonitrile. In some examples, including any of the foregoing, the strong Lewis acid additive is selected from methylene methanedisulfonate (MMDS). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from trimethylene sulfate (TMS). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from triallyl phosphate (TAP). In some examples, including any of the foregoing, the strong Lewis acid additive is selected from tris(trimethylsilyl) borate. In some examples, including any of the foregoing, the strong Lewis acid additive is selected from (TMSB) or tris(pentafluorophenyl)borane (TPFPB).

[00156] In some examples, including any of the foregoing, the strong Lewis acid additive is TTSPi and/or TTSP.

[00157] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting TTSPi and TTSP.

[00158] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of TMOBX and vinylene carbonate.

[00159] In some examples, including any of the foregoing, the strong Lewis acid additive is VC.

[00160] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and MMDS.

[00161] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and/or PES.

[00162] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of PES, MDS, and TTSP.

[00163] In some examples, including any of the foregoing, the strong Lewis acid additive includes 2 wt. % PES.

[00164] In some examples, including any of the foregoing, the strong Lewis acid additive includes 1 wt % MMDS and 1 wt % TTSPi.

[00165] In some examples, including any of the foregoing, the catholyte includes 1.4M LiPF₆, 45 v/v EC, 50 v/v sulfolane, and 5 v/v dibutylsulfone.

[00166] In some examples, including any of the foregoing, the Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture.

[00167] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by the chemical formula $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} + y\text{Al}_2\text{O}_3$, wherein x is from 5.8 to 7.0, and y is 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, or 1.0.

[00168] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_A\text{La}_B\text{M}'\text{C}^{\text{M}''}\text{DZrEOf}$, $\text{Li}_A\text{La}_B\text{M}'\text{C}^{\text{M}''}\text{DTaEO}_F$, and $\text{Li}_A\text{La}_B\text{M}'\text{C}^{\text{M}''}\text{DNbEO}_F$, wherein $4 < A < 8.5$, $1.5 < B < 4$, $0 \leq C < 2$, $0 \leq D < 2$, $0 < E < 2$, $10 < F < 14$, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta. In some examples, M' and M'' are the same element selected from the from the group consisting of Al, Mo, W, Nb, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta. However, unless stated explicitly to the contrary, M' and M'' are not the same element.

[00169] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Me}^e\text{Of}$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 \leq d < 2$; $0 \leq e < 2$, $10 < f < 14$, and wherein Me'' is a metal selected from the group consisting of Nb, Ta, V, W, Mo, and Sb.

[00170] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Of}$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 \leq d < 2$; $10 < f < 14$.

[00171] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.35\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[00172] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.5\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[00173] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.65\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

[00174] In some examples, including any of the foregoing, the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot \text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.

VI. PROCESSES FOR MAKING POSITIVE ELECTRODE CATHOLYTES

[00175] In some examples, set forth herein is a process for making a catholyte. The process includes mixing a lithium salt; a first solvent selected from the group consisting of sulfolane, 1,3-propane sultone, sulfolene, thiophene, and combinations thereof; a second solvent; and a strong Lewis acid additive.

[00176] In some examples, this catholyte is used to soak a positive electrode before it contacts a lithium-stuffed garnet solid-state separator.

[00177] In some examples, including any of the foregoing, the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.

[00178] In some examples, including any of the foregoing, the lithium salt is LiPF_6 .

[00179] In some examples, including any of the foregoing, the lithium salt is lithium bis(perfluoroethanesulfonyl)imide (LIBETI).

[00180] In some examples, including any of the foregoing, the lithium salt is bis(trifluoromethane)sulfonimide lithium salt (LiTFSI).

[00181] In some examples, including any of the foregoing, the lithium salt is LiBF_4 .

[00182] In some examples, including any of the foregoing, the lithium salt is LiAsF_6 .

[00183] In some examples, including any of the foregoing, the lithium salt is lithium bis(fluorosulfonyl)imide (LiFSI).

[00184] In some examples, including any of the foregoing, the lithium salt is LiBF_4 or LiPF_6 .

[00185] In some examples, including any of the foregoing, the lithium salt is LiBF_4 and LiPF_6 .

[00186] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M.

[00187] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M.

[00188] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0M to 1.4 M.

[00189] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0 M to 1.4 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, or about 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, about 1.0 M, about 1.05, about 1.10, about 1.15, about 1.2, about 1.25, about 1.30, about 1.35, about 1.4, about 1.45, or about 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is about 0.5 M to about 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M. In some examples, including any of the foregoing, the concentration is 0.55 M. In some examples, including any of the foregoing, the concentration is 0.6 M. In some examples, including any of the foregoing, the concentration is 0.65 M. In some examples, including any of the foregoing, the concentration is 0.7 M. In some examples, including any of the foregoing, the concentration is 0.75 M. In some examples, including any of the foregoing, the concentration is 0.8 M. In some examples, including any of the foregoing, the concentration is 0.85 M. In some examples, including any of the foregoing, the concentration is 0.9 M. In some examples, including any of the foregoing, the concentration is 0.95 M. In some examples, including any of the foregoing, the concentration is 1.5 M. In some examples, including any of the foregoing, the concentration is about 0.5 M. In some examples, including any of the foregoing, the concentration is about 0.55 M. In some examples, including any of the foregoing, the concentration is about 0.6 M. In some examples, including any of the foregoing, the concentration is about 0.65 M. In some examples, including any of the foregoing, the

concentration is about 0.7 M. In some examples, including any of the foregoing, the concentration is about 0.75 M. In some examples, including any of the foregoing, the concentration is about 0.8 M. In some examples, including any of the foregoing, the concentration is about 0.85 M. In some examples, including any of the foregoing, the concentration is about 0.9 M. In some examples, including any of the foregoing, the concentration is about 0.95 M. In some examples, including any of the foregoing, the concentration is about 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[00190] In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 2.0 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M to 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 1.0 M to 1.4 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the lithium salt is present at a concentration of 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, or 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration of lithium salt in the solution is 0.5 M to 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M, 0.55 M, 0.6 M, 0.65 M, 0.7 M, 0.75 M, 0.8 M, 0.85 M, 0.9 M, 0.95 M, 1.0 M, 1.05, 1.10, 1.15, 1.2, 1.25, 1.30, 1.35, 1.4, 1.45, or 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M. In some examples, including any of the foregoing, the concentration is 0.55 M. In some examples, including any of the foregoing, the concentration is 0.6 M. In some examples, including any of the foregoing, the concentration is 0.65 M. In some examples, including any of the foregoing, the concentration is 0.7 M. In some examples, including any of the foregoing, the concentration is 0.75 M. In some examples, including any of the foregoing, the concentration is 0.8 M. In some examples, including any of the foregoing, the concentration is 0.85 M. In some examples, including any of the foregoing, the concentration is 0.9 M. In some examples, including any of the foregoing, the concentration is 0.95 M. In

some examples, including any of the foregoing, the concentration is 1.5 M. In some examples, including any of the foregoing, the concentration is 0.5 M. In some examples, including any of the foregoing, the concentration is 0.55 M. In some examples, including any of the foregoing, the concentration is 0.6 M. In some examples, including any of the foregoing, the concentration is 0.65 M. In some examples, including any of the foregoing, the concentration is 0.7 M. In some examples, including any of the foregoing, the concentration is 0.75 M. In some examples, including any of the foregoing, the concentration is 0.8 M. In some examples, including any of the foregoing, the concentration is 0.85 M. In some examples, including any of the foregoing, the concentration is 0.9 M. In some examples, including any of the foregoing, the concentration is 0.95 M. In some examples, including any of the foregoing, the concentration is 1.5 M. In some examples, including any of the foregoing, the first solvent is sulfolane.

[00191] In some examples, including any of the foregoing, the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile, suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO), ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoxolane-2-carbonitrile, and combinations thereof. In some examples, the combinations are those which are miscible.

[00192] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate, dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylene carbonate (PC), diethyl carbonate (DEC), fluoroethylene carbonate (FEC), prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), glutaronitrile (GLN), adiponitrile (ADN), and combinations thereof.

[00193] In some examples, including any of the foregoing, the second solvent is selected from ethylene carbonate.

[00194] In some examples, including any of the foregoing, the catholyte has a viscosity of less than 15 mPa-s at 20 °C.

[00195] In some examples, including any of the foregoing, the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm.

[00196] In some examples, including any of the foregoing, the process further includes a third solvent selected from a linear sulfone.

[00197] In some examples, including any of the foregoing, the linear sulfone is present at 0 to 15 vol %.

[00198] In some examples, including any of the foregoing, the linear sulfone is present at 5 to 10 vol %.

[00199] In some examples, including any of the foregoing, the linear sulfone is selected from the group consisting of ethyl methyl sulfone, dimethyl sulfone, dibutyl sulfone, allyl methyl sulfone, ethyl sulfone, dipropyl sulfone, ethyl phenyl sulfone, diethyl sulfate, dimethyl sulfate, and combinations thereof.

[00200] In some examples, including any of the foregoing, the linear sulfone is selected from the group consist of dibutylsulfone, dipropylsulfone, and combinations thereof.

[00201] In some examples, including any of the foregoing, the catholyte is a eutectic mixture of solvents.

[00202] In some examples, including any of the foregoing, the eutectic mixture melts at less than 35 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 34 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 33 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 32 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 31 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 30 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 29 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 28 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 27 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 26 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 25 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 24 °C. In some examples, including any of the foregoing, the eutectic mixture melts at less than 23

43

greater than 22 °C. In some examples, the eutectic mixture melts at greater than 21 °C. In some examples, the eutectic mixture melts at greater than 20 °C. In some examples, the eutectic mixture melts at greater than 19 °C. In some examples, the eutectic mixture melts at greater than 18 °C. In some examples, the eutectic mixture melts at greater than 17 °C. In some examples, the eutectic mixture melts at greater than 16 °C. In some examples, the eutectic mixture melts at greater than 15 °C. In some examples, the eutectic mixture melts at greater than 14 °C. In some examples, the eutectic mixture melts at greater than 13 °C. In some examples, the eutectic mixture melts at greater than 12 °C. In some examples, the eutectic mixture melts at greater than 11 °C. In some examples, the eutectic mixture melts at greater than 10 °C. In some examples, the eutectic mixture melts at greater than 9 °C. In some examples, the eutectic mixture melts at greater than 8 °C. In some examples, the eutectic mixture melts at greater than 7 °C. In some examples, the eutectic mixture melts at greater than 6 °C. In some examples, the eutectic mixture melts at greater than 5 °C. In some examples, the eutectic mixture melts at greater than 4 °C. In some examples, the eutectic mixture melts at greater than 3 °C. In some examples, the eutectic mixture melts at greater than 2 °C. In some examples, the eutectic mixture melts at greater than 1 °C. In some examples, the eutectic mixture melts at greater than 0 °C. In some examples, the eutectic mixture melts at a temperature between the temperatures recited in this paragraph.

[00203] In some examples, including any of the foregoing, the sulfolane is the solvent present in the catholyte in the largest volume percent.

[00204] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is from 30:70 v/v to 50:50 v/v.

[00205] In some examples, including any of the foregoing, the ratio of the second solvent to the first solvent is either 50:50 v/v or 45:55 v/v.

[00206] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is from 30:70 v/v to 50:50 v/v.

[00207] In some examples, including any of the foregoing, the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is either 50:50 v/v or 45:55 v/v.

[00208] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, and/or H₂O.

[00209] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with F, OH, HF, and H₂O.

[00210] In some examples, including any of the foregoing, the strong Lewis acid additive competitively binds with the surface of lithium-stuffed garnet.

[00211] In some examples, including any of the foregoing, the strong Lewis Acid binds to the surface of lithium-stuffed garnet stronger than it binds to a lithium salt selected from the group consisting of lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide lithium salt (LiTFSI), LiBF₄, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).

[00212] In some examples, including any of the foregoing, the strong Lewis acid additive is a F- getter from HF.

[00213] In some examples, including any of the foregoing, the strong Lewis acid additive is an OH- getter from H₂O.

[00214] In some examples, including any of the foregoing, the strong Lewis acid additive is a trivalent phosphite, phosphate, or borate compound.

[00215] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi), tris(trimethylsilyl) phosphate (TTSP), trimethoxyboroxine (C₃H₉B₃O₆, TMOBX), vinylene carbonate (VC), vinyl ethylene carbonate (VEC), methylene methane disulfonate (MMDS), prop-1-ene-1,3 sultone (PES), fluoroethylene carbonate (FEC), LiTFSi, LiBOB, 1,3-propane sultone (PS), succinonitrile, methylene methanedisulfonate (MMDS), trimethylene sulfate (TMS), triallyl phosphate (TAP), tris(trimethylsilyl) borate, (TMSB) or tris(pentafluorophenyl)borane (TPFPB), and combinations thereof.

[00216] In some examples, including any of the foregoing, the strong Lewis acid additive is TTSPi and/or TTSP.

[00217] In some examples, including any of the foregoing, the strong Lewis acid additive is selected from the group consisting TTSPi and TTSP.

[00218] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of TMOBX and vinylene carbonate.

[00219] In some examples, including any of the foregoing, the strong Lewis acid additive is VC.

[00220] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and MMDS.

[00221] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of VC and/or PES.

[00222] In some examples, including any of the foregoing, the strong Lewis acid additive is a combination of PES, MDS, and TTSPi.

[00223] In some examples, including any of the foregoing, the strong Lewis acid additive includes 2 wt. % PES

[00224] In some examples, including any of the foregoing, the strong Lewis acid additive includes 1 wt % MMDS and 1 wt % TTSPi.

[00225] In some examples, TTSPi is present in the catholyte solution at about 0.5 wt % to about 4 wt %, about 0.5 wt % to about 3 wt %, about 0.5 wt % to about 2 wt %, or about 0.5 wt % to about 1 wt %. In some examples, TTSPi is present in the catholyte solution at about 1 wt % to about 2 wt %.

[00226] In some examples, MMDS is present in the catholyte solution at about 0.5 wt % to about 4 wt %, about 0.5 wt % to about 3 wt %, about 0.5 wt % to about 2 wt %, or about 0.5 wt % to about 1 wt %. In some examples, MMDS is present in the catholyte solution at about 1 wt % to about 2 wt %.

[00227] In some examples, including any of the foregoing, the catholyte comprises about 0.5 wt % to about 4 wt % MMDS, and 0.5 wt % to about 4 wt % TTSPi. In some examples, including any of the foregoing, the catholyte comprises about 0.5 wt % to about 2 wt % MMDS, and 0.5 wt % to about 2 wt % TTSPi. In some examples, including any of the foregoing, the catholyte comprises about 0.5 wt % to about 1 wt % MMDS, and 0.5 wt % to about 1 wt % TTSPi.

[00228] In some examples, the catholyte comprises MMDS and TTSPi in about a 1:1 wt % ratio. In some examples, the catholyte comprises MMDS and TTSPi in about a 10:1 wt % ratio to about a 1:10 wt % ratio.

[00229] In some examples, including any of the foregoing, the catholyte includes 1.4 M LiPF₆, 45 v/v EC, 50 v/v sulfolane, and 5 v/v dibutylsulfone.

[00230] In some examples, including any of the foregoing, the Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture

[00231] In some examples, including any of the foregoing, the second solvent is ethylene carbonate (EC). In some examples, including any of the foregoing, the second solvent is diethylene carbonate. In some examples, including any of the foregoing, the second solvent is dimethyl carbonate (DMC). In some examples, including any of the foregoing, the second solvent is ethyl-methyl carbonate (EMC). In some examples, including any of the foregoing, the second solvent is propylmethyl carbonate. In some examples, including any of

the foregoing, the second solvent is nitroethyl carbonate. In some examples, including any of the foregoing, the second solvent is propylene carbonate (PC). In some examples, including any of the foregoing, the second solvent is diethyl carbonate (DEC). In some examples, including any of the foregoing, the second solvent is methyl propyl carbonate (MPC). In some examples, including any of the foregoing, the second solvent is 2,5-dioxahexanedioic acid dimethyl ester. In some examples, including any of the foregoing, the second solvent is tetrahydrofuran (THF). In some examples, including any of the foregoing, the second solvent is γ -butyrolactone (GBL). In some examples, including any of the foregoing, the second solvent is fluoroethylene carbonate (FEC). In some examples, including any of the foregoing, the second solvent is fluoromethyl ethylene carbonate (FMEC). In some examples, including any of the foregoing, the second solvent is trifluoroethyl methyl carbonate (F-EMC). In some examples, including any of the foregoing, the second solvent is fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE). In some examples, including any of the foregoing, the second solvent is fluorinated cyclic carbonate (F-AEC). In some examples, including any of the foregoing, the second solvent is dioxolane. In some examples, including any of the foregoing, the second solvent is prop-1-ene-1,3-sultone (PES). In some examples, including any of the foregoing, the second solvent is sulfolane. In some examples, including any of the foregoing, the second solvent is acetonitrile (ACN). In some examples, including any of the foregoing, the second solvent is succinonitrile (SCN). In some examples, including any of the foregoing, the second solvent is pimelonitrile. In some examples, including any of the foregoing, the second solvent is suberonitrile. In some examples, including any of the foregoing, the second solvent is propionitrile. In some examples, including any of the foregoing, the second solvent is propanedinitrile. In some examples, including any of the foregoing, the second solvent is glutaronitrile (GLN). In some examples, including any of the foregoing, the second solvent is adiponitrile (ADN). In some examples, including any of the foregoing, the second solvent is hexanedinitrile. In some examples, including any of the foregoing, the second solvent is pentanedinitrile. In some examples, including any of the foregoing, the second solvent is acetophenone. In some examples, including any of the foregoing, the second solvent is isophorone. In some examples, including any of the foregoing, the second solvent is benzonitrile. In some examples, including any of the foregoing, the second solvent is ethyl propionate. In some examples, including any of the foregoing, the second solvent is methyl propionate. In some examples, including any of the foregoing, the second solvent is methylene methanedisulfonate. In some examples, including

any of the foregoing, the second solvent is dimethyl sulfate. dimethyl sulfoxide (DMSO). In some examples, including any of the foregoing, the second solvent is ethyl acetate. In some examples, including any of the foregoing, the second solvent is methyl butyrate. In some examples, including any of the foregoing, the second solvent is dimethyl ether (DME). In some examples, including any of the foregoing, the second solvent is diethyl ether. In some examples, including any of the foregoing, the second solvent is dioxolane. In some examples, including any of the foregoing, the second solvent is gamma butyl- lactone In some examples, including any of the foregoing, the second solvent is methyl benzoate. In some examples, including any of the foregoing, the second solvent is 2-methyl-5-oxoxolane-2-carbonitrile. In some examples, including any of the foregoing, the second solvent is selected from the group consisting of succinonitrile (SCN), glutaronitrile (GLN), sulfolane, ethylene carbonate (EC), ethyl-methyl carbonate (EMC), and combinations thereof.

[00232] In some examples, including any of the foregoing, the catholyte comprises any solution or electrolyte disclosed in US Patent Application Publication No. US20170331092A1, which published November 16, 2017, titled as Solid electrolyte separator bonding agent, the entire content of the application is incorporated by reference in its entirety for all purposes.

[00233] In some examples, including any of the foregoing, the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm. The water content of the solvent or the full electrolyte mixture moisture is measured by Karl Fischer coulometric titration, using a Mettler Toledo C20. The catholyte “Coulomat CG-K” and the anolyte “Hydranal AK” are used in the titration and the electrolyte is directly injected into the system for moisture analysis.

[00234] In some examples, including any of the foregoing, the catholyte includes a solution selected from those disclosed in US Patent Application Publication No. US20170331092A1, which published November 16, 2017, titled as SOLID ELECTROLYTE SEPARATOR BONDING AGENT, the entire content of the application is incorporated by reference in its entirety for all purposes.

[00235] In some examples, including any of the foregoing, the temperature of the process is about 20 °C. In some examples, including any of the foregoing, the temperature of the process is about 25 °C. In some examples, including any of the foregoing, the temperature of the process is about 30 °C. In some examples, including any of the foregoing, the

temperature of the process is about 35 °C. In some examples, including any of the foregoing, the temperature of the process is about 40 °C. In some examples, including any of the foregoing, the temperature of the process is about 45 °C. In some examples, including any of the foregoing, the temperature of the process is about 50 °C. In some examples, including any of the foregoing, the temperature of the process is about 55 °C. In some examples, including any of the foregoing, the temperature of the process is about 60 °C. In some examples, including any of the foregoing, the temperature of the process is selected from the group consisting of 20 °C, 25 °C, and 30 °C. In some embodiments, the at least a surface of a sintered thin film garnet is soaked in the electrolyte solution at a temperature that ranges from about 20 to about 60°C. In some embodiments, the temperature ranges from 20 to 25°C, 20 to 30°C, 20 to 35°C, 20 to 40°C, 20 to 45°C, 20 to 50°C, 25 to 30°C, 25 to 35°C, 25 to 40°C, 30 to 35°C, 30 to 40°C, 35 to 40°C, 35 to 45°C, 35 to 50°C, or 40 to 50°C.

[00236] In some embodiments, the temperature is selected from the group consisting of about 20°C, about 25°C, about 30°C, about 35°C, about 40°C, about 45°C, about 50°C, and about 55°C.

[00237] In some embodiments, the temperature is selected from the group consisting of 20°C, 25°C, 30°C, 35°C, 40°C, 45°C, 50°C, and 55°C.

[00238] In some embodiments, the temperature is 35 °C, 40 °C, 45 °C, 50 °C, 55 °C, or 60 °C.

[00239] In some embodiments, the temperature is 60 °C.

[00240] In some examples, including any of the foregoing, the temperature is 60 °C.

[00241] In some examples, including any of the foregoing, the top surface or bottom surface, or both, are fluorinated and comprise trace amounts of contaminants. In some examples, the trace amount of contaminant is less than 1.0 wt %, 0.9 wt %, 0.8 wt %, 0.7 wt %, 0.6 wt %, 0.5 wt %, 0.4 wt %, 0.3 wt %, 0.2 wt %, or 0.1 wt %.

VII. METHOD OF USING A CATHOLYTE OR ELECTROCHEMICAL CELL SET FORTH HEREIN

[00242] In some examples, set forth herein is a method of using an electrochemical cell, set forth herein, including holding the electrochemical cell at a voltage of 3.9 V (v. Li) or greater.

[00243] In some examples, the voltage is less than 5V (v. Li). In some examples, the voltage is less than 4.9V (v. Li). In some examples, the voltage is less than 4.8V (v. Li). In some examples, the voltage is less than 4.7V (v. Li). In some examples, the voltage is less

than 4.6V (v. Li). In some examples, the voltage is less than 4.5V (v. Li). In some examples, the voltage is less than 4.3V (v. Li). In some examples, the voltage is less than 4.2V (v. Li). In some examples, the voltage is less than 4.1V (v. Li). In some examples, the voltage is less than 4V (v. Li). In some examples, the voltage is held for at least 1 hour, at least 1 day, at least 30 days, or at least 1 year.

[00244] In some examples, including any of the foregoing, the electrochemical cell is at a 100% state-of-charge. In some examples, including any of the foregoing, the electrochemical cell is at a 90% state-of-charge. In some examples, including any of the foregoing, the electrochemical cell is at a 80% state-of-charge. In some examples, including any of the foregoing, the electrochemical cell is at a 70% state-of-charge. In some examples, including any of the foregoing, the electrochemical cell is at a 60% state-of-charge. In some examples, including any of the foregoing, the electrochemical cell is at a 50% state-of-charge.

[00245] In some examples, including any of the foregoing, the electrochemical cell is at a 100% state-of-charge.

[00246] In some examples, including any of the foregoing, the ASR of the electrochemical cell is stable to within 10 % for at least 1 day.

[00247] In some examples, including any of the foregoing, the ASR of the electrochemical cell is stable to within 10 % for at least 30 days.

[00248] In some examples, including any of the foregoing, the interfacial lithium-stuffed garnet/positive electrode ASR of the electrochemical cell is stable to within 10 % for at least 1 day.

[00249] In some examples, including any of the foregoing, the interfacial lithium-stuffed garnet/positive electrode ASR of the electrochemical cell is stable to within 10 % for at least 30 days.

[00250] In some examples, including any of the foregoing, the method includes charging and discharging the electrochemical cell between 0 and 4.5 V.

[00251] In some examples, set forth herein is a method of using an electrochemical cell set forth herein, including holding the electrochemical cell at a voltage of 3.9 V (v. Li) or greater.

[00252] In some examples, including any of the foregoing, the voltage is less than 5V (v. Li).

[00253] In some examples, including any of the foregoing, the method further includes charging and discharging the electrochemical cell between 0 and 4.5 V.

[00254] In some examples, including any of the foregoing, set forth herein is a method including, providing a catholyte or electrochemical cell set forth herein and holding the catholyte or electrochemical cell at high voltage for an extended period of time.

[00255] In some examples, including any of the foregoing, the high voltage is a voltage higher than 4 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage higher than 4.1 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage higher than 4.2 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage higher than 4.3 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage higher than 4.4 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage higher than 4.5 V (v. Li). In some examples, including any of the foregoing, the high voltage is a voltage less than 5 V (v. Li).

[00256] In some examples, including any of the foregoing, the interface between a lithium-stuffed garnet separator and a positive electrode does not show an appreciable increase in ASR during the extended period of time. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 50% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 40% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 30% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 20% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 10% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 9% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 8% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 7% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 6% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 5% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 4% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 3% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 2% or more. In some examples, including any of the foregoing, an appreciable increase in ASR is an increase in ASR of 1% or more.

[00257] In some examples, including any of the foregoing, the extended period of time is at least 1 minute.

[00258] In some examples, including any of the foregoing, the extended period of time is at least 60 minutes. In some examples, including any of the foregoing, the extended period of time is at least 1 hour. In some examples, including any of the foregoing, the extended period of time is at least 1 day. In some examples, including any of the foregoing, the extended period of time is at least 1 week. In some examples, including any of the foregoing, the extended period of time is at least 1 month. In some examples, including any of the foregoing, the extended period of time is at least 1 year. In some examples, including any of the foregoing, the extended period of time is less than 10 years.

[00259] In some examples, including any of the foregoing, the ASR of the lithium-stuffed garnet separator does not vary by more than 10% over a surface area of at least 10 mm².

[00260] In some examples, including any of the foregoing, the ASR of the lithium-stuffed garnet separator does not vary by more than 10% as a function of time for at least 1 day.

[00261] In some examples, including any of the foregoing, the ASR of the lithium-stuffed garnet separator does not vary by more than 10% as a function of time for at least 365 day.

[00262] In some examples, including any of the foregoing, the ASR of the lithium-stuffed garnet separator does not increase by more than 10%.

[00263] In some examples, including any of the foregoing, the area specific resistance (ASR) less than 100 Ωcm^2 at 45 °C. In some examples, the ASR is less than 90, 80, 70, 60, 50, 40, 30, 20, or 10 Ωcm^2 at 45 °C.

[00264] In some examples, including any of the foregoing, the ASR is less than 30 Ωcm^2 at 45°C. In some examples, the ASR is less than 10 Ωcm^2 at 45°C. In some examples, the ASR is less than 5 Ωcm^2 at 45°C. In some examples, the ASR is less than 30 Ωcm^2 at 25°C. In some examples, the ASR is less than 10 Ωcm^2 at 25°C.

[00265] In some examples, including any of the foregoing, the ASR stability is as shown in **FIG. 2** or **FIG. 5**. In some examples, the ASR is less than 10 Ωcm^2 at 25°C.

VIII. DEVICES AND VEHICLES

[00266] In some examples, set forth herein is an electrochemical device including an electrolyte set forth herein.

[00267] In some examples, set forth herein is an electrochemical device including a catholyte set forth herein.

[00268] In some examples, set forth herein is an electrochemical device including a sintered lithium-stuffed garnet thin film set forth herein.

[00269] In some examples, set forth herein is an electric vehicle including an electrochemical device set forth herein.

[00270] In some examples, set forth herein is an electric vehicle including an electrochemical device which includes a sintered lithium-stuffed garnet thin film set forth herein.

[00271] In some examples, set forth herein is an electric vehicle which includes a sintered lithium-stuffed garnet thin film set forth herein.

[00272] EDS chemical analysis presented in the Examples, herein, shows the changes in surface chemistry of the lithium-stuffed garnet are consistent with surface fluorination and progressive loss of carbonate, when additives are not present and the electrochemical cell is charged above 4.2V.

[00273] In some examples, herein, in addition to eliminating HF from the catholyte, the addition of TTSPi (tris-trimethylsilylphosphite) stabilizes and protects the surface of lithium-stuffed garnet solid-state separators against degradation (oxidation) above 4.2V. For example, catholytes with up to 2wt % TTSPi (1.4M LiPF₆ in ECS) are more stable after 3 day and 7 day potentiostatic holds at 4.3V, 45 °C, when compared to ECS electrolyte without TTSPi. The catholyte garnet interfacial impedance increases by ~1 Ω*cm² per day at this condition, compared to ~5 Ω*cm² per day without the TTSPi additive.

IX. EXAMPLES

[00274] Reagents, chemicals, and materials were commercially purchased unless specified otherwise to the contrary. Pouch cell containers were purchased from Showa Denko. The Electrochemical potentiostat used was an Arbin potentiostat. Electrical impedance spectroscopy (EIS) was performed with a Biologic VMP3, VSP, VSP-300, SP-150, or SP-200. Electron microscopy was performed in a FEI Quanta SEM, a Helios 600i, or a Helios 660 FIB-SEM. XRD was performed in a Bruker D8 Advance ECO or a Rigaku MiniFlex 2 with Cu K-α radiation, 6mm slit width, at a scan time of 76 ms per step or 0.4 seconds per step, and at room temperature. Viscosity is measured by Rheometry on an Anton Parr Modular Compact Rheometer MCR302.

[00275] Milling was performed using a Retsch PM 400 Planetary Ball Mill. Mixing was performed using a Fischer Scientific vortex mixer, a Flaktek speed mixer, or a Primix filmix homogenizer. Casting was performed on a TQC drawdown table. Calendering was performed on an IMC calender. Light scattering was performed on a Horiba, model: Partica, model no: LA-950V2, general term: laser scattering particle size distribution analyzer.

[00276] X-ray photoelectron spectroscopy (XPS) measurements were performed on a Thermo Scientific Model K-Alpha 1 XPS instrument. Monochromatic and Al X-ray source with X-ray energy of 1486.6 eV was used with a spot size of 400 μm . The base pressure when the measurement was conducted is 2×10^{-9} mbar or below.

EXAMPLE 1: MAKING AND TESTING CATHOLYTES

[00277] A series of mixtures were prepared and the viscosity of each mixture analyzed.

[00278] In one series, ethylene carbonate and sulfolane was mixed in volumetric ratios of 1:9, 3:7, and 5:5, respectively. The viscosity for each sample in this series is shown in the left panel of Fig. 1. At 20 °C and a shear rate of 1000 [1/s], the viscosity of ethylene carbonate: sulfolane solutions range from 5 to 11 mPa-s.

[00279] In a second series, sulfolane was mixed with ethyl methyl sulfone in volumetric ratios of 7:3, 8:2, and 9:1, respectively. The viscosity for each sample in this series is shown in the right panel of Fig. 1. At 20 °C and a shear rate of 1000 [1/s], the viscosity of ethyl methyl sulfone: sulfolane solutions were less than 15 mPa-s.

EXAMPLE 2: MAKING AN ELECTROCHEMICAL CELL HAVING CATHOLYTES WITH AND WITHOUT ADDITIVES

[00280] This Example demonstrates a process for making an electrochemical cell.

[00281] Electrochemical cells were assembled in Swagelok cells.

[00282] Three catholyte solutions (**Catholyte Solution A**, **Catholyte Solution B**, and **Catholyte Solution C**) were prepared. The solutions were first mixed and then the lithium salts and additives were added last. Additives are reported on a per mass basis, with respect to the mass of the catholyte solution into which the additives are added. Solvent components to solutions are reported on a per volume basis, with respect to the total volume of the catholyte solution.

[00283] **Catholyte Solution A** included 45 vol% ethylene carbonate and 55 vol% sulfolane. The catholyte also included 1M LiPF₆.

[00284] **Catholyte Solution B** included 45 vol% ethylene carbonate and 55 vol% sulfolane. The catholyte also included 1M LiPF₆ and 0.3 weight percent (wt %) tris(trimethylsilyl) phosphite (TTSPi).

[00285] **Catholyte Solution C** included 5 volume percent (vol %) dipropyl sulfone with 45 vol% ethylene carbonate and 50 vol% sulfolane. The catholyte also included 1M LiPF₆ and 0.3 weight percent (wt %) TTSPi.

[00286] A positive electrode was prepared. The positive electrode had 4mAh*cm² loading on aluminum foil; the active region was 90-120 μm thick and had approximately 70 vol% active material of NMC 622 with particle size d₅₀ 6-20 μm. The cathode was calendered and infiltrated with a **Catholyte Solutions A, B, or C**.

[00287] Lithium-stuffed garnet thin film solid-state electrolyte separators were prepared. Certain procedures in US Patent Application Publication No. US20170214084A1, which published May 8, 2018, entitled ANNEALED GARNET ELECTROLYTE SEPARATORS, the entire contents of which are herein incorporated by reference in their entirety for all purposes, were employed. Lithium-Stuffed Garnet Powder was prepared. Calcined lithium-stuffed garnet powder was produced by the following series of steps. First, lithium hydroxide (LiOH), aluminum nitrate [Al(NO₃)₃·9H₂O], zirconia (ZrO₂), and lanthanum oxide (La₂O₃) were massed (*i.e.*, weighed) and mixed into a combination wherein the molar ratio of the constituent elements was Li_{7.1}Zr₂La₃O₁₂+0.5Al₂O₃. This combination was mixed and milled, using wet-milling techniques and ZrO₂ milling media, until the combination had a d₅₀ particle size of 100 nm – 5 μm. Also included with the milling media was a Rhodaline™ dispersant. The milled combination of reactants was separated from the milling media after milling. The d₅₀ particle size of the milled reactants was assessed. The separated milled reactants was then placed in an alumina crucible and calcined at about nine-hundred degrees Celsius (900 °C) for approximately six (6) hours in an oven with a controlled oxidizing atmosphere in contact with the calcining reactants. The calcination process burned and/or combusted residual solvents as well as the dispersant, binder, and surfactant. The calcination caused the inorganic reactants to react to form the lithium-stuffed garnet. The calcined product was removed from the alumina crucibles after it cooled to room temperature. The product was characterized by a variety of analytical techniques, including x-ray powder diffraction (XRD) and scanning electron microscopy. This product is referred to as calcined lithium-stuffed garnet and has an empirical formula of approximately was Li_{7.1}Zr₂La₃O₁₂+0.5Al₂O₃.

[00288] The milled and calcined product were then mixed with a plasticizer (S160), a binder (B72). In a second series, an acrylic, polyvinylbuturate (PVB), or polyvinylacetate (PVA) was used. The solvent was a mixture of dimethyl ether/tetrahydrofuran (DME/THF). The organic components constituted 10-20 weight percent of the slurry. The remainder of the slurry was the solid calcined lithium-stuffed garnet having the empirical formula of approximately $\text{Li}_{7.1}\text{Zr}_2\text{La}_3\text{O}_{12+0.5}\text{Al}_2\text{O}_3$.

[00289] The slurry mixture was then tape casted to produce 10 μm - 200 μm thin films of calcined but unsintered lithium-stuffed garnet in combination with surfactants, binders, plasticizers, and dispersants.

[00290] The tape cast thin films were allowed to dry. These dry calcined by unsintered thin films are referred to as green films.

[00291] The green films were placed between garnet ceramic setter plates and calcined in an oven filled with an Argon: H_2O mixture (calcination step) followed by an Argon: H_2 mixture and heated to 1200°C for six (6) hours (sintering step). Setter plates were used as substantially set forth in International PCT Patent Publication Application No.

WO2016168691A1, which published October 20, 2016, entitled LITHIUM STUFFED GARNET SETTER PLATES FOR SOLID ELECTROLYTE FABRICATION, the entire contents of which are herein incorporated by reference in their entirety for all purposes. The setter plates were made primarily of lithium-stuffed garnet formed into a setter. In some samples, the green films were sintered at 1125 °C for 6 hours in an oven with a controlled atmosphere in contact with the calcining reactants.

Full cells

[00292] Three full cells were made:

- a. One positive electrode was soaked in **Catholyte Solution A**, positioned on top of a lithium-stuffed garnet solid-state separator, and sealed in a pouch cell.
- b. One positive electrode was soaked in **Catholyte Solution B**, positioned on top of a lithium-stuffed garnet solid-state separator, and sealed in a pouch cell.
- c. One positive electrode was soaked in **Catholyte Solution C**, positioned on top of a lithium-stuffed garnet solid-state separator, and sealed in a pouch cell.

[00293] Lithium metal negative electrodes were evaporated onto the lithium-stuffed garnet solid-state separator on the side opposite of each positive electrode. A nickel foil negative current collector was attached to the anode.

[00294] The electrochemical stack was vacuum sealed inside a pouch cell with tabs leading outside the cell. The cell was placed under pressure. The full cells were sealed inside Mylar, heat-sealed pouch cells.

[00295] The electrochemical cells were held at 4.3V (v. Li) with a trickle current for up to 30 days at 45 °C. As shown in **FIG. 2**, the median charge ASR was the lowest for **Catholyte Solution C**, containing electrolytes with 2 wt % TTSPi and a 5 vol% linear sulfone (dipropyl sulfone) co-solvent. The electrochemical cell without the TTSPi additive (**Catholyte Solution A**) was observed to have an ASR growth up to 30x the initial ASR. **Catholyte Solution B** had median charge ASR in between that of **Catholyte Solutions A** and **C**.

EXAMPLE 3: MAKING SYMMETRIC ELECTROCHEMICAL CELLS

Symmetric cells

[00296] Symmetric electrochemical cells were prepared by stacking positive electrodes, soaked in **Catholyte Solutions A, B, or C**, on top of a lithium-stuffed garnet solid-state separator.

[00297] The electrochemical stack was vacuum sealed inside a Swagelok cell with posts leading outside the cell. FIG. 3 shows the configuration in which these symmetric cells were assembled. The cells are also placed under pressure. In this configuration, the impedance of the cathode-electrolyte-garnet interface can be isolated within the Swagelok cell. The symmetric stack of NMC-garnet-NMC allowed for the measurement of the interfacial charge transfer that was deconvoluted from other impedance responses observed in full cells. The positive electrode was charged to 3.9V before building into the stack. 3.9V represents approximately 50% state of charge of the cathode, and allows the examined cell to differentiate the positive electrode charge transfer resistance from the garnet charge transfer.

[00298] Electrical impedance spectroscopy was performed on the electrochemical cells. The results are shown in **FIG. 4**. The EIS scan of a symmetric Swagelok cell allows for facile measurement of the garnet charge transfer resistance.

[00299] **FIG. 5** shows ASR results of a series of symmetric electrochemical cells were prepared. The concentration of catholytes in the positive electrode included a series of additives at 0.3 wt %. Certain series of test catholytes included about 50 ppm HF.

[00300] Without being bound by theory, it is believed that the major mode of ASR growth is related to increases in the garnet surface charge transfer, as measured by impedance spectroscopy. The TTSPi additive may mitigate a mode of ASR growth caused by surface

fluorination of the lithium-stuffed garnet. Fluorine anions may be introduced into the lithium-stuffed garnet by any one or more of the anionic species of PF_6^- decomposition products. The surface species on the lithium-stuffed garnet may include LiF , AlF_3 , or other metal fluorides derived from the degradation of cell components and which result in high impedance, *i.e.*, ASR growth.

**EXAMPLE 4: SURFACE ANALYSIS OF LITHIUM-STUFFED GARNET
SEPARATORS IN ELECTROCHEMICAL CELLS WITH CATHOLYTES HAVING
OR NOT HAVING ADDITIVES**

[00301] A lithium-stuffed garnet surface was soaked in an catholyte with elevated levels of HF. The electrolyte was a solution including ECS in a ratio of 3:7 EC:Sulfolane, 1M LiPF_6 , and an additional 50ppm of HF. The surface showed evidence of acid etching along grain boundaries, using both secondary electron and backscattering SEM imaging techniques. These SEM results are shown in **FIG. 6**.

[00302] Without wishing to be bound by theory, this etching may be the result of a reaction between HF and the lithium-stuffed garnet and may be responsible for the increase in ASR observed in **FIG. 2** when additives are absent and unable to suppress fluorination reactions.

[00303] This example shows that fluorination of the surface of lithium-stuffed garnet occurs and may result in detrimental electrochemical performance.

**EXAMPLE 5: SURFACE ANALYSIS OF LITHIUM-STUFFED GARNET
SEPARATORS IN ELECTROCHEMICAL CELLS WITH CATHOLYTES HAVING
OR NOT HAVING ADDITIVES**

[00304] This example shows surface analysis data for the surface chemistry layer that formed on the lithium-stuffed garnet solid-state separators when exposed to the catholyte solutions having additives. The Example also shows surface analysis data for the damage done on the lithium-stuffed garnet solid-state separators when exposed to the catholyte solutions not having additives and at high voltages.

[00305] Electrochemical cells were prepared as in Example 2 except that the cells were assembled in pouch cells and not in Swagelok cells.

[00306] The lithium-stuffed garnet solid-state separators were removed from cycled cell after about 20 days, in which the cells were held at 4.3V and 45 °C.

[00307] One electrochemical cell included the TTSPi additive. The electrolyte with the TTSPi additive was a solution of ECS in a EC:Sulfolane ratio of 45:55 vol/vol, 1.4 M LiPF₆, and 2 wt % TTSPi. This sample is shown in **FIG. 7**. Regions of high contrast are observed between darker and brighter areas, which indicates differences in thickness of the chemical layer at the garnet film interface.

[00308] Images were then collected at low incident electron beam energy of 1kV to enhance chemical speciation of the interface. The majority of the area is bright (corresponding to the energy-dispersive electron spectra) and contains almost no carbon or fluorine in the surface layer. See **FIGs. 8-9**. Instead, the spectrum was dominated by the O, La and Zr elements, presumably from the garnet single ion conductor. This confirms that the interface between the liquid and solid electrolytes is very thin in the bright regions. This is likely what allows for fast lithium conduction at this interface. The patchy dark regions are comprised of a carbon rich layer.

[00309] One electrochemical cell did not include the TTSPi additive. This control without additive was a solution of ECS in a EC:Sulfolane ratio of 45:55 vol/vol and 1.4 M LiPF₆. **FIG. 10** shows an image of this sample. Low contrast between the darker and brighter areas indicates a more uniform chemical composition at the film interface. Images were collected at low incident electron beam energy of 1kV to enhance chemical speciation of the interface. **FIG. 11** shows that the film interface is uniformly rich in carbon and fluoride from the decomposition of electrolyte salt and solvent.

[00310] In another round of experiments, lithium-stuffed garnet solid-state separators, from newly prepared electrochemical cells following the steps in Example 2, were removed from cycled cell after about 20 days, in which the cells were held at 4.25 V (v. Li) and 45 °C.

[00311] The catholyte did not contain any additives to protect the interface from damage at high oxidation potential. The catholyte included 3:7 EC:Sulfolane + 1M LiPF₆. The white and dark contrast regions correspond to differences in surface layer chemistry homogeneity. See **FIG. 12**. Images were collected at low incident electron beam energy of 1kV to enhance chemical speciation of the interface. See **FIGs. 13-14**.

[00312] In another round of experiments, lithium-stuffed garnet solid-state separators, from newly prepared electrochemical cells following the steps in Example 2, were removed from cycled cell after about 20 days, in which the cells were held at 4.05 V (v. Li) and 45 °C.

[00313] The catholyte did not contain any additives to protect the interface from damage at high oxidation potential. The image does not show dramatic differences in contrast indicating the surface chemistry layer is more homogenous than cells that were charged to

higher oxidation potentials. See **FIG. 15**. Images were collected at low incident electron beam energy of 1kV to enhance chemical speciation of the interface. See **FIGs. 16-17**.

[00314] The embodiments and examples described above are intended to be merely illustrative and non-limiting. Those skilled in the art will recognize or will be able to ascertain using no more than routine experimentation, numerous equivalents of specific compounds, materials and procedures. All such equivalents are considered to be within the scope and are encompassed by the appended claims.

EMBODIMENTS

1. An electrochemical cell comprising, a positive electrode, a negative electrode, and a solid-state electrolyte therebetween;
 wherein the positive electrode comprises a catholyte comprising:
 a lithium salt;
 a first solvent selected from the group consisting of sulfolane,
 1,3-propane sultone, sulfolene, thiophene, and
 combinations thereof;
 a second solvent; and
 a strong Lewis acid;
 wherein the -state electrolyte comprises lithium-stuffed garnet; and
 wherein the negative electrode comprises lithium metal.
2. The electrochemical cell of embodiment 1, wherein the solid-state electrolyte is a thin film.
3. The electrochemical cell of embodiments 1 or 2, wherein the solid-state electrolyte is a sintered lithium-stuffed garnet thin film.
4. The electrochemical cell of any one of embodiments 1-3, wherein the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LiBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.
5. The electrochemical cell of any one of embodiments 1-4, wherein the lithium salt is present at a concentration of about 0.5 M to about 2.0 M.
6. The electrochemical cell of any one of embodiments 1-5, wherein the lithium salt is present at a concentration of about 0.5 M to about 1.5 M.
7. The electrochemical cell of any one of embodiments 1-6, wherein the lithium salt is present at a concentration of about 1.0 M to about 1.4 M.
8. The electrochemical cell of any one of embodiments 1-6, wherein the lithium salt is present at a concentration of about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M, about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, or about 1.5 M.
9. The electrochemical cell of any one of embodiments 1-8, wherein the first solvent is sulfolane.

10. The electrochemical cell of any one of embodiments 1-9, wherein the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile, suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO), ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoxolane-2-carbonitrile, and combinations thereof.

11. The electrochemical cell of embodiment 10, wherein the second solvent is selected from ethylene carbonate, dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylene carbonate (PC), diethyl carbonate (DEC), fluoroethylene carbonate (FEC), prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), glutaronitrile (GLN), adiponitrile (ADN), and combinations thereof.

12. The electrochemical cell of embodiment 10 or 11, wherein the second solvent is ethylene carbonate.

13. The electrochemical cell of any one of embodiments 1-12, wherein the catholyte has a viscosity of less than 15 mPa-s at 20 °C.

14. The electrochemical cell of any one of embodiments 1-14, wherein the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm.

15. The electrochemical cell of any one of embodiments 1-14, wherein the electrochemical cell further comprises a third solvent selected from a linear sulfone.

16. The electrochemical cell of embodiment 15, wherein the linear sulfone is present at 0 to 15 vol %.

17. The electrochemical cell of embodiment 16, wherein the linear sulfone is present at 5 to 10 vol %.

18. The electrochemical cell of any one of embodiments 15-17, wherein the linear sulfone is selected from the group consisting of ethyl methyl sulfone, dimethyl sulfone, dibutyl sulfone, allyl methyl sulfone, ethyl sulfone, dipropyl sulfone, ethyl phenyl sulfone, diethyl sulfate, dimethyl sulfate, and combinations thereof.
19. The electrochemical cell of embodiment 18, wherein the linear sulfone is selected from the group consist of dibutylsulfone, dipropylsulfone, and combinations thereof.
20. The electrochemical cell any one of embodiments 1-19, wherein sulfolane is the solvent present in the catholyte in the largest volume percent.
21. The electrochemical cell any one of embodiments 1-12, wherein the ratio of the second solvent to the first solvent is from 30:70 vol/vol (v/v) to 50:50 v/v.
22. The electrochemical cell any one of embodiments 1-12, wherein the ratio of the second solvent to the first solvent is either 50:50 v/v or 45:55 v/v.
23. The electrochemical cell of embodiment 21, wherein the first solvent is sulfolane, wherein the second solvent is EC, and wherein the ratio of EC:sulfolane is from 30:70 v/v to 50:50 v/v.
24. The electrochemical cell of embodiment 22, wherein the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is either 50:50 v/v or 45:55 v/v.
25. The electrochemical cell of any one of embodiments 1-24, wherein the strong Lewis acid competitively binds with F, OH, HF, and/or H₂O.
26. The electrochemical cell of any one of embodiments 1-25, wherein the strong Lewis acid competitively binds with F, OH, HF, and H₂O.
27. The electrochemical cell of any one of embodiments 1-26, wherein the strong Lewis acid competitively binds with the surface of lithium-stuffed garnet.
28. The electrochemical cell of any one of embodiments 1-27, wherein the strong Lewis Acid binds to the surface of lithium-stuffed garnet stronger than it binds to a lithium salt selected from the group consisting of lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF₄, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).
29. The electrochemical cell of any one of embodiments 1-28, wherein the strong Lewis acid is a F- getter from HF.
30. The electrochemical cell of any one of embodiments 1-29, wherein the strong Lewis acid is an OH- getter from H₂O.

31. The electrochemical cell of any one of embodiments 1-30, wherein the strong Lewis acid is a trivalent phosphite, phosphate, or borate compound.
32. The electrochemical cell of any one of embodiments 1-31, wherein the strong Lewis acid is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi), tris(trimethylsilyl) phosphate (TTSP or TTSPa), trimethoxyboroxine ($C_3H_9B_3O_6$, TMOBX), vinylene carbonate (VC), vinyl ethylene carbonate (VEC), methylene methane disulfonate (MMDS), prop-1-ene-1,3 sultone (PES), fluoroethylene carbonate (FEC), LiTFSi, LiBOB, 1,3-propane sultone (PS), succinonitrile, trimethylene sulfate (TMS), triallyl phosphate (TAP), tris(trimethylsilyl) borate (TMSB), tris(pentafluorophenyl) borane (TPFPB), tris(trimethylsilyl) borate, (TMSB) or tris(pentafluorophenyl)borane (TPFPB), and combinations thereof.
33. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is TTSPi and/or TTSP.
34. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is selected from the group consisting TTSPi and TTSP.
35. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is a combination of TMOBX and vinylene carbonate.
36. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is VC.
37. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is a combination of VC and MMDS.
38. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is a combination of VC and/or PES.
39. The electrochemical cell of embodiment 32, wherein the strong Lewis acid is a combination of PES, MMDS, and TTSP.
40. The electrochemical cell of embodiment 32, wherein the strong Lewis acid comprises 2 wt. % PES.
41. The electrochemical cell of embodiment 1, wherein the strong Lewis acid comprises 1 wt % MMDS and 1 wt % TTSPi.
42. The electrochemical cell of embodiment 1, wherein the catholyte comprises 1.4 M $LiPF_6$, 45 v/v EC, 50 v/v sulfolane, and 5 v/v dibutylsulfone.
43. The electrochemical cell of any one of embodiments 1-42, wherein the Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture.

44. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by the chemical formula $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} + y\text{Al}_2\text{O}_3$, wherein x is from 5.8 to 7.0, and y is 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, or 1.0.
45. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DZr}_E\text{O}_F$, $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DTa}_E\text{O}_F$, and $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DNb}_E\text{O}_F$, wherein $4 < A < 8.5$, $1.5 < B < 4$, $0 \leq C < 2$, $0 \leq D < 2$, $0 < E < 2$, $10 < F < 14$, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta.
46. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Me}''_e\text{O}_f$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $0 \leq e < 2$, $10 < f < 14$, and wherein Me'' is a metal selected from the group consisting of Nb, Ta, V, W, Mo, and Sb.
47. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{O}_f$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $10 < f < 14$.
48. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.35\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
49. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.5\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
50. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.65\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
51. The electrochemical cell of any one of embodiments 1-42, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot \text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
52. A lithium-stuffed garnet electrolyte with a surface layer of a strong Lewis acid.
53. A lithium-stuffed garnet solid-state electrolyte having at least one surface passivated with a strong Lewis Acid.
54. A lithium-stuffed garnet electrolyte with a surface layer substantially as shown in, or characterized by, any one of FIGs. 7-17.

55. A process for making an electrochemical cell, comprising:
providing a positive electrode infiltrated with a catholyte, the catholyte comprising:
a lithium salt;
a first solvent selected from the group consisting of sulfolane, 1,3-propane sultone, sulfolene, thiophene, and combinations thereof;
a second solvent; and
a strong Lewis acid ;
providing a sintered lithium-stuffed garnet solid-state separator; and
contacting the sintered lithium-stuffed garnet solid-state separator to the positive electrode.
56. The process of embodiment 55, wherein the contacting is between one side of the sintered lithium-stuffed garnet thin film or pellet and one side of the positive electrode.
57. The process of embodiment 55 or 56, further comprising providing a negative electrode comprises lithium metal.
58. The process of embodiment 56, wherein the solid-state electrolyte is a thin film.
59. The process of embodiment 56, wherein the solid-state electrolyte is a sintered lithium-stuffed garnet thin film.
60. The process of any one of embodiments 55-59, wherein the lithium salt is selected from the group consisting of LiPF_6 , lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF_4 , LiAsF_6 , lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.
61. The process of any one of embodiments 55-59, wherein the lithium salt is present at a concentration of about 0.5 M to 2.0 M.
62. The process of any one of embodiments 55-59, wherein the lithium salt is present at a concentration of about 0.5 M to about 1.5 M.
63. The process of any one of embodiments 55-62, wherein the lithium salt is present at a concentration of about 1.0 M to about 1.4 M.
64. The process of any one of embodiments 55-62, wherein the lithium salt is present at a concentration of about 0.5 M, about 0.55 M, about 0.6 M, about 0.65 M,

about 0.7 M, about 0.75 M, about 0.8 M, about 0.85 M, about 0.9 M, about 0.95 M, or about 1.5 M.

65. The process of any one of embodiments 55-64, wherein the first solvent is sulfolane.

66. The process of any one of embodiments 55-65, wherein the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile, suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO), ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoxolane-2-carbonitrile, and combinations thereof.

67. The process of embodiment 66, wherein the second solvent is selected from ethylene carbonate, dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylene carbonate (PC), diethyl carbonate (DEC), fluoroethylene carbonate (FEC), prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), glutaronitrile (GLN), adiponitrile (ADN), and combinations thereof.

68. The process of embodiment 67, wherein the second solvent is selected from ethylene carbonate.

69. The process of any one of embodiments 55-68, wherein the catholyte has a viscosity of less than 15 mPa-s at 20 °C.

70. The process of any one of embodiments 55-69, wherein the catholyte has a water content less than 200 ppm, or less than 150 ppm, or less than 100 ppm, or less than 60 ppm, or less than 50 ppm, or less than 40 ppm, or less than 30 ppm, or less than 20 ppm, or less than 10 ppm.

71. The process of any one of embodiments 55-70, wherein the process further comprises a third solvent selected from a linear sulfone.

72. The process of embodiment 71, wherein the linear sulfone is present at 0 to 15 vol %.
73. The process of embodiment 71 or 72, wherein the linear sulfone is present at 5 to 10 vol %.
74. The process of any one of embodiments 72-73, wherein the linear sulfone is selected from the group consisting of ethyl methyl sulfone, dimethyl sulfone, dibutyl sulfone, allyl methyl sulfone, ethyl sulfone, dipropyl sulfone, ethyl phenyl sulfone, diethyl sulfate, dimethyl sulfate, and combinations thereof.
75. The process of any one of embodiments 72-74, wherein the linear sulfone is selected from the group consist of dibutylsulfone, dipropylsulfone, and combinations thereof.
76. The process any one of embodiments 55-75, wherein sulfolane is the solvent present in the catholyte in the largest volume percent.
77. The process any one of embodiments 55-76, wherein the ratio of the second solvent to the first solvent is from 30:70 v/v to 50:50 v/v.
78. The process any one of embodiments 55-75, wherein the ratio of the second solvent to the first solvent is either 50:50 v/v/ or 45:55 v/v.
79. The process of embodiment 55-78, wherein the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is from 30:70 v/v to 50:50 v/v.
80. The process of embodiment 79, wherein the first solvent is sulfolane, wherein, the second solvent is EC, and wherein the ratio of EC:sulfolane is either 50:50 or 45:55 v/v.
81. The process of any one of embodiments 55-80, wherein the strong Lewis acid competitively binds with F, OH, HF, and/or H₂O.
82. The process of any one of embodiments 55-81, wherein the strong Lewis acid competitively binds with F, OH, HF, and H₂O.
83. The process of any one of embodiments 55-82, wherein the strong Lewis acid competitively binds with the surface of lithium-stuffed garnet.
84. The process of any one of embodiments 55-83, wherein the strong Lewis Acid binds to the surface of lithium-stuffed garnet stronger than it binds to a lithium salt selected from the group consisting of lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF₄, LiAsF₆, and lithium bis(fluorosulfonyl)imide (LiFSI).

85. The process of any one of embodiments 55-84, wherein the strong Lewis acid is a F- getter from HF.
86. The process of any one of embodiments 55-85, wherein the strong Lewis acid is an OH- getter from H₂O.
87. The process of any one of embodiments 55-86, wherein the strong Lewis acid is a trivalent phosphite, phosphate, or borate compound.
88. The process of any one of embodiments 55-87, wherein the strong Lewis acid is selected from the group consisting of tris(trimethylsilyl) phosphite (TTSPi), tris(trimethylsilyl) phosphate (TTSP), trimethoxyboroxine (C₃H₉B₃O₆, TMOBX), vinylene carbonate (VC), vinyl ethylene carbonate (VEC), methylene methane disulfonate (MMDS), prop-1-ene-1,3 sultone (PES), fluoroethylene carbonate (FEC), LiTFSi, LiBOB, 1,3-propane sultone (PS), succinonitrile, trimethylene sulfate (TMS), triallyl phosphate (TAP), tris(trimethylsilyl) borate (TMSB), tris(pentafluorophenyl) borane (TPFPB), and combinations thereof.
89. The process of embodiment 88, wherein the strong Lewis acid is TTSPi and/or TTSP.
90. The process of embodiment 88, wherein the strong Lewis acid is selected from the group consisting TTSPi and TTSP.
91. The process of embodiment 87, wherein the strong Lewis acid is a combination of TMOBX and vinylene carbonate.
92. The process of embodiment 87, wherein the strong Lewis acid is VC.
93. The process of embodiment 87, wherein the strong Lewis acid is a combination of VC and MMDS.
94. The process of embodiment 87, wherein the strong Lewis acid is a combination of VC and/or PES.
95. The process of embodiment 87, wherein the strong Lewis acid is a combination of PES, MMDS, and TTSP.
96. The process of embodiment 87, wherein the strong Lewis acid comprises 2 wt. % PES
97. The process of embodiment 55, wherein the strong Lewis acid comprises 1 wt. % MMDS and 1 wt % TTSPi.
98. The process of embodiment 55, wherein the catholyte comprises 1.4 M LiPF₆, 45 v/v EC, 50 v/v sulfolane, and 5 v/v dibutylsulfone.

99. The process of any one of embodiments 55-95, wherein the Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture.
100. The process of any one of embodiments 55-95, wherein the lithium-stuffed garnet is characterized by the chemical formula $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} + y\text{Al}_2\text{O}_3$, wherein x is from 5.8 to 7.0, and y is 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, or 1.0.
101. The process of any one of embodiments 55-95, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DZrEOf}$, $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DTaEOf}$, and $\text{Li}_A\text{La}_B\text{M}'\text{C}\text{M}''\text{DNbEOf}$, wherein $4 < A < 8.5$, $1.5 < B < 4$, $0 \leq C < 2$, $0 \leq D < 2$, $0 < E < 2$, $10 < F < 14$, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta.
102. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Me}^e\text{O}_f$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $0 \leq e < 2$, $10 < f < 14$, and wherein Me^e is a metal selected from the group consisting of Nb, Ta, V, W, Mo, and Sb.
103. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_a\text{La}_b\text{Zr}_c\text{Al}_d\text{Of}$ wherein $5 < a < 7.7$; $2 < b < 4$; $0 < c < 2.5$; $0 < d < 2$; $10 < f < 14$.
104. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.35\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
105. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.5\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
106. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot 0.65\text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
107. The process of any one of embodiments 55-99, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of $\text{Li}_x\text{La}_3\text{Zr}_2\text{O}_{12} \cdot \text{Al}_2\text{O}_3$ wherein $4 < x < 8.5$.
108. The lithium-stuffed garnet electrolyte of embodiment 52 or any one of embodiments 1-54, wherein the lithium-stuffed garnet electrolyte is in an electrochemical cell and in contact with a positive electrode having a catholyte in the positive electrode.

109. A method of using an electrochemical cell of any one of embodiments 1-54, comprising holding the electrochemical cell at a voltage of 3.9 V (v. Li) or greater.
110. The method of embodiment 109, wherein the voltage is less than 5V (v. Li).
111. The method of embodiment 109, further comprising charging and discharging the electrochemical cell between 0 and 4.5 V.
112. An electrochemical cell made by the process of embodiments 55-107.
113. A rechargeable battery comprising the electrochemical cell of any one of embodiments 1-54, or 112 or the lithium-stuffed garnet electrolyte of embodiment 108.
114. An electric vehicle comprising the rechargeable battery of embodiment 113.

What is claimed is:

1. An electrochemical cell comprising, a positive electrode, a negative electrode, and a solid-state electrolyte therebetween;
 - wherein the positive electrode comprises a catholyte comprising:
 - a lithium salt;
 - a first solvent selected from the group consisting of sulfolane, 1,3-propane sultone, sulfolene, thiophene, and combinations thereof;
 - a second solvent; and
 - a strong Lewis acid;
 - wherein the solid-state electrolyte comprises lithium-stuffed garnet; and
 - wherein the negative electrode comprises lithium metal.
2. The electrochemical cell of claim 1, wherein the solid-state electrolyte is a thin film.
3. The electrochemical cell of claim 1 or 2, wherein the lithium salt is selected from the group consisting of LiPF₆, lithium bis(perfluoroethanesulfonyl)imide (LIBETI), bis(trifluoromethane)sulfonimide (LiTFSI), LiBF₄, LiAsF₆, lithium bis(fluorosulfonyl)imide (LiFSI), and combinations thereof.
4. The electrochemical cell of any one of claims 1-3, wherein the lithium salt is present at a concentration of about 0.5 M to about 2.0 M.
5. The electrochemical cell of any one of claims 1-4, wherein the second solvent is selected from dimethyl carbonate (DMC), ethyl-methyl carbonate (EMC), propylmethyl carbonate, nitroethyl carbonate, propylene carbonate (PC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), 2,5-dioxahexanedioic acid dimethyl ester, tetrahydrofuran (THF), γ -butyrolactone (GBL), gamma butyl-lactone, fluoroethylene carbonate (FEC), fluoromethyl ethylene carbonate (FMEC), trifluoroethyl methyl carbonate (F-EMC), fluorinated 3-(1,1,2,2-tetrafluoroethoxy)-1,1,2,2-tetrafluoropropane/1,1,2,2-tetrafluoro-3-(1,1,2,2-tetrafluoroethoxy)propane (F-EPE), fluorinated cyclic carbonate (F-AEC), dioxolane, prop-1-ene-1,3-sultone (PES), sulfolane, acetonitrile (ACN), succinonitrile (SCN), pimelonitrile, suberonitrile, propionitrile, propanedinitrile, glutaronitrile (GLN), adiponitrile (ADN), hexanedinitrile, pentanedinitrile, acetophenone, isophorone, benzonitrile, ethyl propionate, methyl propionate, methylene methanedisulfonate, dimethyl sulfate, dimethyl sulfoxide (DMSO),

ethyl acetate, methyl butyrate, dimethyl ether (DME), diethyl ether, dioxolane, methyl benzoate, 2-methyl-5-oxoxolane-2-carbonitrile, and combinations thereof.

6. The electrochemical cell any one of claims 1-5, wherein the ratio of the second solvent to the first solvent is from 30:70 vol/vol to 50:50 v/v.

7. The electrochemical cell of any one of claims 1-6, wherein the strong Lewis acid is a trivalent phosphite, phosphate, or borate compound.

8. The electrochemical cell of claim 7, wherein the strong Lewis acid is selected from the group consisting TTSPi and TTSP.

9. The electrochemical cell of claim 1, wherein the strong Lewis acid comprises 1 wt % MMDS and 1 wt % TTSPi.

10. The electrochemical cell of claim 1, wherein the catholyte comprises 1.4 M LiPF₆, 45 v/v EC, 50 v/v sulfolane, and 5 v/v dibutylsulfone.

11. The electrochemical cell of any one of claims 1-10, wherein the strong Lewis acid is present at 0.2 wt % to 5 wt %, where the wt % is based on the total net mass of the salt plus solvent mixture.

12. The electrochemical cell of any one of claims 1-11, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of Li_ALa_BM'_CM''_DZr_EO_F, Li_ALa_BM'_CM''_DTa_EO_F, and Li_ALa_BM'_CM''_DNb_EO_F, wherein 4<A<8.5, 1.5<B<4, 0≤C<2, 0≤D<2; 0<E<2, 10<F<14, and wherein M' and M'' are each, independently, selected from the group consisting of Al, Mo, W, Nb, Ga, Sb, Ca, Ba, Sr, Ce, Hf, Rb, and Ta.

13. The electrochemical cell of any one of claims 1-11, wherein the lithium-stuffed garnet is characterized by a formula selected from the group consisting of Li_aLa_bZr_cAl_dMe''_eO_f wherein 5<a<7.7; 2<b<4; 0<c<2.5; 0<d<2; 0≤e<2, 10<f<14, and wherein Me'' is a metal selected from the group consisting of Nb, Ta, V, W, Mo, and Sb.

14. A process for making an electrochemical cell, comprising:
providing a positive electrode infiltrated with a catholyte, the catholyte comprising:

a lithium salt;

a first solvent selected from the group consisting of sulfolane,
1,3-propane sultone, sulfolene, thiophene, and
combinations thereof;

a second solvent; and

a strong Lewis acid;

providing a sintered lithium-stuffed garnet solid-state separator; and
contacting the sintered lithium-stuffed garnet solid-state separator to the
positive electrode.

15. A method of using an electrochemical cell of any one of claims 1-13, comprising holding the electrochemical cell at a voltage of 3.9 V (v. Li) or greater.
16. The method of claim 15, wherein the voltage is less than 5V (v. Li).
17. The method of claim 15, further comprising charging and discharging the electrochemical cell between 0 and 4.5 V.
18. An electrochemical cell made by the process of claim 14.
19. A rechargeable battery comprising the electrochemical cell of any one of claims 1-13.
20. An electric vehicle comprising the rechargeable battery of claim 19.

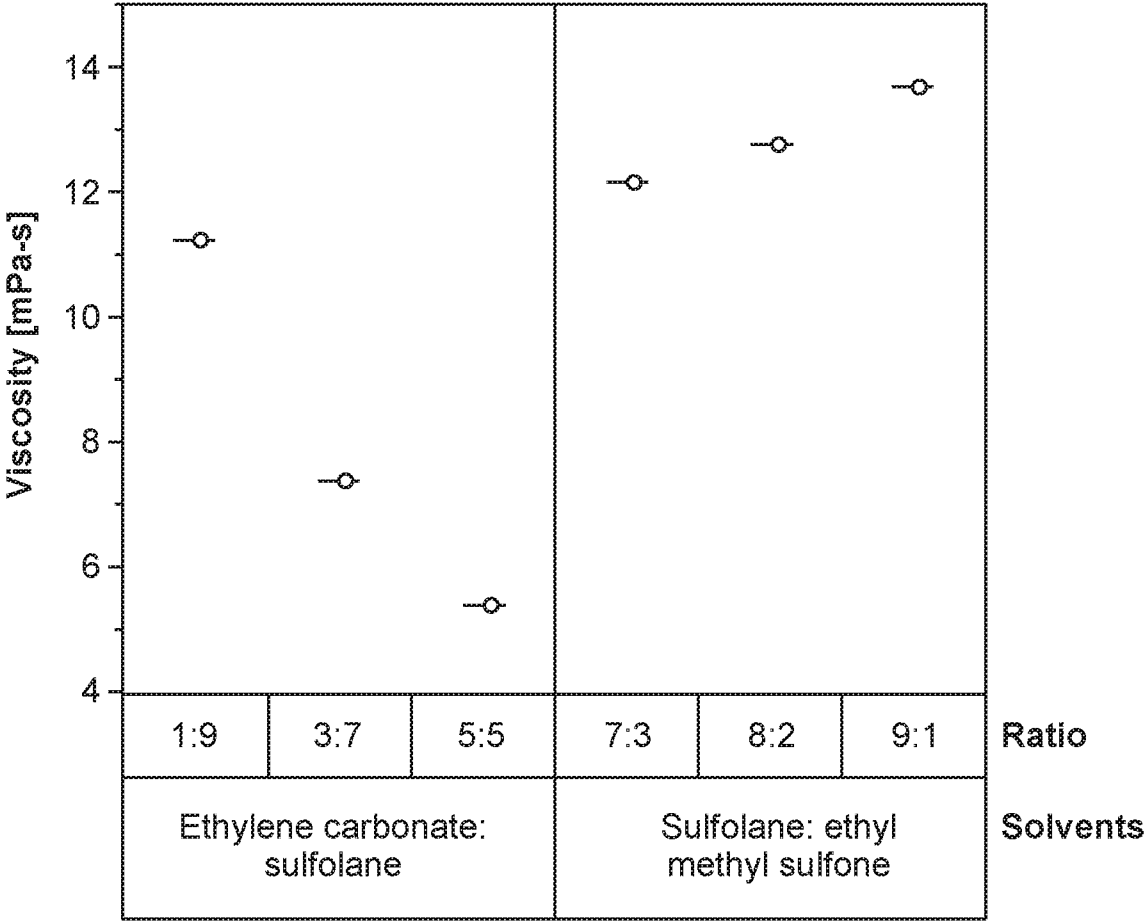


FIG. 1

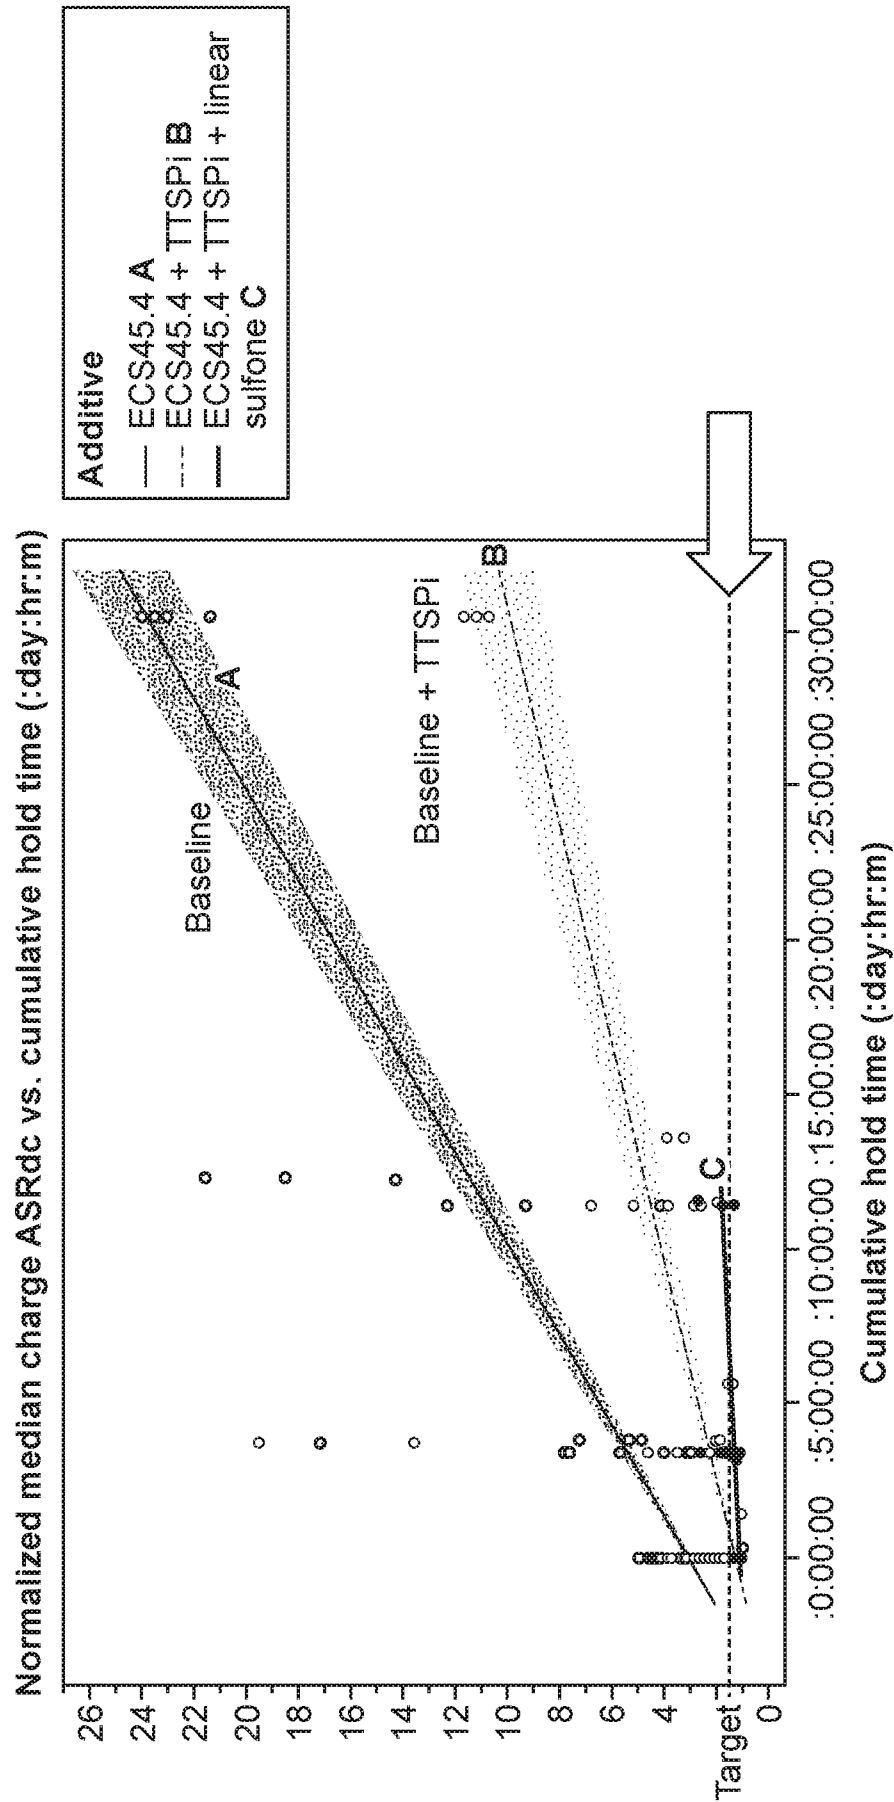


FIG. 2

3 / 17

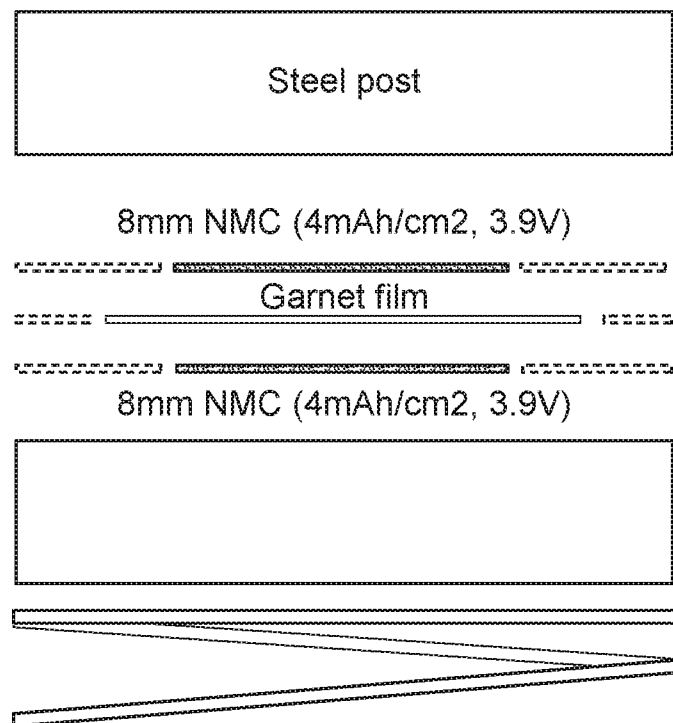


FIG. 3

4 / 17

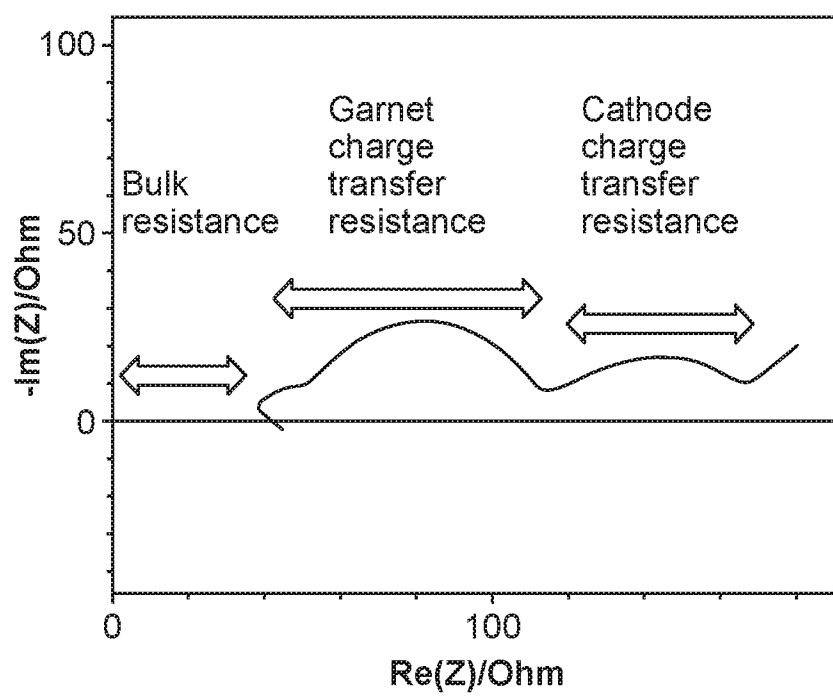


FIG. 4

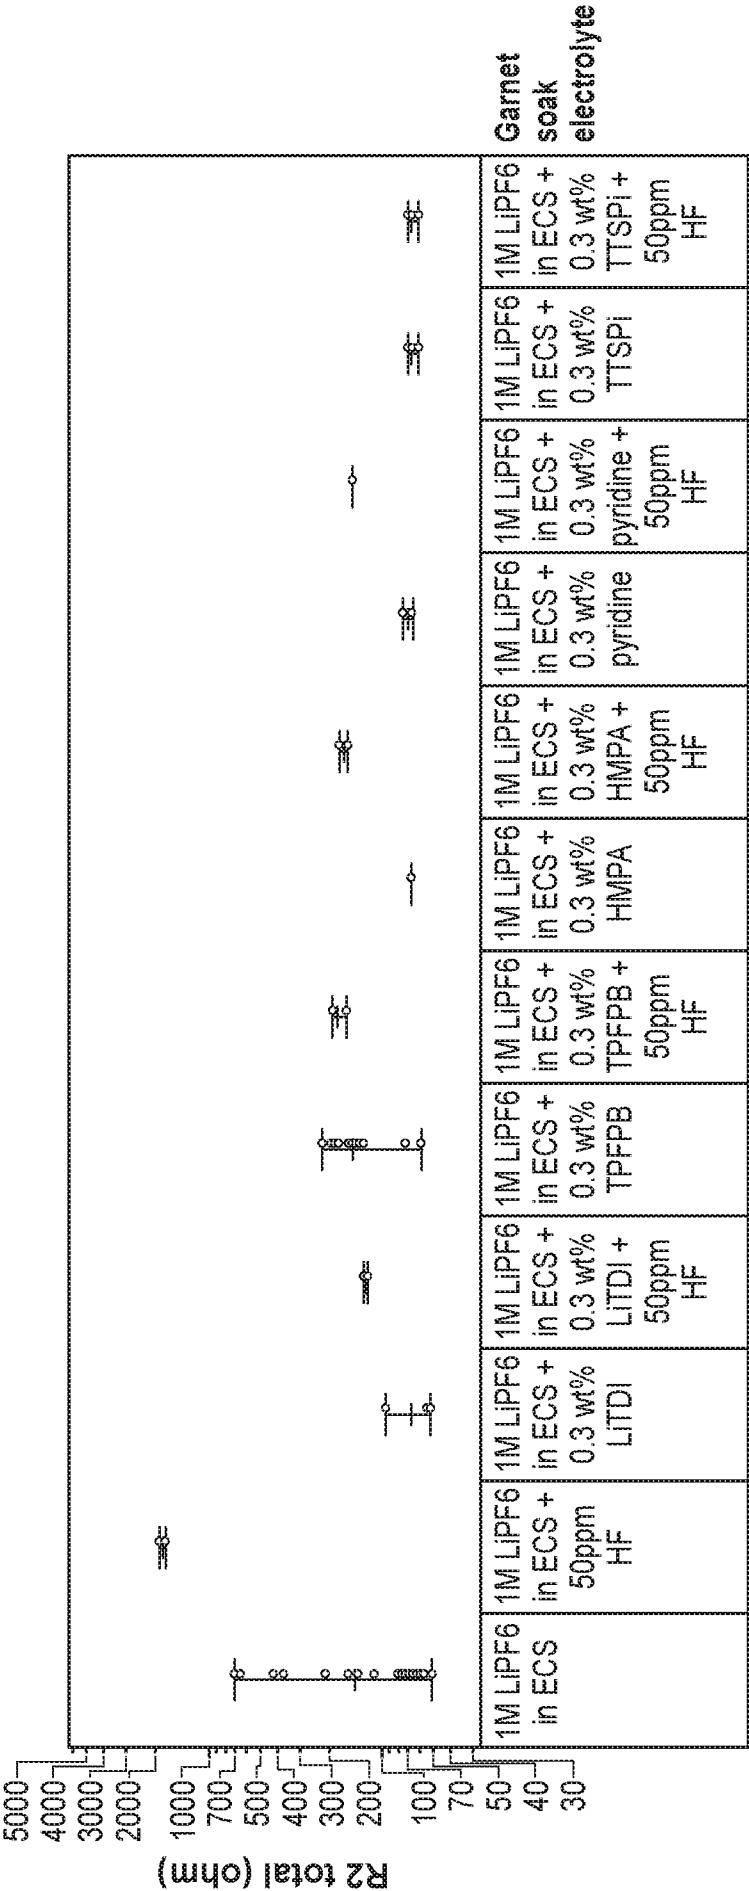


FIG. 5

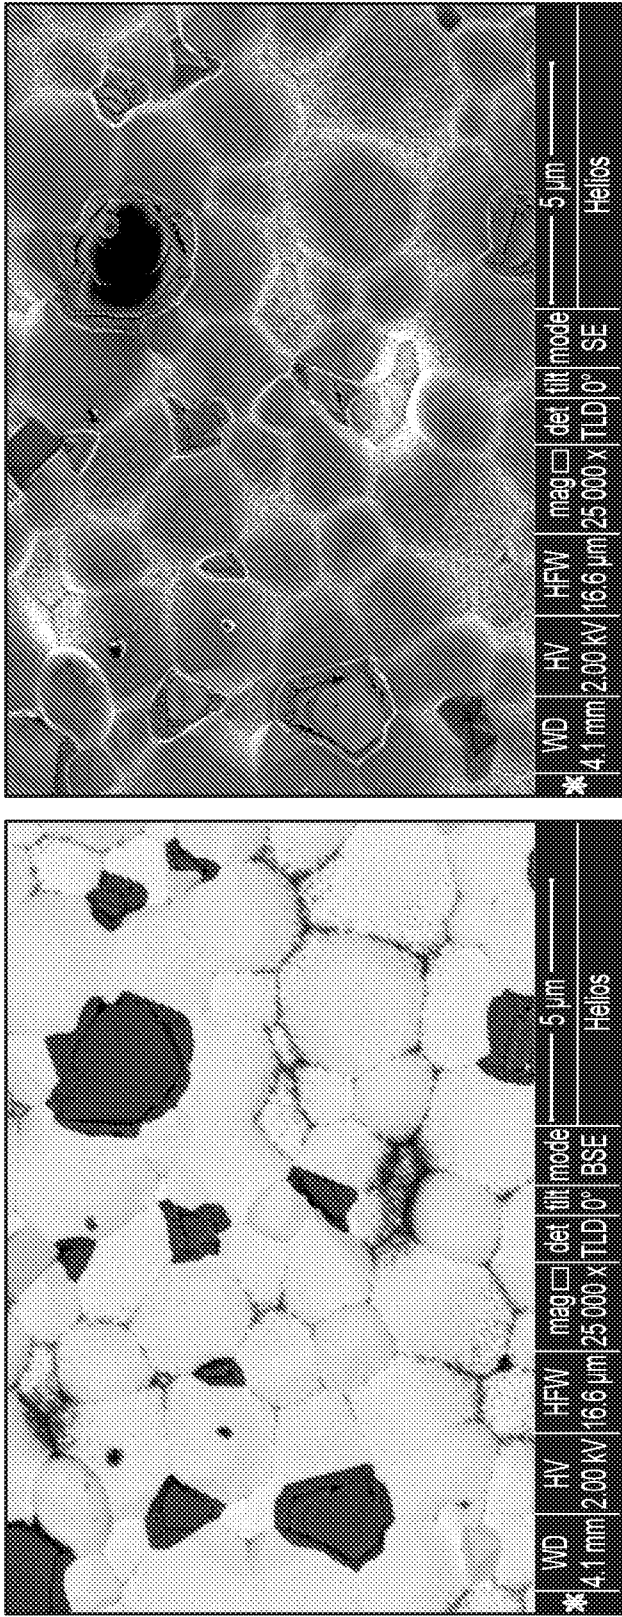


FIG. 6

7 / 17

Electron Image 2

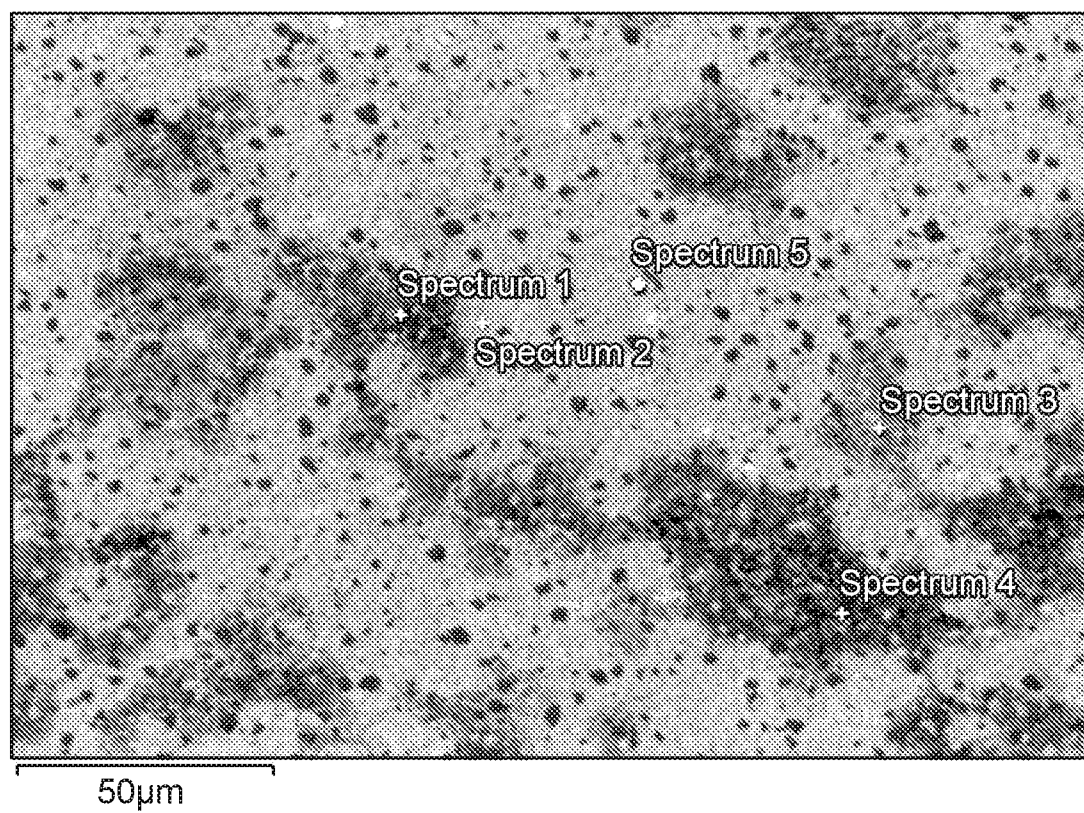


FIG. 7

8 / 17

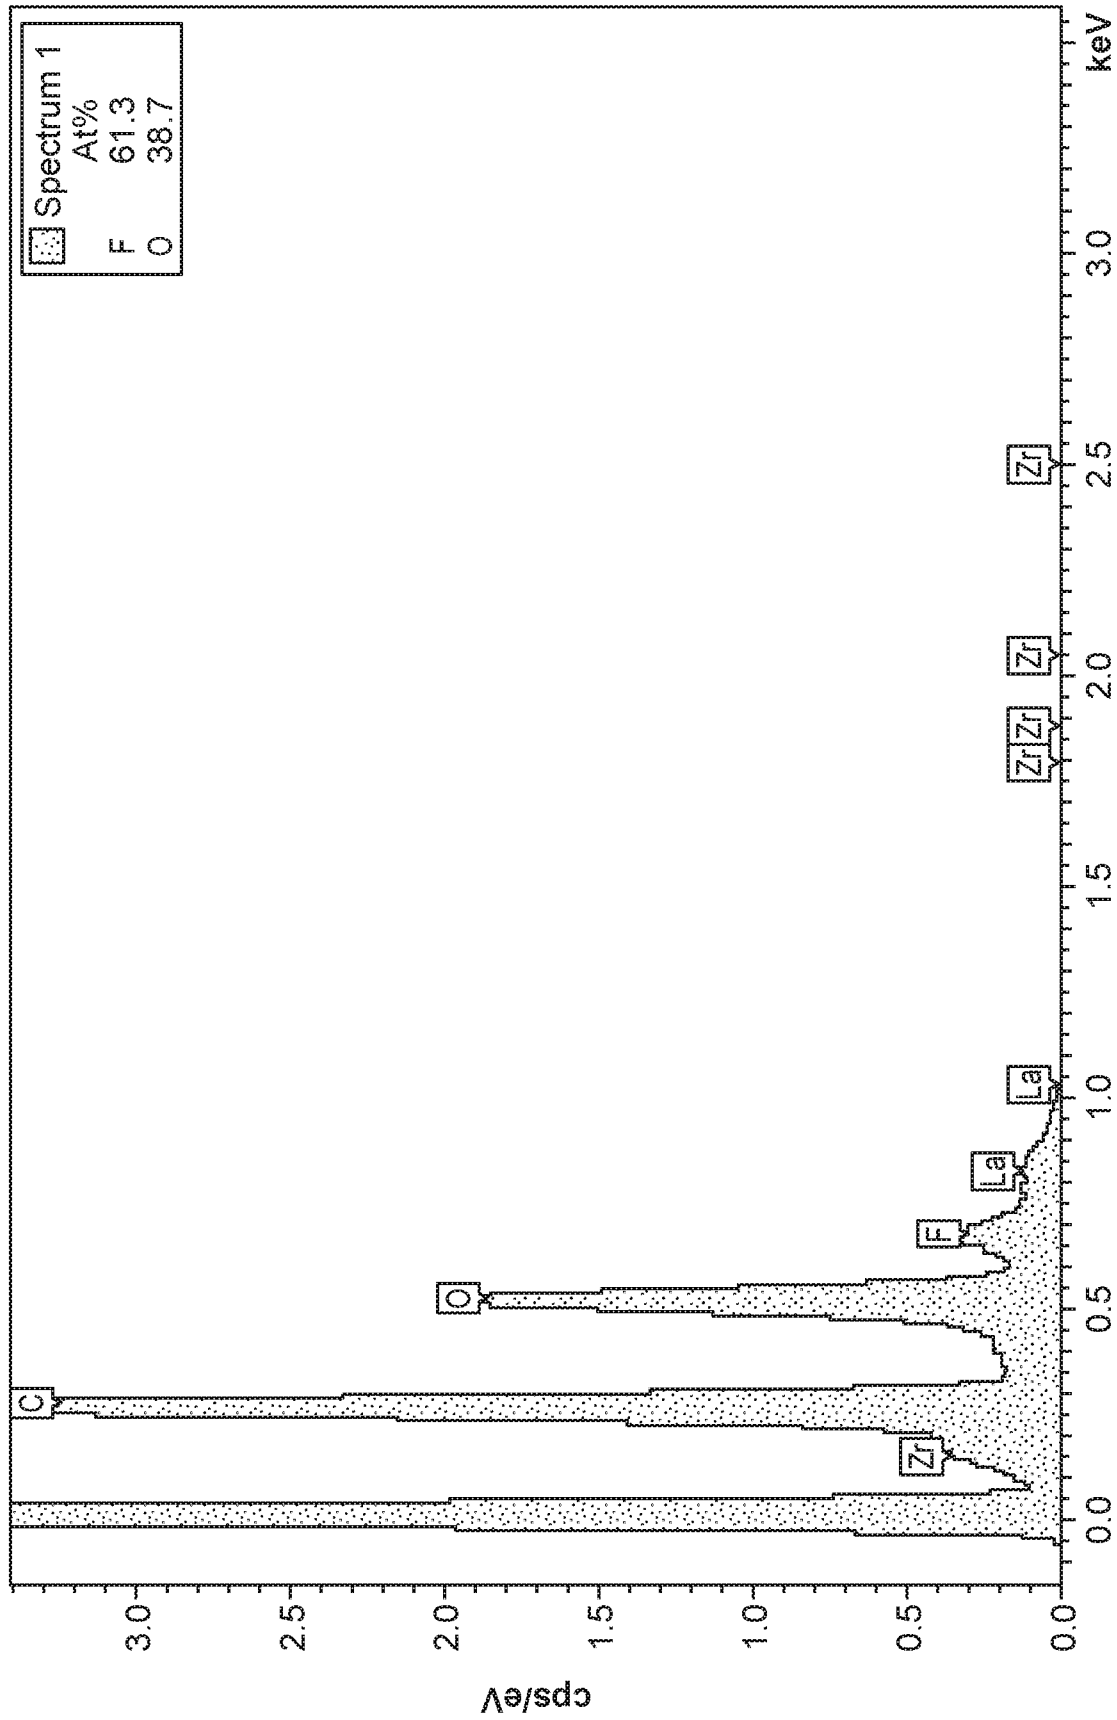


FIG. 8

9 / 17

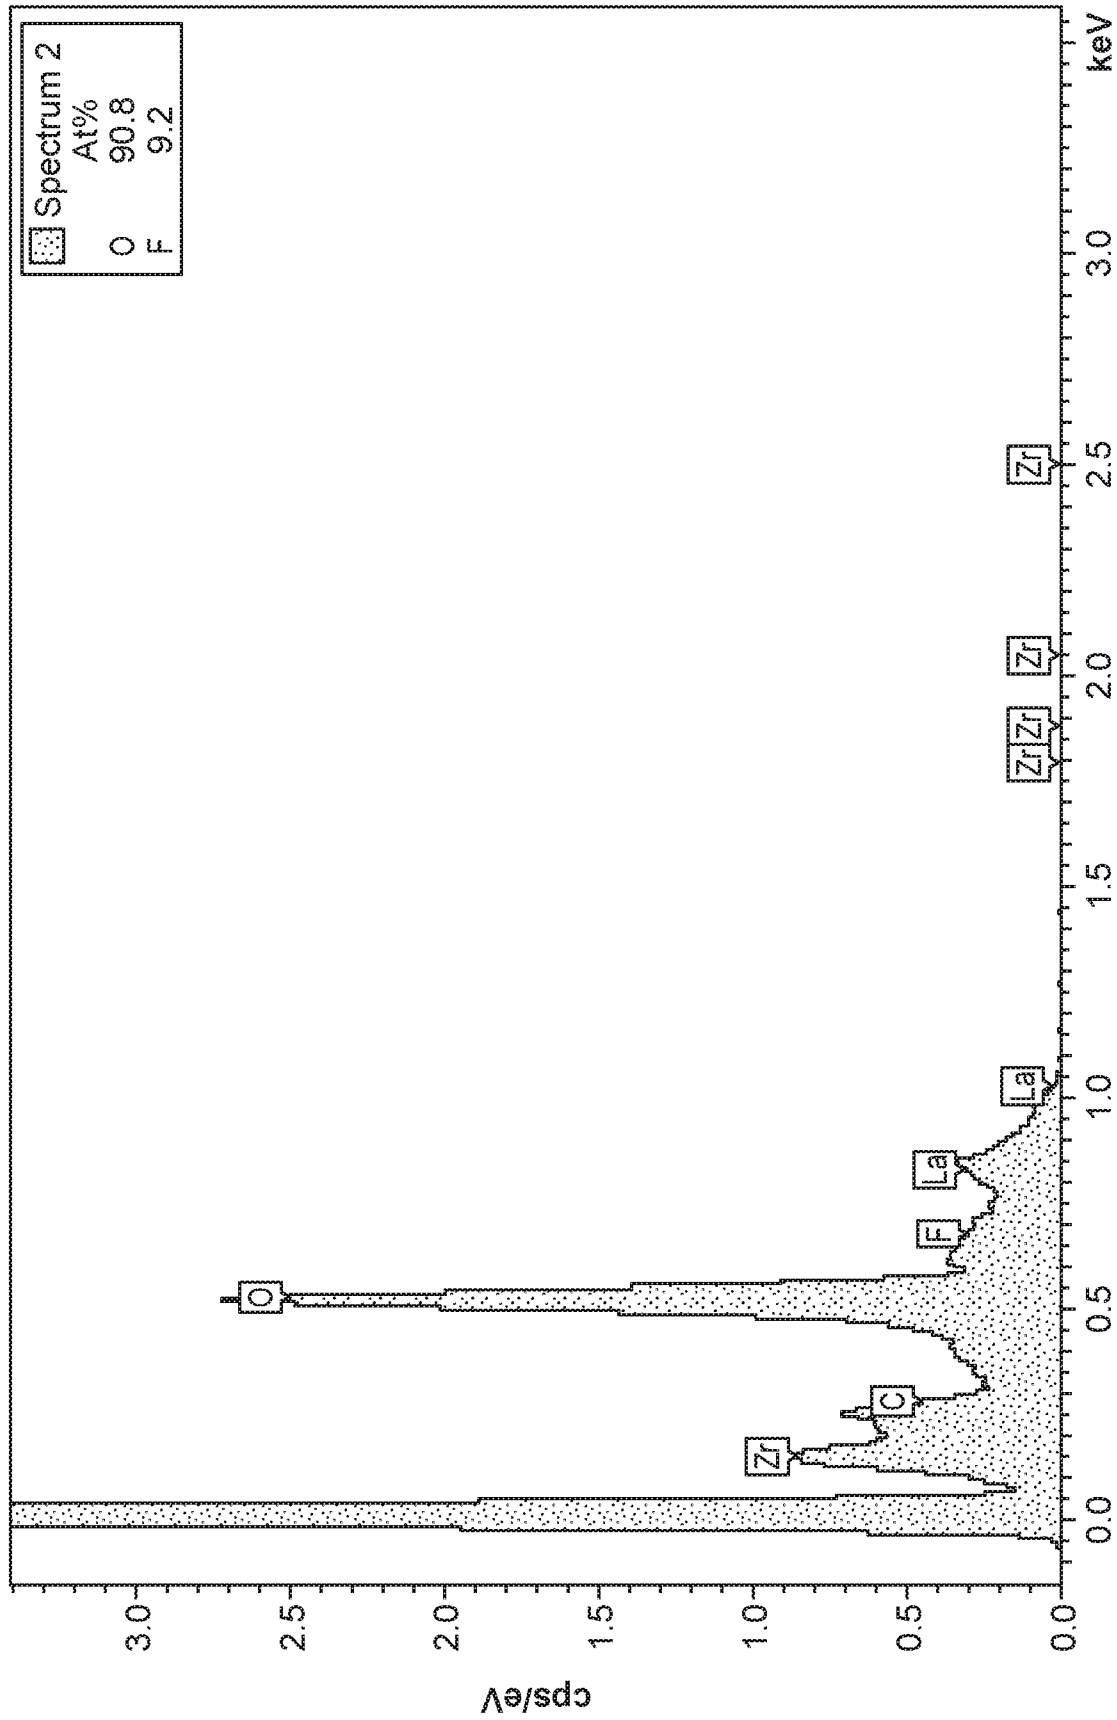


FIG. 9

10 / 17

Electron Image 1

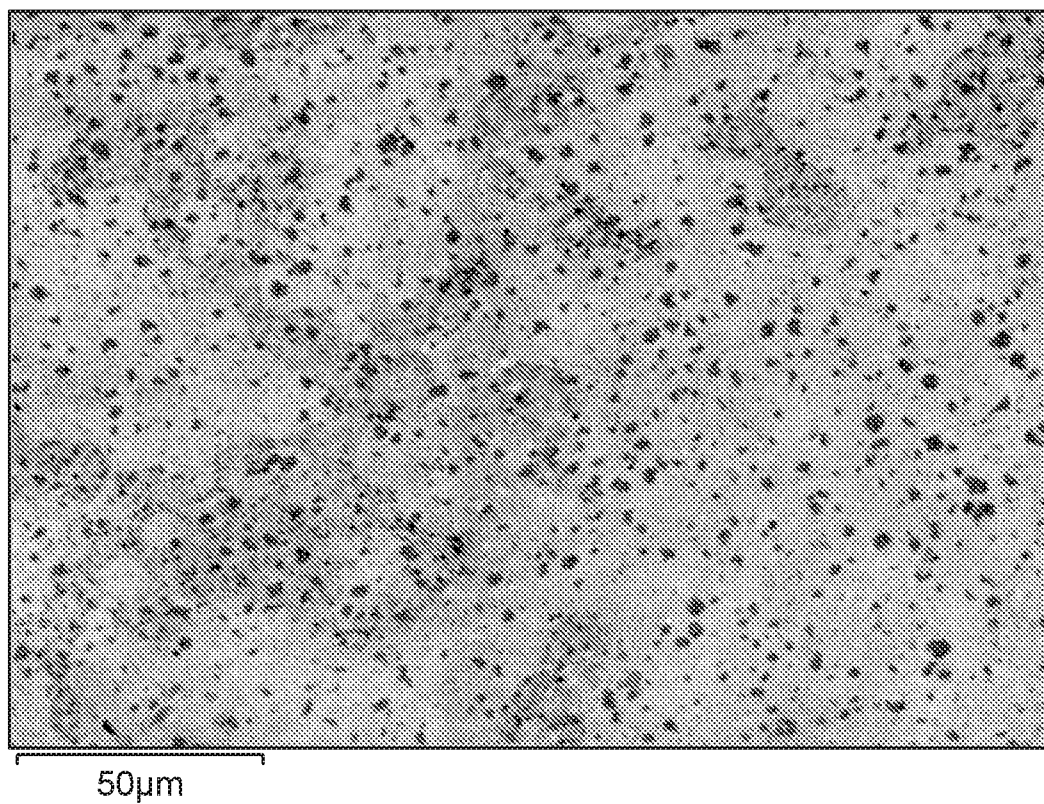


FIG. 10

11 / 17

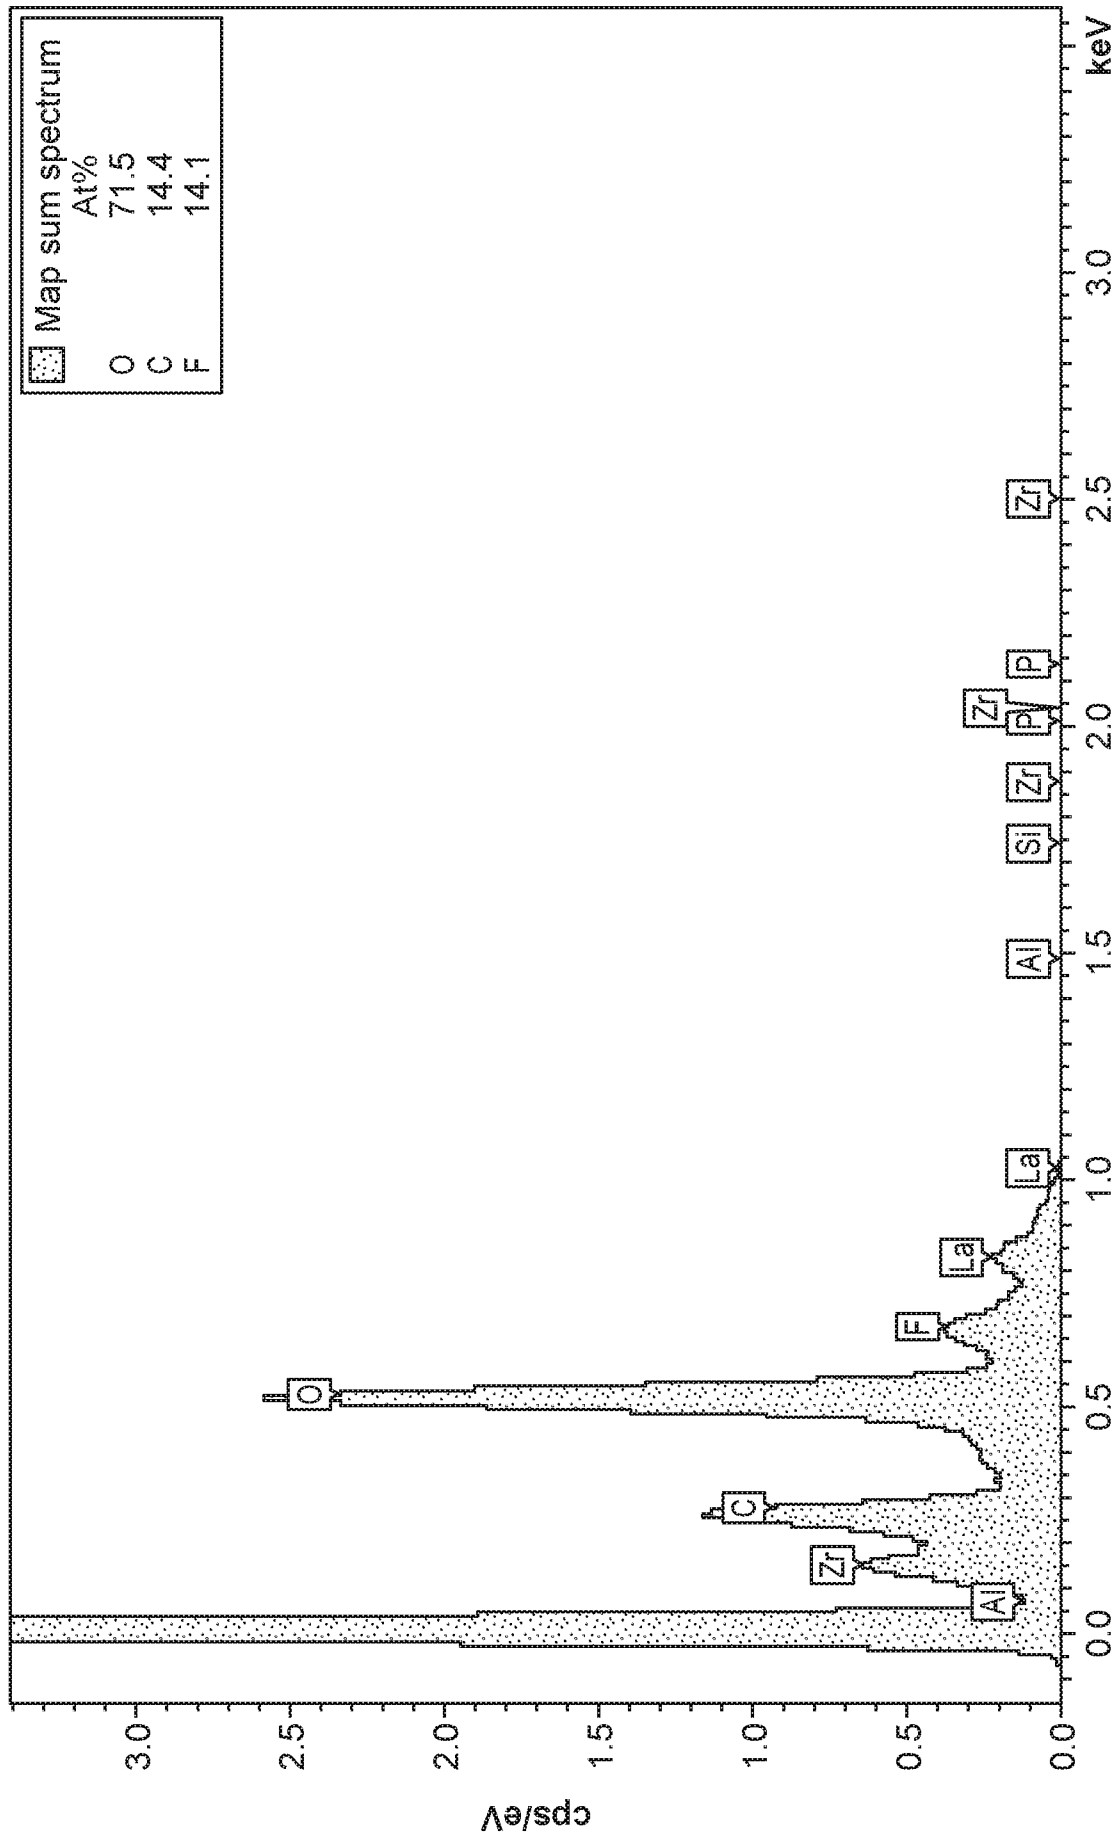


FIG. 11

12 / 17


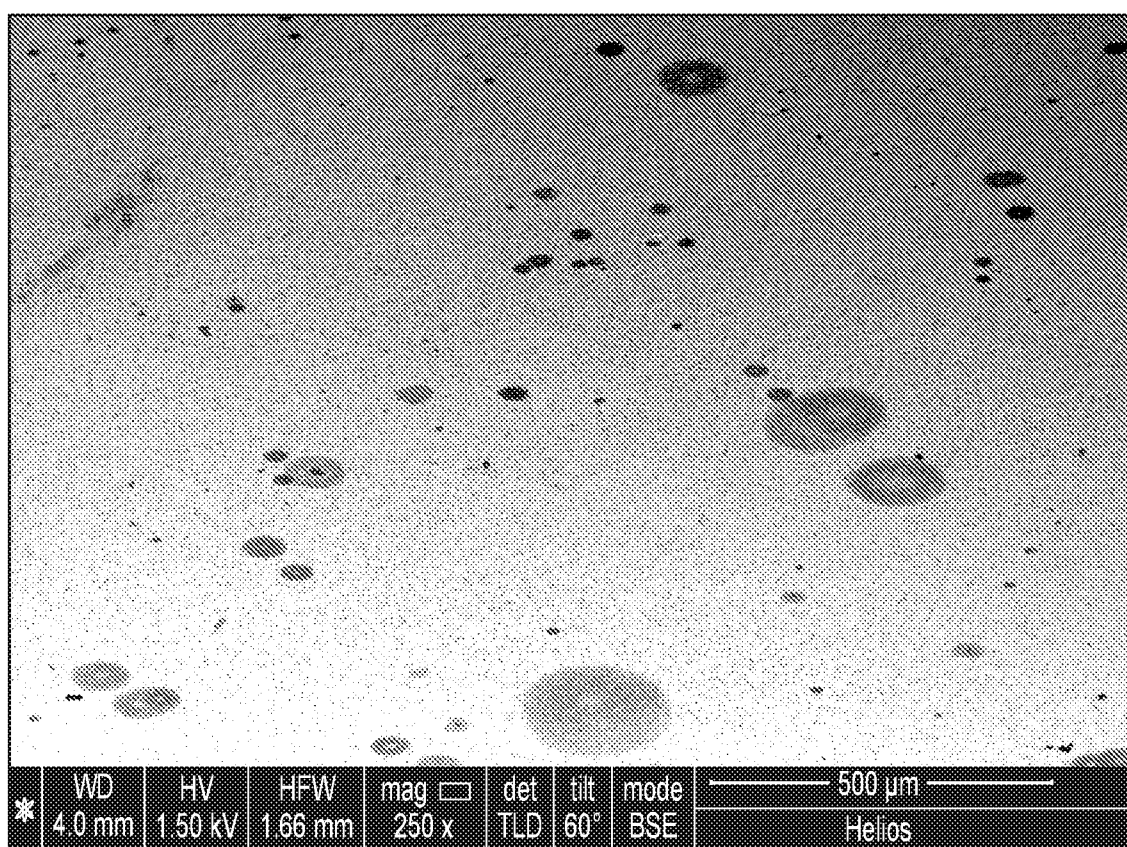


FIG. 12

13 / 17

C K series

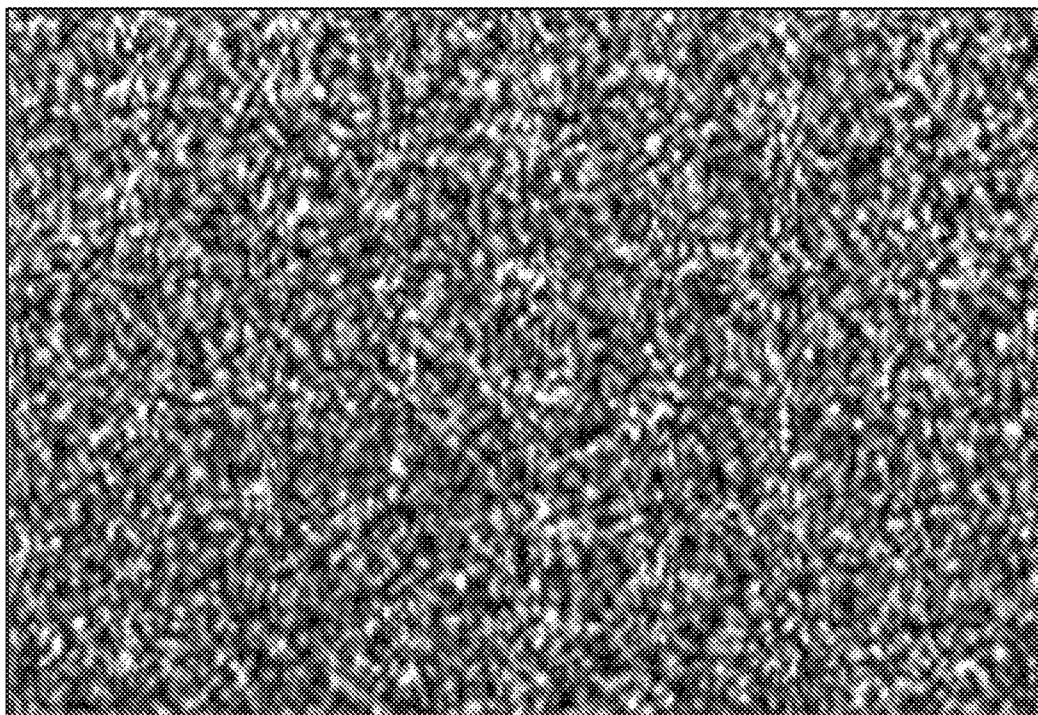


500µm

FIG. 13

14 / 17

F K series

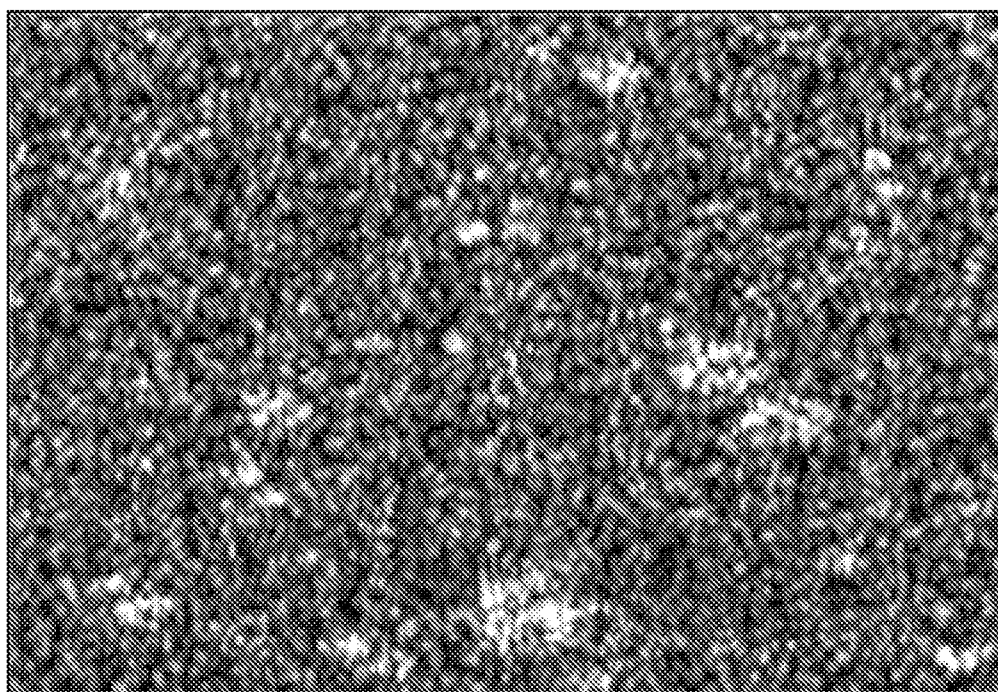

500µm

FIG. 14

15 / 17


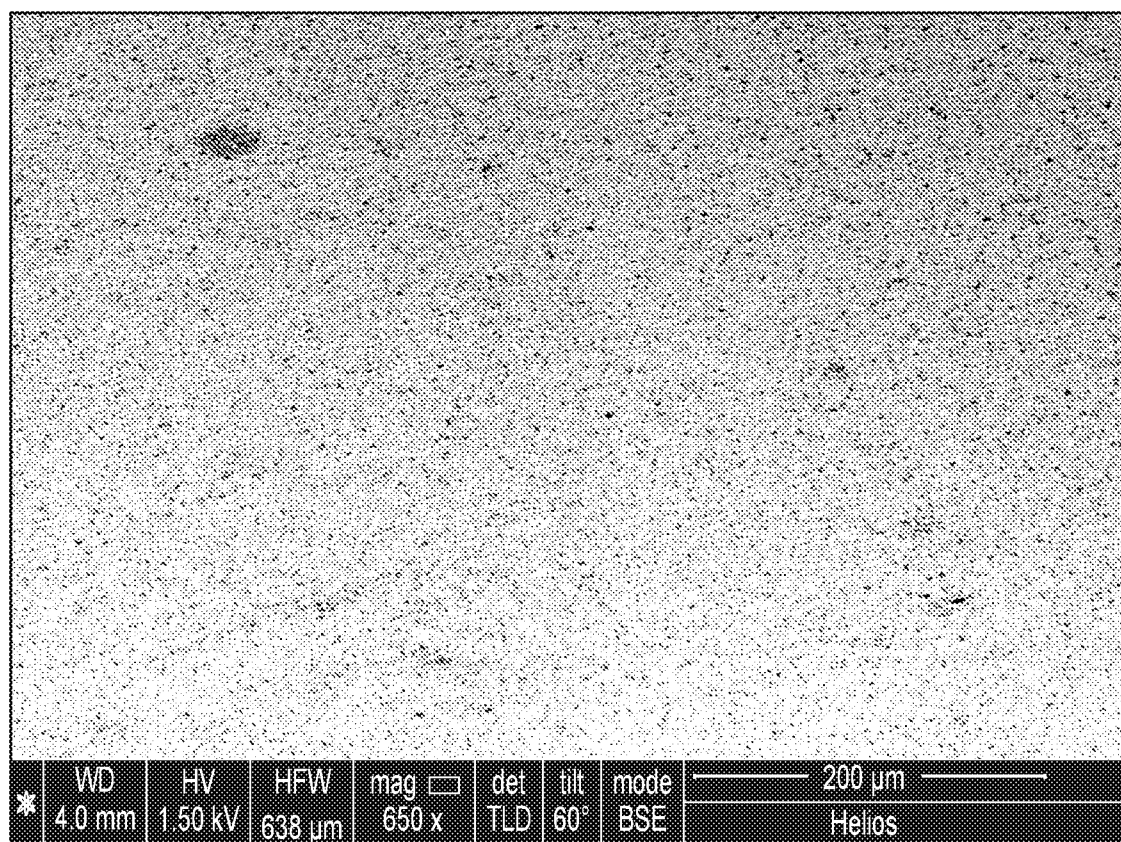


FIG. 15

16 / 17

C K series

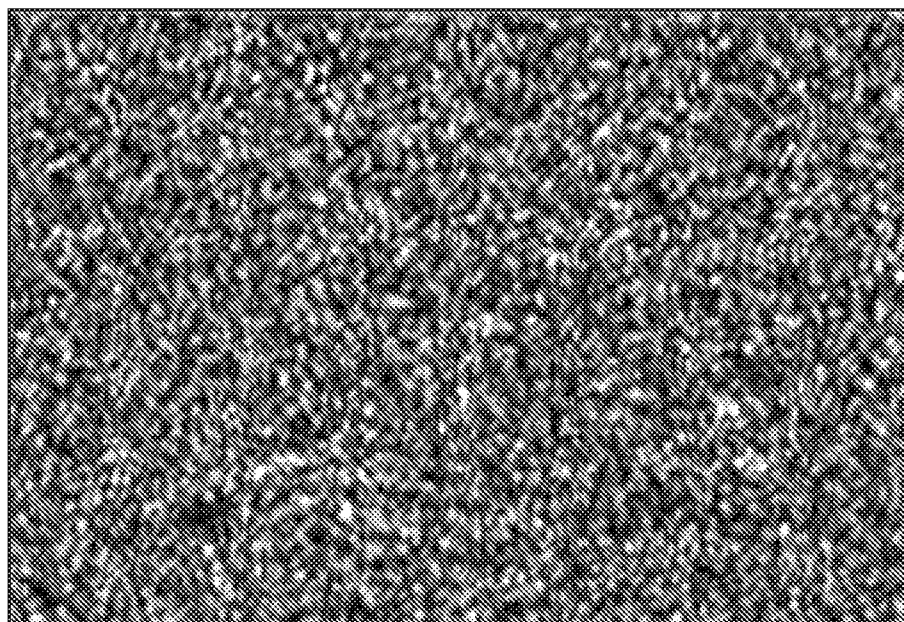


250µm

FIG. 16

17 / 17

F K series

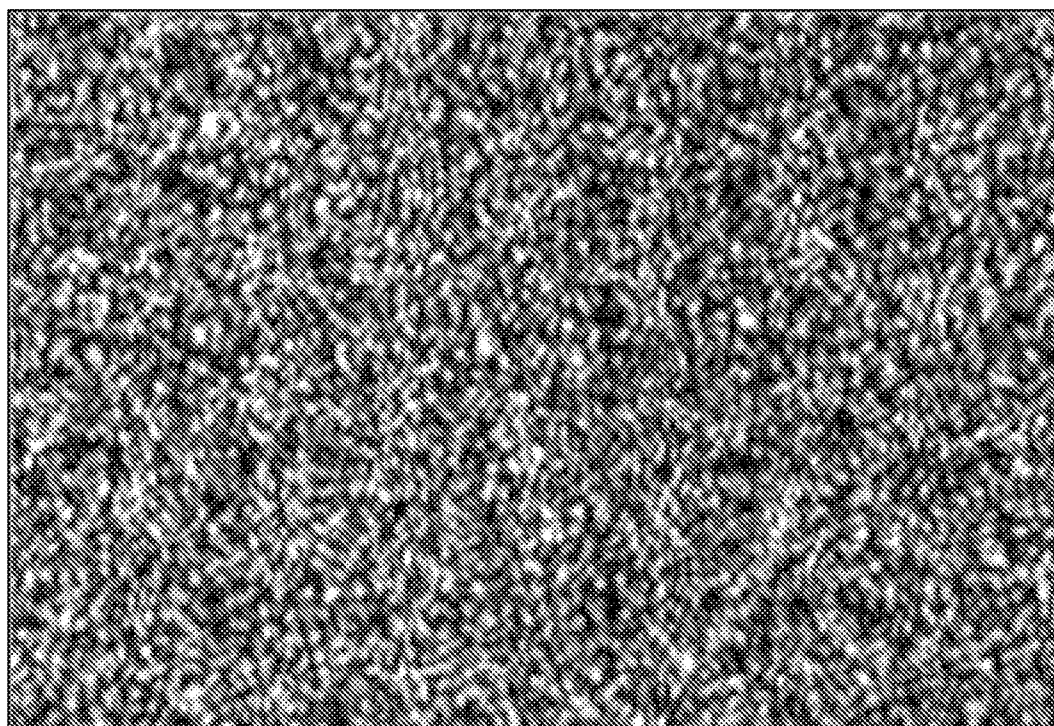

250µm

FIG. 17

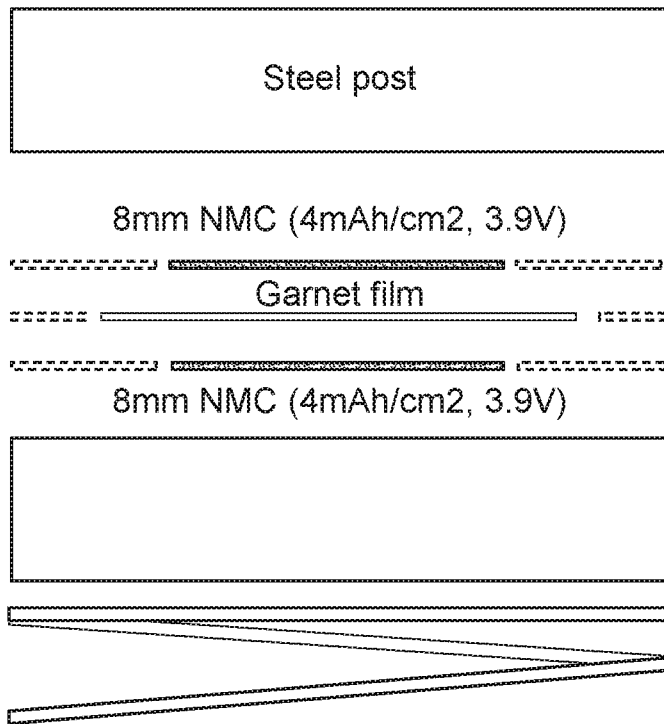


FIG. 3