




(86) Date de dépôt PCT/PCT Filing Date: 2015/01/29
(87) Date publication PCT/PCT Publication Date: 2015/08/06
(45) Date de délivrance/Issue Date: 2020/11/03
(85) Entrée phase nationale/National Entry: 2016/07/25
(86) N° demande PCT/PCT Application No.: IL 2015/050107
(87) N° publication PCT/PCT Publication No.: 2015/114632
(30) Priorité/Priority: 2014/02/02 (IL230775)

(51) Cl.Int./Int.Cl. *B28B 23/04* (2006.01),
F41H 5/04 (2006.01)
(72) Inventeurs/Inventors:
CHEREVATSKY, ABEL, IL;
YAVIN, BENJAMIN, IL
(73) Propriétaire/Owner:
IMI SYSTEMS LTD., IL
(74) Agent: MBM INTELLECTUAL PROPERTY LAW LLP

(54) Titre : PLAQUES/CARREAUX CERAMIQUES INCURVES PRECONTRAINTS ET PROCEDE DE PRODUCTION DE CES DERNIERS

(54) Title: PRE-STRESSED CURVED CERAMIC PLATES/TILES AND METHOD OF PRODUCING SAME

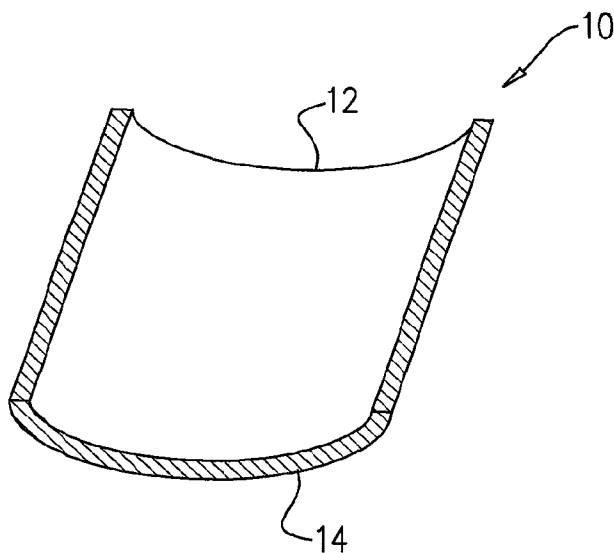

(57) Abrégé/Abstract:

A pre-stressed curved plate comprising a curved plate having at least one concave surface, the curved plate being enveloped and adhesively bonded with tensioned reinforcing fibers, whereby the reinforcing fibers are first wound around the plate under tension being spaced apart from the concave surface and subsequently subjected to pressure to stretch and bond the reinforcing fibers to the surfaces of the plate, where upon bonding, the tensile strain of the fiber introduces stress in the plate.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2015/114632 A1

(43) International Publication Date
6 August 2015 (06.08.2015)

- (51) International Patent Classification:
B28B 23/04 (2006.01) *F41H 5/04* (2006.01)
- (21) International Application Number:
PCT/IL2015/050107
- (22) International Filing Date:
29 January 2015 (29.01.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
230775 2 February 2014 (02.02.2014) IL
- (71) Applicant: ISRAEL MILITARY INDUSTRIES LTD.
[IL/IL]; 64 Sderot Bialik, P.O.B. 1044, 47100 Ramat Hasharon (IL).
- (72) Inventors: CHEREVATSKY, Abel; 5 Migdal-Oz Street, 71703 Modiin (IL). YAVIN, Benjamin; 1 Ein-HaKore Street, 75289 Richon Lezion (IL).
- (74) Agents: LAHAV, Sharona et al.; Seligsohn Gabrieli & Co., POB 1426, 61013 Tel Aviv (IL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: PRE-STRESSED CURVED CERAMIC PLATES/TILES AND METHOD OF PRODUCING SAME

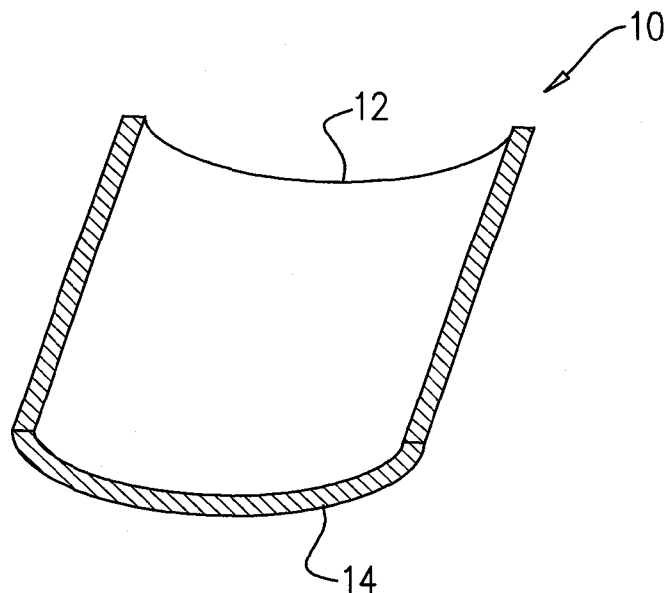


FIG. 1

(57) Abstract: A pre-stressed curved plate comprising a curved plate having at least one concave surface, the curved plate being enveloped and adhesively bonded with tensioned reinforcing fibers, whereby the reinforcing fibers are first wound around the plate under tension being spaced apart from the concave surface and subsequently subjected to pressure to stretch and bond the reinforcing fibers to the surfaces of the plate, where upon bonding, the tensile strain of the fiber introduces stress in the plate.

WO 2015/114632 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

PRE-STRESSED CURVED CERAMIC PLATES/TILES AND METHOD OF PRODUCING SAME

FIELD OF THE INVENTION

The present invention relates to pre-stressed curved ceramic plates that have improved ballistic protection characteristics and improved survivability under static and dynamic loading. The invention describes the structure of the plate, pre-stressed by an external envelope of stretched fibers bonded to the plate, and method of producing them.

BACKGROUND OF THE INVENTION

Ceramic materials are widely used for ballistic protection with the purpose of overcoming the high power penetration of projectiles, such as armor piercing (AP) projectiles, due to their relatively low density, high rigidity and high compression strength. See C.Barry Carter, M.Grant Norton, Ceramic Materials Science and Engineering, Springer Science, 2007. Usually, ceramics are used in structures for ballistic protection in the form of plates, tiles, pellets or specially shape ceramic elements.

The significant disadvantage of these ceramic components is their low fracture toughness and the formation of a wide net of relatively long cracks during fracture. Such behavior of ceramic components reduces their ability to protect against not only around the local impact zone, but also around the wide area, which is affected by propagated cracks.

The impact on the ceramic component by a projectile generates the propagation of compression stress waves, which are reflected back from the free surfaces of the protection plate as tensile waves.

The ceramic materials have low tensile strength and usually these tensile stresses lead to the fracture of the ceramic component. It is therefore reasonable to assume that pre-stressing (initial compression) the ceramic component in a ballistic protection

structure, should decrease the level of reflected tensile stresses after impact, and improve the protective ability of the ceramics component in a protection structure.

D. Sherman, J. PHYS IV FRANCE 7 1997, showed that inducing the compression stresses in the ceramics by confined frame reduces significantly their damage from impact.

T.J. Holmquist, International Journal of Impact Engineering, Nov. 2003, evaluated the response of ceramic targets with and without pre-stress subjected to projectile impact. The results demonstrate that ballistic performance of confined ceramic targets can be improved by pre-stressing the ceramic.

US Patent No. 6,389,594 describes that an applying of the high isostatic pressure on a monolith ceramics wrapped by a composite materials impregnated with adhesives to cure it, induces the internal stresses into the ceramics and improves the multi hit capabilities of the armor.

US Patent No. 6,601,497 discloses an armor component that includes a tile having a perimeter, with optional recess to encase a wrapping material wrapped around the perimeter of the tile. The purpose of wrapping the tile is to prevent lateral expansion of the tile if it is hit. The wrapping material pre-stresses the tile, however the technique used here limits the degree of tensioning of the wrapping material by relatively low ability of tensioners and delivery system for the wrapping materials, and does not take an advantage of the tensile ability of them. The level of pre-stressing of the tile depends on the perimeter geometry of the tile, where the circular perimeter provides a uniform pressure on the tile recess. The straight sections of the tile perimeter will not supply any pressure on the tile, so this technology shouldn't be effective for monolithic ceramic plates that usually have straight perimeter lines, like personal protection ceramic plates.

US Patent No. 7,300,893 describes an armor including a strain rate hardening elastomers. An option to wrap the ballistic clothes or fibers around the ceramic tiles is suggested in this invention as a way to encapsulate the elastomer, and not for pre-stressing of the ceramic plate.

US Patent No. 7,827,899 describes an armor panel to protect a body from an incoming projectile, comprising the ceramic or glass-ceramic plate and backing polyethylene clothes, encapsulated within by a wrapping layer and bonded together by applying an external pressure on this wrapping layer. An armor panel, produced by this way, contains the externally wrapped layer, but this layer doesn't induce any significant pre-stressing of the internal ceramic plate.

The above prior art relates to pre-stressing anti-ballistic flat ceramic articles.

It is an object of the present invention is to provide anti-ballistic pre-stressed curved monolithic plates/tiles and a method of producing same.

It is a further object of this invention to provide a method of preparing pre-stressed anti- ballistic curved plates/tiles.

Anti-ballistic articles containing pre-stressed curved plates/tiles according to the present invention have superior ballistic characteristics including significant reduction of damages to the plate when hit, thus, providing armor plate with an enhanced multi-hit capabilities. In addition, anti-ballistic articles containing pre-stressed curved plates of the present invention are of relatively lower weight and decreased thickness than conventional ballistic articles for achieving the same affect.

Further objectives, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the following figures.

SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided a pre-stressed curved plate comprising a curved plate having at least one concave surface, said curved plate being enveloped and adhesively bonded with tensioned reinforcing fibers, whereby the reinforcing fibers that were wound around the concave side of the plate and spaced apart from the concave surface were subjected to pressure at elevated temperature to stretch and bond the reinforcing fibers to the surfaces of the plates and maintain the tension after cooling , thereby stressing the plate, said bonding being effected by either applying an adhesive to the surfaces of the curved

plate prior to winding the reinforcing fibers or coating the reinforcing fibers prior to or during winding.

The bonded fibers maintain the internal tension due to their stretched status and induce compression stress in the plate.

It is to be understood that the term plate used herein includes single curve or multi-curve plates or tiles and shells containing at least one concave zone.

In some embodiments, the reinforcing fibers are selected from aramid fibers, poly (p-phenylene-2,6-benzobisoxazole) fibers, S glass fibers, E glass fibers, carbon fibers, thermoplastic fibers, and metal fibers or their combination, optionally the thermoplastic fibers are polyamide fibers, high-molecular-weight polyethylene (HMWPE) fibers, polyethylene fibers or polypropylene fibers.

The invention also provides methods for preparing stressed curved ceramic plates, as follows.

- a. -a curved plate is coated with adhesive.
 -pre-tensioned reinforcing fibers are wound around the ceramic plate, contacting the convex surface of the plate, and spanning across the concave surface of the plate, leaving a distance between the fiber and the convex surface.
 -external pressure, such as by autoclave or press is then applied, optionally at elevated temperature, to the wound fiber on the concave side of the plate, to stretch it until it comes in contact with the concave surface of the plate and is bonded thereto by curing the adhesive.
 - cooling the plate and releasing the external pressure, whereby the bonded tensioned fibers induce compression stress on the plate.
- b. -the same procedure as a., with the exception that the reinforcing fibers are pre-impregnated with adhesive prior to winding or are impregnated during winding.

c. -Where the tensile strength of reinforcing fiber is limited and will not allow the fiber to stretch sufficiently under applied pressure and elevated temperature, to contact the concave surface, one can place a removable spacer on the concave surface so that the reinforcing fiber will be wound around the spanner, increasing the length of the fiber loop, so that when the spacer is removed the reinforcing

fiber will have enough length and tenacity be pressed against the concave surface and adhere thereto.

DETAILED DESCRIPTION OF THE INVENTION

In accordance with the present invention, the curved plate is preferably a ceramic plate and can be made of aluminum oxide (Al_2O_3), boron carbide (B_4C), silicon carbide (SiC), boron silicon carbide (BSC), titanium diboride (Ti B_2), aluminum nitride, silicon nitride, sintered silicon carbide, sintered silicon nitride, and glass-ceramic or combinations thereof. It is preferred that the plate have a thickness of between 2-30mm. Furthermore, the plate, tile or shell may also be multi-curved containing at least one concave zone.

The reinforcing fibers are selected from aramid, Zylon^(R), glass, carbon, thermoplastics (nylon, polyethylene, polypropylene) or metal (boron, steel, aluminum) fibers.

Suitable adhesives for bonding the fibers to the curved ceramic plate are preferably hot melt thermoplastic adhesives like polyethylene and polypropylene films or thermosetting adhesives like epoxy with optionally high or low curing temperatures., rubber or elastomer based adhesives, ceramic adhesives.

The fibers are preferably impregnated with an adhesive material either before or during the winding, but before subjecting them to expansion by external pressure. Alternatively, the plate can be coated with an adhesive prior to winding the reinforcing fiber.

The pre-stressed curved plate can form an insert for either personal body armor, or antiballistic panels for vehicles, ships, aircrafts and helicopters, or for a helmet.

One advantage of the pre-stressed curved plate of the present invention is that it has increased multi-hit capability.

A second advantage of the pre-stressed curved plate anti-ballistic articles containing according to the present invention is that they achieves the same ballistic characteristics with reduced weight.

During the winding procedure the fibers should have some initial tension and not be slack to assure tight winding. This can be achieved by tensioners, see S.T. Peters, W.D. Humphrey, R.F. Foral, Filament Winding, Composite Structure, Fabrication, SAMPE, ISBN 0-938994-81-6.

To maintain the tension in the wound reinforcing fibers and to induce the compression in the plate, the wound plate should be cured under applied external pressure and optionally at an elevated temperature. The external pressure should be sufficiently high to maintain full contact between the fibers and the concave surface of the plate during the curing of adhesive and final bonding of the stretched fibers to the plate. The degree of compression of the plate will depend on the curvature of the plate, the direction of winding trajectory of the fibers, and elastic modulus of the fibers. Thus, the same fibers will induce different compressions in plates with different curvatures.

In cases where the ultimate tensile strain of a fiber is so low that even under pressure and elevated temperature it would not stretch sufficiently to reach and bond to the concave surface of a ceramic plate, then it is possible to interpose a removable spacer between the concave surface of the plate and the wound fiber. The removable spacer should have an appropriate geometry to increase the length of the fiber spanning the concave surface of the curved plate, in effect transforming the concave side to convex with respect of the winding. Thus, when pressure is applied to the wound plate and the spacer is removed the fiber will be sufficiently stretched to be pressed against the concave surface of the plate and be bonded thereto. After bonding the tensile strain of the fiber will induce stress to the plate which is maintained upon cooling.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a curved ceramic plate before winding with reinforcing fibers.

Fig. 2 is a cross-sectional view of a curved ceramic plate wound initially with reinforcing fibers in accordance with the present invention,

Fig. 3 is a cross-sectional view of a curved ceramic plate with wound fiber stretched and bonded to the surfaces of the plate.

Fig. 4 is a cross-sectional view of a curved ceramic plate with spacer wound initially with reinforcing fiber prior to applying pressure at elevated temperature.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring now to Figs. 1, there is illustrated a perspective view of a curved ceramic plate 10 having a concave surface 12 and a convex surface 14. In Fig. 2 the curved plate 20 is wound with an adhesive coated reinforcing fiber 16 under tension. The fiber 16 thus comes in direct contact with the convex surface 14 and loops around the concave surface 12 forming a taught straight line between the edges 17 and 19 of the plate, leaving a space 15 between the tautly wound fiber 16a and the concave surface 12 of the plate. Fig. 3 shows the fiber 16, 16a wound around a curved ceramic plate 30 after being subjected to elevated temperature of about 180°C, while applying pressure (see the arrows) against the tensioned fiber winding 16, 16a, pressing it against the surfaces 12, 14 and curing it. This can be done by means of a hydroclave, autoclave, isotactic press or other suitable apparatus as described in US Patent No. 6,389,594. The tensioned fiber winding 16, 16a is thus bonded to the concave surface 12 and compresses the curved plate.

Fig. 4 illustrates in cross-section a curved ceramic plate 40 having a concave surface 12 and a convex surface 14. A removable spacer 42 is placed on the concave surface 12. Reinforcing fiber 44, 44a having low tensile strain which would prevent it from being pressed against the concave surface 12 under pressure were it stretched taught across line x-x, is wrapped 44a around a spacer 42 raising the fiber 44a over the concave surface 12 above the line x-x. This increases the length of the fiber 44a on the concave side sufficiently so that when the temperature is raised and pressure is applied, and the spacer 42 is removed, the

fiber 44a will stretch sufficiently to reach the concave surface 12 to be bonded to the plate and cured.

The type of fiber should be chosen according to its possible elongation and maximum elastic modulus to increase the compression stresses in the plate.

It should be noted that by using different fibers and/or different adhesives and/or other bonding conditions such as different processing temperature or pressure, one may vary the degree of impregnation and/or the degree of tensioning of the fibers and/or the degree of compression which may affect the degree of stress in the ceramic plate/ tile.

In practice, ceramic plates of this invention are generally backed with an anti-ballistic cloth in anti-ballistic body protecting articles.

EXAMPLE:

A number of ceramic body armor articles were prepared as follows. Aluminum oxide double curved ceramic plates 7.1mm thick and weighing an average of 2100g were wound with 200g of T700 carbon fibers under tension, treated under pressure and 180 degrees temperature to pre-stress the plates, and backed with 23 layers of polyethylene cloth, with average weight of 460g including adhesive. These articles had a general weight of 2760g.

These articles were tested against APM2 projectiles with velocity range 868-883 m/s and provided good protection (two bullets were stopped by these articles) whereas articles with the same ceramic plates without pre-stressing have to include at least 40 layers of polyethylene cloth with average weight of 2900g to provide the same ballistic protection.

CLAIMS

1. A pre-stressed curved plate comprising:

a curved ceramic plate having at least one concave surface;
and
reinforcing fibers that are wound around the ceramic plate,
wherein the reinforcing fibers are under tension and
adhesively bonded thereto, whereby the curved ceramic plate
is maintained under compression stress.
2. The curved plate in accordance with claim 1, wherein the
curved ceramic plate is a ceramic tile.
3. The curved plate in accordance with claim 2, wherein the
ceramic plate is made of aluminum oxide (Al_2O_3); hot
pressed, sintered or reaction bonded boron carbide (B_4C);
silicon carbide (SiC); boron silicon carbide (BSC); titanium
diboride (Ti B_2); aluminum nitride; silicon nitride; and glass-
ceramic, or combinations thereof.
4. The curved plate in accordance with claim 1, wherein the
ceramic plate has a thickness of between 3 to 30 mm.
5. The curved plate in accordance with claim 1, wherein the
reinforcing fibers are selected from aramid fibers, poly(p-
phenylene-2,6-benzobisoxazole) fibers, S glass fibers, E
glass fibers, carbon fibers, thermoplastic fibers, and metal
fibers or their combination.
6. The curved plate in accordance with claim 5, wherein the
thermoplastic fibers are polyamide fibers, high-molecular-
weight polyethylene (HMWPE) fibers, polyethylene fibers or
polypropylene fibers.

7. The curved plate in accordance with claim 5, wherein the metal fibers are boron fibers, steel fibers or aluminum fibers.
8. The curved plate in accordance with claim 1, wherein the adhesive is selected from epoxy, phenolic, thermoplastic, thermosetting adhesives, rubber based adhesives, elastomer based adhesives and ceramic adhesives.
9. The curved plate in accordance with claim 1, further comprising a removable spacer interposed between the concave surface of the ceramic plate and the reinforcing fibers.
10. A method of preparing a pre-stressed curved plate having at least one concave surface, comprising:

winding tensioned reinforcing fibers around a curved ceramic plate whereby a space is left between the at least one concave surface of the ceramic plate and the wound reinforcing fibers; and

applying external pressure to the tensioned fibers to stretch the fibers until they contact and bond to the at least one concave surface, thereby providing a compression stress on the curved plate.
11. The method of claim 10, further comprising heating the tensioned fibers to an elevated temperature during the step of applying external pressure to the tensioned fibers, in order to stretch the fibers until they contact and bond to the at least one concave surface.
12. The method of claim 10, further comprising interposing a removable spacer between the at least one concave surface and the reinforcing fibers in order to distance the fibers from

the at least one concave surface and to increase their length prior to subjecting the fiber wound ceramic plate to pressure and temperature.

13. The method of claim 12, further comprising ensuring that the removable spacer at least partially melts during the application of external pressure at elevated temperature.
14. The method of claim 11, further comprising subjecting the ceramic plate to pressure at elevated temperature.
15. The method of claim 10, further comprising applying adhesive to the at least one concave surface (12) of the curved ceramic plate (10) or coating the reinforcing fibers (16) prior to winding thereof.
16. The method of claim 10, further comprising applying adhesive to the at least one concave surface (12) of the curved ceramic plate (10) and coating the reinforcing fibers (16) prior to winding thereof.

1/2

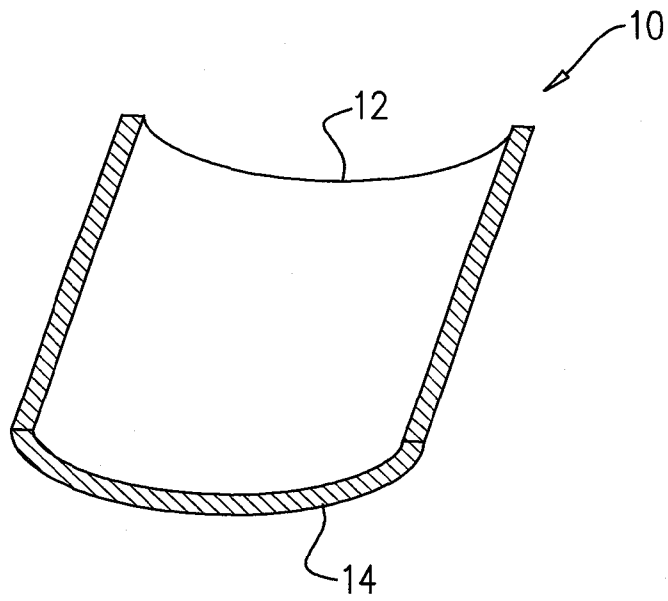


FIG. 1

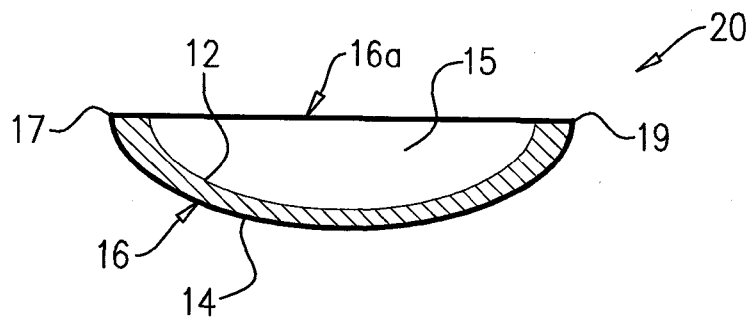


FIG. 2

2/2

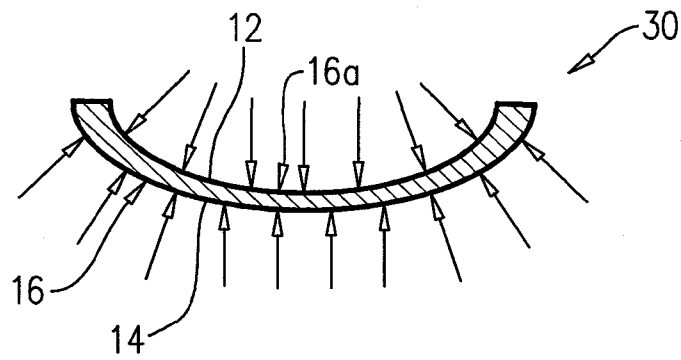


FIG. 3

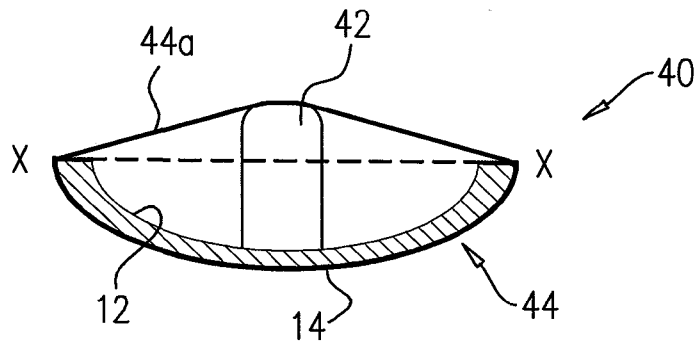


FIG. 4

