



(86) Date de dépôt PCT/PCT Filing Date: 2013/07/26
(87) Date publication PCT/PCT Publication Date: 2014/01/30
(45) Date de délivrance/Issue Date: 2021/06/22
(85) Entrée phase nationale/National Entry: 2015/01/26
(86) N° demande PCT/PCT Application No.: US 2013/052369
(87) N° publication PCT/PCT Publication No.: 2014/018911
(30) Priorités/Priorities: 2012/07/26 (US61/676,156);
2013/04/05 (US61/809,091)


(51) Cl.Int./Int.Cl. *B01J 8/02* (2006.01),
B01D 24/12 (2006.01)

(72) Inventeurs/Inventors:
SAUL, GARTH HAYES, US;
NORELL, ROBERT GLEN, US;
BRABEC, DEAN GERALD, US;
SCHMITT, BENJAMIN, US;
VISEKRUNA, DUSAN, US;
EKHOLM, MICHAEL RICHARD, US;
EBERHARDT, EUGENE, US;
WOLFE, EDMUND M., US

(73) Propriétaire/Owner:
AQSEPTENCE GROUP, INC., US

(74) Agent: BRION RAFFOUL

(54) Titre : GRILLE DE SUPPORT DE FORME AMELIOREE
(54) Title: ENHANCED SHAPE SUPPORT GRID

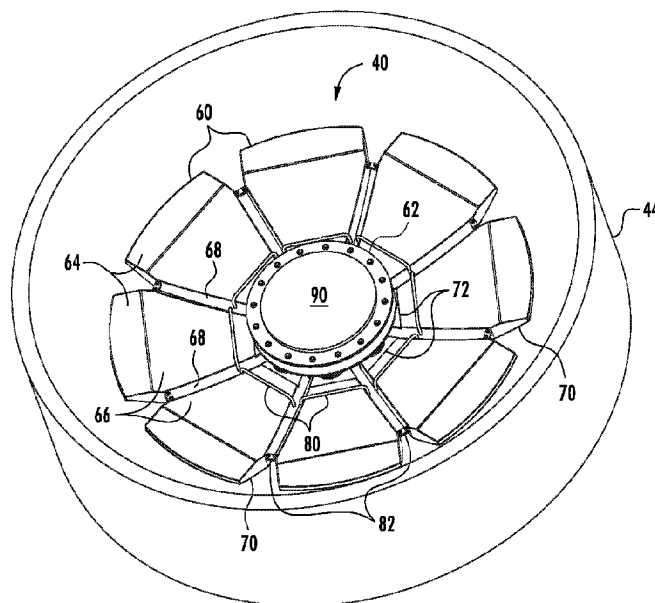

(57) **Abrégé/Abstract:**

A support grid assembly for use in a vessel. The support grid assembly includes panels each including a first wall including a media-supporting screen and a second wall to be supported by the vessel wall inner surface. A manifold is coupled to the panels and is in hydraulic communication with vessel outlet. The manifold and the panels permit fluid to flow through the screen in each panel, through the panels, into the manifold, and through the manifold to the outlet of the vessel, as well as in the reverse direction. At least a portion of the first wall may slope downward toward the manifold, and at least a portion of the second wall may form a bottom surface that is curved to substantially conform to a curvature of the vessel wall inner surface. The panels may be arranged in a circular configuration extending radially from the manifold.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
30 January 2014 (30.01.2014)



(10) International Publication Number
WO 2014/018911 A1

- (51) International Patent Classification:
B01D 33/23 (2006.01)
- (21) International Application Number:
PCT/US2013/052369
- (22) International Filing Date:
26 July 2013 (26.07.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/676,156 26 July 2012 (26.07.2012) US
61/809,091 5 April 2013 (05.04.2013) US
- (71) Applicant: **BILFINGER WATER TECHNOLOGIES INC.** [US/US]; 1950 Old Highway 8 NW, New Brighton, Minnesota 55112 (US).
- (72) Inventors: **SAUL, Garth Hayes**; 6650 255th St. E., Faribault, Minnesota 55021 (US). **NORELL, Robert Glen**; 1842 Long Lake Road, New Brighton, Minnesota 55112 (US). **BRABEC, Dean Gerald**; 9775 285th Ave. NE, North Branch, Minnesota 55056 (US). **SCHMITT, Benjamin**; 11909 Norway St. NW, Coon Rapids, Minnesota 55448 (US). **WISEKRUNA, Dusan**; 10222 Bald

Eagle Trail, Woodbury, Minnesota 55129 (US). **EK-HOLM, Michael Richard**; 1623 West 32nd Street, Minneapolis, Minnesota 55408 (US). **EBERHARDT, Eugene**; 572 Jansen Avenue SE, Buffalo, Minnesota 55313 (US). **WOLFE, Edmund M.**; 3517 74th Ave N., Brooklyn Park, Minnesota 55443 (US).


(74) Agent: **WITSIL, Matthew W.**; Moore & Van Allen, PLLC, P.O. Box 13706, Research Triangle Park, North Carolina 27709 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: ENHANCED SHAPE SUPPORT GRID

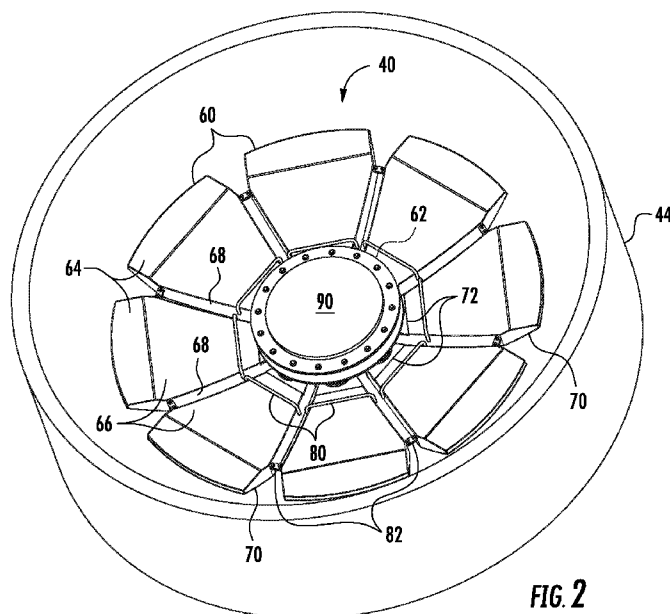

(57) Abstract: A support grid assembly for use in a vessel. The support grid assembly includes panels each including a first wall including a media-supporting screen and a second wall to be supported by the vessel wall inner surface. A manifold is coupled to the panels and is in hydraulic communication with vessel outlet. The manifold and the panels permit fluid to flow through the screen in each panel, through the panels, into the manifold, and through the manifold to the outlet of the vessel, as well as in the reverse direction. At least a portion of the first wall may slope downward toward the manifold, and at least a portion of the second wall may form a bottom surface that is curved to substantially conform to a curvature of the vessel wall inner surface. The panels may be arranged in a circular configuration extending radially from the manifold.

WO 2014/018911 A1

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

ENHANCED SHAPE SUPPORT GRID

[0001] Intentionally left blank.

FIELD

[0002] Embodiments disclosed herein generally relate to a support grid for use in a vessel containing a media bed, which may include a filtering surface supporting the media bed and be supported by an inner surface of the vessel.

BACKGROUND

[0003] In some petrochemical and general industry applications, internal screens are needed in process pressure vessels for the purposes of filtering and supporting filter media. For some of these applications, however, the process induces large loads on the internal screen surfaces and generates extreme swings in temperature ranges that cause thermal expansion. Traditional flat surface grid assemblies may be located near the tangent line of the head to shell weld. With such designs, the entire volume of the head may be a dead area, with no reaction or drying adsorption occurring. Further, the typical flat grid's design may require support beams to carry the weight of the bed and the process pressure differential.

[0004] With respect to the utilization of a media bed in the vessel, in some traditional installations, during down flow in a vessel a central outlet may be used and may cause flow to move sideways as it reaches lower elevations of the bed. Flow rates can vary within only a single level of the bed, causing poorly utilized catalyst and potential early breakthrough of the sieve. In an up flow case, an outlet basket covering the nozzle may create poor distributed flow. The implications for bed regeneration can be quite severe, and may have the potential for early breakthrough and effective loss of bed height.

[0005] In designing vessels, it is often desirable to provide the end user with a maximum vessel volume, to effectively resist the expected process loads, and to provide a good distribution pattern for flows moving through the vessel.

SUMMARY

[0006] In accordance with one embodiment disclosed herein, a support grid assembly for use in a vessel including a wall with an inner surface is provided. The support grid assembly includes at least one panel including a first wall including a screen configured to support a media, and a second wall configured to be supported by the inner surface of the wall of the vessel. A manifold is coupled to and in hydraulic communication with the at least one panel and configured to be in hydraulic communication with an inlet or outlet of the vessel, depending on the mode of operation. In some such embodiments, at least a portion of the first wall of the at least one panel is configured to slope downward toward the manifold when installed in the vessel, at least a portion of the second wall of the at least one panel forms a bottom surface that is curved to substantially conform to a curvature of the inner surface of the wall of the vessel, or a combination thereof. In some such embodiments and in combination with any of the above embodiments, the at least one panel includes a plurality of panels coupled to and in hydraulic communication with the manifold.

[0007] In some embodiments and in combination with any of the above embodiments, wherein the manifold and the plurality of panels are configured to permit fluid to flow in a first direction through openings in the screen, through the at least one panel, into the manifold, and through the manifold directed to the outlet of the vessel, in a second, reverse direction, or in both directions. In some embodiments and in combination with any of the above embodiments, each panel is in hydraulic communication with the manifold via a tubular connection.

[0008] In some embodiments and in combination with any of the above embodiments, the manifold includes an outlet that directs flow to the outlet of the vessel, and the tubular connection and manifold outlet are configured such that fluid flows through the tubular connection in a direction opposite fluid flow through the manifold outlet. In some embodiments and in combination with any of the above embodiments, the manifold outlet is configured to direct flow downward. In some embodiments and in combination with any of the above embodiments, the manifold has an upper end and a top screen is mounted to the upper end of the manifold.

[0009] In some embodiments and in combination with any of the above embodiments, the manifold includes an outlet that directs flow to the outlet of the vessel, and the tubular connection and manifold outlet are configured such that fluid flows through the tubular connection in the same direction as fluid flow through the manifold outlet. In some

embodiments and in combination with any of the above embodiments, the manifold outlet is configured to direct flow upward.

[0010] In some embodiments and in combination with any of the above embodiments, the tubular connection from each panel to the manifold is made through a bottom surface of the manifold, top surface of the manifold, side surface of the manifold, or any combination thereof.

[0011] In some embodiments and in combination with any of the above embodiments, the tubular connection is at a connection interface, and comprises a bellows element or a joint that allows expansion and contraction of components around the connection interface.

[0012] In some embodiments and in combination with any of the above embodiments, the manifold comprises flow control vanes or other flow control mechanisms. In some embodiments and in combination with any of the above embodiments, each panel defines a volume, and within the volume are flow control vanes or other flow control mechanisms. In some such embodiments, the flow control vanes comprise supports for the screen of each panel.

[0013] In some embodiments and in combination with any of the above embodiments, the panels are arranged in a circular configuration extending radially from the manifold, and the panels have a proximal end near the manifold and an opposite, wider distal end. In some embodiments and in combination with any of the above embodiments, the second wall of at least one panel includes a screen, and in some embodiments and in combination with any of the above embodiments, all walls of at least one panel include a screen.

[0014] In some embodiments and in combination with any of the above embodiments, the support grid assembly includes a layer of compressible material configured to be interposed between the bottom surface of the panels and the inner surface of the vessel. When the support grid assembly is installed in the vessel, the bottom surface of the panels engages the layer of compressible material and the layer of compressible material engages the inner surface of the vessel. In some such embodiments, the layer of compressible material comprises a thermal gasket. In other such embodiments, the layer of compressible material comprises textured fiberglass yarn.

[0015] In some embodiments and in combination with any of the above embodiments, the support grid assembly includes a bellows element or a joint that allows expansion and contraction hydraulically interposed between the manifold and the inlet or outlet of the vessel.

[0016] In some embodiments and in combination with any of the above embodiments, each panel includes a side extending substantially radially from proximate to the manifold, and a swing arm is pivotally mounted to a side of at least two adjacent panels for attaching to a swing arm of the adjacent panel. In some such embodiments, a support bar is mounted to the side of each panel, and the swing arm is mounted to the side of each adjacent panel by being pivotally mounted to the support bar. In some embodiments and in combination with any of the above embodiments, wherein each panel includes a side extending substantially radially from proximate to the manifold and a support bar is mounted to the side of each panel.

[0017] In some embodiments and in combination with any of the above embodiments, the support grid assembly includes a rod mounted to the manifold and a support member defining a channel and hook portion mounted to the panel, wherein the rod is received in the channel and hook portion to couple the panel to the manifold.

[0018] In accordance with another embodiment disclosed herein, another support grid assembly for use in a vessel including a wall with a curved inner surface is provided. The support grid assembly includes means for supporting a filter media in the vessel and means for receiving filtered process fluid from the means for supporting the filter media. The means for supporting the filter media includes a curved surface configured to conform to and be proximate to the curvature of the inner surface of the wall of the vessel proximate to a lower end of the vessel. In some such embodiments, the means for receiving filtered process fluid defines a plurality of openings for receiving filtered process fluid from a plurality of means for supporting the filter media.

[0019] In accordance with another embodiment disclosed herein, a method of making a support grid assembly for a vessel is provided. The method includes fabricating a plurality of panels, each panel including a first wall including a screen configured to support a media, and a second wall configured to be supported by an inner surface of the wall of the vessel proximate to a lower end of the vessel. At least a portion of the second wall of each of the plurality of panels forms a bottom surface that is curved to substantially match a curvature of the inner surface of the wall of the vessel. A manifold is fabricated that defines a plurality of openings for receiving the plurality of panels to place the manifold and the panel in hydraulic communication. The plurality of panels is coupled to the manifold to place the plurality of panels in hydraulic communication with the manifold. In some such embodiments, when coupled, the manifold and the plurality of panels are configured to permit fluid to flow in a first direction through openings

in the screen, through the at least one panel, into the manifold, and through the manifold directed to an outlet of the vessel, in a second, reverse direction, or in both directions. In some such embodiments, the method includes placing a layer of compressible material on the inner surface of the wall of the vessel prior to assembling the plurality of panels to the manifold, with the layer of compressible material configured to be between the panels and the inner surface of the wall of the vessel.

[0019a] In a first aspect, this document discloses a support grid assembly for use in a vessel including a wall with an inner surface, the support grid assembly comprising: at least one panel including a first wall and a second wall, the first wall including a first screen section and a second screen section, the first and second screen sections configured to support a media defining a filtering surface of the first wall, and the second wall configured to be supported by the inner surface of the wall of the vessel, wherein at least one control vane is positioned between the first wall and the second wall, said at least one control vane supporting the first and second screen sections and wherein at least a portion of each flow control vane is parallel to a longitudinal axis of each panel, and wherein the first screen section is adapted to extend to the inner surface of the wall of the vessel such that the first wall directly intersects the second wall; and a manifold coupled to and in hydraulic communication with the at least one panel and configured to be in hydraulic communication with one of: an inlet and an outlet of the vessel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] For a more complete understanding, reference should now be had to the embodiments shown in the accompanying drawings and described below. In the drawings:

[0021] FIG. 1 is a schematic cross-section view of a vessel in which an embodiment of a support grid assembly is disposed.

[0022] FIG. 2 is a perspective view of an embodiment of a support grid assembly disposed in a vessel head according to one embodiment.

[0023] FIGS. 3 and 4 are perspective views of portions of the support grid assembly of FIG. 2 in the vessel head illustrating the interior of a manifold assembly.

[0024] FIGS. 5A and 5B are perspective and elevation cross-sectional views, respectively, of the support grid assembly of FIG. 2 in the vessel head.

[0025] FIGS. 6A and 6B are perspective and partially exposed perspective views of a portion of the support grid assembly of FIG. 2, respectively.

[0026] FIG. 7 is a perspective view of a portion of the support grid assembly of FIG. 2.

[0027] FIG. 8 is a perspective view of a portion of a support grid assembly according to another embodiment.

[0028] FIG. 9 is a perspective view of a portion of a support grid assembly according to another embodiment.

[0029] FIG. 10 is a plan view of another embodiment of a support grid assembly disposed in a vessel head.

[0030] FIG. 11 is a section view of the support grid assembly of FIG. 10 taken along line 11-11 of FIG. 10.

[0031] FIG. 12 is an exploded view of the support grid assembly of FIG. 10.

[0032] FIG. 13 is a perspective view of the support grid assembly of FIG. 10.

[0033] FIG. 14 is a detail view of a connection of panels of the support grid assembly of FIG. 10.

DETAILED DESCRIPTION

[0034] The following detailed description of embodiments refers to the accompanying drawings, which illustrate specific embodiments. Other embodiments having different structures and operation do not depart from the scope of the present disclosure.

[0035] Embodiments disclosed herein include a support grid assembly that may be used within tanks or vessels to support media beds through which fluids are directed. Such media beds may be used in a variety of processes, including but not limited to catalytic, molecular sieves, alumina drying, resin ion exchange, carbon filtering, etc. Various fluids, including but not limited to liquid, gas, oil, water, etc., may be processed through the vessel. The vessel may be oriented vertically, horizontally, or in other orientations and configurations known in the art. The vessel may generally comprise a body and head portions coupled at opposite ends of the body to form a sealed interior vessel volume. The support grid assembly may be disposed along and utilize the inner surface of the vessel head for structural support, as well as to maximize the interior vessel volume for use by additional media and other interior components.

[0036] The support grid assembly may include a plurality of panels having a filtering surface formed by one or more screens on the top, side, bottom, or other exposed surface of the panels, and a manifold coupled to the panels. The panels may be, in some embodiments, radially disposed about the manifold. The screens may support a media bed, and in certain modes such as a down flow, fluid may flow through the media bed and the screens into the panels. Fluid may then flow into the manifold and out of the vessel. Fluid may also flow directly into the manifold through a screen or perforated plate portion that forms a top of the manifold. Alternatively, the direction of flow may be reversed, such as in certain modes of up flow, and flow into the manifold may be distributed to the panels, with flow then passing out of the panels, through the

screens, and into the vessel. Flow through the assembly in either an up flow or down flow condition can be compressible (gas) or incompressible (liquid).

[0037] Certain terminology is used herein for convenience only and is not to be taken as a limitation on the embodiments described. For example, words such as “top”, “bottom”, “upper,” “lower,” “left,” “right,” “horizontal,” “vertical,” “upward,” and “downward” merely describe the configuration shown in the figures. Indeed, the referenced components may be oriented in any direction and the terminology, therefore, should be understood as encompassing such variations unless specified otherwise. Throughout this disclosure, where a process or method is shown or described, the method may be performed in any order or simultaneously, unless it is clear from the context that the method depends on certain actions being performed first.

[0038] Referring to the drawings, where like reference numerals refer to the same or similar parts, FIG. 1 shows a support grid assembly **40** in a vessel **42** according to one embodiment. The support grid assembly **40** may be concentrically disposed in a lower vessel head **44** of the cylindrical vessel **42**. The vessel **42** may also include, for example, a vessel body **46**, interior vessel components (not shown), the opposite vessel head **48**, an inlet **52**, and an outlet **54**. A fluid surface **56** is shown with flow “F”, which in certain modes of operation could be in the opposite direction. Filter media is not shown. One example of a vessel that can be used with the embodiments described herein is illustrated in FIG. 4 of U.S. Patent No. 5,015,383.

[0039] The support grid assembly **40** includes one or more grid panels **60** coupled to a center manifold **62**. FIG. 1 illustrates eight panels **60**, although any number of panels may be used, with the panels **60** radially disposed around the manifold **62**. The panels **60** may be coupled to the manifold **62** using a pipe-based interface with flange or socket type connections that form a seal between the panels **60** and the manifold **62**. Other types of interfaces and connections known in the art may be used with the embodiments described herein.

[0040] The panels **60** may rest against the inner wall of the vessel head **44** for structural support. The panels **60** may be formed from walls with, for example, a first wall that includes one or more sections of screens **64**, **66** that are supported by one or more other walls **68**, **70**, **72**. The walls **68**, **70**, **72** are secured together to form a sealed enclosure, which may be considered to be,

for example, a housing. The bottom surface of the panel **60** (or second wall **70**) may be supported by and curved to conform to or approximately match the curvature of the curved inner

surface of the wall of the vessel head **44**. At least a portion of the first wall, such as screen **66**, may slope downward toward the manifold **62**. This may increase the volume in the vessel **42** available for fluid. Any panel surface, including any walls **68**, **70**, **72**, may include one or more screens. In one embodiment, the bottom surface of one or more panels **60** (second wall **70**) includes a screen. In another embodiment, all walls of one or more panels **60** include screens.

[0041] The panels **60** may also rest against a gasket or other intermediate compressible layer surface between the panels **60** and the vessel wall. This additional gasket or layer is intended to fill any gap and excessive spaces between the panel and the vessel wall or shell. Although the screens **64**, **66** and walls **68**, **70**, **72** are illustrated as generally rectangular or trapezoidal in shape, other configurations, shapes, or number of screen sections may be used with the embodiments described herein. For example, the nose of the panel **60** may be curved and, in some embodiments, formed from pipe and the end of the panel may be formed from a small strip of material. Each panel **60** may include a support bar **80** for support or handling purposes. In the embodiment shown, each panel **60** is also connected to an adjacent panel **60** by a rigid connection **82**, such as a plate and bolt connection, for support, handling, or load distribution purposes. Other types of spacing, shimming, or gap compensating methods known in the art can also be applied to the embodiments disclosed herein.

[0042] Media, such as catalyst, may be supported on the panels **60**. In particular, the media may be disposed on the upper surfaces of the screens **64**, **66**. Fluid may flow through the media, through the screens **64**, **66** into the manifold **62**, and out of the vessel **42**. The screens **64**, **66** are configured to permit fluid flow but prevent the media from flowing out of the vessel **42**.

[0043] In one embodiment, the screens **64**, **66** of the upper surface of the panels **60**, the screens included in any other wall **68**, **70**, **72**, or screens for any embodiment disclosed herein may include a plurality of spaced filter wires supported on support rods. In one embodiment, such screens may include wire with a substantially triangular cross-section, and may include Vee-Wire® type screens (VEE-WIRE is a registered trademark of Bilfinger Water Technologies Inc.) or wedge wire type screens. In one embodiment, such screens may include plates having perforations, slots, and/or other filter-type openings. In one embodiment, the wires and plate openings may be oriented symmetrically, asymmetrically, horizontally, vertically, tangentially, and combinations thereof relative to the longitudinal axis of the panel **60**. In one embodiment, the spacing and sizes of wires and plate openings vary along the lengths of such screens. In one embodiment, such screens may include one or any combination of filter wires, plates, features

with perforations, features that otherwise provide a plurality of filter-type openings, and flow control vanes. Such screens may include the embodiments like those disclosed in U.S. Patent No. 6,663,774, filed on October 16, 2001 and specifically with respect to the filter wires **28** and the support rods **20** described therein, and embodiments like those disclosed in U.S. Patent No. 7,425,264, filed on July 18, 2005 and specifically with respect to the wires **16** and the support rods **17** described therein.

[0044] The manifold **62** may include a top screen **90** at the upper end of the manifold **62**, and the top screen **90** may include the same features as the screens **64**, **66** described above. Media may be supported on the upper surface of the screen **90**. Alternatively, the top screen **90** could be a perforated plate or a member that has other openings that allow fluid through while supporting media. Fluid may flow through the media, through the openings in the top screen **90** and past the top screen **90**, and directly into the manifold **62**. In one embodiment, the top screen **90** may include a screen portion disposed above a perforated plate portion, with one or more flow control vanes disposed between the screen and plate portions. The manifold **62** may be coupled to an in hydraulic communication with an outlet **54** of the vessel **40**. In other words, the interior volume defined by the panels **60** may be in hydraulic communication with the interior volume of the manifold **62**, which may be in hydraulic communication with the vessel outlet **54**.

FIGS. 3 and 4 illustrate the interior of the manifold **62**. The manifold **62** may include upper and lower flanges **92**, **94** and a body **96** and one or more flow control vanes **98** disposed between the flanges **92**, **94**. The upper flange **92** may be used to support the top screen **90**. The lower flange **94** may be used to couple the manifold **62** to the panels **60** via one or more tubular connections, such as pipes **100** as further described below, to place the panels **60** and manifold **62** in hydraulic communication. The lower flange **94** may also be coupled to a manifold outlet **102**, such as a flanged pipe, which couples the manifold **62** to the vessel head **44** and which is in fluid communication with the vessel outlet **54** (illustrated in FIGS. 5A and 5B). One or more flow control vanes **104** may be supported by the top screen **90**, and in particular may be coupled to the bottom surface of the top screen **90**. The flow control vanes **104** may be disposed radially within the manifold **62**, and may extend at least partially into the manifold outlet **102**. In addition to or in place of flow control vanes, other flow control mechanisms may be provided as known to one of ordinary skill in the art for directional or flow characteristic management, or in

general to divert or restrict flow, of the fluid. Examples of other flow control mechanisms include tubes, perforated plates, and cones.

[0046] FIGS. 5A and 5B illustrate sectional views of the support grid assembly **40**. The flanged portion of the manifold outlet **102** is shown bolted to the lower flange **94** of the manifold **62**. The manifold outlet **102** may be welded to the vessel **44**, such that it is in fluid communication with the vessel outlet **54**. An extension pipe **106** may also be used to form the connection between the manifold **62** and the vessel outlet **54**. The extension pipe **106** is shown disposed at least partially in the manifold outlet **102** and extending into the vessel outlet **54**. In one embodiment, the extension pipe **106** (or another pipe portion coupled to the extension pipe **106**) may extend through and radially outward below the vessel outlet **54** such that a flanged section of the extension pipe **106** is used to connect the entire vessel assembly to any other structural type of outlet/inlet connection. Bolting, welding, clamping, and other similar types of structural or sealed connections known in the art may be used with the embodiments described herein.

[0047] The lower flange **94** of the manifold **62** is shown coupled to pipes **100** to establish fluid communication with each of the panels **60** through a bottom surface of the manifold **62**. Each pipe **100** may be supported by an end portion of each panel **60**, by, for example, being welded to the end portion, such as wall **72** to couple the panel **60** the manifold **62**. Each pipe **100** may include a pipe flange **108** or other similar type of shoulder portion, which is secured between the lower flange **94** and a split ring **110** having two or more pieces brought together around the pipe **100** (also illustrated in FIGS. 6A and 6B). In particular, one or more bolts may extend through the lower flange **94**, the pipe flange **108**, and the split ring **110** to secure each panel **60** to the manifold **62**. The end portions of the panels **60** may be disposed below the main portion of the manifold **62**, and may be coupled to a bottom surface, such as the lower flange **94**, of the manifold **62**. In one embodiment, a seal, such as a gasket, may be disposed between the lower flange **94** of the manifold **62** and the pipe flange **108** of each pipe **100**. In this manner, each panel **60** may be easily connected to and removed from the manifold **62** using a simple, structurally rigid and sealed connection. The tubular connections or pipes **100** may take a variety of forms as are known in the art. For example, the tubular connections could instead be fittings, such as 90 degree, 180 degree, or other angle bends, or another type of duct connection.

[0048] Referring to FIG. 5B, one or more flow arrows “F” are illustrated to show the fluid flow paths through the support grid assembly **40**. A fluid directed to the support grid assembly

40 may first flow through any media disposed on the screens **64, 66, 90**. As stated above, the screens **64, 66, 90** may be configured to permit fluid flow but prevent the media from flowing through the screens **64, 66, 90**. Fluid may flow through screens **64, 66** into the interior of the panels **60**, and may be directed along the bottom wall **70** to the pipes **100**. Screens can incorporate perforations or other restrictions to control the amount of fluid that passes through each surface relative to the other screen surfaces. The fluid may then flow in an upward direction into the manifold **62**, for example, through the pipes **100** in a direction parallel to the longitudinal axis of the vessel **42** and manifold **62** and opposite the direction of flow into the vessel **42** and fluid flow out of the vessel outlet **54**. Fluid may also flow directly into the manifold **62** via the top screen **90**. The fluid may finally flow out of the manifold outlet **102** (and extension pipe **106**) in a downward direction, parallel to the longitudinal axis of the vessel and manifold **62** and out through the vessel outlet **54** in the same direction of the general flow through vessel **42**. The flow control vanes **98, 104** or other flow control mechanisms disposed in the manifold **62** may help direct the fluid flow and control the fluid flow distribution through the support grid assembly **40**. Any number or arrangement of flow control vanes **98, 104** may be used to optimize fluid flow direction and distribution through the support grid assembly **40**. Flow can also move in the reverse direction if required by the application process, in which case, for example, flow into the manifold **62** from an inlet (previously outlet **54**) may be distributed to the panels **60** and flow through the screens **64, 66** in to the vessel **42**.

[0049] FIGS. 6A and 6B illustrate one panel **60** connected to the manifold **62**. Each panel **60** may be connected to the manifold **62** by a locking connection **112** disposed on the outer surface of the manifold outlet **102**. In particular, the locking connection **112** may include one or more rods **114** welded by support members **116** to the manifold outlet **102**. Each panel **60** includes one or more mating connections **118** or hangers (illustrated in FIG. 7) for engagement with the locking connections **112**. In particular, the mating connections **118** may include one or more support members **120** welded to the walls **68** of the panels **60** at the nose or end portion **121**, the support members **120** each having a channel and hook portion **122** for receiving the locking connections **112**. The support members **120** of the mating connections **118** may be substantially parallel to the support members **116** of the locking connections **112**, which may be substantially perpendicular to the rods **114**. In this manner, the panels **60** may be easily secured to and removed from connection with the manifold **62**. Other types of connections known in the art may be used with the embodiments described herein.

[0050] FIG. 7 illustrates the interior of one panel **60**. As illustrated, one or more flow control vanes **126** may also be disposed in each panel **60** to direct fluid flow and control fluid flow distribution through each panel **60** and into the manifold **62**. The flow control vanes **126** may be generally parallel to the longitudinal axis of each panel **60**, but include tapered ends that direct fluid flow toward the pipes **100**. Any number of flow control vanes **126** may be used to maximize fluid flow direction and distribution through the support grid assembly **40**. Tabs or other restrictions can be added to the control vanes **126** to further control or manipulate the flow characteristics inside the panel **60**. As noted with respect to the flow control vanes **104** of the manifold **62**, other flow control mechanisms known in the art, such as tubes, perforated plates, and cones, can also be applied to balance the flow distribution in the embodiments disclosed herein.

[0051] FIG. 8 illustrates another embodiment of a support grid assembly **140** having panels **160**. The assembly **140** is similar to the assembly **40** described above, but the panels **160** have end portions **161** that direct fluid flow down into a manifold **162** via pipes **164** disposed below the panels **160**. The pipes **164** may be connected to an upper flange **166** of the manifold **162** through a top surface of the manifold **162**. An outlet pipe **168** may also be coupled to the manifold **168** for fluid flow out of the vessel assembly. An interior pipe **170** may be disposed through the manifold **162** and may be in fluid communication with the interior of the vessel assembly. Such a connection may be used, for example, where there are small or concentric outlets. The interior pipe **170** may be covered with a screen, similar to top screen **90**, and may be utilized for backwashing processes to clean out used media, or to meet other similar process requirements, from the vessel assembly. The embodiments of the support grid assembly **40** of FIGS. 2-7, including the panels **60**, may be used with the embodiments of the support grid assembly **140** of FIG. 8, and vice versa.

[0052] FIG. 9 shows an embodiment of a panel **180** defining a volume having one or more flow control vanes **126**. The panel **180** is similar to the panels **60** described above, but includes an end portion **182** that may be coupled directly to the body of the manifold **62**, for example, at a side surface of the manifold **62**, or to the manifold outlet **102**. In this embodiment, the opening of the end portion **182** is square, but other shapes may be used. The number of flow control vanes **126**, which may also function as supports, may be varied depending on the load that will be experienced or desired flow characteristics and direction. A load that is expected to be relatively heavy may result in more flow control vanes **126** or supports being placed in the panel

180. The number of flow control vanes **126** may decrease for smaller loads. The embodiments of the panel **180** illustrated in FIG. 9 may be used with the embodiments of the support grid assemblies **40**, **140** described above, and vice versa. One or more combinations of the various panel **60**, **160**, **180** connections, including the pipes **100** and end portions **161**, **182**, may be used with the embodiments described herein.

[0053] In one method of installing the support grid assembly **40**, the manifold outlet **102**, which may be considered a center outlet sleeve, may first be attached to the vessel outlet **54** (sometimes referred to as a nozzle). The manifold outlet **102** may be welded directly to the top forged area of the nozzle, or welded inside the nozzle diameter with some depth of insertion. An alternative not requiring welding to the nozzle is to use a trapped flange at the first exterior joint to the vessel. A jig may be provided for proper extension of the center hub into the vessel. Mating connections **118** or hangers are provided to position the nose section of each panel **60** and will assist in the final sealing operation. After all pieces are placed inside the vessel and seated, a gasket (not shown) may be used on each pipe flange **108**. The lower flange **94** may then be placed over the pipes **100** and bolted to the pipe flanges **108**. The lower flange **94** may be sectioned to be able to pass through a manway, and then can be assembled and bolted in place. A gasket may be placed on the upper flange **92** and is ready for a final cover such as a top screen **90**. The top screen **90** may then be seated over the gasket and bolted into place. The top screen **90** may have a flow control surface to match the performance of the panels **60**. The panels may be checked for full bearing directly on the lower vessel head **44** and shimmed, if necessary. Connections for tie bolts may be slotted to allow for thermal expansion and connect all the panels **60** into one assembly so no panel **60** can lift relative to the others.

[0054] FIGS. 10-14 show another embodiment of a support grid assembly **200**. This support grid assembly **200**, like the previous embodiments, may include one or more grid panels **210** coupled to a center manifold **212**. The manifold **212** may include a manifold base **214**, a manifold grid connection piece **216** or body, and a manifold top plate **218**. The manifold **212** may be coupled to an outlet pipe **220** using a screen and pipe closure bolting ring **222**. In this embodiment the outlet pipe **220** extends upward from the manifold **212**, bends at 90 degrees, and extends through an opening **222** in the side of the vessel **42**. Outside of the vessel **42**, one way to connect the outlet pipe **220** to an adjacent pipe may be with a sandwich flange **224** and a spiral wound gasket **226**.

[0055] In some embodiments and as shown in the support grid assembly **200** of FIGS. 10-14, a connection interface may be provided that allows expansion and contraction of components of the assembly and may permit angular deflection between components. In the embodiment shown, such a connection interface is a bellows and facilitates installation of the support grid assembly **200**. A bellows element **230** may be provided in, or in line with, the outlet pipe **220**, in this case oriented vertically in a vertical portion of pipe **231**, to be hydraulically interposed between the manifold outlet and the outlet pipe **220**. Bellows elements **232** may also be provided at the connection of each panel **210** to the manifold grid connection piece **216**, also oriented vertically, in tubular connections or pipes **234**. The bellows elements **230**, **232** serve at least two functions. First, the manifold **212** may not be perfectly installed, either as the result of variability in manufacturing, or because of its mounting in the vessel head **44**. This variability may cause the location, angle, or both of the manifold **212** to be out of position from ideal. The outlet pipe **220** has a fixed position to reach and connect to outside the vessel **42**, and where connections are made with flanges there is little tolerance for varied positioning. The bellows elements **230**, **232** provide the ability of horizontal and vertical motion travel, as well as angular adjustment, to address variability of configuration of the components. Second, the bellows elements **230**, **232** address thermal cycling and the accompanying expansion and contraction of parts. Temperature changes, which may be frequent and extreme depending on the process, may cause fatigue or weakening of the parts, and loosening of connections, among other things. The bellows elements **230**, **232** or alternatively, joints selected by one of ordinary skill in the art, may account for expansion and contraction of the other parts. Examples of other such joints may include telescoping parts with gaskets and flexible tubing or hose.

[0056] In this embodiment of a support grid assembly **200**, the tubular connections or pipes **234** may be configured such that fluid flows through the pipes **234** in the same direction as fluid flows through the manifold outlet; flow may be directed upward through the manifold **212**. Again, the tubular connections or pipes **234** may also include or instead be fittings such as bends or other types of duct connections. Flow may be in either direction, from the vessel **42** into the panels **210**, into the manifold **212** to the outlet pipe **220**, or into the manifold **212** from an inlet pipe (the same as outlet pipe **220**), distributed to the panels **210**, and into the vessel **42**.

[0057] The material of the components of the support grid assemblies **40**, **200** disclosed herein may be selected as appropriate for the process application. In one embodiment the

material may be AISI 304 stainless steel. Bellows elements **230**, **232** may be selected based on the process application, and one example of a supplier of bellows that may be appropriate is U.S. Bellows, Inc.

[0058] The support grid assembly **200** may be supported by a layer of compressible material, such as an insulation blanket **236** (FIGS. 10 and 11). The insulation blanket **236** may be provided between the support grid assembly **200** and the floor of the vessel head **44**, and may fill the void or gaps that may exist between these features. In this embodiment, the insulation blanket **236** is shaped to approximate or be slightly larger than the footprint of the panels **210**. Appropriate materials may include elastic materials, such as elastomers, or thermal gaskets, like texturized fiberglass yarn such as Tetraglas® (TETRAGLAS is a registered trademark of Darca Southern, Inc.). The material may be selected based on characteristics that permit the filling of voids between the panels **210** and the vessel head **44** floor, while providing support for the panels **210**, as, for example, some resilient materials might provide. In addition, the material should be selected as appropriate for the process application the material will be exposed to, such as harsh chemicals, fuels, or extreme heat. In one embodiment the insulation blanket **236** is 1-inch thick Tetraglas®.

[0059] Support bars **240** may be provided. The support bars **240** may have one function of serving as a handle or lifting point for each panel **210**. The support bars **240** of this embodiment, however, may also provide a connection point for tying the panels **210** together. The support bars **240** are attached at each end to a side of a panel **210**, which may be done by welding or otherwise. As shown in FIG. 13, and in more detail in FIG. 14, each of the vertical portions at the ends of the support bars **240** has a swing arm **242** attached to it. At one end, the swing arms **242** have a sleeve **244** that goes around the support bar **240** and permits the arm **242** to pivot. At the other end the swing arm **242** is free. The swing arm **242** of one panel **210** is pivoted to meet the swing arm **242** of the adjacent panel **210**, and the arms **242** are bolted to together as may be seen in FIG. 14. This may be repeated around the entire support grid assembly **200** to connect all of the panels **210** to each other. This may eliminate the rigid connections **17** shown in FIG. 2 to provide flexibility in the installation.

[0060] The support grid assembly features described herein may allow using the vessel as a support structure, thereby eliminating or reducing the need for additional support elements, such as beams or rings that could be added to the vessel for support. The low profile of the support grid assembly may also increase the amount of useable volume in the vessel for media. The

support grid assembly may further include integrated flow control vanes in the panels and the manifold to control and distribute fluid flow through the assembly in both the inlet and outlet directions.

[0061] One use of the support grid assemblies disclosed herein may be to be installed into the bottom head of hydroprocessing or gas dehydration vessels, which may promote liquid and gas flow, bed utilization, distribution and an overall efficient process. The support grid assemblies may lie directly on the bottom head surface, and may allow for substantially all or the entire volume to be filled with media. Increased bed volume may allow for the conversion of existing vessels to achieve higher process capacity and new vessels to be built shorter in shell length. An enclosed stainless steel bottom surface of the panels may prevent bed material from migrating under one of the panels and leaking into the flow of the process. For systems with coking potential, a Vee-Wire® screen surface or wedge wire screen surface, for example, can be applied to the bottom and may eliminate dead areas, retaining catalyst on the bottom surfaces. The vessel head may support the grid directly to create a strong and rigid structure without adding special ledge rings or heavy beams to the vessel.

[0062] Each panel may be a totally enclosed element with a bolted and gasketed connection to the manifold. The enclosed design may allow the grid assembly to expand and contract under the bed without compromising an outer perimeter seal, which may happen in a cyclic gas dehydration application. During the down flow operation, the tapered design of the panels may collect flow from substantially all of or the entire cross section of the vessel and moves it toward the center hub outlet, and may produce a substantially uniform flow across the entire vessel and promote bed utilization relative to traditional bed support systems. Away from the vessel centerline, the volumes of catalyst or sieve may be greater. The panel may match the configuration shape of the vessel head, collecting flow from all areas uniformly without having to cover the entire cross section of the vessel.

[0063] Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art appreciate that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown and that the embodiments herein have other applications in other environments. This application is intended to cover any adaptations or variations of the present disclosure. The following claims are in no way intended to limit the scope of the disclosure to the specific embodiments described herein. While the foregoing is directed to embodiments of a support grid assembly and components, other and

further embodiments may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

What is claimed is:

1. A support grid assembly for use in a vessel including a wall with an inner surface, the support grid assembly comprising:

at least one panel including a first wall and a second wall, the first wall including a first screen section and a second screen section, the first and second screen sections configured to support a media defining a filtering surface of the first wall, and the second wall configured to be supported by the inner surface of the wall of the vessel, wherein at least one control vane is positioned between the first wall and the second wall, said at least one control vane supporting the first and second screen sections and wherein at least a portion of each flow control vane is parallel to a longitudinal axis of each panel, and wherein the first screen section is adapted to extend to the inner surface of the wall of the vessel such that the first wall directly intersects the second wall; and

a manifold coupled to and in hydraulic communication with the at least one panel and configured to be in hydraulic communication with one of: an inlet and an outlet of the vessel.

2. The support grid assembly of Claim 1, wherein at least one of the first and second screen section of the first wall of the at least one panel is configured to slope downward toward the manifold when installed in the vessel, and at least a portion of the second wall of the at least one panel forms a bottom surface that is curved to substantially conform to a curvature of the inner surface of the wall of the vessel.

3. The support grid assembly of Claim 2, wherein the at least one panel comprises a plurality of panels coupled to and in hydraulic communication with the manifold.

4. The support grid assembly of Claim 3, wherein the manifold and the plurality of panels are configured to permit fluid to flow in one of:

a first direction through openings in the screen, through the at least one panel, into the manifold, and through the manifold directed to the outlet of the vessel,

a second reverse direction, and

in both directions.

5. The support grid assembly of Claim 3, wherein each panel is in hydraulic communication with the manifold via a tubular connection.

6. The support grid assembly of Claim 5, wherein the manifold includes an outlet that directs flow to the outlet of the vessel, and the tubular connection and manifold outlet are configured such that fluid flows through the tubular connection in a direction opposite fluid flow through the manifold outlet.

7. The support grid assembly of Claim 6, wherein the manifold outlet is configured to direct flow downward.

8. The support grid assembly of Claim 5, wherein the manifold has an upper end and a top screen is mounted to the upper end of the manifold.

9. The support grid assembly of Claim 5, wherein the manifold includes an outlet that directs flow to the outlet of the vessel, and the tubular connection and manifold outlet are

configured such that fluid flows through the tubular connection in the same direction as fluid flow through the manifold outlet.

10. The support grid assembly of Claim 6, wherein the manifold outlet is configured to direct flow upward.

11. The support grid assembly of Claim 5, wherein the tubular connection is at a connection interface, and comprises one of: a bellows element and a joint, that allows expansion and contraction of components around the connection interface.

12. The support grid assembly of Claim 3, wherein each panel defines a volume, and within the volume are the at least one flow control vane.

13. The support grid assembly of Claim 3, wherein the panels are arranged in a circular configuration extending radially from the manifold, and the panels have a proximal end near the manifold and an opposite, wider distal end.

14. The support grid assembly of Claim 3, wherein the second wall of the at least one panel includes a screen.


15. The support grid assembly of Claim 3, wherein all walls of the at least one panel each include a screen.

16. The support grid assembly of Claim 3, further comprising a layer of compressible material configured to be interposed between the bottom surface of the panels and the inner surface of the vessel, wherein when the support grid assembly is installed in the vessel, the bottom surface of the panels engages the layer of compressible material and the layer of compressible material engages the inner surface of the vessel.
17. The support grid assembly of Claim 16, wherein the layer of compressible material comprises a thermal gasket.
18. The support grid assembly of Claim 16, wherein the layer of compressible material comprises textured fiberglass yarn.
19. The support grid assembly of Claim 3, further comprising a bellows element or a joint that allows expansion and contraction hydraulically interposed between the manifold and one of: the inlet and outlet of the vessel.
20. The support grid assembly of Claim 3, wherein each panel includes a side extending substantially radially from proximate to the manifold, and a swing arm is pivotally mounted to a side of at least two adjacent panels for attaching to a swing arm of the adjacent panel.
21. The support grid assembly of Claim 20, wherein a support bar is mounted to the side of each panel, and the swing arm is mounted to the side of each adjacent panel by being pivotally mounted to the support bar.


22. The support grid assembly of Claim 3, wherein each panel includes a side extending substantially radially from proximate to the manifold and a support bar is mounted to the side of each panel.

23. The support grid assembly of Claim 3, further comprising a rod mounted to the manifold and a support member defining a channel and hook portion mounted to the panel, wherein the rod is received in the channel and hook portion to couple the panel to the manifold.


1/13

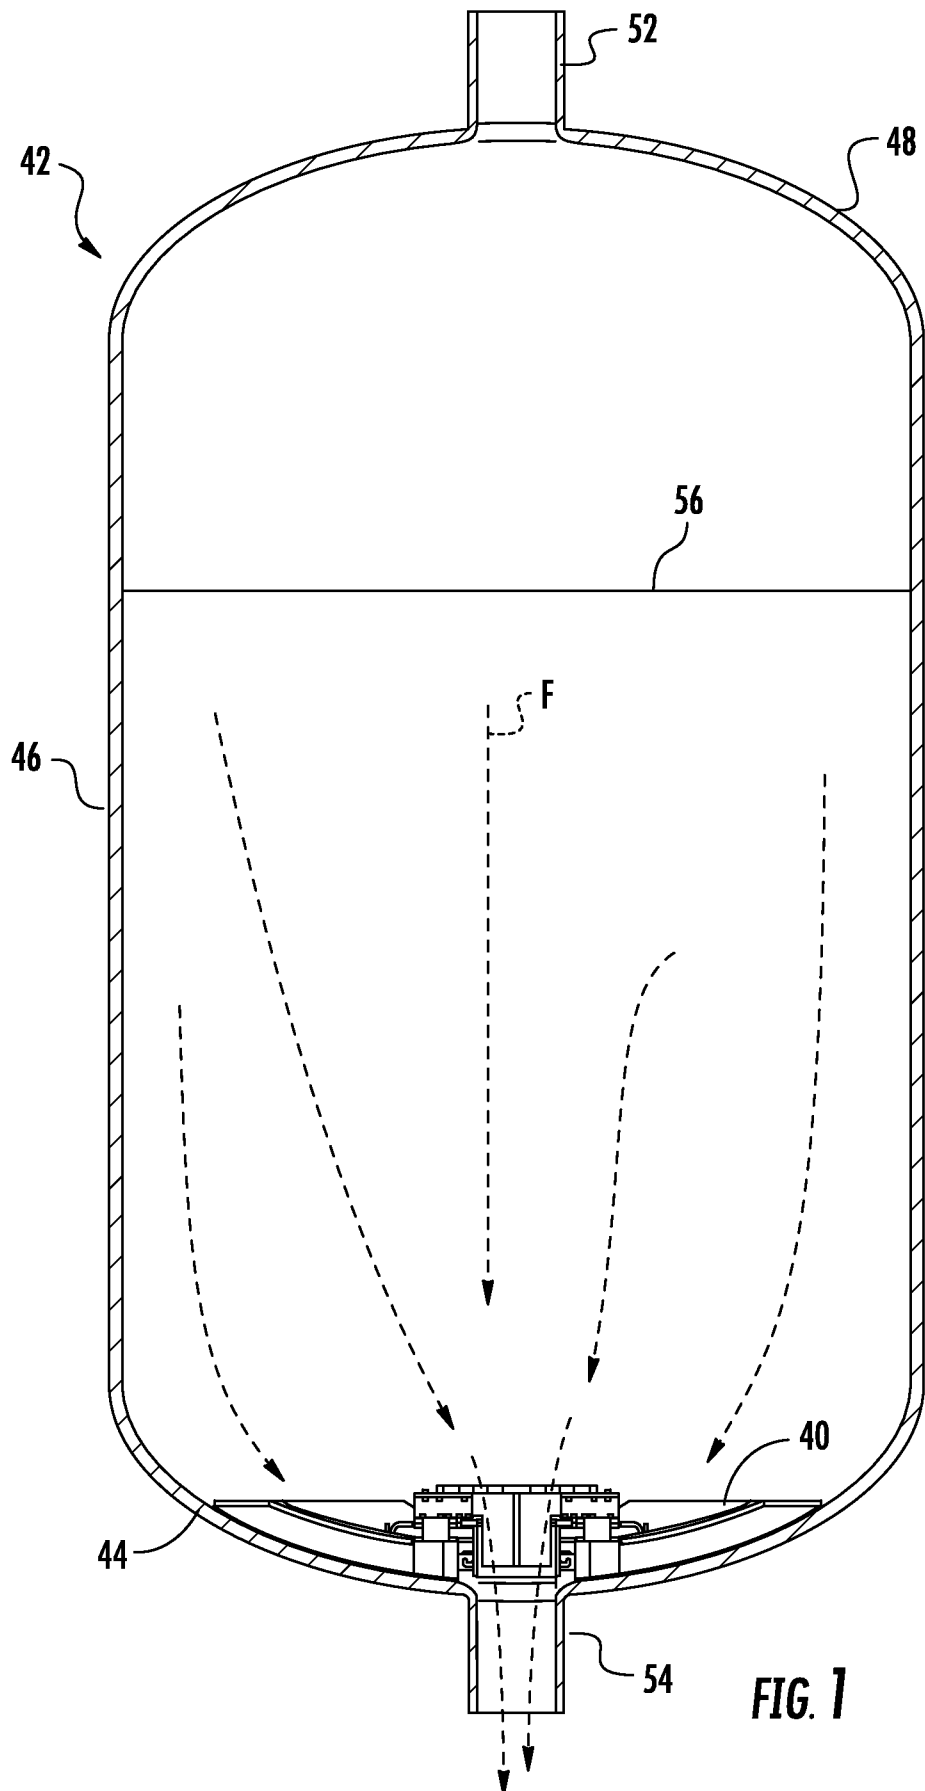**FIG. 1**

2/13

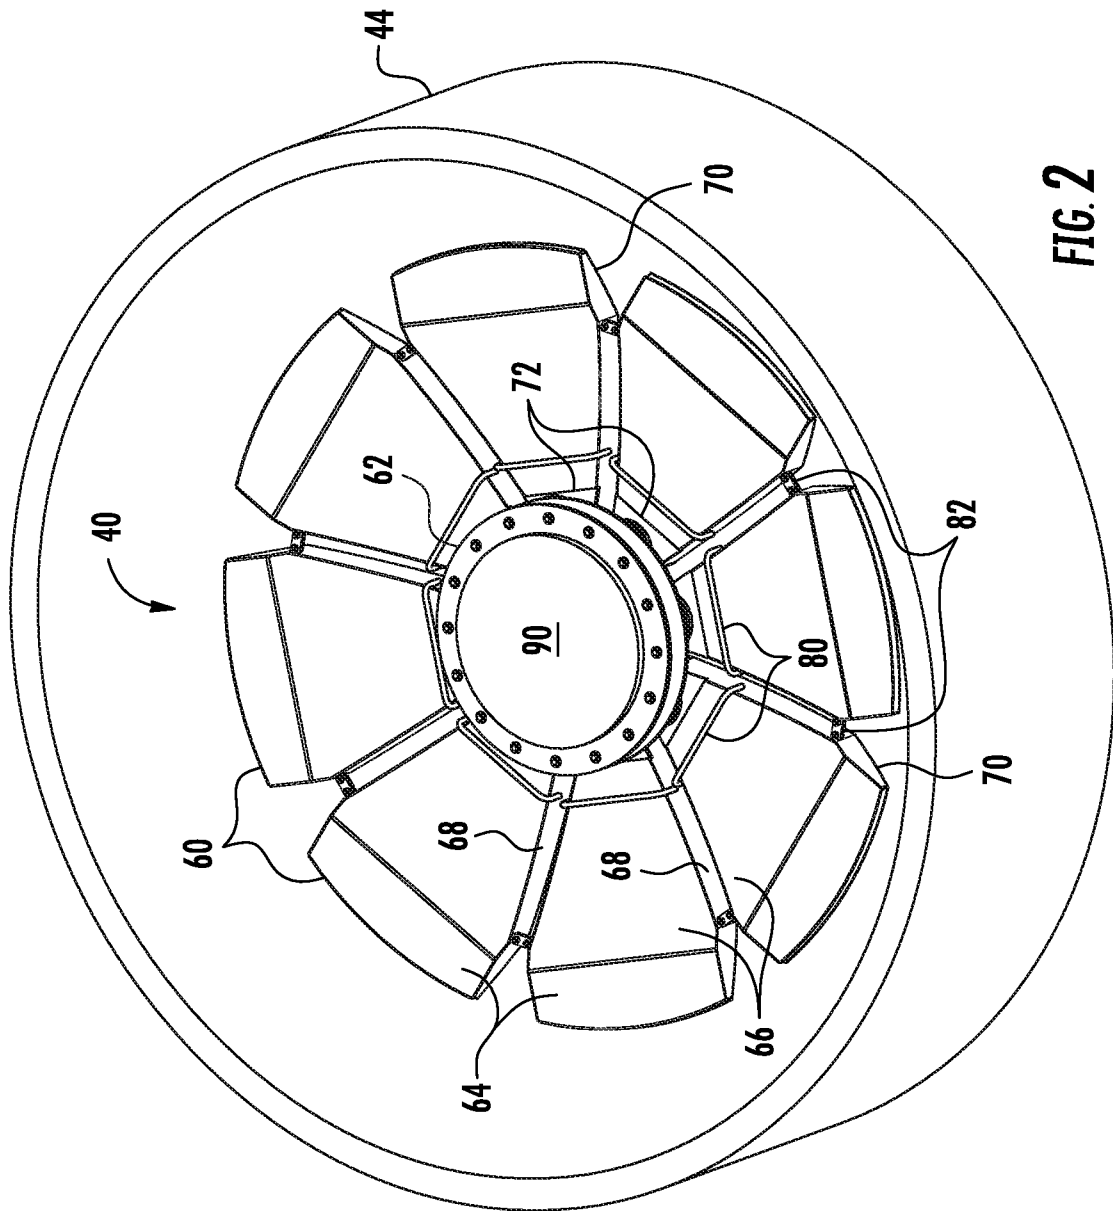

3/13

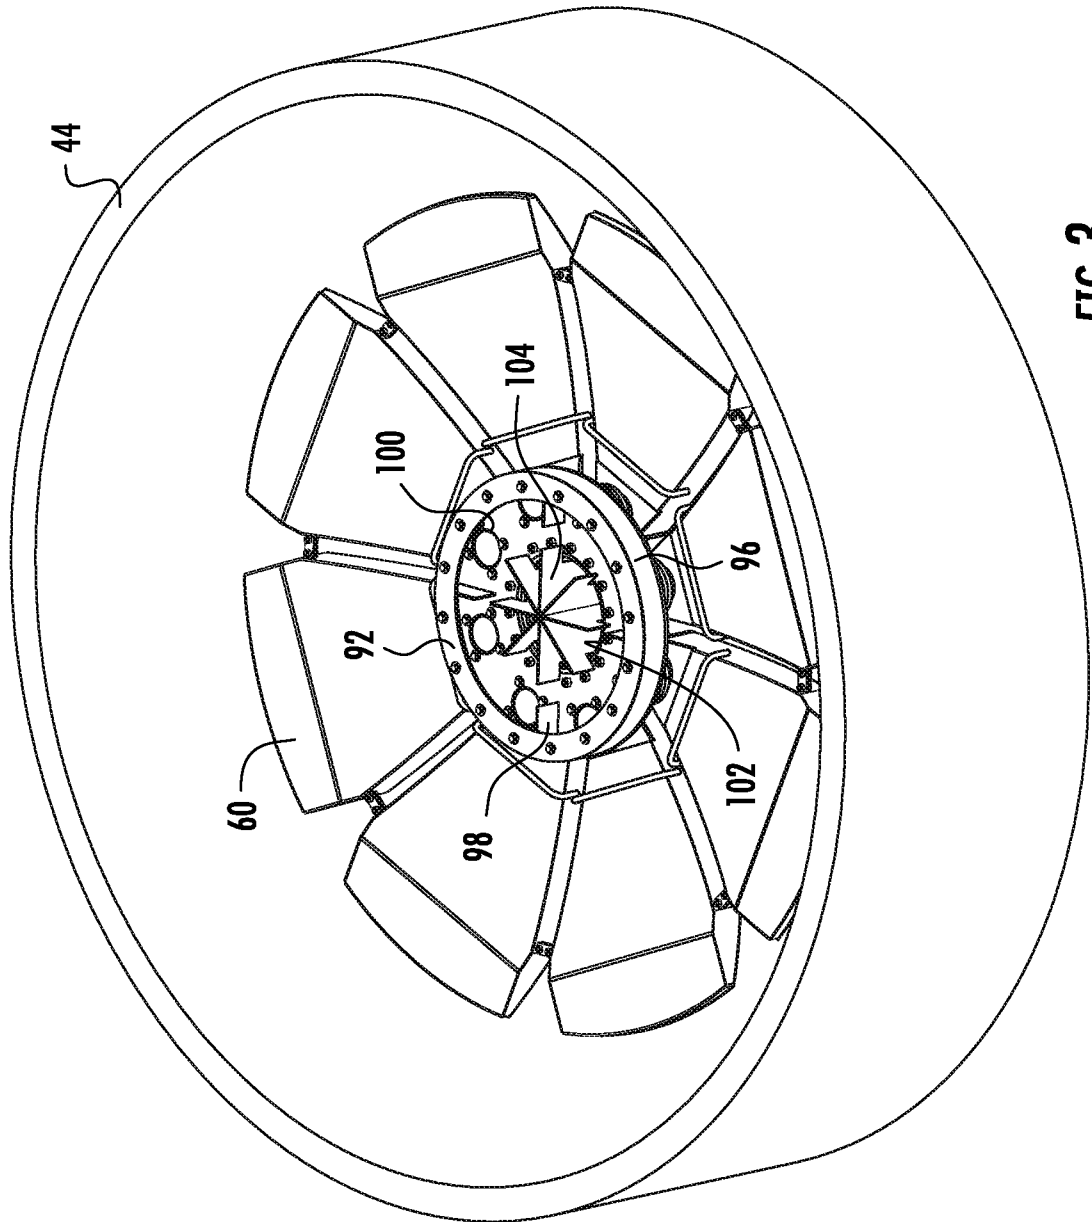

4/13

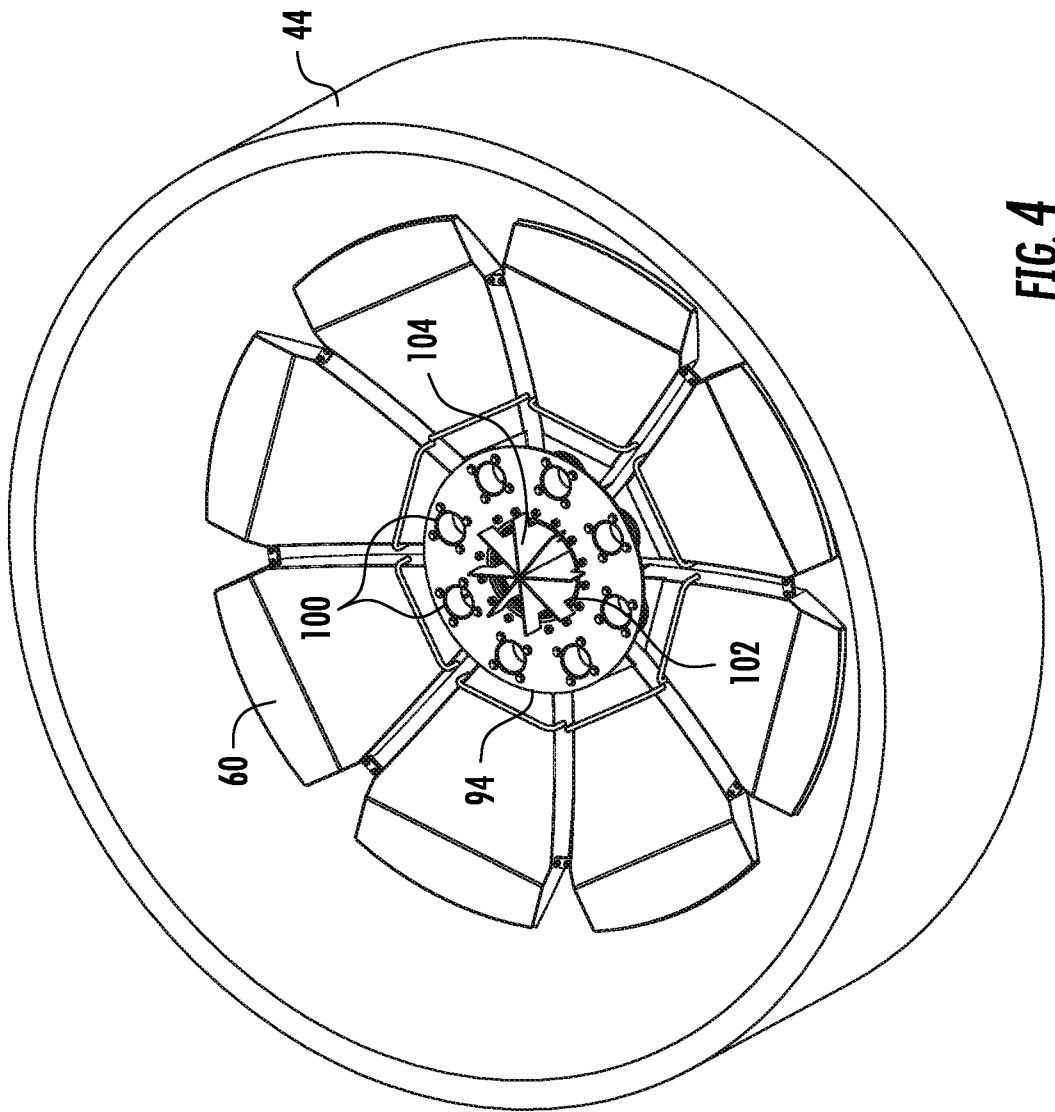


FIG. 4

5/13

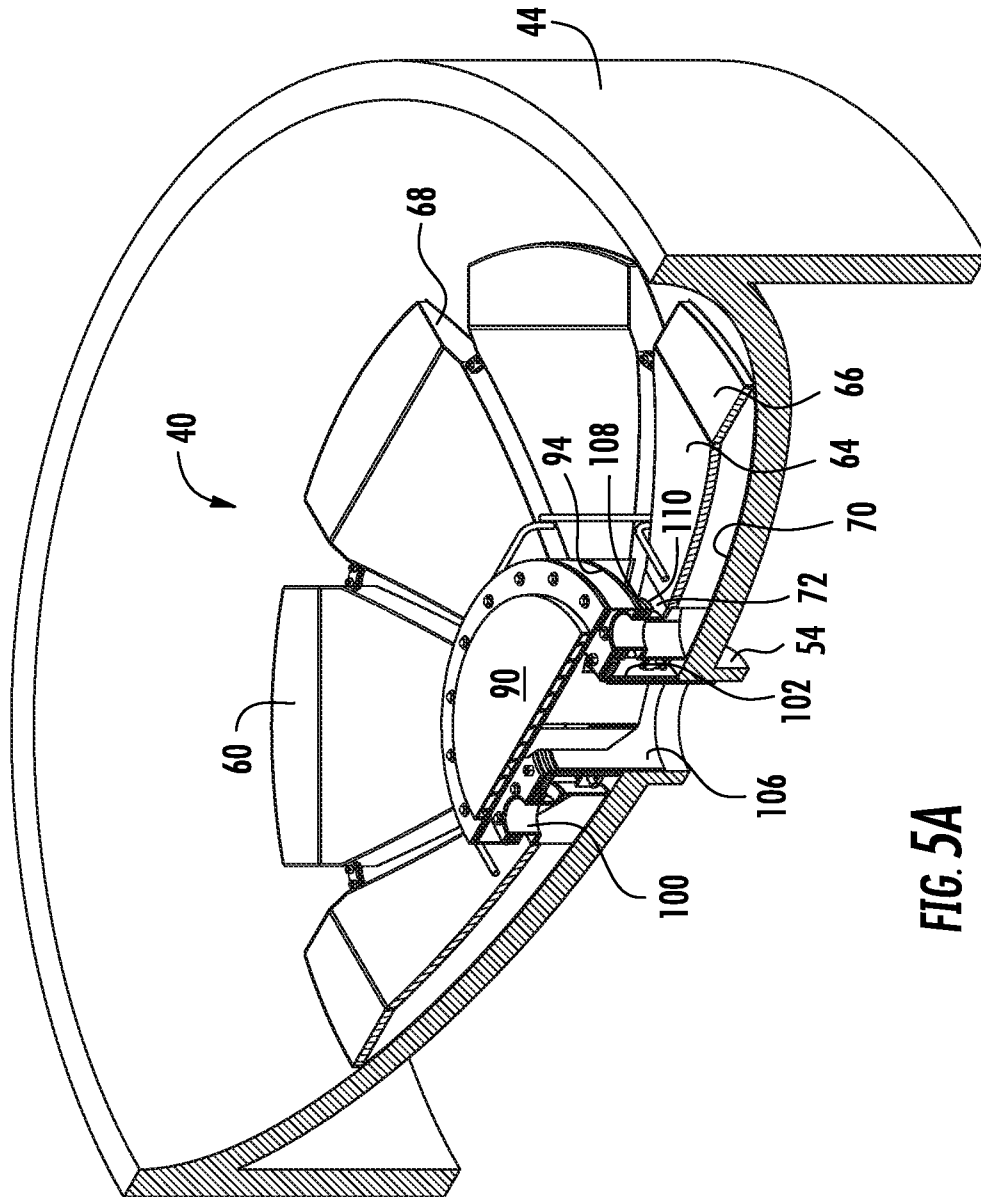


FIG. 5A

6/13




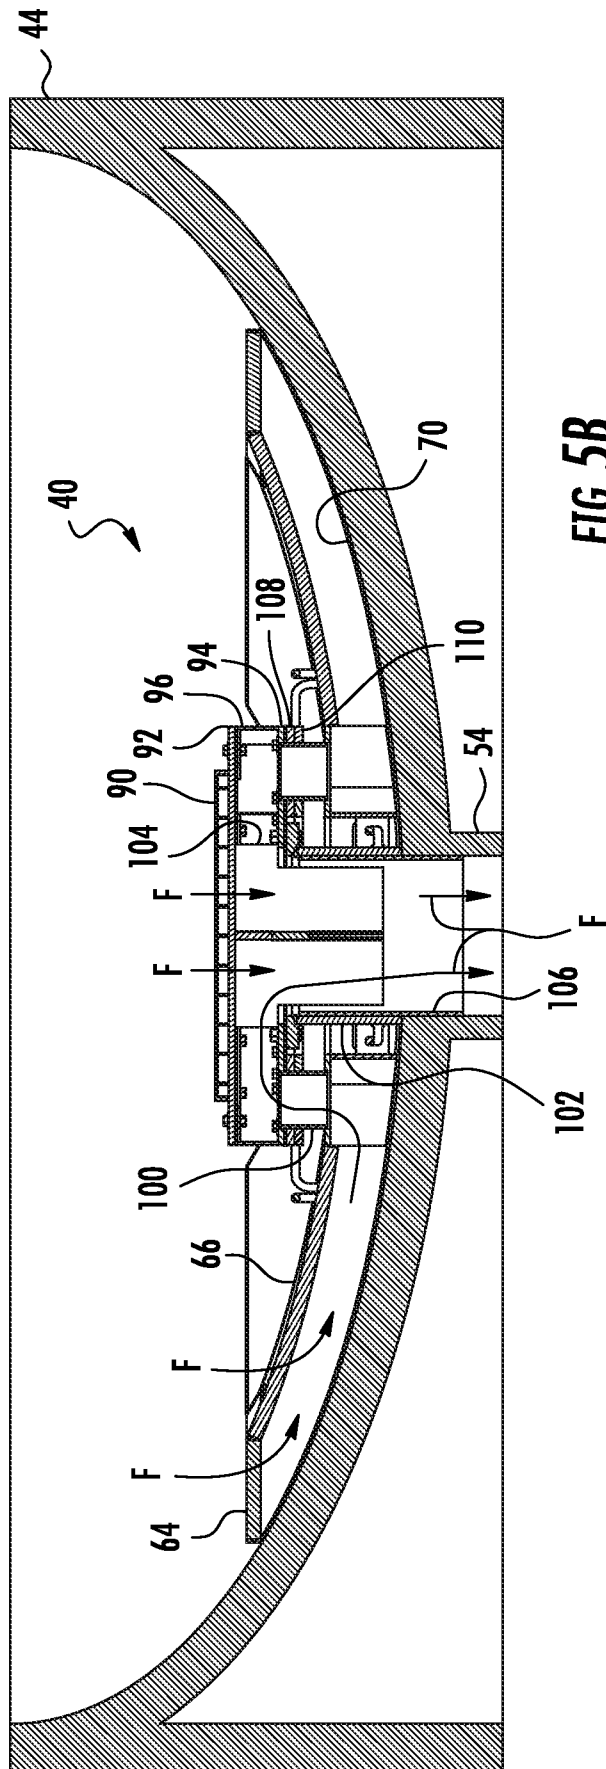


FIG. 5B

7/13

**FIG. 6A****FIG. 6B**

8/13

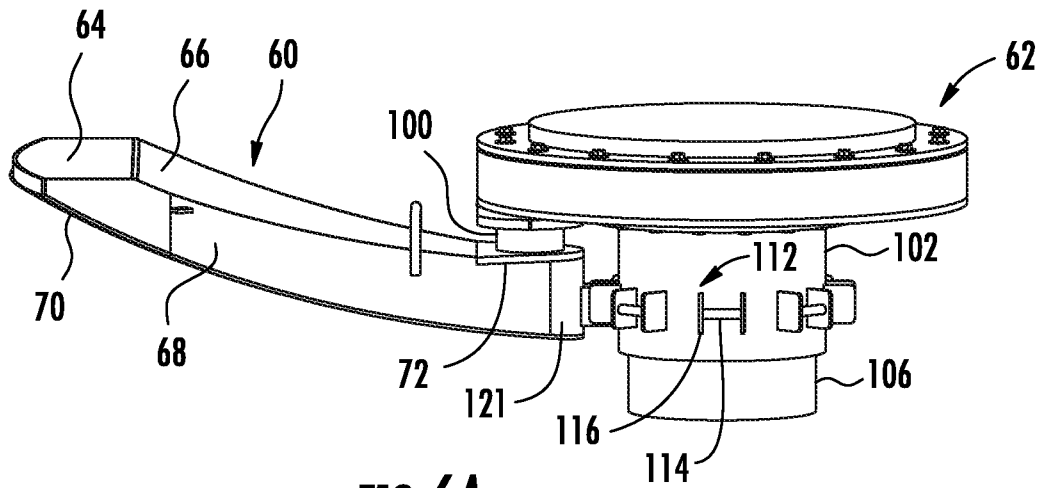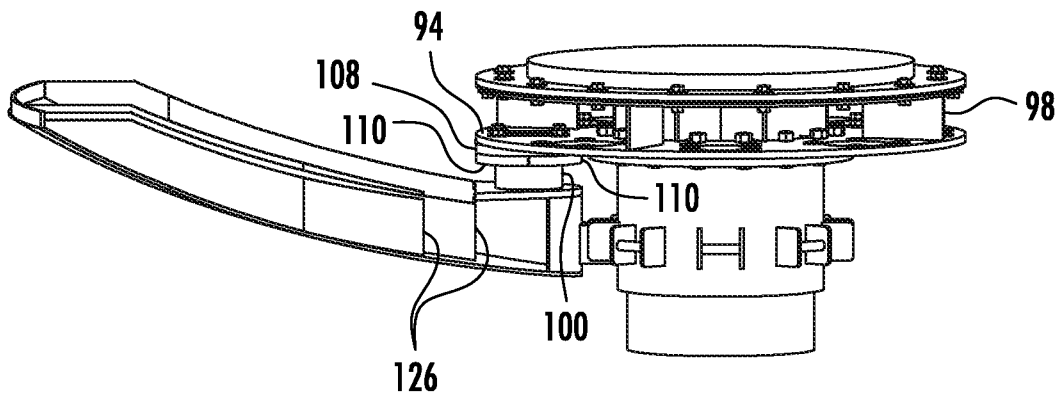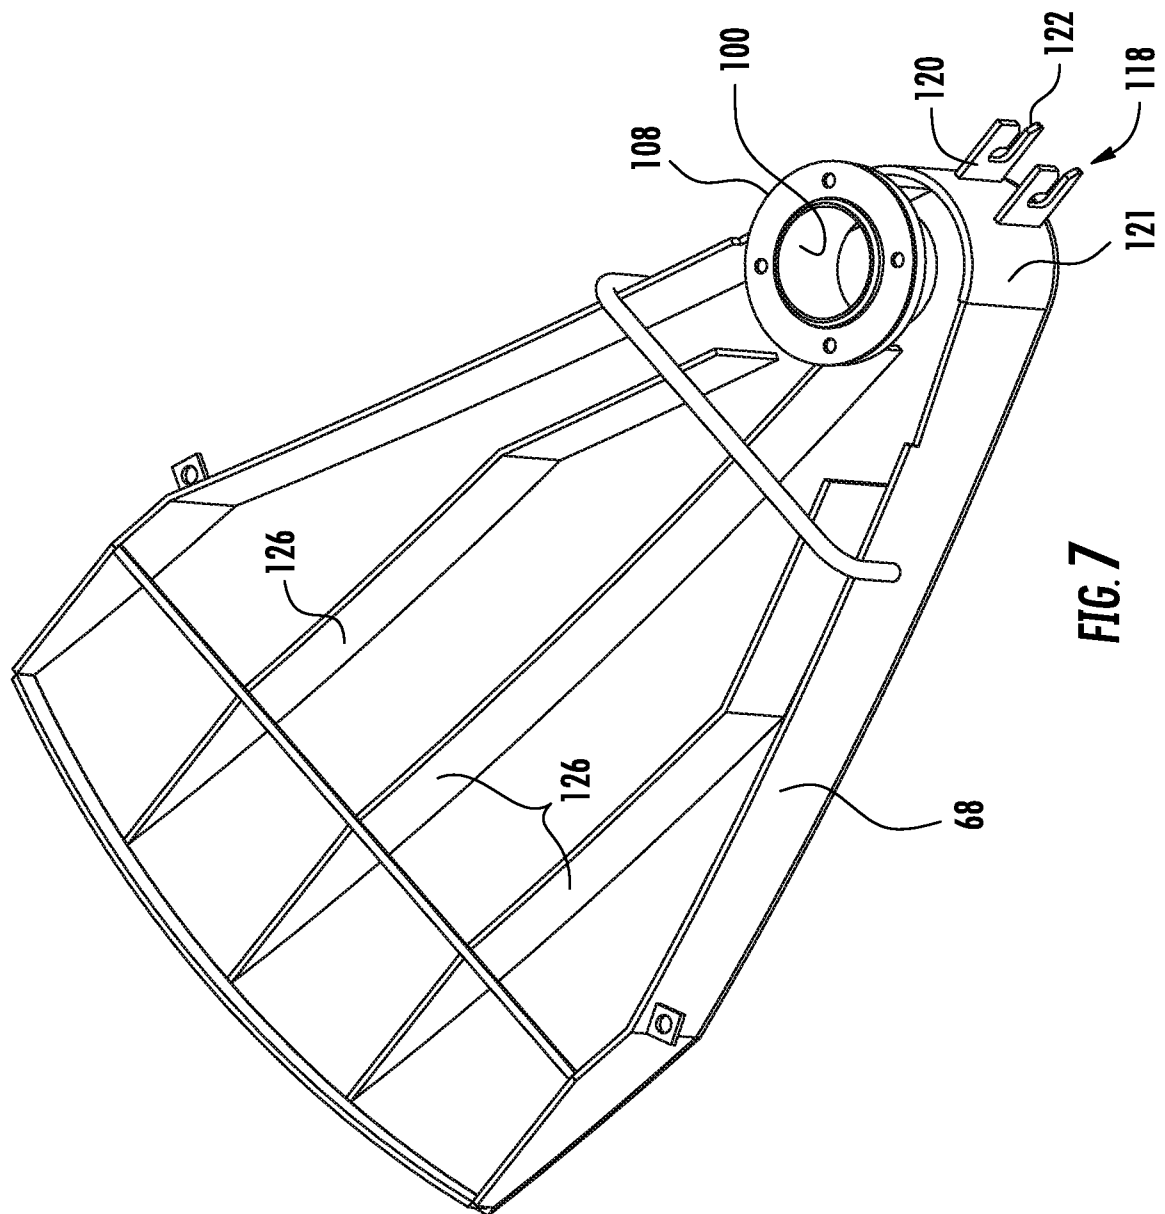

9/13




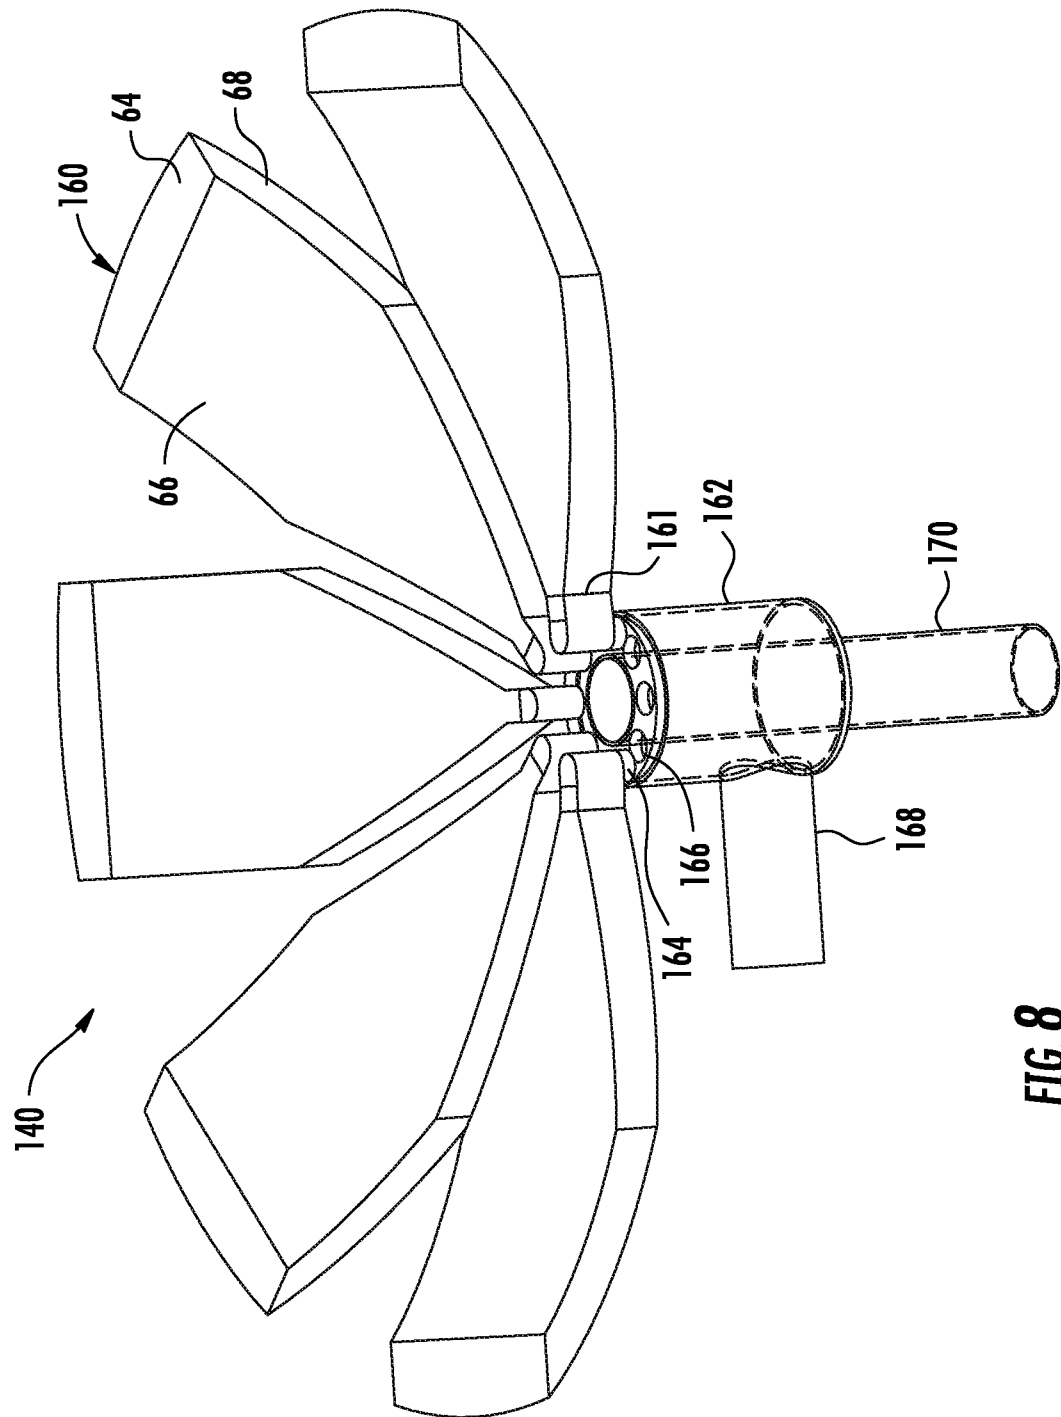


FIG. 8

10/13

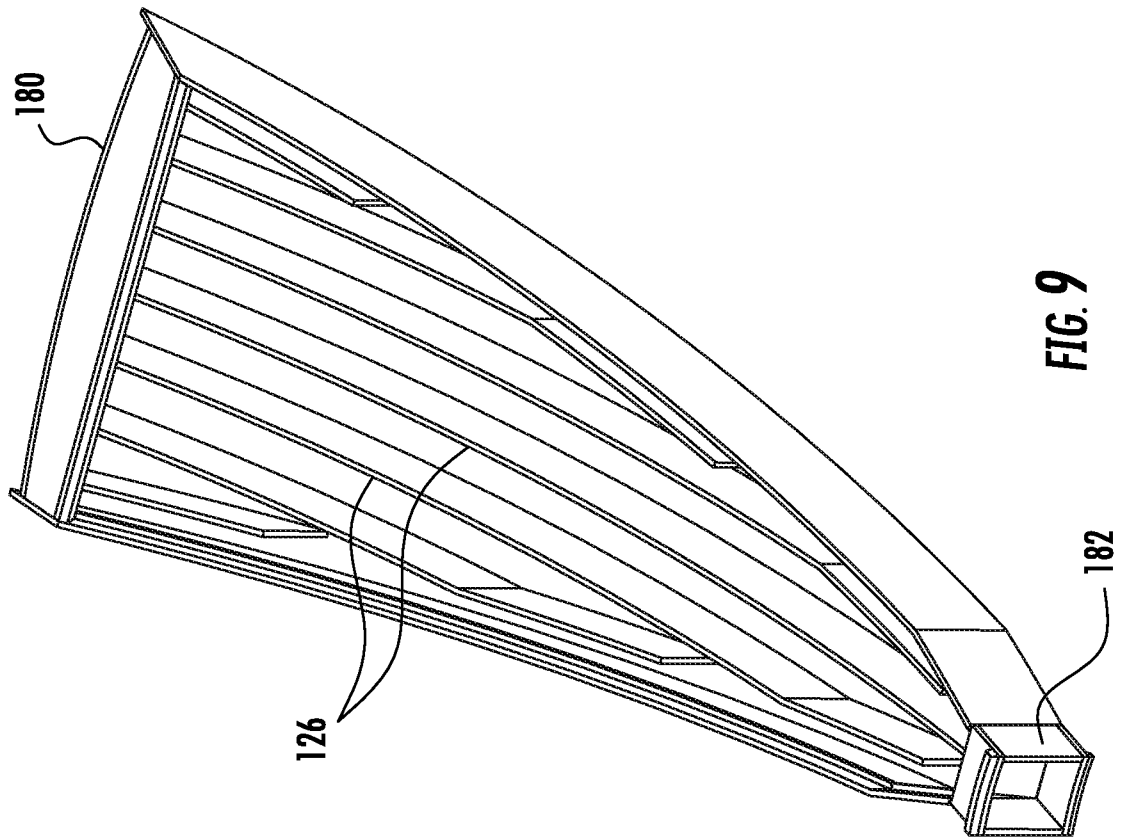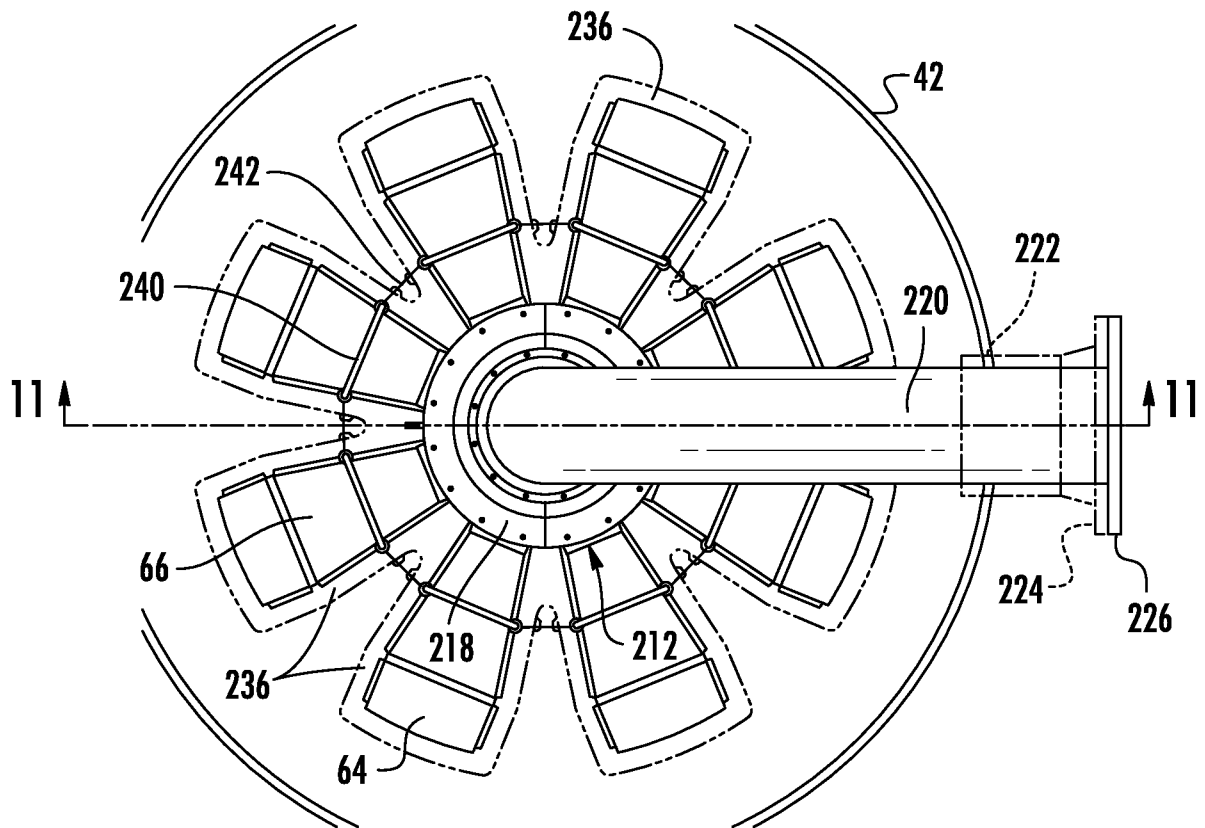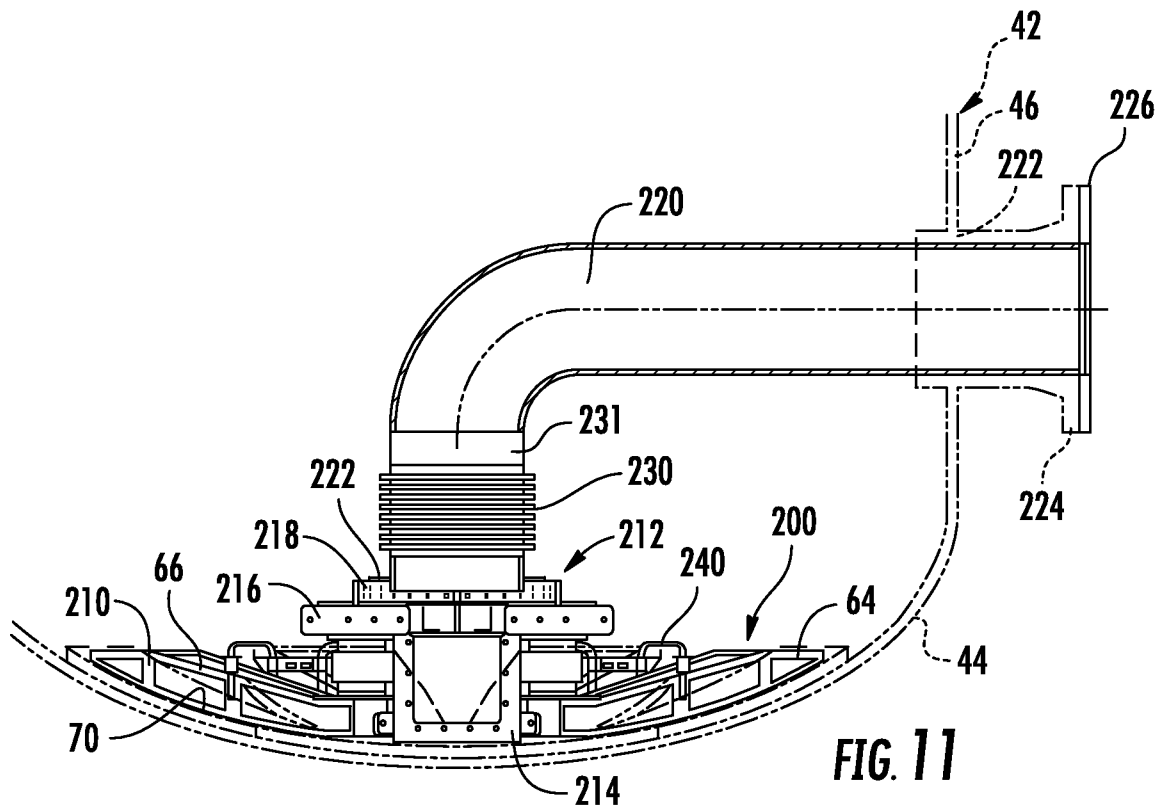

11/13

**FIG. 10****FIG. 11**

12/13



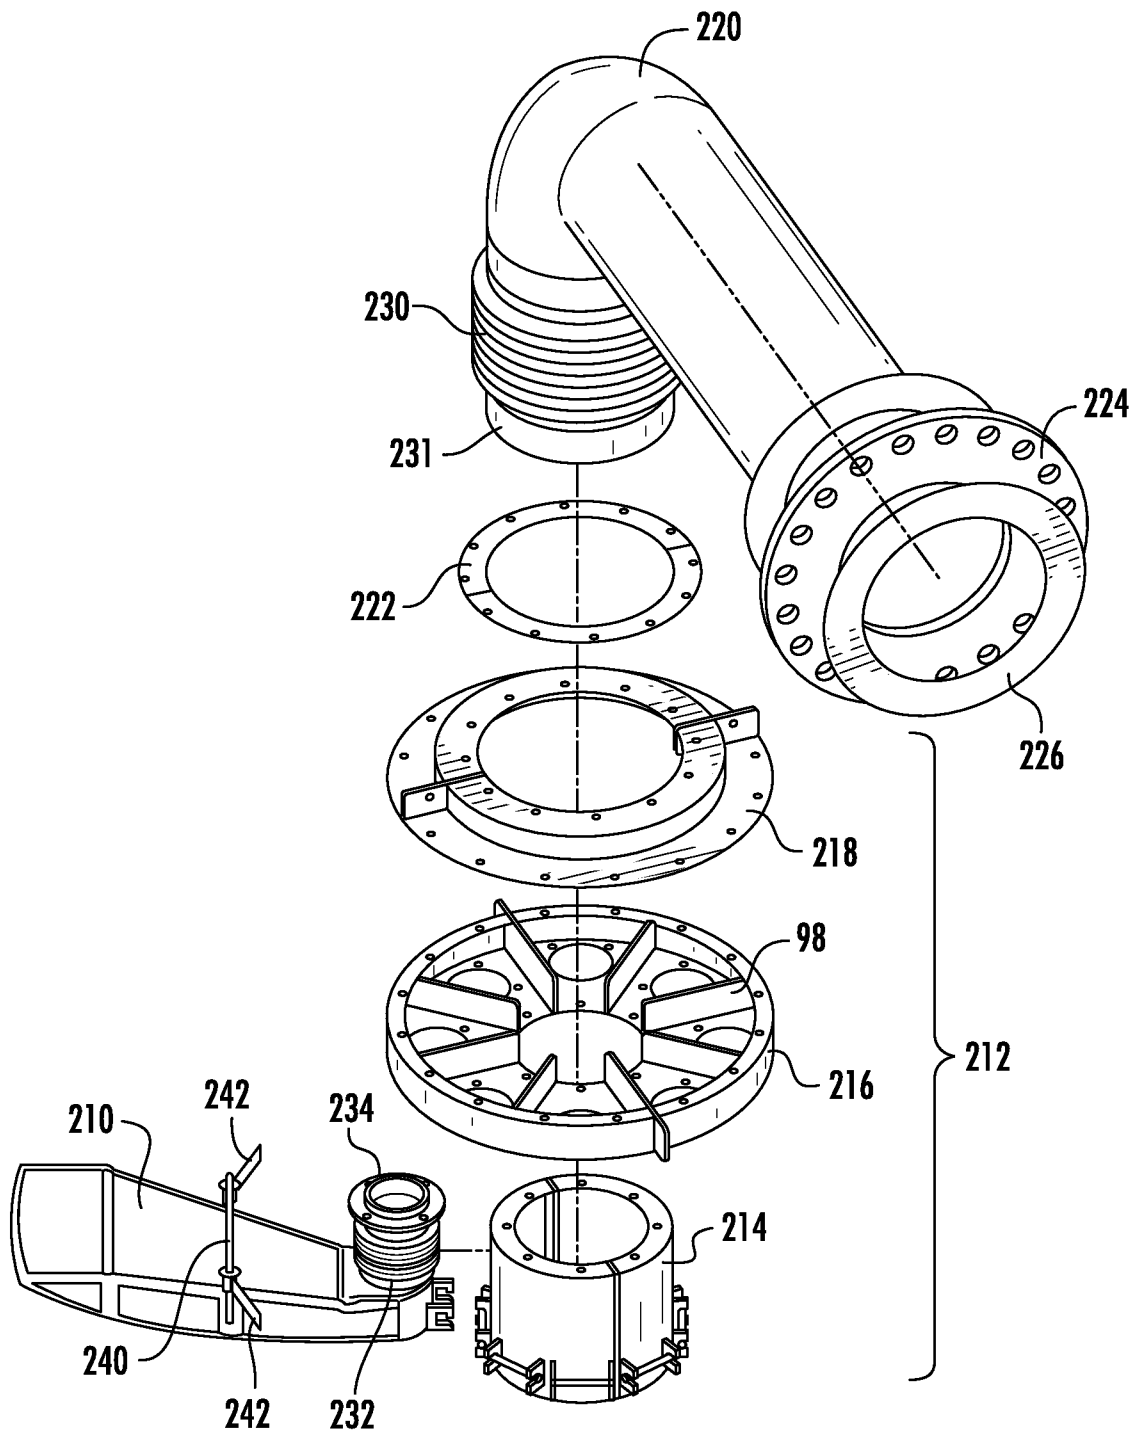


FIG. 12

13/13

**FIG. 13****FIG. 14**

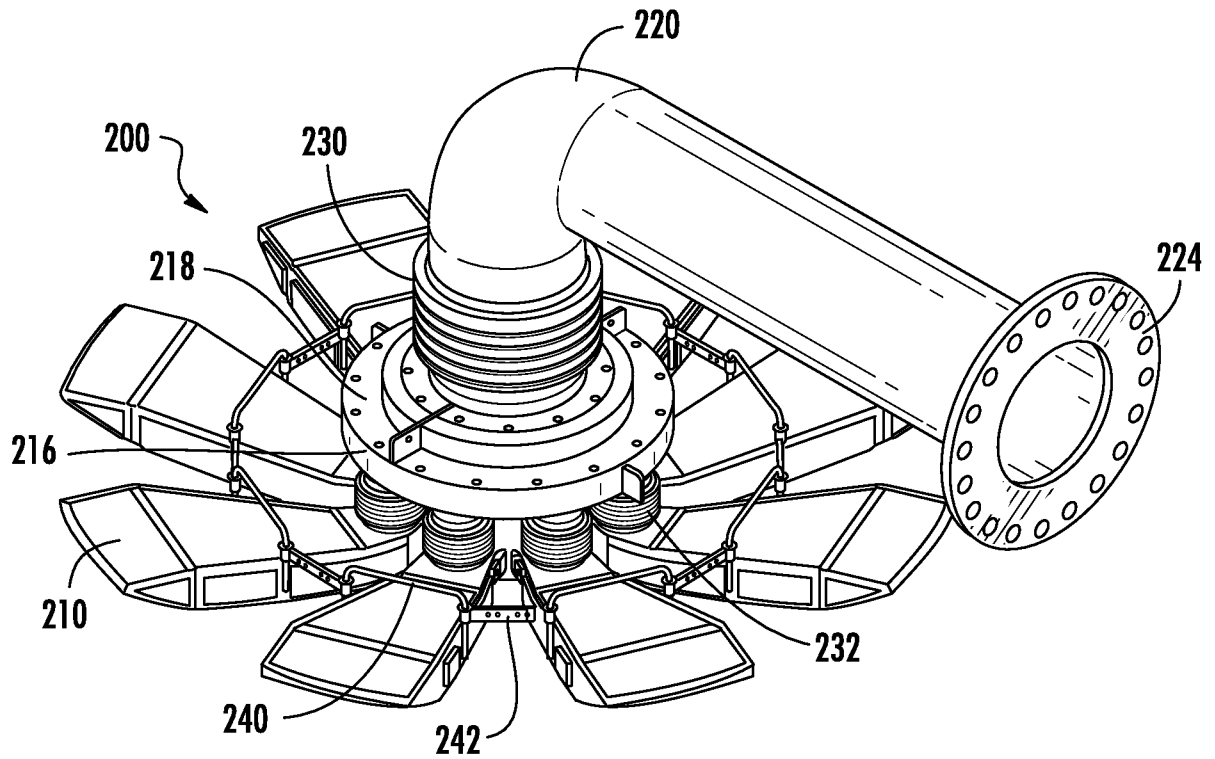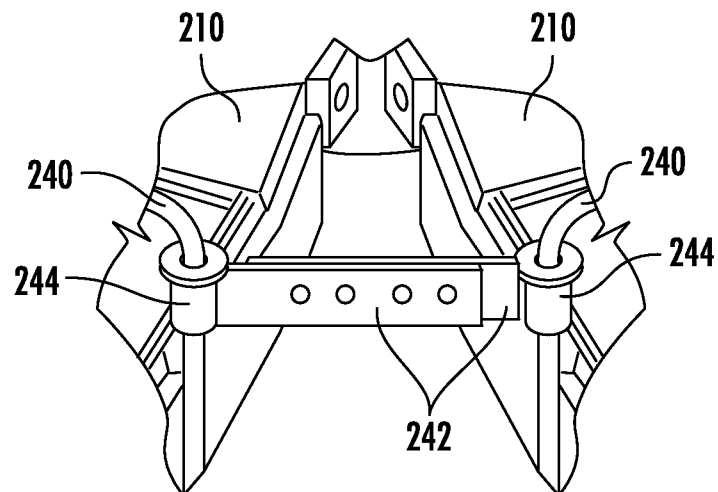