



(86) Date de dépôt PCT/PCT Filing Date: 2003/06/24
(87) Date publication PCT/PCT Publication Date: 2003/12/31
(45) Date de délivrance/Issue Date: 2011/08/16
(85) Entrée phase nationale/National Entry: 2004/12/20
(86) N° demande PCT/PCT Application No.: US 2003/019830
(87) N° publication PCT/PCT Publication No.: 2004/001912
(30) Priorité/Priority: 2002/06/24 (US10/178,957)

(51) Cl.Int./Int.Cl. *H01R 13/648* (2006.01)


(72) Inventeurs/Inventors:
PERUGINI, MICHAEL, US;
SAYDAM, EROL D., US;
EASTMAN, GARY D., US;
LANGON, ALFRED J., US;
PREW, RAYMOND A., US

(73) Propriétaire/Owner:
ADVANCED INTERCONNECTIONS CORPORATION,
US

(74) Agent: SMART & BIGGAR

(54) Titre : DISPOSITIF D'INTERCONNEXION A GRANDE VITESSE ET HAUTE DENSITE

(54) Title: HIGH SPEED, HIGH DENSITY INTERCONNECTION DEVICE

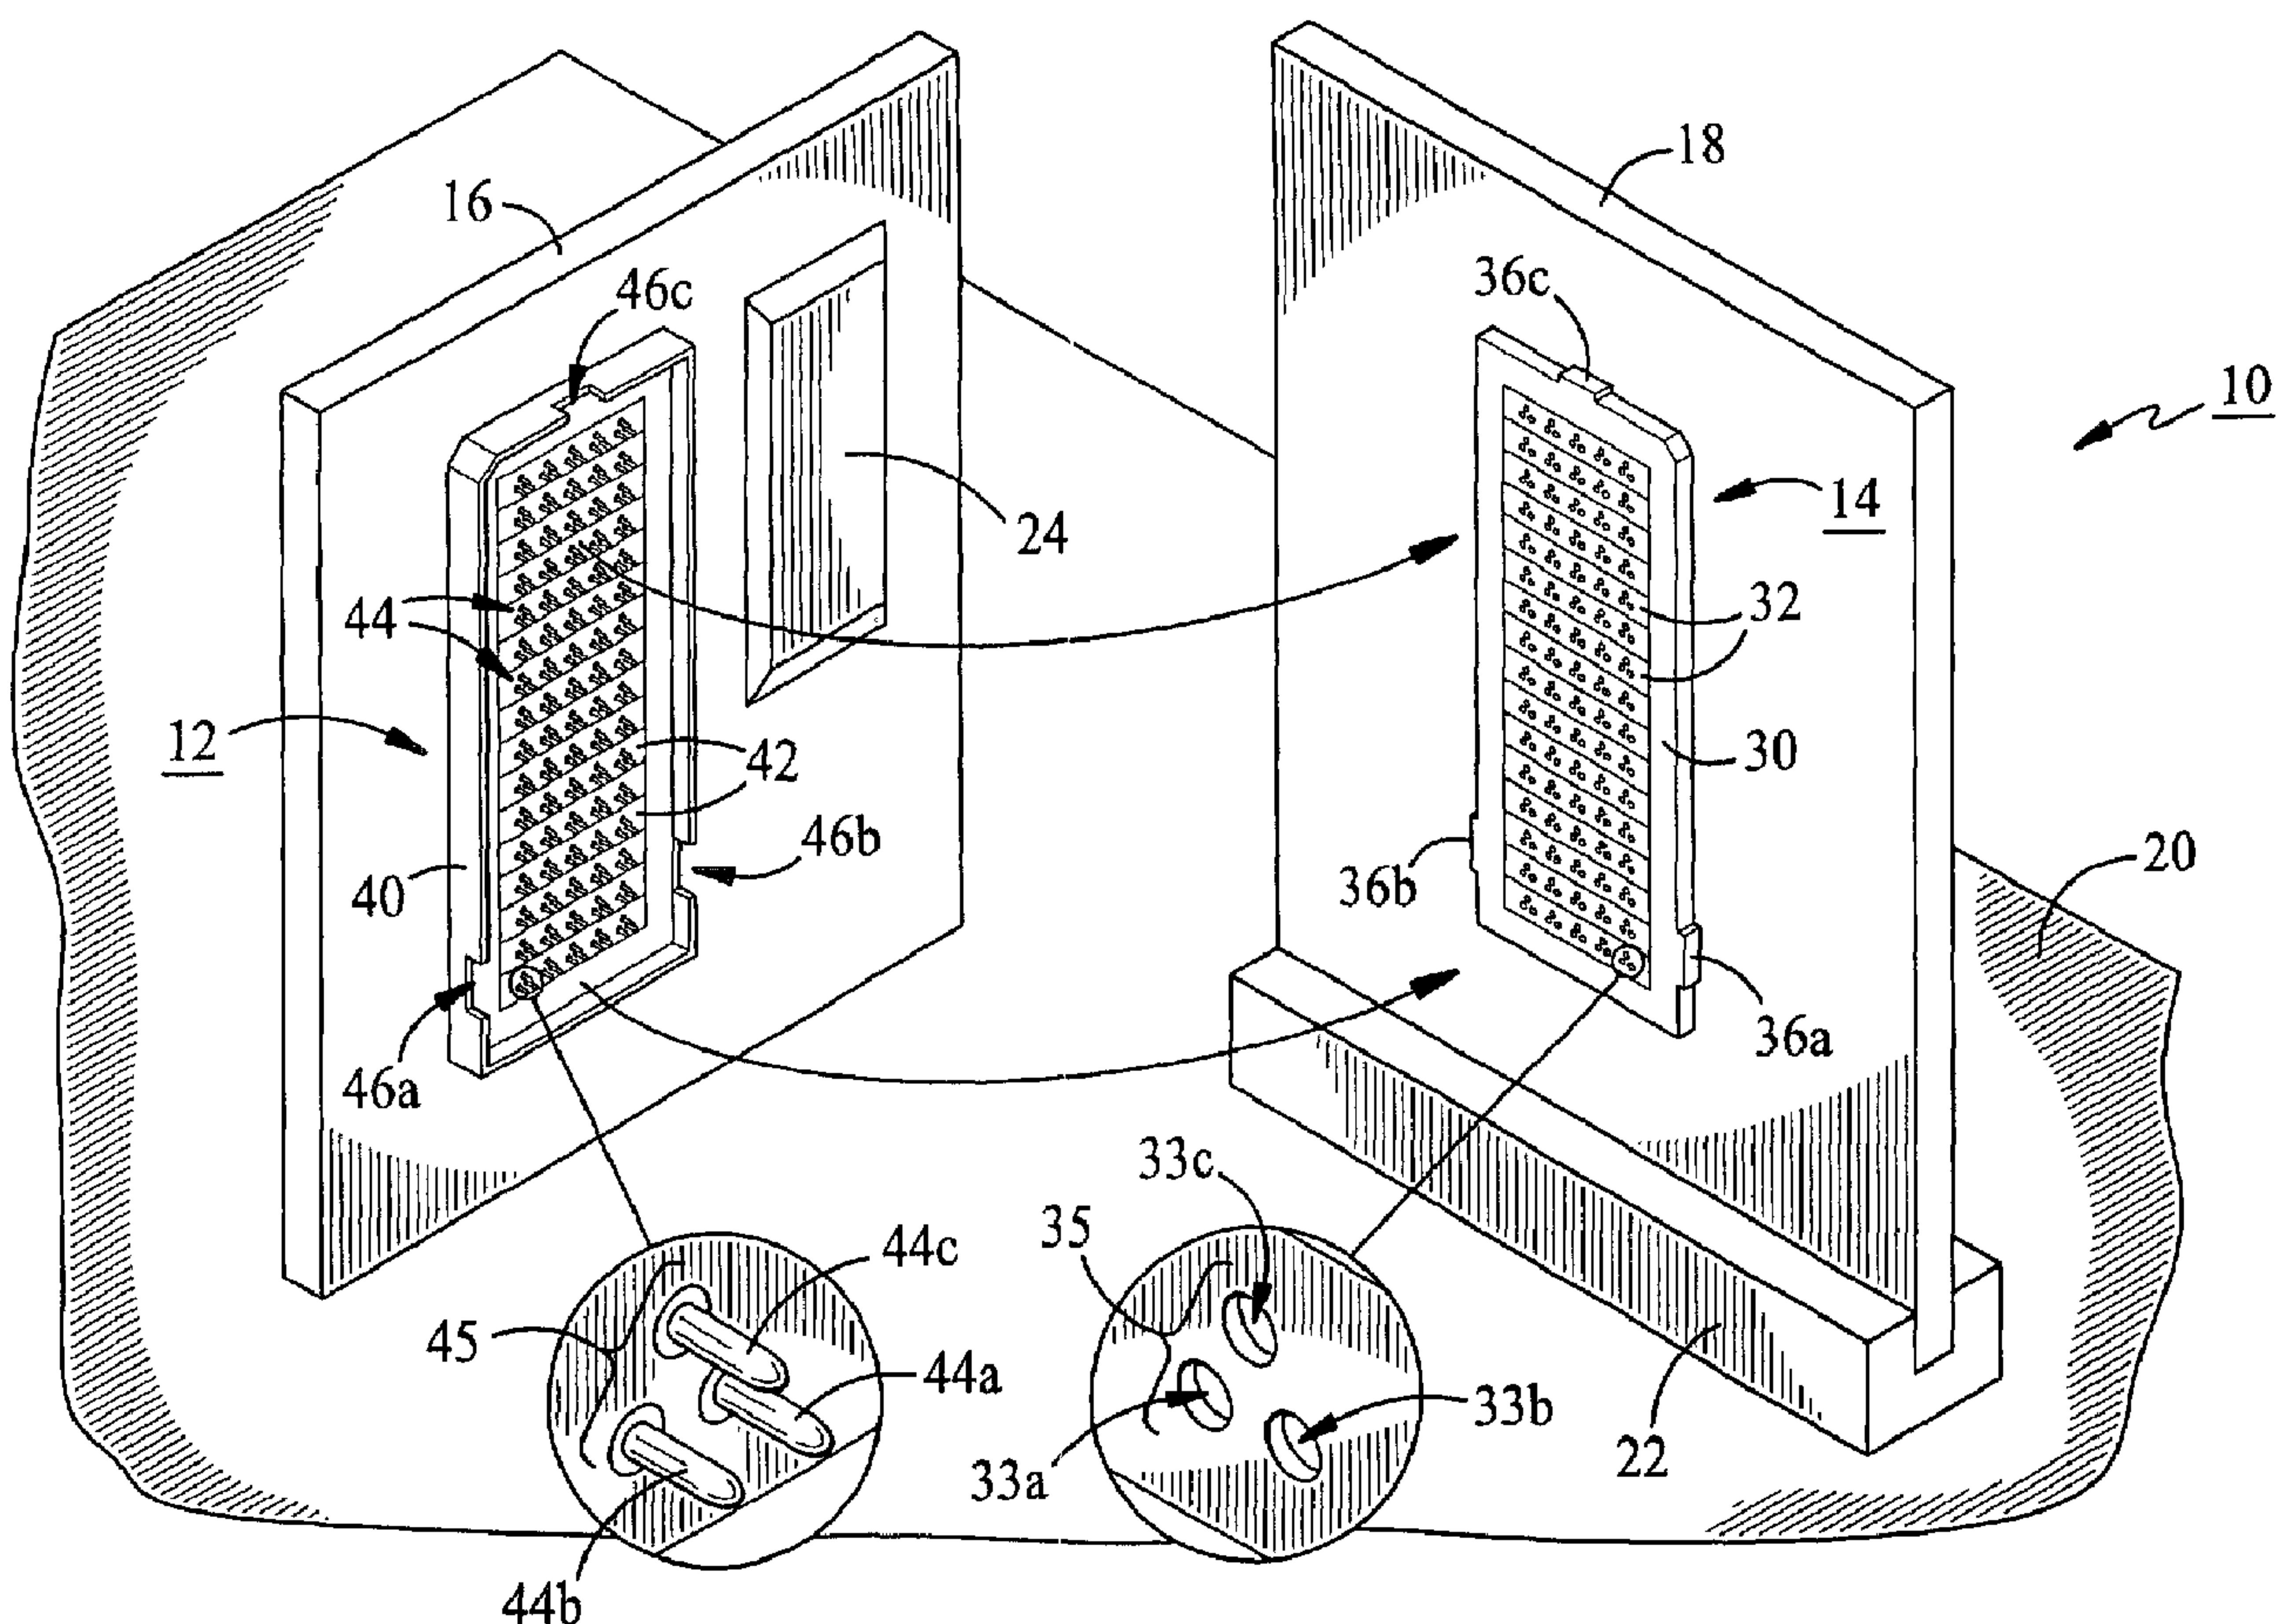

(57) Abrégé/Abstract:

An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and chassis ground circuit, the intercoupling component including a segment formed of electrically insulative material



(57) **Abrégé(suite)/Abstract(continued):**

and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint and one or more shield members formed of electrically conductive material disposed within the segment and configured to connect to the chassis ground circuit of the system. The intercoupling component may include an array of electrically conductive contacts within the plurality of holes disposed on the segment. One or more of these contacts may be configured to electrically connect with the electrical ground circuit of the system. The intercoupling component may also include a cavity located between signal contacts to adjust the differential impedance between signal contacts.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001912 A1

(51) International Patent Classification⁷: **H01R 13/648**

(21) International Application Number:
PCT/US2003/019830

(22) International Filing Date: 24 June 2003 (24.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/178,957 24 June 2002 (24.06.2002) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 10/178,957 (CON)
Filed on 24 June 2002 (24.06.2002)

(71) Applicant (for all designated States except US): **ADVANCED INTERCONNECTIONS CORPORATION**
[US/US]; 5 Energy Way, P.O. Box 1019, West Warwick, RI 02893-0919 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PERUGINI, Michael** [US/US]; 40 Glen Hollow Drive, Monroe, CT 06468 (US). **SAYDAM, Erol, D.** [US/US]; 102 Mount Hygeia Road, Foster, RI 02825 (US). **EASTMAN, Gary, D.** [US/US]; 125 Prospect Ave., North Kingstown, RI 02852 (US). **LANGON, Alfred, J.** [US/US]; 84 Kimberly Lane, Cranston, RI 02921 (US). **PREW, Raymond, A.** [US/US]; 104A Old Plainfield Pike, Foster, RI 02823 (US).


(74) Agent: **OCCHIUTI, Frank, R.**; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: HIGH SPEED, HIGH DENSITY INTERCONNECTION DEVICE

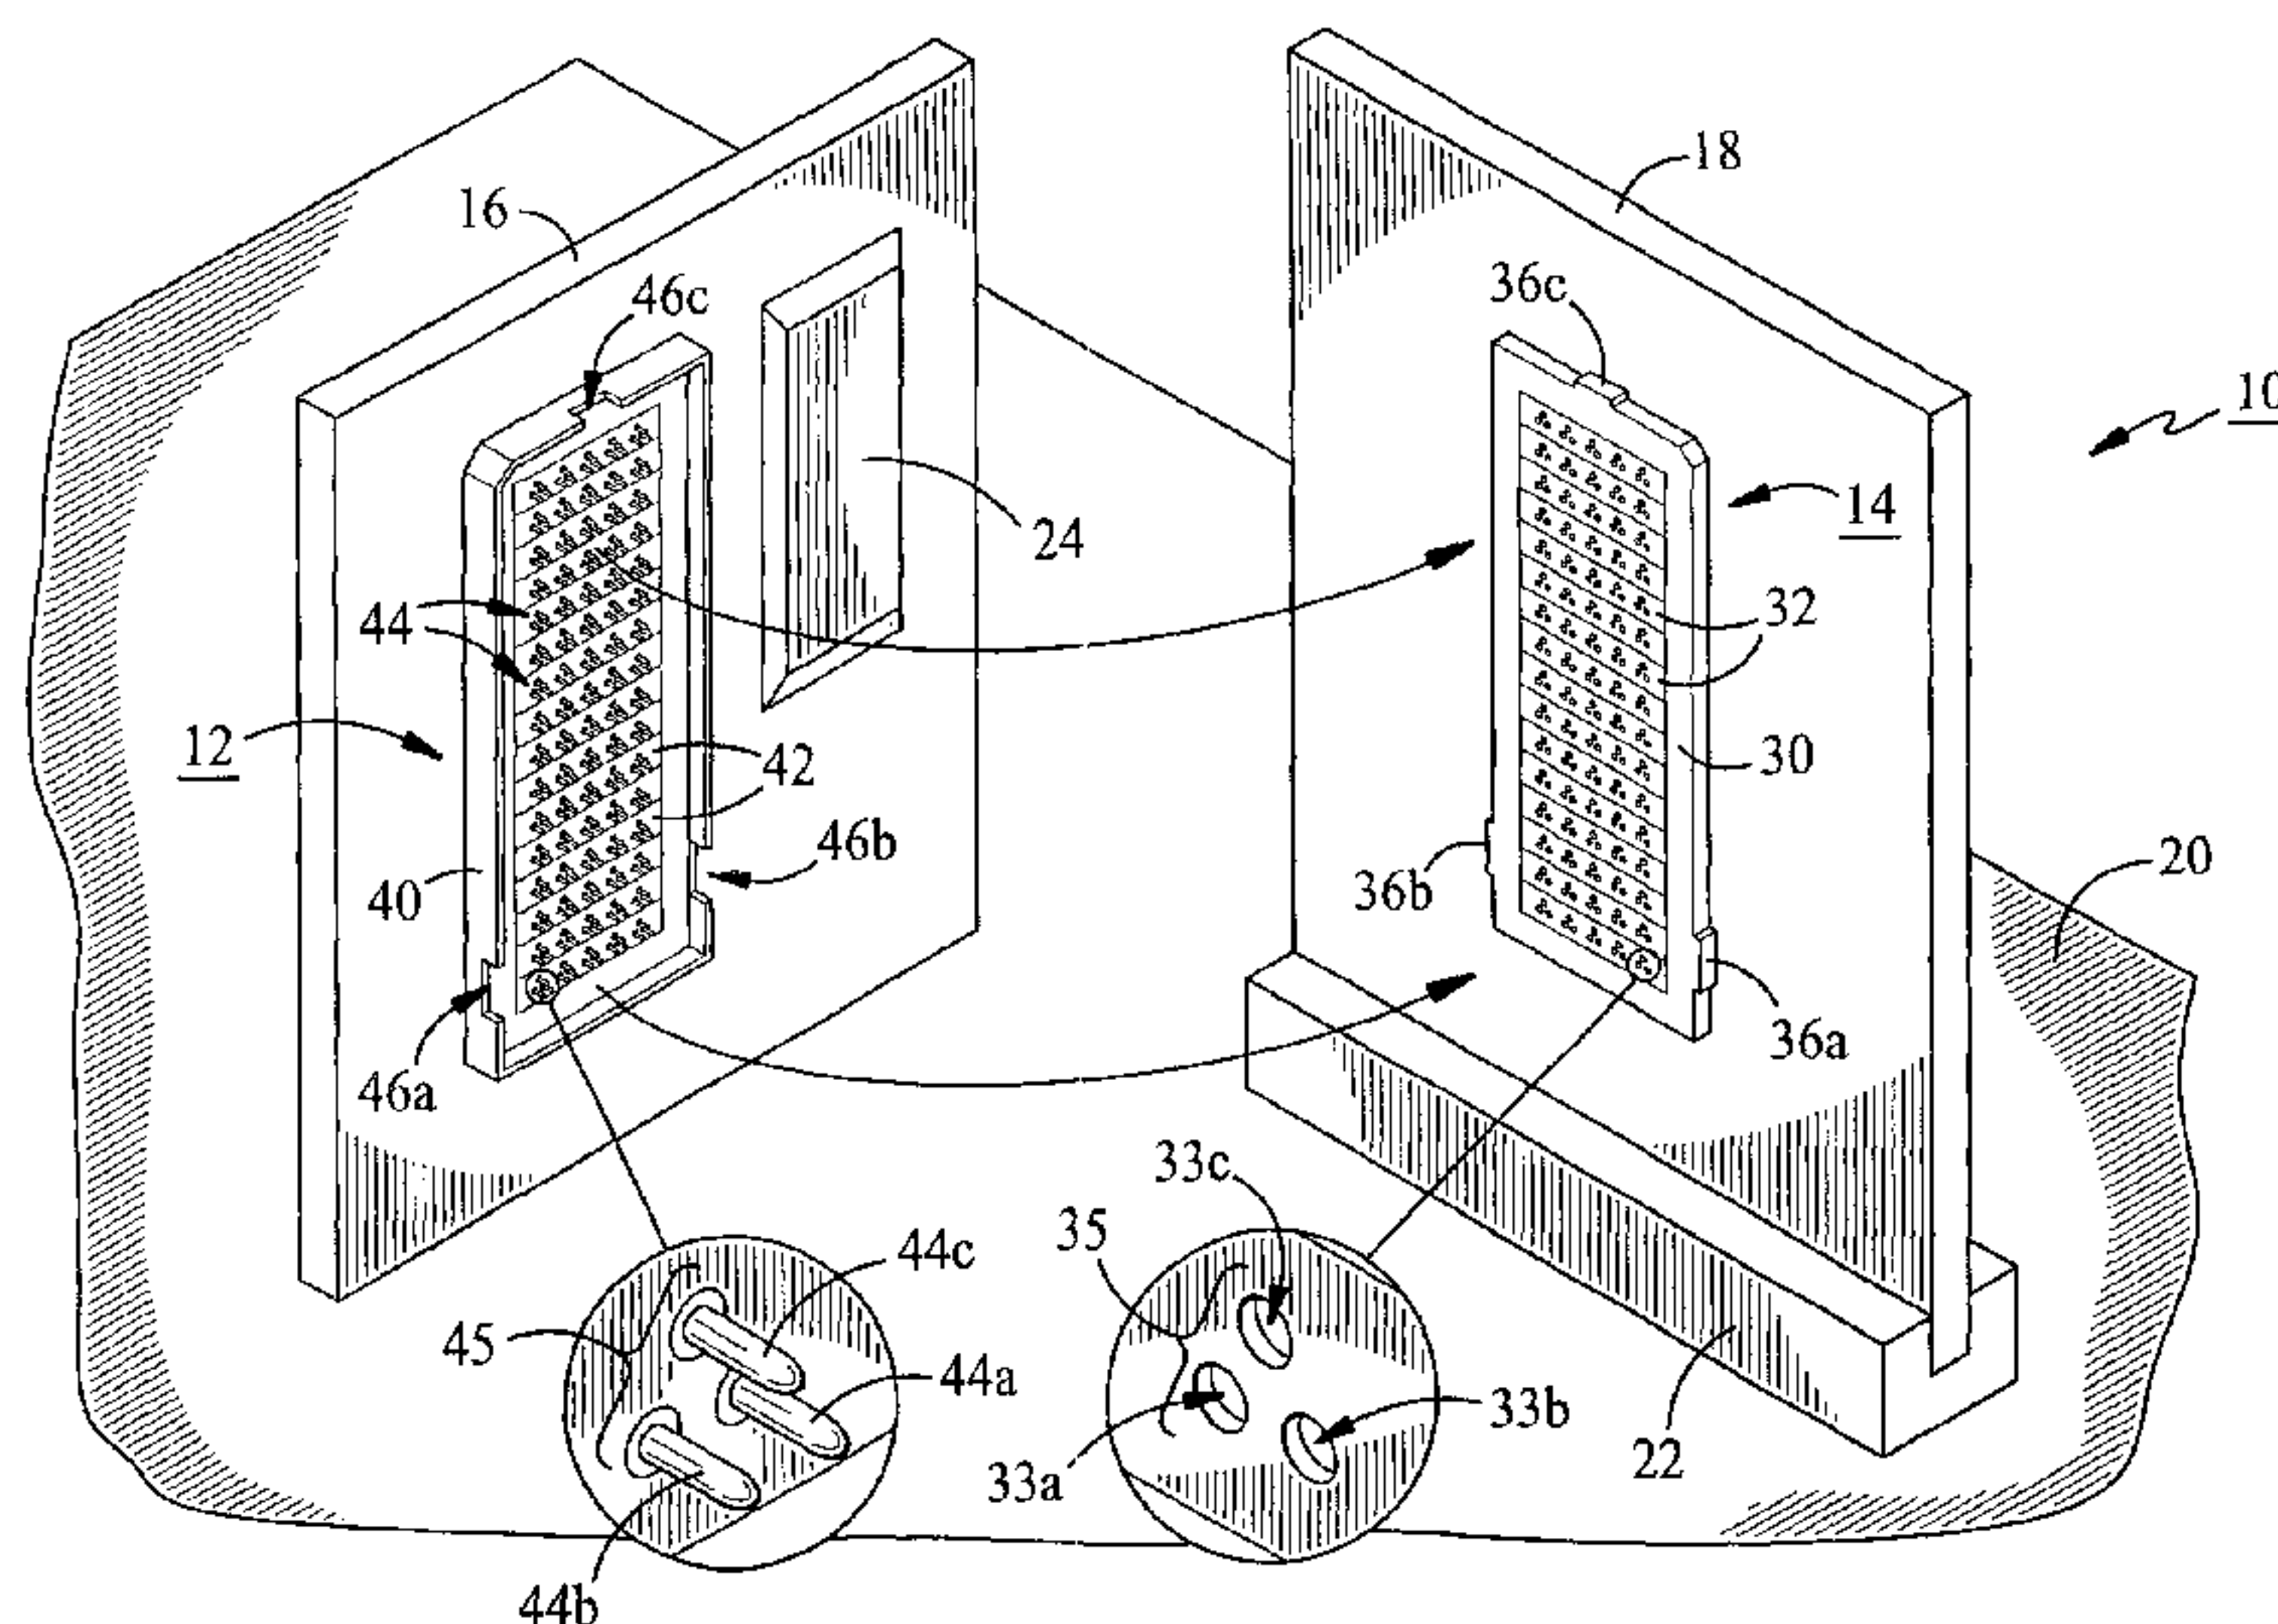

(57) Abstract: An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and chassis ground circuit, the intercoupling component including a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint and one or more shield members formed of electrically conductive material disposed within the segment and configured to connect to the chassis ground circuit of the system. The intercoupling component may include an array of electrically conductive contacts within the plurality of holes disposed on the segment. One or more of these contacts may be configured to electrically connect with the electrical ground circuit of the system. The intercoupling component may also include a cavity located between signal contacts to adjust the differential impedance between signal contacts.

WO 2004/001912 A1

WO 2004/001912 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

52867-11

High Speed, High Density Interconnection Device**TECHNICAL FIELD**

This description relates to interconnection devices, and more particularly to interconnection devices which connect an array of contacts within a digital or analog transmission system.

BACKGROUND

High speed communication between two printed circuit cards over an interconnection device with a dense array of contacts may result in cross-talk between communication channels within the interconnection device and a resulting degradation of signal integrity. In addition to cross-talk between communication channels, high speed communication across an interconnection device may generate undesirable levels of noise. Reduction of cross-talk and noise while at the same time maintaining a dense array of contacts within an interconnection device is often a design goal.

SUMMARY

According to one aspect of the present invention, there is provided an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising: a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; a shield member formed of electrically conductive material and at least partially disposed within the segment and configured to electrically connect to the chassis ground circuit; a plurality of electrically conductive signal contacts configured to transmit a digital or analog communication signal, each signal contact disposed within a hole on the upper surface of the segment forming an array of signal contacts, and wherein the shield member is at least partially disposed within the array of signal

52867-11

contacts; and a frame formed of electrically conductive material at least partially surrounding the segment and in electrical contact with the shield member and configured to electrically connect to the chassis ground circuit.

According to another aspect of the present invention, there is
5 provided an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising: a plurality of segments formed of electrically insulative material, spaces between adjacent segments defining at least one gap, each segment having an upper and lower
10 surface and including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; a shield member formed of electrically conductive material disposed within at least one gap between adjacent segments and configured to electrically connect with the chassis ground circuit of the system; a plurality of shield members formed of
15 electrically conductive material disposed within a plurality of gaps between adjacent segments configured to electrically connect with the chassis ground circuit of the system; and a frame formed of electrically conductive material surrounding the plurality of segments and in electrical contact with the plurality of shield members.

20 According to another aspect of the present invention, there is provided an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising: a segment formed of electrically insulative material and having an upper and lower surface, the
25 segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; a plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising: a first
30 electrically conductive contact; and a reference contact located at a distance D from the first electrically conductive contact and configured to electrically

52867-11

connect to the electrical ground circuit of the system, wherein the first electrically conductive contact and the reference contact form a transmission line electrically equivalent to a co-axial transmission line.

According to another aspect of the present invention, there is
5 provided an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising: a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged
10 in a predetermined footprint corresponding to the array of a contacts; and a plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising: a first electrically conductive contact; and a reference contact located at a distance
15 D from the first electrically conductive contact and configured to electrically connect to the electrical ground circuit of the system, and wherein the first electrically conductive contact is configured to transmit single-ended signals.

According to another aspect of the present invention, there is
provided an intercoupling component for receiving an array of contacts within a
20 digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising: a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; and a
25 plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising: a first electrically conductive contact; a second electrically conductive contact member located at a distance D from the first electrically conductive contact; and
30 a reference contact located at a distance D2 from the first electrically conductive

52867-11

contact and configured to electrically connect to the electrical ground circuit of the system.

According to another aspect of the present invention, there is provided a circuit card for use in a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the circuit card comprising: a printed circuit board having a plurality of contact pads arranged in a predetermined footprint; and an interconnection device comprising: a segment having an upper and lower surface, the segment having a plurality of holes extending through the upper and lower surfaces and arranged in a predetermined footprint to match the predetermined footprint of the plurality of surface mount pads; a plurality of electrically conductive contact member disposed within each of the holes and electrically connected to their respective surface mount pad; a shield member formed of electrically conductive material disposed within the segment; and a frame formed of electrically conductive material surrounding the segment, the frame electrically connected to the shield member and to the chassis ground circuit of the system.

According to another aspect of the present invention, there is provided an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit, the intercoupling component comprising: a segment formed of a material having a dielectric constant ϵ_{r1} , and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; a first signal contact disposed within a first hole on the segment; a second signal contact disposed within a second hole on the segment adjacent to the first hole in which the first signal contact is disposed, and wherein a cavity is formed in the segment between the first and second hole; and an insert formed of a material having a dielectric constant of ϵ_{r2} , the insert disposed within the cavity.

According to another aspect of the present invention, there is provided a method for adjusting the differential impedance of a pair of differential transmission lines in an interconnection device for receiving an array of contacts

52867-11

within a digital or analog transmission system having an electrical ground circuit, the intercoupling component comprising, the method comprising: providing a segment formed of a material having a dielectric constant ϵ_r1 and having an upper and lower surface, the segment including a plurality of holes disposed on its
5 upper surface; providing a plurality of pairs of signal contacts, each pair disposed with two adjacent holes on the segment and configured to transmit differential signals, the plurality of pairs of signal contacts forming an array of pairs of signal contacts disposed in the segment; spacing the pairs of signal contacts such that they create a certain differential impedance between the two contacts in each pair
10 of signal contacts; and providing a plurality of cavities disposed in the segment between the two signal contacts in each pair of signal contacts to adjust the differential impedance of the two signal contacts in each pair of signal contacts.

In an aspect, the invention features an intercoupling component for receiving an array of contacts within a digital or analog transmission system
15 having an electrical ground circuit and a chassis ground circuit. A plurality of electrically conductive contacts are disposed within holes formed on a segment formed of insulative material. One or more electrically conductive shields are disposed within the segment and are configured to connect to the chassis ground circuit of the system.

20 Embodiments may include one or more of the following. At least some of the plurality of the electrically conductive contacts disposed within the holes on the segment may be configured to electrically connect with the electrical ground circuit of the system.

A frame formed of electrically conductive material may surround the
25 segment and be in electrical contact with both the shield member and the electrical ground circuit of the system. The frame may be molded around the segments.

5 One or more ground planes which are configured to electrically connect with the electrical ground circuit of the system may be disposed within the segment. One or more cavities filled with air may be disposed on the segment.

 The intercoupling component may further include a retention member configured to releasably retain an array mating of contacts with the plurality of electrically
10 conductive contacts.

 In another aspect, the invention features an intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit. A plurality of electrically conductive contacts are disposed within holes formed on a plurality of segments, each formed of
15 insulative material. One or more electrically conductive shields are disposed within gaps between adjacent segments and are connected to the chassis ground circuit of the system.

 In another aspect, the invention features an intercoupling component for receiving an array of contacts within a digital or analog transmission system having one or more segments formed of electrically insulative material and having an upper and lower
20 surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts and a plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment. The plurality of contacts are arranged in a plurality of multi-contact groupings, with at least one multi-contact grouping including a first electrically
25 conductive contact and a reference contact. The reference contact is located at a distance D from the first electrically conductive contact and is configured to electrically connect to the electrical ground circuit of the system.

 Embodiments may include one or more of the following. The first electrically conductive contact and reference may be configured to form a transmission line
30 electrically equivalent to a co-axial transmission line. The first electrically conductive contact may be configured to transmit single-ended signals. Additionally, each multi-contact grouping may be located a distance of $\geq D$ from adjacent multi-contact groupings.

5 The intercoupling component may also include a second electrically conductive contact member located at a distance D2 from the first electrically conductive contact. The first and second electrically conductive contacts may form a transmission line electrically equivalent to a twin-axial differential transmission line. The first and second electrically conductive contacts within each multi-contact grouping may be configured to
10 transmit disparate single-ended signals or low-voltage differential signals. Additionally, each multi-contact grouping may be located a distance $\geq D2$ from adjacent multi-contact groupings.

 The first and second electrically conductive contacts may have substantially the same cross-section, initial characteristic impedance, capacitance, and inductance.

15 The intercoupling component may also include one or more shield members formed of electrically conductive material disposed within the segment and configured to connect to the chassis ground circuit of the system. Additionally, the intercoupling component may include a frame disposed around the one or more segments.

 In another aspect of the invention, a circuit card for use in a digital or analog
20 transmission system having an electrical ground circuit and a chassis ground circuit, the circuit card includes a printed circuit board having a plurality of contact pads arranged in a predetermined footprint; and an interconnection device. The interconnection device includes one or more segments having an upper and lower surface, the upper surface of the segment having a plurality of holes arranged in a predetermined footprint to match the
25 predetermined footprint of the plurality of surface mount pads, a plurality of electrically conductive contact member disposed within each of the holes and electrically connected to their respective surface mount pad, and one or more a shield members formed of electrically conductive material disposed within the segment. Additionally, a frame formed of electrically conductive material surrounds the one or more segments and the
30 frame is electrically connected the shield member and to the chassis ground circuit of the system.

 Additional embodiments include one or more of the following features. The plurality of contacts may be arranged in a plurality of multi-contact groupings which

5 includes a first electrically conductive contact; and a reference contact located at a distance D from the first electrically conductive contact and connected to the electrical ground circuit of the system.

The plurality of multi-contact groupings may also include a second electrically conductive contact located a distance D2 from the first electrically conductive contact.

10 The first and second electrically conductive contacts have substantially the same cross-section, capacitance and inductance. The first and second electrically conductive contacts may be configured to transmit low voltage differential signals or disparate single ended signals.

In another aspect of the invention, an intercoupling component for receiving an
15 array of contacts within a digital or analog transmission system having an electrical ground circuit, the intercoupling component includes a segment formed of a material having a dielectric constant ϵ_r1 . The segment has an upper and lower surface and a plurality of holes are disposed on the upper surface of the segment. A first signal contact disposed within a first hole on the segment and a second signal contact disposed within a
20 second hole on the segment adjacent to the first hole in which the first signal contact is disposed. The segment also includes a cavity formed between the first and second signal contacts.

Additional embodiments include one or more of the following features. The cavity may be formed on the upper surface, lower surface or within the segment and may
25 be is open to air. An insert formed of a material having a dielectric constant of ϵ_r2 may be disposed within the cavity.

The intercoupling component may include a plurality of first signal contacts disposed within a plurality of holes and a plurality of second signal contacts each disposed within a hole that is adjacent to a hole containing a first signal contact. The
30 segment may include a cavity disposed between each pair of first and second signal contacts. The intercoupling component may also include ground contacts disposed within holes on the segment or a ground plane.

5 In another aspect of the invention, a method for adjusting the differential impedance of a pair of differential transmission lines in a interconnection device for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit, the intercoupling component. The method includes providing a segment having a dielectric constant ϵ_{r1} and having an upper and lower surface and
10 including a plurality of holes disposed on its upper surface. Providing a pair of signal contacts disposed within two adjacent holes on the segment, the pair of signal contacts configured to transmit differential signals. Spacing the pair of signal contacts such that they create a certain differential impedance of the two contacts in the pair of signal contacts. Providing a cavity in the segment between the two signal contacts in the pair of
15 signal contacts to adjust the differential impedance between the pair of signal contacts.

Additional embodiments include one or more of the following steps. Inserting a material having a dielectric constant of ϵ_{r2} in the cavity in the segment.

Providing a plurality of pairs of signal contacts disposed with a plurality of adjacent holes on the segment, the plurality of pairs of signal contacts forming an array of
20 pairs of signal contacts disposed in the segment. Providing a plurality of cavities disposed in the segment between the two signal contacts in each pair of signal contacts to adjust the differential impedance of the two signal contacts in each pair of signal contacts.

Providing a plurality of ground contacts disposed within a plurality of holes on
25 the segment and within the array of pairs of signal contacts, the plurality of ground contacts electrically connected to the electrical ground circuit of the system.

Providing a ground plane disposed within the segment and within the array of pairs of signal contacts, the ground plane configured to electrically connect with the electrical ground of the system.

30 Embodiments of the invention may have one or more of the following advantages.

One or more contacts disposed within the array of contacts and are configured to connect to the electrical ground of the system may help to reduce cross-talk between two or more contacts during signal transmission. Additionally, the use of a electrically

5 conductive shield member connected to the chassis ground of the system and disposed within or between one or more segments may help to reduce undesired electromagnetic fields generated by high-speed electron flow over the contact array during operation.

 The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and
10 advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

 FIG. 1 is a perspective view, partially exploded, of an plug on a secondary circuit board and a matching socket on a primary circuit board within an digital or analog
15 signal transmission system.

 FIG. 2A is a perspective view of a plug.

 FIG. 2B is a side view of a plug, partially cut away.

 FIG. 3A is a perspective view of a plug shield.

 FIG. 3B is a perspective view of a plug segment.

20 FIG. 3C is a bottom view of a plug.

 FIG. 4A is a perspective view of a socket, partially exploded.

 FIG. 4B is a side view of a socket, partially cut away, partially exploded.

 FIG. 5A is a perspective view of socket shield.

 FIG. 5B is a perspective view of a socket segment.

25 FIG. 5C is a bottom view of a socket.

 FIG. 6 is a schematic of an interconnection device in operation.

 FIG. 7 is a partial view of three contact groupings within a socket.

 FIG. 8 is a partial view of three contact groupings within a socket and air cavities disposed on the socket.

30 FIG. 9 is a partial view of three contact groupings and a continuous ground plane disposed within another interconnection device.

 FIG. 10 is a partial view of three contact groupings and a number of ground planes disposed within another interconnection device.

5 FIG.11 is a partial view of three contact groupings and a number of ground planes disposed within another interconnection device.

DETAILED DESCRIPTION

Referring to FIG. 1, in a digital or analog signal transmission system 10, a plug 12 and matching socket 14 releasably connect two printed circuit boards, a primary circuit
10 board 18 and a secondary circuit board 16.

Digital or analog transmission system 10 may be any system which transmits digital or analog signals over one or more transmission lines, such as a computer system (as illustrated in FIG. 1), a telephony switch, a multiplexor / demultiplexor (MUX/DMUX), or a LAN/WAN cross-connect/router.

15 Secondary circuit board 16 may include a central processing unit (CPU), application specific integrated circuit (ASIC), memory, or similar active or passive devices and components. In this example, secondary circuit board 16 includes an ASIC device 24, and primary circuit board 18 is a daughter board connected to a motherboard 20 by a card slot connector 22. In another embodiment, the primary circuit board may be
20 a self-contained system or board, not connecting to any other system or motherboard, as in the case of a single board computer.

The socket 14 includes a frame 30 formed of electrically conductive material that surrounds a number of segments 32. The segments 32 are formed of electrically insulative material. A shield (not shown in FIG. 1) formed of electrically conductive
25 material is located between each of the segments 32 and is in electrical contact with the frame 30, thus forming an electrically conductive "cage" around the perimeter of each segment 32. As will be explained in greater detail below, the frame 30 is electrically connected to the chassis ground circuit (shown in FIG. 6) of the system 10.

The socket 14 has an array of holes arranged in a series of three-hole groupings
30 35 on each segment 32. A female socket assembly 34 (not shown in FIG. 1) is located within each of the holes 33a-33c and is configured to releasably receive a male pin. As will be explained in greater detail below, the three-contact grouping 35 includes a first signal contact (disposed within hole 33a), a second signal contact (disposed within hole

5 33b) and a reference contact (disposed within hole 33c). The reference contact is electrically connected to the electrical ground circuit (Vcc) (shown in FIG. 6) of the system 10.

Plug 12, which mates with socket 14, also includes a frame 40 formed of electrically conductive material that surrounds a number of segments 42. Like the socket
10 segments 32, the plug segments 42 are formed of electrically insulative material. A shield (not shown in FIG. 1) formed of electrically conductive material is located between each of the segments 42 and is in electrical contact with the frame 40, thus forming an electrically conductive "cage" around the perimeter of each segment 42 within the plug 12. As will be explained more below, the frame 40 is electrically connected to the chassis
15 ground circuit (shown in FIG. 6) of the system 10.

The plug 12 has an array of male pins 44 arranged in a series of three-pin groupings 45 on each segment 42. Each three-pin grouping 45 includes a first signal pin 44a, a second signal pin 44b and a reference pin 44c. As will be explained in greater detail below, these three pins mate with their respective sockets to form a twin-axial
20 communication channel and a reference ground return between the plug 12 and socket 14.

Each of the male pins 44 protrude from the upper surface of the segments 42 and are received by the matching array of female sockets (not shown) disposed within each of the holes 34 on the socket 14. Each male pin and female socket attach to a solder ball (not shown in FIG. 1) that protrudes from the bottom surface of the plug 12 and socket
25 14, respectively, and is mounted via a solder reflow process to contact pads on the respective printed circuit boards, 16, 18. Thus, when the plug 12 is inserted into the socket 14, an electrical connection is formed between the secondary circuit board 16 and primary circuit board 18. In separate embodiments, the male pins 44 and female sockets 34 may not be terminated by a solder reflow process using solder balls, but may employ
30 other methods for mounting the pins or sockets to a printed circuit card, such as through-hole soldering, surface mount soldering, through-hole compliant pin, or surface pad pressure mounting.

5 The plug frame 40 includes three guide notches 46a, 46b, 46c which mate with the three guide tabs 36a, 36b, 36c on the socket frame 30 in order to ensure proper orientation of the plug 12 and the socket 14 when mated together.

 Referring to FIGS. 2A-B, each male pin 44 extends from the lower surface of the plug 12 and protrudes from the upper surface of the segments 42. A solder ball 50 is
10 attached (e.g., by soldering) to the terminal end of each male pin 44 and protrudes from the bottom surface of the plug. The array of solder balls 50 attached to the terminal end of each male pin 44 may be mounted (e.g., by a solder reflow process) to contact pads located on the secondary circuit board 16.

 The plug frame 40 is formed of electrically conductive material and includes
15 solder balls 52 are attached (e.g., by a solder reflow process) to the bottom surface of the plug frame 40. When the plug 14 is mounted to the secondary circuit board 16, the solder balls 52 attached to the plug frame 40 are electrically connected to the chassis ground circuit of the system 10.

 Referring to FIGS. 3A-C, a shield (FIG. 3A), a segment (FIG. 3B) and the bottom
20 surface of the plug (FIG. 3C) is shown. A shield 60 formed of electrically conductive material is located between each of the segments 42. Each shield 60 is generally U-shaped and includes two short sides 61, 62 on each side of a longer middle portion 63. When assembled into the plug, the two short sides 61, 62 of each shield 60 are in electrical contact with the frame 40, while the middle portion 63 of each shield 60 is
25 located between each of the segments 42. Thus, the frame 40 and shields 60 form an electrically conductive "cage" around the perimeter of each segment 42. This electrically conductive "cage" is connected to the chassis ground circuit (shown in FIG. 6) of the system 10 via solder balls 52 on the bottom of the frame 40. The chassis ground circuit is a circuit within system 10 which connects to the metal structure on or in which the
30 components of the system are mounted.

 In this example, each shield 60 has four notches: two on the short sides of the shield 64, 65 and two on the middle portion of the shield 66, 67. When the shields 60 are assembled into the plug 12, the two notches on the short sides of each shield 64, 65 mate

5 with the two dog-eared tabs 71, 72 on each corresponding segment 42. Similarly, the two notches located on the middle portion 66, 67 of each shield 60 mate with two corresponding tabs (not shown) on each segment 42. Each shield 60 also has three tabs 68 on it's middle portion 63 which are pressed in opposite directions by adjacent segments 42 after the plug 12 assembled and helps to secure the shields 60 in place.

10 Each segment 42 includes two dog-eared tabs 71, 72 located at each end of the segment 42. The two dog-eared tabs 71, 72 fit into two matching grooves 81, 82 formed on the bottom surface of the frame 40. The two triangular bump-outs 73, 74 on each of the segments 42 press against adjacent shields 60 and segments 42 in order to secure the segments 42 and the shields 60 within the frame 40. It should be noted that there are
15 many ways to secure the segments 42 and shields within the frame 40 such as by glue, adhesive, cement, screws, clips, bolts, lamination or the like. The frame 40 may also be constructed by partially encapsulating the segments 42 with an electrically conductive resin or other material.

Referring to FIGS. 4A-B, the socket 14 has an array of holes (e.g., 33a, 33b, 33c)
20 disposed on the segments 32. A female socket contact 34 is disposed within each of the holes and is configured to releasably receive a corresponding male pin 44. A solder ball contact 90 is attached (e.g., by soldering) to the terminal end of each female socket contact 34 and protrudes from the bottom surface of the socket 12. The array of solder balls 90 attached to the terminal end of each female socket contact 34 may be mounted
25 (e.g., by soldering) to contact pads located on the primary circuit board 18.

Like the plug frame 40, the socket frame 30 is formed of electrically conductive material and includes solder balls 92 attached (e.g., by soldering) to the bottom surface of the socket frame 30. When the socket 14 is mounted to the primary circuit board 18, the solder ball contacts 92 attached to the socket frame 30 are electrically connected to
30 contact pads which are connected to the chassis ground circuit of the system 10. Additionally, when the plug 12 is inserted into the socket 14, the plug frame 40 and socket frame 30 are electrically connected to each other and are, in turn, electrically connected to the chassis ground circuit of the system 10.

5 As shown in FIGS. 5A-C, the assembly of the socket 14 is similar to the assembly of the plug 12 depicted in FIGS. 3A-C. Dog-eared tabs 102, 103 located on the socket segments 32 fit into corresponding notches 104, 105 disposed on the socket frame 30. A shield 100 is located between each of the segments and electrically contacts the socket frame 30, thus forming an electrically conductive "cage" around the perimeter of each
10 socket segment 32.

The male pins 44 on the plug 12 and corresponding female socket contacts 34 disposed within the socket 14 may be any mating pair of interconnection contacts and not restricted to pin-and-socket technology. For example, other embodiments may use fork and blade, beam-on-beam, beam-on-pad, or pad-on-pad interconnection contacts. As will
15 be explained in greater detail below, the choice of contact may effect the differential impedance of the signal channels.

Referring to FIG. 6, in digital or analog signal transmission system 10, differential signal communication over a single three-contact grouping between secondary circuit board 16 and primary circuit board 18 is illustrated. The plug 12 mounted to the
20 secondary circuit board 16 is plugged into the socket 14 mounted to the primary circuit board 18, forming an electrical connection between the primary and secondary circuit boards, 16, 18. Within the three-contact grouping, three male pins (not shown in FIG. 6) of the plug 12 and three corresponding female socket contacts of socket 14 couple to form a first signal channel 108, a second signal channel 110, and a reference channel 112.
25 The first and second signal channels 108, 110 are coupled with a resistor 118 to form a symmetric differential pair transmission line. The reference channel 112 is electrically connected to the electrical ground circuit (Vcc) 114 of the system 10. The electrical ground circuit (Vcc) 114 is a circuit within system 10 that is electrically connected to the power supply (not shown) of system 10 and provides the reference ground for system 10.
30 Additionally, the plug frame 40 and socket frame 50 are in electrical contact with each another and with the chassis ground circuit 120 of the system 10.

In this example, an ASIC chip 24 mounted to the secondary circuit board 18 includes a driver 100 which sends signals over the first and second signal channels, 108,

5 110. The primary circuit board 18 includes a receiver 116 which receives the signals generated by the driver 100. The receiver 116 may be incorporated within a memory device, a central processing unit (CPU), an ASIC, or another active or passive device. The receiver 116 includes a resistor 118 between the first signal channel 108 and the second signal channel 110. In order to avoid signal reflection due to mismatched
10 impedance, the differential impedance of the first and second signal channels, 108, 110 should be such that it approximately matches the value of the resistor 118.

The driver 100 includes a current source 102 and four driver gates 104a-104b, 106a-106b and drives the differential pair line (i.e., first and second signal channels 108, 110). The receiver 116 has a high DC input impedance, so the majority of driver 100
15 current flows across the resistor 118, generating a voltage across the receiver 116 inputs. When driver gates 106a-106b are closed (i.e., able to conduct current) and driver gates 104a-104b are open (i.e., not able to conduct current), a positive voltage is generated across the receiver 116 inputs which may be associated with a valid "one" logic state. When the driver switches and driver gates 104a-104b are closed and driver gates 106a-
20 106b are open, a negative voltage is generated across the receiver inputs which may be associated with a valid "zero" logic state.

The use of differential signaling creates two balanced signals propagating in opposite directions over the first and second signal channels, 108, 110. The electromagnetic field generated by current flow of the signal propagating over the first
25 signal channel 108 is partially cancelled by the electromagnetic field generated by the current flow of the signal propagating over the second signal channel 110 once the differential signals become co-incidental or "in-line" with one another. Thus, the differential signaling reduces cross-talk between the first and second signal channels and between adjacent contact groupings.

30 The addition of the reference channel 112 in close proximity to the first and second channels 108, 110 functions to help bleed off the parasitic electromagnetic field to circuit ground 114, which may further reduce cross-talk between signal channels and between contact groupings.

5 The driver 100 may also be configured to operate in an “even” mode where two signals propagate across the first and second channel at the same time in the same direction. In this mode, current travels in the same direction over the first and second signal channels, 108 and 110, and, therefore the electromagnetic fields generated by the current flow would largely add. However, the reference channel 112 would still operate
10 to bleed off the electromagnetic field and reduce cross-talk between adjacent contacts and contact groupings.

 The socket 12 and plug 14 also feature electrically conductive “cages” formed by the frame and the shields around the perimeter of the segments, 34, 44. The plug frame 40 and socket frame 30 are in electrical contact with each other and with the chassis
15 ground 120 of the system 10. When high speed communication takes place over an interconnection device, electromagnetic fields substantially parallel to the board are created due to the electron flow at high frequencies. The frames 30, 40 and the shields 32, 42, act as “cages” to contain the electromagnetic fields generated by the electron flow across the device, which may reduce the amount of noise emitted by the interconnection
20 device. Additionally, the “cages” act to absorb electromagnetic fields which might otherwise be introduced into the socket 12 and plug 14, and which may adversely affect the primary or secondary circuit boards 18, 16 and any associated active or passive devices and components mounted thereto.

 Referring again to FIG. 6, when a pair of interconnection devices are mated, the
25 differential impedance for the first and second signal channels should be approximately equal to the value of resistor 118 in order to avoid reflection of the signal. In a Low Voltage Differential Signaling (LVDS) application, the value of the resistor 118 is typically 100 ohms. Thus, in a pair of interconnection devices for use in an LVDS application, the first and second signal channels should be designed such the differential
30 impedance is approximately 100 ohms. The differential impedance of the first and second channel signal is a complex calculation that will depend on a number of variables including the characteristic impedance of the contacts, the dielectric constant of the medium surrounding the contacts, and the spatial orientation of the signal contacts and

5 the reference ground contacts. One simplified analytical approach to determining the differential impedance, might be as follows:

(1) First determine the self inductance and self capacitance for each of the signal channels with respect to the reference channel within a unit given a selected conductor cross section and spatial relationship.

10 (2) Determine the differential mutual inductance and capacitance between the two signal channels within a unit given the selected conductor cross section and spatial relationship; and

(3) Combine the self impedance (i.e., the self inductance plus self capacitance) and differential mutual impedance (i.e., the differential mutual inductance plus
15 differential mutual capacitance) to approximate the differential impedance of the two signal channels.

A similar analytical approach may be used to orient the units with respect to one another. It should be noted, however, that these analytical approaches are idealized and does not account for parasitics produced in real-world transmission lines. Due to the
20 complexity of the calculations for real-world transmission lines, computer modeling and simulations using different parameters is often an efficient way to arrange the contacts for a particular application.

Referring to FIG. 7, the spacing between the three groups of three-contact arrays 35a-35c within a segment 32 on socket 14 is shown. In this embodiment, the
25 interconnection device 14 is adapted to be used in an LVDS application. Each contact array 35a-35c includes a pair of signal contacts, 34a-34b, 34d-34e, 34g-34h, and a reference contact 34c, 34f, 34i. Each of the signal contacts, 34a-34b, 34d-34e, 34g-34h, and the corresponding male pins (not shown) are formed of copper alloy and have an initial characteristic impedance of approximately 50 ohms (single-ended). The segment
30 32 is formed of polyphenylene sulfide (PPS) having a dielectric constant of approximately 3.2. Two shield members 60a, 60b are located adjacent to the top and bottom edge of the segment 32. Table I provides the spatial orientation between contacts within a group as well as between adjacent groups in order to produce a differential

- 5 impedance in the first and second signal channels of a mated pair of interconnection devices of approximately 100 ohms.

Table I

Dimension	Value
A	.070"
B	.063"
C	.037"
D	.050"
E	.048"
F	.083"
G	.150"
H	.004"

10 The spatial orientation for the mating plug to socket 14 shown in FIG. 7 would have similar spacing in order to properly plug into socket 14.

The differential impedance of the differential signal channels may be adjusted by inserting material with a different dielectric constant than the segment between the differential signal contacts. For example, an air cavity (air having a dielectric constant of approximately 1) or a Teflon® insert may be inserted between the differential signal
15 contacts in the segment in order to create a composite dielectric having a dielectric constant that is greater or less than the dielectric constant of the segment itself. This will have the effect of lowering or raising the resulting differential impedance between the differential signal contacts on the interconnection device.

The absolute value of a materials dielectric constant (ϵ_r) between adjacent
20 conductors is inversely proportional to the resulting differential impedance between those conductors. Thus, the lower the resulting dielectric constant (ϵ_r) of a composite dielectric material b/w signal contacts, the higher the resulting differential impedance between the contacts. Similarly, the higher the resulting dielectric constant (ϵ_r) of a

5 composite dielectric material b/w signal contacts, the lower the resulting differential impedance between the contacts.

As shown in FIG. 8, a plug 14 includes a segment 32 with three contact groupings 35a, 35b, 35c. Each contact grouping includes a first signal contact 34a, 34d, 34g, a second signal contact 34b, 34e, 34h, and a reference contact 34c, 34f, 34i. A cavity 130a-
 10 130c is formed on the segment 32 centered between the first and second signal contact of each grouping. The cavities are open to air and extends from the top surface to approximately 0.113" within the segment 32. Table II provides the dimensions of the air cavities shown in FIG. 8, given the same parameters specified in the description of FIG. 7.

15

Table II

Dimension	Value
A	.021"
B	.021"
C	.011"
D	.0753"

By adding this air cavity between the signal contacts in the plug 14, the differential impedance of the differential signal channels on the female side of the
 20 interconnection device is increased. The size and shape of the air cavity will depend on the desired value for the differential impedance of the differential signal channels. In an LVDS application, the desired differential impedance for the first and second signal channels formed by a mating pair of male and female contacts should be 100 Ohms, +/- 5 Ohms. Thus, the female side alone may have a differential impedance of more or less
 25 than 100 Ohms and the male side may have a differential impedance of more or less than 100 Ohms, but the pair when mated have an average differential impedance of 100 Ohms (+/- 5 Ohms). Male and female differential impedance values should be equal to eliminate any impedance mismatch (dissimilar impedance values) between the two. Any

5 impedance mismatch usually results in an increased signal reflection of the applied energy back towards the signal source thereby reducing the amount of energy being transmitted through the mated connectors. The introduction of a composite dielectric as described herein can minimize the differential impedance mismatch between male and female connectors, thus minimizing reflection of the applied energy back towards the
10 signal source, thereby increasing the amount of energy being transmitted through the mated connectors.

While an air cavity between differential signal pairs is depicted in FIG. 8, any material having a different dielectric constant than the segment may be inserted between the signal contacts on either the male or female side. For example, a Teflon® insert, air-
15 filled glass balls, or other material having a lower dielectric constant than the material of the segment (e.g., PPS resin) may be disposed between the signal contacts in order to create a composite dielectric which reduces the resulting dielectric constant of the segment between signal contacts. Similarly, material with a higher dielectric constant may be added between the signal contacts in order to create a composite dielectric which
20 will raise the dielectric constant of the segment between contacts.

As shown in FIG. 9, another interconnection device 140 includes a segment 32 with three contact grouping 35a-35c is shown. Each contact grouping includes a pair of differential signal contacts, 34a and 34b, 34d and 34e, 34g and 34h, and a ground reference contact 34c, 34f, 34i. A continuous ground plane 150 is disposed within
25 segment 32 and is in contact with each of the reference ground contacts, 34c, 34f, 34i. The ground plane 150 separates the differential signal contacts from each other and will have the effect of raising the differential impedance of each pair of differential signal contacts. Additionally, the ground plane 150 will further reduce cross talk between pairs of differential signal contacts by bleeding off remnant electromagnetic fields generated
30 by electron flow across the differential signal contacts.

As shown in FIG. 10, another interconnection devices 142 include a number of ground planes 152a-152h disposed within the segment 32. Each of the ground planes 152a-152h is configured to electrically connect with the reference ground (Vcc) of the

5 system. Similarly, as shown in FIG. 11, another interconnection device 144 includes a number of ground planes 154a-154d which are configured to electrically connect with the reference ground of the system. Like the continuous ground plane shown in FIG. 9, the multiple ground planes illustrated in FIGS. 10-11 will effect the differential impedance of the differential signal contacts as well as further reduce cross talk between pairs of
10 differential signal contacts.

The illustrations shown in FIGS. 1-11 show a twin-axial arrangement of differential pair contacts within a system using differential signaling. However, the technique for reducing cross-talk using a reference pin connected to ground in close proximity to one or more signal channels is not limited to systems using differential
15 signaling, but could be used in systems using other communication techniques. For example, in a system in which individual disparate electrical signals are transmitted (e.g., single ended or point-to-point signaling), a signal contact and reference contact may be arranged in a pseudo co-axial arrangement where a signal contact and a reference contact form a contact-grouping and do not physically share a common longitudinal axis (as
20 would a traditional co-axial transmission line), but electrically performs like a traditional co-axial transmission line. In a pseudo co-axial arrangement, the signal contact and reference contact are physically arranged such that the signal contact and the reference contact are substantially parallel to each other but do not share a common longitudinal axis. The reference contacts within the field of contacts will help to absorb
25 electromagnetic fields generated by the signal contacts and may reduce cross-talk between single-ended transmission lines.

The examples illustrated in FIGS. 1-11 show contact groupings consisting of three contacts, a first signal contact, second signal contact and reference contact. However, contact groupings in other embodiments may include more or less than three contacts.
30 For example, a contact grouping may include a first signal contact and second signal contact (forming differential transmission line), a third and fourth signal contact (forming second differential transmission line) and a reference contact. Additionally, in a system

5 which uses point-to-point or single-ended signaling, a contact grouping may include one or more signal contacts and a reference contact within the contact grouping.

In whatever transmission arrangement is used (e.g., differential or single-ended), the spatial orientation of the contacts within a contact grouping can be selected such that the contacts are electrically equivalent to traditional twin-axial or coaxial wire or cable
10 with respect to cross-sectional construction and electrical signal transmission capabilities. Additionally, the spatial relationship between adjacent contact groupings should be selected to approximate electrical isolation and preserve signal fidelity within a grouping via the reduction of electro-magnetic coupling.

The arrays of twin-axial contact grouping depicted in FIGS. 1-5 and FIGS. 7-11,
15 are intended to match the multi-layer circuit board routing processes in order to permit the interconnection device, 12, 14, to be mounted to contact pads of printed circuit board without the need for routing with multiple Z-axis escapes as the case with traditional “uniform grid” or “interstitial grid” connector footprints. Thus, the orientation of the contacts on plug 12 and socket 14 permit it to be mounted and interconnected with the
20 internal circuitry of a multi-layer circuit board using less layers within the circuit board than traditional connectors.

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention.

25 For example, the interconnection device does not need to be formed of multiple segments with shield members located between adjacent segments as illustrated in FIGS. 1-5 and 7-11. A single segment may be created around one or more shield members by forming (e.g., by injection molding) non-conductive resin or other material around one or more shield members. The frame may then be formed around the segment and the
30 shield(s) by forming (e.g., by injection molding) a conductive resin or other material around the perimeter of the segment.

5 Additionally, the shield member and frame do not need to be two separate pieces. The shield and frame may consist of a one-piece construction with the segment molded or inserted within the single-piece shield-frame member.

 In the illustration shown in FIG. 1, the plug and socket are releasably retained to each other by the mating array of pins and sockets and the mating of the plug and socket
10 frames. A clip, pin, screw, bolt, or other means may be used to further secure the plug and socket to each other.

 The interconnection device described herein may be used to connect any array of transmission lines in a digital or analog transmission system, such as an array of transmission lines on a printed circuit board (as illustrated in FIG. 1), an active or passive
15 device or a cable bundle.

 Accordingly, other embodiments are within the scope of the following claims.

52867-11

CLAIMS:

1. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising:

5 a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts;

10 a shield member formed of electrically conductive material and at least partially disposed within the segment and configured to electrically connect to the chassis ground circuit;

15 a plurality of electrically conductive signal contacts configured to transmit a digital or analog communication signal, each signal contact disposed within a hole on the upper surface of the segment forming an array of signal contacts, and wherein the shield member is at least partially disposed within the array of signal contacts; and

a frame formed of electrically conductive material at least partially surrounding the segment and in electrical contact with the shield member and configured to electrically connect to the chassis ground circuit.

20 2. The intercoupling component of claim 1, further comprising:

a plurality of electrically conductive reference contacts each disposed within a hole on the upper surface of the segment, wherein the electrically conductive reference contacts are configured to electrically connect to the electrical ground circuit of the system.

25 3. The intercoupling component of claim 2, wherein the plurality of electrically conductive reference contacts is disposed within the array of signal contacts.

52867-11

4. The intercoupling component of any one of claims 1 to 3, further comprising:

a ground plane disposed at least partially within the segment and within the array of signal contacts, and wherein the ground plane is configured to
5 electrically connect with the electrical ground circuit of the system.

5. The intercoupling component of claim 4, further comprising:

a plurality of ground planes disposed at least partially within the segment and within the array of signal contacts, and wherein the plurality of ground planes is configured to electrically connect with the electrical ground circuit
10 of the system.

6. The intercoupling component of claim 1, further comprising a plurality of shield members disposed within the segment and each in electrical contact with the frame.

7. The intercoupling component of any one of claims 1 to 5, wherein
15 the segment is molded at least partially around the shield member.

8. The intercoupling component of any one of claims 1 to 7, wherein the segment further includes at least one cavity disposed on the segment and within the array of signal contacts.

9. The intercoupling component of any one of claims 1 to 8, further
20 comprising a retention member configured to releasably retain the array of contacts with the plurality of signal contact and reference contacts.

10. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising:

25 a plurality of segments formed of electrically insulative material, spaces between adjacent segments defining at least one gap, each segment having an upper and lower surface and including a plurality of holes disposed on

52867-11

its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts;

a shield member formed of electrically conductive material disposed within at least one gap between adjacent segments and configured to electrically
5 connect with the chassis ground circuit of the system;

a plurality of shield members formed of electrically conductive material disposed within a plurality of gaps between adjacent segments configured to electrically connect with the chassis ground circuit of the system; and

a frame formed of electrically conductive material surrounding the
10 plurality of segments and in electrical contact with the plurality of shield members.

11. The intercoupling component of claim 10, further comprising:

a plurality of electrically conductive contacts each disposed within a hole on the upper surface of the segment and configured to releasably retain the array of contacts.

15 12. The intercoupling component of claim 11, wherein at least one of the plurality of electrically conductive contacts is configured to electrically connect with the electrical ground of the system.

13. The intercoupling component of claim 11, further comprising:

a ground plane disposed at least partially within the segment,
20 wherein the ground plane is configured to electrically connect with the reference ground circuit of the system.

14. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising:

25 a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its

52867-11

upper surface and arranged in a predetermined footprint corresponding to the array of a contacts;

a plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment, wherein the plurality of contacts
5 are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising:

a first electrically conductive contact; and

a reference contact located at a distance D from the first electrically conductive contact and configured to electrically connect to the electrical ground
10 circuit of the system,

wherein the first electrically conductive contact and the reference contact form a transmission line electrically equivalent to a co-axial transmission line.

15. The intercoupling component of claim 14, wherein each multi-contact
15 grouping is located a distance of $\geq D$ from adjacent multi-contact groupings.

16. The intercoupling component of claim 14, further comprising:

a shield member formed of electrically conductive material disposed within the segment and configured to electrically connect with the chassis ground circuit of the system.

20 17. The intercoupling component of claim 16, further comprising:

a frame formed of electrically conductive material surrounding the segment and in electrical contact with the shield member and configured to electrically connect with the chassis ground circuit of the system.

18. The intercoupling component of claim 14, further comprising:

25 a plurality of segments formed of electrically insulative material, spaces between adjacent segments defining at least one gap, each segment

52867-11

having an upper and lower surface and including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; and

5 a shield member formed of electrically conductive material disposed within at least one gap between adjacent segments and is in electrical contact with the electrical ground of the system.

19. The intercoupling component of claim 18, further comprising:

10 a frame formed of electrically conductive material surrounding the plurality of segments and in electrical contact with the plurality of shield members and configured to electrically connect with the chassis ground circuit of the system.

20. The intercoupling component of claim 14, further comprising:

15 a ground plane disposed at least partially within the segment, wherein the ground plane is configured to electrically connect with the reference ground circuit of the system.

21. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising:

20 a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; and

25 a plurality of electrically conductive contacts each disposed within each hole on the upper surface of the segment, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising:

a first electrically conductive contact; and

52867-11

a reference contact located at a distance D from the first electrically conductive contact and configured to electrically connect to the electrical ground circuit of the system, and wherein the first electrically conductive contact is configured to transmit single-ended signals.

5 22. The intercoupling component of claim 21, wherein each multi-contact grouping is located a distance of $\geq D$ from adjacent multi-contact groupings.

23. The intercoupling component of claim 21, further comprising:

a shield member formed of electrically conductive material disposed within the segment and configured to electrically connect with the chassis ground
10 circuit of the system.

24. The intercoupling component of claim 23, further comprising:

a framed formed of electrically conductive material surrounding the segment and in electrical contact with the shield member and configured to electrically connect with the chassis ground circuit of the system.

15 25. The intercoupling component of claim 21, further comprising:

a plurality of segments formed of electrically insulative material, spaces between adjacent segments defining at least one gap, each segment having an upper and lower surface and including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the
20 array of a contacts; and

a shield member formed of electrically conductive material disposed within at least one gap between adjacent segments and is in electrical contact with the electrical ground of the system.

26. The intercoupling component of claim 25, further comprising:

25 a frame formed of electrically conductive material surrounding the plurality of segments and in electrical contact with the plurality of shield members

52867-11

and configured to electrically connect with the chassis ground circuit of the system.

27. The intercoupling component of claim 21, further comprising:

a ground plane disposed at least partially within the segment,
5 wherein the ground plane is configured to electrically connect with the reference ground circuit of the system.

28. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the intercoupling component comprising:

10 a segment formed of electrically insulative material and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; and

a plurality of electrically conductive contacts each disposed within
15 each hole on the upper surface of the segment, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, at least one multi-contact grouping comprising:

a first electrically conductive contact;

a second electrically conductive contact member located at a
20 distance D from the first electrically conductive contact; and

a reference contact located at a distance D2 from the first electrically conductive contact and configured to electrically connect to the electrical ground circuit of the system.

29. The intercoupling component of claim 28, wherein the first and
25 second electrically conductive contacts form a transmission line electrically equivalent to a twin-axial differential transmission line.

52867-11

30. The intercoupling component of claim 28, wherein each multi-contact grouping is located a distance $\geq D2$ from adjacent multi-contact groupings.

31. The intercoupling component of claim 30, wherein $D > D2$.

32. The intercoupling component of claim 30, wherein $D=D2$.

5 33. The intercoupling component of claim 28, wherein the first and second electrically conductive contacts within each multi-contact grouping are configured to transmit disparate single-ended signals.

34. The intercoupling component of claim 28, wherein the first and second electrically conductive contacts have substantially the same cross-section.

10 35. The intercoupling component of claim 28, wherein the first, second and reference electrically conductive contacts have substantially the same cross-section.

36. The intercoupling component of claim 28, wherein the first and second electrically conductive contacts have substantially the same initial
15 characteristic impedance.

37. The intercoupling component of claim 28, wherein the first and second electrically conductive contacts within each multi-contact grouping are configured to transmit low voltage differential signals.

38. The intercoupling component of claim 37, wherein the differential
20 impedance of the first and second electrically conductive contacts within each multi-contact grouping is approximately 100 ohms.

39. The intercoupling component of claim 30, further comprising:

a shield member formed of electrically conductive material disposed within the segment and configured to electrically connect with the chassis ground
25 circuit of the system.

40. The intercoupling component of claim 39, further comprising:

52867-11

a frame formed of electrically conductive material surrounding the segment and in electrical contact with the shield member and configured to electrically connect with the chassis ground circuit of the system.

41. The intercoupling component of claim 30, further comprising:

5 a plurality of segments formed of electrically insulative material, spaces between adjacent segments defining at least one gap, each segment having an upper and lower surface and including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts; and

10 a shield member formed of electrically conductive material disposed within at least one gap between adjacent segments and is in electrical contact with the electrical ground of the system.

42. The intercoupling component of claim 41, further comprising:

15 a frame formed of electrically conductive material surrounding the plurality of segments and in electrical contact with the plurality of shield members and configured to electrically connect with the chassis ground circuit of the system.

43. The intercoupling component of claim 30, further comprising:

20 a ground plane disposed at least partially within the segment, wherein the ground plane is configured to electrically connect with the reference ground circuit of the system.

44. The intercoupling component of claim 30, wherein a plurality of cavities is disposed within the segment, each cavity located between the first and second contact.

25 45. The intercoupling component of claim 44, wherein each cavity is filled with air.

52867-11

46. A circuit card for use in a digital or analog transmission system having an electrical ground circuit and a chassis ground circuit, the circuit card comprising:

5 a printed circuit board having a plurality of contact pads arranged in a predetermined footprint; and

an interconnection device comprising:

10 a segment having an upper and lower surface, the segment having a plurality of holes extending through the upper and lower surfaces and arranged in a predetermined footprint to match the predetermined footprint of the plurality of surface mount pads;

a plurality of electrically conductive contact member disposed within each of the holes and electrically connected to their respective surface mount pad;

a shield member formed of electrically conductive material disposed within the segment; and

15 a frame formed of electrically conductive material surrounding the segment, the frame electrically connected to the shield member and to the chassis ground circuit of the system.

47. The circuit card of claim 46, wherein the plurality of contacts are arranged in a plurality of multi-contact groupings, each multi-contact grouping comprising:

a first electrically conductive contact; and

a reference contact located at a distance D from the first electrically conductive contact and connected to the electrical ground circuit of the system.

48. The circuit card of claim 47, wherein the multi-contact grouping further comprises:

52867-11

a second electrically conductive contact located a distance D2 from the first electrically conductive contact.

49. The circuit card of claim 47, wherein the interconnection device further comprises:

5 a ground plane disposed at least partially within the segment, wherein the ground plane is configured to electrically connect with the reference ground circuit of the system.

50. The circuit card of claim 48, wherein the first and second electrically conductive contacts form a transmission line electrically equivalent to a twin-axial
10 differential transmission line.

51. An intercoupling component for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit, the intercoupling component comprising:

a segment formed of a material having a dielectric constant ϵ_{r1} , and
15 having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface and arranged in a predetermined footprint corresponding to the array of a contacts;

a first signal contact disposed within a first hole on the segment;

a second signal contact disposed within a second hole on the
20 segment adjacent to the first hole in which the first signal contact is disposed, and wherein a cavity is formed in the segment between the first and second hole; and

an insert formed of a material having a dielectric constant of ϵ_{r2} , the insert disposed within the cavity.

52. The intercoupling component of claim 51, wherein $\epsilon_{r1} > \epsilon_{r2}$.

25 53. The intercoupling component of claim 51, wherein $\epsilon_{r1} < \epsilon_{r2}$.

52867-11

54. A method for adjusting the differential impedance of a pair of differential transmission lines in an interconnection device for receiving an array of contacts within a digital or analog transmission system having an electrical ground circuit, the intercoupling component comprising, the method comprising:

5 providing a segment formed of a material having a dielectric constant ϵ_{r1} and having an upper and lower surface, the segment including a plurality of holes disposed on its upper surface;

providing a plurality of pairs of signal contacts, each pair disposed with two adjacent holes on the segment and configured to transmit differential
10 signals, the plurality of pairs of signal contacts forming an array of pairs of signal contacts disposed in the segment;

spacing the pairs of signal contacts such that they create a certain differential impedance between the two contacts in each pair of signal contacts;
and

15 providing a plurality of cavities disposed in the segment between the two signal contacts in each pair of signal contacts to adjust the differential impedance of the two signal contacts in each pair of signal contacts.

55. The method of claim 54, further comprising:

inserting a material having a dielectric constant of ϵ_{r2} in each of the
20 plurality of cavities in the segment.

56. The method of claim 54, further comprising:


providing a plurality of ground contacts disposed within a plurality of holes on the segment and within the array of pairs of signal contacts, the plurality of ground contacts electrically connected to the electrical ground circuit of the
25 system.

57. The method of claim 54, further comprising:



52867-11

providing a ground plane disposed within the segment and within the array of pairs of signal contacts, the ground plane configured to electrically connect with the electrical ground of the system.




FIG. 1

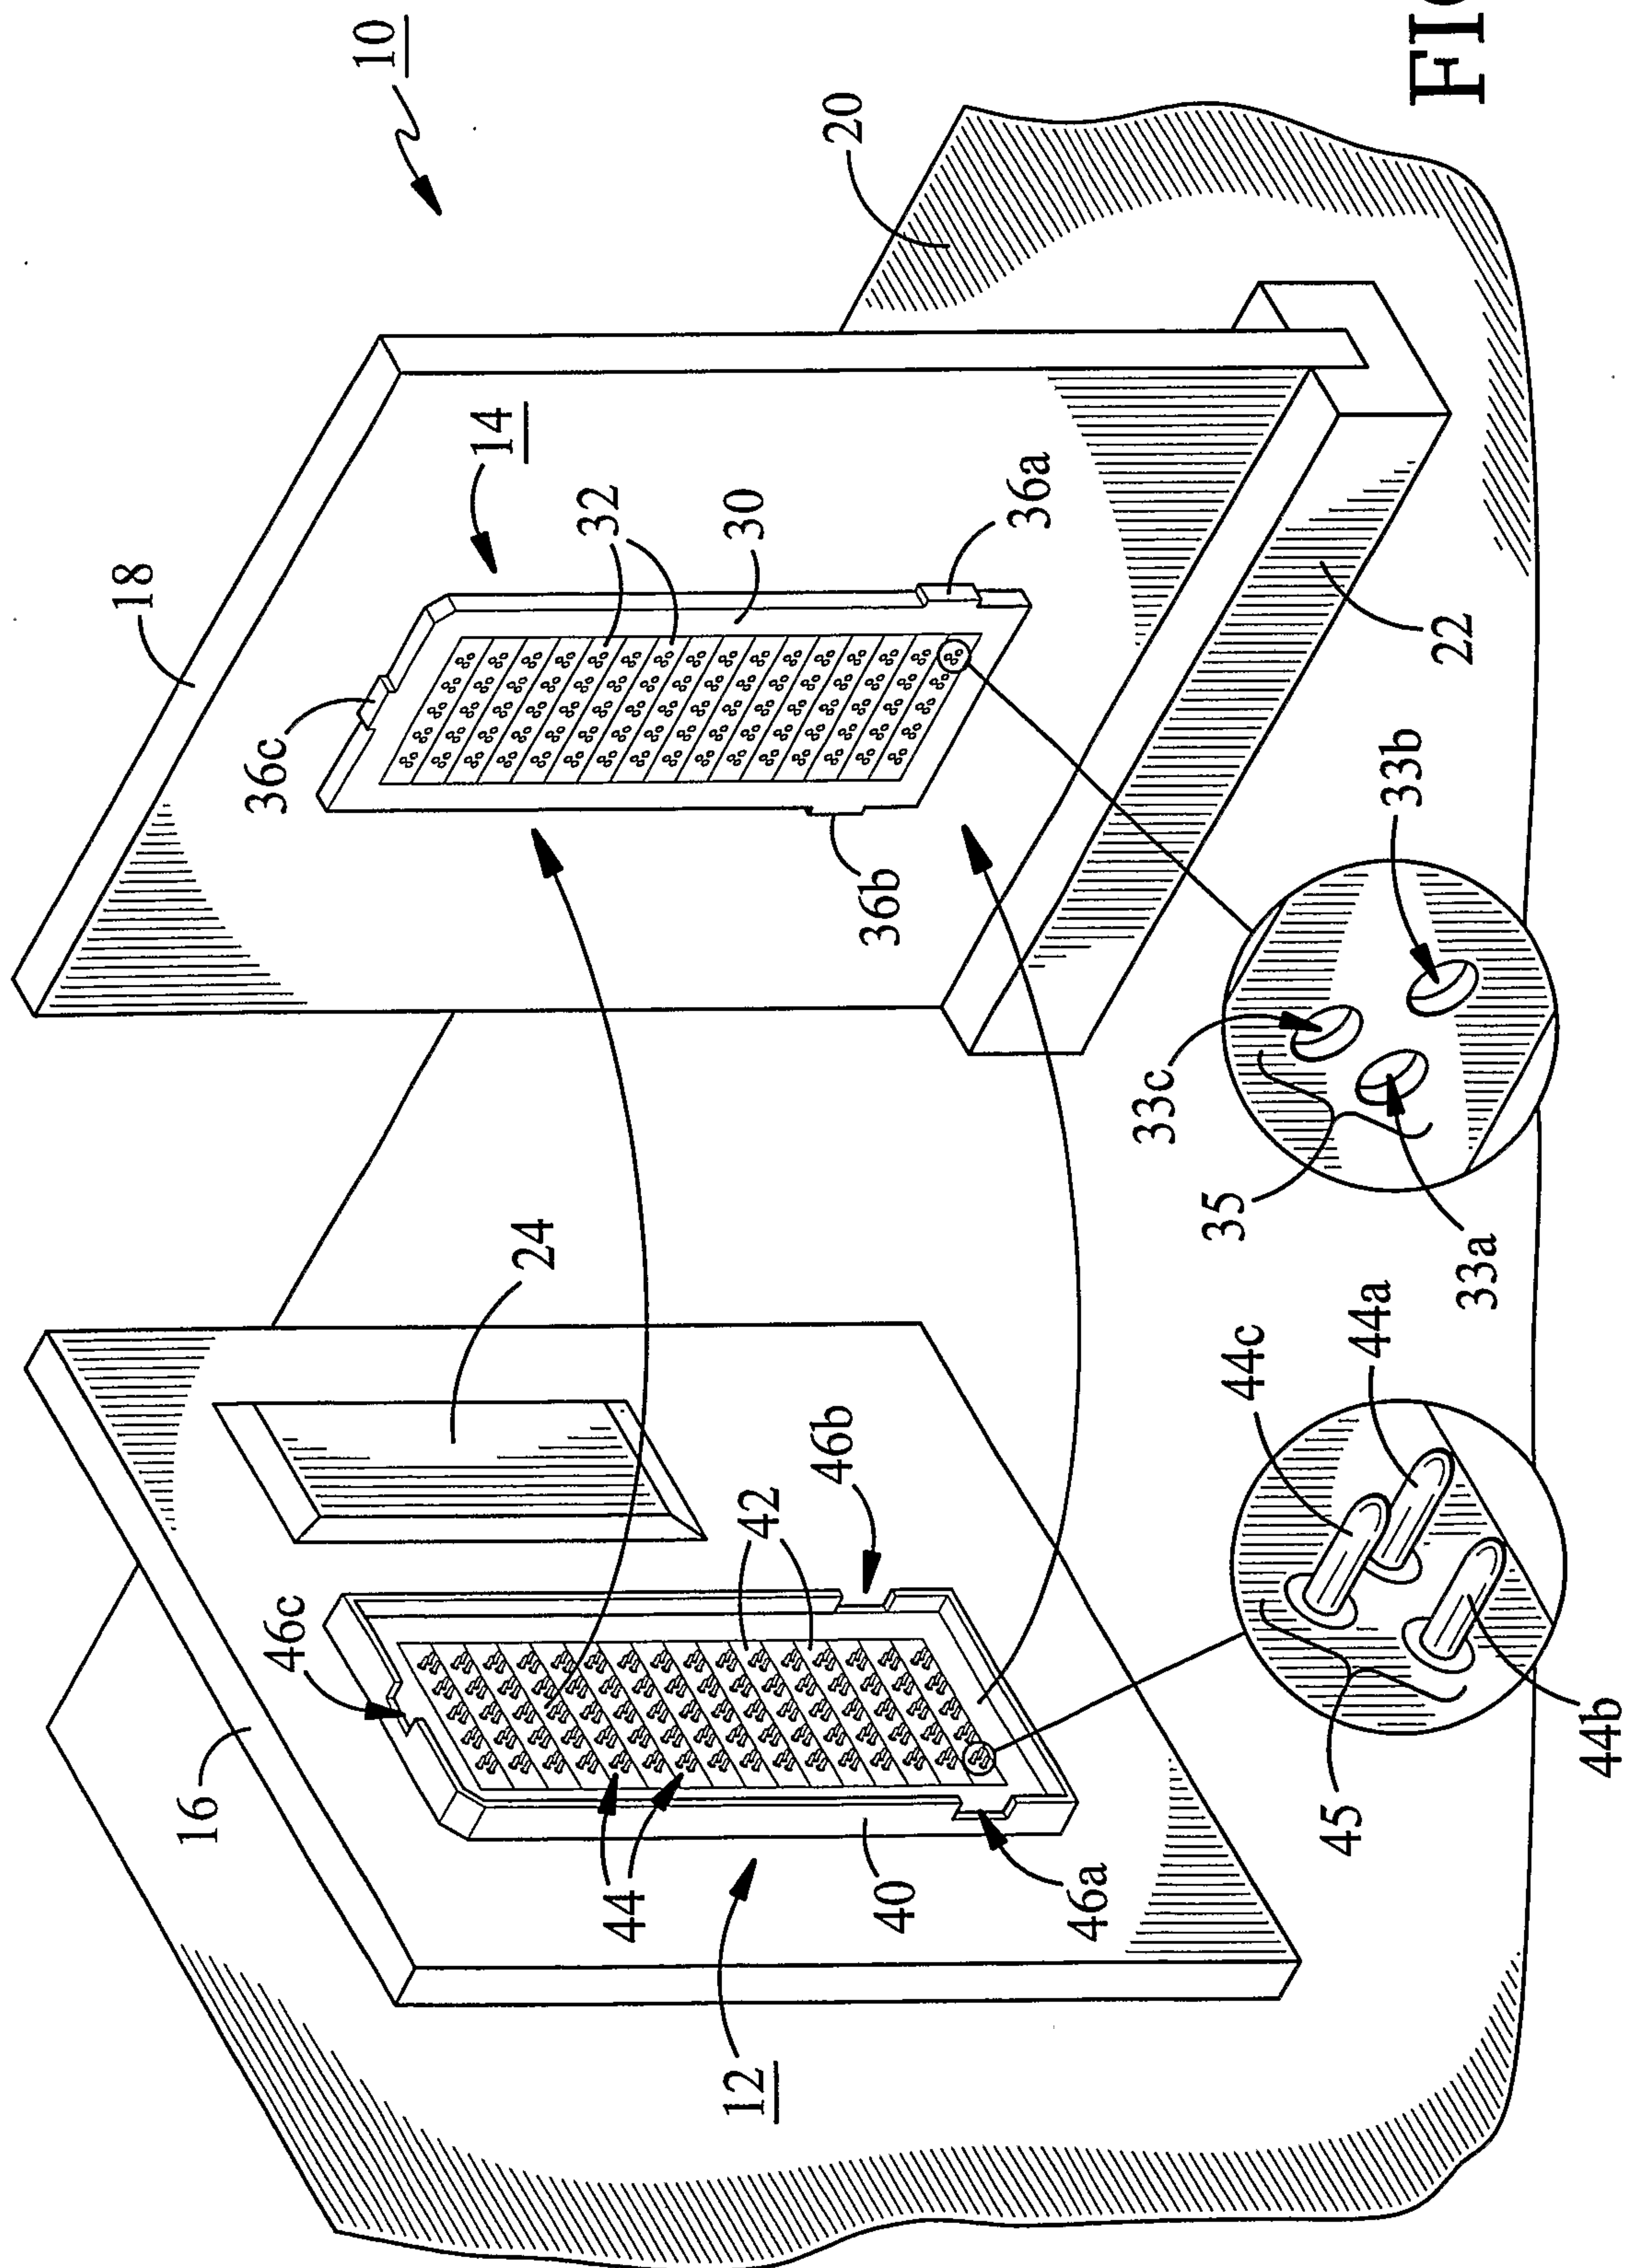

2/11

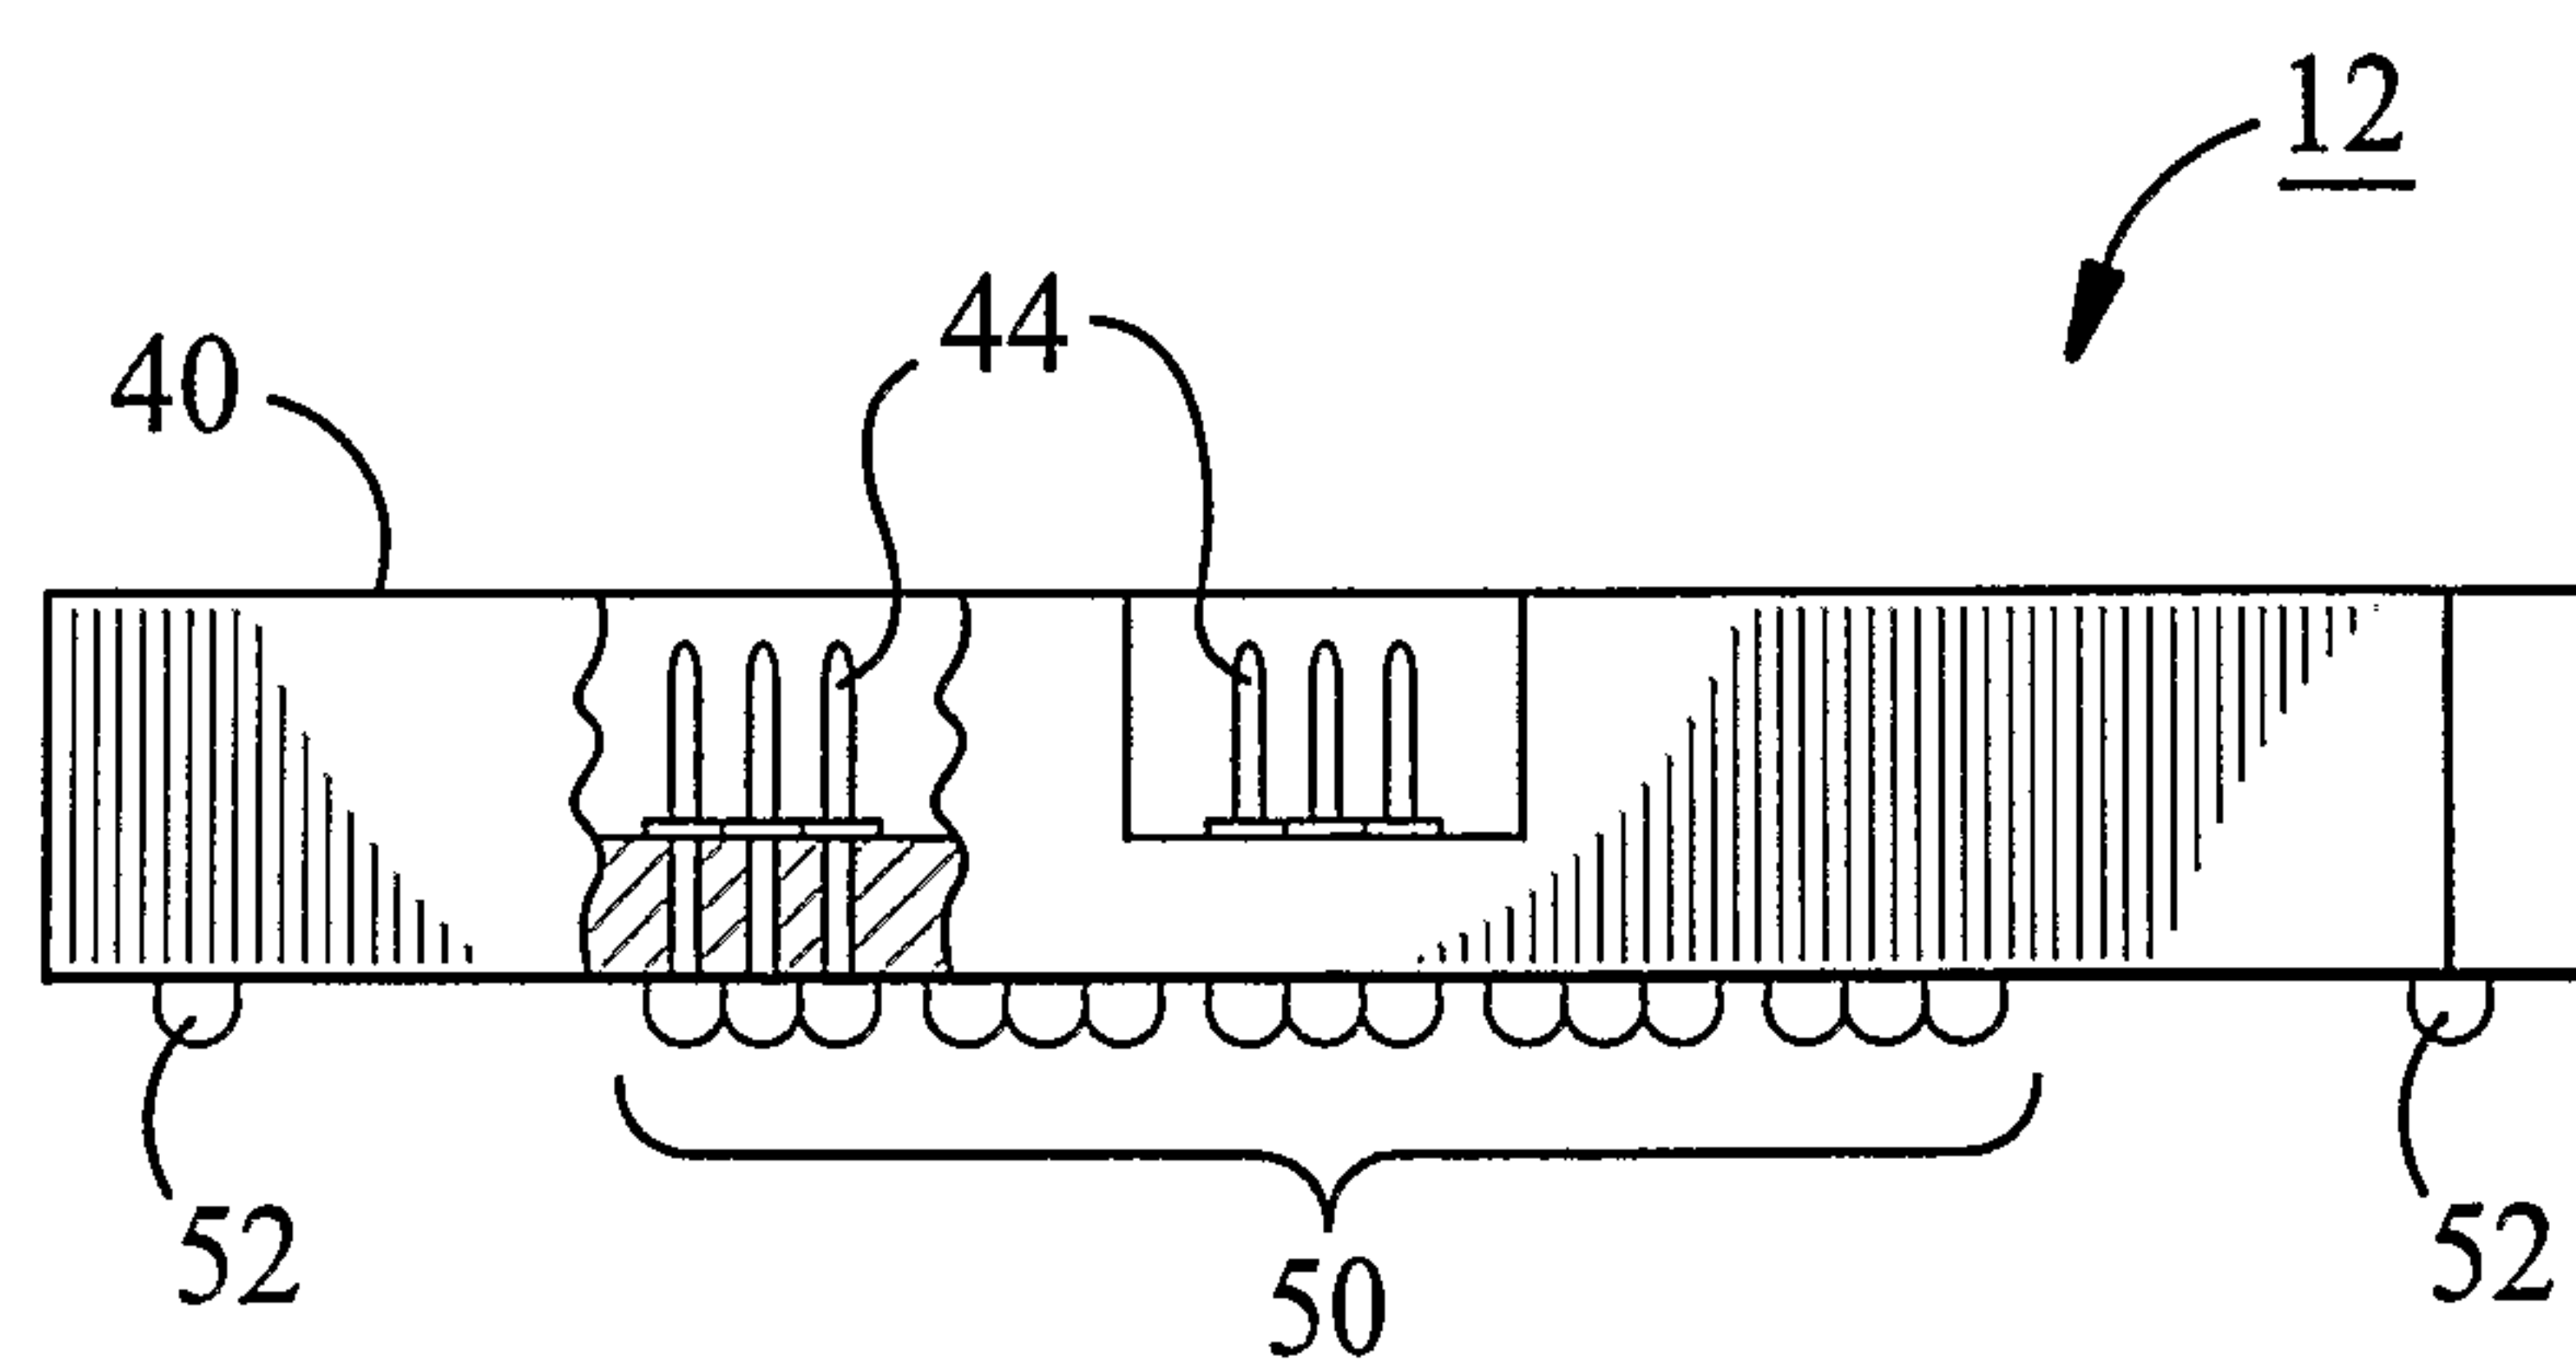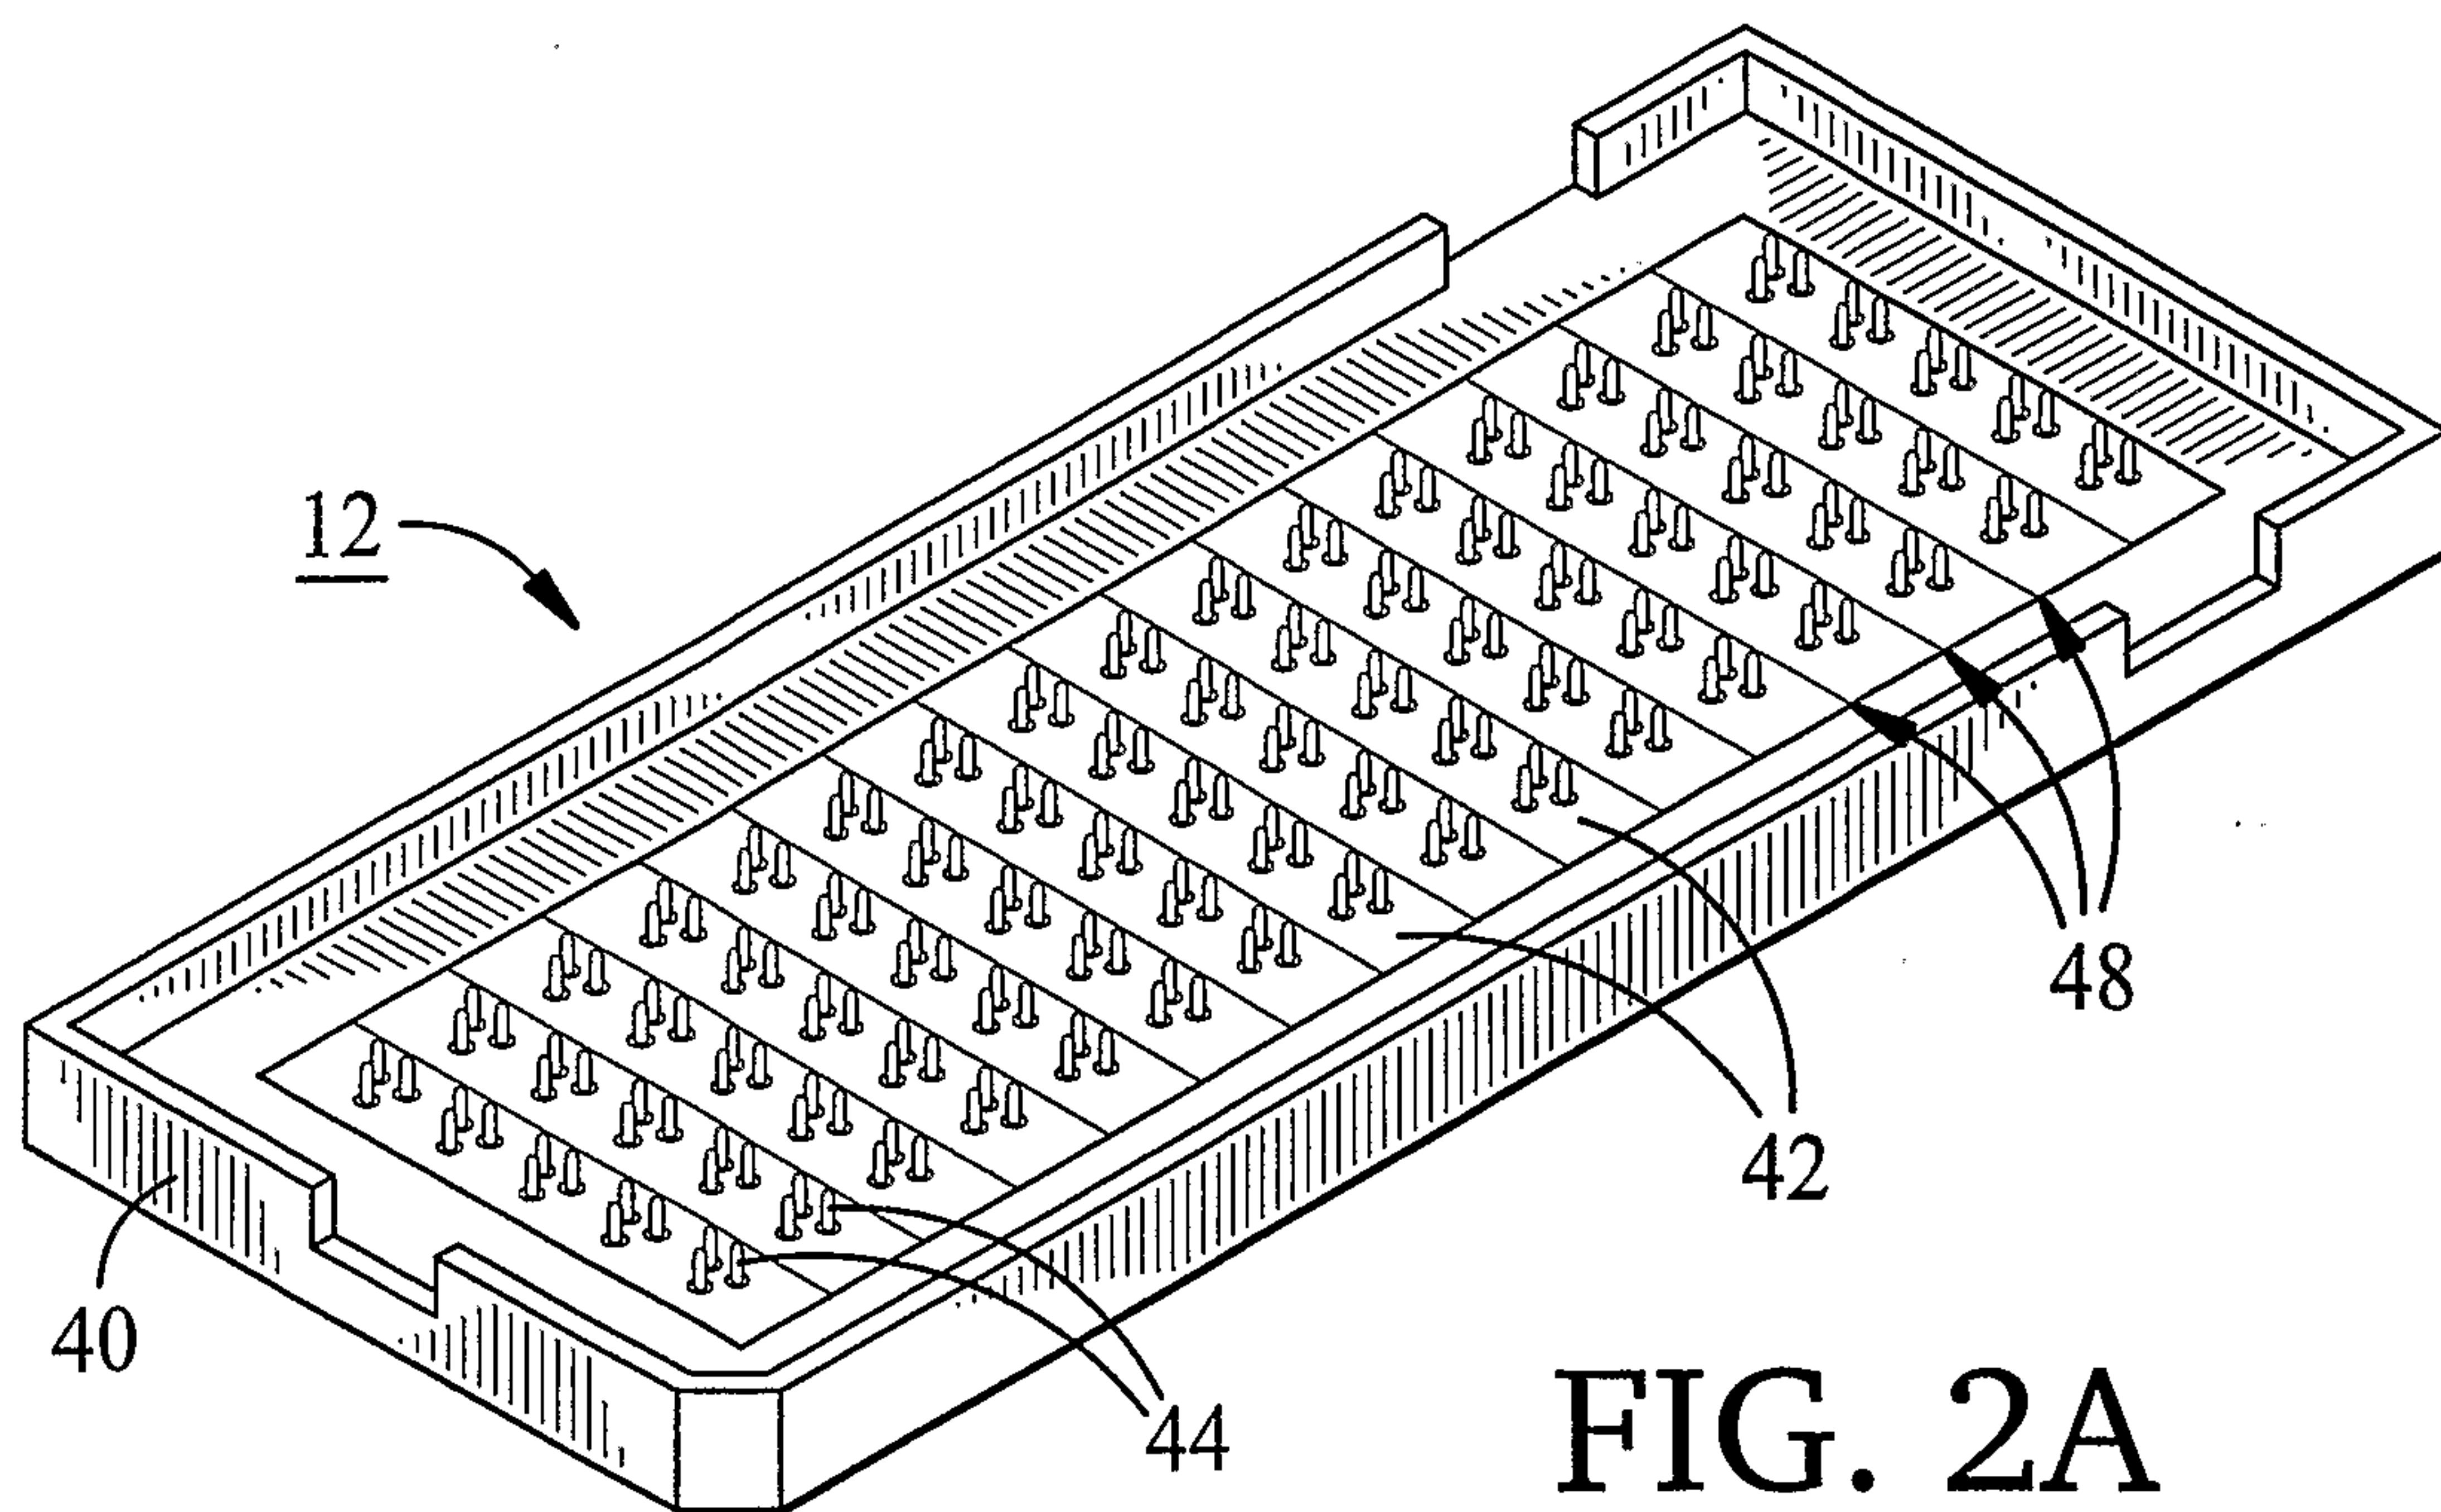

3/11

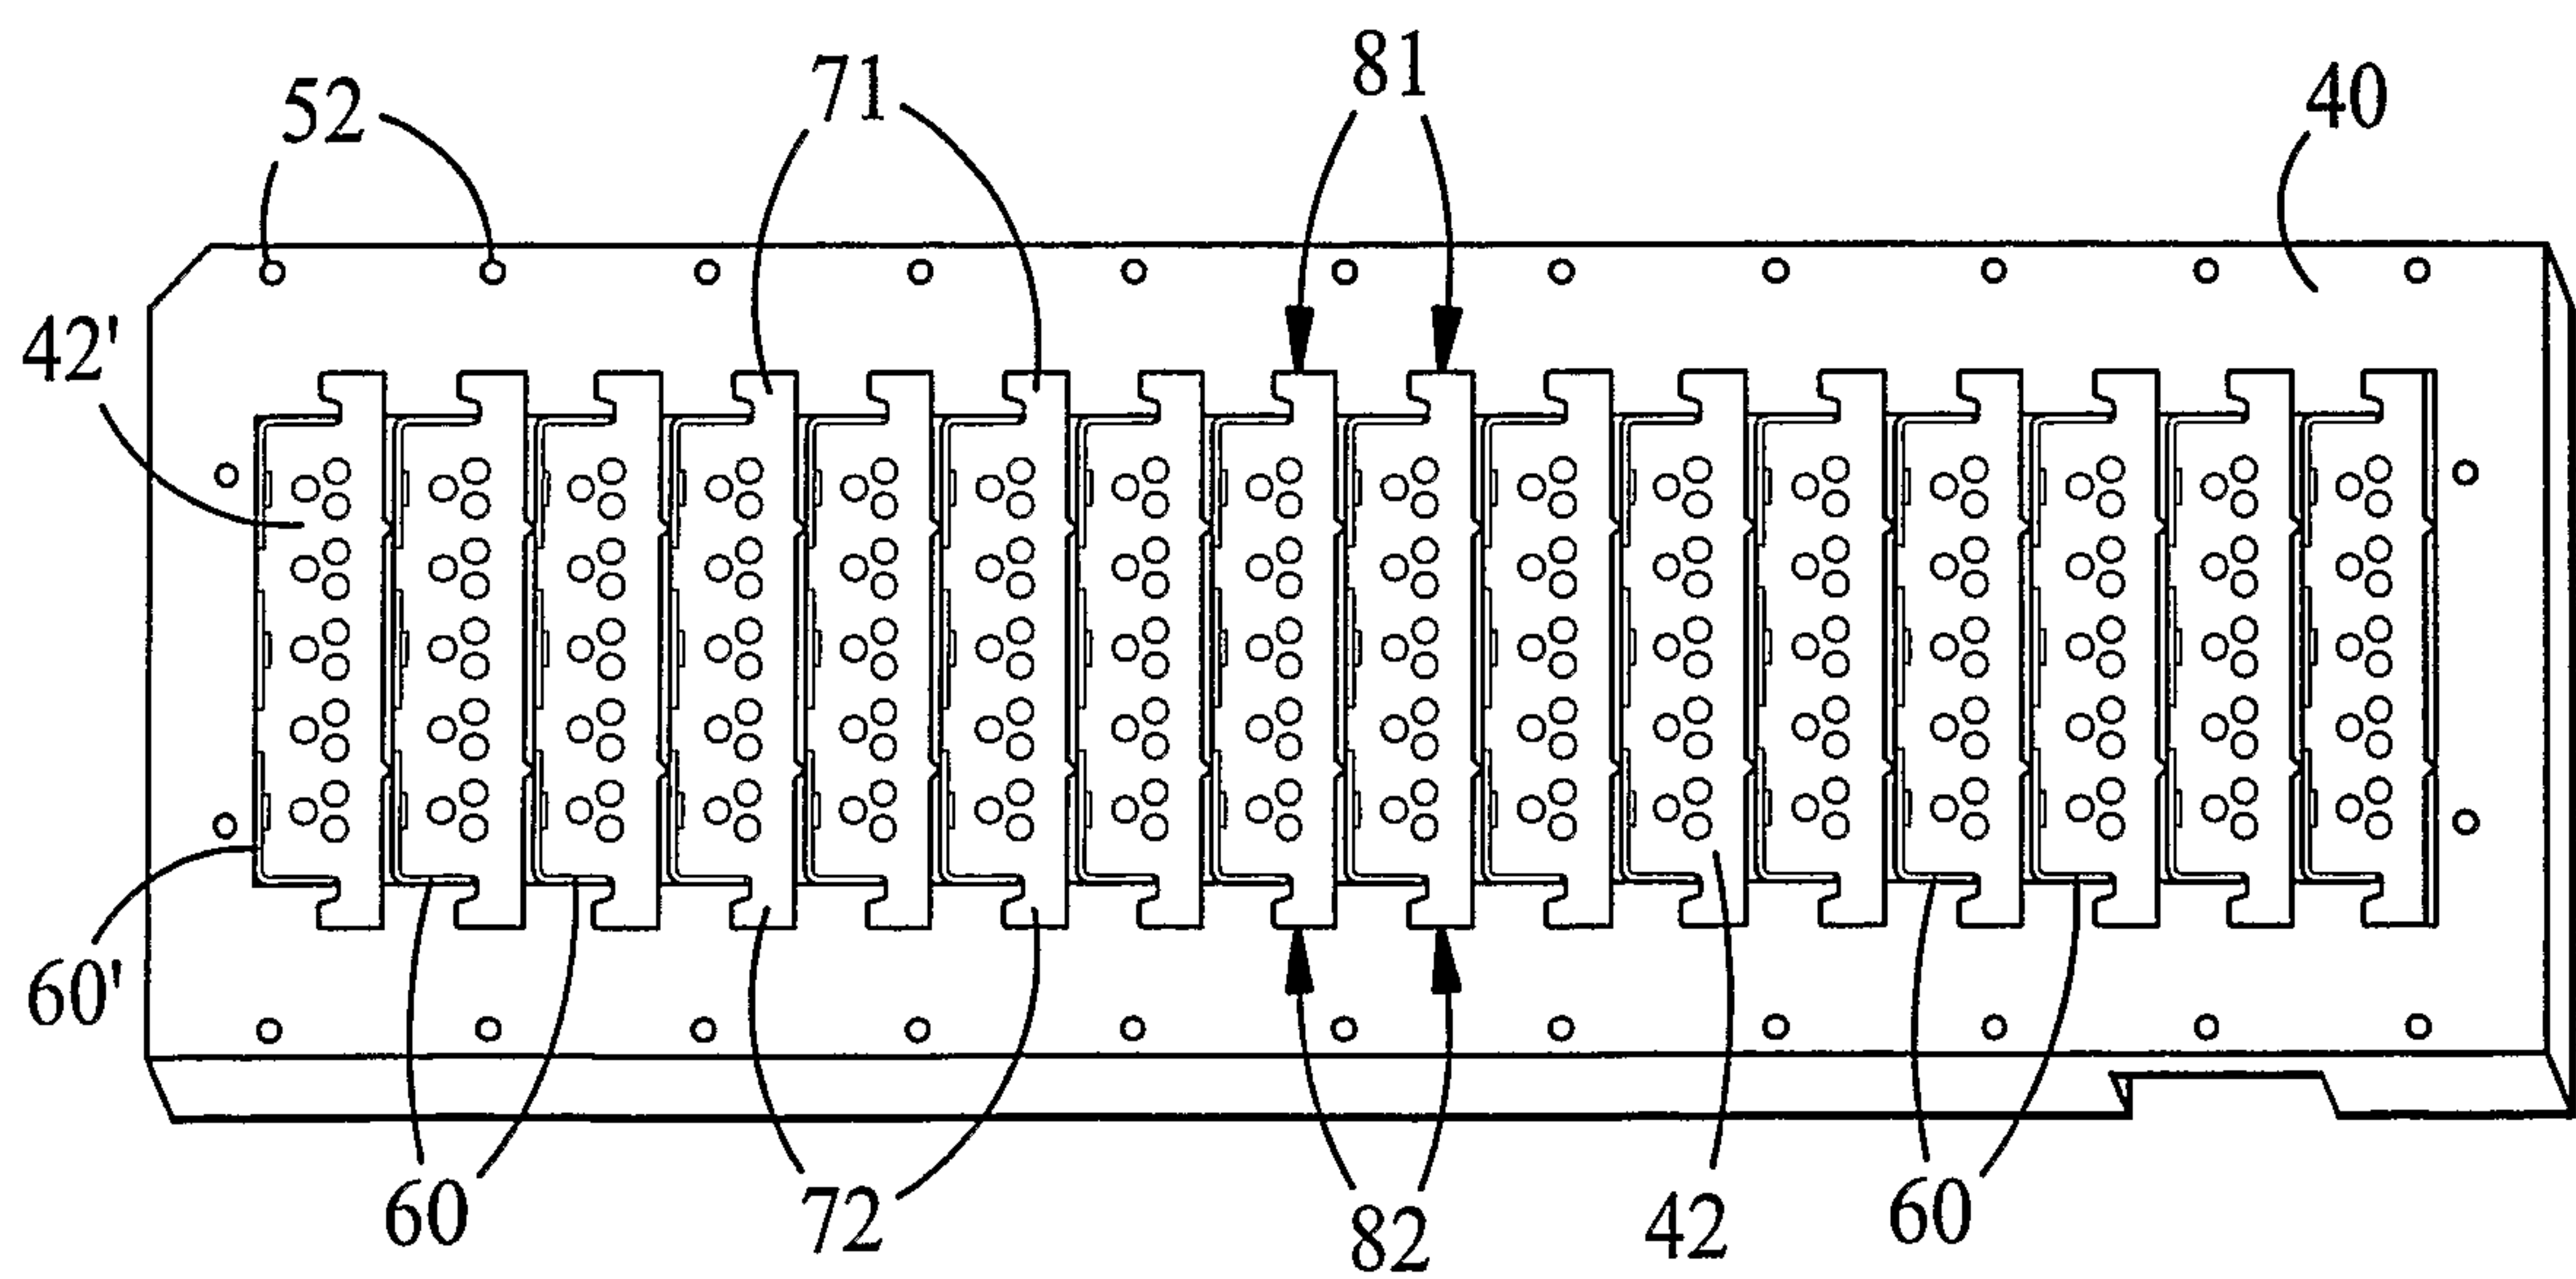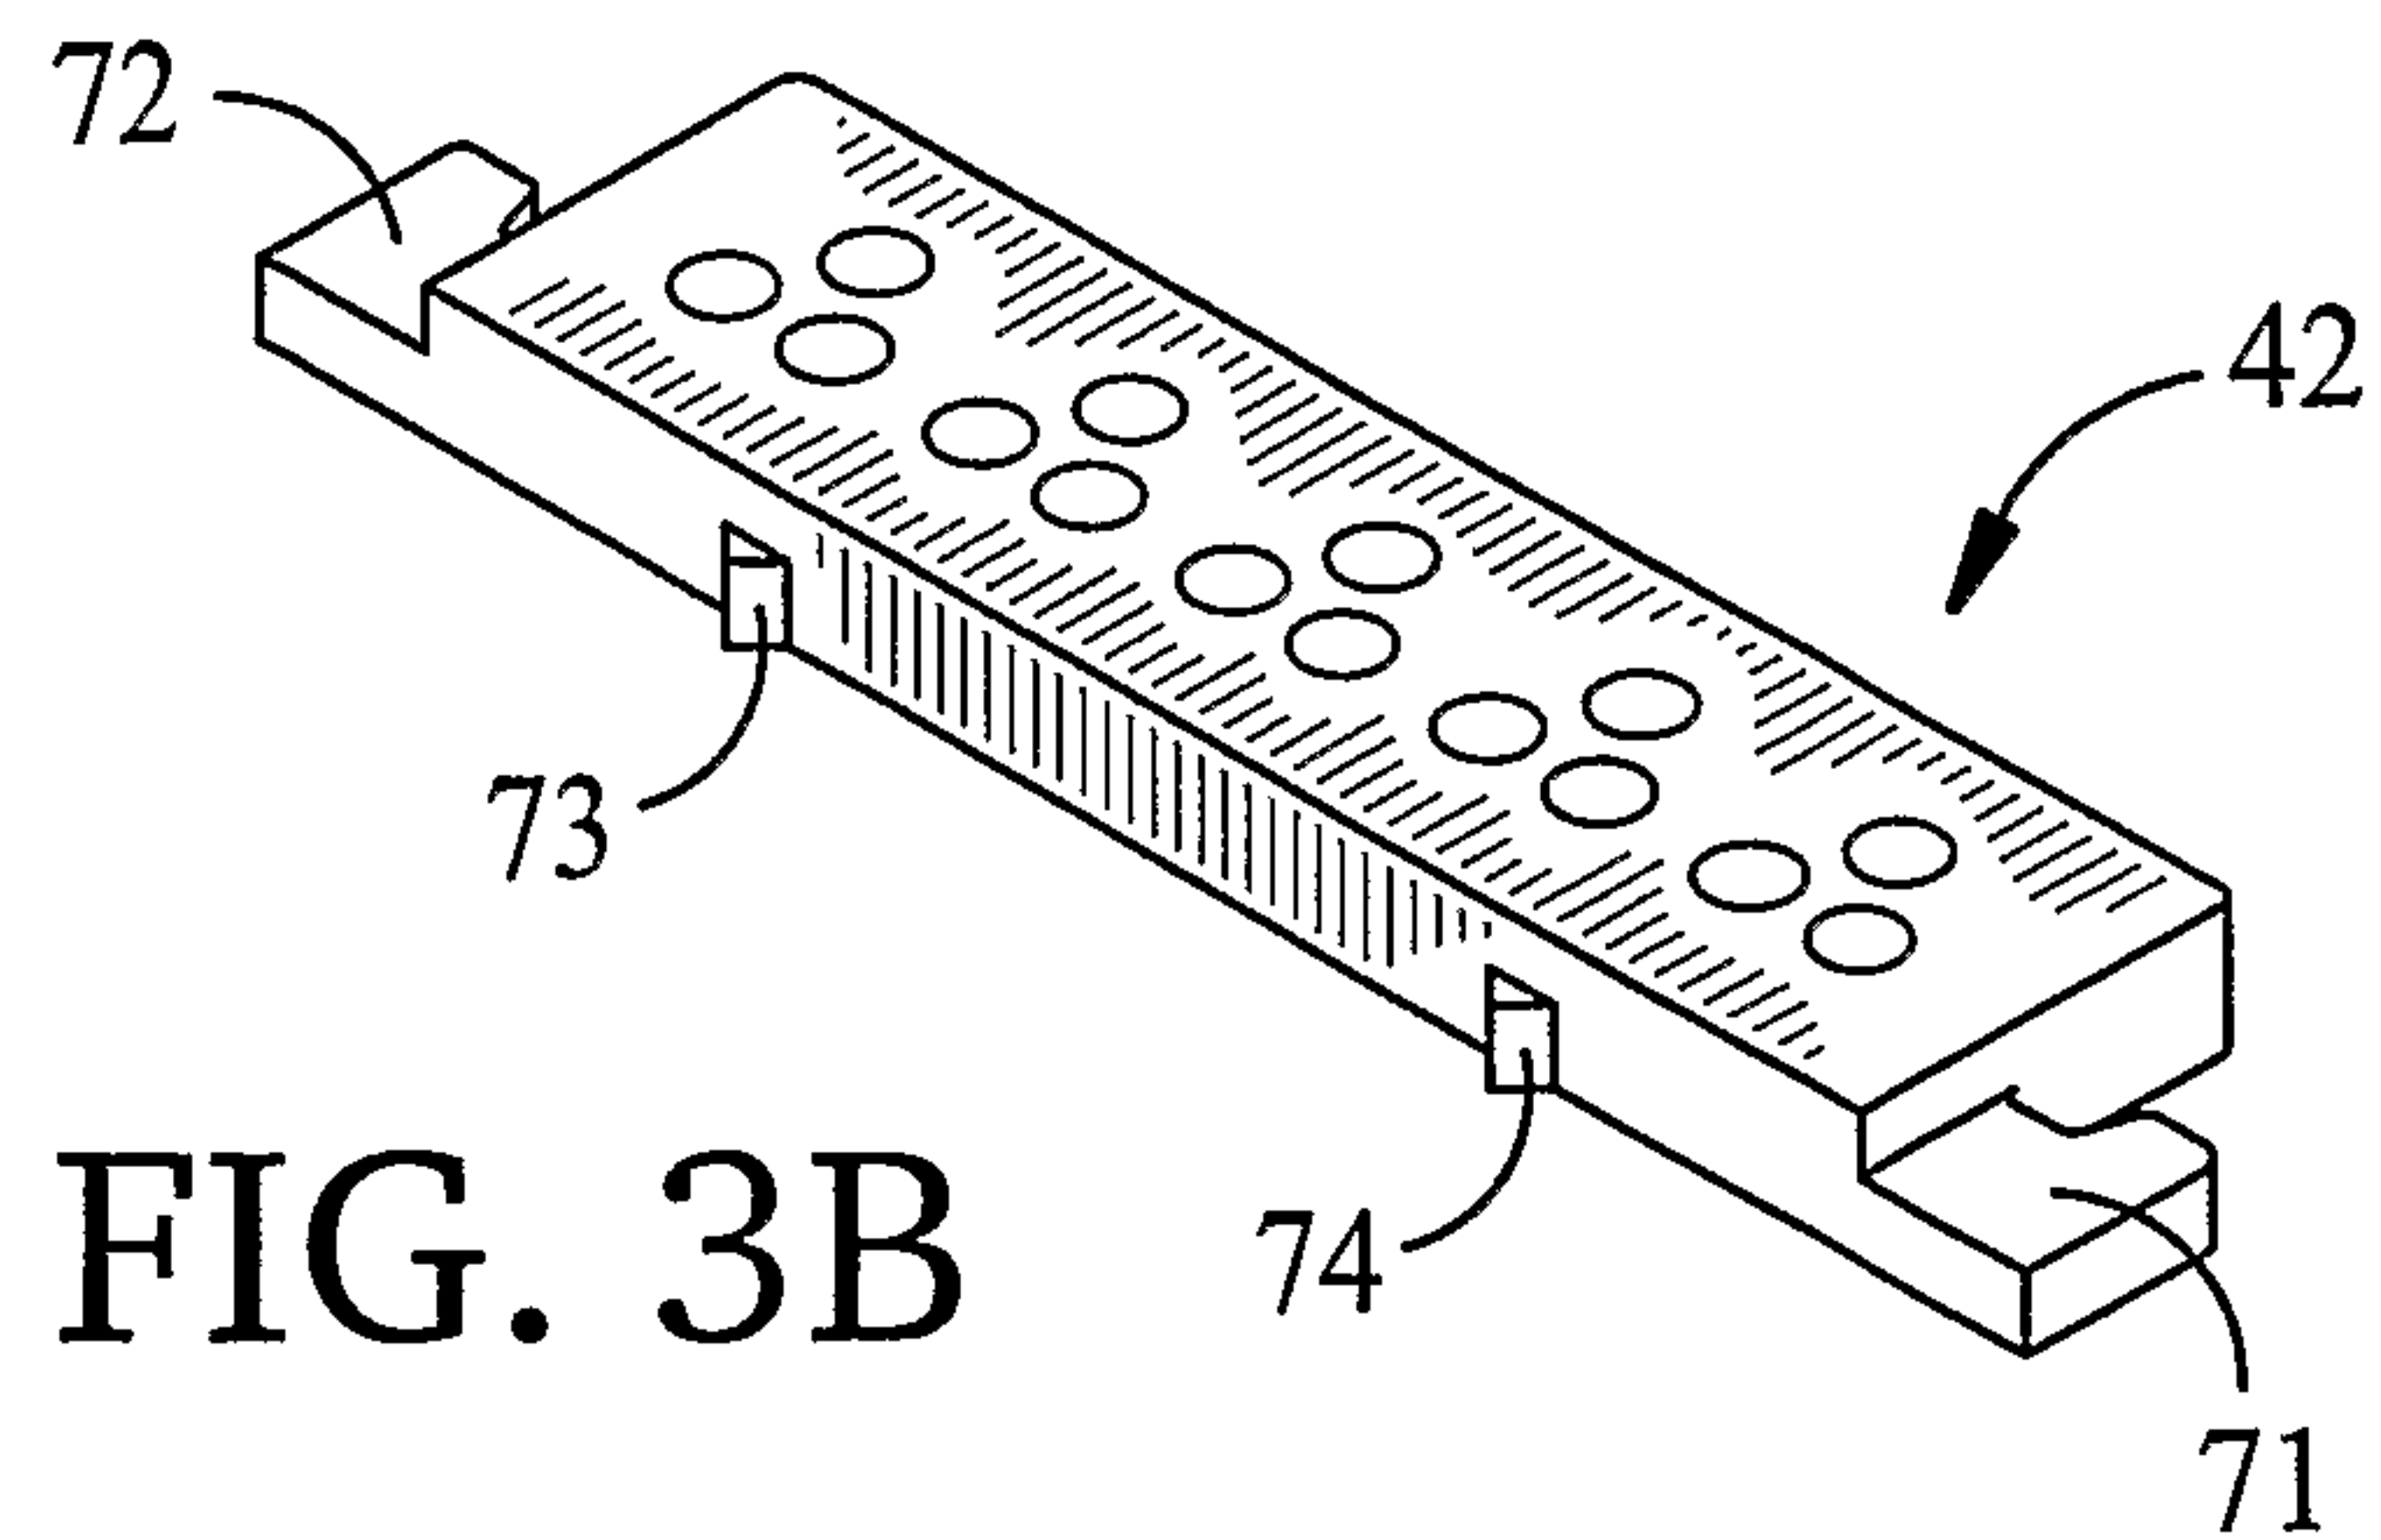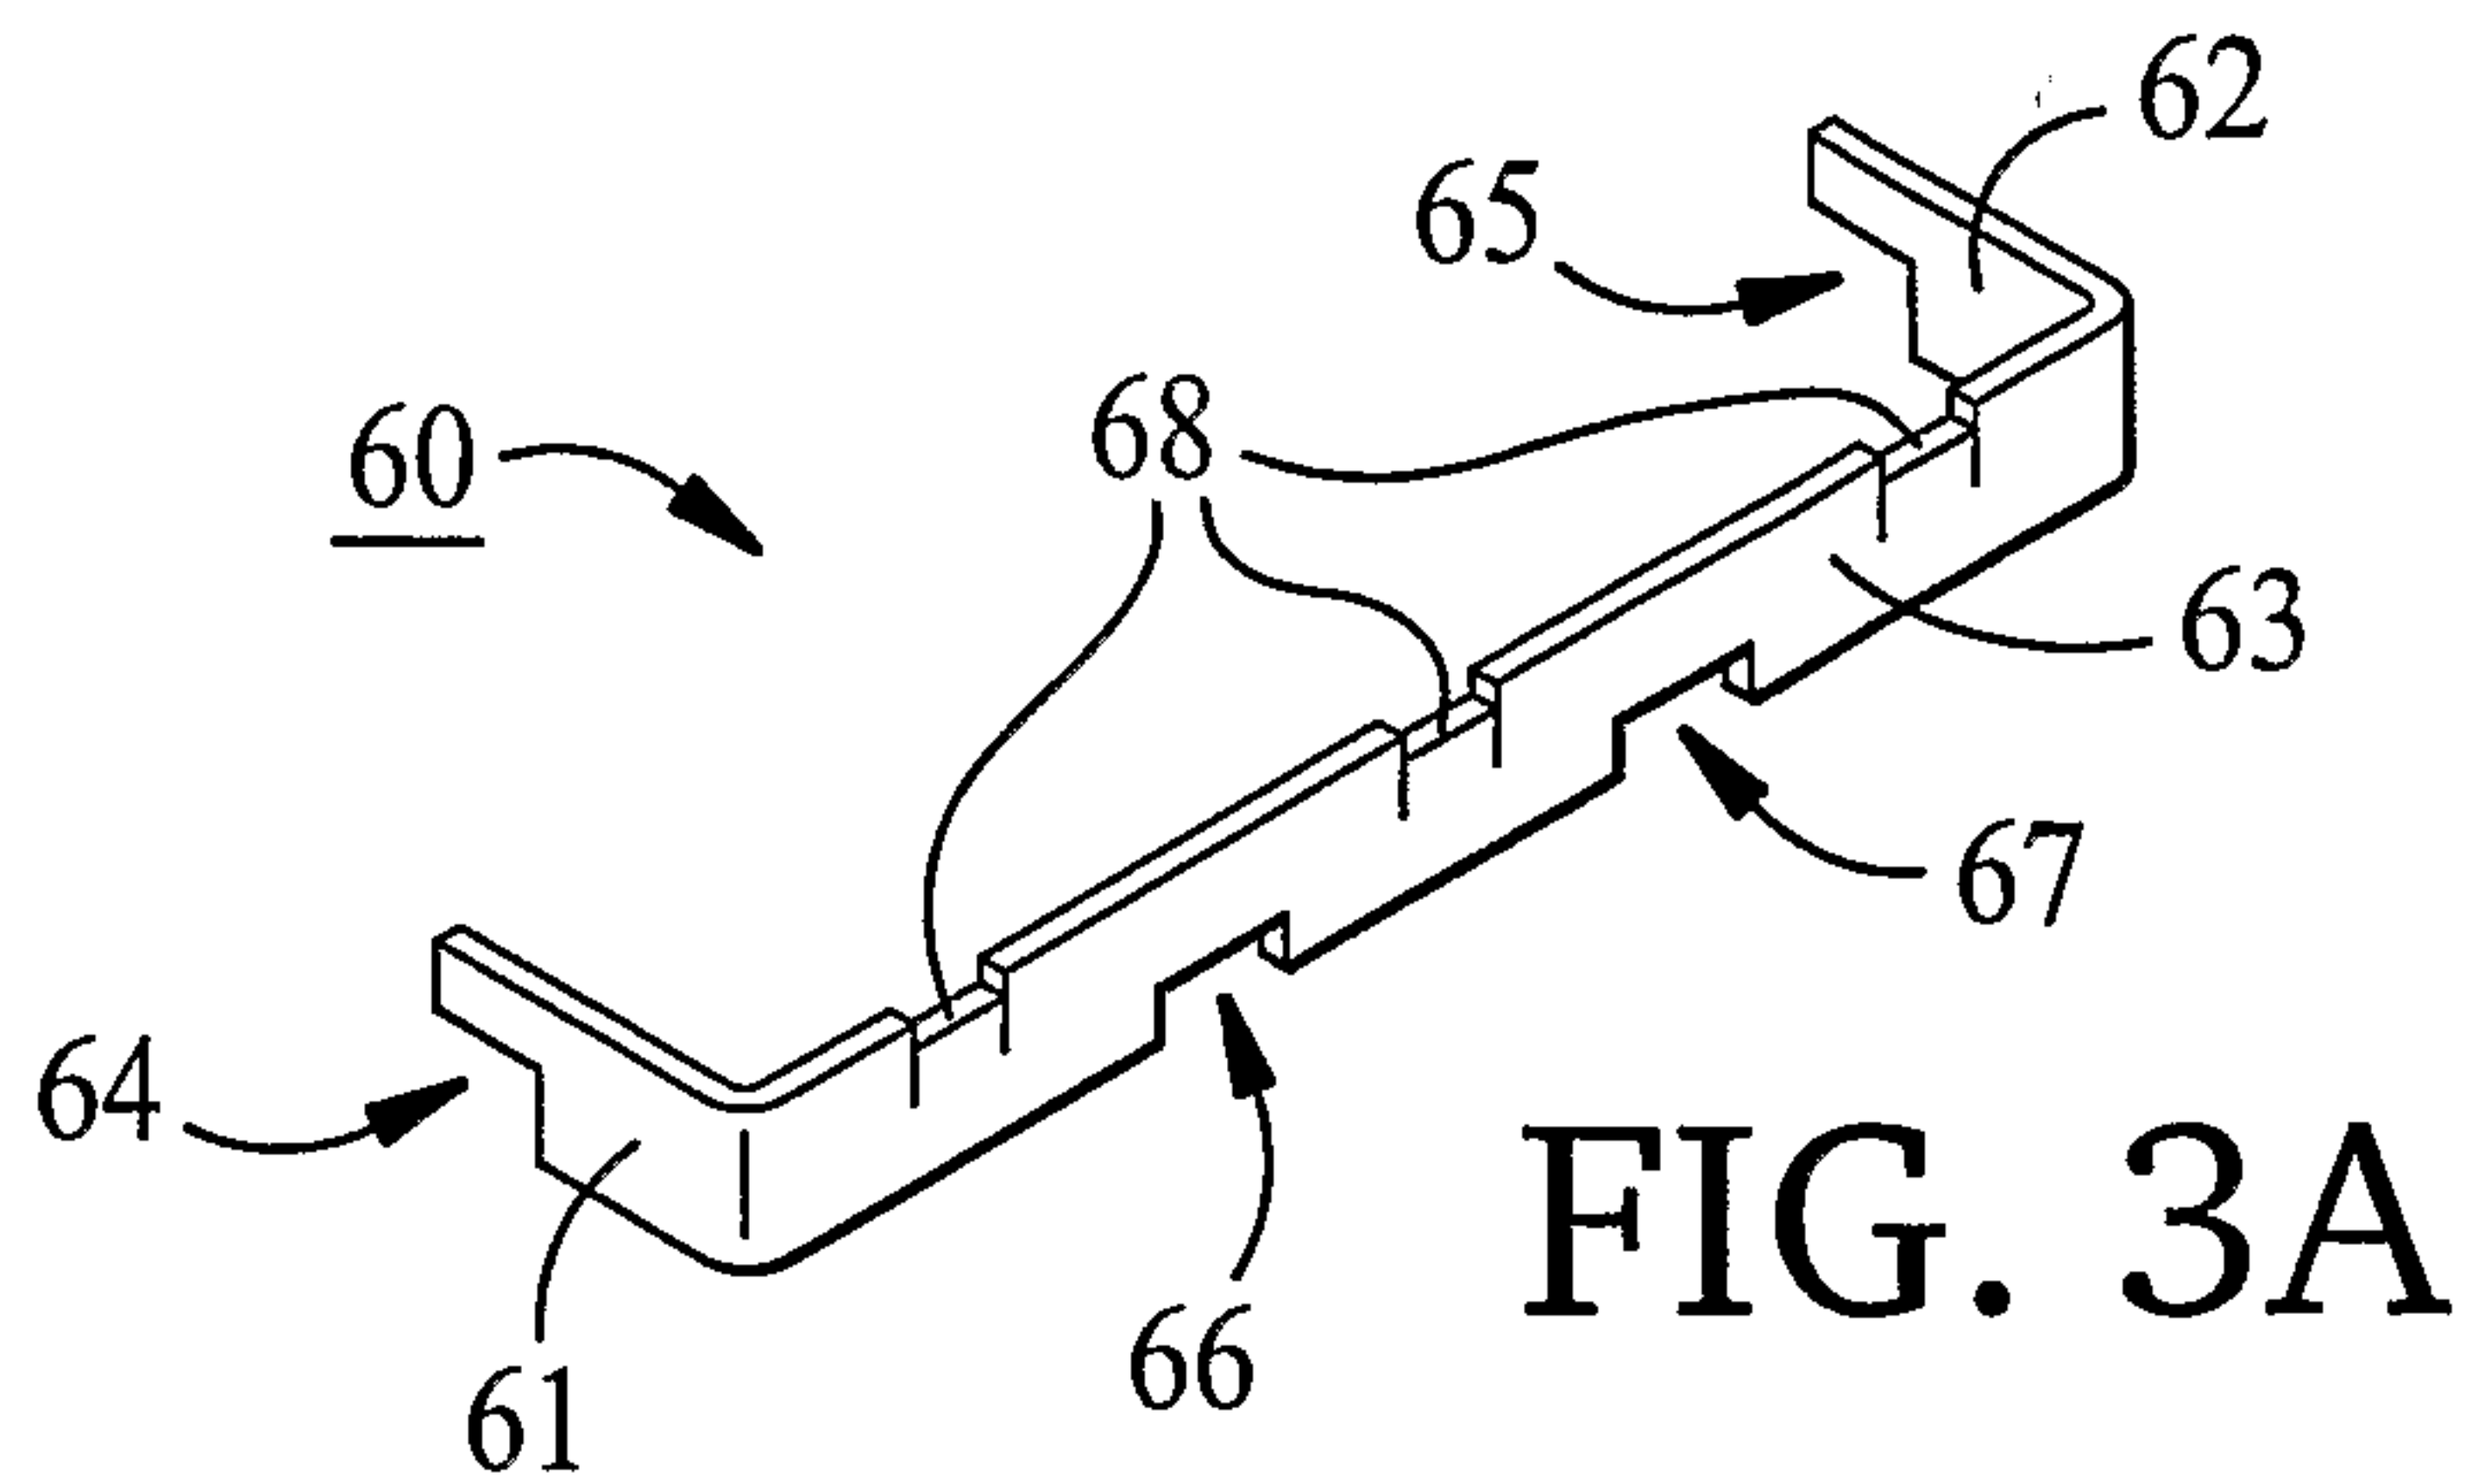

4/11

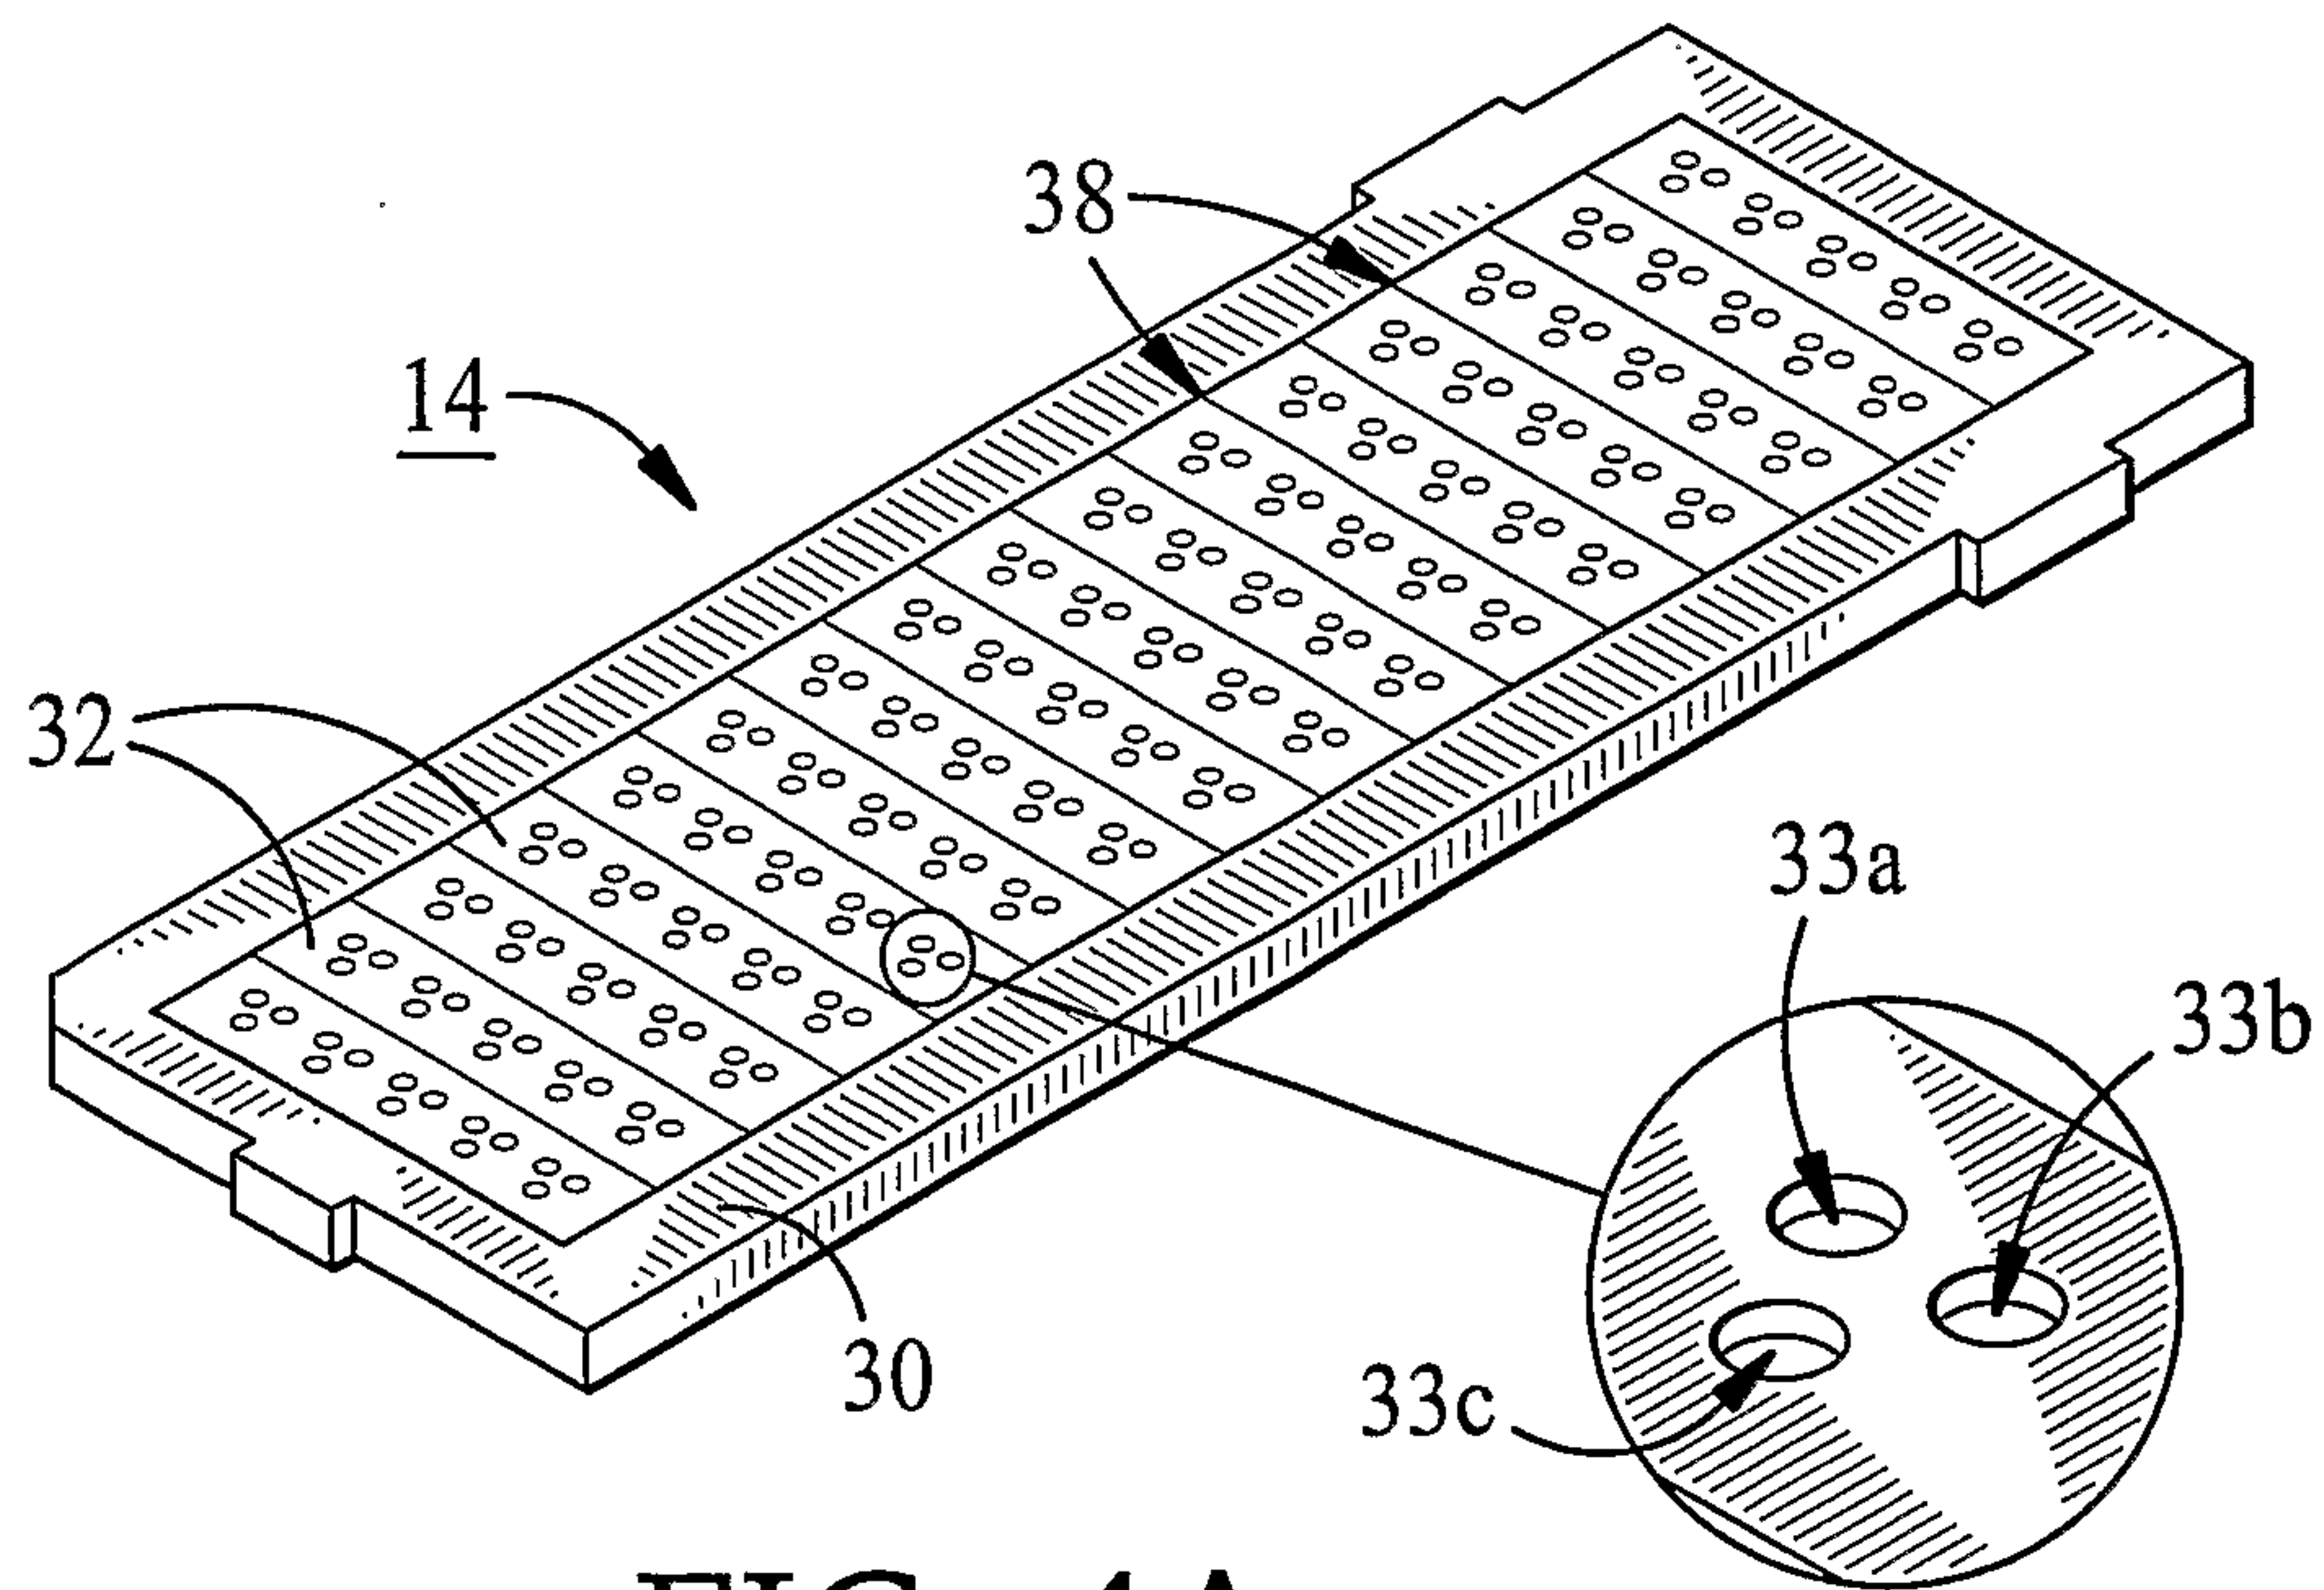


FIG. 4A

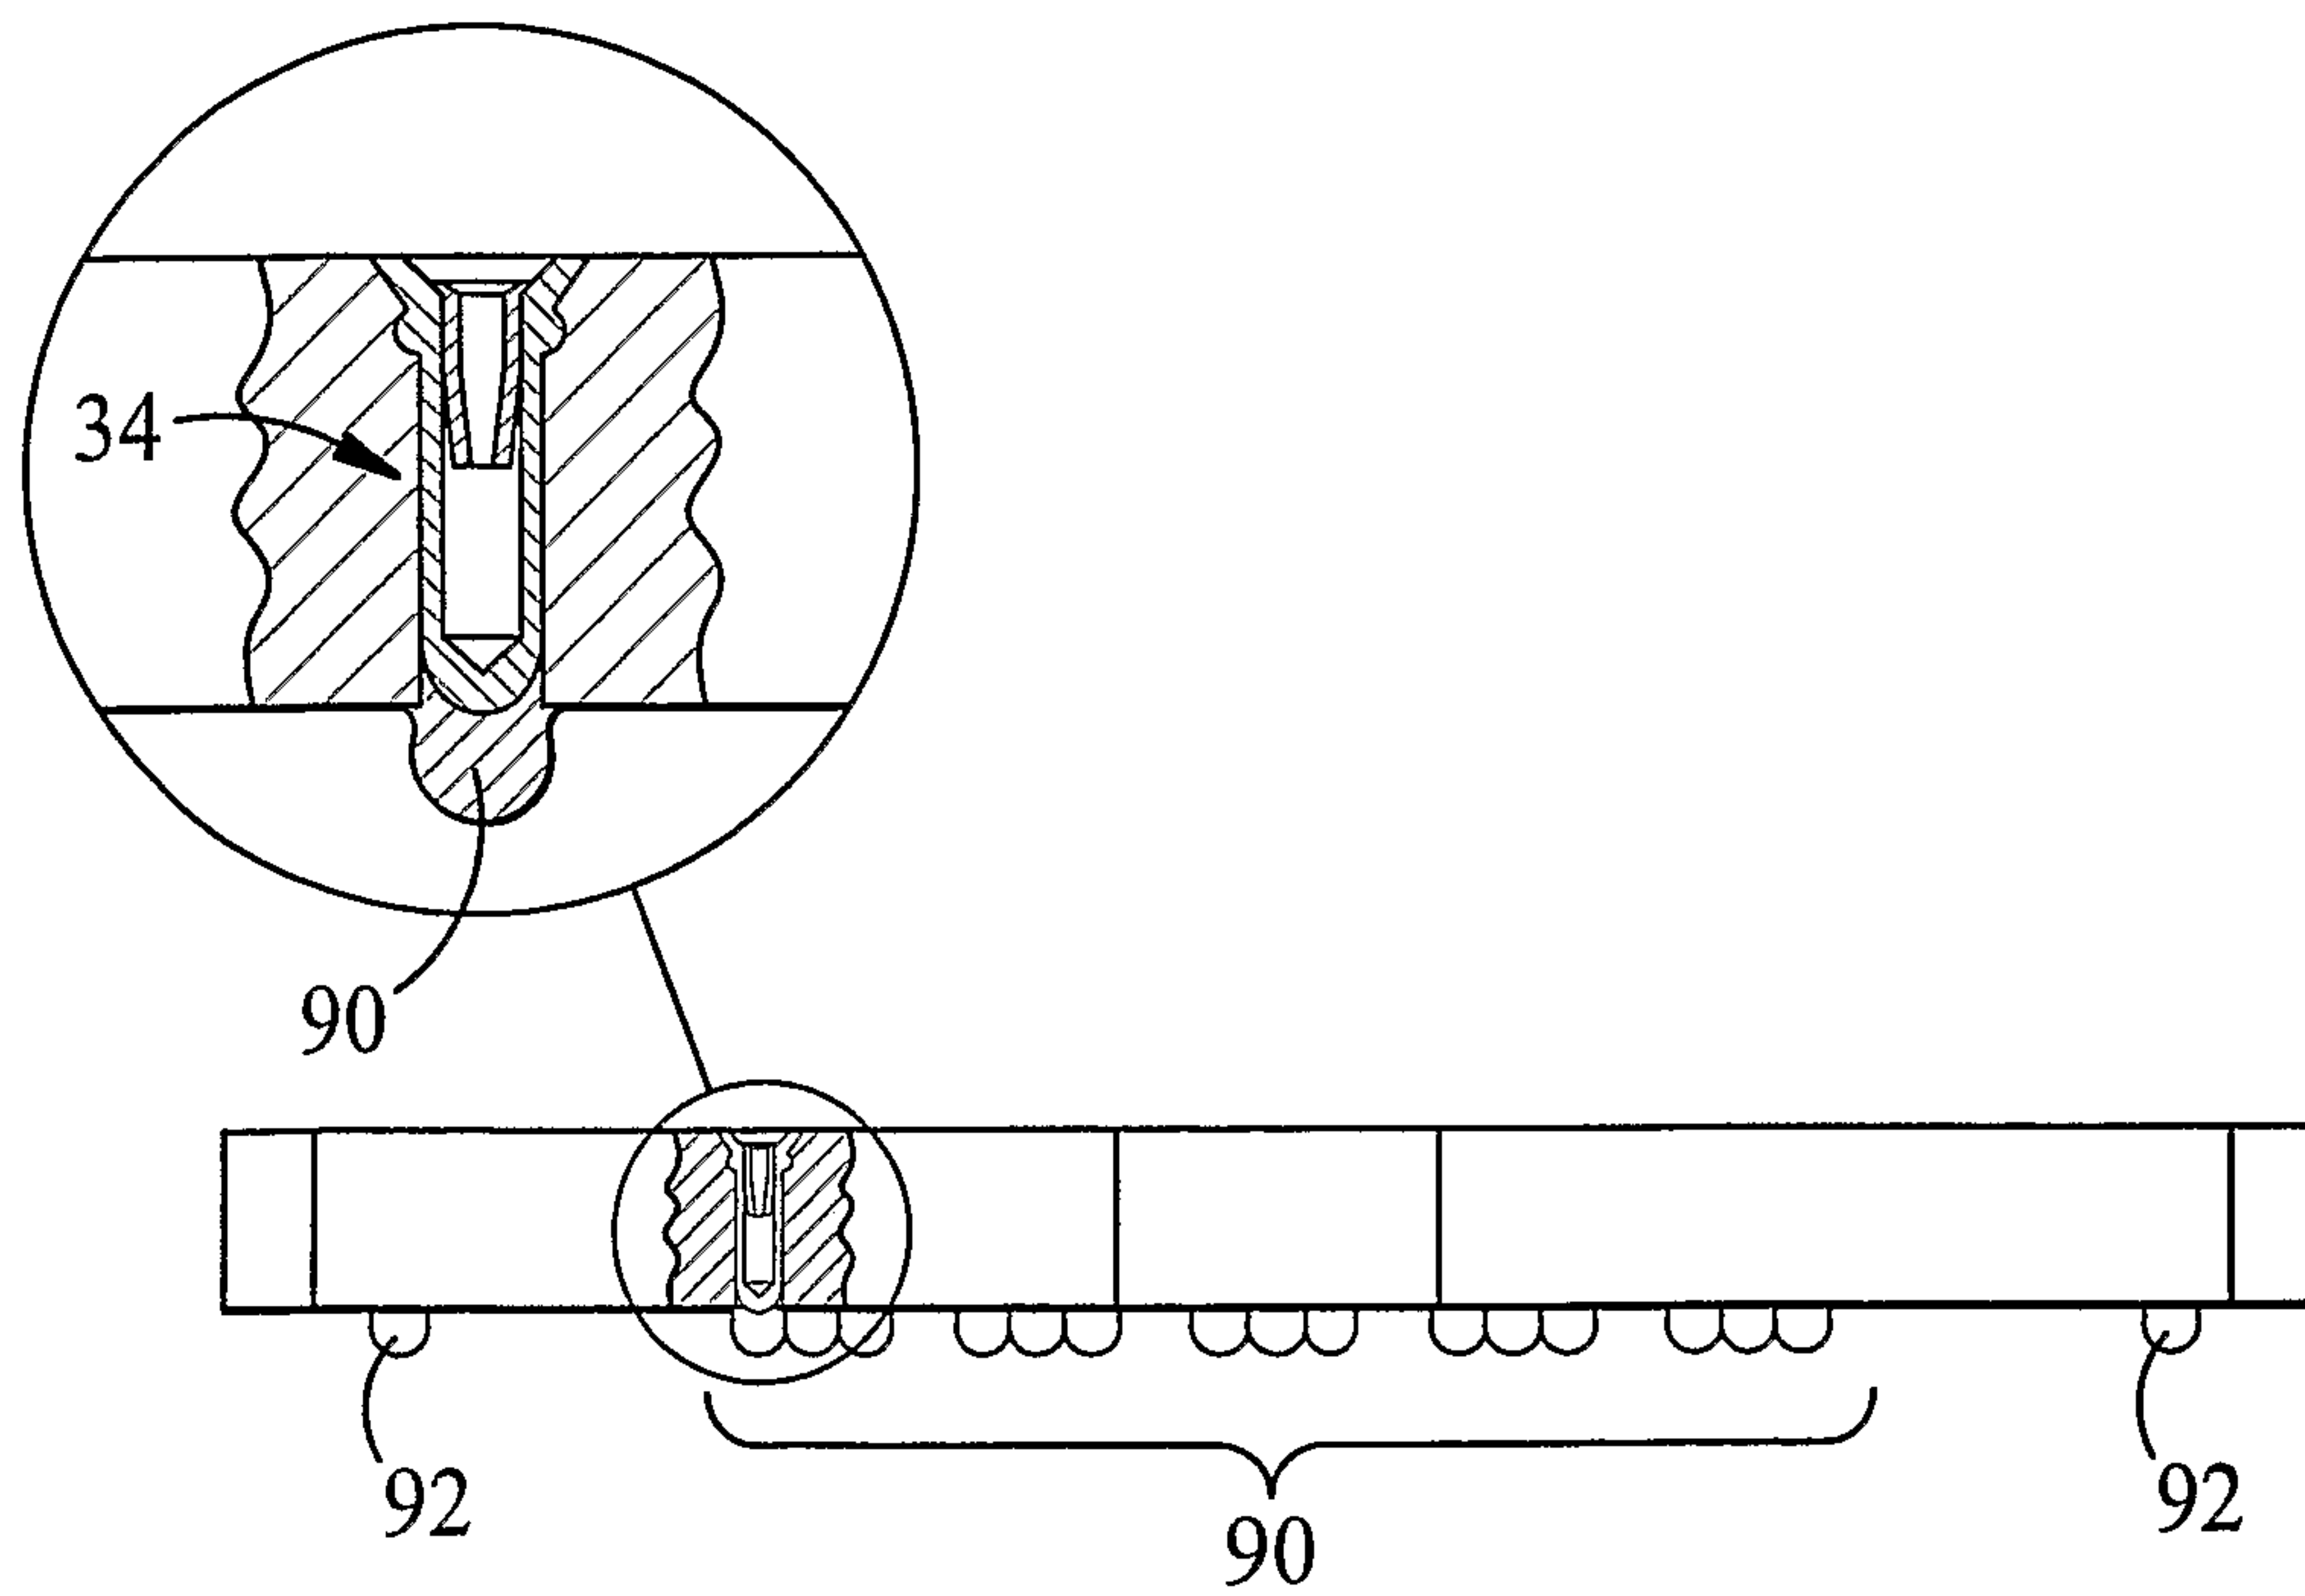


FIG. 4B

5/11

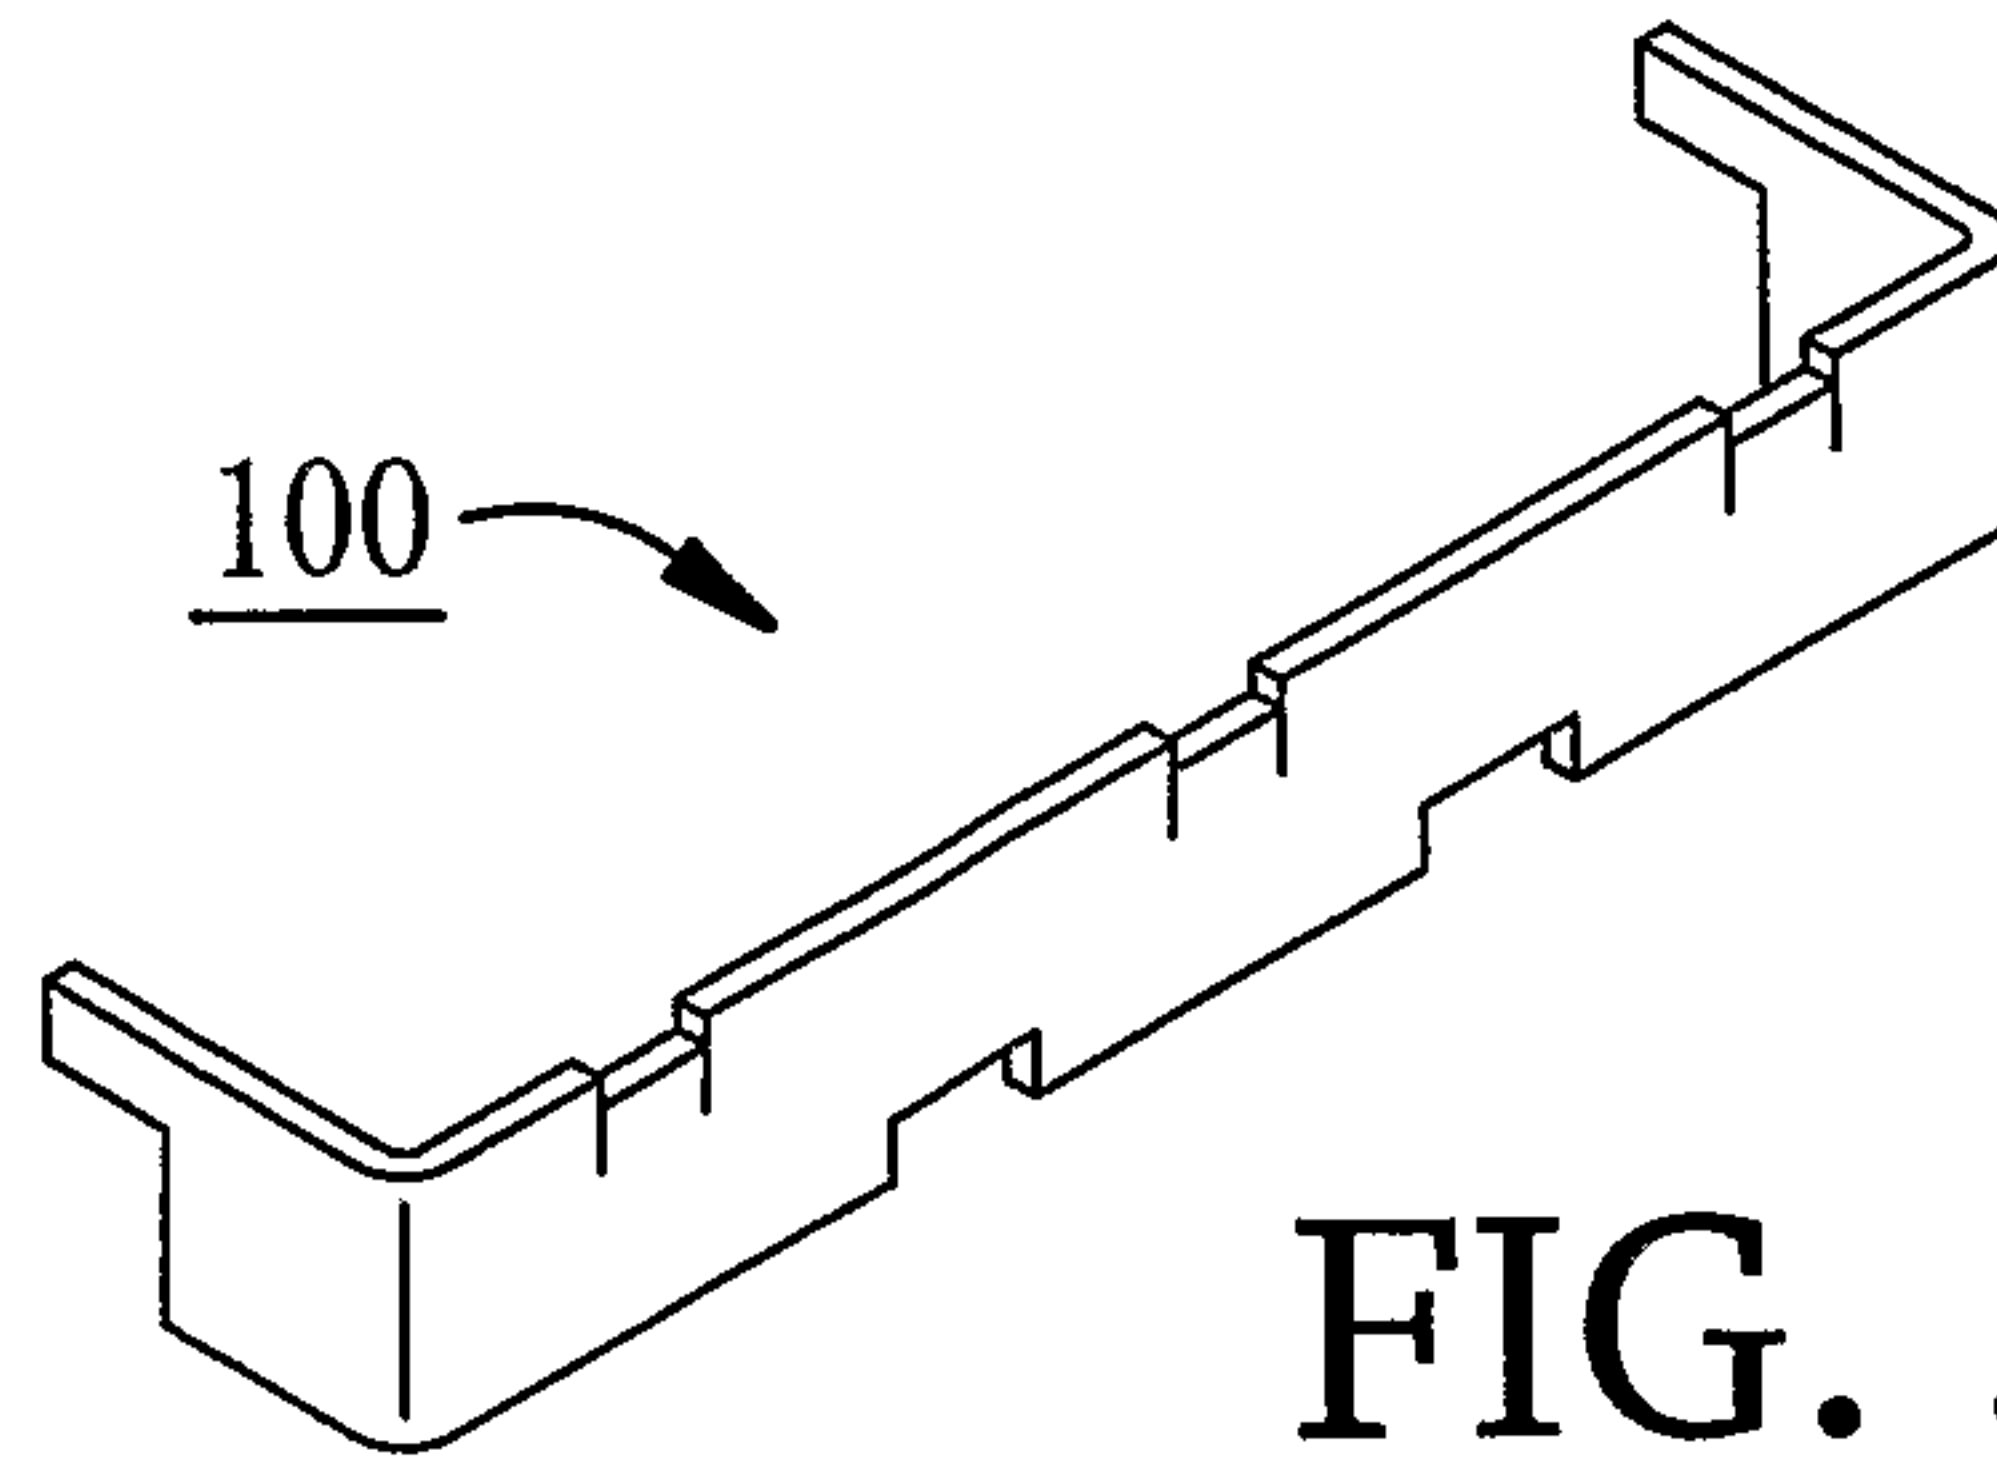


FIG. 5A

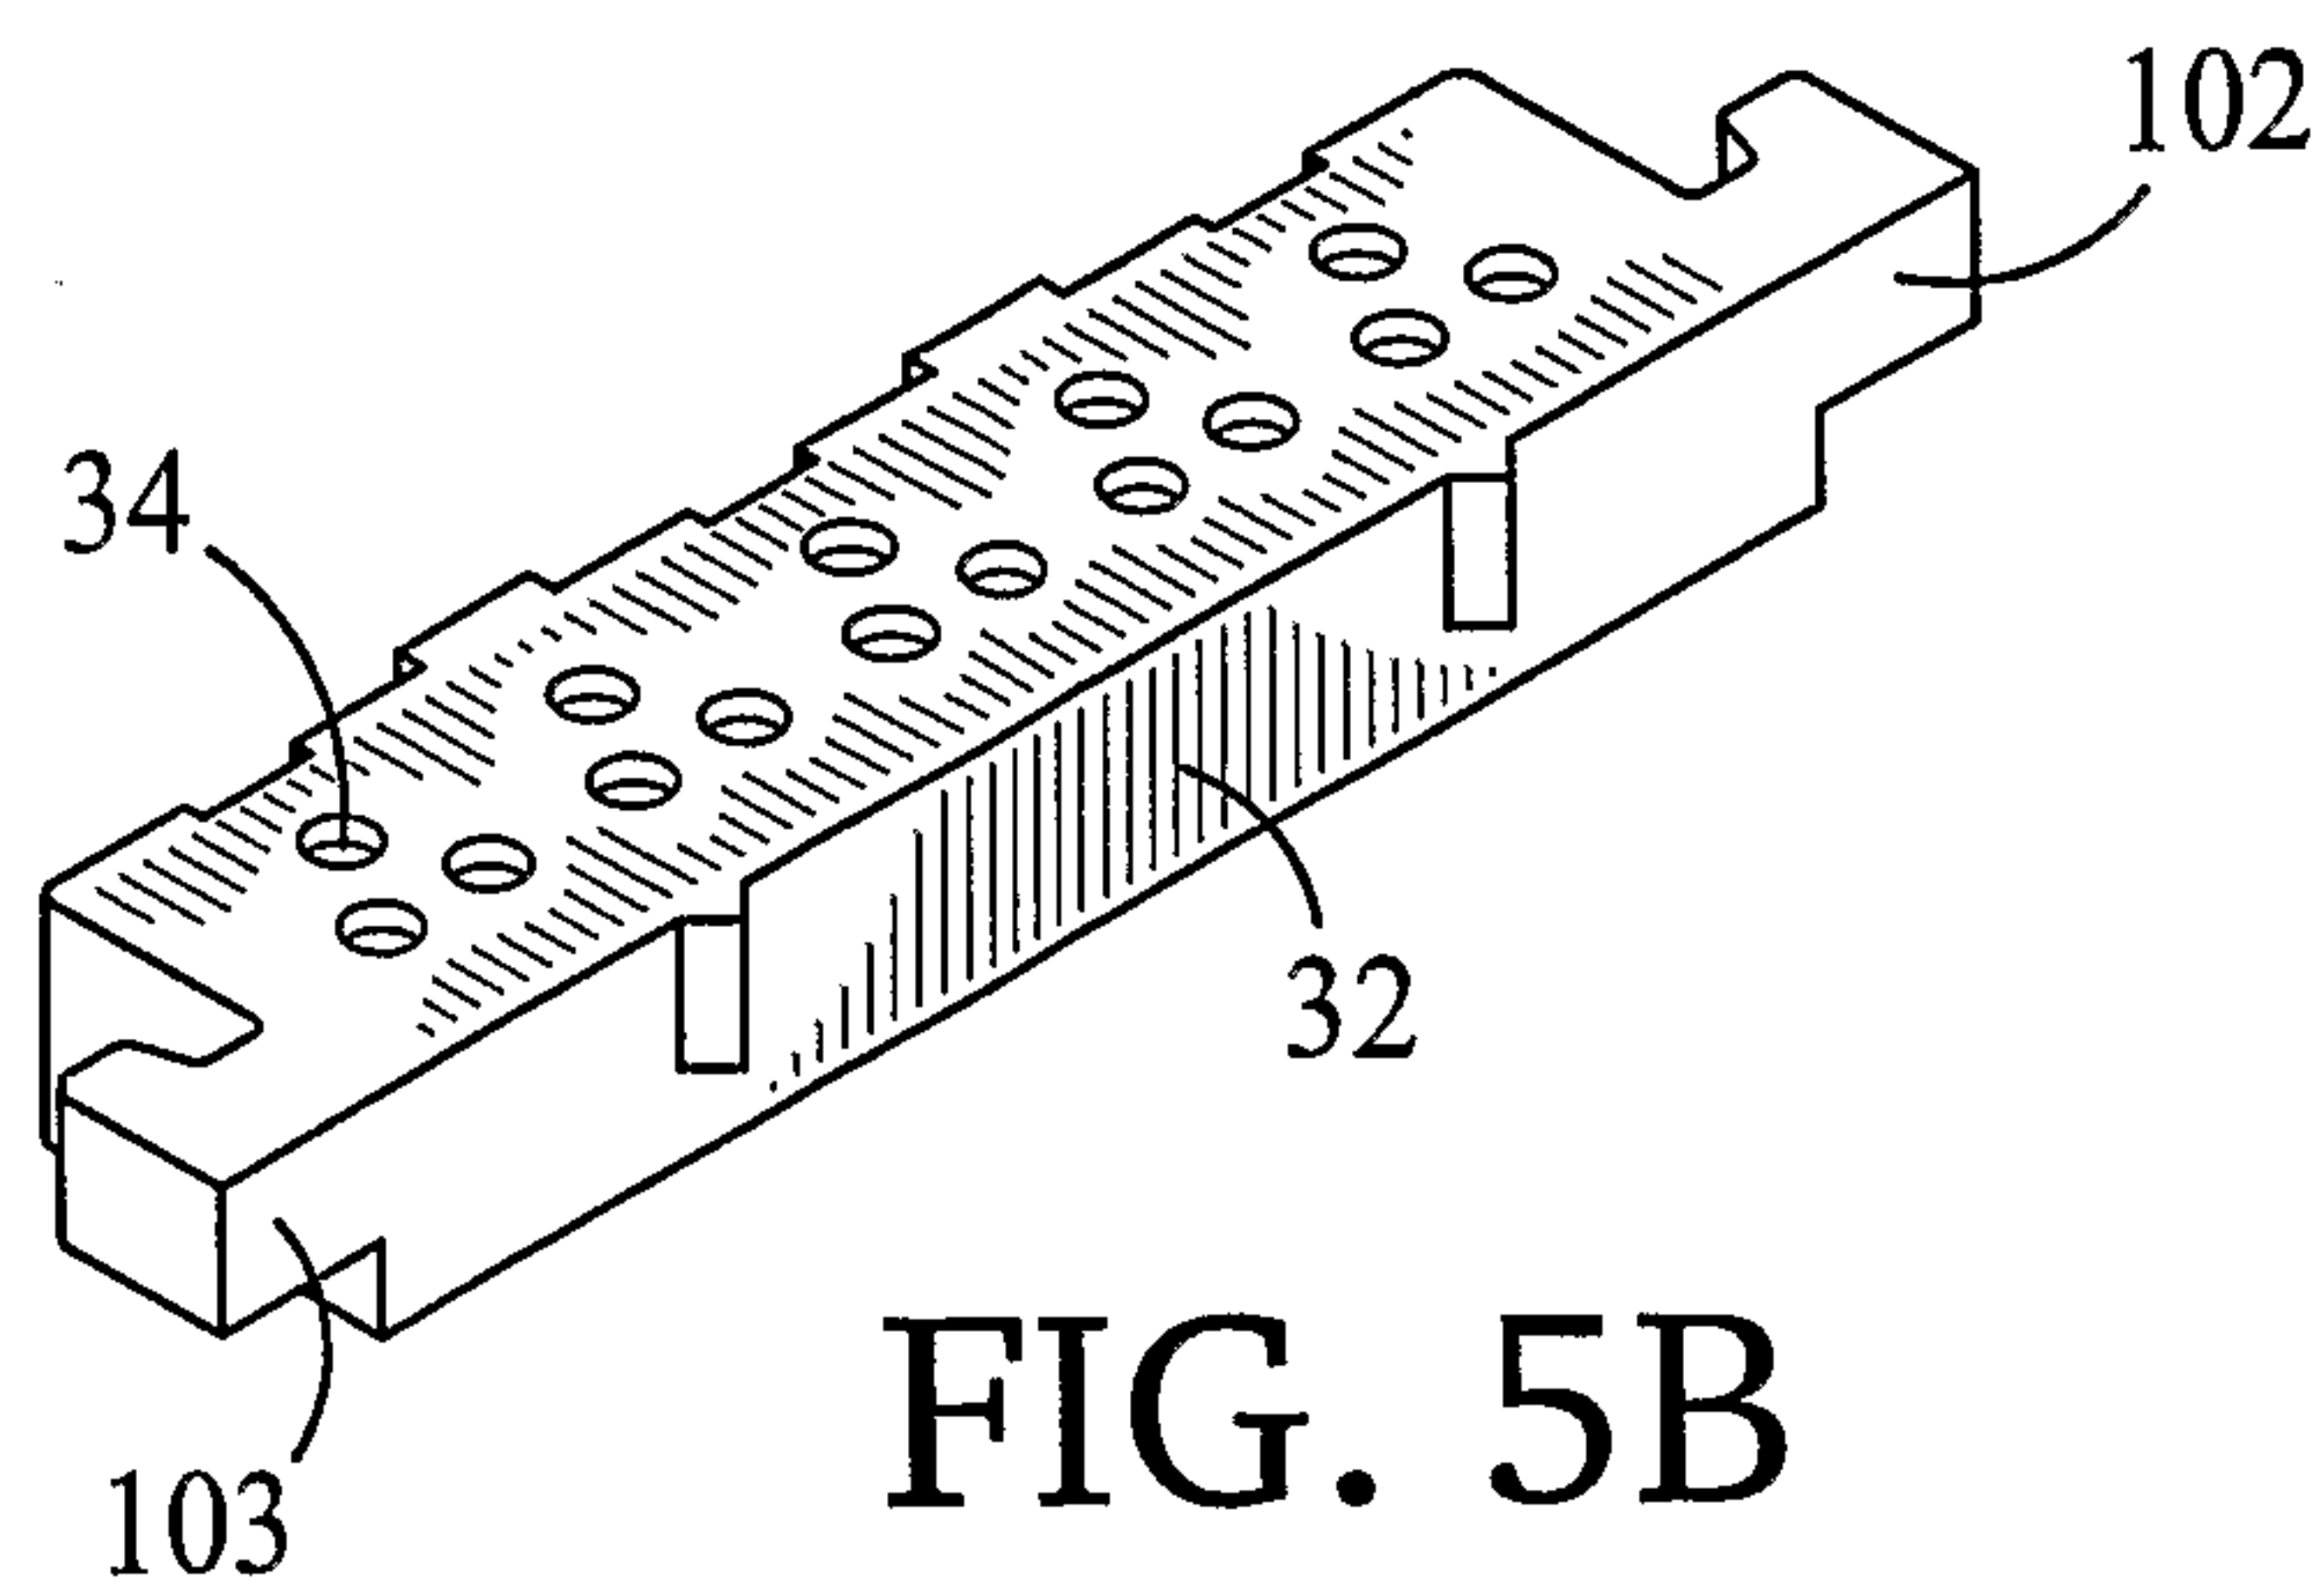


FIG. 5B

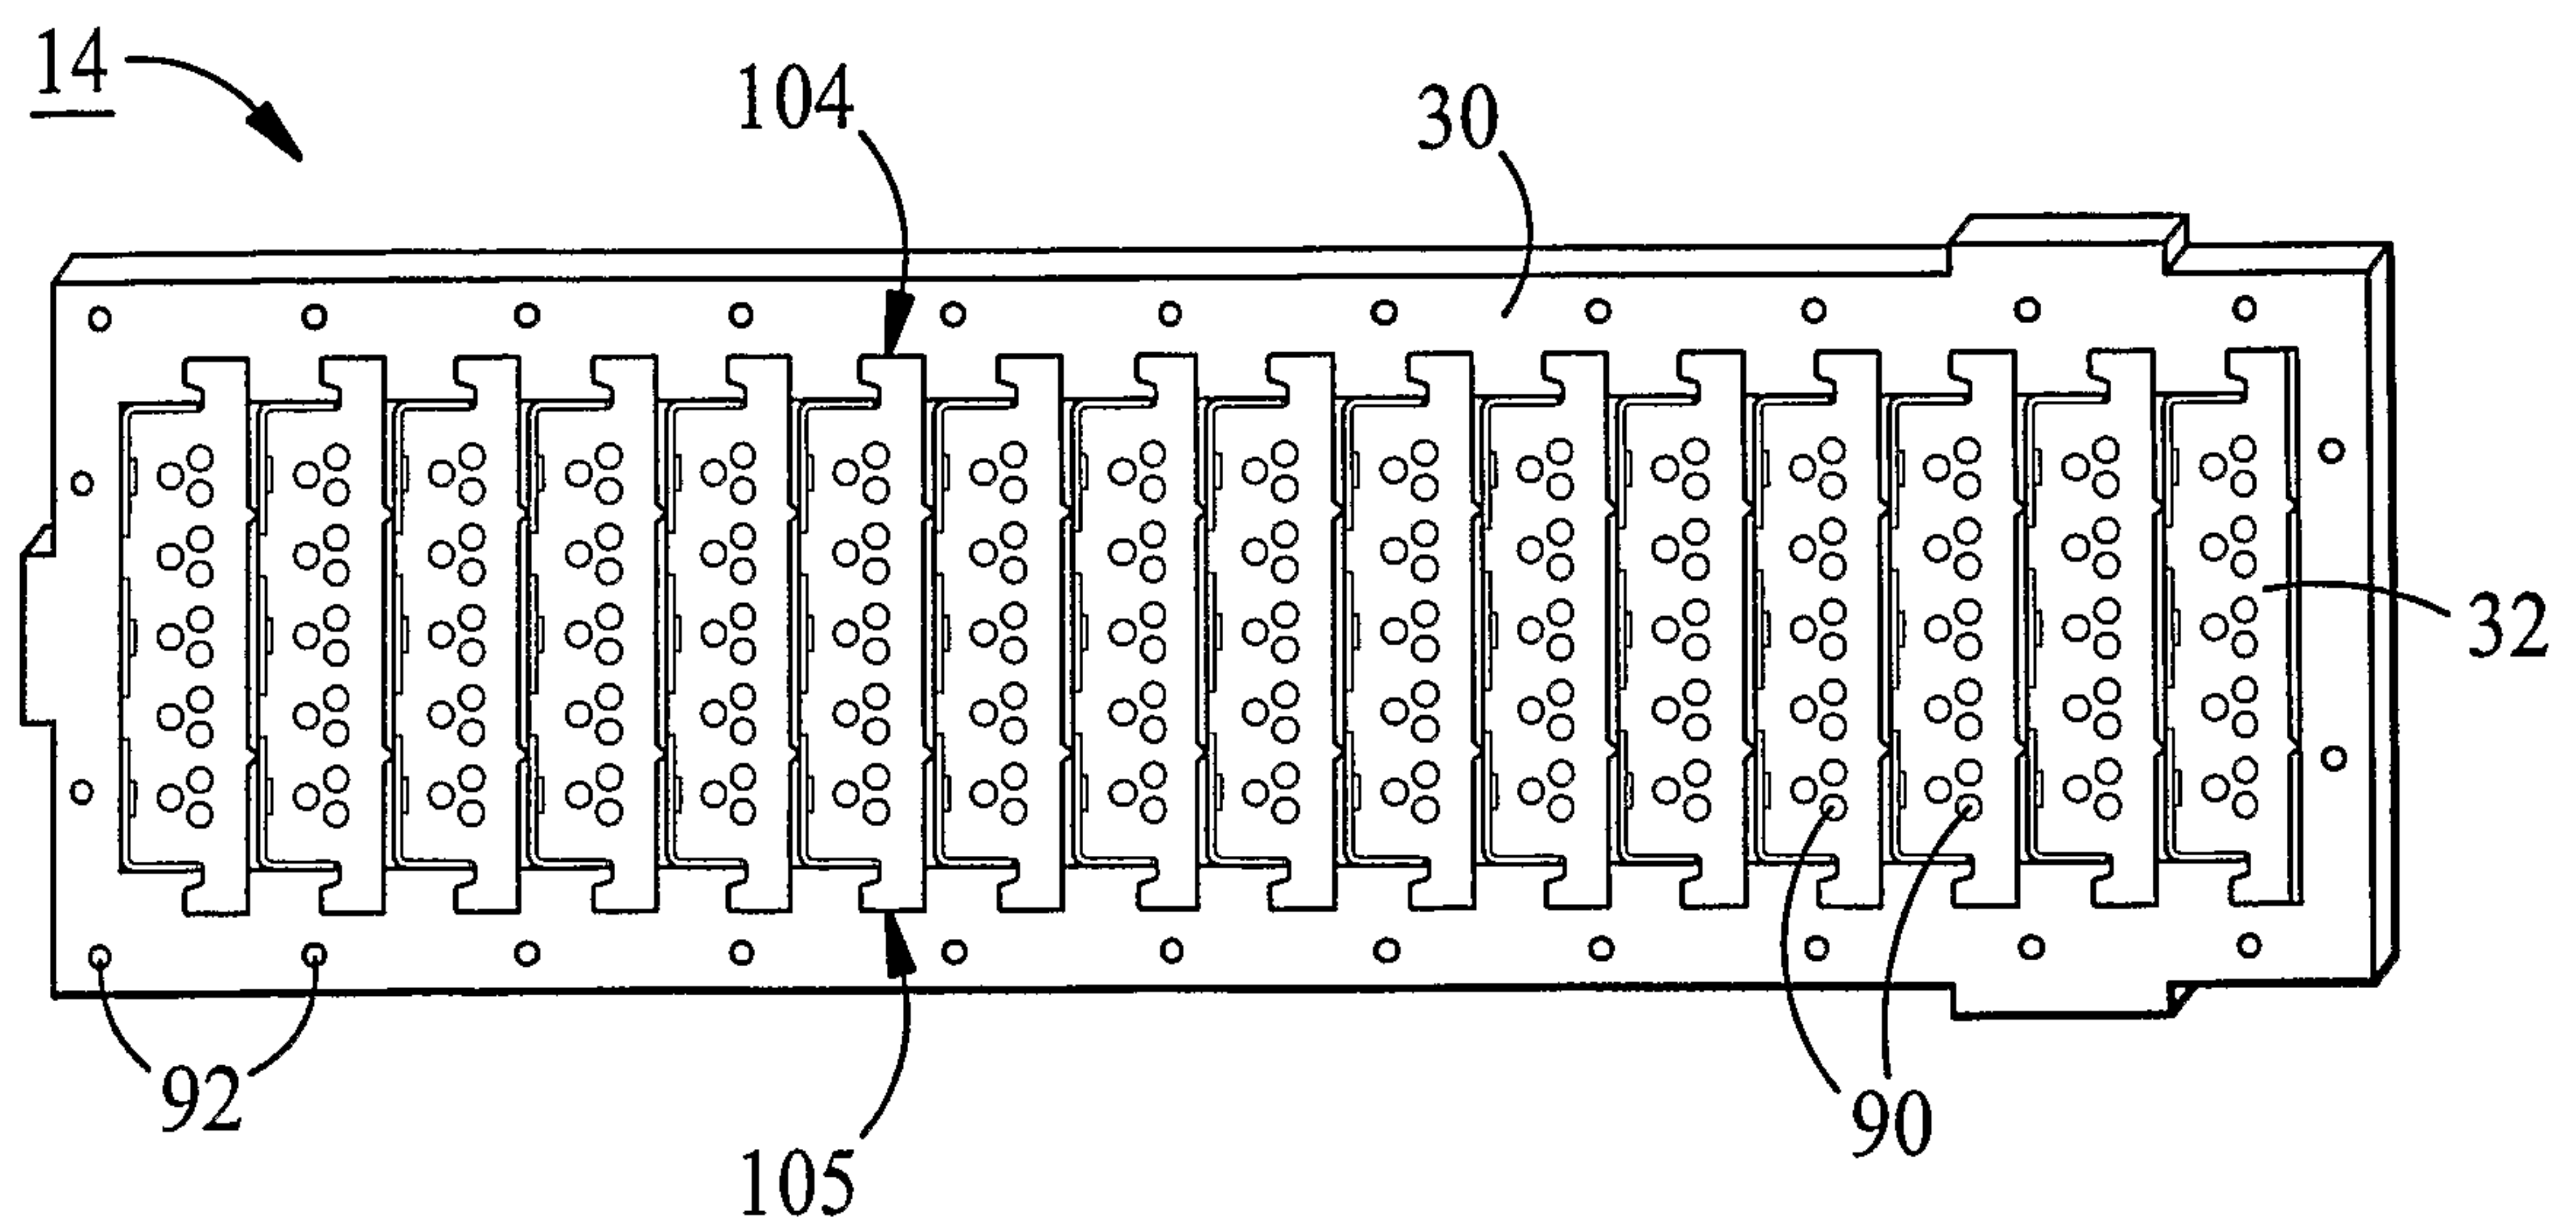


FIG. 5C

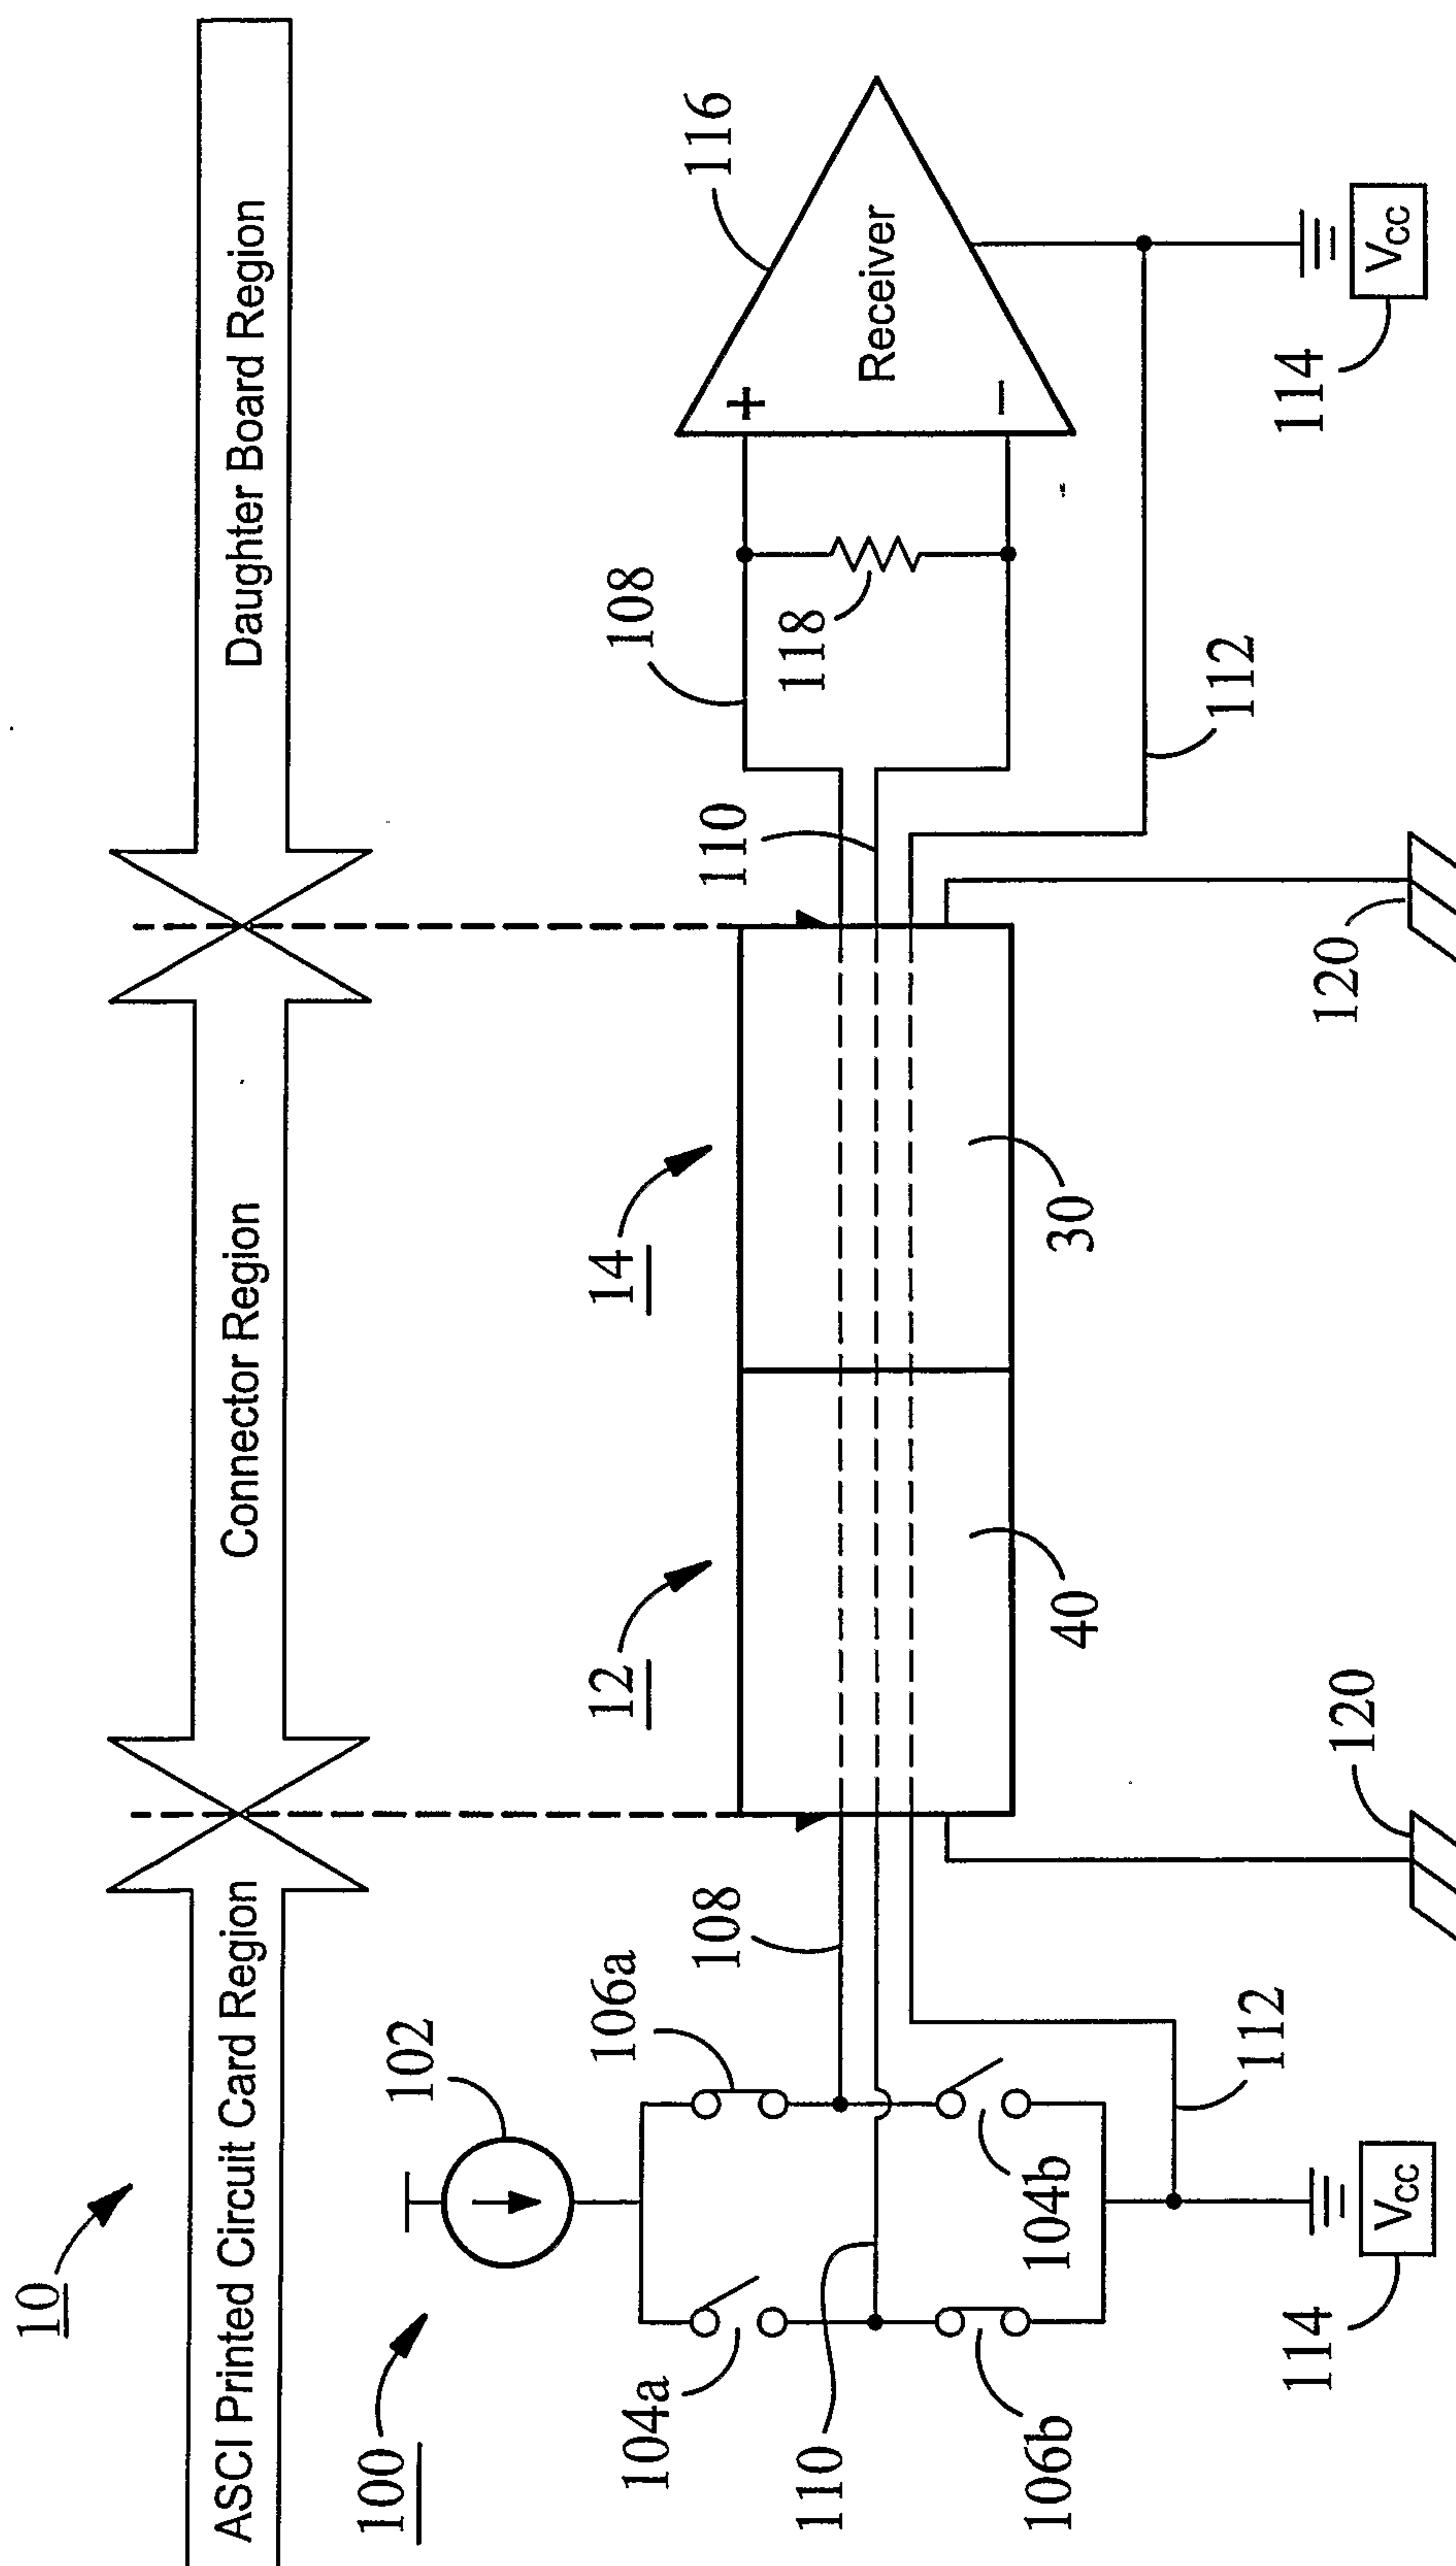


FIG. 6

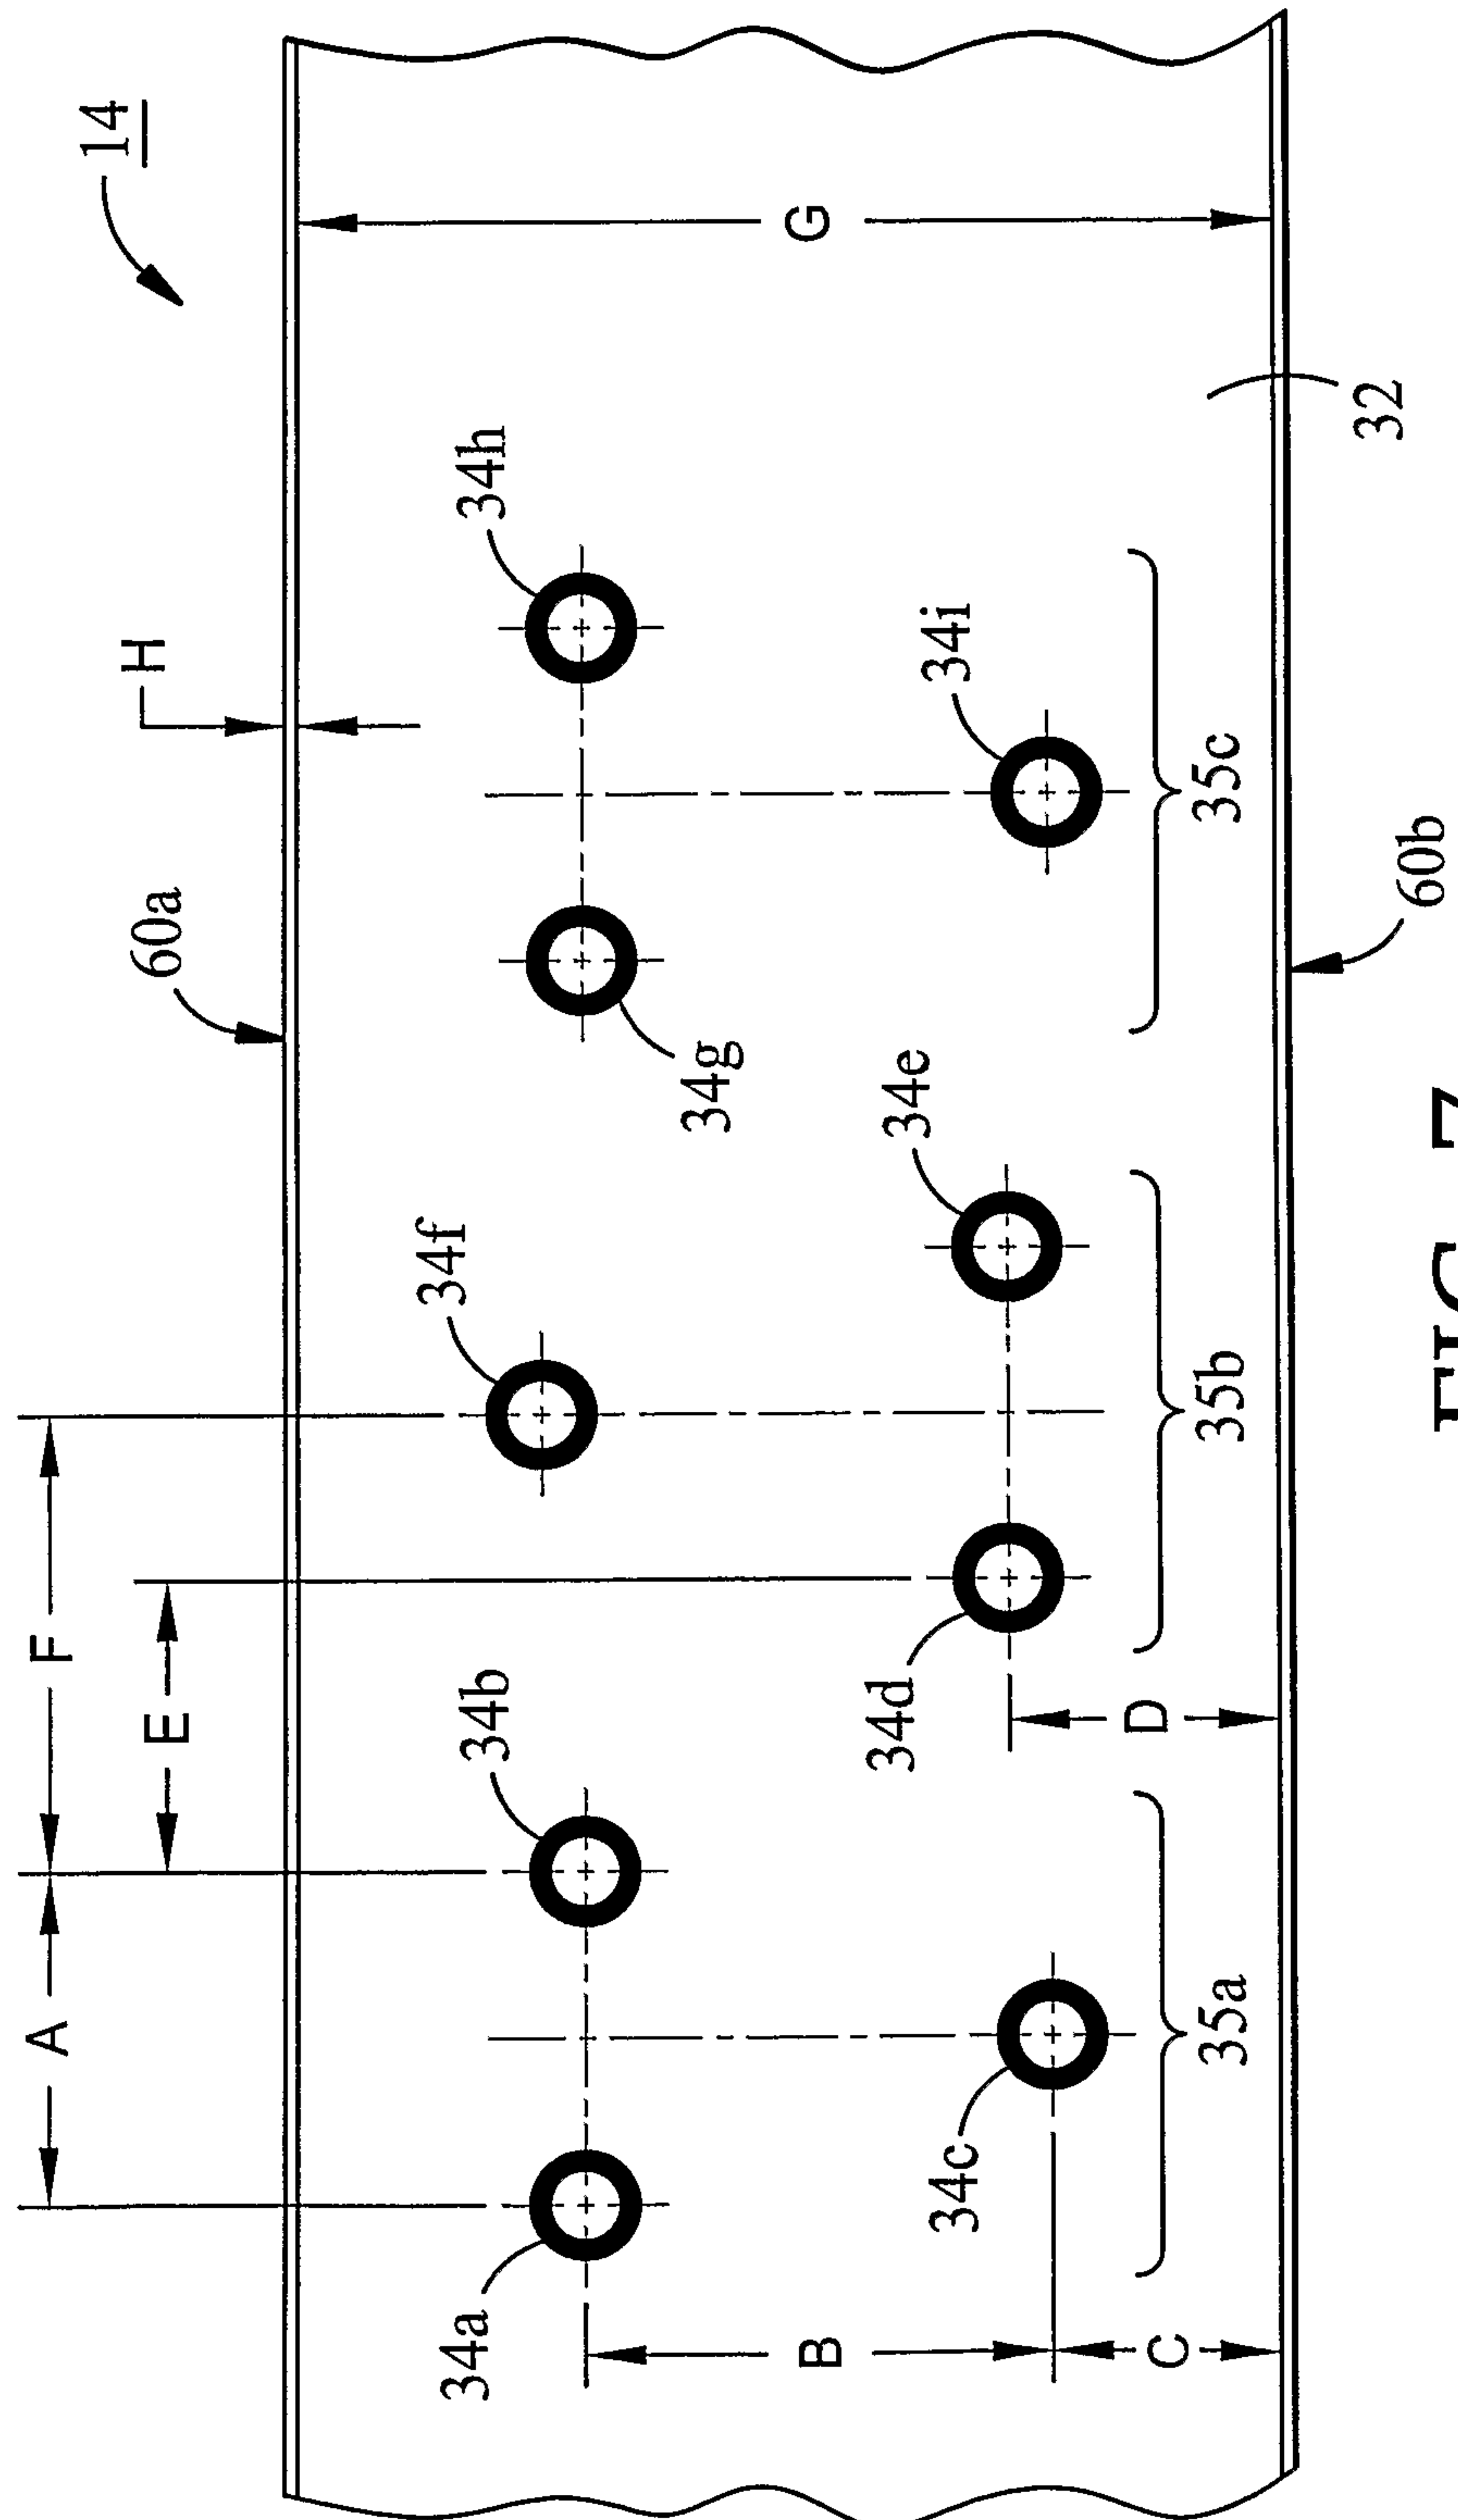


FIG. 7

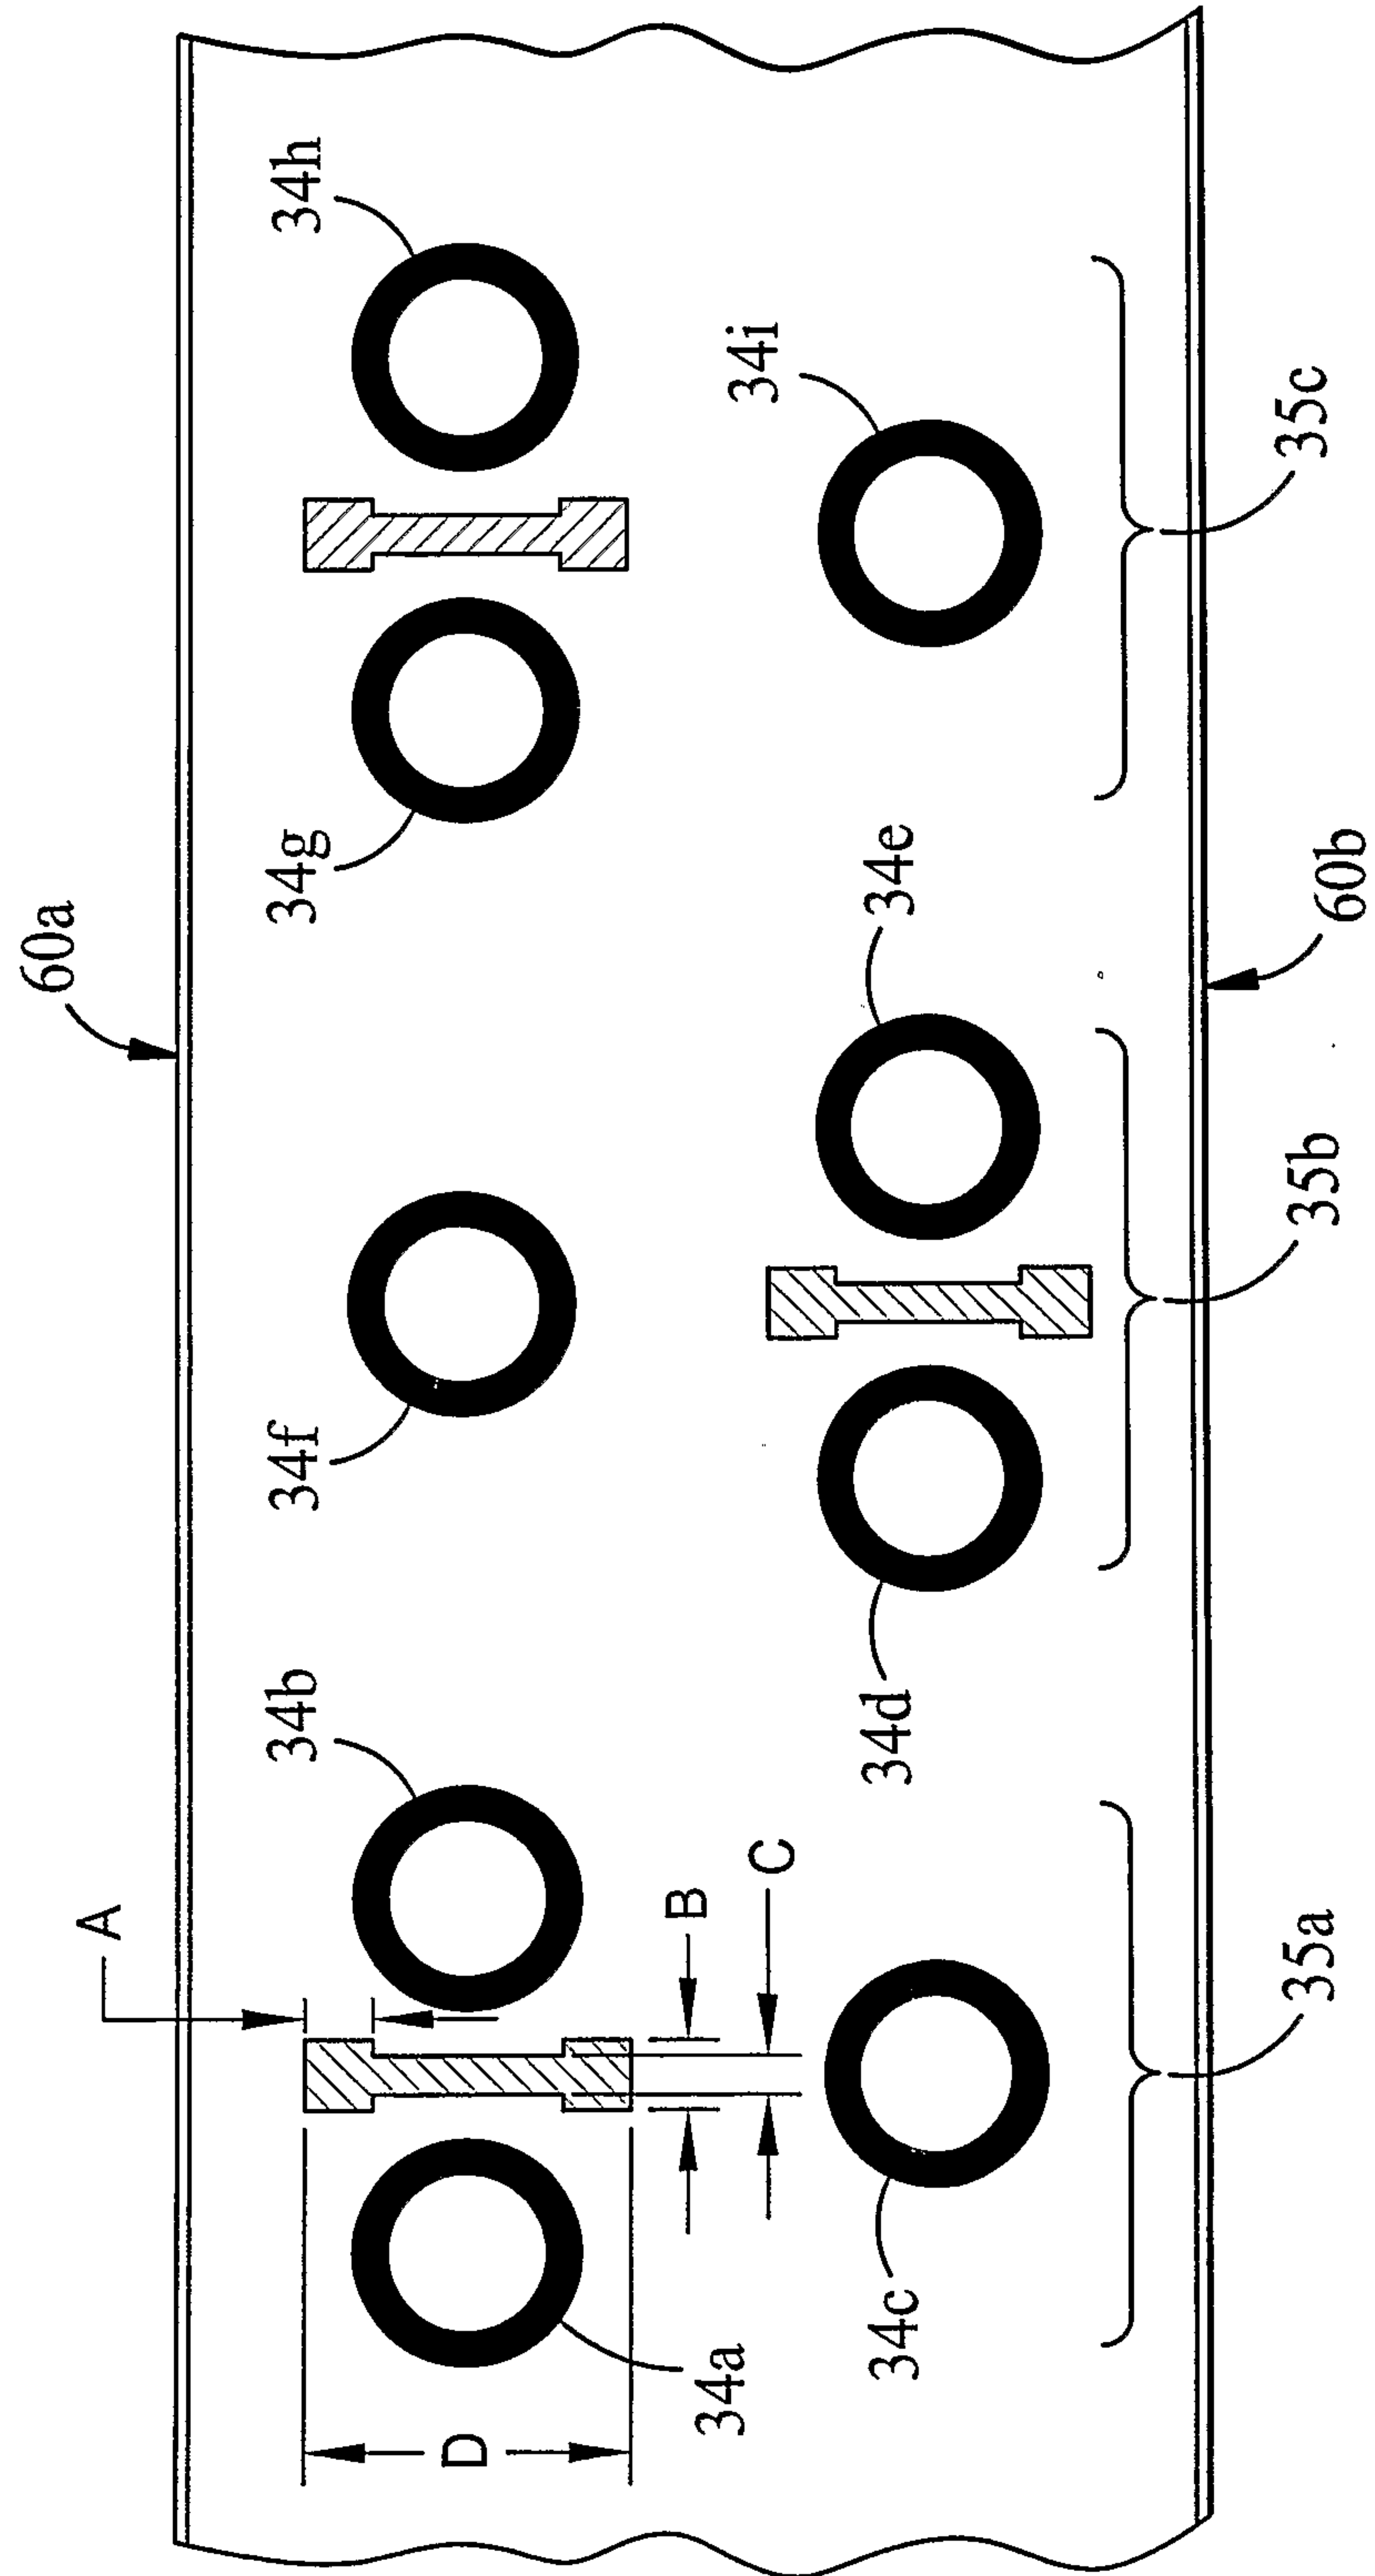


FIG. 8

9/11

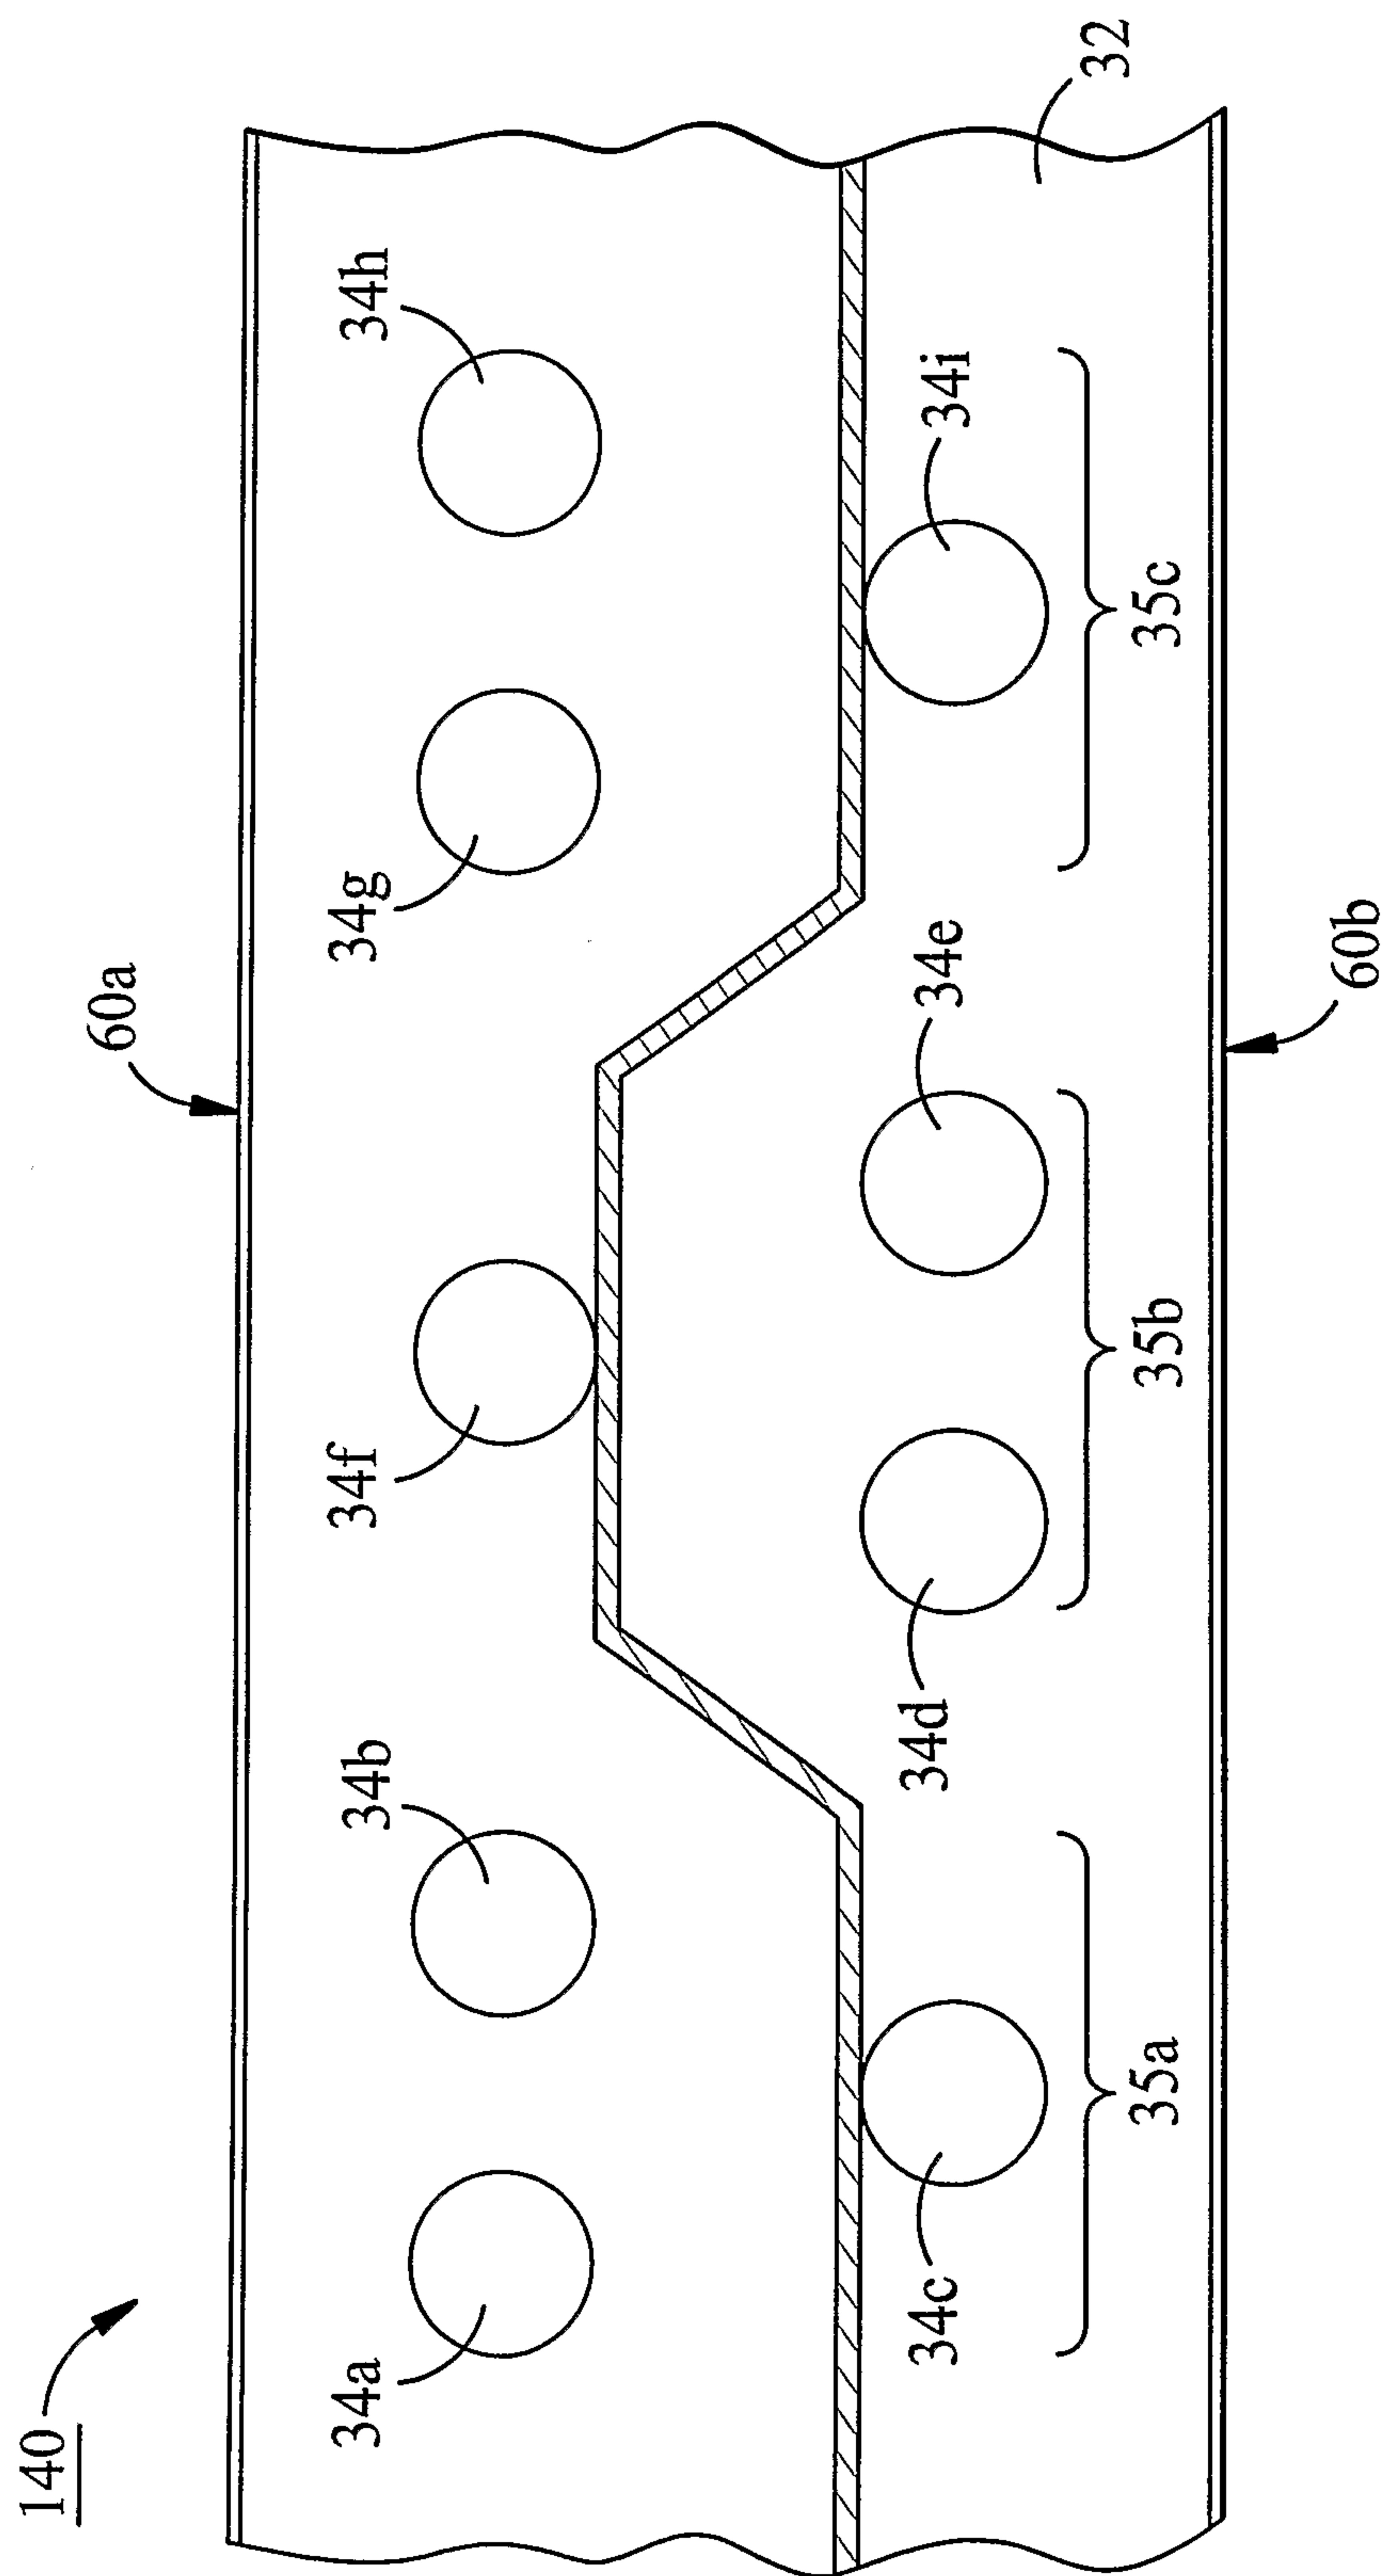


FIG. 9

10/11

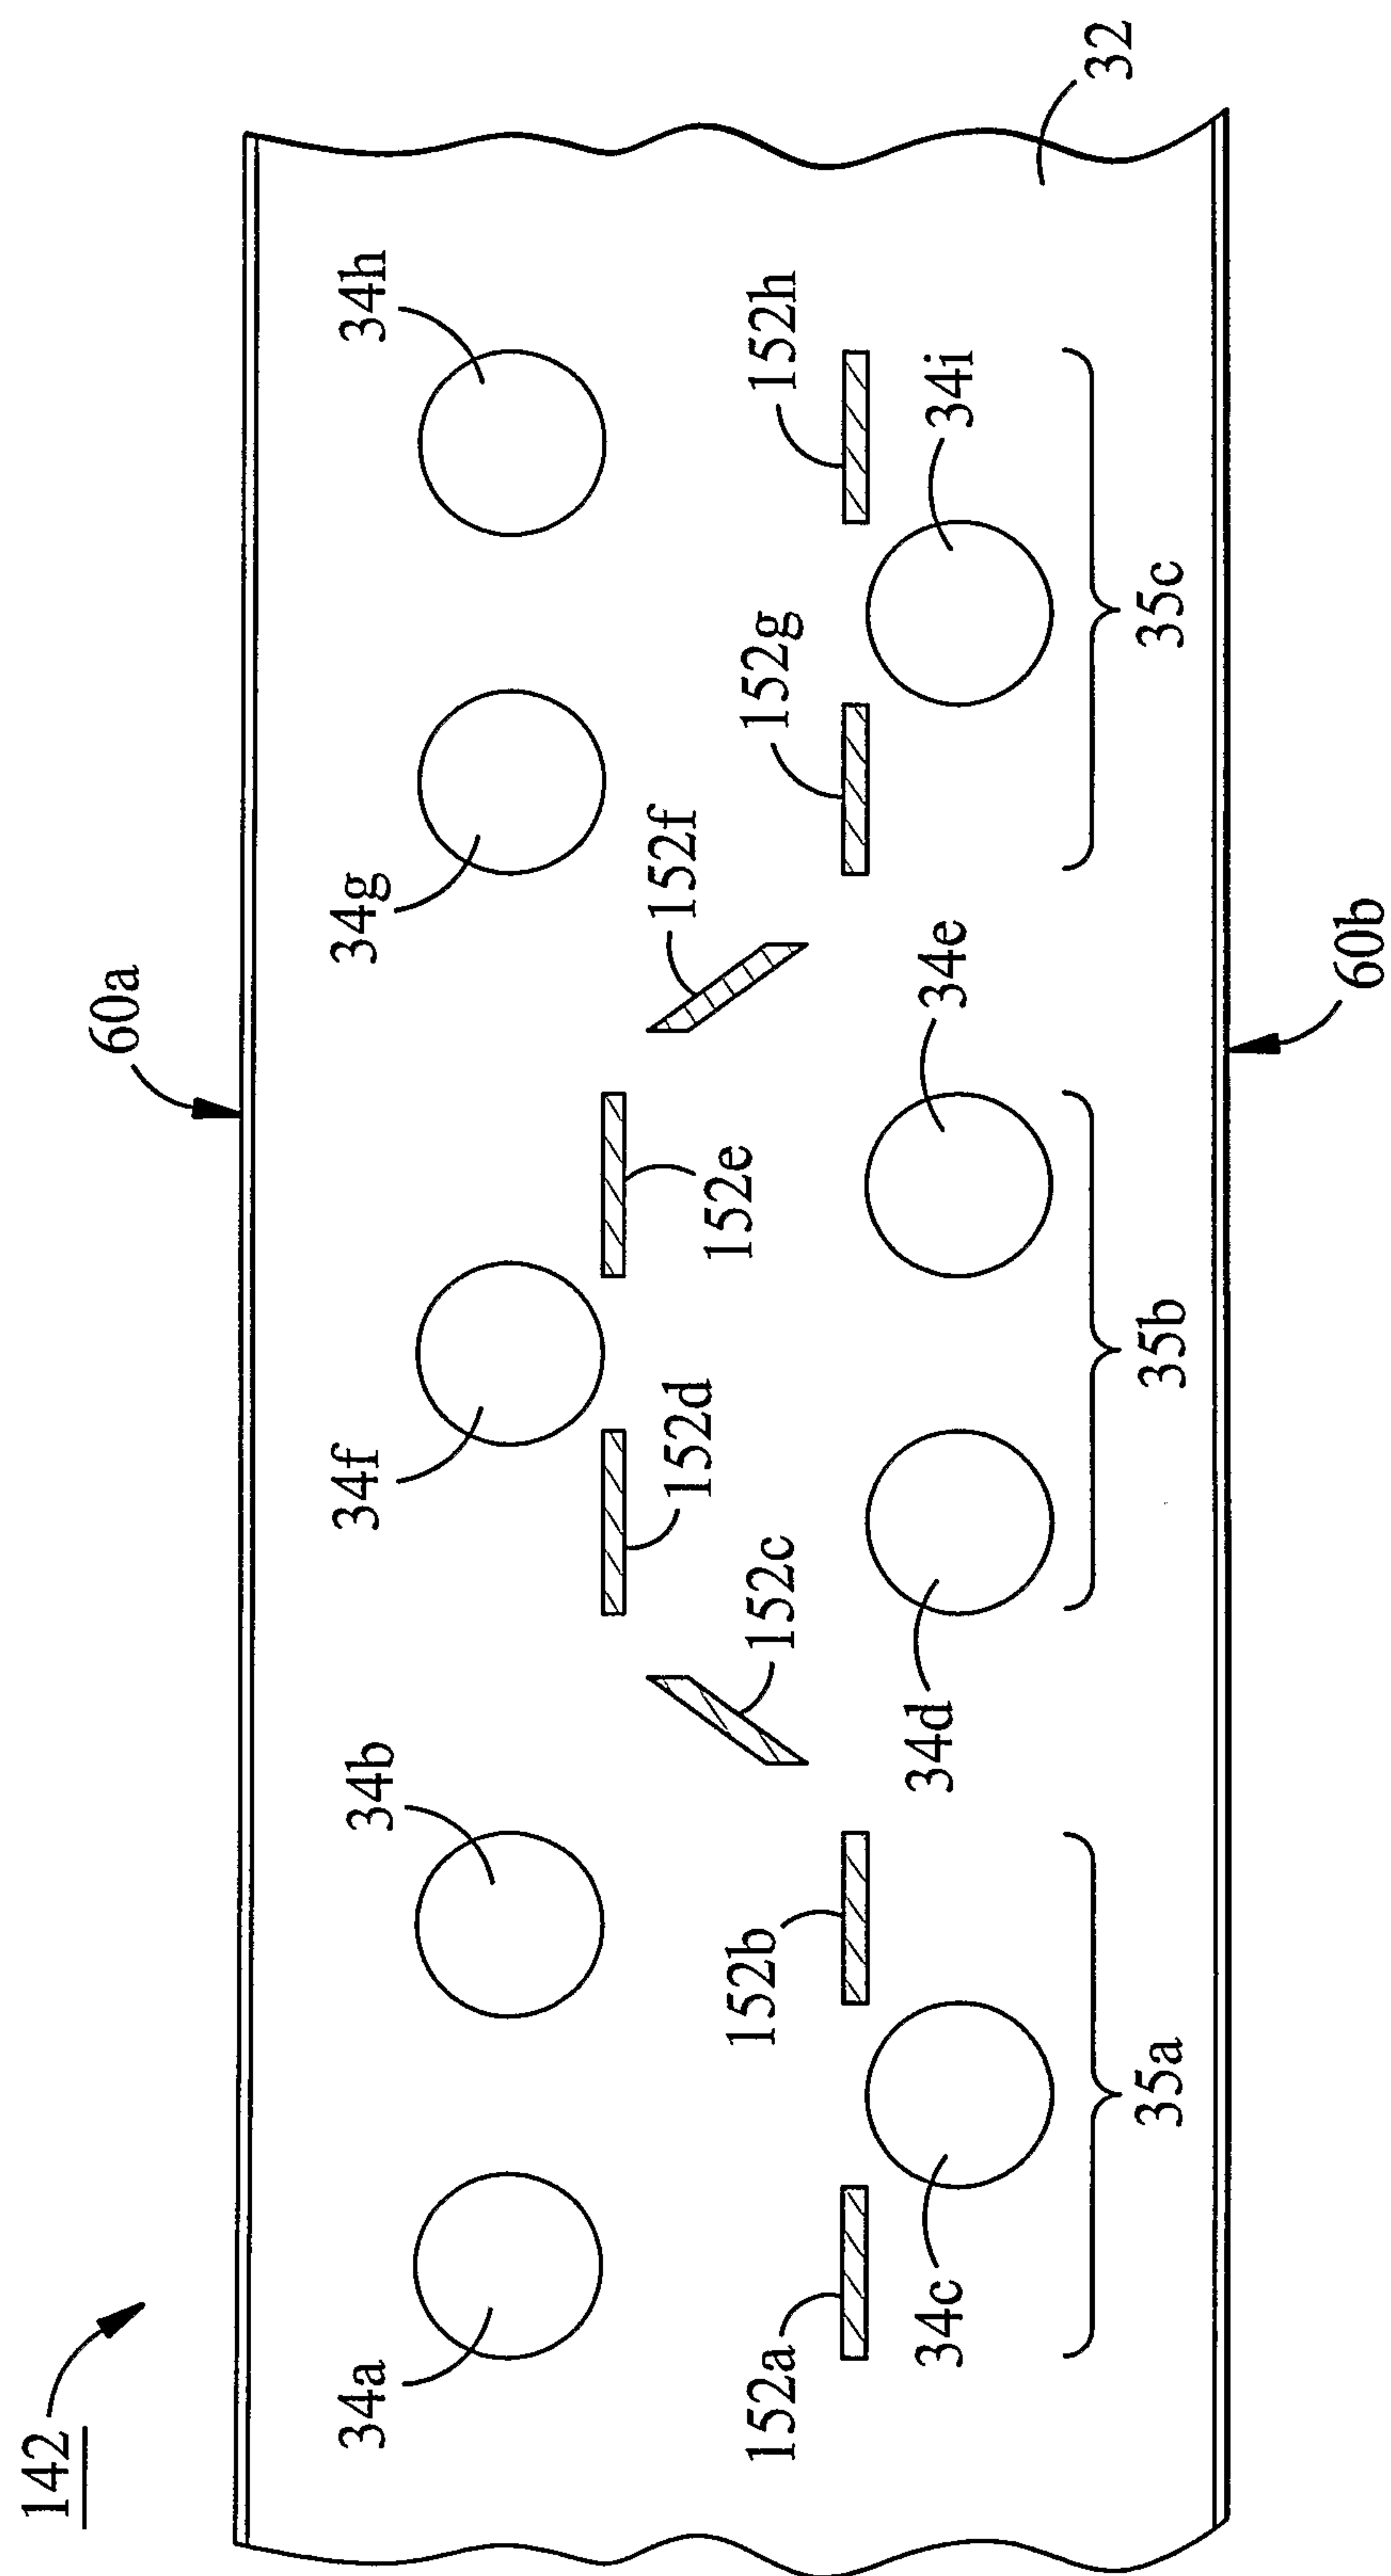


FIG. 10

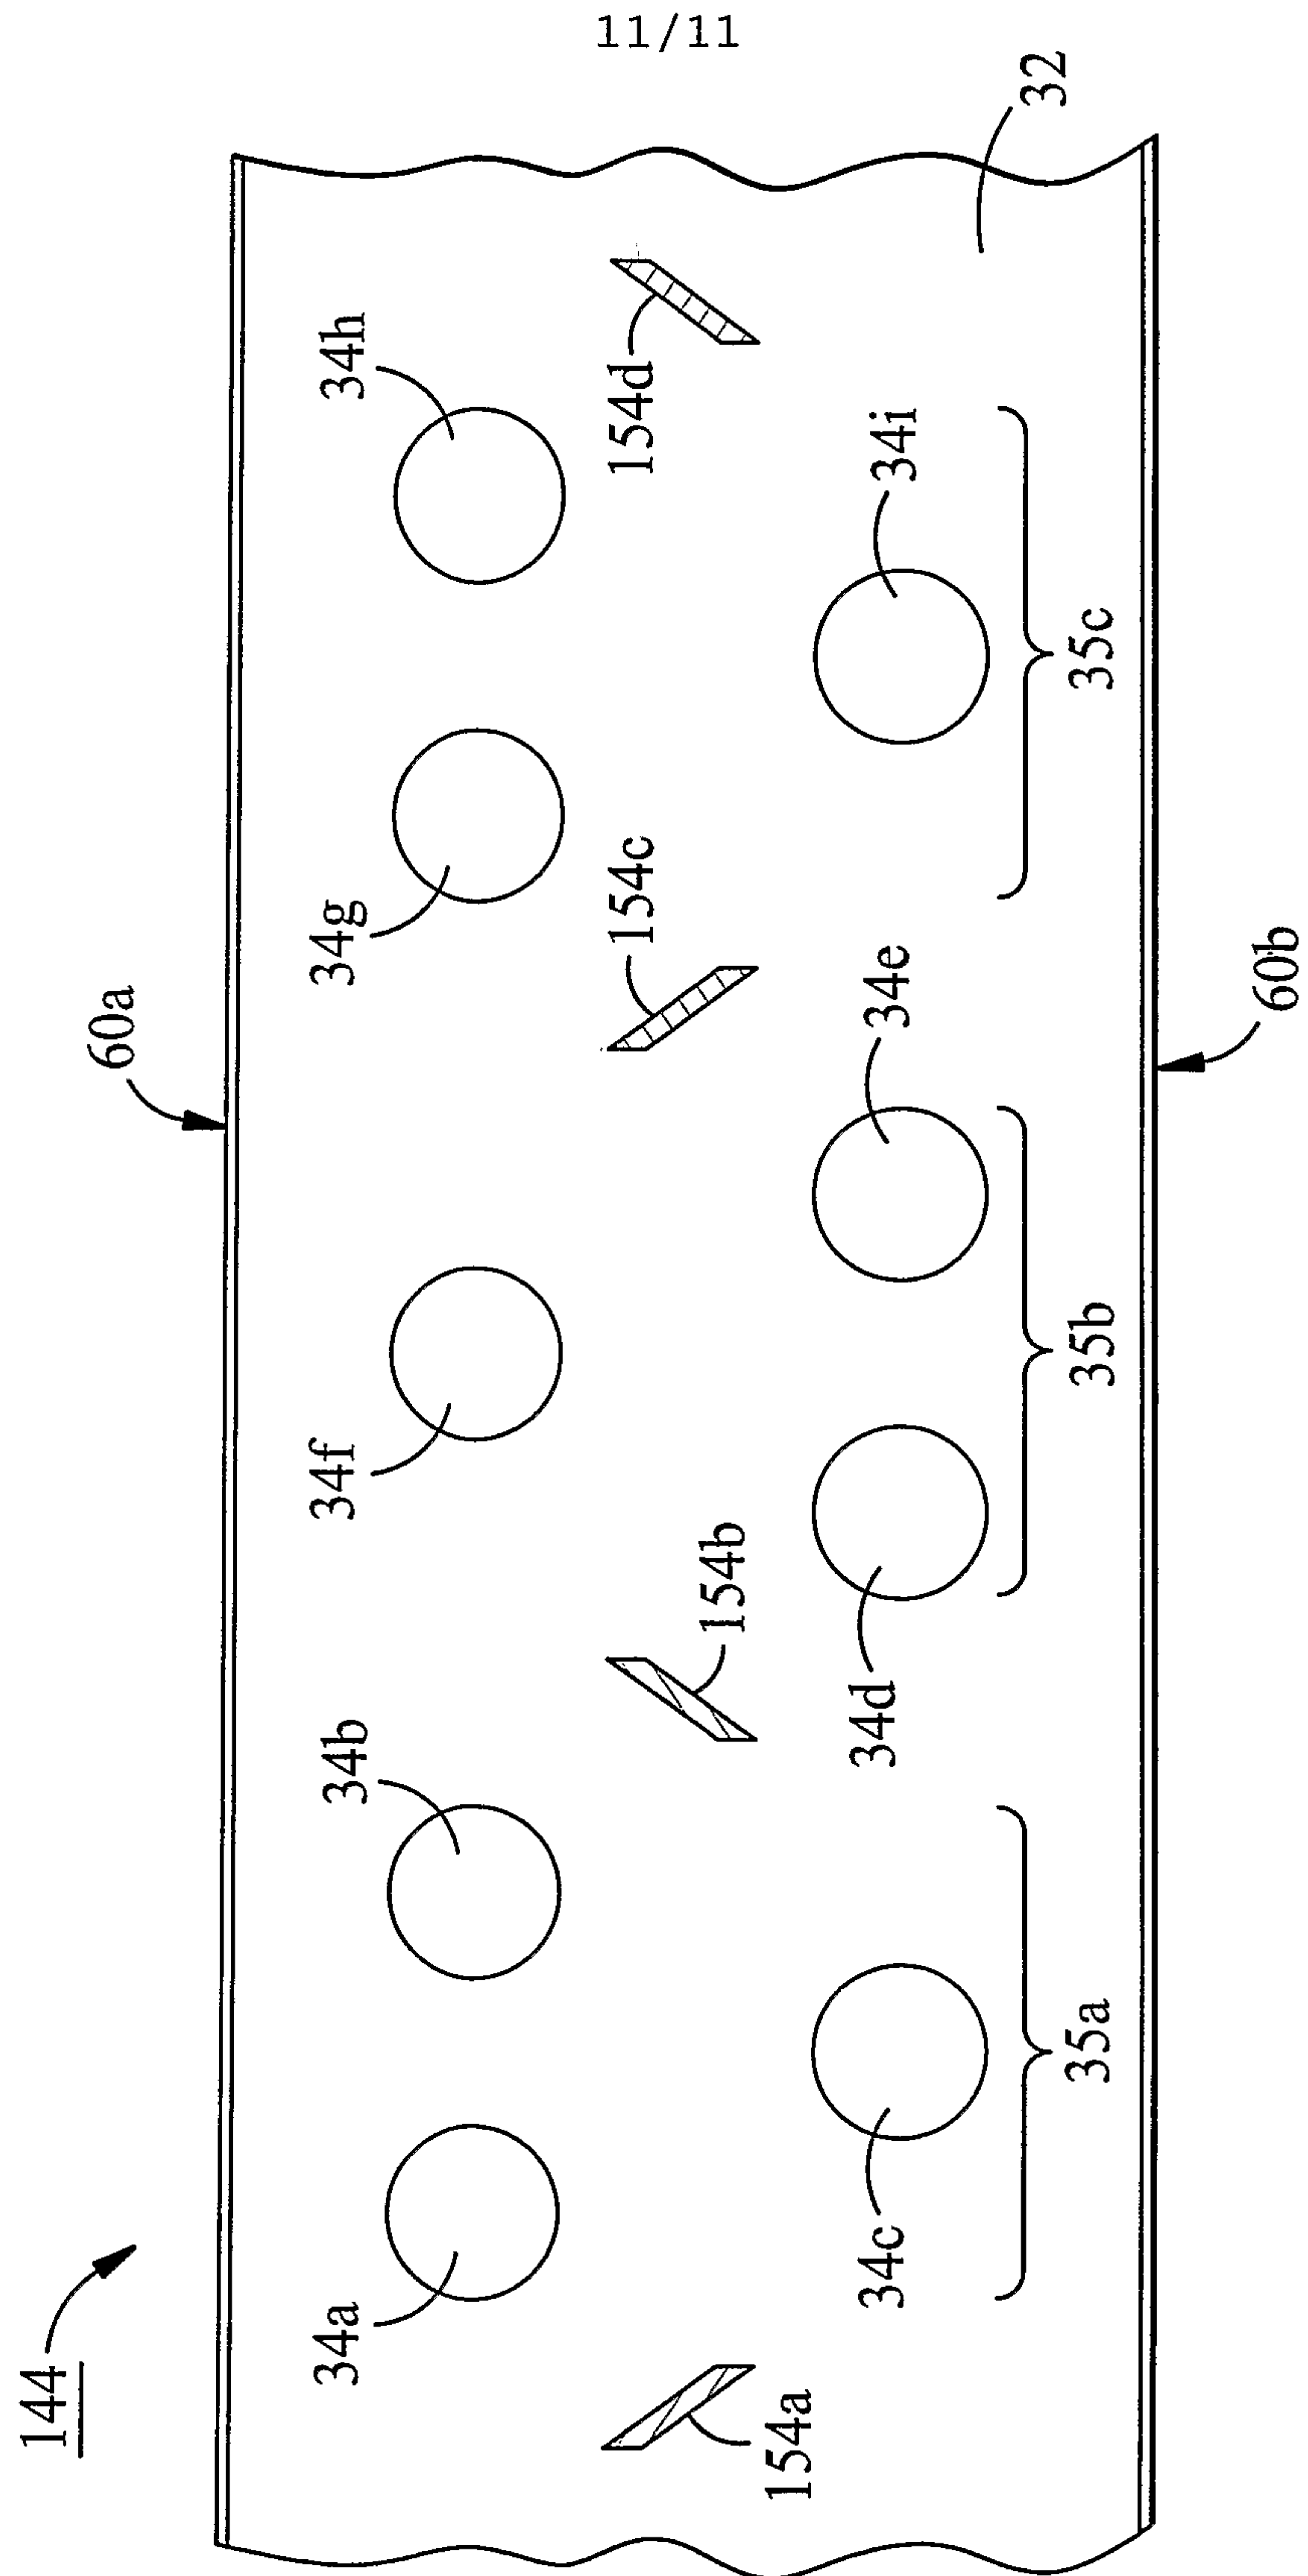


FIG. 11

