


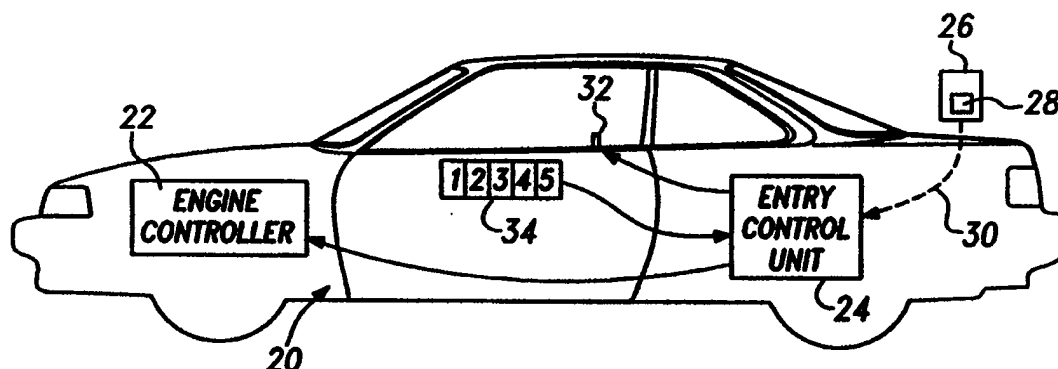

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B60R 25/04, E05B 49/00	A1	(11) International Publication Number: WO 98/45147 (43) International Publication Date: 15 October 1998 (15.10.98)
(21) International Application Number: PCT/US98/06544 (22) International Filing Date: 2 April 1998 (02.04.98) (30) Priority Data: 08/835,383 7 April 1997 (07.04.97) US (71) Applicant: UT AUTOMOTIVE DEARBORN, INC. [US/US]; 5200 Auto Club Drive, Dearborn, MI 48126 (US). (72) Inventors: KOOPMAN, Philip, J., Jr.; 6537 Darlington Road, Pittsburgh, PA 15217 (US). CARROLL, Roger, D.; Apartment 217, 14601 Portland Avenue S., Burnsville, MN 55306 (US). GRZYBOWSKI, Richard; 690 Old Turnpike Road, Plantsville, CT 06479 (US). MARSHALL, Paul; 41 Cotswold Way, Avon, CT 06001 (US). (74) Agents: GASKEY, David, J. et al.; Howard & Howard Attorneys, P.C., Suite 101, 1400 North Woodward Avenue, Bloomfield Hills, MI 48304 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: VEHICLE SECURITY SYSTEM WITH COMBINED KEY FOB AND KEYPAD ANTI-DRIVEAWAY PROTECTION

**(57) Abstract**

A vehicle security system combines immobilized protection with vehicle entry signalling. Either a remote signalling device (26) is used to generate a remote signal (30) or an input device such as a keypad on car exterior or door (34), mounted on the vehicle, is used to generate an access signal. An entry control unit (24) receives and interprets the remote signal or the access signal and unlocks the vehicle doors when appropriate. At the same time, the entry control unit communicates with an engine controller (22) that an appropriate signal has been received. In response, the engine controller enables the vehicle engine to be started so that the vehicle can be driven in a conventional manner.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

VEHICLE SECURITY SYSTEM WITH COMBINED KEY FOB AND KEYPAD ANTI-DRIVEAWAY PROTECTION

BACKGROUND OF THE INVENTION

5

This invention generally relates to vehicle security systems. More particularly, this invention relates to a system requiring a unique access signal from a remote signalling device or an input device mounted on a vehicle before the vehicle engine will be activated.

10

Vehicle theft is currently a considerable problem. A variety of attempts have been made to reduce the possibility for a vehicle to be stolen. One proposal has been to implement a system that prevents a potential thief from "hot-wiring" a vehicle or otherwise driving away the vehicle without having a legitimate ignition key. One currently used system includes placing a signalling device on an ignition key that provides an indication to an engine controller that a legitimate ignition key is in use. While such systems are useful, they are not without disadvantages.

15

20

Anti-driveaway systems that include a radio frequency transponder on an ignition key require a special purpose antenna located in the steering column of the vehicle. The special purpose antenna is used to receive an authentication code from the transponder in the key. The antenna also typically serves the purpose of uplinking power to the transponder on the key. The antenna itself introduces additional hardware and expense to the vehicle. Another problem associated with such systems is the difficulty of locating the antenna within a steering column, where space is typically at a premium.

25

30

A further difficulty is that the transponder mounted on the key introduces further additional expense. Moreover, the transponder must have some sort of non-volatile memory to implement a rolling code that is useable with uplinked radio frequency power so that it can function in a desired manner. Providing such a non-volatile memory in a transponder on a key

becomes technically challenging, especially in view of the desire to keep expense at a minimum.

This invention addresses the need to provide an anti-driveaway protection feature without requiring additional circuitry or hardware such as an antenna in the steering column and a transponder on an ignition key. This invention provides the further advantage of creating the possibility for eliminating hardware associated with conventional mechanical door locks.

SUMMARY OF THE INVENTION

In general terms, this invention is a vehicle security system that utilizes a signal from a remote signalling device or an input device mounted on a vehicle to control access to the vehicle and the ability to start the vehicle engine. A system designed according to this invention includes a controller that controls an operation condition of the engine and a lock condition of a door lock associated with the vehicle. The controller includes a receiver portion. A remote signalling device can be used to generate a remote signal that is received by the controller receiver portion. Additionally, an input device is supported on the vehicle and has a signal generating portion that can be used to generate an access signal that is also received by the controller receiver portion. The controller changes the lock condition of the door lock from a locked condition into an unlocked condition and the operation condition of the engine from an unusable condition into a usable condition when the controller receives either the remote signal from the remote signalling device or the access signal from the input device mounted on the vehicle.

In the preferred embodiment, the remote signalling device is a key fob having a manually actuatable switch for generating a radio frequency remote signal. The input device mounted on the vehicle preferably is a numeric keypad mounted on the exterior of the doors of the vehicle. A unique combination of the numeric keypads is used to generate the access signal that is then interpreted by the controller.

The various features and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the presently preferred embodiment. The drawing that accompanies the detailed description is appropriately described as follows.

5

BRIEF DESCRIPTION OF THE DRAWING

The figure schematically illustrates a vehicle security system designed according to this invention.

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The figure diagrammatically illustrates a vehicle 20 that includes an electronic engine controller 22 and an electronic entry control unit 24. The controller 22 and the entry control unit 24 are schematically illustrated as discrete components for illustration and discussion purposes only. Given this specification, one skilled in the art will realize that the engine controller 22 and the entry control unit 24 can be achieved through a single microprocessor, other dedicated circuitry and/or custom designed software.

15

20

A remote signalling device 26 preferably is a hand-held key fob. The remote signalling device 26 includes a mechanically actuatable switch 28 that, when actuated, causes a signal 30 to be generated that is received and interpreted by the entry control unit 24. The signal 30 preferably is a radio frequency signal. Those skilled in the art will realize that other types of short range signals can be implemented such as infrared or ultrasound.

25

Upon receiving an appropriate signal from the remote signalling device 26, the entry control unit 24 changes the vehicle locking device 32 from a locked condition into an unlocked condition. The vehicle locking device 32 is schematically illustrated and can include any conventional locking mechanism that is at least partially electronically controllable.

30

At the same time that the entry control unit 24 determines it receives an appropriate remote signal 30, it signals to the engine controller 22 that an appropriate signal has been received. At that point, the engine controller 22 enables the engine to be started. In other words, the engine controller 22 is responsible for the operation condition of the engine. The engine is placed into an unusable condition, where the engine cannot be started, or into a useable condition, where the engine can be started and the vehicle driven in a conventional fashion. The engine controller 22 is responsible for maintaining the operation condition of the engine.

For those instances where a remote signalling device should fail, this invention includes an input device 34 mounted on the vehicle. In the preferred embodiment, the input device 34 comprises a numerical keypad mounted on the exterior of at least one door of the vehicle. The vehicle owner can manipulate the numeric keypad in a pre-selected order to generate an access signal that corresponds to a personal identification number of the vehicle owner. This access signal is communicated to the entry control unit 24, which then unlocks the locking device 32. At the same time, the engine control unit 24 signals to the engine controller 22 that legitimate vehicle access has been accomplished and that the engine should be placed into a useable operation condition so that the vehicle can be started and driven as desired. The input device 34 is useful in situations where the remote signalling device 26 has failed because of a dead battery or in the undesirable event that the remote signalling device 26 was locked inside the vehicle.

The remote signalling device 26 preferably generates a signal that is an encrypted rolling code having a unidirectional transmission. In the preferred embodiment, the access signal generated through the input device 34 need not match the remote signal 30 from the remote signalling device 26. The entry control unit 24 preferably is programmed to recognize either signal.

A system designed according to this invention preferably is used in the following general manner. The vehicle owner unlocks the vehicle doors using the remote signalling device 26. The engine controller 22 then places the

engine into a useable operation condition. Alternatively, the vehicle owner generates an access signal using the input device 34. The vehicle operator then inserts an ignition key, in a traditional fashion, and utilizes the vehicle as desired. The engine controller 22 maintains the engine in a useable operation condition until after the ignition key is later removed, regardless of the door lock positions.

In the preferred embodiment, when the doors of the vehicle remain closed for more than a preselected period of time (30 seconds, for example), then the door locks 32 are returned to a locked condition and the engine controller 22 disables the engine, provided that there is no key in the ignition. Similarly, when the ignition key is removed, the doors are locked and the engine is disabled after a preselected period of time. Replacing the key into the ignition before the designated period of time elapses, however, allows the driver to utilize the vehicle. Having such a timing sequence for re-locking the doors and disabling the engine is most preferred. It ensures that the engine is not left in an enabled or useable operation condition when the vehicle owner does not desire to drive the vehicle. In the event that the engine controller inappropriately disables the engine, in the preferred embodiment, the vehicle owner simply generates a new remote signal or access signal as described above.

A number of advantages are provided by a system designed according to this invention. The combination of the input device 34 and the remote signalling device 26 provides the vehicle owner the ability to legitimately use the vehicle regardless of what happens to the remote signalling device 26. A system designed according to this invention also eliminates the need for a transponder on the ignition key or the remote signalling device 26. Further, cost savings are achieved by eliminating an antenna in the steering column and potentially eliminating the hardware needed for conventional mechanical lock cylinders.

The ability to unlock the vehicle using the input device 34 may not always be preferred over a mechanical key. The use of a remote signalling

device 26 in almost all circumstances however, will be preferred over a mechanical key. Therefore, in a system designed according to this invention, conventional mechanical lock systems can be replaced with an electro-mechanical latch, which reduces the ability for a potential thief to
5 manipulate the door locks and provides the additional benefit of having "hands-off" door opening capabilities.

The preceding description is exemplary rather than limiting in nature. Variations and modifications to the disclosed embodiment may become apparent to those skilled in the art that do not necessarily depart from the
10 purview and spirit of this invention. Accordingly, the following claims must be studied to determine the scope of legal protection afforded this invention.

CLAIMS

What is claimed is:

- 5 1. A vehicle security system, comprising:
 a controller that controls an operation condition of an engine associated
 with the vehicle and a lock condition of a doorlock associated with the vehicle,
 said controller including a receiver portion;
 a remote signalling device that selectively generates a remote signal that
10 is received by said controller receiver portion; and
 an input device supported on the vehicle and having a signal generating
 portion that selectively generates an access signal that is received by said
 controller receiver portion;
 wherein said controller changes said lock condition of said doorlock
15 from a locked condition into an unlocked condition and said operation
 condition of said engine from an unusable condition into a useable condition
 upon receiving either of said remote signal or said access signal.
- 20 2. The system of claim 1, wherein said controller comprises a
 microprocessor.
- 25 3. The system of claim 1, wherein said remote signalling device
 comprises a hand-held fob having a transmitter portion that generates said
 remote signal and a manually actuatable switch for activating said transmitter
 portion.
4. The system of claim 1, wherein said input device comprises a
 keypad supported on an exterior portion of the vehicle.

5. The system of claim 1, wherein said input device is coupled directly to said controller and said remote signal comprises a radio frequency signal.

5 6. The system of claim 1, wherein said doorlock comprises an electro-mechanical latch.

7. A method of controlling a vehicle security system having a remote signalling device and an input device supported on the vehicle,
10 comprising the steps of:

(A) defining a first condition where a remote signal has been generated by the remote signalling device;

(B) defining a second condition where an access signal has been generated by the input device;

15 (C) determining if the first condition from step (A) exists or the second condition from step (B) exists; and

(D) placing a vehicle entry subsystem into an unlocked condition and placing a vehicle engine into a useable operation condition when either the first or second condition exists.

20 8. The method of claim 7, further comprising the steps of determining when an ignition key is inserted into a key slot and used to start the vehicle engine and maintaining the engine in the useable operation condition until the ignition key is subsequently removed from the key slot.

25 9. The method of claim 7, wherein step (D) is performed by changing a condition of the vehicle entry subsystem from a locked condition to the unlocked condition and changing the operation condition of the vehicle engine from a nonusable condition to the useable operation condition.

10. The method of claim 7, further comprising the steps of
determining a start time when said first or second condition first exists;
defining a third condition where a door associated with the vehicle has
been opened subsequent to said start time;

5 determining whether the third condition exists within a preselected
period from the start time; and

placing the vehicle entry subsystem into a locked condition when the
third condition does not exist within the preselected period.

10 11. The method of claim 10, further comprising the steps of
determining whether an ignition key is in place in a slot within the
vehicle and

placing the vehicle engine into an unusable condition when the ignition
key is not in place and when the third condition does not exist within the
15 preselected period.

12. The method of claim 7, further comprising the steps of
determining whether an ignition key is inserted into a slot subsequent
to step (D) being completed;

20 defining a turn off condition where the ignition key is removed from
the slot subsequent to being inserted into the slot;

determining whether the turn off condition exists for a preselected
period; and

25 placing the vehicle entry subsystem into a locked condition and the
vehicle engine into an unusable condition when the turn off condition exists for
at least the preselected period.

13. The method of claim 7, further comprising the steps of
determining whether the vehicle engine operation condition has changed
30 into an unusable condition subsequent to step (D) being performed;


generating a remote signal using the remote signalling device from step
(A);

determining if the first condition exists; and

5 placing the vehicle engine into the useable operation condition when the
first condition exists.

14. The method of claim 13, further comprising the steps of
generating an access signal using the input device from step (B), reperforming
step (C) and then reperforming step (D).

1/1

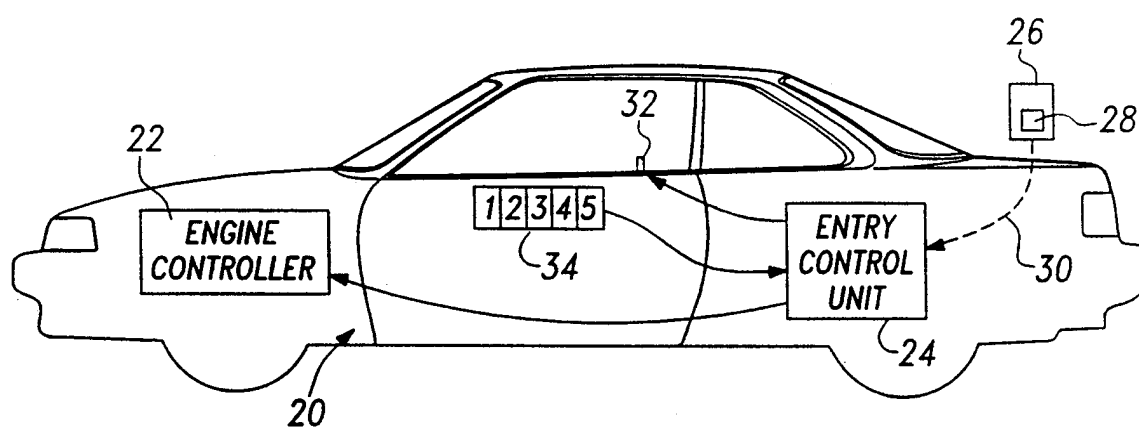

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/06544

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B60R25/04 E05B49/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B60R E05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 887 064 A (DRORI ZE EV ET AL) 12 December 1989 see column 5, line 15 - column 6, line 3 see column 9, line 21 - line 33 see column 18, line 4 - line 9 see column 20, line 14 - line 18 ----	1-3, 5-10, 12-14
X	DE 44 34 571 A (MARQUARDT GMBH) 6 April 1995	1-3,7
Y	see column 3, line 4 - line 43 see column 4, line 7 - line 33 see column 7, line 23 - line 44; figures ----	4
Y	EP 0 292 796 A (GUERRA FELICE ; CHIARLE ROBERTO (IT)) 30 November 1988 see abstract ----- -/-	4



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 August 1998

Date of mailing of the international search report

11/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Areal Calama, A-A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/06544

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 300 739 A (GARDINER TECHNOLOGY) 13 November 1996 see page 5, line 13 - page 6, line 5 see page 7, line 17 - page 8, line 8 ----	1,7
A	DE 44 34 612 A (MARQUARDT GMBH) 6 April 1995 see abstract ----	6
A	DE 44 34 450 A (BOSCH GMBH ROBERT) 28 March 1996 see column 2, line 68 - column 3, line 13; figure 1 ----	1,7
A	US 5 079 435 A (TANAKA AKIRA) 7 January 1992 see column 7, line 64 - column 8, line 54; figures 11,12 -----	1,7,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/06544

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4887064 A	12-12-1989	US 4922224 A US 5146215 A US 5157375 A	01-05-1990 08-09-1992 20-10-1992
DE 4434571 A	06-04-1995	DE 9320270 U DE 4340260 A DE 4421496 A DE 4434587 A DE 4434612 A DE 4434655 A WO 9509748 A WO 9509746 A WO 9509747 A DE 59401986 D DE 59402460 D DE 59402777 D EP 0720543 A EP 0720544 A EP 0720545 A ES 2103607 T ES 2101572 T ES 2103608 T JP 9503181 T DE 4409559 A	05-05-1994 06-04-1995 06-04-1995 06-04-1995 06-04-1995 06-04-1995 13-04-1995 13-04-1995 13-04-1995 10-04-1997 22-05-1997 19-06-1997 10-07-1996 10-07-1996 10-07-1996 16-09-1997 01-07-1997 16-09-1997 31-03-1997 01-06-1995
EP 0292796 A	30-11-1988	NONE	
GB 2300739 A	13-11-1996	NONE	
DE 4434612 A	06-04-1995	DE 9320270 U DE 4340260 A DE 4421496 A DE 4434571 A DE 4434587 A DE 4434612 A DE 4434655 A WO 9509748 A WO 9509746 A WO 9509747 A DE 59401986 D DE 59402460 D	05-05-1994 06-04-1995 06-04-1995 06-04-1995 06-04-1995 06-04-1995 13-04-1995 13-04-1995 13-04-1995 10-04-1997 22-05-1997

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/06544

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4434612 A		DE 59402777 D	19-06-1997
		EP 0720543 A	10-07-1996
		EP 0720544 A	10-07-1996
		EP 0720545 A	10-07-1996
		ES 2103607 T	16-09-1997
		ES 2101572 T	01-07-1997
		ES 2103608 T	16-09-1997
		JP 9503181 T	31-03-1997
		DE 4409559 A	01-06-1995
DE 4434450 A	28-03-1996	WO 9609943 A	04-04-1996
		EP 0734333 A	02-10-1996
		JP 9506061 T	17-06-1997
		PL 314581 A	16-09-1996
US 5079435 A	07-01-1992	JP 2164645 A	25-06-1990
		JP 2597174 B	02-04-1997
		JP 2164646 A	25-06-1990
		JP 2164648 A	25-06-1990
		JP 2710970 B	10-02-1998