



- (51) **International Patent Classification:**
E21B 33/13 (2006.01) *E21B 23/01* (2006.01)
- (21) **International Application Number:**
PCT/US2015/031545
- (22) **International Filing Date:**
19 May 2015 (19.05.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 3000 N. Sam Houston Parkway E., Houston, TX 77032-3219 (US).
- (72) **Inventor:** ROGERS, Henry, Eugene; 5201 NE 48th Street, Oklahoma Cit OK 73121 (US).
- (74) **Agents:** MORICO, Paul et al.; Baker Botts LLP, 910 Louisiana Street, Houston, TX 77002 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD AND APPARATUS FOR IMPROVING CEMENT BOND OF CASING IN CYCLIC LOAD APPLICATIONS

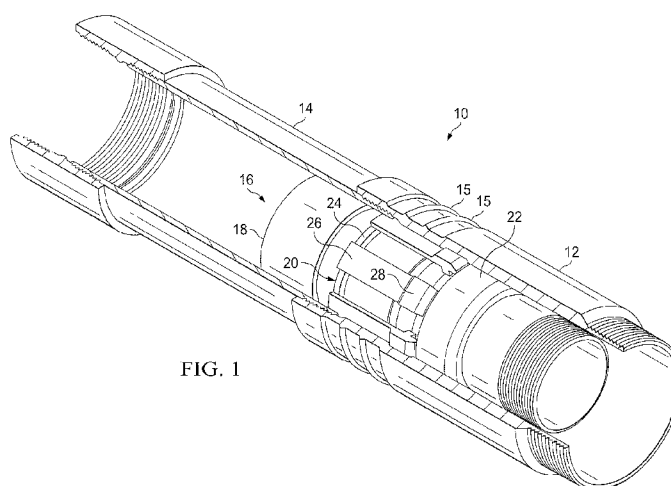


FIG. 1

(57) **Abstract:** An apparatus and method for pre-loading a production casing string being cemented to a section of surface casing and wellbore disposed below the surface casing is disclosed. The apparatus includes an anchor which is secured to a bottom-hole section of the parent casing string. The production casing string is connected to the anchor. Pulling on the anchor puts the production casing string in tension. The anchor includes a lock sleeve defined by a plurality of arms each having tapered ends. The anchor also includes a wedge which secures the tapered ends of the arms in recesses formed within the inner surface of the parent casing string when the rig pulls on production casing string connected to the anchor thereby setting the anchor in the bottom-hole section of the parent casing string. The bottom-hole section of the parent casing string is formed with a plurality of ribs which enhance bonding of the parent casing string to the cement between the parent casing string and wellbore.



METHOD AND APPARATUS FOR IMPROVING CEMENT BOND OF CASING IN CYCLIC LOAD APPLICATIONS

TECHNICAL FIELD

5 The present disclosure relates generally to downhole cementing applications, and, more particularly, to an improved method and apparatus for bonding casing to a subterranean formation in cyclic load applications.

BACKGROUND

10 Hydrocarbons, such as oil and gas, are commonly obtained from subterranean formations that may be located onshore or offshore. The development of subterranean operations and the processes involved in removing hydrocarbons from a subterranean formation typically include a number of different steps such as, for example, drilling a wellbore at a desired well site, treating the wellbore to optimize production of hydrocarbons, and performing the necessary steps to produce and process the hydrocarbons from the subterranean formation.

15 Certain subterranean reservoirs contain hydrocarbons, which are difficult to produce because they are highly viscous. Tar sand formations are one example of such a reservoir. One common technique for recovering oil and gas from such subterranean reservoirs is to inject them with steam. The steam makes the hydrocarbons less viscous thereby making them easier to produce through conventional production casing or tubing. There are several different methods
20 for injecting steam into the formation. One such manner is simple injection of steam into a wellbore and producing from a nearby or adjacent wellbore. The other is by use of a Huff & Puff well. A Huff & Puff well has the advantage of simply requiring a single well and thereby avoids the cost and expense of drilling multiple wells.

 A drawback, however, of Huff & Puff wells, and other steam injection wells is that the
25 wide temperature and pressure variations that are generated through the steam injection process and subsequent cooling of the well to allow production to flow puts stress on the cement bonds that are formed between the casing string and the wellbore. This is because the casing string itself expands and contracts in response to the temperature and pressure variations. Over time, this expansion and contraction of the casing string can result in a failure of the bond formed
30 between the casing string and the wellbore, which can be detrimental to the structural integrity of the well and to the hydraulic seal formed by the cement.

 Studies have found that if the casing string is pre-stressed, for example, by being put under tension prior to cementing to the wellbore, it can better withstand the wide temperature

and pressure swings that occur with the steam injection process. This is because the pre-stressing of the casing string limits the expansion and contraction that occurs with the temperature and pressure swings.

One technique that has been developed to pre-tension the casing string involves employing two different types of cement slurries, each having different set times. The first step in this process is to pump the slurry having the longer set time, known as the lead slurry, down the casing string after it has been installed in the wellbore and back up the annulus formed between the casing string and the wellbore. The next step is to pump the slurry with the shorter set time, known as the tail slurry, behind the lead slurry. The tail slurry is pumped down the casing string and back up the annulus. It is placed along the bottom portion of the annulus, for example, along the bottom 500 feet in a 2,000-foot well. Once the tail slurry sets, rigidly securing the bottom portion of casing string to the formation, then the rig pulls up on the top of the casing string, the casing string is thereby put into tension. Slips are then set at the surface to hold the casing string in tension as the lead slurry sets. Once both slurries have set, the casing string remains bonded in place under tension.

While this technique puts the casing string in a pre-stressed condition and thereby minimizes the cement bond failures that would otherwise occur without pre-loading, it has the drawback of requiring the rig to remain idle while the tail slurry sets. This results in lost rig time of approximately 5 hours or more for each cement job performed. In fields having hundreds or thousands of wells, this can be quite costly for the well operator.

The present disclosure is directed to a method and apparatus that seeks to pre-stress the casing string while minimizing the costly rig time required with current pre-tensioning techniques.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present disclosure and its features and advantages, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

5 FIG. 1 is a partial cut-away view of a section of parent casing and a casing anchor collar disposed therein with a tension set casing anchor disposed within the casing anchor collar in accordance with the present disclosure;

 FIG. 2 is a partial cut-away view along the longitudinal direction of the tension set casing anchor of FIG. 1 being run in the parent casing;

10 FIG. 3 is a partial cut-away view along the longitudinal direction of the tension set casing anchor of FIG. 1 shown engaged with a casing anchor collar;

 FIG. 4 is a partial cut-away view along the longitudinal direction of the tension set casing anchor of FIG. 1 shown in the anchored position within the casing anchor collar whereby the parent casing can be placed under tension; and

15 FIG. 5 is a cross-sectional view of the casing liner installed within the wellbore illustrating the setting of the casing anchor.

DETAILED DESCRIPTION

Illustrative embodiments of the present disclosure are described in detail herein. In the interest of clarity, not all features of an actual implementation are described in this specification. It will of course be appreciated that in the development of any such actual embodiment, numerous implementation specific decisions must be made to achieve developers' specific goals, such as compliance with system related and business related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of the present disclosure. Furthermore, in no way should the following examples be read to limit, or define, the scope of the disclosure.

Turning to FIG. 1, a bottom-hole section of the parent and inner casing string to be cemented to the wellbore formed in a subterranean formation is shown generally by reference numeral 10. The surface casing or pipe, which is the outer casing typically run into the upper section of the well bore, has a casing collar 12 secured to a section of parent casing 14 at the bottom-hole section of the surface casing or pipe. The casing collar 12 is designed to match the casing size, weight, grade and thread of the parent casing 14. The casing collar 12 has a profile formed on its inner surface which is adapted to receive and engage with a casing anchor 16 for use in putting the inner casing, also known as the production casing or pipe, in tension. The production casing or pipe is smaller in diameter and runs from the surface at the rig to the very bottom of the well bore. It connects above and below to the casing anchor 16 via threaded connections. The production casing is nested within the surface casing or pipe 14 through the upper section of the wellbore. It is the casing that is to be placed in tension in connection with the present disclosure. It is ultimately cemented to the surface or parent casing 14 in the upper section of the well bore and to the well bore itself in the lower regions of the well. On its outer surface, the casing collar 12 has a plurality of ribs 15. The ribs 15 enable the casing collar 12 to function in much the same way that rebar functions in steel-reinforced concrete. It enhances the bonding and anchoring of the surface casing to the cement formed in the annulus (not shown) between the surface casing and wellbore.

The casing anchor 16 is formed of a number of different components, including a main body 18, which is a generally tubular-shaped member formed of a steel alloy having the same general size, weight, grade and thread as the casing string. As those of ordinary skill in the art will appreciate, the outer diameter of the main body 18 is smaller than the inner diameter of the casing collar 12 and parent casing 14 to allow the casing anchor 16 to travel down the interior of the surface casing. The casing anchor 16 also includes a lock sleeve 20, which is slidably

installed on the main body 18. The casing anchor 16 further includes a lock sleeve wedge 22, which is slidably installed on the main body 18 adjacent to the lock sleeve 20. The wedge 22 supports the lock sleeve 20 as it engages the casing anchor collar 14. The lock sleeve 20 and wedge 22 are also formed of a steel alloy having the same general size, weight, and grade as the production casing.

In one embodiment, the lock sleeve 20 has a generally spider-like shape. It is defined by a generally circular ring 24 having a plurality of arms 26 projecting therefrom. In one exemplary embodiment, there are eight arms 26 projecting from, and equally-spaced around, the generally circular ring 24. The plurality of arms 26 are generally flexible at least in the radial direction, such that they may be placed in compression when the casing anchor 16 is deployed downhole into the surface casing. Each of the arms 26 has an end or tip 28 which has opposing tapered surfaces, as better illustrated in FIGs. 2-4. The tapered surfaces of the tips 28 enable the tips to engage within one or more recesses 30 formed within the inner surface of the casing collar 12 during the step of securing the casing anchor 18 to the casing collar 12. The tips 28 of the arms 26 of the lock sleeve 20 also have a flange 32 formed on the surface of the tip opposite the opposing tapered surfaces. The flanges 32 rest within one or more recesses 34 formed on the outer circumferential surface of the main body 18 of the casing anchor 16 when the casing anchor is being deployed down the surface casing just prior to being secured within the casing collar 12.

The wedge 22 is a generally ring-shaped member and functions to wedge the tapered tips 28 of the lock sleeve arms 26 into the recesses 30 formed in the inner surface of the casing collar 12 when the work string pulls up on the casing anchor 16 once it has been set in the casing collar 12, as shown in FIG. 4. The wedge 22 forces one of the opposing tapered surfaces of the tips 28 of the lock sleeve into a complementary tapered surface in the recess 30. In one embodiment, the tapered surfaces of the tips 28 and complementary surface in the recess 30 are formed at a 45 degree angle. The lodging of the wedge 22 into the tips 28 of the lock sleeve arms 26 locks the casing anchor 16 into the casing collar 12, thereby enabling the rig to pull on the production casing string and thereby place the production casing string in tension.

The present disclosure is also directed to a method for cementing a production casing string to the surface casing and well bore. The method includes landing the production casing string 40 in the surface casing 14, as shown in FIGs. 3-5. The method also includes deploying the casing anchor 16 into the bottom-hole section of the surface casing string, and more specifically, into the casing collar 12. The casing anchor 16 is delivered proximate the recesses 30 formed in the inner surface of the casing collar 12 such that the arms 26 of the locking sleeve

20 spring into the recesses 30. The production casing string 40 is then pulled upwards forcing the wedge 22 into the locking sleeve 20 thereby locking the arms 26 into the recesses 30.

With the casing anchor 16 set, the rig is able to put the casing string in tension. Slips can be set at the surface to maintain the production casing string 40 in tension while the production casing string is being cemented to the surface casing 14 and wellbore. The production casing string 40 above the slips can be detached from the rest of the casing once the slips have been set, thereby enabling the rig to be deployed to another well, which can save valuable rig time and money for the well operator. Once the production casing string has been placed in tension, cement slurry can be pumped down the bore of the production casing string and up into the annulus formed between the production casing string 40 and the surface casing 14 and wellbore below the surface casing 14. The cement slurry then can be allowed to set while the production casing string 40 is under tension. This acts to preload the casing string and thereby minimize its expansion and contraction during large swings in downhole temperature and pressure, which are common in a number of well types, including, for example, Huff & Puff wells.

Once the cement bond has formed between the production casing string 40 and the surface casing 14 and wellbore below the surface casing, further well operations, such as perforation, gravel packing, zonal isolation, etc., may be performed on the well.

Although the present disclosure and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the disclosure as defined by the following claims.

WHAT IS CLAIMED IS:

1. An apparatus, comprising:

a generally tubular-shaped member;

a lock sleeve formed over the generally-tubular shaped member; and

5 a wedge formed over the generally tubular-shaped member and adjacent to the lock sleeve.

2. The apparatus according to claim 1, wherein the lock sleeve is formed of one or

10 more locking arms having generally tapered ends, the one or more locking arms capable of being placed under compression.

3. The apparatus according to claim 2, wherein the wedge is a generally

cylindrically shaped member having a tapered surface capable of engaging the tapered ends of the plurality of locking arms of the lock sleeve.

15

4. The apparatus according to claim 3, wherein the generally tubular-shaped member

is capable of being detachably fixed to an inside surface of a bottom-hole section of a parent casing string.

5. The apparatus according to claim 4, wherein the tapered ends of the one or more

20

locking arms are capable of fitting within recesses formed on the inner surface of the section of parent casing string.

6. The apparatus according to claim 4, wherein the bottom-hole section of parent

25

casing string has a plurality of ribs formed on an outer circumferential surface.

7. An anchor for use in tensioning a production casing string, comprising:

an anchor body, which is generally tubular-shaped and capable of being installed within a

bottom-hole section of parent casing string into which the production casing is capable of being

30

placed;

a lock sleeve disposed around the anchor body; and

a wedge disposed around the anchor body and adjacent to the lock sleeve.

8. The anchor according to claim 7, wherein the lock sleeve is formed of one or more locking arms having generally tapered ends, the one or more locking arms capable of being placed under compression.

9. The apparatus according to claim 8, wherein the wedge is a generally cylindrically shaped member having a tapered surface capable of engaging the tapered ends of the one or more locking arms of the lock sleeve.

10. The apparatus according to claim 9, wherein the anchor body is capable of being detachably fixed to an inside surface of a section of the parent casing string.

11. The apparatus according to claim 10, wherein the tapered ends of the one or more locking arms are capable of fitting within recesses formed on the inner surface of the bottom-hole section of the parent casing string.

12. The apparatus according to claim 10, wherein the bottom-hole section of the parent casing string has a plurality of ribs formed on an outer circumferential surface.

13. A method for cementing a production casing string disposed within a parent casing to the parent casing and a well bore disposed below the parent casing, comprising:

- (a) attaching the production casing string to an anchor;
- (b) attaching the anchor to a bottom-hole section of the parent casing;
- (c) pulling on the production casing string so as to place the production casing string in tension;
- (d) pumping a cement slurry down the production casing string and up into an annulus formed between the production casing string and the parent casing and the annulus between the well bore and production casing below the parent casing; and
- (e) allowing the cement slurry to set while the production casing string is in tension.

14. The method according to claim 13, further comprising setting slips at the surface so as to hold the production casing string in tension.

15. The method according to claim 14, further comprising detaching the production casing string above the slips once the slips have been set.


5 16. The method according to claim 13, wherein the anchor is attached to the bottom-hole section of the parent casing string by setting the anchor in the bottom-hole section of the parent casing string with the production casing string.


10 17. The method according to claim 16, wherein the anchor comprises a body, a lock sleeve disposed around the anchor body, and a wedge disposed around the anchor body adjacent to the lock sleeve and the anchor is set in the bottom-hole section of the parent casing string by activating the lock sleeve to engage with an inner surface of the parent casing string and pulling on the anchor with the production casing string so as to drive the wedge into the lock sleeve thereby fixing the anchor body to the bottom-hole section of the parent casing string.

15 18. The method according to claim 13, wherein the production casing string is attached to the anchor prior to the anchor being attached to the parent casing string.

20 19. The method according to claim 18, wherein the anchor is run in a section of parent casing prior to attaching the anchor to the bottom-hole section of the parent casing string.

25 20. The method according to claim 13, wherein the bottom-hole section of the parent casing string is formed with a plurality of ribs, which aid in binding the bottom-hole section of the parent casing string to the well bore prior to cementing the production casing string to the parent casing string and well bore.

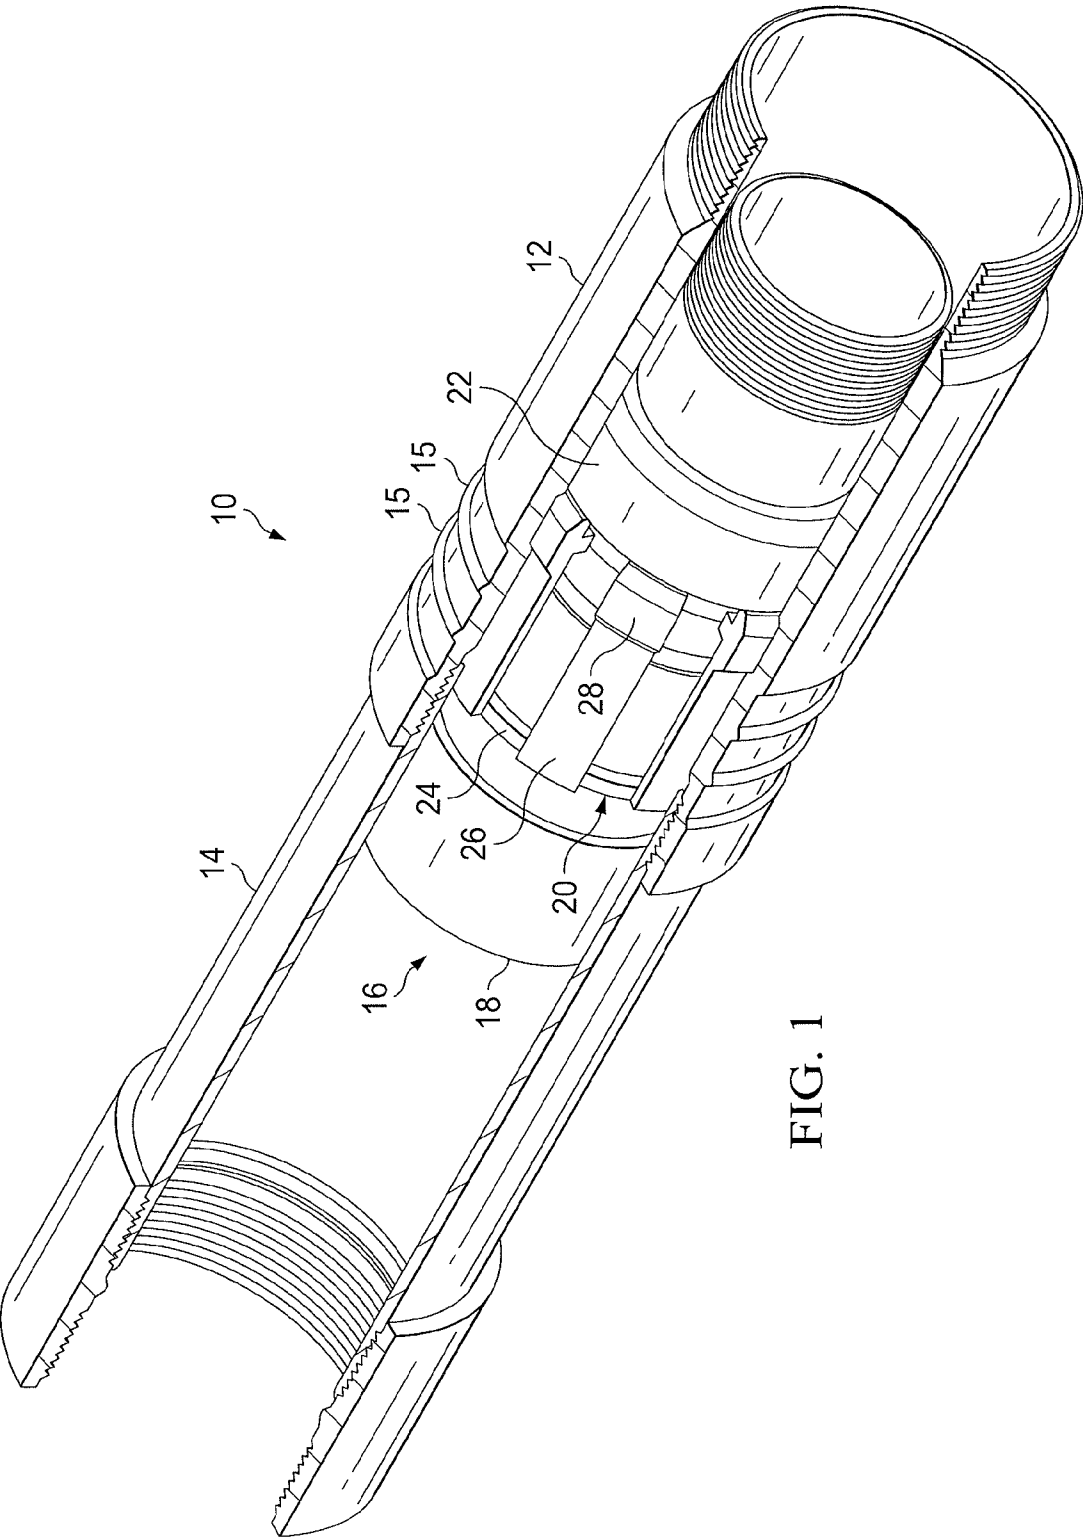

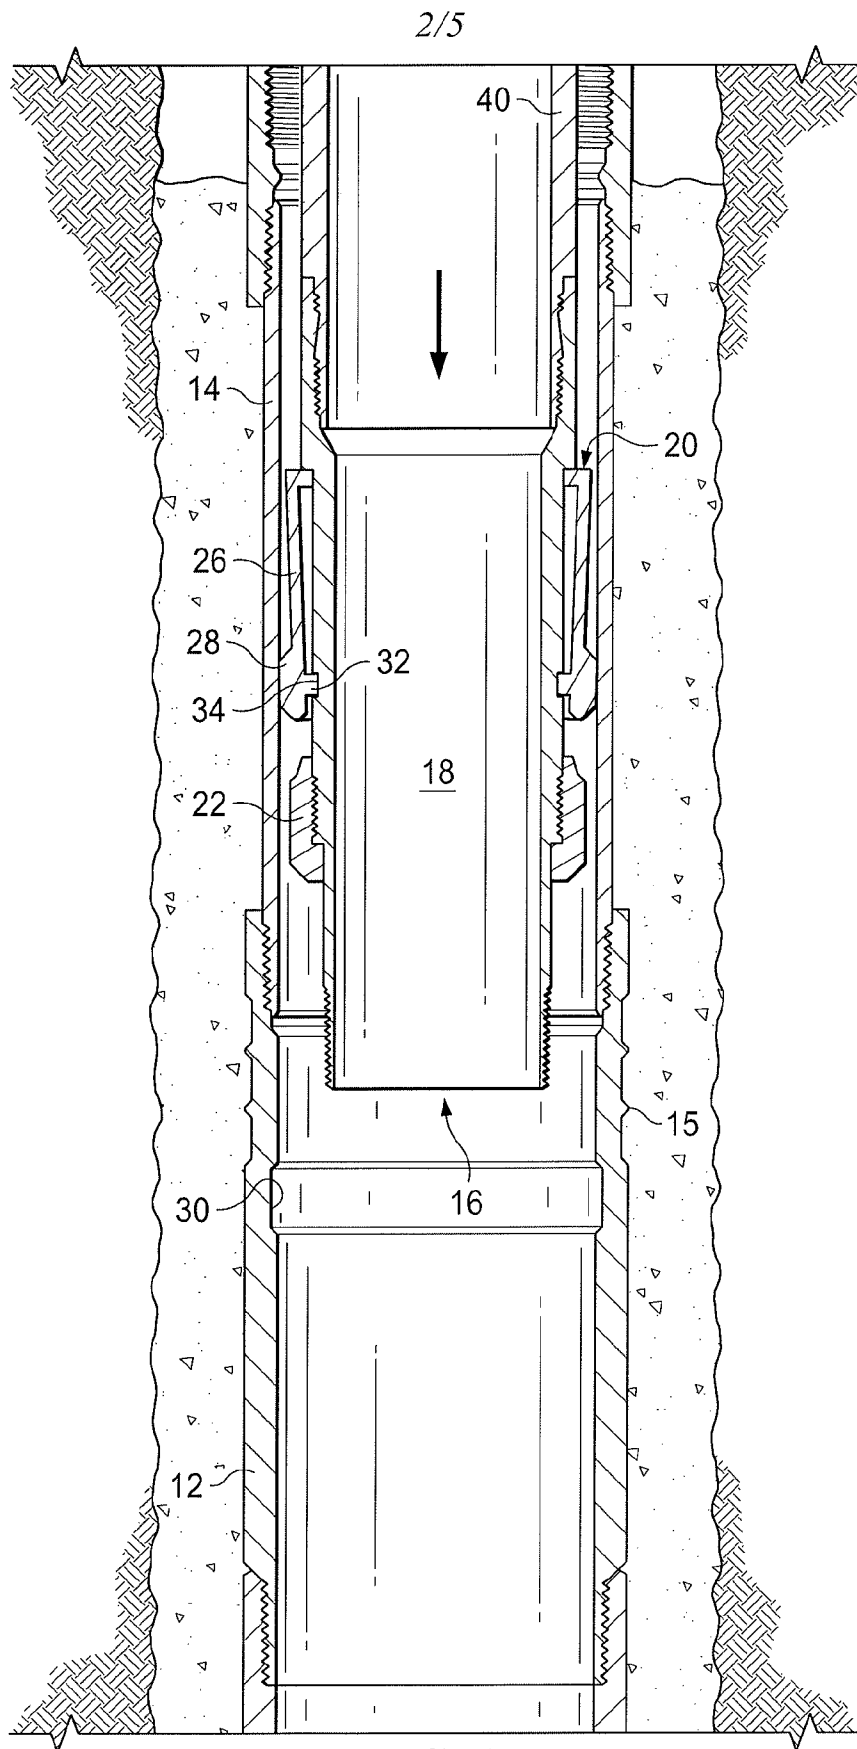

3/5



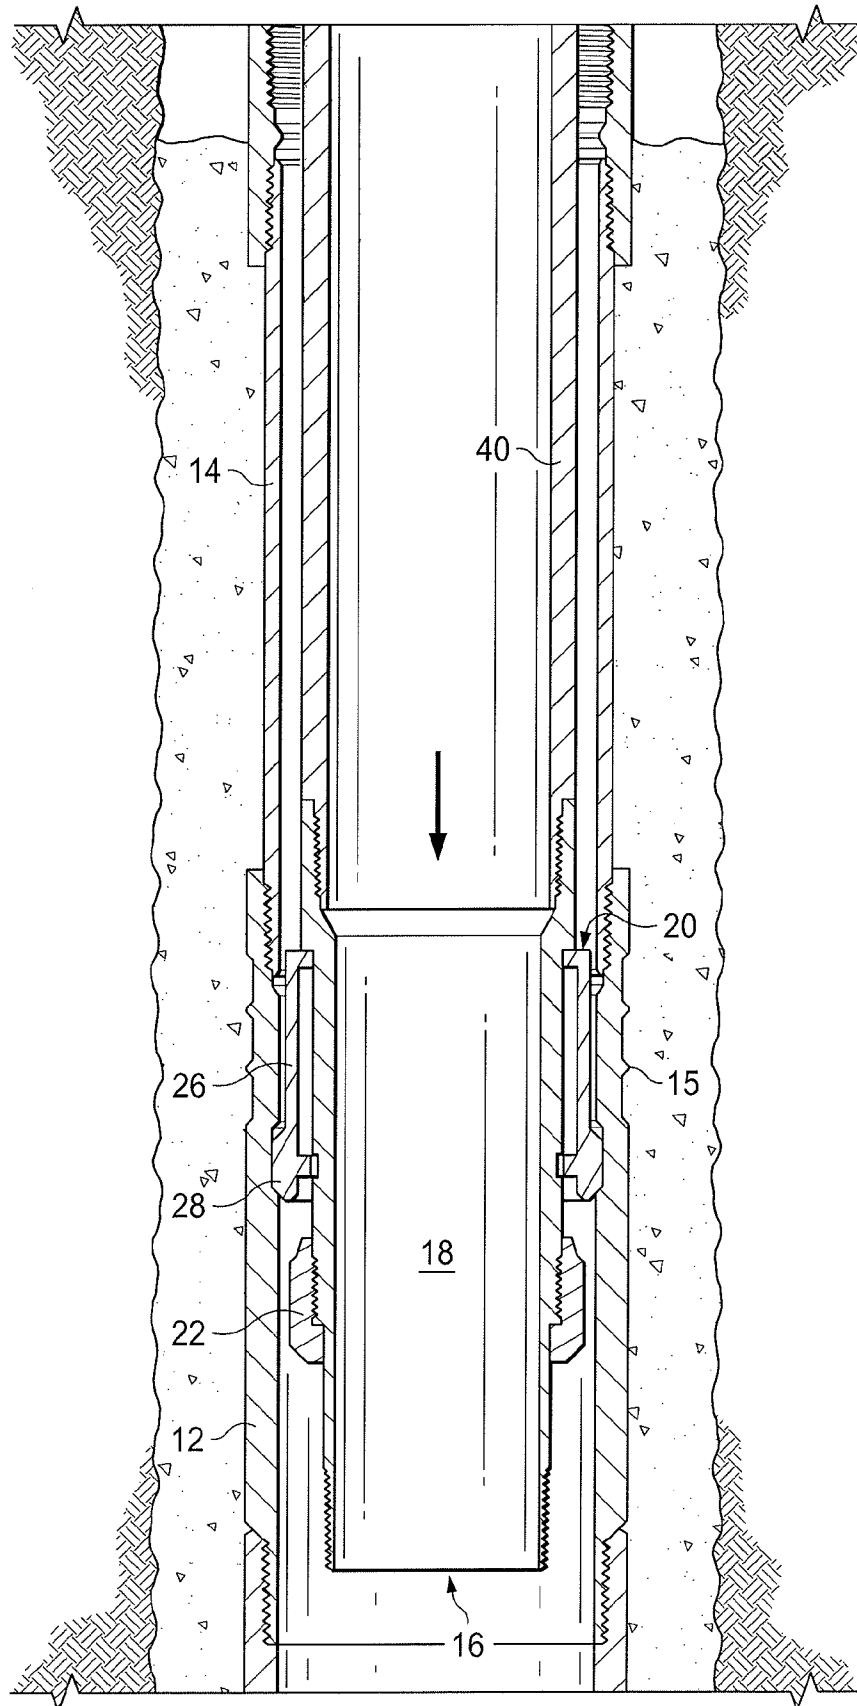


FIG. 3

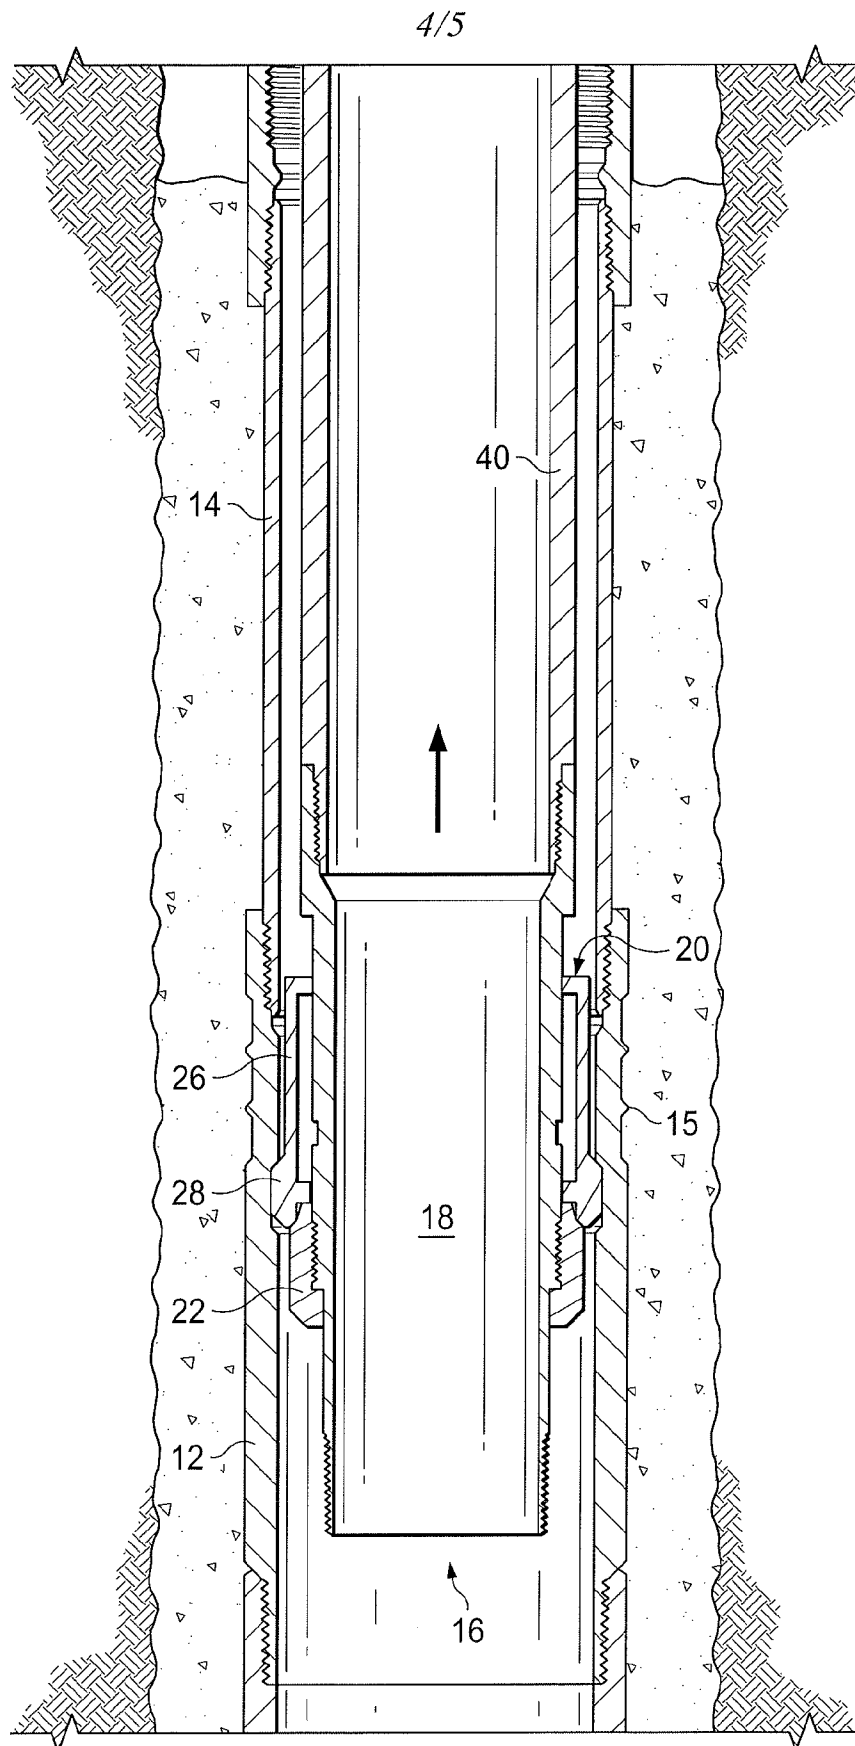

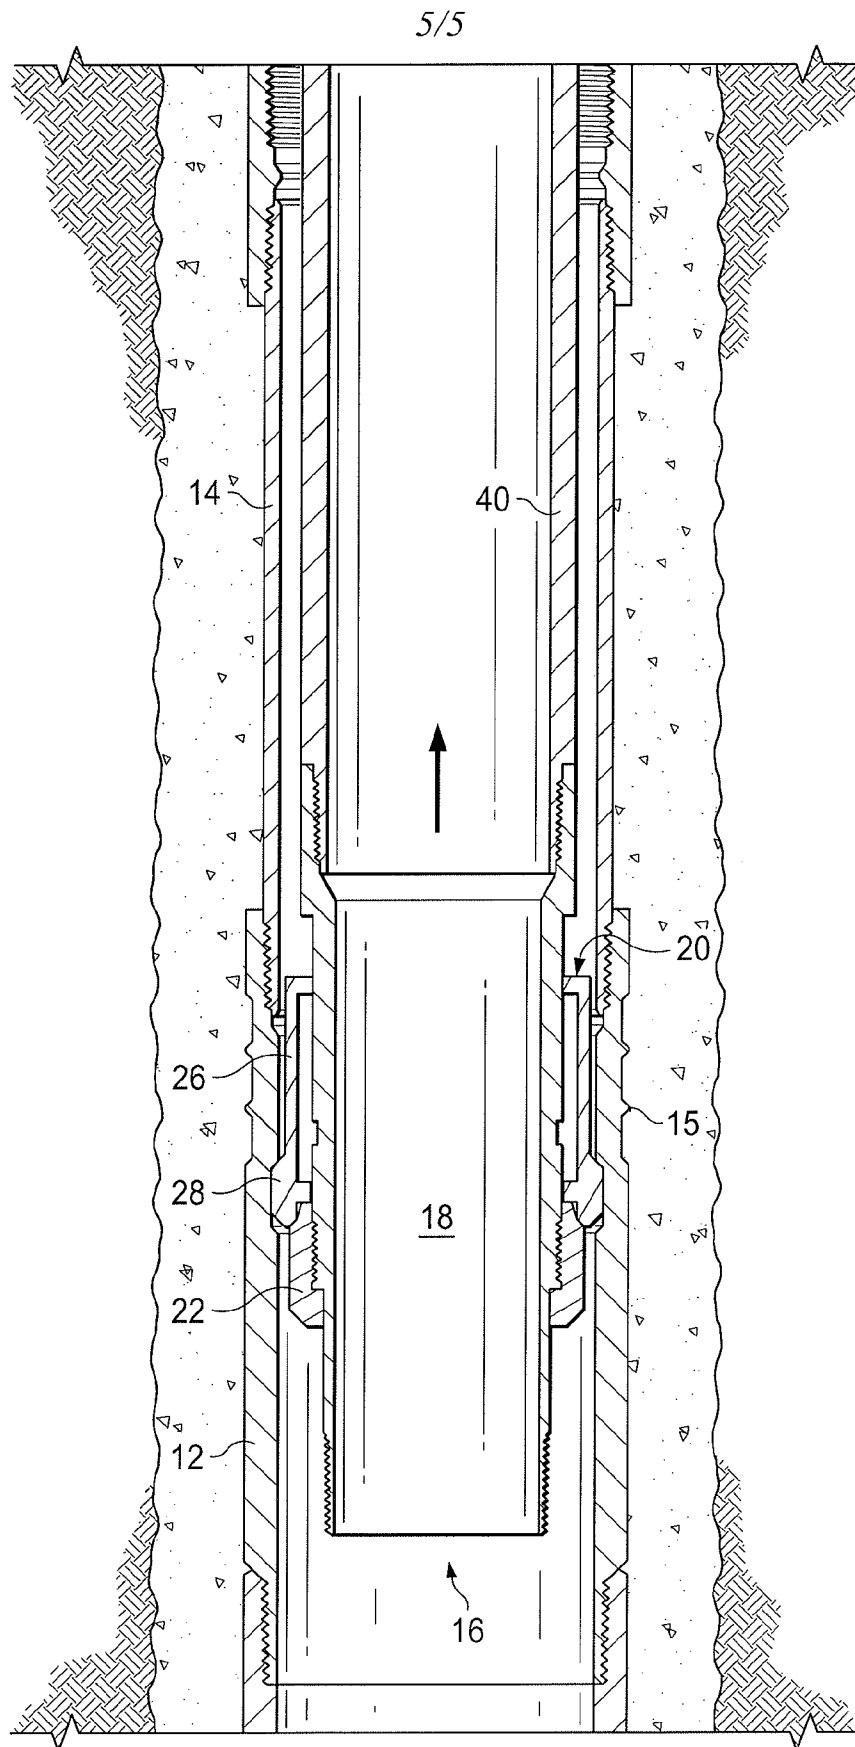

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/031545**A. CLASSIFICATION OF SUBJECT MATTER****E21B 33/13(2006.01)i, E21B 23/01(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 33/13; E21B 33/00; B21D 39/08; E21B 33/12; E21B 43/24; E21B 43/25; E21B 23/00; E21B 43/10; B21D 51/04; E21B 23/01

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:wellbore, drilling, subterranean, borehole, tension force, compress, casing string, parent casing, cement slurry, locking sleeve, pre-stressed casing and preventing bonding failure

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012-0298380 A1 (ROGERS et al.) 29 November 2012 See paragraphs [0028]-[0045]; claim 14; and figures 1-6.	1-5, 7-11
Y		6, 12
A		13-20
Y	US 3976139 A (WILDER, LAWRENCE B.) 24 August 1976 See column 2, lines 66-68 and figure 1.	6, 12
A	US 2008-0087418 A1 (COOK et al.) 17 April 2008 See paragraphs [0007]-[0030] and figures 1-5.	1-20
A	US 2006-0032640 A1 (COSTA et al.) 16 February 2006 See paragraphs [0007]-[0011] and figures 1a-18b.	1-20
A	US 4538442 A (REED, STUART E.) 03 September 1985 See column 2, line 5-column 3, line 11 and figures 1-4.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 February 2016 (16.02.2016)

Date of mailing of the international search report

17 February 2016 (17.02.2016)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Tae Wook

Telephone No. +82-42-481-3405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0298380 A1	29/11/2012	AU 2012-260688 A1 CA 2837250 A1 EP 2715049 A2 MX 2013013758 A WO 2012-160339 A2 WO 2012-160339 A3	14/11/2013 29/11/2012 09/04/2014 09/07/2014 29/11/2012 17/10/2013
US 3976139 A	24/08/1976	None	
US 2008-0087418 A1	17/04/2008	AU 1999-59335 A1 AU 1999-59335 B2 AU 2000-13492 A1 AU 2000-13492 B2 AU 2000-16417 A1 AU 2000-16417 B2 AU 2000-16418 A1 AU 2000-16418 B2 AU 2000-37920 A1 AU 2000-41413 A1 AU 2000-59214 A1 AU 2000-59214 B2 AU 2000-71777 A1 AU 2000-71777 B2 AU 2001-269810 B2 AU 2001-38263 A1 AU 2001-38263 B2 AU 2001-69810 A1 AU 2002-239857 B2 AU 2002-240366 B2 AU 2002-306209 A1 AU 2002-319813 A8 AU 2002-323133 A8 AU 2002-343651 A8 AU 2002-345912 A8 AU 2002-360373 A8 AU 2003-215290 A1 AU 2003-215290 A8 AU 2003-230386 A1 AU 2003-266000 A1 AU 2003-266000 A8 AU 2003-270774 A1 AU 2003-270774 A8 AU 2003-275131 A1 AU 2003-275131 A8 AU 2003-275132 A1 AU 2003-275132 A8 AU 2003-275962 A1 AU 2003-275962 A8 AU 2006-214566 A1	08/06/2000 06/11/2003 17/08/2000 08/04/2004 31/08/2000 12/02/2004 31/08/2000 19/02/2004 21/12/2000 02/01/2001 30/01/2001 16/09/2004 19/07/2001 20/05/2004 07/04/2005 27/08/2001 03/03/2005 02/01/2002 27/04/2006 04/01/2007 21/08/2003 24/03/2003 24/03/2003 26/05/2003 21/01/2003 26/05/2003 29/09/2003 29/09/2003 19/01/2004 17/11/2003 17/11/2003 08/04/2004 08/04/2004 08/04/2004 08/04/2004 31/12/2003 31/12/2003 24/08/2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2289811 A1	16/05/2000
		CA 2289811 C	02/01/2007
		CA 2292171 A1	07/06/2000
		CA 2292171 C	04/08/2009
		CA 2298139 A1	11/08/2000
		CA 2298139 C	22/04/2008
		CA 2299059 A1	26/08/2000
		CA 2299076 A1	25/08/2000
		CA 2299076 C	13/07/2010
		CA 2300363 A1	11/09/2000
		CA 2306656 A1	26/10/2000
		CA 2306656 C	06/06/2006
		CA 2310878 A1	07/12/2000
		CA 2383231 A1	18/01/2001
		CA 2383231 C	27/01/2009
		CA 2397480 A1	23/08/2001
		CA 2397480 C	20/04/2010
		CA 2398001 A1	18/04/2003
		CA 2398001 C	31/10/2006
		CA 2401068 A1	03/04/2003
		CA 2401068 C	20/04/2010
		CA 2407983 A1	27/12/2001
		CA 2407983 C	12/01/2010
		CA 2410274 A1	10/06/2003
		CA 2410274 C	28/09/2010
		CA 2432030 A1	06/09/2002
		CA 2432030 C	18/08/2009
		CA 2438807 A1	29/08/2002
		CA 2438807 C	26/05/2009
		CA 2453063 A1	16/01/2003
		CA 2453063 C	22/03/2011
		CA 2459537 A1	20/03/2003
		CA 2459537 C	21/12/2010
		CA 2459910 A1	20/03/2003
		CA 2459910 C	13/04/2010
		CA 2467377 A1	22/05/2003
		CA 2467377 C	04/01/2011
		CA 2467381 A1	22/05/2003
		CA 2467381 C	08/01/2013
		CA 2473476 A1	14/01/2005
		CA 2478868 A1	25/09/2003
		CA 2484966 A1	13/11/2003
		CA 2489283 A1	24/12/2003
		CA 2490786 A1	08/01/2004
		CA 2499007 A1	01/04/2004
		CA 2499007 C	07/08/2012
		CA 2499030 A1	01/04/2004
		CA 2522918 A1	07/10/2004
		CA 2522918 C	20/10/2009
		CA 2523500 A1	21/10/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2523654 A1	28/10/2004
		CA 2523779 A1	28/10/2004
		CA 2523862 A1	04/11/2004
		CA 2523862 C	23/06/2009
		CA 2526227 A1	26/10/2000
		CA 2526227 C	17/07/2007
		CA 2536385 A1	26/10/2000
		CA 2536468 A1	26/10/2000
		CA 2536468 C	10/04/2007
		CA 2536620 A1	26/10/2000
		CA 2536716 A1	26/10/2000
		CA 2536716 C	17/07/2007
		CA 2563259 A1	13/04/2007
		CA 2597909 A1	24/08/2006
		CA 2606444 A1	11/09/2000
		CA 2607070 A1	11/09/2000
		CA 2607100 A1	11/09/2000
		CA 2607565 A1	11/09/2000
		CA 2607830 A1	11/09/2000
		CA 2608605 A1	11/09/2000
		CA 2613421 A1	18/01/2001
		CA 2615015 A1	18/01/2001
		CA 2658250 A1	31/01/2008
		CA 2666668 A1	07/06/2000
		EP 1231852 A1	21/08/2002
		EP 1549823 A2	06/07/2005
		EP 1549823 A4	22/03/2006
		EP 1549823 B1	25/07/2007
		EP 1549824 A2	06/07/2005
		EP 1549824 A4	19/04/2006
		EP 1549824 B1	25/07/2007
		EP 2049826 A2	22/04/2009
		GB 2343691 A	17/05/2000
		GB 2344606 A	14/06/2000
		GB 2347950 A	20/09/2000
		GB 2347952 A	20/09/2000
		GB 2348223 A	27/09/2000
		GB 2348657 A	11/10/2000
		GB 2355738 A	02/05/2001
		GB 2356651 A	30/05/2001
		GB 2368865 A	15/05/2002
		GB 2373468 A	25/09/2002
		GB 2380213 A	02/04/2003
		GB 2380214 A	02/04/2003
		GB 2380215 A	02/04/2003
		GB 2380503 A	09/04/2003
		GB 2381019 A	23/04/2003
		GB 2382828 A	11/06/2003
		GB 2384502 A	30/07/2003
		GB 2384800 A	06/08/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2384801 A	06/08/2003
		GB 2384802 A	06/08/2003
		GB 2384803 A	06/08/2003
		GB 2384804 A	06/08/2003
		GB 2384805 A	06/08/2003
		GB 2384806 A	06/08/2003
		GB 2384807 A	06/08/2003
		GB 2384808 A	06/08/2003
		GB 2385353 A	20/08/2003
		GB 2385354 A	20/08/2003
		GB 2385355 A	20/08/2003
		GB 2385356 A	20/08/2003
		GB 2385357 A	20/08/2003
		GB 2385358 A	20/08/2003
		GB 2385359 A	20/08/2003
		GB 2385360 A	20/08/2003
		GB 2385361 A	20/08/2003
		GB 2385362 A	20/08/2003
		GB 2385363 A	20/08/2003
		GB 2385619 A	27/08/2003
		GB 2385620 A	27/08/2003
		GB 2385621 A	27/08/2003
		GB 2385622 A	27/08/2003
		GB 2385623 A	27/08/2003
		GB 2388134 A	05/11/2003
		GB 2400393 A	13/10/2004
		GB 2401136 A	03/11/2004
		GB 2401137 A	03/11/2004
		GB 2401138 A	03/11/2004
		GB 2403756 A	12/01/2005
		GB 2403970 A	19/01/2005
		GB 2403971 A	19/01/2005
		GB 2403972 A	19/01/2005
		GB 2404402 A	02/02/2005
		GB 2404676 A	09/02/2005
		GB 2405893 A	16/03/2005
		GB 2406117 A	23/03/2005
		GB 2406118 A	23/03/2005
		GB 2406119 A	23/03/2005
		GB 2406120 A	23/03/2005
		GB 2406599 A	06/04/2005
		GB 2408278 A	25/05/2005
		GB 2410518 A	03/08/2005
		GB 2412681 A	05/10/2005
		GB 2412682 A	05/10/2005
		GB 2413136 A	19/10/2005
		GB 2414493 A	30/11/2005
		GB 2414749 A	07/12/2005
		GB 2414750 A	07/12/2005
		GB 2414751 A	07/12/2005

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2415454 A	28/12/2005
		GB 2415979 A	11/01/2006
		GB 2415980 A	11/01/2006
		GB 2415981 A	11/01/2006
		GB 2415987 A	11/01/2006
		GB 2415988 A	11/01/2006
		GB 2416177 A	18/01/2006
		GB 2416794 A	08/02/2006
		GB 2416795 A	08/02/2006
		GB 2417273 A	22/02/2006
		GB 2417275 A	22/02/2006
		GB 2418216 A	22/03/2006
		GB 2418217 A	22/03/2006
		GB 2418690 A	05/04/2006
		GB 2419907 A	10/05/2006
		GB 2421257 A	21/06/2006
		GB 2421258 A	21/06/2006
		GB 2421259 A	21/06/2006
		GB 2422859 A	09/08/2006
		GB 2422860 A	09/08/2006
		GB 2423317 A	23/08/2006
		GB 2430953 A	11/04/2007
		GB 2431181 A	18/04/2007
		GB 2433757 A	04/07/2007
		GB 2433758 A	04/07/2007
		GB 2438554 A	28/11/2007
		GB 2440693 A	06/02/2008
US 2006-0032640 A1	16/02/2006	AU 2002-367017 A1	30/07/2003
		AU 2003-230589 A1	27/10/2003
		AU 2003-230589 A8	27/10/2003
		AU 2003-233475 A1	03/11/2003
		AU 2003-233475 A8	03/11/2003
		AU 2003-249371 A1	09/02/2004
		AU 2003-249371 A8	09/02/2004
		AU 2003-258274 A1	11/03/2004
		AU 2003-258274 A8	11/03/2004
		AU 2003-259865 A1	11/03/2004
		AU 2003-259865 A8	11/03/2004
		AU 2003-263859 A1	08/04/2004
		AU 2003-263859 A8	08/04/2004
		AU 2003-298954 A1	29/03/2004
		AU 2003-298954 A8	29/03/2004
		CA 2472284 A1	24/07/2003
		CA 2472284 C	11/10/2011
		CA 2482278 A1	30/10/2003
		CA 2482743 A1	23/10/2003
		CA 2482743 C	24/05/2011
		CA 2493086 A1	29/01/2004
		CA 2516140 A1	02/09/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2613007 A1	02/09/2004
		CA 2613131 A1	02/09/2004
		CA 2614179 A1	02/09/2004
		CN 101131070 A	27/02/2008
		CN 101187296 A	28/05/2008
		CN 1630566 A	22/06/2005
		EP 1472024 A1	03/11/2004
		EP 1472024 B1	17/02/2010
		EP 1501644 A2	02/02/2005
		EP 1501644 A4	01/03/2006
		EP 1501644 B1	10/11/2010
		EP 1501645 A2	02/02/2005
		EP 1501645 A4	26/04/2006
		EP 1540128 A2	15/06/2005
		EP 1671320 A2	21/06/2006
		EP 1965020 A1	03/09/2008
		EP 1972752 A2	24/09/2008
		EP 1985796 A2	29/10/2008
		EP 1985796 A3	25/11/2009
		EP 1985796 B1	16/05/2012
		EP 1985797 A2	29/10/2008
		EP 1985797 A3	25/11/2009
		EP 1985797 B1	26/10/2011
		EP 1985798 A2	29/10/2008
		GB 2408277 A	25/05/2005
		GB 2415003 A	14/12/2005
		GB 2417971 A	15/03/2006
		GB 2429224 A	21/02/2007
		GB 2429225 A	21/02/2007
		GB 2429226 A	21/02/2007
		GB 2429480 A	28/02/2007
		GB 2429481 A	28/02/2007
		GB 2429482 A	28/02/2007
		JP 2007-507822 A	29/03/2007
		KR 10-2006-0088890 A	07/08/2006
		US 2005-0015963 A1	27/01/2005
		US 2005-0236159 A1	27/10/2005
		US 2005-0247453 A1	10/11/2005
		US 2006-0090902 A1	04/05/2006
		US 2006-0113086 A1	01/06/2006
		US 2006-0162937 A1	27/07/2006
		US 2006-0208488 A1	21/09/2006
		US 2006-065406 A1	30/03/2006
		US 2006-112768 A1	01/06/2006
		US 2007-0039742 A1	22/02/2007
		US 2007-0151360 A1	05/07/2007
		US 2007-0169939 A1	26/07/2007
		US 2007-0246934 A1	25/10/2007
		US 2007-0272419 A1	29/11/2007
		US 2007-0278788 A1	06/12/2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/031545

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4538442 A	03/09/1985	US 2008-0018099 A1	24/01/2008
		US 2008-0042428 A1	21/02/2008
		US 2008-0066926 A1	20/03/2008
		US 2008-0066927 A1	20/03/2008
		US 2008-0066929 A1	20/03/2008
		US 2008-0066930 A1	20/03/2008
		US 2008-0100064 A1	01/05/2008
		US 2008-0104823 A1	08/05/2008
		US 2008-0136181 A1	12/06/2008
		US 2009-001721 A1	01/01/2009
		US 2009-0038138 A1	12/02/2009
		US 2010-0282477 A1	11/11/2010
		US 7377326 B2	27/05/2008
		US 7404444 B2	29/07/2008
		US 7424918 B2	16/09/2008
		US 7739917 B2	22/06/2010
		US 7740076 B2	22/06/2010
		US 7918284 B2	05/04/2011
		US 8047281 B2	01/11/2011
		WO 03-059549 A1	24/07/2003
		WO 03-086675 A2	23/10/2003
		WO 03-089161 A2	30/10/2003
		WO 2003-086675 A3	05/08/2004
		WO 2003-089161 A3	26/02/2004
		WO 2003-089161 B1	13/05/2004
		WO 2004-010039 A2	29/01/2004
		WO 2004-010039 A3	08/07/2004
		WO 2004-018823 A2	04/03/2004
		WO 2004-018823 A3	05/08/2004
		WO 2004-018824 A2	04/03/2004
		WO 2004-018824 A3	29/07/2004
		WO 2004-023014 A2	18/03/2004
		WO 2004-023014 A3	03/03/2005
		WO 2004-027786 A2	01/04/2004
		WO 2004-027786 A3	10/09/2004
		WO 2004-074622 A2	02/09/2004
		WO 2004-074622 A3	31/03/2005
		WO 2005-034103 A2	14/04/2005
		WO 2005-034103 A3	25/08/2005
		WO 2008-042945 A2	10/04/2008
		WO 2008-042945 A3	27/11/2008
		EP 0104789 A1	04/04/1984
		EP 0104789 B1	12/11/1986
		JP 1295741 C	26/12/1985
		JP 5986791 A	19/05/1984
		JP 6018877 B	13/05/1985
		JP 6018877 B2	13/05/1985
		KR 10-1984-0005678 A	15/11/1984