United States Patent [19]

Handler

[11] **4,266,165**

[45] **May 5, 1981**

[54] **HIGH INTENSITY DISCHARGE LAMP STARTING CIRCUIT**

[75] Inventor: **Howard Handler,** Westminster, Calif.

[73] Assignee: **Datapower, Inc.,** Santa Ana, Calif.

[21] Appl. No.: **973,613**

[22] Filed: **Dec. 27, 1978**

[51] **Int. Cl.**[3] **H05B 41/14;** H05B 41/36

[52] **U.S. Cl.** **315/224;** 315/208; 315/283; 315/287; 315/289; 315/307; 315/DIG. 7

[58] **Field of Search** ..... 315/208, 209 R, 224, 315/283, 287, 289, 290, 291, 307, 311, DIG. 5, DIG. 7

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,569,775	3/1971	Halsted et al.	315/287 X
3,906,302	9/1975	Wijsboom	315/289 X
3,969,652	7/1976	Herzog	315/290 X
3,999,100	12/1976	Dendy et al.	315/287 X
4,162,429	7/1979	Elms et al.	315/311 X

Primary Examiner—Eugene R. La Roche
Attorney, Agent, or Firm—Knobbe, Martens, Olson, Hubbard & Bear

[57] **ABSTRACT**

A gas discharge lamp is connected across an inductor and in series with a solid state switching device and a resistor, and this combination is connected across a rectified AC voltage source. This switching device is controlled by a monostabile multivibrator, the input of which is connected to the output of a comparator amplifier sensing the difference between the voltage drop across the above-mentioned resistor and a voltage which may be selected to vary light intensity. The secondary winding of a step-up transformer connected to a capacitive discharge device is placed in series with the lamp. Control circuitry is provided to apply a large ignition voltage to the lamp while preventing damage to the switching device by simultaneously holding it in its conductive state. A diode rectifier provides an alternate current path across the secondary winding to prevent the inductance of the secondary winding from affecting normal lamp operation. Means are provided to cancel the contribution of lamp current to the voltage drop across the resistor sensed by the comparator, thereby rendering power consumed by the circuit independent of the effective resistance of the lamp.

18 Claims, 10 Drawing Figures

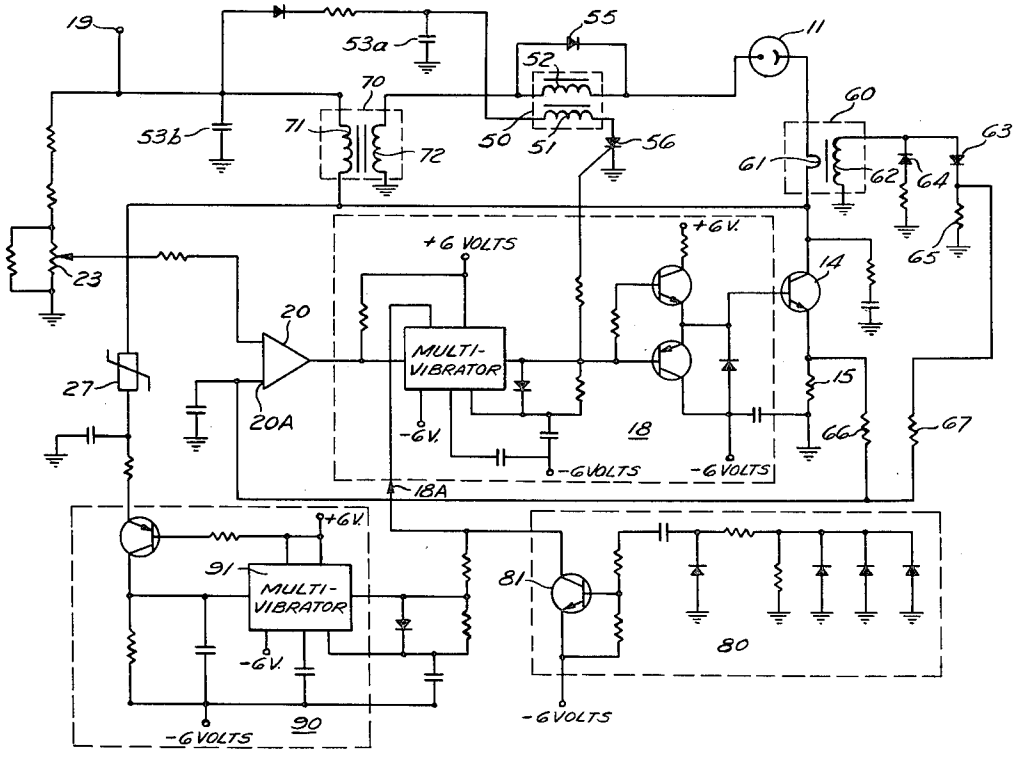
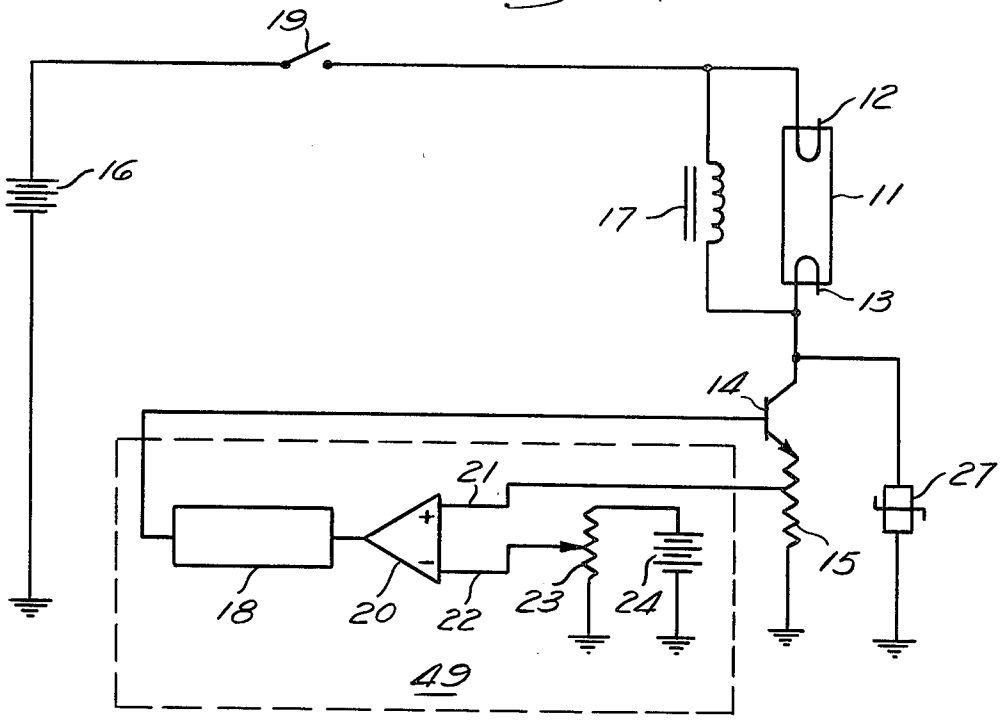


Fig. 1 (PRIOR ART)



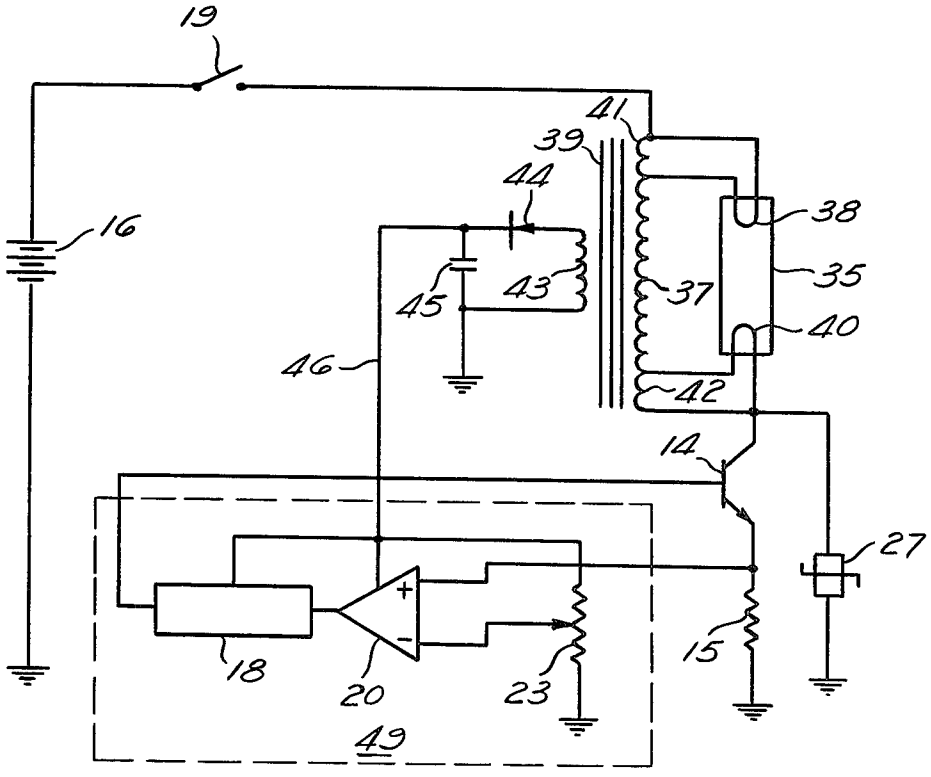


Fig. 3 (PRIOR ART)

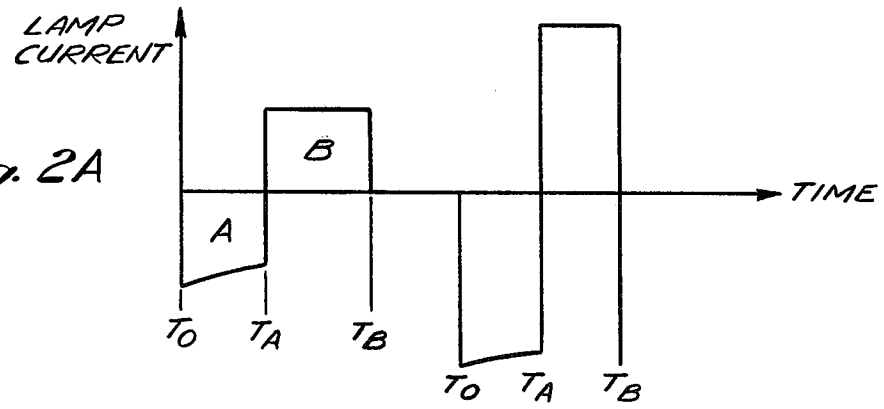


Fig. 2A

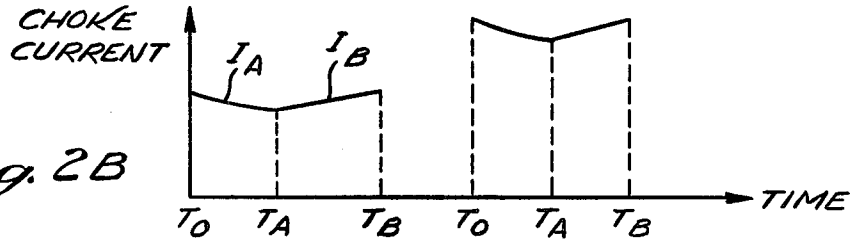


Fig. 2B

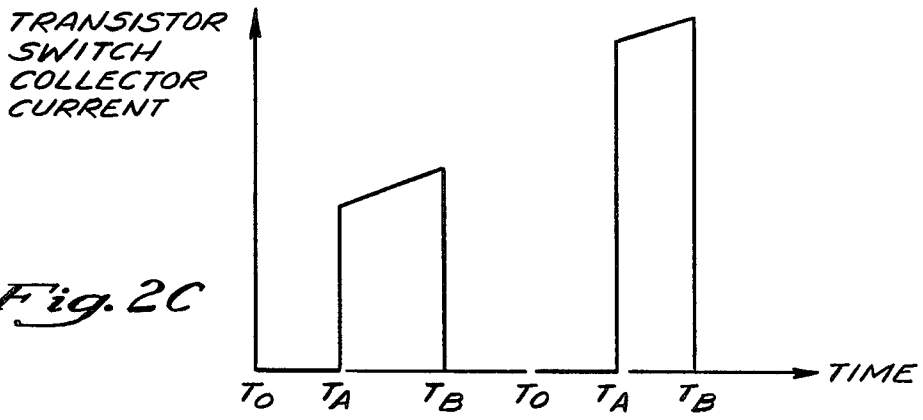


Fig. 2C

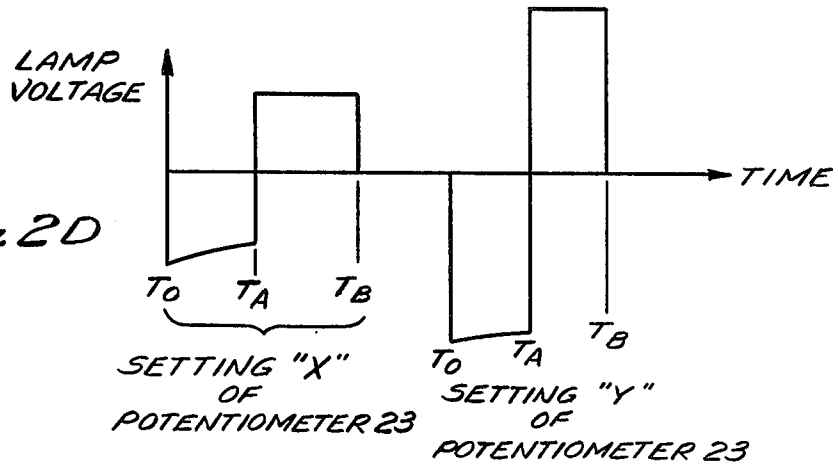


Fig. 2D

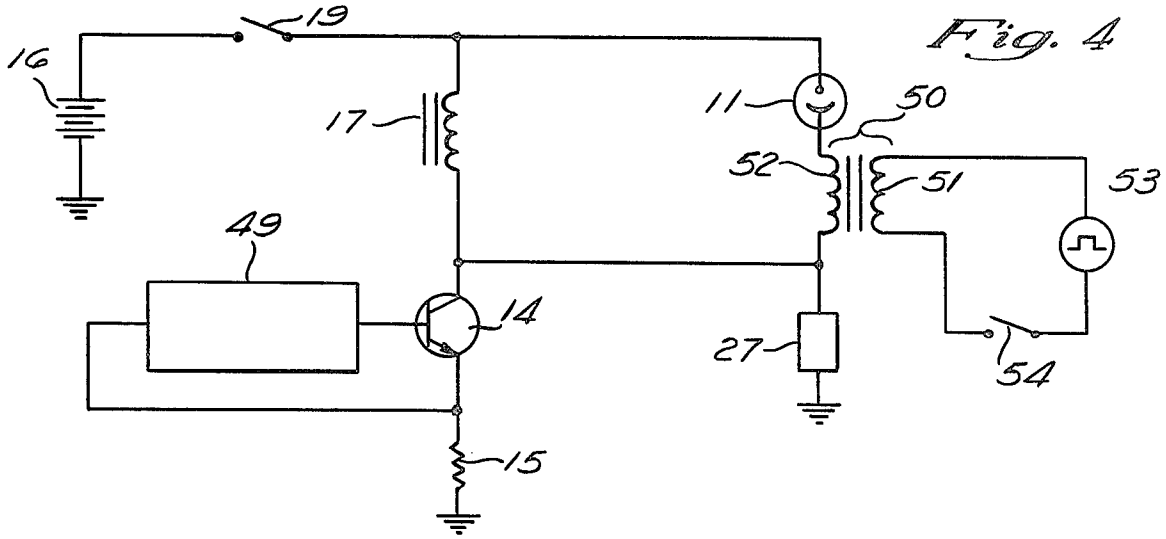


Fig. 4

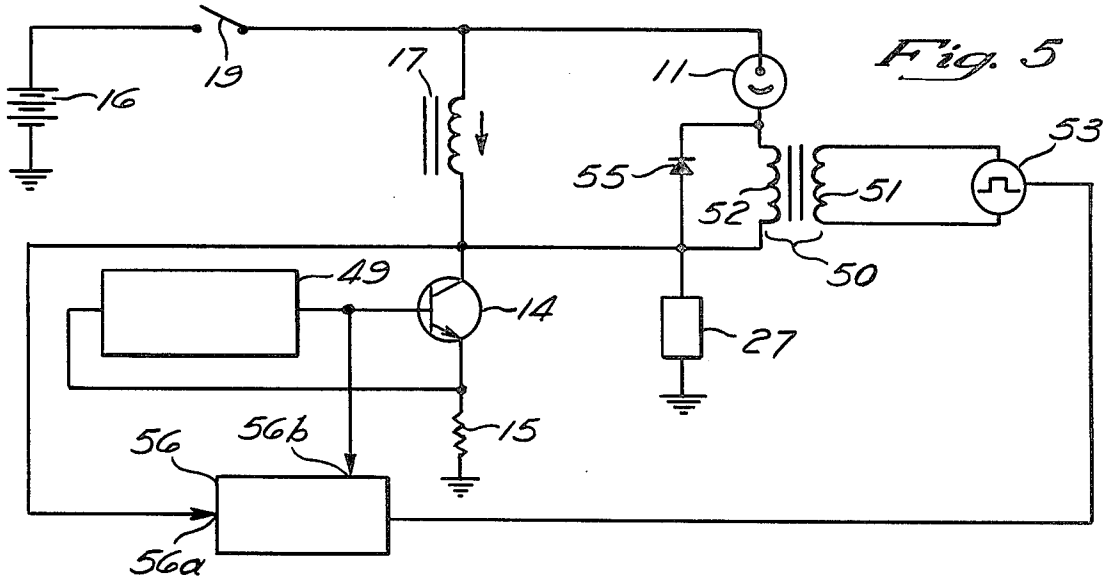


Fig. 5

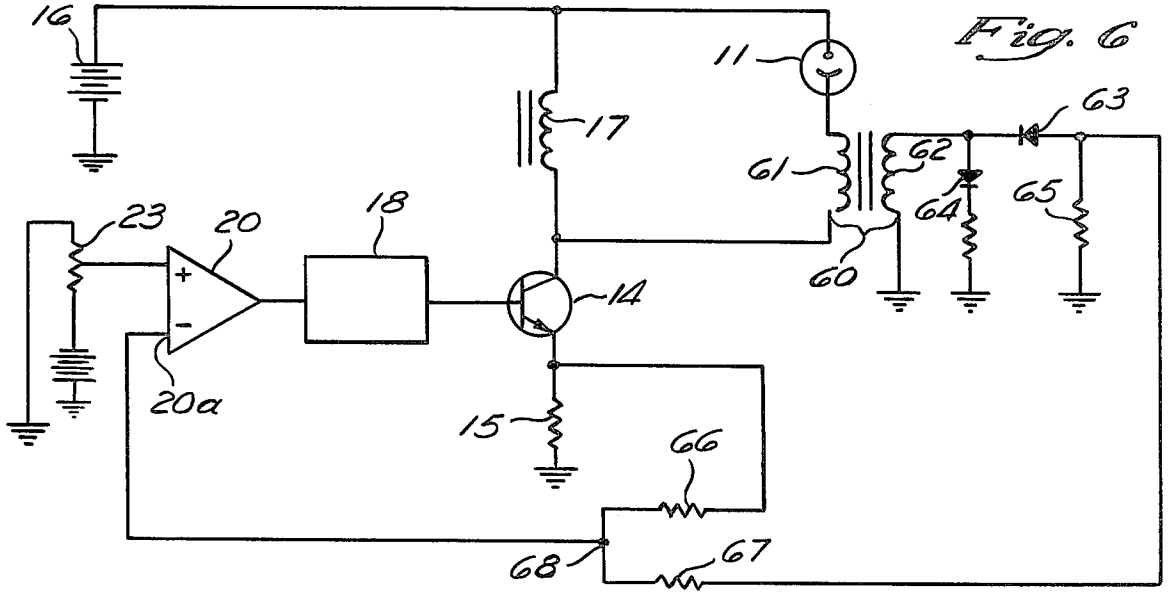


Fig. 6

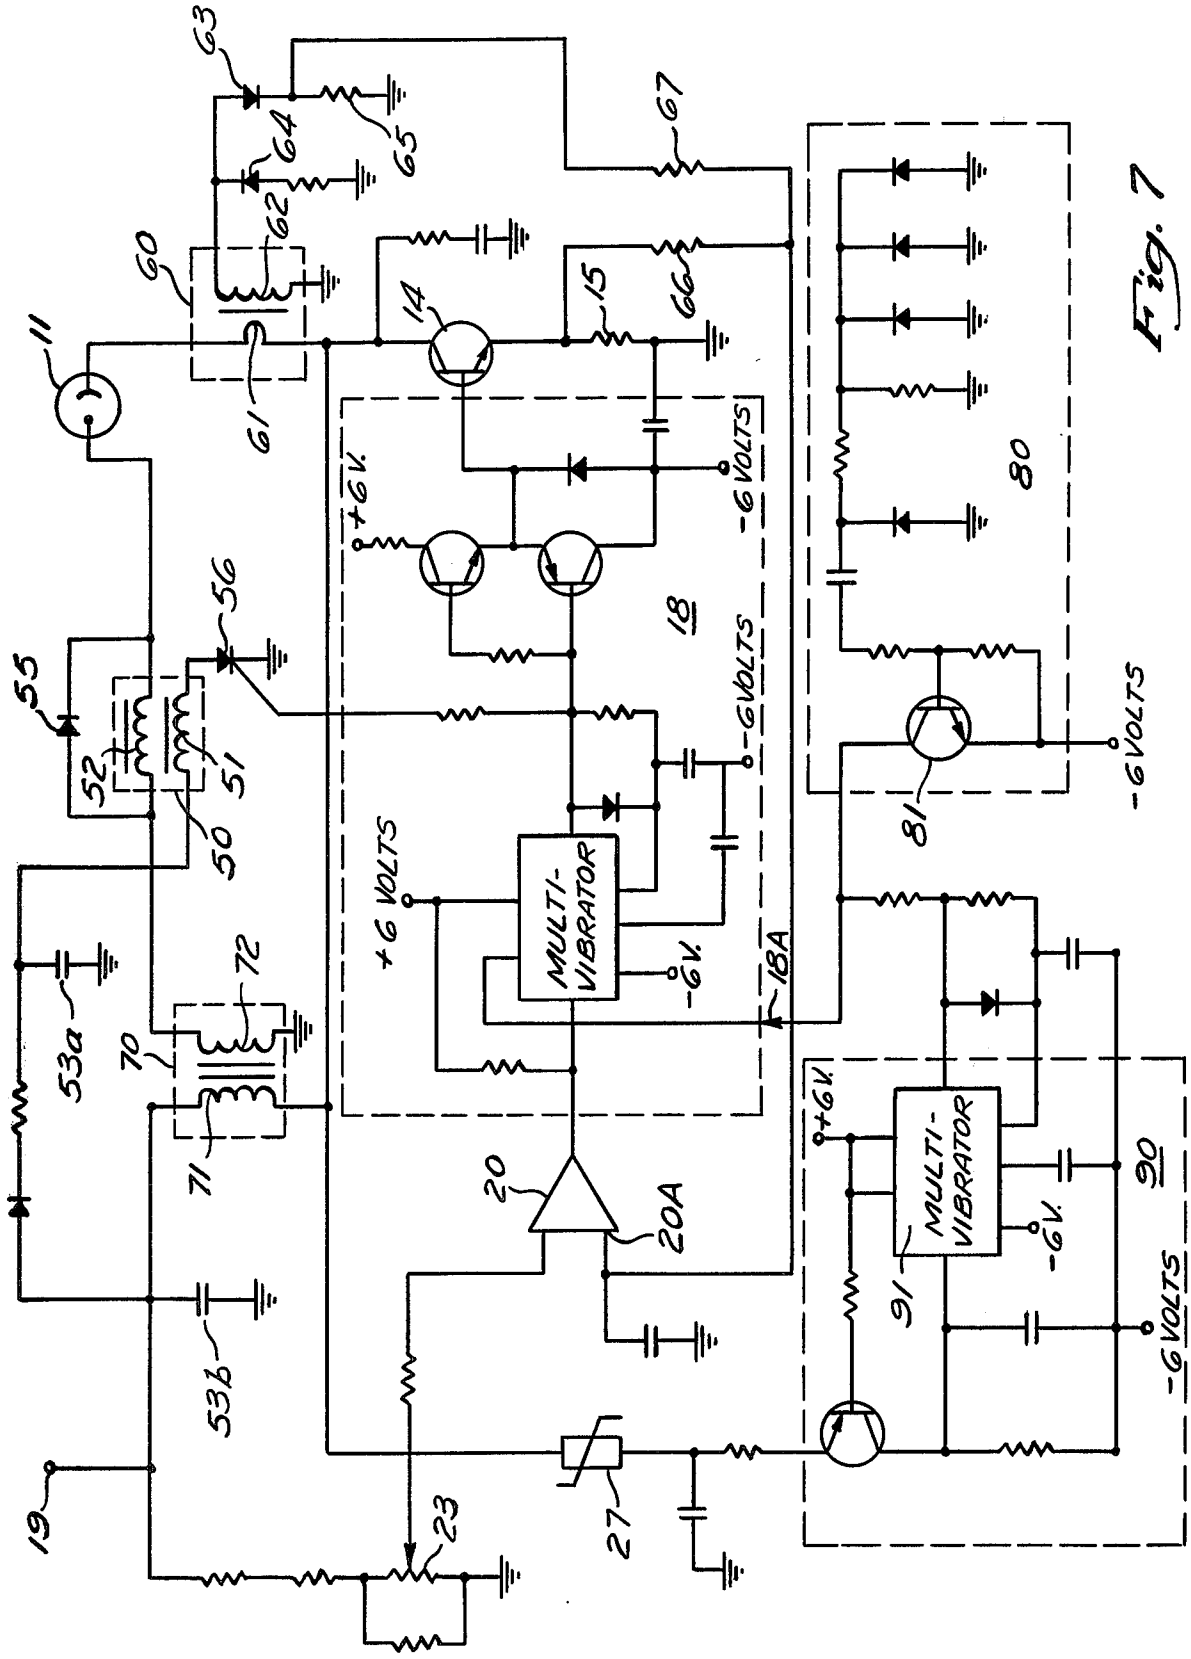

MULTI-VIBRATOR
MULTI-VIBRATOR
+6 VOLTS
-6 VOLTS
+6 V.
-6 V.
-6VOLTS
+6 VOLTS
+6V.
-6V.
-6VOLTS
-6VOLTS
11
14
15
18
18A
19
20
20A
23
27
50
51
52
53a
53b
55
56
60
61
62
63
64
65
66
67
70
71
72
80
81
90
91

Fig. 7

HIGH INTENSITY DISCHARGE LAMP STARTING CIRCUIT

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to apparatus for operating a gas discharge lamp, such as a fluorescent light, a mercury vapor lamp, a sodium lamp, or a metal halide lamp.

2. Related Applications

This application discloses subject matter which is related to United States Patent Applications Ser. No. 865,209, Filed Dec. 28, 1977; Ser. No. 940,435, Filed Sept. 7, 1978; and Ser. No. 968,372, filed Dec. 11, 1978; all by Francis Henry Gerhard and Gerald Allen Felper; all for "VARIABLE INTENSITY CONTROL APPARATUS FOR A GAS DISCHARGE LAMP".

3. Description of the Prior Art

Control circuits for gas discharge lamps are known which obviate the need for the usual heavy and expensive series ballast devices, corresponding to the inductor in this device. In such circuits, switching elements are provided to periodically reverse the direction of current through the lamp to reduce the deterioration or errosion of electrodes, and to ensure a high enough frequency of switching to reduce the requirement for the size of the ballast. Such circuits generally require two switching elements for each direction of the current.

Attempts have been made to fabricate the same type of circuit using only a single switching element to cause current reversal in the lamp. For example, the U.S. patent to D. B. Wijsboom, U.S. Pat. No. 3,906,302, is directed to such an arrangement and incorporates an inductor in parallel with the lamp, which lamp is in series with a switching device. Such a switching device is generally operated at relatively high frequencies, such as 20 KHz.

One problem has been that the fly back voltage during current reversal required to ignite the lamp when the circuit is first activated must be large enough to generate a sufficiently strong voltage gradient in the lamp to ionize the gas. This causes a large voltage to appear across the switching device which can damage the device during ignition, thereby limiting the reliability of the control circuit.

One solution to this problem is to use a step-up voltage transformer connected to a capacitive discharge device which provides sufficient voltage for a short period of time to ionize the lamp without requiring the flyback voltage of the control circuit to be large. However, this creates further problems because a step-up transformer must be connected in series with the lamp, and, after the lamp circuit has assumed normal operation, the large winding ratio of the transformer will cause significant current to flow in the primary winding with consequent power losses. This additional problem may be alleviated by opening up the primary winding after the lamp has ignited. However, this creates further problems because the secondary winding of the step-up transformer now acts as a second inductor in the lamp control circuit, impeding current flow through the lamp during flyback and further increasing the flyback voltage across the switching device, which may damage the switching device.

Another problem in the prior art has been that when a high pressure sodium lamp is used with the lamp control circuit, its resistance is well known to increase during the life of the lamp, which increases power consumption of the circuit, and decreases the efficiency of the lamp circuit.

SUMMARY OF THE INVENTION

A gas discharge lamp is connected across an inductive device. One end of the inductive device is connected to a rectified power source and the other end is connected to the collector of a transistor switch. The emitter of the transistor is connected to one end of a resistor, and the other end of the resistor is connected to the power supply return. The base of the transistor is connected to the output of a monostabile or one-shot multivibrator. The input to the one-shot multivibrator is connected to the output of a comparator amplifier. The multivibrator operates in such a way that when the input to the multivibrator is high, the multivibrator is triggered and its output goes low for a predetermined amount of time, after which its output returns to the high state. The two inputs to the comparator amplifier are connected in such a way that one input is connected to the emitter of the transistor and the other input is connected to a voltage source which may be varied or controlled. The circuit components and the time delay of the multivibrator are chosen in such a way as to provide a relatively high rate of switching on the base of the transistor, approximately 20 to 40 KHz.

This invention includes the novel feature of a step-up pulse transformer having its secondary winding connected in series with the lamp and its primary winding driven by a capacitive discharge circuit, the combination providing very high ignition voltage to the lamp, but including additional means preventing the inductance of the secondary winding from affecting the operation of the lamp circuit after the lamp is ignited and the lamp circuit is operating in its normal mode. This feature is provided by a rectifier diode connected across the secondary winding of the step-up transformer having its polarity oriented so that it provides an alternate current path when the switching device causes the voltage in the lamp control circuit to fly back. This invention further includes means for delaying the operation of the multivibrator in the lamp control circuit after power is first applied in order to permit the capacitive discharge device to become fully charged.

This invention also includes a novel feature which makes the power consumed by the lamp control circuit independent of the effective lamp resistance. This is accomplished by providing another transformer having its primary winding connected in series with the lamp and its secondary winding wound to an opposite polarity to provide a voltage proportional to the lamp current but of opposite polarity. This opposite polarity voltage is applied to one input of the comparator amplifier. As a result, the comparator amplifier senses only the voltage drop caused by the current through the primary winding of the inductive device. Thus, the lamp current does not affect the operation of the comparator amplifier, and thus the comparator amplifier is permitted to control current through the lamp circuit independently of the actual current to the lamp. This renders the power consumption of the circuit independent of effective lamp resistance.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the accompanying drawings in which:

FIG. 1 illustrates an embodiment of a control circuit for a gas discharge lamp shown in simplified form for facilitating an understanding of the overall function of the control apparatus;

FIG. 2 shows four waveform plots labeled 2A, 2B, 2C, and 2D which are characteristic of the control circuit illustrated in FIG. 1. FIG. 2A is a plot of the current through the gas discharge lamp as a function of time, FIG. 2B is a plot of the current through the choke or inductor as a function of time, FIG. 2C is a plot of the collector current of the transistor as a function of time, and FIG. 2D is a plot of the voltage across the gas discharge lamp as a function of time. In all of these plots, time is plotted on the horizontal axis and the voltage or current is plotted on the vertical axis;

FIG. 3 illustrates a modified form of the control circuit of FIG. 1 in which the choke or inductor windings are used as the primary windings of a step-down transformer which supplies power for the one-shot multivibrator and the comparator amplifier as well as the reference voltage to the input of the comparator amplifier. FIG. 3 also illustrates the use of the primary coil as an auto transformer to supply current to the electrodes of the gas discharge lamp as a source of preheating current prior to ignition of the lamp;

FIG. 4 is a schematic diagram of a lamp control circuit similar to that of FIGS. 1 and 3, but including a step-up transformer having its secondary winding connected in series with the lamp and its primary winding connected to a capacitive discharge device, in which the inductance of the secondary winding interferes with the normal operation of the lamp control circuit;

FIG. 5 is a simplified schematic diagram of one embodiment of this invention including a step-up transformer having its secondary winding connected in series with the lamp and its primary winding connected to a comparative discharge device and further including means preventing the inductance of the secondary winding from interfering with the normal operation of the lamp control circuit;

FIG. 6 is a schematic diagram of another embodiment of this invention in which a transformer having one of its windings connected in series with the lamp facilitates regulation of the current consumption of the lamp control circuit independently of the effective lamp resistance; and

FIG. 7 is an overall detailed schematic diagram of the preferred embodiment of the control circuit of the invention including the features of FIGS. 5 and 6.

PRIOR ART CONTROL CIRCUITS

The prior art control circuits illustrated in FIGS. 1 and 3 form a basis for this invention. Therefore, a description of these prior arts circuits is included herein for the sake of clarity.

Referring to the prior art circuit illustrated in FIG. 1, a gas discharge lamp 11, typically a low-pressure mercury vapor fluorescent lamp, having two electrodes 12 and 13, has its electrode 13 connected to an electronic switch shown as an NPN transistor 14, the collector of which is connected to electrode 13, and the emitter connected to a resistor 15. The other end of the resistor 15 is connected to ground. The other electrode of the gas discharge tube 12 is connected to a DC power supply. This supply will normally be a rectified AC source but is shown for simplicity in this figure as a battery 16 whose positive terminal is connected through on-off switch 19 to electrode 12 and whose negative terminal is connected to ground. A choke or inductor 17 is connected in parallel with the electrodes of the gas discharge lamp 12 and 13.

The base of the NPN transistor switch 14 is connected to the output of a one-shot multivibrator 18. The monostabile multivibrator operates in such a way that when the input to the multivibrator is low its output is high, and when its input is high, the monostabile multivibrator is triggered such that its output goes into the low state for a predetermined finite length of time, after which the output of the multivibrator returns to the high state. The input of the multivibrator is connected to the output of a comparator amplifier 20. The positive input of the comparator amplifier is connected through a conductor 21 to the emitter of the NPN transistor 14, and the negative input of the comparator amplifier is connected through a conductor 22 to a potentiometer 23. Potentiometer 23 is connected to the positive end of a DC power source 24, and the negative end of the DC power source 24 is connected to ground.

The operation of the circuit of FIG. 1 is as follows. When the switch 19 is first closed, the current passes through the switch 19 and through the inductor 17. No current passes through the gas discharge lamp 11 because, until it is ignited by high voltage, the lamp remains nonconductive. The current through the inductor passes through the NPN transistor switch 14 and through the resistor 15 to ground. The current through the inductor 17 rises as a function of time until it reaches a level at which the voltage drop across the resistor 15 exceeds the voltage on the conductor 22. The voltage on the conductor 22 is determined by the potentiometer 23. When the voltage drop across the resistor 15 exceeds the voltage on the conductor 22, the comparator amplifier 20 senses a positive difference between its inputs and the output of the comparator amplifier 20 changes from the low to the high state. In response to the high output of the comparator amplifier 20, the one-shot multivibrator 18 is triggered and provides a low output for a short predetermined length of time. Thus, the transistor switch 14 will be turned off for the short period of time during which the base of the transistor receives a low level signal from the multivibrator 18. The magnetic field in the choke 17 then collapses, resulting in a flyback voltage potential across the electrodes 12 and 13 of the gas discharge lamp 11. This potential is sufficient to ignite the lamp and the lamp begins to conduct current. The flyback voltage is also applied to the collector of the transistor 14.

After the above-mentioned short predetermined length of time, the one-shot multivibrator output returns to its normally high level state, thereby turning the transistor switch 14 back on. At this instance in time, current begins to flow from the source 16 through the electrodes 12 and 13 of the gas discharge lamp 11 in the opposite direction to the current supplied before by the choke 17. The magnetic field in the choke 17 also begins to build up again as does the current through the choke 17. This results in a rise in the collector current of the transistor 14 and an equal rise in current through the resistor 15. This rise in current will cause the voltage drop across resistor 15 to rise until the voltage on the conductor 21 again exceeds the voltage on conductor 22. Again, the comparator amplifier 20 will give a high output when this condition is reached, causing the output of the multivibrator 18 to go into the low state for the finite period of time thereby turning off the collector current of the transistor 14. The magnetic field in the

choke **17** will collapse at this time, thereby causing a current to flow between the electrodes **12** and **13** of the gas discharge lamp **11** in a direction opposite to the direction traveled by the current when the transistor **14** was on. This condition will continue until the multivibrator output returns automatically to the high state.

As may be seen from this description, this process will continue to repeat itself as the transistor **14** continuously is switched on and off until steady state conditions are achieved. One or more cycles of operation may be required to ionize the lamp and cause it to ignite.

A varistor or high voltage zener diode **27** is connected between the collector of the NPN transistor and ground, and serves to protect the transistor **14** from destructive breakdown in the event of lamp failure causing an open circuit between its terminals, or inadvertent unplugging of the lamp when the power switch **19** is closed. When the lamp itself is defective and causes an open circuit or when the lamp is removed, the voltage rise at the collector of transistor **14** produced by collapse of the magnetic field in the inductor **17** will be limited to the breakdown voltage of the varistor, a value selected to be within the safe limits of the collector-base junction of the transistor switch **14**.

A significant feature of this prior art control circuit is that the varistor **27** serves the additional function of preventing ignition of the lamp until the lamp electrodes have been warmed up over a time period which is long compared to the operating period of the control circuit. Thus, the prior art control circuit, without the varistor, would typically supply on the order of 1,000 volts across the lamp in the flyback mode. Such high voltage applied to the lamp filaments when they are cold would be extremely deleterious since the electrodes would undergo a very high rate of change of temperature. The varistor is selected such that it breaks down for voltages exceeding 500 to 600 volts. At these lower voltages, the lamp **11** will not ignite until after the cathodes have been heated. Typically, a time delay of $\frac{3}{4}$ second to one second is the amount of time needed to heat up the cathodes sufficiently for the lamp to ignite when suplied with 500 to 600 volts.

FIGS. 2A, 2B, 2C, and 2D are plots of the steady state response characteristics of the prior art circuit of FIG. **1** for two different levels of input power to the gas discharge lamp.

FIG. 2A is a plot of a single cycle of current through the gas discharge lamp as a function of time. The current is plotted on the vertical axis and the time is plotted on the horizontal axis. It will be understood that the current alternates through the lamp in a repetitive cycle. In the region of FIG. 2A, denoted "A", the transistor switch **14** is in the off state and the collapsing field in the inductor **17** is forcing a current through the gas discharge lamp. The region A covers a period of time between time T_0 and time T_A. This time period is equal to the unstable period of multivibrator **18**. In the region in FIG. 2A denoted "B", the transistor switch **14** is on. The region B lies between the time T_A and the time T_B, after which the cycle repeats itself.

In FIG. 2A, the magnitude of the lamp current in region A is shown to be roughly equal to the magnitude of the current in region B. Since, for reasons described above, there is no net DC current through the lamp, the respective areas under the curves in regions A and B are equal. Thus, in the circuit operating mode illustrated in FIG. 2A, the duration of the time periods A and B are roughly equal. The operational mode shown in FIG. 3A having approximately equal current flows in regions A and B is advantageous since it maximizes the efficiency of the lamp and also minimizes the current handling requirements for the switch transistor **14**. This operating mode is achieved for a fairly narrow range of DC voltage output of the power source **16** for a given lamp.

FIG. 2B is a plot of the current through the choke or inductor **17** as a function of time. The current through the choke is plotted on the vertical axis, while time is plotted on the horizontal axis. In the region of FIG. 2B denoted "A", at time T_0, the transistor has been turned off and the current through the choke in the region of FIG. 2B denoted "B" increases until time T_B, at which time the transistor is turned back off, and the cycle repeats itself. The behavior of the circuit thus alternates between the behavior plotted in region A and the behavior plotted in region B.

FIG. 2C is the plot of the collector current of the transistor plotted as a function of time. The collector current amplitude is plotted on the vertical axis and time is plotted on the horizontal axis. In the region denoted A of FIG. 2C, the transistor is off and therefore the collector current remains zero, from time T_0 to the end of region A at time T_A. In the region denoted B in FIG. 2C, at time T_A, the transistor is turned on and remains on until time T_B, which defines the end of region B. During this time, the collector current continually increases. At time T_B the transistor is again turned off and the process repeats itself. Thus, the collector current is periodic in time. The current level indicated by the plot is equal to the voltage on the conductor **22** of FIG. **1** divided by the resistance of the resistor **15** in FIG. **1**.

FIG. 2D is a plot of the voltage across the gas discharge lamp as a function of time. It is identical in shape to the lamp current shown in FIG. 2A at the operating frequency of the circuit, i.e., the frequency at which the transistor switch **14** is switched on and off. This frequency is chosen so that its period is short compared to the ionization time of the lamp. A representative operating range is from between 20 to 40 kHz. At this high frequency, the lamp appears electrically to be a resistor. Since the current through a resistor is linearly proportioned to the voltage across it, the lamp voltage and current wave forms are identical in shape.

The prior art control circuit of FIG. **1** has the significant advantage that the weight of the choke, shown in FIG. **1** as **17**, may be considerably reduced below the weight of the typical chokes found in the usual fluorescent lamp circuits using 60-Hz AC sources. By way of specific example, a choke suitable for use at 20 kHz will weigh on the order of 4 or 5 ounces whereas the corresponding choke for use at 60 Hz will weigh 4 or 5 pounds.

A feature of the prior art control circuit of FIG. **1** is that a selectively variable control over lamp intensity may be provided by the potentiometer **23**. The power input to the lamp (and the resultant lamp intensity) are approximately proportional to the average magnitude of the lamp current, which is plotted in FIG. 2A. This plot shows the current reversal during periods when the transistor is turned off, which occurs, for example, at time T_B.

Assume that at a particular setting "X" of the potentiometer **23** in FIG. **1**, the voltage on conductor **22** in FIG. **1** is lower than the voltage on the conductor at another setting "Y" of the potentiometer **23**. The corresponding changes in the waveforms in FIGS. 2A, 2B,

2C, and 2D between the two settings of the variable resistor for effecting different levels of the lamp intensity are illustrated in these figures. In each figure, the waveform on the left respresents setting X and the waveform on the right in each figure represents setting Y.

The manner in which this control is achieved with potentiometer **23** is as follows.

The peak lamp current always occurs whenever the transistor is turned off, corresponding to times T_0 and T_B. This occurs whenever the sum of the choke current and lamp current passing through the resistor, denoted **15** in FIG. **1**, causes a voltage drop across this resistor equal to the voltage on the conductor, denoted **22** in FIG. **1**. As stated above, this occurrence causes the comparator amplifier, **20** in FIG. **1**, to give a positive output to the multivibrator, which in turn causes the multivibrator to turn the transistor off.

The current passing through the resistor, **15** in FIG. **1**, is the collector current of the transistor. This current is plotted in FIG. 2C, as the sum of the lamp current and choke current in region B.

The peak collector current level is equal to the voltage on the conductor **22** in FIG. **1** divided by the resistance of the resistor, **15** in FIG. **1**. When the voltage on the conductor **22** is increased or decreased, the collector current peak level will increase or decrease, respectively. Because the decay time of the current between time T_0 and time T_A is always the same, the minimum value of the collector current will also increase or decrease, respectively. Thus, the entire waveform of the collector current will be shifted either up or down, respectively, of which two exemplary waveforms are plotted for the two different potentiometer settings X and Y. The waveforms of the choke current and the lamp current will also be shifted up or down respectively, as shown. This effect is the result of the fact that the collector current through the transistor is the sum of the choke current and lamp current, and the fact that the lamp current is proportional to the choke current.

Thus, it may be seen that the lamp intensity, which is proportional to lamp current, is proportional to the voltage on the conductor **22**. By changing the resistance of the potentiometer **23** in FIG. **1**, the current supplied to the lamp **11** will change.

Another feature of the prior art control circuit of FIg. **1** is that the useful life of the gas discharge lamp is increased since the net DC component of current through the lamp during continued operaton is approximately zero. This is achieved by virtue of the parallel inductance which has the property of maintaining a zero DC voltage drop across its terminals. Since this zero DC voltage is also maintained across the lamp, the DC current through the lamp will also be zero.

FIG. **3** illustrates a modified embodiment of the prior art control circuit of FIG. **1** in which a gas discharge lamp **35**, typically a low pressure mercury vapor fluorescent lamp of approximately **22** watts, is provided. The electrodes **38** and **40** are of the heated type. Power is derived from a DC voltagd source **16**.

An inductor **37** is connected in series with the transistor **14** and resistor **15** across the power supply **16**. The electrodes **38** and **40** of lamp **35** are tapped into sections **41** and **42** of the winding of inductor **37** to preheat such electrodes prior to ignition of the lamp.

The inductor **37** also acts as the primary winding of a transformer and has an iron core **39** and a step-down secondary winding **43** associated therewith. The winding **43** is connected in circuit with a diode **44** across a capacitor **45**. The diode **44** is also connected through line **46** to the power input terminals of the comparator amplifier **20** and multivibrator **18**. It is also used to supply the reference voltage to the potentiometer **23**.

The sections **41** and **42** of the winding of inductor **37** enable the electrodes **38** and **40** to become heated before the lamp is ignited. This arrangement maximizes electrode lift and prevents damage to the electrodes **38** and **40** due to the otherwise excessive rise of temperature at the start of a lamp operation.

The polarity of the winding **43** is preferably such that the capacitor **45** is charged only when the transistor **14** is conducting. This arrangement insures that the particular voltage on capacitor **45** is independent of the variable flyback voltage developed by the inductor **37** when the transistor **14** is cut off.

These prior art control circuits are particularly suited for use with low intensity, low pressure mercury vapor fluorescent lamps. However, when used to control various other types of gas discharge lamps such as high pressure mercury vapor, high or low pressure sodium, and metal Halide lamps, significant problems may arise.

One problem with the lamp control circuit of FIGS. **1** and **3** is that, if the lamp voltage illustrated in FIG. **2D** during the flyback mode of the circuit from T_0 to T_A is of insufficient magnitude to ignite lamp **11** when the switch **19** is first closed, then other means must be provided to furnish a sufficiently high voltage to ignite the lamp when the circuit is first activated. A typical high intensity discharge lamp such as a 400-watt high pressure sodium lamp, requires approximately 2500 volts across the lamp in order to ignite the lamp. One solution may be found by looking to prior art fluorescent lamp ballasts which operate at 60-Hertz and which must of necessity use very large and heavy inductors. In these prior art ballast circuits, the common technique for igniting the fluorescent lamp is to connect the secondary winding of a step-up transformer in series with the lamp, and connect the primary winding to a capacitive discharge device. Such a scheme presents insignificant problems in these prior art heavy ballast circuits because the additional inductance of the secondary winding is small compared to the inductance already present in the ballast. Furthermore, these prior art 60-Hertz ballast circuits do not fly back, as does the 20-KHz lamp circuit of this invention. As will be seen in a later portion of this description, the flyback cycle of the lamp control circuit of this invention creates special problems when the step-up transformer is introduced.

FIG. **4** illustrates a circuit which provides the ignition voltage of 2500 volts in a lamp control circuit similar to the control circuit as illustrated in FIG. **1** but using a high voltage ignition circuit similar to that used with prior art lamp ballast circuits. The high voltage ignition circuit includes a step-up transformer **50** having a primary winding **51** and a secondary winding **52**. The secondary winding **52** is connected in series with the gas discharge lamp **11** while the primary winding **51** is connected to a pulse voltage source **53**, which may, for example, be a capacitive discharge device. Control circuit **49** of FIG. **4** includes the control components of FIG. **1** includng the multivibrator **18**, the comparator amplifier **20**, the potentiometer **23**, and the reference voltage source **24**.

The pulse transformer **50** has a step-up ratio which is sufficient to provide 2500 volts to the lamp **11**. Thus, when it is desired to ignite the lamp **11**, the capacitive

discharge device **53** provides a high voltage pulse to the primary windings **51**, which is stepped up by the pulse transformer **50** to approximately 2500 volts across the secondary winding **52**. This 2500 volts appears across the lamp **11**, and causes the gas inside the lamp **11** to begin to ionize. If the first voltage pulse from the capacitive discharge device **53** is insufficient to completely ignite the lamp, the process will be repeated until ionization in the lamp is complete and the lamp **11** begins to conduct. At this point, the remainder of the control circuit may begin to function as described above in connection with FIGS. **1**, **2**, and **3**.

Unfortunately, the control circuit of FIG. **4** has the disadvantage that, after the lamp **11** has ignited, current through the lamp **11** will cause a current to be induced through the primary winding **51** having a large magnitude corresponding to the large step-up ratio of the transformer **50**. As a result, a significant power loss will occur through the transformer **50**. This will decrease the efficiency of the control circuit of FIG. **4** significantly. A solution to this problem is to provide a switch **54** which may be opened to prevent current from flowing through the primary winding **51**. However, after the switch **54** has been opened, the secondary winding **52** now acts as a large inductor in series with the lamp in addition to the inductor **17**.

At this point, the undesirability of applying the starting circuit used in prior art 60-Hertz lamp ballast circuits to the high frequency switching circuit of FIG. **1** is apparent. One significant feature of the high frequency switching circuit of FIG. **1** is that the circuit flies back at a frequency of 20-KiloHertz, and as a result the inductance of the inductor **17** may be very small in comparison with the large inductors typically used in prior art 60-Hertz lamp ballast circuits. Because the lamp ballast circuits of the prior art typically have large inductors, introduction of the secondary winding of the step-up transformer of the ignition circuit did not represent a significant increase in the inductance of the circuit, and therefore, introduction of the high voltage ignition circuit into the prior art ballast circuits did not change the operation of these circuits significantly. In contrast, the addition of the secondary winding **52** to the 20-KiloHertz lamp control circuit of FIG. **4** represents a significant increase in the inductance in the circuit because the inductor **17** is relatively small. Furthermore, unlike the 60-Hertz ballast circuits of the prior art, the 20-KiloHertz control circuit of FIG. **1** flies back each 20-KiloHertz cycle. This creates special problems in introducing the step-up transformer **50** in series with the lamp **11** which are peculiar to the 20-KiloHertz control circuit of FIG. **4**, and which were not encountered with the prior art 60-Hertz ballast circuits. During the flyback cycle of the 20-KiloHertz control circuit of FIG. **4**, when the transistor **14** is turned off, the flyback voltage of the inductor **17** must cause a reversal of the direction of the current in the lamp **11**. The magnetic field in the secondary winding **52** opposes the current flowing through the lamp **11** during this flyback cycle, thereby increasing the impedance to the current flowing through the lamp **11**, thus reducing the efficiency of the control circuit of FIG. **4**. Furthermore, the inductance of the secondary winding **52** represents a significant increase in the total inductance of the control circuit of FIG. **4**, which corresponds to a significant increase in the flyback voltage impressed across the transistor **14** and the varistor **27**. This increase in flyback voltage causes the varistor **27** to conduct more current to ground during the flyback cycle of the circuit of FIG. **4**, representing a further loss in efficiency of this circuit of FIG. **4**. Thus, it is apparent that introduction of the high voltage ignition circuit used in prior art 60-Hertz ballast circuits into the 20-KiloHertz lamp control circuit of FIG. **1**, as illustrated in FIG. **4**, significantly reduces the efficiency of the 20-KiloHertz lamp control circuit.

DESCRIPTION OF THE PREFERRED EMBODIMENT OF THE INVENTION

The circuit of FIG. **5** illustrates an embodiment of the invention in which the foregoing problems are solved. The control circuit of FIG. **5** includes a lamp control circuit similar to the lamp control circuit of FIG. **1**, and further includes a pulse transformer **50** having its primary winding **51** connected across a pulsed voltage source **53** such as a capacitive discharge device and a secondary winding **52** connected in series with the lamp **11**. In addition, the circuit includes a rectifying diode **55** connected across the secondary winding **52**, and a control circuit **56**.

The diode **55** may be any rectifying means, and has its polarity disposed so as to permit current flowing from the inductor **17** to the lamp **11** when the transistor **14** is turned off to flow through the diode **55** and bypass the secondary winding **52** and provides an alternate path for current flowing in the secondary winding **52** during the flyback cycle. The diode **55** maintains a substantially constant current through the secondary winding **52** so that the winding **52** does not present any substantial impedance or energy loss during the charging cycle of the circuit. This feature substantially prevents the inductance of the secondary winding **52** from affecting the operation of the lamp control circuit during its normal operating mode after the lamp **11** has been ignited.

A control circuit **56** controls the operation of the pulsed voltage source **53**. The control circuit **56** has one of its inputs **56*a*** sensing the collector voltage on the transistor **14**, while its other input **56*b*** senses the output from the control circuit **49** to the base of the transistor **14**.

Operation of the circuit of FIG. **5** is as follows. When the circuit is first activated and the lamp **11** is to be ignited, a large flyback voltage appears across the transistor **14** as discussed above in connection with FIGS. **1**, **2**, and **3**. Input **56*a*** and the control circuit **56** sense that the lamp **11** is off by sensing this large collector voltage, which means that the voltage source **53** must be activated to ignite the lamp. The control circuit **56** will activate the pulse voltage source **53** only after the transistor **14** is turned back on, in order to prevent the large ignition voltage from the pulse transformer **50** from imposing a large collector voltage on the transistor **14**. When the transistor **14** is on, this is sensed at the input **56*b*** of the control circuit **56** by sensing the output voltage of the control circuit **49** to the base of the transistor **14**. At this time, the control circuit **56** causes the pulsed voltage source **53** to impose a voltage in the primary winding **51**, which is of sufficient magnitude to cause an ignition voltage of 2500 volts on the secondary winding **52**. This ignition voltage causes the gas in the lamp **11** to begin ionization. If this ionization is not complete, then during the next cycle of the lamp control circuit the control circuit **56** will again sense that the lamp is still nonconducting by a high collector voltage of the transistor **14** sensed at input **56*a***. Again, as soon as the base voltage of the transistor **14**, sensed by input **56*b***, indi-

cates that the transistor **14** is on, the control circuit **56** will reactivate the pulsed voltage source **53** causing the pulse transformer **50** to produce a 2500-volt ignition pulse for a duration determined by the pulsed voltage source **53**. This cycle will repeat itself until the lamp **11** has ionized sufficiently to permit a normal driving of the lamp **11** with only the driving circuit **49**.

This circuit has the advantage that, after the lamp **11** is ignited, the inductance of the secondary winding **52** does not affect the operation of the lamp control circuit. The operation of the circuit of FIG. **5** when the lamp **11** is ignited is as follows: After ignition of the lamp **11**, the control circuit of FIG. **5** assumes its normal operating mode similar to that described above in connection with FIGS. **1** and **3**, and the secondary winding **52** effectively becomes an inductor, as the control circuit **56** opens the primary winding **51** to effectively take it out of the circuit. During the charging portion of the 20-KiloHertz cycle of the control circuit of FIG. **5**, when the transistor **14** is on, current flows from the power supply **16** and is divided between the inductor **17** and the lamp **11**. Part of the current flows through the inductor **17** and the transistor **14** to ground, while the remaining current flows through the lamp **11**, the secondary winding **52**, and the transistor **14** to ground. During this charging cycle, the current through the transistor **14** will increase as the magnetic fields in the inductor **17** and the secondary winding **52** increase. During the flyback portion of the 20-KiloHertz cycle of the control circuit of FIG. **5**, when the transistor **14** is off, the current flowing through the inductor **17** flows through the diode **55** and the lamp **11**, thereby completely bypassing the secondary winding **52**. As a result, the magnetic field in the secondary winding **52** cannot oppose the current flowing through the lamp **11** during the flyback cycle. Furthermore, the diode **55** shunts the current flowing in the secondary winding **52**, thereby preventing this current from affecting the operation of the control circuit of FIG. **5**. As a result, the current through the secondary winding **52** does not significantly decrease during the flyback cycle. Therefore, when the transistor **14** is again turned back on, the current supplied from the power source **16** flowing through the lamp **11** is not required to significantly change the current flowing through the secondary winding **52**. As a result, current in the secondary winding remains fairly constant and the secondary winding **52** does not present a significant impedance to the current flowing through the lamp **11** during the charging portion of the 20-KiloHertz cycle. Therefore, the secondary winding **52** does not absorb significant power from the power source **16**.

It is now apparent that the shunting diode **55** prevents the inductance of the secondary winding **52** from affecting operation of the control circuit of FIG. **5** during either the charging portion or the flyback portion of the 20-KiloHertz cycle. Furthermore, because the diode **55** shunts the current across the secondary winding **52** during the flyback cycle, the inductance of the secondary winding **52** does not contribute to the flyback voltage across the transistor **14**. Instead, only the inductor **17** contributes to the flyback voltage across the collector of the transistor **14** as does the circuit of FIG. **1** even though the circuit of FIG. **5** includes the pulse transformer **50** in series with the lamp **11** having a very high step-up ratio. This invention thus includes a source producing a high ignition voltage across the lamp **11** which does not increase the flyback voltage in the almp control circuit.

CURRENT REGULATION

Another problem inherent in the control circuit of FIG. **1** is that the power consumed by the circuit is dependent upon the effective resistance of the gas discharge lamp **11**. It is well known that if the control circuit oscillates at a high frequency, the lamp **11** may be characterized as a resistor. For high pressure mercury vapor lamps, this equivalent resistance is relatively constant over the life of the lamp. The problem arises when a high pressure sodium lamp is used as the lamp **11** in the circuit of FIG. **1**. The resistance of high pressure sodium lamps increases over the life of the lamp. For example, if the lamp **11** in FIG. **1** is a high pressure sodium lamp, and if the potentiometer **23** of FIG. **1** is first adjusted so that the control circuit of FIG. **1** furnishes 400 watts of power to the lamp **11**, the voltage drop across the lamp when new would be approximately 95 volts. However, during the life of the lamp, this voltage can increase to 135 volts. This is because the lamp control circuit maintains a constant current through the lamp and choke parallel combination even though the lamp resistance increases. For example, as the lamp resistance increases, the control circuit of FIG. **1** will increase the lamp voltage, plotted in FIG. **2D**, so that the current through resistor **15**, plotted in FIG. **2C**, does not change. This voltage increase corresponds to an increase in the power consumed, and a significant increase in the cost of operating the lamp control circuit.

FIG. **6** illustrates another embodiment of the invention in which the foregoing problems are solved. The current regulation circuit of FIG. **6** comprises another transformer **60** connected in series with lamp **11** in a lamp control circuit similar to the lamp control circuit of FIG. **1**. In the circuit of FIG. **6**, the power consumed is independent of the equivalent resistance of the lamp **11**. Therefore, if the lamp **11** in FIG. **6** is a high pressure sodium lamp, the power consumed by the lamp control circuit will remain constant, even though the equivalent resistance of the lamp **11** may increase significantly.

The transformer **60** has its primary winding **61** connected in series with the lamp. Secondary winding **62** of the transformer **60** is wound to provide a reversed polarity with respect to the primary winding **61**, so that the current flowing from the voltage source **16** through the lamp **11** while the transistor **14** is on produces a negative voltage and reverse current in the secondary winding **62**. Isolation diodes **63** and **64** are provided on the ungrounded side of the secondary winding **62**.

The negative voltage in the secondary winding **62** causes a negative voltage to appear across the resistor **65** which is proportional only to the current through the lamp **11**. Resistors **66** and **67** are connected to form a summing node **68** for the voltage across resistor **65**. As discussed above in connection with FIGS. **1** and **3**, the voltage across the resistor **15** is a function of the current through both the lamp **11** and the inductor **17**. This voltage is applied to summing node **68** through summing node resistor **66**. The negative voltage across resistor **65** is applied to summing node **68** through summing node resistor **67**. The resistance values of resistors **15**, **65**, **66**, **67** are preferably selected so that the contribution to the voltage across resistor **15** by current through the lamp **11** is precisely nulled at the summing node **68** by the negative voltage across the resistor **65**.

As a result, the voltage at the summing node **68** applied to the negative input **20A** of the comparator **20** is a function exclusively of the current through inductor **17**, and is independent of the current through the lamp **11**. As a result, the comparator amplifier **20** will control the multivibrator **18** and transistor **14** independently of changes in the equivalent resistance of the lamp **11**.

Thus, the control circuit of FIG. **6** does not increase the voltage applied to the lamp **11** as the lamp resistance increases. Therefore, the power consumed by the circuit of FIG. **6** will not increase with lamp resistance as does the power consumed by the circuit of FIG. **1**.

The lamp control circuit illustrated in the detailed schematic diagram of FIG. **7** includes a combination of the features discussed above in connection with FIGS. **1**, **5**, and **6**. Thus, the circuit of FIG. **7** has a basic lamp control circuit including a gas discharge lamp **11**, a switching transistor **14**, a resistor **15**, a multivibrator **18**, and a comparator **20**. However, the inductor **17** of FIG. **1** is replaced instead by a transformer **70** having primary and secondary windings **71**, **72**, respectively. The transformer **70** transforms the voltage from the voltage source **19** to the optimum operating voltage of the lamp **11**. The basic lamp circuit including the lamp **11**, the transistor **14**, and the resistor **15**, the multivibrator **18**, the comparator **20**, the potentiometer **23**, and the transformer **70** operate in the manner described above in connection with the lamp control circuit of FIG. **1**.

The high ignition voltage circuit of FIG. **5** is included in the circuit of FIG. **7** as the pulse transformer **50** having its primary winding **51** connected to discharge capacitors **53***a*, **53***b*, and to controller **56**. The diode **55** is connected across the secondary winding **52** in the circuit of FIG. **7** and prevents the inductance of the secondary winding **52** from affecting the operation of the basic lamp control circuit, in the same manner as described above in connection with the pulse transformer circuit of FIG. **5**. The controller **56** is preferably a silicon controlled rectifier. The gate of the silicon controlled rectifier is connected to the multivibrator circuit **18**. When the multivibrator circuit **18** turns the transistor **14** on, it simultaneously causes a voltage at the gate of the silicon control rectifier **56** to turn the silicon control rectifier **56** on. This completes the circuit between the discharge capacitors **53***a*, **53***b*, and the primary winding **51** of the pulse transformer **50**. As described above in connection with FIG. **5**, this generates a 2500-volt ignition voltage across the secondary winding **52**, which drives the lamp **11**. After ignition of the lamp, even though the S.C.R. **56** continues to fire each time transistor **14** turns on, the 20-KHz switching frequency of transistor **14** prevents significant voltage from building up in capacitors **53***a*, **53***b* so that they no longer have any effect in the circuit.

The current regulation circuit described above in connection with FIG. **6** is also present in the circuit of FIG. **7**, and includes the transformer **60** having its primary winding **61** connected in series with the lamp **11**, and its secondary winding **62** wound with opposing polarity and connected through isolation diode **63** to resistor **65**. Summing node **68** sums the voltage across resistor **15** through summing resistor **66** and the voltage across resistor **65** through summing resistor **67** and applies the resultant voltage to the input **20***a* of comparator **20**. This current regulation circuit operates in the same manner described above in connection with the current regulation circuit of FIG. **6**.

The circuit of FIG. **7** also includes a delay circuit **80** connected to shut-down input **18***a* of the multivibrator circuit **18**. The delay circuit **80** shuts down the multivibrator circuit **18** by applying a signal to shut down input **18***a* as soon as power is first applied from the voltage source **19** in order to allow the discharge capacitors **53***a*, **53***b* to have enough time to charge up to a sufficient voltage to ignite lamp **11**. After a predetermined length of time, the delay circuit **80** no longer shuts down the multivibrator circuit **18**, and the lamp control circuit of FIG. **7** begins to operate. The metal oxide varistor **27** is connected to the collector transistor **14** in the same manner as described above in connection with FIG. **1**. However, a second shut-down circuit **90** is provided which shuts down the multivibrator circuit **18** for a predetermined length of time whenever the varistor **27** senses a high enough voltage across transistor **14** to break down. The low side of varistor **27** is connected to the input of the protective shut-down circuit **90**. The output of the second shut-down circuit **90** is connected to the shut-down input **18***a* of multivibrator circuit **18**. The second shut-down circuit **90** includes an astabile multivibrator **91**. Breakdown of the varistor **27** causes the multivibrator **91** to change state and issue a signal to the shut-down input **18**, which holds the multivibrator circuit **18** shut down for a predetermined length of time determined by the duration of the astabile state of the multivibrator **91**.

This arrangement permits repeated pulses to be produced for starting the lamp if ionization is not complete after the first pulse, by allowing the capacitors **53***a* and **53***b* sufficient time to recharge. Again, after the capacitors **53***a*, **53***b* have recharged, the S.C.R. **56** again fires to cause a high voltage pulse across the lamp.

What is claimed is:

1. A circuit for energizing a gas discharge lamp comprising:

switching means for generating an alternating current above 20 KHz for illuminating a lamp;

means for inducing a high voltage igniting pulse on said lamp, said means connected in series with said lamp; and

means automatically preventing the impedance of said high voltage means from affecting operation of said switching means and lamp upon ignition of said lamp.

2. A control circuit for energizing a gas discharge lamp, comprising:

switching means alternately generating a charging current and a flyback current in opposite directions connected across said lamp for sustaining and controlling illumination in said lamp;

pulse transformer means connected in series with said lamp for initially igniting said lamp; and

means for automatically preventing the magnetic field in said pulse transformer means from opposing current flow through said lamp.

3. A circuit as defined in claim **2** wherein:

said pulse transformer means comprises a primary winding and a secondary winding;

said primary winding is connected across a voltage source;

said secondary winding is connected in series with said lamp; and

said preventing means comprises a diode means connected across said secondary winding providing an alternate path to current flowing through said secondary winding.

4. A circuit as defined in claim 2 wherein:
said switching circuit means comprises an inductor means generating a flyback voltage during every other half cycle of said switching circuit means; and
said preventing means prevents inductance in said pulse transformer means from contributing to said flyback voltage.

5. A circuit as defined in claim 3 wherein said voltage source connected across said primary winding comprises a capacitive discharge device.

6. A circuit as defined in claim 3 wherein said primary and secondary windings define a turns ratio in said pulsed transformer which steps up voltage from said voltage source to a high voltage sufficient to ignite said lamp.

7. A circuit as defined in claim 4 wherein said preventing means permits current flow in one direction only, the polarity of said preventing means disposed so that both current generated in said inductor means causing said flyback voltage and current generated by inductance in said pulse transformer means during said every other half cycle flows through said rectifier means.

8. A circuit as defined in claim 5 wherein said capacitive discharge device comprises a capacitor connected across said primary winding, a silicon controlled rectifier connected in series with said capacitor, and a control circuit which triggers said silicon controlled rectifier only when said switching means is in a conducting state.

9. A circuit as defined in claim 3 wherein said diode means maintains a nearly constant current through said secondary winding.

10. A circuit for operating a gas discharge lamp comprising:
means for storing energy connected in parallel combination with said lamp;
switching means connected in series with the parallel combination of said lamp and said storing means;
means for sensing current through said switching means;
means for subtracting the current through said lamp from the current sensed in said sensing means to produce a difference signal; and
control means for temporarily turning said switching device off in response to current sensed by said sensing means above a predetermined level, said control means responsive to said difference signal to operate independently of current through said lamp.

11. A circuit as defined in claim 10 wherein said subtracting means comprises a transformer having its primary winding connected in series with said lamp and a secondary winding connected across a resistor means so that current flow through said lamp induces a voltage across said resistor.

12. A circuit as defined in claim 11 wherein said current flow through said lamp causes a negative voltage to appear at one end of said resistor with respect to its other end, and said circuit further comprises means sending at least a portion of said negative voltage to said sensing means so that lamp current sensed by said sensing means is nulled.

13. A circuit as defined in claim 10 wherein said secondary winding is wound in an opposite sense with respect to said primary winding so that a negative voltage is induced in said secondary winding by current flowing through said lamp while said switching means is on.

14. A circuit as defined in claim 13 wherein said sensing means responds to a first voltage proportional to said current through said parallel combination, said circuit further comprising summing means for combining said negative voltage and said first voltage at said sensing means.

15. A circuit for energizing a high intensity, high pressure gas discharge lamp comprising:
a power source;
a lamp;
means for storing energy connected across said lamp in a parallel combination;
switching means connected in series with said parallel combination;
means for sensing the current in said parallel combination for activating said switching means; and
means for preventing increased lamp resistance from causing an increase in the power consumed from said source.

16. A circuit as defined in claim 15 wherein said lamp is a high pressure sodium lamp.

17. A circuit for energizing a gas discharge lamp comprising:
a lamp;
means for storing energy connected across said lamp in a parallel combination;
switching means connected in series with said parallel combination; and
means for operating said switching means independently of current through said lamp.

18. A circuit as defined in claim 18 wherein said operating means senses current through said storing means exclusively.

* * * * *