

68 1742

AUSTRALIA
Patents Act 1990P/00/008
Section 29(1)
Regulation 3.1(2)

NOTICE OF ENTITLEMENT

We FRENZELIT-WERKE GmbH & CO. KG

of D-95456 Bad Berneck, Germany

being the Applicant and Nominated Person, in respect of Application No. 13147/95, entitled "Soft Sealing Material Free of Asbestos and Other Inorganic Fibres" state the following:

Gerhard Bauer and Fritz Edlich-Wolfshöfer are the actual inventors of the invention.

The inventors made the invention for and on behalf of the applicant and nominated person in the course of their duties as employees of the applicant and nominated person who claimed and rightfully acquired all rights in and to the invention in accordance with German law.


Frenzelit-Werke GmbH & Co. KG is the applicant of the application listed in the declaration under Article 8 of the PCT.

Convention priority is claimed from the following basic application referred to in the declaration under Article 8 of the PCT:

Basic Applicant	Application Number	Application Date	Country	Country Code
Frenzelit-Werke GmbH & Co. KG	P 43 42 811.8	15 December 1993	Germany	DE

The basic application referred to in the declaration under Article 8 of the PCT was the first application made in a Convention country in respect of the invention the subject of the Application.

DATED this 17th day of June 1997

FRENZELIT-WERKE GmbH & CO. KG
By their Patent Attorney
GRIFFITH HACK

OUR REF: P24422A/JDF:WW



AU9513147

(12) PATENT ABRIDGMENT (11) Document No. AU-B-13147/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 681742

(Modified Examination)

- (54) Title
SOFT SEALING MATERIAL FREE OF ASBESTOS AND OTHER INORGANIC FIBRES
- (51)⁶ International Patent Classification(s)
D21H 013/26 F16J 015/00
- (21) Application No. : 13147/95 (22) Application Date : 15.12.94
- (87) PCT Publication Number : WO95/16822
- (30) Priority Data
- (31) Number (32) Date (33) Country
4342811 15.12.93 DE GERMANY
- (43) Publication Date : 03.07.95
- (44) Publication Date of Accepted Application : 04.09.97
- (71) Applicant(s)
FRENZELIT - WERKE GMBH & CO. KG
- (72) Inventor(s)
GERHARD BAUER; FRITZ EDLICH-WOLFSHOFER
- (74) Attorney or Agent
GRIFFITH HACK, GPO Box 4164, SYDNEY NSW 2001
- (56) Prior Art Documents
US 4748075
- (57) Claim
1. A non-woven gasket composition for forming substantially planar sealing materials, said gasket composition comprising:

a non-woven web of inter-engaged fibers including non-fibrillated organic staple fibers having an elongation at break of less than about 5% at temperatures up to about 200°C, from about 2 to about 4% by weight, based on the weight of the gasket composition, of fibrillated polyaramide fibers, at least about 60% by weight, based on the weight of the gasket composition, of finely-divided graphite powder, the graphite powder having a particle size distribution such that 98% of the graphite powder has a particle size less than about 70 micrometers, and an elastomeric resin binder, said composition being substantially free of inorganic fibrous materials and having sufficient sheet forming properties such that the composition forms a web by calendering at elevated temperature and pressure conditions, the non-woven web having a temperature stability such that there is less than 10% change in thickness of the web under a compression of 50 Newtons per square millimeter as the temperature is increased from 20°C to 200°C.

CPI DATE 03/07/95 APPLN. ID 13147/95
AOJP DATE 24/08/95 PCT NUMBER PCT/EP94/04167



AU9513147

(51) Internationale Patentklassifikation ⁶ : D21H 13/26, F16J 15/00		A1	(11) Internationale Veröffentlichungsnummer: WO 95/16822
		(43) Internationales Veröffentlichungsdatum:	22. Juni 1995 (22.06.95)
(21) Internationales Aktenzeichen:	PCT/EP94/04167	(81) Bestimmungsstaaten: AU, BR, CA, CN, CZ, HU, JP, KP, KR, PL, RU, SI, SK, UA, europäisches Patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) Internationales Anmeldedatum:	15. December 1994 (15.12.94)	Veröffentlicht <i>Mit internationalem Recherchenbericht.</i>	
(30) Prioritätsdaten:	P 43 42 811.8 15. December 1993 (15.12.93) DE	68 17 42	
(71) Anmelder:	FRENZELIT-WERKE GMBH & CO. KG [DE/DE]; D-95456 Bad Berneck (DE).		
(72) Erfinder:	BAUER, Gerhard; Schlömen 14, D-95339 Neuenmarkt (DE). EDLICH-WOLFSHÖFER, Fritz; Röhrenhof 3, D-95460 Bad Berneck (DE).		
(74) Anwalt:	MÜLLER-BORE & PARTNER; Isartorplatz 6, D-80331 München (DE).		
(54) Title: SOFT SEALING MATERIAL FREE OF ASBESTOS AND OTHER INORGANIC FIBRES			
(54) Bezeichnung: ASBESTFREIER ODER VON ANDEREN ANORGANISCHEN FASERIGEN STOFFEN FREIER WEICHSTOFFDICHTUNGSWERKSTOFF			
(57) Abstract			
The invention concerns a soft sealing material, in the form of paper, cardboard or sheets, which is free of asbestos and other inorganic fibres, the sealing material consisting of reinforcement and sheet-forming fibres, fillers to increase the friction between the graphite flakes, plus organic binders, a mixture of non-fibrillated organic fibres with an extension at break (at up to 200 °C) of < 5 % and fibrillated P-polyaramid fibres plus graphite powder being used as the reinforcement and sheet-forming fibres. The invention also concerns a method of producing such sealing materials, the reinforcement fibres being homogenized with the organic sheet-forming fibres, binders and fillers in a mixer and the mixture subsequently heated under pressure. Finally, the invention concerns the use of such materials in the manufacture of such sealing materials for industrial and commercial purposes, in particular for secondary seals in automobiles, cylinder-head seals, seals in chemical plants and power stations and seals in heating systems.			
(57) Zusammenfassung			
Die Erfindung betrifft einen asbestfreien oder von anderen anorganischen faserigen Stoffen freien Weichstoffdichtungswerkstoff in Form von Papieren, Pappen oder Platten, bestehend aus armierungs- und blattbildenden Fasern, Zuschlagstoffen zur Erhöhung der Reibung zwischen den Graphitflocken und organischen Bindemittel, wobei als armierungs- und blattbildende Fasern eine Mischung aus nichtfibrillierten organischen Fasern mit einer Bruchdehnung von < 5 % (bis 200 °C) mit fibrillierten P-Polyaramidfaser sowie Pudergraphit eingesetzt wird. Die Erfindung betrifft weiterhin ein Verfahren zur Herstellung von asbestfreiem oder von anderen anorganischen faserigen Stoffen freien Weichstoffdichtungswerkstoffen, wobei die armierungs- mit den blattbildenden organischen Fasern, Bindemitteln und Füllstoffen in einem Mischer homogenisiert werden und anschließend das Gemisch mit Wärme und Druck behandelt wird. Die Erfindung betrifft schließlich die Verwendung des vorgenannten Werkstoffes zur Herstellung von asbestfreiem oder von anderen anorganischen faserigen Stoffen freiem Dichtungsmaterial für technische Zwecke, insbesondere für Automobilneabdichtungen, Zylinderkopfdichtungen, Dichtungen im Chemieanlagen- und Kraftwerksbau, Dichtungen im Heizungsbau.			

A soft-substance sealing material free from asbestos or other inorganic fibrous substances

The present invention relates to a soft-substance sealing material free from asbestos or other inorganic fibrous substances in the form of papers, paperboards or cardboards or plates, consisting of reinforcement-forming and sheet-forming fibers, aggregates for increasing the friction between graphite flakes and organic binders, a mixture of non-fibrillated organic fibers having an elongation at break of <5% (up to 200°C) and fibrillated P polyaramide fibers as well as powdered graphite being used as the reinforcement-forming and sheet-forming fibers.

The invention also relates to a process for the production of soft-substance sealing materials free from asbestos or other inorganic fibrous substances, the reinforcement-forming and sheet-forming organic fibers, binders and aggregates being homogenized in a mixer to increase the friction between the graphite flakes and then the mixture being treated with heat and pressure.

Finally, the invention concerns the use of the above-mentioned material for the production of sealing material free from asbestos or other inorganic fibrous substances for technical or industrial purposes, particularly for secondary or auxiliary automobile gaskets, cylinder head gaskets, gaskets or seals used in the construction of chemical plants and power stations, gaskets or seals used in the construction of heating systems.

Soft Asbestos-Free Sealing Material

Background of the Invention

The present invention concerns soft sealing materials which do not contain asbestos and other inorganic fibrous substances. More particularly it relates to new and improved non-woven sealing materials produced by means of paper processes or paper calendaring techniques from organic synthetic fibers, powdered graphite and polymeric binders. This invention also relates to the uses of these materials for the production of sealing materials for technical or industrial purposes, particularly such applications as seals or gaskets used in the construction of heating systems and also gaskets for use in the construction of chemical plants and power plants.

Asbestos, as well as all of the inorganic fibers lying within a certain fiber size distribution range, i.e., those having certain fiber lengths of between about 3 micrometers to about 5 micrometers ($>5/\mu\text{m}$, $\phi < 3/\mu\text{m}$, length/ $\phi = 3:1$) are suspected of causing adverse effects injurious to health. In particular, health hazards associated with asbestos have been known for some time. The additional safety steps presently required for processing asbestos, as well as the other inorganic fibers, renders them uneconomical to use. Therefore, new materials which, if possible, do not contain the above mentioned inorganic fibers are needed.

Conventional asbestos-free, soft-substance flat packing materials consist of either mixtures of various fiber kinds having mineral filler additives and organic binders (DE-PS 2914173 and DE-OS 3232255) or expanded graphite.

Fiber-free gaskets on the basis of expanded graphite are known. However, the expensive production difficulties resulting from their further processing prevent the success of these products on the market for lack of sufficient handling stability.

Developments using fiber-reinforced graphite are

also known, for example, from U.S. Pat. No. 4,443,517. Prior gasket compositions employ organic binders in amounts of 3 to 8% which are necessary to obtain a sufficient cross sectional tightness and for an economical manufacture. A total fiber content of about 6%, and more than 60% of flake graphite is used. This gasket formulation exhibits poor temperature stability in use.

Accordingly, it is an object of this invention to provide soft non-woven sealing materials, free of asbestos and other inorganic fibrous substances, having good temperature stability properties, which may be made in an ecologically beneficial manner using paper processes or paper calendaring techniques without the need for solvents or other offensive or corrosive chemicals or acids.

It is another object of the present invention to provide new and improved planar non-woven gasket materials useful in the production of special, highly stressed flat packings.

Summary of the Invention

In accordance with these and other objects, the present invention provides a new and improved gasket composition for forming substantially planar sealing materials. The gasket composition comprises a non-woven web of interengaged fibers including non-fibrillated organic staple fibers and fibrillated organic fibers. The composition further includes a finely-divided graphite powder which is distinct from prior flaked graphite additives. An elastomeric resin binder is also present in the composition. The new and improved gasket compositions are substantially free of any inorganic fibrous materials.

In accordance with the preferred embodiment, the non-fibrillated organic fibers have a % elongation at break of less than 5% at temperatures up to about 200°C, and have a length dimension of less than 5 mm, and preferably between about 2.0 to about 4.0 mm. The non-

fibrillated fibers may be selected from synthetic thermoplastic polymer fibers such as polyester fibers, polyamide fibers, polyaramid fibers and polybenzimidazole fibers. Especially preferably, the non-fibrillated
5 fibers are high temperature resistant polyaramid fibers present in an amount of from about 0.5 to about 1.5% by weight, based on the weight of the gasket composition.

In the preferred embodiment, the fibrillated organic fibers are preferably polyaramid fibers formed from drawn
10 oriented and flattened sheets or mechanically ground fibers to provide ribbon-like, as opposed to round, cross-sectional configurations. The fibrillated organic fibers are preferably present in an amount of from about 2 to 4% by weight based on the weight of the gasket
15 composition.

In accordance with an important aspect of this invention, the gasket composition also includes finely divided graphite powder. The graphite powder preferably has a particle size distribution such that 98% of the
20 graphite powder particles have a particle size of less than about 70 micrometers. The graphite powder is added in an amount of at least about 60% by weight, based on the weight of the gasket composition.

The elastomeric organic resin binder may be selected
25 from natural synthetic rubbers such as chloroprene, neoprene, polyisoprene, polyisobutylene, butyl rubber, acrylonitrile-butadiene rubber (NBR), styrene-butadiene rubber (SBR) ethylene-propylene rubber (EPR) ethylene-propylene-diene rubber (EPDM) and the like. The
30 elastomeric resin binder may be present in amounts of from about 3% to about 8% by weight, inclusive, based upon the weight of the gasket composition. The gasket composition may also comprise mineral fillers, curing agent additives, processing aids, stabilizers and the
35 like added in their conventional amounts.

In accordance with another important aspect, the present invention provides a new and improved method for making a non-woven substantially planar sealing material,

said method comprising:

forming an admixture including non-fibrillated organic staple fibers, fibrillated organic fibers, finely divided graphite powder and an elastomeric resin binder, agitating said admixture for a time sufficient to provide a web-forming composition including a well-distributed mass of interengaged fibers; and thereafter, subjecting said web forming composition to elevated temperature and pressure conditions to provide a substantially planar, non-woven web sealing material.

Other objects and advantages of this invention will become apparent from the following Detailed Descriptions, Drawing, and illustrative working Examples.

Brief Description of the Drawing

Fig. 1 is a graphical plot showing changes in thickness dimensions of sealing materials in accordance with the prior art and in accordance with the present invention under constant compression loading as a function of temperature.

Detailed Description of the Invention

The present invention provides a soft-substance sealing material free from asbestos or other inorganic fibrous substances, which may be prepared in the form of papers, paperboards, cardboards or plates. The material according to this invention includes reinforcement-forming and sheet-forming fibers, fillers and organic binders. More particularly, a preferred gasket forming composition comprises a mixture of non-fibrillated, particularly organic, fibers having a % elongation at break of greater than about 5% at temperatures up to about 200°C, and fibrillated P polyaramide fibers, as well as, powdered graphite.

The non-fibrillated organic fibers preferably have an elongation at break of <5% (up to 200°C) and a length of 2 to 4 mm. The composition according to the invention contains them in an amount of 0.5 to 1.5% by weight.

The fibrillated organic fibers are polyaramid fibers, particularly substantially linear polyaramid

fibers derived from 1,4-phenylenediamine units and terephthalic acid units. These fibers are commercially available under the tradename KEVLAR®, from DuPont®. The fibrillated organic fibers are present in the composition in an amount of about 2 to about 4% by weight.

The composition preferably contains at least 60% by weight of powdered graphite. The powdered graphite has a "fine powder" quality and a grain-size distribution such that 98% of the powder particles have a particle size of less than about 70 micrometers. According to the invention, organic binders, particularly lattices, natural and synthetic rubbers such as NR, NBR, SBR and CR may be used as binders. The amount of elastomeric binders in the composition according to the invention is preferably from about 3 to about 8% by weight.

The gasket compositions of this invention may also include curing agents, processing aids, mineral fillers, pigments, stabilizers and other additives as desired. More particularly, illustrative curing agents may include vulcanizing agents, sulfur compounds, oxidizing agents, free-radical generators, organic peroxides, azo compounds, organic sulfur compounds and accelerants such as amines and imidazole compounds. Combinations of curing agents, accelerators and processing aids may also be used. For example, a combination of 0.9% by weight of zinc oxide, 0.1% of thiocarbanilide and 0.5% of ammonium sulfate comprising 1.5% by weight of the overall composition may be used. Other examples of non-sulfur vulcanization agents may include Vulkaresen PA 105® and a processing agent, Catiofast CS®, both of which brands are commercially available materials.

Other illustrative additives including heat stabilizers, UV stabilizers and anti-ozonants may be used, particularly phenolic antioxidant heat stabilizers, each being added in conventional amounts of up to about 2.0% by weight of the overall composition. These curing

agents, processing aids and other additives are well known to those skilled in this art and they may be used herein in their conventionally employed amounts.

5 Furthermore, conventional fillers may be used additionally in such materials. In this case, finely divided mineral fillers such as micas, talcs, silicas, amorphous silicas, diatomaceous earth, barium sulfate, kaolin and clays, may be employed as fillers herein.

10 In an especially preferred embodiment, the composition according to the invention comprises of 70% by weight of powdered graphite, 0.9% by weight of P polyaramid staple fibers, 3.1% by weight of fibrillated P polyaramid fibers, 7% by weight of binder, 1.5% of curing and/or processing aid as well as 17.5% by weight of
15 fillers.

20 In another preferred embodiment, the composition comprises: about 75% by weight of powdered graphite, 0.7% by weight of P polyaramid staple fibers, 3.3% by weight of fibrillated P polyaramid fibers, 4% by weight of binder, 1.5% by weight of curing and/or process aid as well as 15.5% by weight of fillers.

25 The present invention also relates to a process for the production of soft-substance sealing materials free from asbestos or other inorganic fibrous substances, in which the reinforcement-forming and sheet-forming organic fibers, binders and fillers are homogenized in a mixer and then the mixture is treated with heat and pressure.
30 In particular, the material is made by means of paper processes or paper making-calendaring techniques. In this connection, the sheet-forming and reinforcing fibers are slightly ground jointly in a refiner, i.e. in a grinding device, preferably before they are suspended, so that the sheet-forming fibers mat together with the reinforcing fibers without increased fibrillation.

35 Illustrative processing conditions for making the non-woven planar sealing materials of this invention generally include exposing the web forming composition to elevated temperatures of at least about 100°C, preferably

between about 100°C to 130°C in conventional papermaking equipment. Elevated pressures of above about 5 Newtons per square millimeter should also be used, preferably pressures of between about 5 to about 15 N/mm² are employed. In calendaring equipment, the web forming compositions are preferably exposed to elevated temperatures of between about 135° to about 160°C and elevated pressures of between about 20 to 40 N/mm².

The high temperature resistant compositions and sealing gasket materials made according to the invention are well suited for use as sealing materials for technical or industrial purposes, particularly for secondary automobile gaskets, cylinder head gaskets, seals of gaskets used in the construction of chemical plants and in power plants, as well as, for gaskets or seals used in the construction of heating systems.

Surprisingly, it has turned out that the required temperature stability is achieved when non-fibrillated organic fibers, particularly P polyaramide fibers having an elongation at break of <5% (up to 200°C) and a length of 2 to 4 mm, are added in an amount of as little as 0.5 to 1.5% by weight to the compositions. On testing, it has been determined that measurements of compression set at 50 N/mm² pressure per unit area and a temperatures increased from 20°C to 200°C has resulted in less than a 10% change in thickness.

A person skilled in the art is familiar with the fact that non-fibrillated fibers generally have insufficient sheet-forming properties in economical paper processes. In addition, the introduction of organic fiber amounts sufficient for the sheet formation, usually also causes further reduction of the temperature stability, and in the case of para-polyaramid (p-phenylene terephthalamide) fibers, uneconomical price increases.

Surprisingly, it has turned out additionally that, when powdered graphite of "fine powder" quality and a grain-size distribution of 98% <70/μm is employed, sheet-

forming properties are achieved with the addition of as little as 2 to 4% by weight of fibrillated P polyaramide fibers.

As an overall effect, it has been found that the combined use of powdered graphite having the described grain-size distribution and a mixture consisting of reinforcing and sheet-forming fibers, non-fibrillated organic fibers having an elongation at break of <5% (up to 200°C), particularly a length of 2 to 4 mm, being used as the reinforcing fibers and fibrillated P polyaramide fibers being used as the sheet-forming fibers, provides gasket materials which may be prepared in an economic production processes having properties capable of meeting the technological demands made on today's sealing materials.

This especially economic manufacturing method enables the seals made from the composition material according to the invention to be used in a wide range of applications from the construction of heating systems to the automobile field. Cylinder head gaskets and other seals useful in the construction of chemical plants and power plants may also be made and provided by the materials and methods of this invention.

The environmentally beneficial production by means of paper processes or paper and calendar techniques makes it possible to dispense with solvents (presently used in the calendar technique) aggressive acids (expanded graphite) and inorganic fibers (presently used in the paper technology of cylinder head gaskets).

Description of the Preferred Embodiments

Table 1 below lists formulations for the compositions according to the invention in Example 1 and Example 2, as well as, comparative formulations of Example A and Example B. The materials were produced on a paper machine. The listed values are based on % by weight of the overall composition.

TABLE 1

	Example/pbw	1	2	A	B
	powdered graphite	70	75	-	70
	flake graphite	-	-	70	-
5	P polyaramide staple	0.9	0.7	0.9	-
	P polyaramide fibril	3.1	3.3	3.1	4
	SBR binder	7	4	7	7
	curing/processing aid	1.5	1.5	1.5	1.5
	fillers	17.5	15.5	17.5	17.5
10	Total parts by weight	100	100	100	100


The compression set of the sealing materials prepared according to Examples 1-2 and A-B at 50 N/mm² was determined in accordance with DIN 3754. The results are shown in Fig. 1.

Fig. 1 shows that the materials according to this invention, Examples 1 and 2, have a change in thickness of less than 10% when the temperature is increased from +20°C to 200°C, whereas comparative Examples A and B show marked changes in thickness at 60°C and 120°C, respectively. Fig. 1 shows the marked advantages of the composition and sealing materials provided by the present invention.

Each of the above mentioned patents and publications are specifically incorporated herein by reference.

Although the present invention has been described with reference to certain preferred embodiments, modifications or changes may be made therein by those skilled in this art. For example, instead of having both the non-fibrillated and fibrillated fibers be comprised of polyaramid, the non-fibrillated fiber may be a high temperature resistant benzimidazole filter. Instead of using an NBR or SBR resin binder, an EPDM binder may be substituted. All such obvious modifications or changes

may be made herein by those skilled in this art without
department from the scope and spirit of this invention as
defined by the appended claims.



What is Claimed is:

1. A non-woven gasket composition for forming substantially planar sealing materials, said gasket composition comprising:

5 a non-woven web of inter-engaged fibers including non-fibrillated organic staple fibers having an elongation at break of less than about 5% at temperatures up to about 200°C, from about 2 to about 4% by weight, based on the weight of the gasket composition, of
10 fibrillated polyaramide fibers, at least about 60% by weight, based on the weight of the gasket composition, of finely-divided graphite powder, the graphite powder having a particle size distribution such that 98% of the
15 graphite powder has a particle size less than about 70 micrometers, and an elastomeric resin binder, said composition being substantially free of inorganic fibrous materials and having sufficient sheet forming properties such that the composition forms a web by calendering at elevated temperature and pressure conditions, the non-
20 woven web having a temperature stability such that there is less than 10% change in thickness of the web under a compression of 50 Newtons per square millimeter as the temperature is increased from 20°C to 200°C.

2. A non-woven gasket composition as defined in claim 1, wherein said graphite powder is present in an amount greater than 70% by weight based on the weight of the gasket composition.

3. A non-woven gasket composition for forming substantially planar sealing materials, said gasket composition consisting essentially of:

30 a non-woven web of inter-engaged fibers including non-fibrillated organic staple fibers having an elongation at break of less than about 5% at temperatures up to about 200°C, from about 2 to about 4% by weight, based on the weight of the gasket composition, of
35 fibrillated polyaramide fibers, at least about 60% by weight, based on the weight of the gasket composition, of finely-divided graphite powder, based on the weight of

the gasket composition, the graphite powder having a particle size distribution such that 98% of the graphite powder has a particle size less than about 70 micrometers, and an elastomeric resin binder, said composition being substantially free of inorganic fibrous materials and having sufficient sheet forming properties such that the composition forms a web by calendering at elevated temperature and pressure conditions, the non-woven web having a temperature stability such that there is less than a 10% change in thickness of the web under a compression of 50 Newtons per square millimeter as the temperature is increased from 20°C to 200°C.

4. A gasket composition as defined in claim 1, wherein said non-fibrillated organic fibers have a length of from about 2 to about 4 mm.

5. A gasket composition as defined in claim 1, wherein the non-fibrillated organic fibers are present in an amount of from about 0.5 to about 1.5% by weight, based upon the weight of the gasket composition.

6. A gasket composition as defined in claim 1, wherein the non-fibrillated organic fibers are selected from the group consisting of polyester fibers, polyamide fibers, polyaramid fibers, polybenzimidazole fibers.

7. A gasket composition as defined in claim 1, wherein the non-fibrillated organic fibers are polyaramid fibers.

8. A gasket composition as defined in claim 1, further comprising mineral filler.

9. A gasket composition as defined in claim 8, wherein the said composition comprises about 70% by weight of graphite powder, about 0.9% by weight of non-fibrillated polyaramid staple fibers, about 3.1% by weight of fibrillated polyaramid fibers, about 7% by weight of elastomeric resin binder, about 1.5% by weight of curing agent and about 17.5% by weight of mineral filler, based on the weight of the gasket composition.

10. A gasket composition as defined in claim 8, wherein said composition comprises about 75% by weight of

graphite powder, about 0.7% by weight of non-fibrillated polyaramid staple fibers, about 3.3% by weight of fibrillated polyaramid fibers, about 4% by weight of elastomeric resin binder, about 1.5% by weight of curing agent, and about 15.5% by weight of mineral filler, based upon the weight of the gasket composition.

11. A gasket composition as defined in claim 1, wherein said elastomeric resin binder is selected from organic binders including natural and synthetic elastomers.

12. A gasket composition as defined in claim 11, wherein said elastomeric resin binder is selected from the group consisting of chloroprene, neoprene, polyisoprene, polyisobutylene, butyl rubber, acrylonitrile-butadiene rubber (NBR), styrene-butadiene rubber (SBR), ethylene-propylene rubber (EPS) and ethylene-propylene-diene rubber (EPDM).

13. A gasket composition as defined in claim 8, wherein said mineral filler is selected from the group consisting of mica, talc, silica, diatomaceous earth, barium sulfate, kaolin and clay.

Dated this 4th day of December 1996

FRENZELIT-WERKE GMBH & CO. KG

By their Patent Attorneys

GRIFFITH HACK

Abstract

The present invention relates to sealing materials free from asbestos or other inorganic fibrous substances in the form of papers, paperboards, cardboards or plates.


5 The gasket compositions preferably comprise a mixture of non-fibrillated organic fibers having an elongation at break of < 5% (up to 200°C) and fibrillated P polyaramide fibers as well as, powdered graphite and an elastomeric resin binder. A new and improved process for making non-

10 woven, planar sealing materials free from asbestos or other inorganic fibrous substances, is also provided.

The reinforcement-forming and sheet-forming organic fibers, binders and fillers are homogenized in a mixer and the mixture is subsequently treated with heat and pressure to form the non-woven webs. The new asbestos-

15 free sealing gaskets and materials may be used for technical or industrial applications such as secondary automobile gaskets, cylinder head gaskets, for seals or gaskets used in the constructions of chemical plants and power plants, and for seals or gaskets used in the construction of heating systems.

FIG. 1

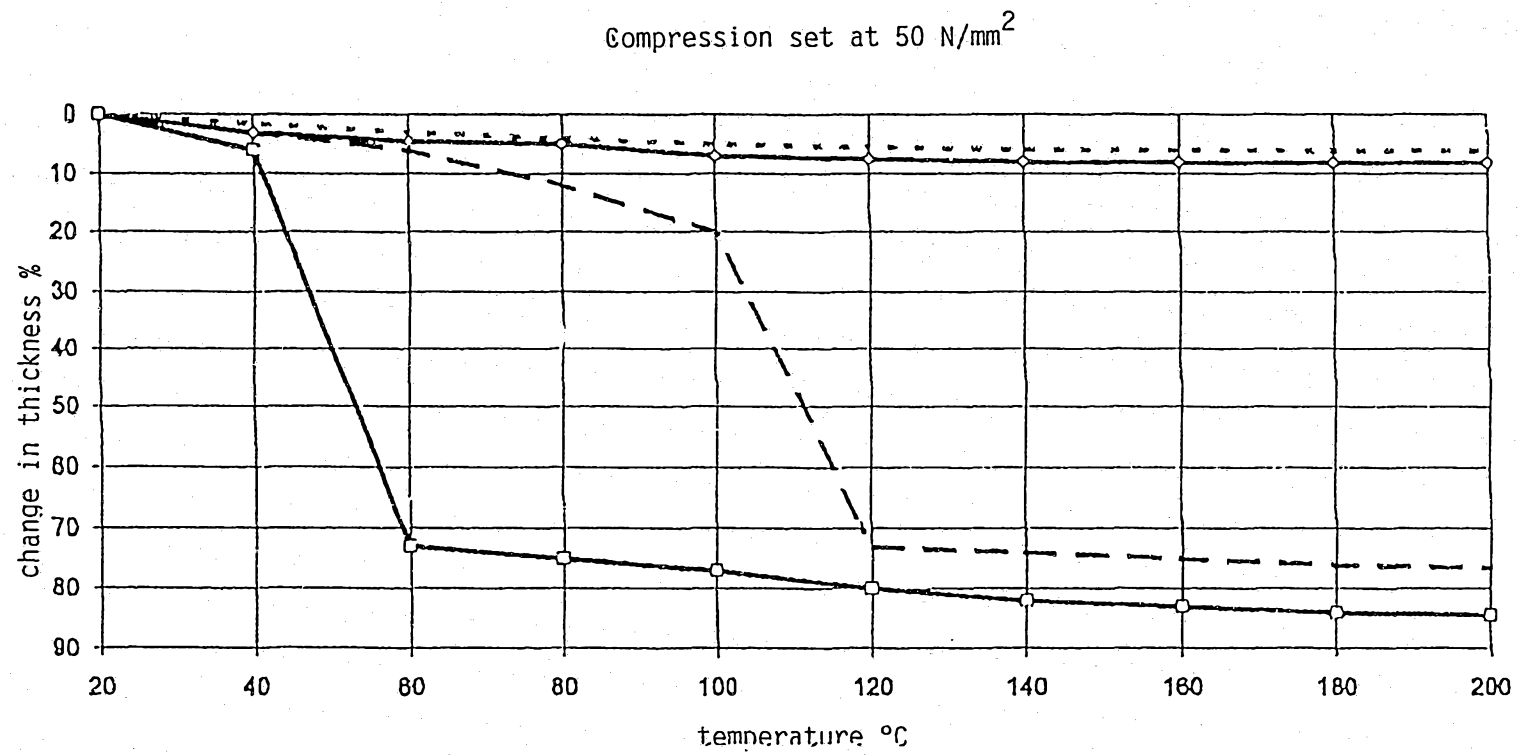

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 94/04167

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D21H13/26 F16J15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 016 no. 168 (C-0932) ,22 April 1992 & JP,A,04 013792 (NIPPON VALQUA IND LTD) 17 January 1992, see abstract ---	1,9,16
Y	DATABASE WPI Section Ch, Week 8242 Derwent Publications Ltd., London, GB; Class A88, AN 82-89262E & JP,A,57 147 573 (TEIJIN KK) , 11 September 1982 see abstract ---	1,9,16
A	EP,A,0 104 317 (GOETZE AG ;FRENZELIT WERKE GMBH & CO KG (DE)) 4 April 1984 see the whole document -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

8 February 1995

Date of mailing of the international search report

07 03. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Songy, 0

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 94/04167

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0104317	04-04-84	DE-A- 3232255	08-03-84
		JP-A- 59058077	03-04-84
		US-A- 4748075	31-05-88

A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES
IPK 6 D21H13/26 F16J15/00

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)
IPK 6 D21H

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
Y	PATENT ABSTRACTS OF JAPAN vol. 016 no. 168 (C-0932), 22. April 1992 & JP, A, 04 013792 (NIPPON VALQUA IND LTD) 17. Januar 1992, siehe Zusammenfassung ---	1, 9, 16
Y	DATABASE WPI Section Ch, Week 8242 Derwent Publications Ltd., London, GB; Class A88, AN 82-89262E & JP, A, 57 147 573 (TEIJIN KK), 11. September 1982 siehe Zusammenfassung ---	1, 9, 16
A	EP, A, 0 104 317 (GOETZE AG ; FRENZELIT WERKE GMBH & CO KG (DE)) 4. April 1984 siehe das ganze Dokument -----	1

☐ Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen

☒ Siehe Anhang Patentfamilie

* Besondere Kategorien von angegebenen Veröffentlichungen :

"A" Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

"E" älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

"L" Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

"O" Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

"P" Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

"T" Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

"X" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderscher Tätigkeit beruhend betrachtet werden

"Y" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderscher Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

"&" Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche

8. Februar 1995

Absenddatum des internationalen Recherchenberichts

07.03.95

Name und Postanschrift der Internationale Recherchenbehörde

Europäisches Patentamt, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Bevollmächtigter Bediensteter

Songy, O

Angaben zu Veröffentlichungen, die zur selben Patentfamilie gehören

PCT/EP 94/04167

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
EP-A-0104317	04-04-84	DE-A- 3232255	08-03-84
		JP-A- 59058077	03-04-84
		US-A- 4748075	31-05-88