



(51) International Patent Classification:

B65B 61/02 (2006.01) B65B 9/20 (2012.01)

B32B 37/15 (2006.01)

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/EP2017/067501

Published:

— with international search report (Art. 21(3))

(22) International Filing Date:

12 July 2017 (12.07.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16182640.9 03 August 2016 (03.08.2016) EP

(71) Applicant: TETRA LAVAL HOLDINGS & FINANCE

S.A. [CH/CH]; 70, Avenue Général-Guisan, CH-1009 Pully (CH).

(72) Inventor: ROSENLOF, Torbjörn; Östgötavägen 10,

22225 Lund (SE).

(74) Agent: TETRA PAK - PATENT ATTORNEYS SE; AB

Tetra Pak, Patent Department Ruben Rausings gata, 22186 Lund (SE).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: PACKAGING MATERIAL COMPRISING MAGNETIZED PORTIONS AND METHOD FOR MAGNETIZING THE MATERIAL

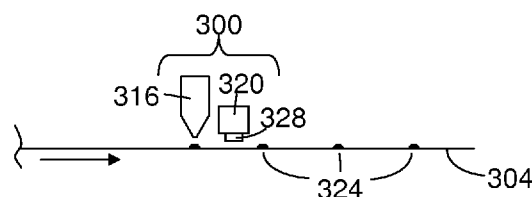


Figure 3B

(57) Abstract: A device (109, 300) for magnetizing a packaging material (104, 200, 220, 304) for food-containing packages (176) is disclosed. The device (109, 300) comprises a feeder for feeding a packaging material (104, 200, 220, 304) through the device, the packaging material having a plurality of portions of magnetisable ink. The device (109, 300) also comprises a static bar (116, 320) having at least one magnet (120, 328) for magnetizing the portions of ink (208, 324) applied to the packaging material (104, 200, 220, 304). A system (100) for producing a packaging material (104) is also disclosed. A method of magnetizing a packaging material for a food-containing package is further disclosed.

**PACKAGING MATERIAL COMPRISING MAGNETIZED PORTIONS AND
METHOD FOR MAGNETIZING THE MATERIAL**

TECHNICAL FIELD

5 The present invention relates to a packaging material comprising at least one detectable information-carrying mark per packaging container intended to be formed from the material. More particularly, the invention relates to a packaging material with a
10 plurality of magnetized ink portions, a device for magnetizing a packaging material, a system for producing a packaging material, and a method of magnetizing a packaging material.

15 BACKGROUND

Many pourable food products, such as fruit juice, UHT (ultra-high-temperature treated) milk, wine, tomato sauce, etc., are sold in packages made of sterilized packaging material. The packaging material may be
20 supplied as individual sheets or blanks cut from a web before filling with a food product or as a web to be formed into a tube during the process of filling, sealing and forming a package.

Optical guiding marks have been provided on the
25 individual sheet or web to carry operation-related information to guide operations when the packaging material is folded and sealed into a package. The optical mark is provided during printing of the sheet or

web where decoration or product information is printed. Optical marks undesirably consume a significant area of what becomes the exterior of the package. Attempts have been made to reduce such undesirably consumed exterior surface by reducing the physical size of the mark. However, reducing the physical size is restricted to a lower critical limit below which the mark is too small to be detectable with at least a minimum of required accuracy by means of available optical equipment.

10 The development of packaging materials with magnetic marks overcame the aforementioned problems of optical marks.

WO 2012/072309 discloses a packaging material comprising at least one detectable magnetizable portion per package. The portion may be printed on the side of the sheet or web intended to face the interior of the package i.e. away from a consumer. Once magnetized the portion provides a magnetic mark carrying a magnetic field pattern aligned with a preparation feature for enhancing the formation and finishing of packages. Preparation features include crease lines, openings, or exterior printing of the package.

25 The magnetizable portion may be produced during an early phase of the packaging material production process. Alternatively, the magnetism may be applied to the portion at the same time the preparation feature is formed thereby ensuring the alignment of the magnetic mark with operation of the preparation feature. For

instance, in a creased sheet or web the magnetic marks attain their magnetism via magnets in the creasing roller. The magnets may be placed on the periphery of the creasing roller as disclosed in WO 2016/045994. The magnets apply a magnetic field to a magnetizable portion on the sheet (or web) as the sheet passes the creasing roller to form the creases.

Sometimes a non-creased web or sheet is used to form a pillow-type package such as Tetra Fino Aseptic® (TFA) provided by the present applicant. A creasing roller or tool is not used or required during formation of packages from non-creased sheets. Further, use of:

- (i) a pseudo-creasing roller having magnets only with no creasing ability; or
- (ii) a separate roller with magnets synchronized with printing of the magnetic ink onto the sheet;

to magnetize a magnetizable portion in a non-creased packaging material are both expensive and difficult to handle and install.

Hence, there is a need for alternative methods and devices for applying magnetism to magnetizable portions on non-creased packaging materials.

SUMMARY OF THE INVENTION

According to a first aspect of the present invention, there is provided a device for magnetizing a packaging material for food-containing packages, the device comprising:

a feeder for feeding a packaging material through the device, the packaging material having a plurality of portions of magnetisable ink; and

a static bar having at least one magnet for
5 magnetizing the portions of ink applied to the packaging material.

In some embodiments of the first aspect the device is a printing press. In other embodiments of the first aspect of the invention the device is a filling machine.

10 According to a second aspect of the present invention, there is provided a system for producing a packaging material, the system comprising:

a device as claimed in any one of the preceding claims for magnetizing the packaging material; and

15 at least one lamination station comprising an extruder and a roller press nip for providing a lamination layer to laminate the magnetized packaging material.

According to a third aspect of the present
20 invention, there is provided a method of magnetizing a packaging material for a food-containing package, the method comprising:

applying a plurality of portions of magnetizable ink to the packaging material; and

25 moving the packaging material with the applied ink portions past a plurality of static magnets to magnetize the ink portions and form the magnetized packaging material.

According to a fourth aspect of the present invention, there is provided a packaging material for producing a sealed package of a food product, the
5 packaging material comprising:

a base layer for imparting stiffness to the packaging material;

at least one rectangular portion of magnetizable ink applied to the base layer; and

10 at least one lamination layer applied to and covering the base layer and portion of magnetizable ink;

wherein the length of the shorter side of the rectangular magnetizable ink portion is between about 2 mm to 6 mm, preferably about 3 mm to 5 mm, and more
15 preferably about 3.9 mm to 4.1 mm; and

wherein the length of the longer side of the rectangular magnetizable ink portion is between about 7 mm to 13 mm, preferably about 8 mm to 12 mm, and more preferably about 9 mm to 11 mm.

20 In some embodiments of the fourth aspect the length of the shorter side of the rectangular magnetizable ink portion is about 4 mm. In a preferred embodiment the shorter side of the rectangular magnetizable ink portion as applied to the base layer is oriented to be parallel
25 with the direction of travel of the packaging material. In some embodiments of the fourth aspect the at least one rectangular portion of magnetizable ink has dimensions of about 4 mm x 10 mm.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Some preferred, non-limiting embodiments of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 illustrates a system for producing a packaging material in accordance with an embodiment of
10 the present invention;

Figure 2A is a cross-sectional side view of the packaging material that is formed during operation of the system in figure 1;

Figure 2B shows the packaging material in figure 2A
15 with an additional layer applied thereto;

Figure 3A is a top and partial perspective view of a printing press for applying magnetic ink to a web of packaging material and magnetizing the applied ink according to one embodiment of the invention;

20 Figure 3B is a front view of the printing press in figure 3A from position Y (the reel feeding the packaging material has been omitted for clarity);

Figure 3C is a side view of the printing press in figure 3A from position Z (the magnetizable ink
25 applicator and the reel feeding the packaging material have been omitted for clarity); and

Figure 4 depicts a filling machine for forming and filling a package from the packaging material produced

according to an embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 illustrates a system 100 for producing a
5 packaging material 104. In system 100 a reel 108
provides a base layer of packaging material 104, e.g.
paper for stiffness. The base layer from reel 108 passes
magnetic ink printing press 109. Printing press 109
comprises a magnetizable ink applicator 112 and a static
10 bar 116 having a magnet 120. Although not shown, the bar
116 may have a plurality of magnets 120. As the base
layer passes applicator 112 one or more portions of
magnetizable ink (not shown) are applied to the surface
of the base layer. The applied portion(s) then pass by
15 the magnet 120 to magnetize the portion thereby
providing one or more magnetic field marks on the base
layer. Each portion may provide its own unique magnetic
field pattern that is different from another portion on
base layer 104. However, it is preferred that each
20 portion provides the same magnetic field pattern. The
printing press 109 will be described in more detail
below with respect to figures 3A, 3B, and 3C.

The packaging material 104 with one or more
magnetized ink portions from printing press 109 then
25 passes between rollers 124 and 128. At the same time a
lamination layer 132 from extruder 136 is applied to the
material 104 over the one or more magnetized ink
portions. Immediately after passage through the rollers

124 and 128 the packaging material 104 has a multilayer structure as shown in figure 2A. The packaging material 200 in figure 2A has a base layer 204 and a magnetized ink portion 208. A lamination layer 212 covers the base layer 204 and ink portion 208. The lamination layer 212 may be a heat-seal plastic material, for example comprising a strong, high-stretch, metallocene-catalyzed, low-linear-density (LLD) polyethylene. Preferably layer 212 is laminated on the base layer in a melted state by extrusion coating prior to cooling. Although not illustrated in figures 1 and 2A it is also possible to apply a layer of oxygen-barrier material, e.g. an aluminum foil, onto lamination layer 212. This oxygen barrier layer may in turn be covered by another lamination layer of heat-seal plastic material that will form the innermost layer in contact with the food product after the package is formed. Thus, in packaging material 200 as shown in figure 2A the ink portion 208 is applied to the surface of base layer 204 that will face the inside or interior of the package that is inevitably formed from packaging material 200. In an alternative embodiment, the ink portion 208 is applied to the surface of the base layer 204 that will face the outside or exterior of the package that is inevitably formed from the packaging material. In this alternative embodiment the ink portion 208 is then covered by a heat sealable layer of a thermoplastic polymer, such as polyolefin polymers, such as polyethylene or

polypropylene, such as a low density polyethylene (LDPE), a linear low density polyethylene (LLDPE), an LLDPE polymerised in the presence of a constrained geometry catalyst such as a metallocene-catalyst (m-
5 LLDPE), or a high-density polyethylene (HDPE) or a polypropylene homo- or copolymer, or a polymer blend comprising any of these polymers.

The shape and area of the magnetized ink portion 208 is not particularly limited. For example, the shape
10 of an ink portion(s) 208 may be selected from the group consisting of rectangular, square, circular, oval, elongated shapes, and combinations thereof. The area of a portion 208 will usually be less than 250 mm², preferably less than 150 mm², and more preferably less
15 than 25 mm². In some embodiments the ink portion(s) 208 are rectangular. When the ink portion(s) 208 are rectangular, it is preferred that the shorter side of the rectangle has a length of between about 2 mm to 6 mm, preferably about 3 mm to 5 mm, and more preferably
20 about 3.9 mm to 4.1 mm. The longer side of the rectangle has a length of between about 7 mm to 13 mm, preferably about 8 mm to 12 mm, and more preferably about 9 mm to 11 mm. Most preferred dimensions of rectangular ink portion(s) 208 are 4 mm x 10 mm. The present inventors
25 have surprisingly found that rectangular-shaped ink portions emanate a magnetic profile or signal that is easy to detect and measure. Another benefit is that the magnetic profile is detectable by existing readers

thereby avoiding the need for costly new reading equipment.

The magnetizable ink comprises magnetizable particles, a solvent and a binder. The magnetizable
5 particles may be magnetite or maghemite or hematite. The binder may be selected from the group consisting of acrylate, acrylics such as styrene acrylic copolymer, polyurethane, nitrocellulose, polyamide and latex. Two binders may be selected from this group wherein one
10 binder serves as a disperant such that the magnetizable particles are evenly dispersed in the ink and the other binder serves as an adhesive to the packaging material. The amount of binder may be between 15 and 70 percent by weight of the ink, preferably between 15 and 60 percent,
15 preferably between 20 and 55 percent. The ink may further comprise additives such as waxes and/or an antifoaming agent. The waxes may be selected from the group consisting of polyethylene, polypropylene, silicone, polyamide, ethylene vinyl acetate, ethylene
20 butyl acetate, ethylene acrylic acid and polytetrafluoro ethylene. The antifoaming agent may comprise silicone or mineral oil. The solvent may be selected from the group comprising ethanol, ethylic acetate, water, isopropanol, glycol, or a retarder solvent. The amount of
25 magnetizable particles may be between 15 and 40 percent by weight of the ink, preferably 30-35 percent by weight. The size of the magnetizable particles may be between 0.1 and 2.5 μm , preferably between 0.1 and 0.8

μm or preferably between 0.4 and 1.5 μm, preferably about 0.3 μm or 1 μm.

Referring again to figure 1, the packaging material 104 then passes around another roller 140 before passing
5 between rollers 152 and 156. A lamination layer 144 from extruder 148 is also applied to the packaging material 104 as the material 104 passes between rollers 152 and 156. Layer 144 is applied to the face of the material 104 opposing layer 132. The packaging material 104 has
10 the multilayer structure shown in figure 2B after passage through rollers 152 and 156. The packaging material 220 shown in figure 2B has a base layer 204, magnetized ink portion 208, and lamination layer 212 as described above in figure 2A. A lamination layer 224
15 covers the face of the base layer 204 opposing lamination layer 212. The lamination layer 224 may be a heat-seal plastic material as described above with respect to lamination layer 212.

One or more operation units 160 are provided in
20 system 100 after the packaging material 104 passes between rollers 152 and 156 for modifying the magnetized and laminated packaging material 220. Examples of operations performed by unit(s) 160 include doctoring of the packaging material or printing of decorative artwork
25 onto the packaging material 220. It is however not essential to include an operation unit 160 in system 100.

After operation unit(s) 160 and passage between

rollers 164 and 168, the packaging material is wound onto a reel 169 for later use such as with the filling machine 170 described in Fig. 4 below.

Although not shown in Fig. 1, an additional extruder may be incorporated into system 100 between operation unit(s) 160 and nip rollers 164 and 168. This additional extruder is used to extrusion coat an outermost lamination layer on top of the printed décor pattern and the printed magnetic mark of the packaging material 104.

Figures 3A, 3B, and 3C illustrate a magnetic ink printing press 300 and its use in applying and magnetizing portions of ink 324 onto a packaging material 304. The printing press 300 comprises a magnetizable ink applicator 316 and a static bar 320 having a plurality of magnets 328. Magnets 328 may be electromagnets or permanent magnets e.g. bar magnets. The magnets 328 may be on the surface of the bar 320 or may instead be accommodated in the interior of the bar 320 such as in a recess on the bar 320. Bar 320 is located adjacent to applicator 316 as shown in figures 3A and 3B. However, the distance between bar 320 and applicator 316 is not particularly important. For example, bar 320 may abut applicator 316 or bar 320 may be separated from applicator 316 by about 1000 mm, 500 mm, 200 mm, 100 mm, 50 mm, 25 mm, 10 mm, or 5 mm. Bar 320 is further positioned in order that the magnets 328 are as close as possible to the packaging material 304.

Preferably the distance "D" in figure 3C between the magnets 328 and the material 304 is about 2 mm or about 1 mm or less than 1 mm. This results in magnetization of the ink portions 324 when the material 304 is moving
5 past and close to the bar 320.

The dashed lines 308 in figure 3A define the individual packaging containers to be formed. Each packaging container has a magnetised ink portion 324. Although the magnetized ink portions 324 in figure 3A
10 are rectangular-shaped, the ink portions 324 may also be square-shaped or of any other suitable shape. Preferably the ink portions 324 are rectangular-shaped. More preferably, the rectangular ink portions 324 are about 4 mm x 10 mm in size with the shorter 4 mm side of the
15 rectangle oriented to be parallel with the direction of travel of the packaging material 304 as shown by the solid arrows in figure 3A.

The printing press 300 is used as follows. Packaging material 304, or rather a base layer later
20 forming part of a packaging material, is fed from a reel 312 towards the printing press 300 as shown by the solid arrows in figures 3A and 3B. As the packaging material or base layer 304 passes under applicator 316, magnetizable ink portions 324 are applied to the
25 material 304. The applied portions 324 then pass by the magnets 328 on static bar 320 to magnetize the portions 324 thereby providing one or more magnetic field marks on the packaging material or base layer 304. The

packaging material 304 then undergoes further processing in the system 100 illustrated in figure 1 or undergoes alternative operations prior to filling and forming of packages.

5 Without wishing to be bound by theory, it is believed the field radiating from the magnetized ink portions 324 attained after the printing press 300 will not resemble that of other magnetized marks made with existing methods involving for example, a creasing
10 roller, wherein the size and area of the magnetizable ink portion is larger than the geometric size of the magnetic field mark i.e. the part of the ink portion that carries magnetism. Rather, the magnetic profile emanating from the magnetized ink portions 324 will be
15 dependent on the physical boundary (i.e. the size, shape, and area) of the printed ink portion 324 as all, or substantially all, of the printed ink portion 324 becomes magnetized by printing presses 109 and 300. The size and shape of the magnetic profile does not depend
20 on the speed of the packaging material or base layer as it passes under the magnets on the static bar. Preferably the size of the magnet(s) 328 is larger than the size of the ink portions 324 to help ensure that all of the printed ink portion 324 becomes magnetized.

25 As shown in Figure 4, the packaging material 104 manufactured by the system in figure 1 is unwound from reel 169 and fed to the filling machine 170 wherein the packaging material is formed into a tube that is sealed

at one end, filled with a food product from pipe 172, sealed again to enclose the food product, cut, and formed into a package 176. During filling a magnetic mark reader (not shown in figure 4) detects the magnetic
5 field emanating from magnetized ink portion(s) 208 on the packaging material 104, 220 to synchronize the position of the packaging material 104 with the pipe 172 and other sealing and cutting elements (not shown). Any twist formed in the tube when making and filling the
10 packages is also detectable. Such undesirable twist is then corrected to enhance operation and increase the yield of properly formed, filled, and sealed packages 176. Other operations (not shown) that may occur as part of filling machine 170 include sterilization of the
15 packaging material, a positioning alignment with the magnetic mark (and the printed design) to correct any tube twisting, application of opening devices, a positioning alignment of said openings, customized creasing, embossing or printing on the outside of the
20 finished packaging material, and / or cutting of the packaging material. The filling machine may also comprise a static bar (not shown) having at least one magnet for magnetizing the portions of ink applied to the packaging material.

CLAIMS

1) A device (109, 300) for magnetizing a packaging material (104, 200, 220, 304) for food-containing packages (176), the device (109, 300) comprising:

a feeder for feeding a packaging material (104, 200, 220, 304) through the device (109, 300), the packaging material having a plurality of portions of magnetisable ink (208, 324); and

a static bar (116, 320) having at least one magnet (120, 328) for magnetizing the portions of ink (208, 324) applied to the packaging material (104, 200, 220, 304).

2) The device (109, 300) of claim 1, further comprising a magnetizable ink applicator (112, 316) for applying the plurality of portions of magnetizable ink (324) to the packaging material (104, 200, 220, 304).

3) The device (109, 300) of claim 2, wherein the magnetizable ink applicator (112, 316) is configured for applying rectangular-shaped portions of magnetizable ink (324) to the packaging material (104, 200, 220, 304), preferably rectangular-shaped portions of magnetisable ink (324) wherein the length of the shorter side is between about 2 mm to 6 mm, preferably about 3 mm to 5 mm, and more preferably about 3.9 mm to 4.1 mm.

4) The device (109, 300) as claimed in any one of the preceding claims, wherein the packaging material (104, 200, 220, 304) is a non-creased packaging material.

5

5) The device (109, 300) as claimed in any one of the preceding claims, wherein the static bar (116, 320) has a plurality of magnets (120, 328).

10

6) The device (109, 300) as claimed in any one of the preceding claims, wherein the size of the magnet or magnets (120, 328) is larger than the size of the portions of magnetisable ink (208, 324).

15

7) The device (109, 300) as claimed in any one of the preceding claims, wherein the magnet or magnets (120, 328) are configured so that in use the distance between the magnet or magnets (120, 328) and the packaging material (104, 200, 220, 304) is less than 5 mm, preferably less than 2 mm, and more preferably less than 1 mm.

20

8) The device (109, 300) as claimed in any one of the preceding claims, wherein the device (109, 300) is configured to apply only one magnetized ink portion (208, 324) per packaging container (176) to be formed from the packaging material (104, 200, 220, 304).

25

9) A system (100) for producing a packaging material (104), the system (100) comprising:

a device (109) as claimed in any one of the preceding claims for magnetizing the packaging material
5 (104); and

at least one lamination station comprising an extruder (136, 148) and a roller press nip (124,128; 152,158) for providing a lamination layer (132, 144) to laminate the magnetized packaging material.

10

10) The system (100) as claimed in claim 9, further comprising at least one operation unit (160) for modifying the magnetized and laminated packaging material (200, 220), wherein the least one operation
15 unit (160) is selected from the group consisting of a doctoring unit, a printing unit for applying decorative artwork to the packaging material, and combinations thereof.

20 11) The system (100) as claimed in claim 9 or claim 10, comprising at least two lamination stations, each station comprising an extruder (136, 148) and a roller press nip (124,128; 152,158) for providing lamination layers (132, 144) to laminate the magnetized packaging
25 material.

12) A method of magnetizing a packaging material for a food-containing package, the method comprising:

applying a plurality of portions of magnetizable ink to the packaging material; and

moving the packaging material with the applied ink portions past a plurality of static magnets to magnetize
5 the ink portions and form the magnetized packaging material.

13) The method as claimed in claim 12, wherein the packaging material is moved past a magnetizable ink
10 applicator to apply the plurality of ink portions, preferably by flexography printing or ink jet printing.

14) The method as claimed in claim 12 or 13, wherein the packaging material with the applied ink
15 portions is moved within 5 mm of the plurality of static magnets, preferably within 2 mm of the plurality of static magnets, and more preferably within 1 mm of the plurality of static magnets.

20 15) The method as claimed in any one of claims 12 to 14, wherein the packaging material is a non-creased packaging material.

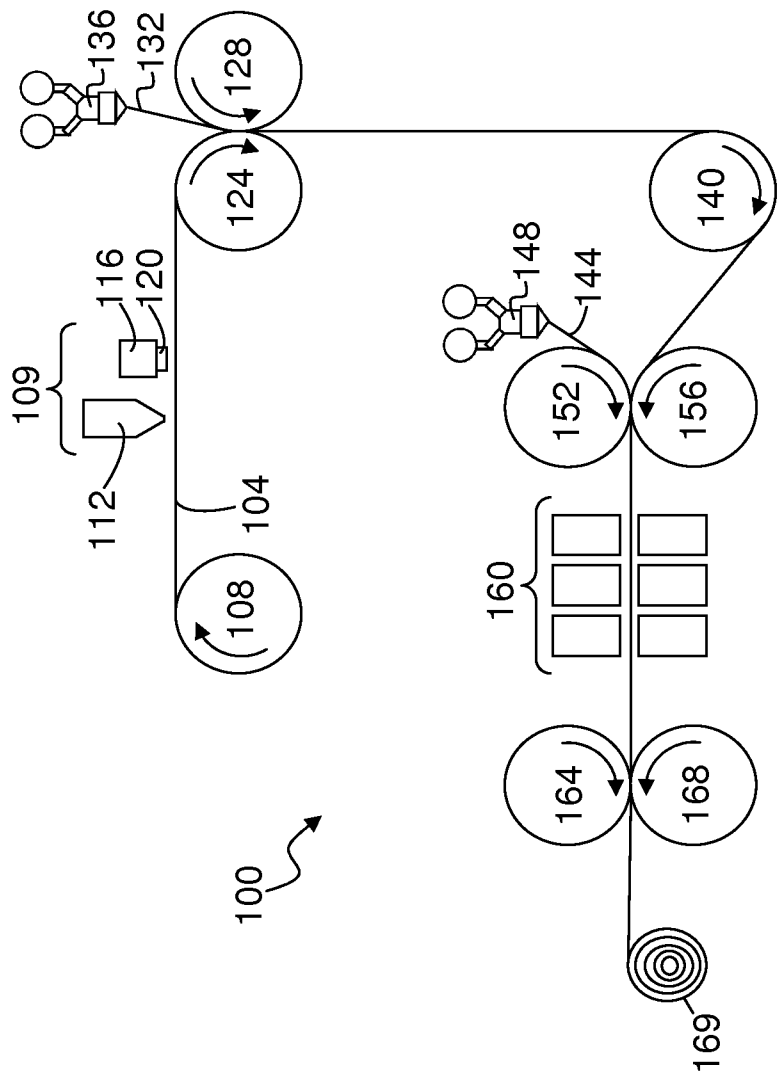


Figure 1

2/4

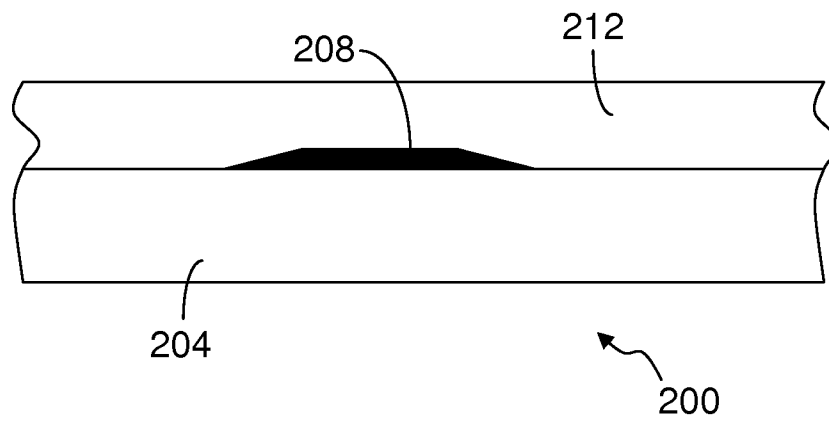


Figure 2A

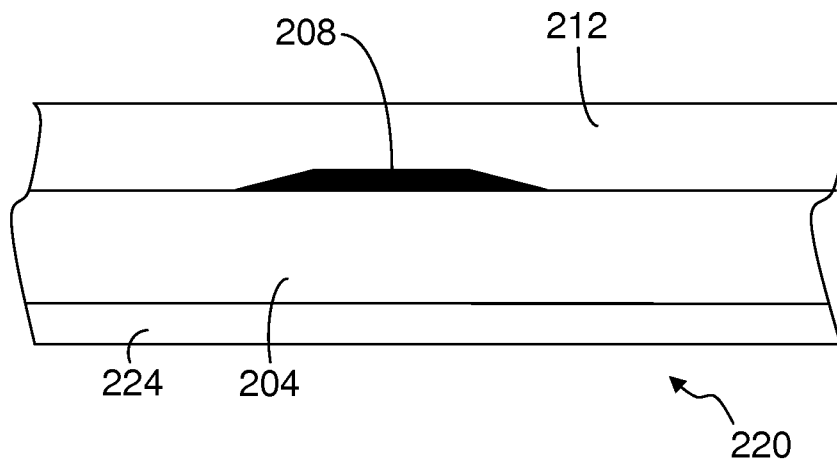


Figure 2B

3/4

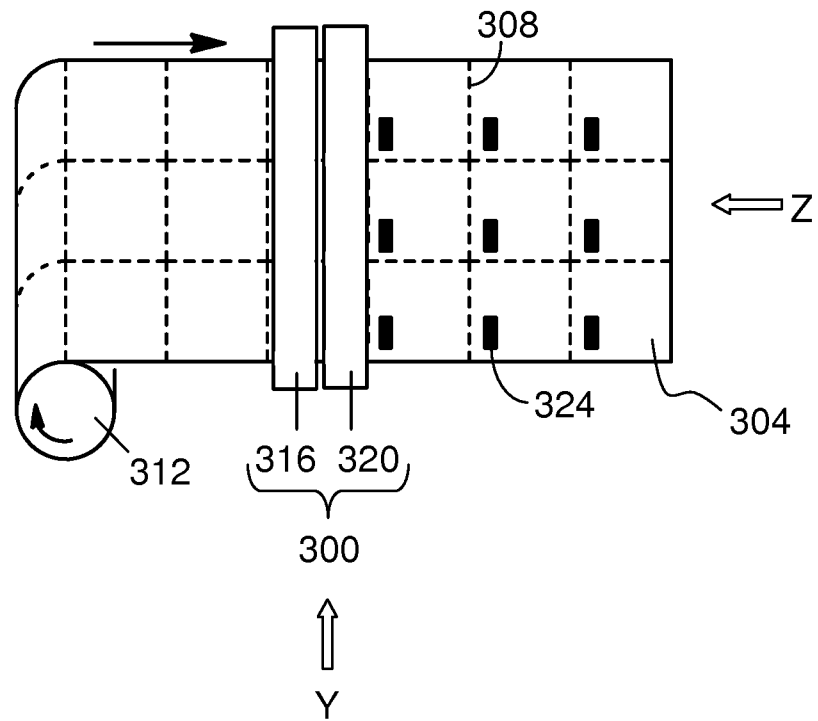


Figure 3A

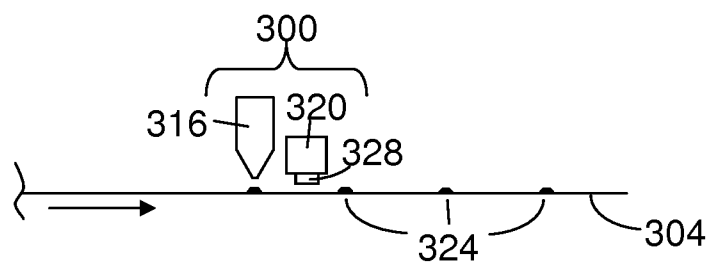


Figure 3B

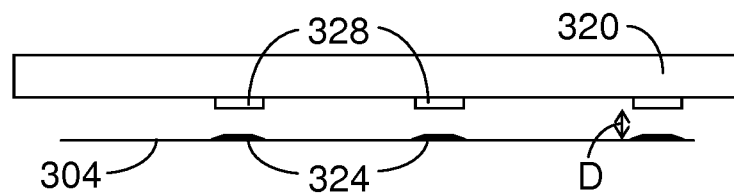


Figure 3C

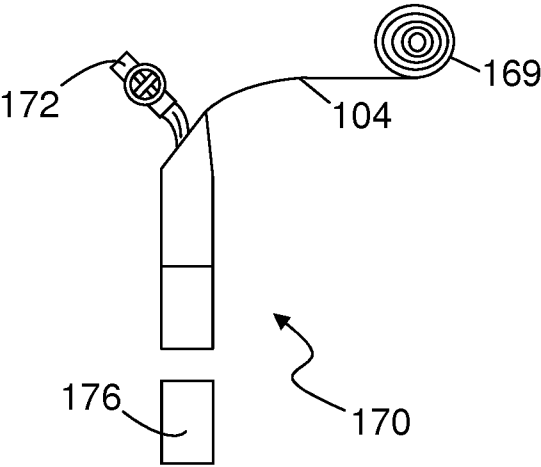


Figure 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/067501

A. CLASSIFICATION OF SUBJECT MATTER

INV. B65B61/02 B32B37/15
ADD. B65B9/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B65B B31B B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 352 497 B1 (HENSLEY ROBERT LEO [US] ET AL) 5 March 2002 (2002-03-05)	1-8
Y	column 7, line 50 - column 16, line 63; figures 1,3,6,7	1-15

X	US 5 458 062 A (GOLDBERG IRA B [US] ET AL) 17 October 1995 (1995-10-17)	1-8
Y	column 3, line 38 - column 5, line 64; figures 1-2	1-15

Y	US 2013/228614 A1 (BERGHOLTZ LARS [SE]) 5 September 2013 (2013-09-05) cited in the application paragraphs [0074] - [0150]; figures 1,7-19	1-15

Y	US 2008/057245 A1 (BENNETT DALE [US] ET AL) 6 March 2008 (2008-03-06) figures 1-2	9-11

	-/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 August 2017

Date of mailing of the international search report

29/08/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Cardoso, Victor

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/067501

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2006/135315 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]; SVENSSON HAAKAN [SE]; JOHANSSON H) 21 December 2006 (2006-12-21) the whole document -----	1-15
A	WO 97/24278 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]; PAPINA JAN [PL]; KANEKO MASAMICHI) 10 July 1997 (1997-07-10) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/067501

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 6352497	B1	05-03-2002	AU	3923900 A		23-10-2000
			MX	PA01009838 A		24-04-2002
			US	6352497 B1		05-03-2002
			WO	0059428 A1		12-10-2000

US 5458062	A	17-10-1995	DE	19506774 A1		31-08-1995
			GB	2286822 A		30-08-1995
			HK	1002727 A1		11-09-1998
			JP	2614991 B2		28-05-1997
			JP	H0847895 A		20-02-1996
			US	5458062 A		17-10-1995

US 2013228614	A1	05-09-2013	AR	084012 A1		17-04-2013
			BR	112013010893 A2		02-08-2016
			CN	103221207 A		24-07-2013
			EP	2646235 A1		09-10-2013
			JP	6055775 B2		27-12-2016
			JP	2014502941 A		06-02-2014
			RU	2013129533 A		10-01-2015
			TW	201233591 A		16-08-2012
			US	2013228614 A1		05-09-2013
			WO	2012072309 A1		07-06-2012

US 2008057245	A1	06-03-2008	NONE			

WO 2006135315	A1	21-12-2006	NONE			

WO 9724278	A1	10-07-1997	AU	1465697 A		28-07-1997
			DE	69614576 D1		20-09-2001
			DE	69614576 T2		29-11-2001
			EP	0929474 A1		21-07-1999
			JP	H09188357 A		22-07-1997
			TW	394740 B		21-06-2000
			WO	9724278 A1		10-07-1997
