

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



A standard 1D barcode is located at the bottom of the page, spanning most of the width. It is used for document tracking and identification.

**(43) International Publication Date
20 November 2003 (20.11.2003)**

PCT

**(10) International Publication Number
WO 03/094603 A1**

(51) International Patent Classification⁷: A01J 27/04,
25/12

(21) International Application Number: PCT/US03/12953

(22) International Filing Date: 25 April 2003 (25.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10/140,773 7 May 2002 (07.05.2002) US

(71) **Applicant: SCHREIBER FOODS, INC. [US/US]; 425 Pine Street, Green Bay, WI 54307-9010 (US).**

(72) **Inventors:** OWENS, Shawn; 2408 N. Indiana Street, Joplin, MO 64801 (US). DENNIS, Chidress; 1403 Hemingway, Monett, MO 65708 (US).

(74) **Agent:** MAZZA, Michael, P.; Michael P. Mazza, LLC, 686 Crescent Blvd., Glen Ellyn, IL 60137 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

[Continued on next page]

(54) Title: CASTING APPARATUS AND PROCESS

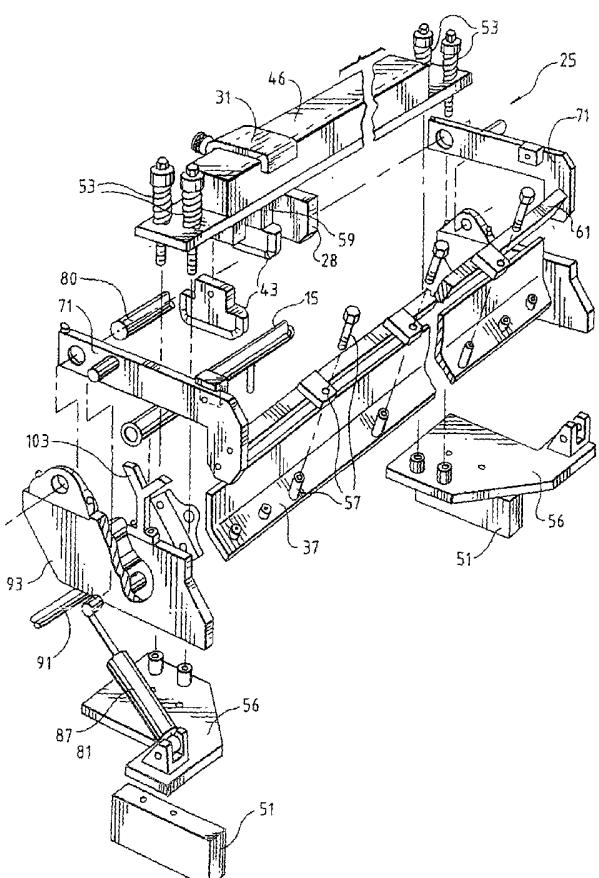

(57) Abstract: A lightweight, easily adjustable, open-cavitated casting apparatus employing an adjustable-height blade for forming a food product into a sheet. The food product may be deposited on a moving support surface such as a casting belt or chill roll, on the upstream side of the casting apparatus.

WO 03/094603 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

TITLE: CASTING APPARATUS AND PROCESS

INVENTORS: Dennis Childress
Shawn Owens

ATTORNEYS: Thomas G. Scavone
Michael P. Mazza
NIRO, SCAVONE, HALLER & NIRO
181 West Madison
Suite 4600
Chicago, Illinois 60602

ATTORNEY
DOCKET NO.: 3461

Attorney Docket
No. 3461

BACKGROUND OF THE INVENTION

The invention generally relates an apparatus and process for continuously casting food products. More specifically, the invention relates to an improved casting plate and a method for using same.

Food products such as processed cheese may be difficult to cut or slice because, for example, the cheese tends to cling to the cutting surfaces. For this or other reasons, it may be preferable to form the hot melted product into thin sheets of perhaps four feet wide, for example, using an extrusion or casting process. A conventional cheese casting machine shown in FIGURE 1, for example, uses a cooling belt, such as a stainless steel belt, driven by large drums. Pans may be installed at the undersides of the belts to flood the insides of the belt with a cooling medium such as a refrigerated glycol solution. A pressurized discharge manifold for distributing the food product, such as molten cheese, onto the cooling belt and for forming the product into a sheet having a controlled thickness, may be mounted at the infeed end of the machine on top of the belts ("top-cast"). This equipment may, alternatively, be mounted at some position around the radius of the upper drum at the infeed end ("angle-cast"). Alternatively, a gauge roller on a chill roll may be used to provide a casted food product in sheet form. The thin, cooled sheets may be slit into narrow strips or ribbons. The strips may then be stacked and cut to length for packaging, such as in slice or other forms.

A conventional pressure manifold used for casting a food product such as processed cheese across a casting belt at a controlled thickness, is a closed cavity typically consisting of a two-piece

Attorney Docket
No. 3461

chamber. Conventionally, a positive displacement pump distributes the food product to the pressurized closed cavity of the manifold. The closed cavity receives the hot food product under pressure and distributes it uniformly along the full length of the manifold, which is oriented perpendicular to the length of the casting belt. Due to the closed cavity of the pressure manifold, when cooled food product such as sticky processed cheese must be cleaned out of the chamber as is periodically required, to clear out blocked ports, etc., it may be necessary to remove and disassemble the manifold. This can be a time consuming and laborious task. In addition, the pump has inherent variability associated with it, depending upon the pump controls as well as fluctuations in the temperature and viscosity in the food product.

Pressure manifolds also typically employ PID (proportional, integral and derivative) controls to maintain pressure to the manifold. To satisfy commercial requirements, food product deposition onto the cooling belt must be accomplished rapidly and on a continuous basis to accommodate the high rate at which the product is discharged on the casting belt. The manifold should also provide a uniform and continuous discharge of the heated food product to the casting surface with appropriate adjustment means provided, as needed, to accommodate differences in product density and viscosity.

Conventional pressure manifolds utilize plastic inserts or dividers to control the height of the manifold above the cooling belt. Multiple valve controls are also used to distribute the food product within the manifold. For cleaning, the manifold is typically removed using a hoist due to its weight (e.g., 300 pounds). Cumbersome and time-consuming removal and replacement of the

Attorney Docket
No. 3461

manifold is also required for most changeovers, as may be necessitated by product formula or sheet width changes.

There are disadvantages to using chill roll technology. Chill rolls may be 4-5 feet in diameter, and employ a smaller gauge roll, adjustable in height above the chill roll, for varying the product sheet thickness. A bubble of cheese is deposited upstream of the gauge roller, and proceeds downstream toward the gauge roller as the chill roll rotates. To prevent the food product from sticking to the gauge roll surface forming the product into a sheet, the gauge roll is chilled, typically using a cooling solution, which adds to the cost and complexity of the chill roll apparatus. The gauge roll is also machined to a given outer diameter, and the thickness of each ribbon across the width of the product sheet is not individually controllable using a gauge roll.

Accordingly, objects of the present invention include: the provision of an economical, substantially lighter, more user-friendly casting apparatus, which renders valve and PID controls unnecessary, and which need not be removed for changeovers. It would also be advantageous to provide a casting apparatus which is easily adjustable, such as from an operator station located on the floor level, and which may be more easily cleaned than conventional pressure manifolds.

DEFINITION OF CLAIM TERMS

The following terms are used in the claims of the patent as filed and are intended to have their broadest meaning consistent with the requirements of law. Where alternative meanings are possible, the broadest meaning is intended. All words used in the claims are intended to be used in

Attorney Docket
No. 3461

the normal, customary usage of grammar and the English language.

"Casting blade" means a device having a fixed edge, which may constitute a variety of shapes and sizes, for forming a puddle of food product deposited on a surface into a sheet-like form.

"Casting belt" means a conveyor belt or other means, which may be chilled or cooled, suitable for supporting a cast food product.

SUMMARY OF THE INVENTION

The objects mentioned above, as well as other objects, are solved by the present invention, which overcomes disadvantages of prior art casting apparatus and continuous casting processes, while providing new advantages not believed associated with such apparatus or processes.

In one preferred embodiment, a lightweight, easily adjustable casting apparatus is provided. The casting apparatus has an open cavity for accepting food product on an upstream side and for producing a cast sheet of the food product. A distribution system, such as a pump and piping, may be used to deposit the food product onto a moving support surface, such as a casting belt or chill roll, and on the upstream side of the casting apparatus at a substantially predetermined deposition rate. A mechanism, such as a photoeye, may be used to measure the height of the food product being deposited on the support surface. The casting apparatus includes a static casting blade located at a predetermined height above the support surface, for determining the thickness of the food product sheet. The casting apparatus may be of the top-cast or angle-cast variety.

The height of the casting blade may be adjusted during the casting operation. A blade

Attorney Docket
No. 3461

adjustment, such as a linear actuator, may be used to adjust the height of the entire casting blade above the support surface. A number of blade portion adjustments, which may be evenly spaced along the casting blade, may be used to adjust the height of predetermined portions of the casting blade above the support surface.

Devices or mechanisms may be used to control the dimensions of the product sheet. Thus, the casting apparatus may include vertical plates inside its open cavity to adjust the puddle width. On the downstream side of the casting apparatus, opposing side rails located along at least a portion of a longitudinal periphery of the support surface may be used to control the width of the product sheet. In an alternative embodiment, the distance between the opposing side rails may be adjusted

Preferably, pressure is maintained within a predetermined range on the casting apparatus (not including the casting blade) and against the support surface. For this purpose, one or more spring-loaded tensioning members may be used.

Using the principles of the present invention, a casting apparatus weighing less than 100 pounds, and as light as about 50 pounds, may be provided. Such a lightweight assembly facilitates cleaning and replacement of the casting apparatus.

Many different kinds of food products may be processed using the present invention, including processed cheese and peanut butter, for example, as well as less viscous and more fluid, gelatin-based food products, for example.

A process for casting a food product into a sheet also forms a part of the present invention. A moving support surface for the food product is provided. A puddle of molten food product may

Attorney Docket
No. 3461

be deposited on the support surface, at an upstream side of an open-cavitated casting apparatus mounted above the support surface. The casting apparatus uses a casting blade to caste the food product to a predetermined thickness. The height above the support surface of the casting blade, or of preselected portions of the casting blade, may be adjusting during use of the casting apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features which are characteristic of the invention are set forth in the appended claims. The invention itself, however, together with further objects and attendant advantages thereof, will be best understood by reference to the following description taken in connection with the accompanying drawings, in which:

FIGURE 1 is a perspective view of a conventional cheese casting machine using a pressure manifold having a closed cavity;

FIGURE 2 is a perspective view from the upstream end of one preferred embodiment of the present invention, illustrating a top-cast, open-cavitated casting apparatus in which a "puddle" of the food product has been discharged on the casting belt and on the upstream side of the casting apparatus;

FIGURE 3 is a planar perspective view of the casting apparatus of FIGURE 2;

FIGURE 4 is a side sectional view of the casting apparatus of FIGURE 2;

FIGURE 5 is a partial side sectional view of the casting apparatus of FIGURE 2;

FIGURE 5a is perspective view of portions of the casting apparatus of FIGURE 2 in

Attorney Docket
No. 3461

unassembled form;

FIGURE 6 is a sectional view taken along sections lines 6-6 of FIGURE3;

FIGURE 7 is a top sectional view of the casting apparatus taken along sections lines 7-7 of FIGURE6;

FIGURE 8 is an enlarged side, partial sectional view of the casting apparatus of FIGURE 2;

FIGURE 9 is a sectional view of the casting apparatus of FIGURE 2;

FIGURE 10 is a sectional view of the casting blade adjustment device for adjusting the height of the entire casting blade of the casting apparatus of FIGURE 2;

FIGURE 11 is an enlarged view of the circled portion of FIGURE 10;

FIGURE 12 is a sectional view of the casting blade adjustment device of the casting apparatus of FIGURE 2;

FIGURE 13 is an enlarged view of the circled portion of FIGURE 12;

FIGURES 14 and 15 are planar side and downstream views, respectively, of an angle-cast embodiment of the casting apparatus of the present invention; and

FIGURES 16 and 17 are perspectives view of the casting apparatus in raised and lowered positions, respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Set forth below is a description of what are currently believed to be the preferred embodiments and/or best examples of the invention claimed. Future and present alternatives and

Attorney Docket
No. 3461

modifications to these preferred embodiments are contemplated. Any alternatives or modifications which make insubstantial changes in function, in purpose, in structure or in result are intended to be covered by the claims of this patent.

The present invention utilizes a static blade, preferably of stainless steel, as a fixed edge to cast a food product to predetermined dimensions. The casting blade is located at a known distance above a moving casting belt, typically also of stainless steel, which is in turn located over a rigidly mounted wear plate. A food product to be cast, such as all types of processed cheese, gelatin-based food products such as spiced gelatins, or other food products, is delivered to the upstream edge of the casting blade where it is distributed by gravity. As the casting belt moves, the product is pulled under the casting blade, casting the product to a known thickness and width. As will be better understood from the following description, the invention may be used with casting apparatus employing a casting belt, as well as those using a chill roll.

Referring now to a preferred embodiment of the invention shown in FIGURE 2, casting device 10 communicates with a food product distribution system 15, which may include an extrusion and/or pumping system with piping, as shown, to controllably deposit a "puddle" 17 of the food product, such as molten cheese, spiced gelatin (as described in co-pending patent application filed on the same day as this application, assigned to the same assignee, and titled "Product And Process For Delivering Flavoring Agents To Food Products," incorporated herein by reference), or other food products, onto casting belt 20, which is moving in the direction shown by the arrow. Lightweight casting device 25 evenly distributes the food product into a sheet 27 having a controlled thickness

Attorney Docket
No. 3461

and width, as further described below. A measuring device, such as photo-eye 29, may be mounted on casting device 25 to monitor the puddle height, and may electronically communicate with the distribution system 15 to increase or decrease the speed of food product distribution in order to maintain a product puddle with uniform dimensions. Piping 15 may be supported by Y-shaped support 103 (FIGURE 5a).

Referring now to FIGURES 3-5, a preferred embodiment of the casting apparatus of the present invention, generally referenced as 25, is shown. Casting apparatus 25 is an open-cavitated, static device with a casting blade 37 which evenly contacts and uniformly distributes food product over casting belt 20 into a sheet form. Casting belt 20 rides over wear plate 40, which may be made of a low-friction material such as UHMW plastic.

Referring to FIGURES 6 and 7, plastic width adjustment plates 28 may be used to adjust the width of the puddle 17. It will be understood that with the angle-cast example shown in FIGURES 14 and 15, described below, these plates may be machined to the radius of the casting belt. Devices such as sliders 31, in conjunction with (e.g.) thumbscrews, not shown, may be used to allow plates 28 to be slid and then rigidly adjusted about the length of casting blade 37.

Referring to FIGURES 5-7, plastic inserts 43 fit within brackets 59 (FIGURE 5a), which are rigidly connected at their topmost portions to the bottom portion of hold-down assembly 46, and are used to hold down casting belt 20 in a predetermined position on wear plate 40. Inserts 43 are similar in shape and identical in function (i.e., to control the height of the casting apparatus above the casting belt) to the plastic inserts or dividers used with conventional pressure manifolds.

Attorney Docket
No. 3461

Referring to FIGURES 6-7, spring-loaded tensioners 53, mounted on fixed support 47, may be used to hold U channel 46, and thus the remainder of casting apparatus 25 not including casting blade 37, down within a predetermined tension range against casting belt 20. This protects the casting device from wear and rubbing against the moving, preferably stainless steel casting belt.

Mechanism for selectively adjusting the height of casting blade 37, or portions thereof, during use of the casting apparatus, or off-line, are now described.

Referring to FIGURES 8-13, a mechanical adjustment tool such as linear actuator 55, for example, permits the entire casting blade 37 to be raised or lowered and thus located at a selected height above the casting belt. Blade 37 is carried by side plates 71 (FIGURE 5a), contacting the distal end of linear actuator 55 (FIGURE 10). Linear actuator 55 may include a knob 88 which may be rotated by an operator at ground level; rotation of knob 88, in turn, may rotate shaft 91 and threaded rod 92 which functions as the linear actuation device for adjusting the height of the casting blade "on the fly" (during the casting operation) to within (preferably) thousandths of an inch, so as to reliably control sheet thickness. This casting blade height adjustment allows an operator to adjust blade height to account for differences in product thickness and viscosity caused by temperature fluctuations, product inconsistency or other variables.

Referring to FIGURES 3, 5, 6 and 15, mechanisms 57 for selectively adjusting the height of portions of the casting blade 37 are provided, such as thumbscrews or turnbuckles, may be uniformly distributed along the casting blade 37. These mechanisms 57 are mounted on bar 61 (see FIGURES 5a and 8) and permit slight "on the fly" or off-line adjustments to the area of the blade adjacent the

Attorney Docket
No. 3461

individual adjustment mechanism 57. Using blade adjustments 57, the casting blade may be aligned parallel to the casting belt and wear plate so that the thickness of the food product being extruded is consistent across the width of the sheet.

FIGURES 14 and 15 illustrate a less-preferred, angle-cast embodiment of the present invention, in which casting belt 20 is mounted on drum 75. A plastic dam 70 may be used to retain puddle 17 of the food product and resist it from dropping down the upstream side of the casting blade under the influence of gravity.

To facilitate cleaning, adjustment and replacement of the casting apparatus, arm(s) 93 pivotally connecting the casting apparatus for rotation about support bar 80 may be used, as shown in FIGURES 14-17. Air cylinder 87 is rigidly mounted to support plate 56 and may be used to drive rotation of arm(s) 93, as shown. Tap block 51, located below support plate 56 (FIGURE 5A), which may be oriented at a 2° angle, for example, may be used to ensure contact between wear plate 40 and casting belt 20.

Upon extrusion, a low viscosity food product such as spiced gelatin, described above, may be so fluid that, despite cooling, it will not retain its extruded dimensional characteristics. If such a fluid-like product is allowed to freely flow, the extruded width of the product may increase, and thus the sheet thickness may decrease, resulting in an inconsistent thickness across the width of the extrusion. In some cases, the fluid-like product may travel 4-6 feet before it is cooled enough to begin retaining its geometrical shape. To solve this problem and prevent the product from losing its dimensional characteristics, side rails 30 may be located downstream of casting blade 37, on each

Attorney Docket
No. 3461

side of the extruded product. Side rails 30 contact the casting belt and act as a boundary for the fluid-like product until it is cooled enough to retain its dimensional characteristics. These side rails may be vertical or turned 45 degrees relative to the plane of the casting belt surface. The side rails may also be adjusted width-wise (i.e., they may be brought closer together or farther apart) using convenient controls such as thumbscrews, to provide the product sheet with a predetermined width. The side rails may be constructed from plastic or any other material that is not damaging to the preferably stainless steel casting belt, as further disclosed in co-pending U.S. Serial No. ___, titled "Casting Food Products To Controlled Dimensions," incorporated herein by reference, assigned to the same assignee as here, and filed on the same day as this patent application. The extruded sheet 27 may then be further cooled so that it may be cut into ribbons using conventional apparatus such as a ribbon slitting and twisting mechanism (not shown). The ribbons may then be further cut into slices or other forms and packaged. It has been found that for more viscous products, like processed cheese, the use of side rails may be unnecessary.

Various advantages and benefits flow from use of the present invention. Thus, it will now be appreciated that a lightweight, simplified and economical casting device is provided in which an open cavity rather than a pressure manifold may be used. Valve controls and PID controls are also rendered unnecessary. Instead, more economical high/low speed control with digital (level) input may be employed.

Casting apparatus 25 also need not be removed for changeovers. Due to its open cavity, food product such as processed cheese can be scraped or otherwise cleaned from inside the cavity without

Attorney Docket
No. 3461

the need to remove or disassemble the casting apparatus.

Due to its relatively light weight of preferably less than about 100 pounds, and most preferably less than about 50 pounds, the casting apparatus may be easily raised and lowered for cleaning using, e.g., a pneumatic cylinder as shown in FIGURE 16. This also allows sheet height adjustment to be performed from an operator station located on floor level.

Additionally, with the present invention the food product puddle is deposited upstream of the casting apparatus, and the cohesive force between the food product and the casting belt pulls the food product underneath the casting blade, creating a product sheet of uniform thickness. Thus, the present invention can accommodate minor fluctuations in pump speed without affecting the desired dimensions of the food product sheet.

The above description is not intended to limit the meaning of the words used in the following claims that define the invention. Rather, it is contemplated that future modifications in structure, function or result will exist that are not substantial changes and that all such insubstantial changes in what is claimed are intended to be covered by the claims.

Attorney Docket
No. 3461

We Claim:

1. A lightweight, easily adjustable casting apparatus having an open cavity for accepting food product on an upstream side and for producing a cast sheet of the food product, comprising:
 - a moving support surface for the food product; and
 - a casting blade located at a predetermined height above the support surface for determining the thickness of the food product sheet, the height of the casting blade being adjustable during the casting operation.
2. The casting apparatus of Claim 1, further comprising means for depositing the food product onto the support surface and on the upstream side of the casting apparatus at a substantially predetermined deposition rate.
3. The casting apparatus of Claim 1, further comprising an adjustment mechanism for adjusting the height of the casting blade above the support surface.
4. The casting apparatus of Claim 3, wherein the adjustment mechanism comprises a linear actuator.
5. The casting apparatus of Claim 1, further comprising a plurality of adjustments

Attorney Docket
No. 3461

devices located along the casting blade, the adjustment devices permitting the height of predetermined portions of the casting blade above the support surface to be adjusted.

6. The casting apparatus of Claim 1, wherein the support surface comprises a casting belt.

7. The casting apparatus of Claim 1, wherein the support surface comprises a chill roll.

8. The casting apparatus of Claim 2, wherein the deposition means comprises a photo-eye measuring the height of the food product being deposited on the support surface.

9. The casting apparatus of Claim 1, further comprising means for controlling the width of the sheet of the food product.

10. The casting apparatus of Claim 9, wherein the controlling means comprises opposing side rails located along at least a portion of a longitudinal periphery of the casting belt.

11. The casting apparatus of Claim 10, wherein the distance between the opposing side rails may be adjusted

12. The casting apparatus of Claim 6, further comprising means for maintaining pressure

Attorney Docket
No. 3461

within a predetermined range on the casting apparatus and against the casting belt, the pressure means not maintaining the pressure on the casting blade..

13. The casting apparatus of Claim 12, wherein the maintaining means comprises one or more spring-loaded tensioning members.

14. The casting apparatus of Claim 1, wherein the casting apparatus weighs less than 100 pounds.

15. The casting apparatus of Claim 6, wherein the casting apparatus comprises a top-cast apparatus.

16. The casting apparatus of Claim 6, wherein the casting apparatus comprises an angle-cast apparatus.

16. The casting apparatus of Claim 1, wherein the food product comprises processed cheese.

17. The casting apparatus of Claim 1, wherein the food product is gelatin-based.

Attorney Docket
No. 3461

18. A lightweight, open-cavitated casting apparatus for producing a cast sheet of a food product, comprising:

a moving support surface for the food product;
a distribution system for depositing the food product onto the moving support and upstream of the casting apparatus;
a casting blade located at a predetermined height above the support for determining the thickness of the sheet of the food product; and
height adjustment mechanisms for permitting adjustment of the height of the casting blade above the support surface during casting operation, the height adjustment mechanisms permitting adjustment to the height of the entire casting blade as well as to the height of predetermined portions of the casting blade.

19. A process for casting a food product into a sheet, comprising the steps of:

providing a moving support surface and an open-cavitated casting apparatus mounted over the support surface, the casting apparatus having a casting blade;
depositing the food product in molten form on the moving support surface and upstream of the casting apparatus;
using the casting blade to caste the food product to a predetermined thickness.

20. The process of Claim 19, further comprising the step of adjusting the height of the casting blade, or of preselected portions of the casting blade, above the support surface.

1/10

FIG. 1
PRIOR ART


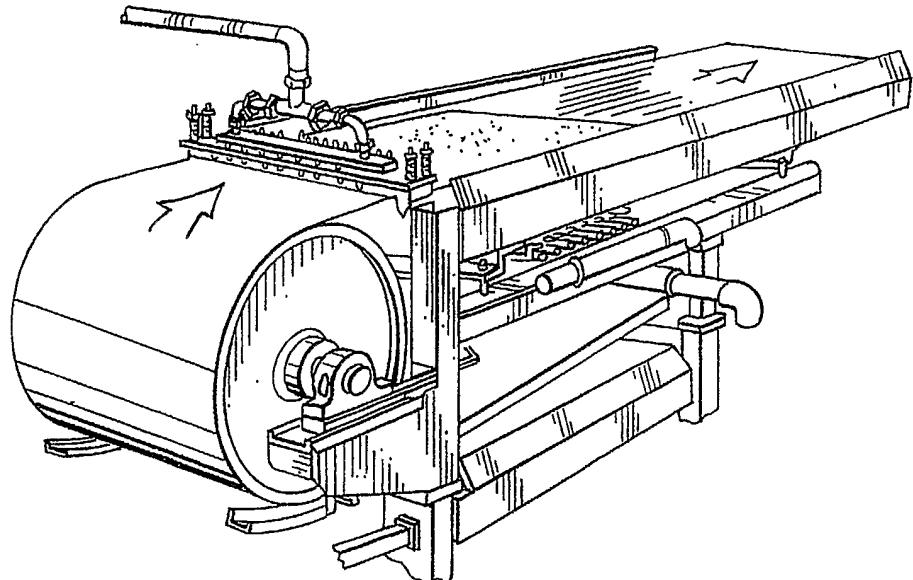


FIG. 2

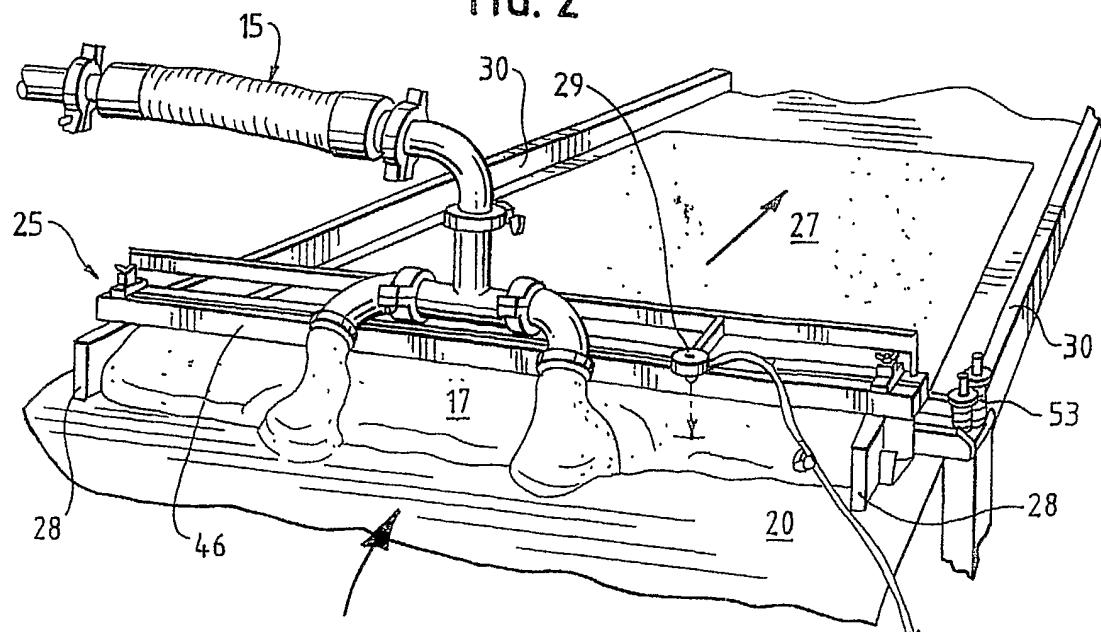

2/10

FIG. 3

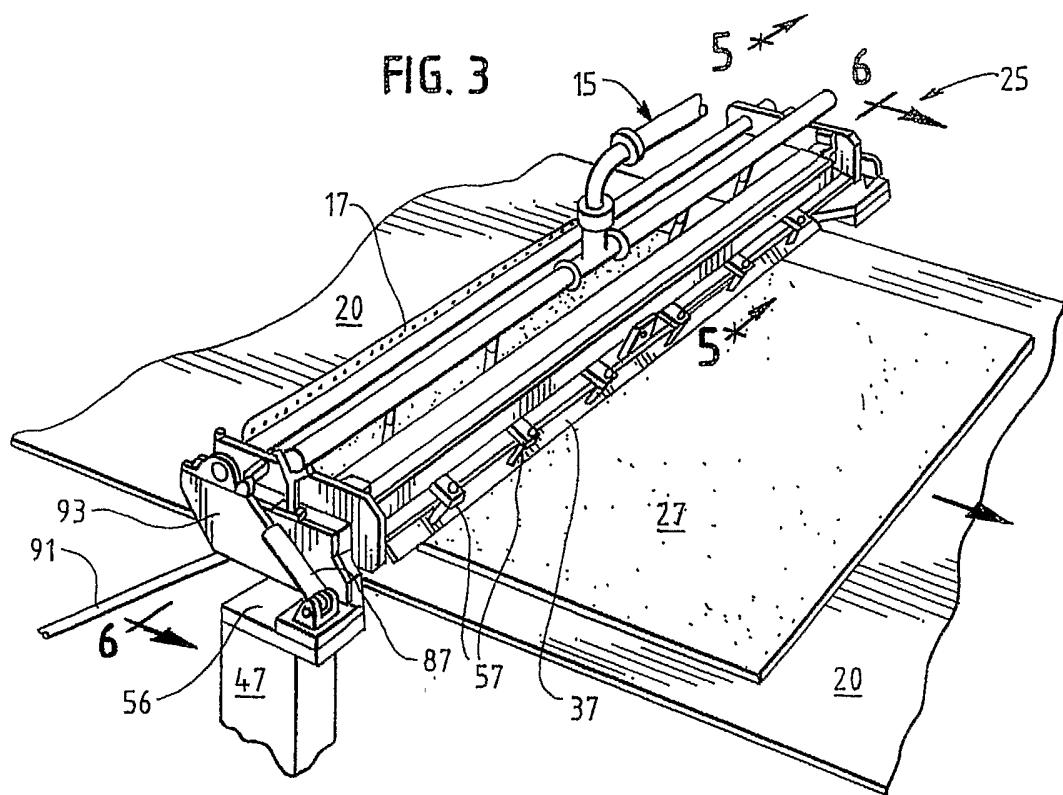


FIG. 4



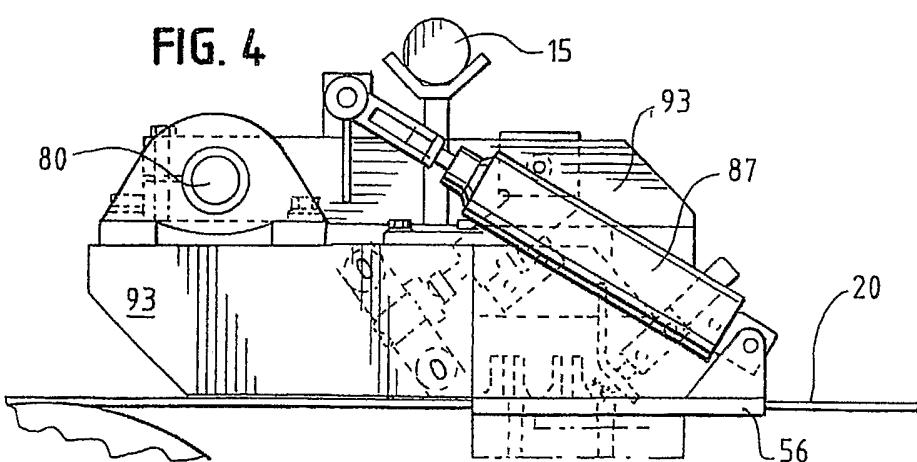


FIG. 5

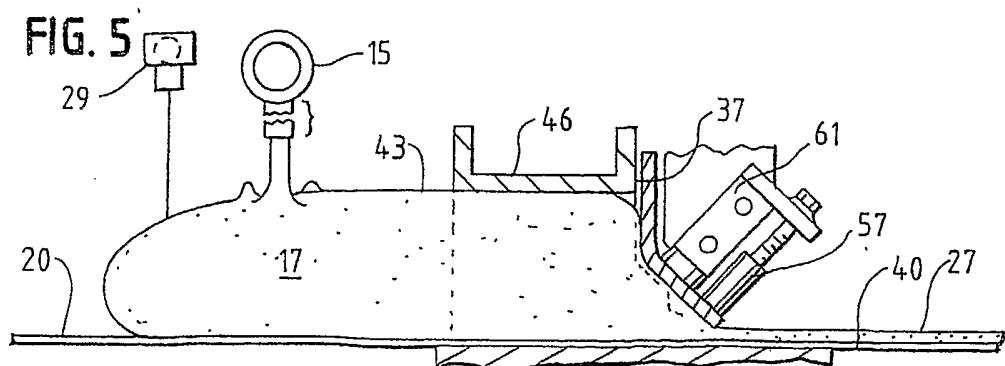


3/10

FIG. 5A

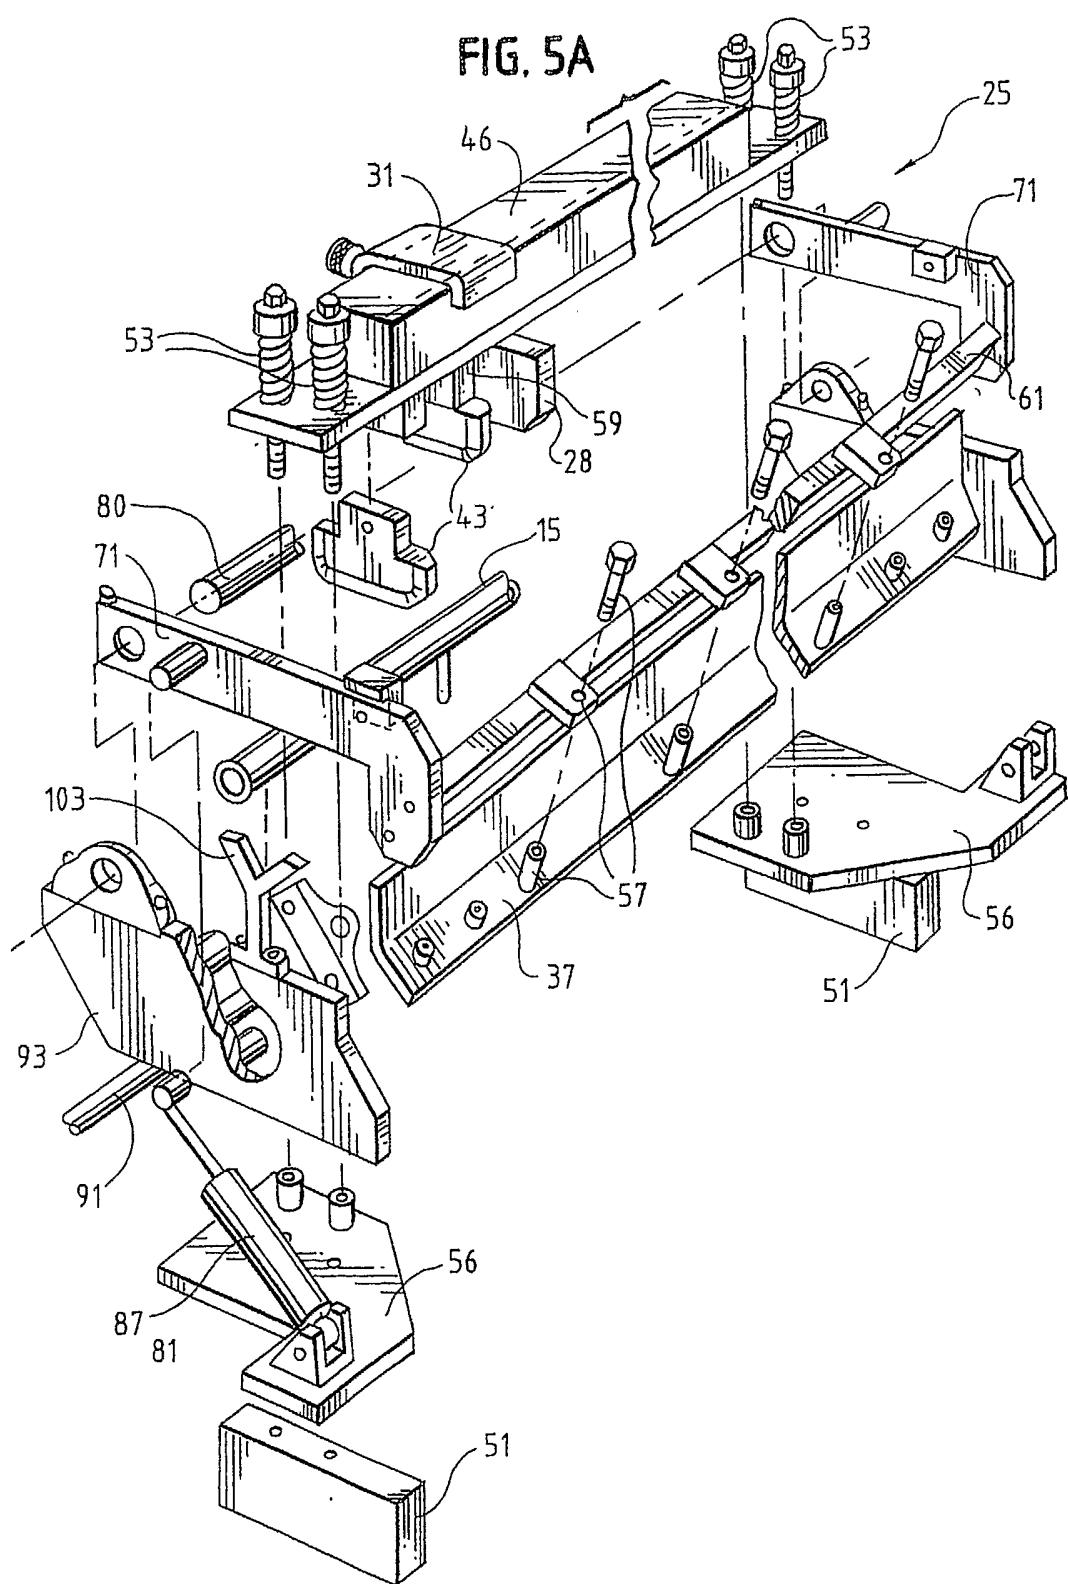

SUBSTITUTE SHEET (RULE 26)

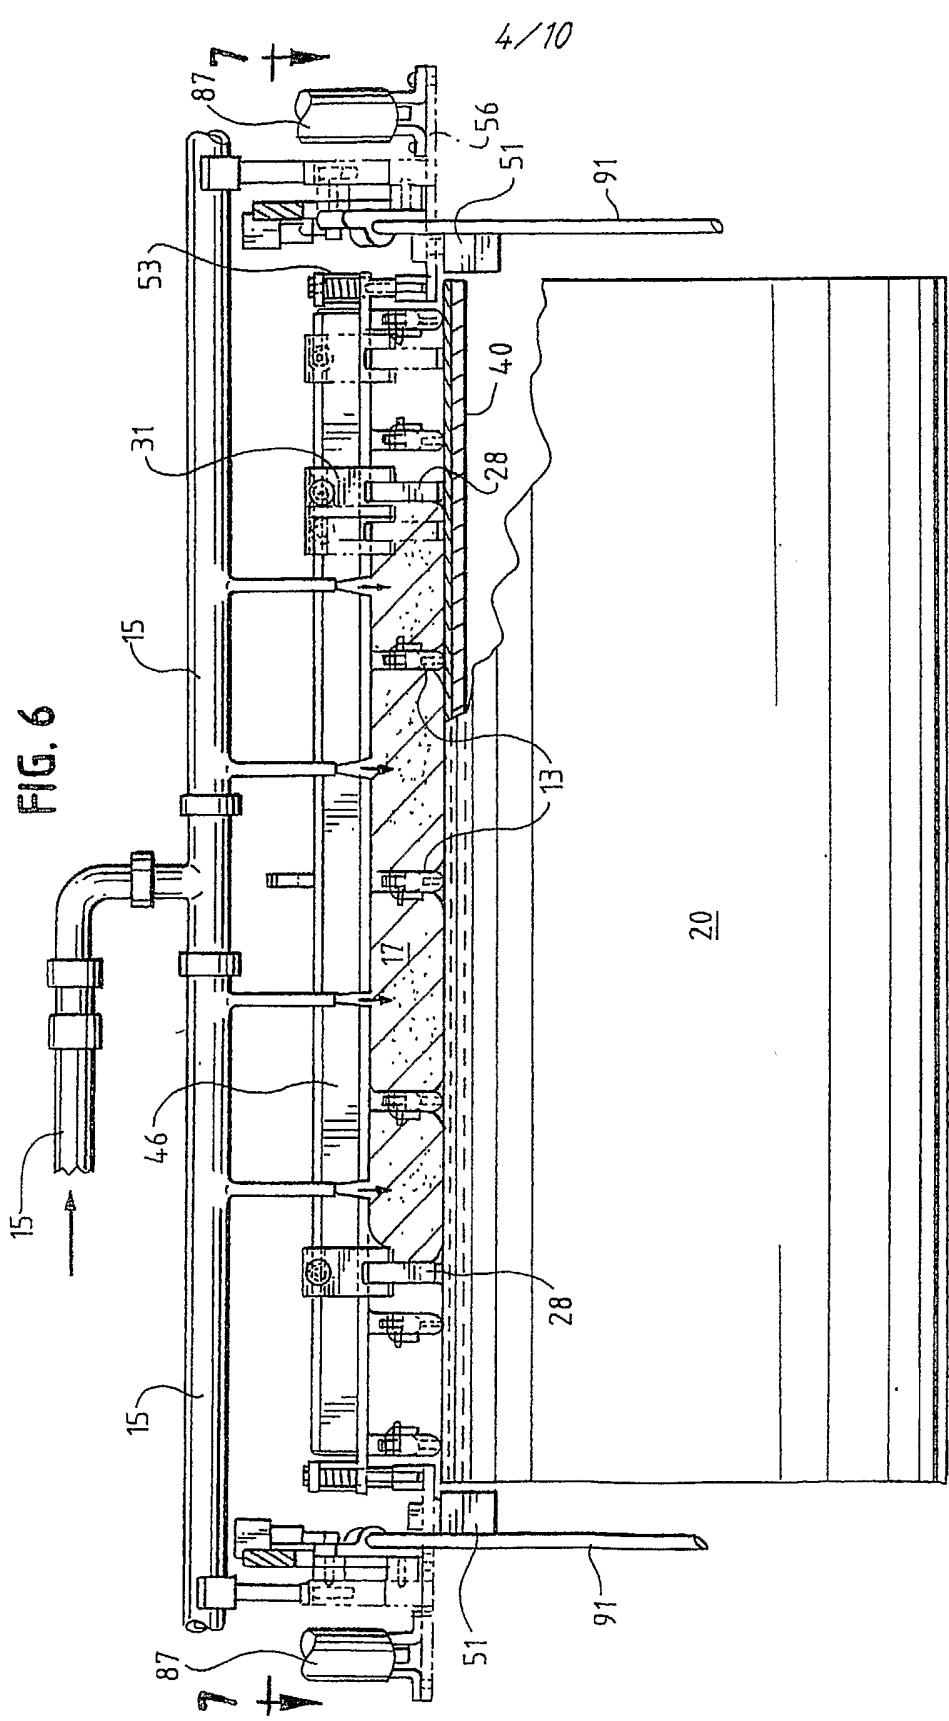

5/10


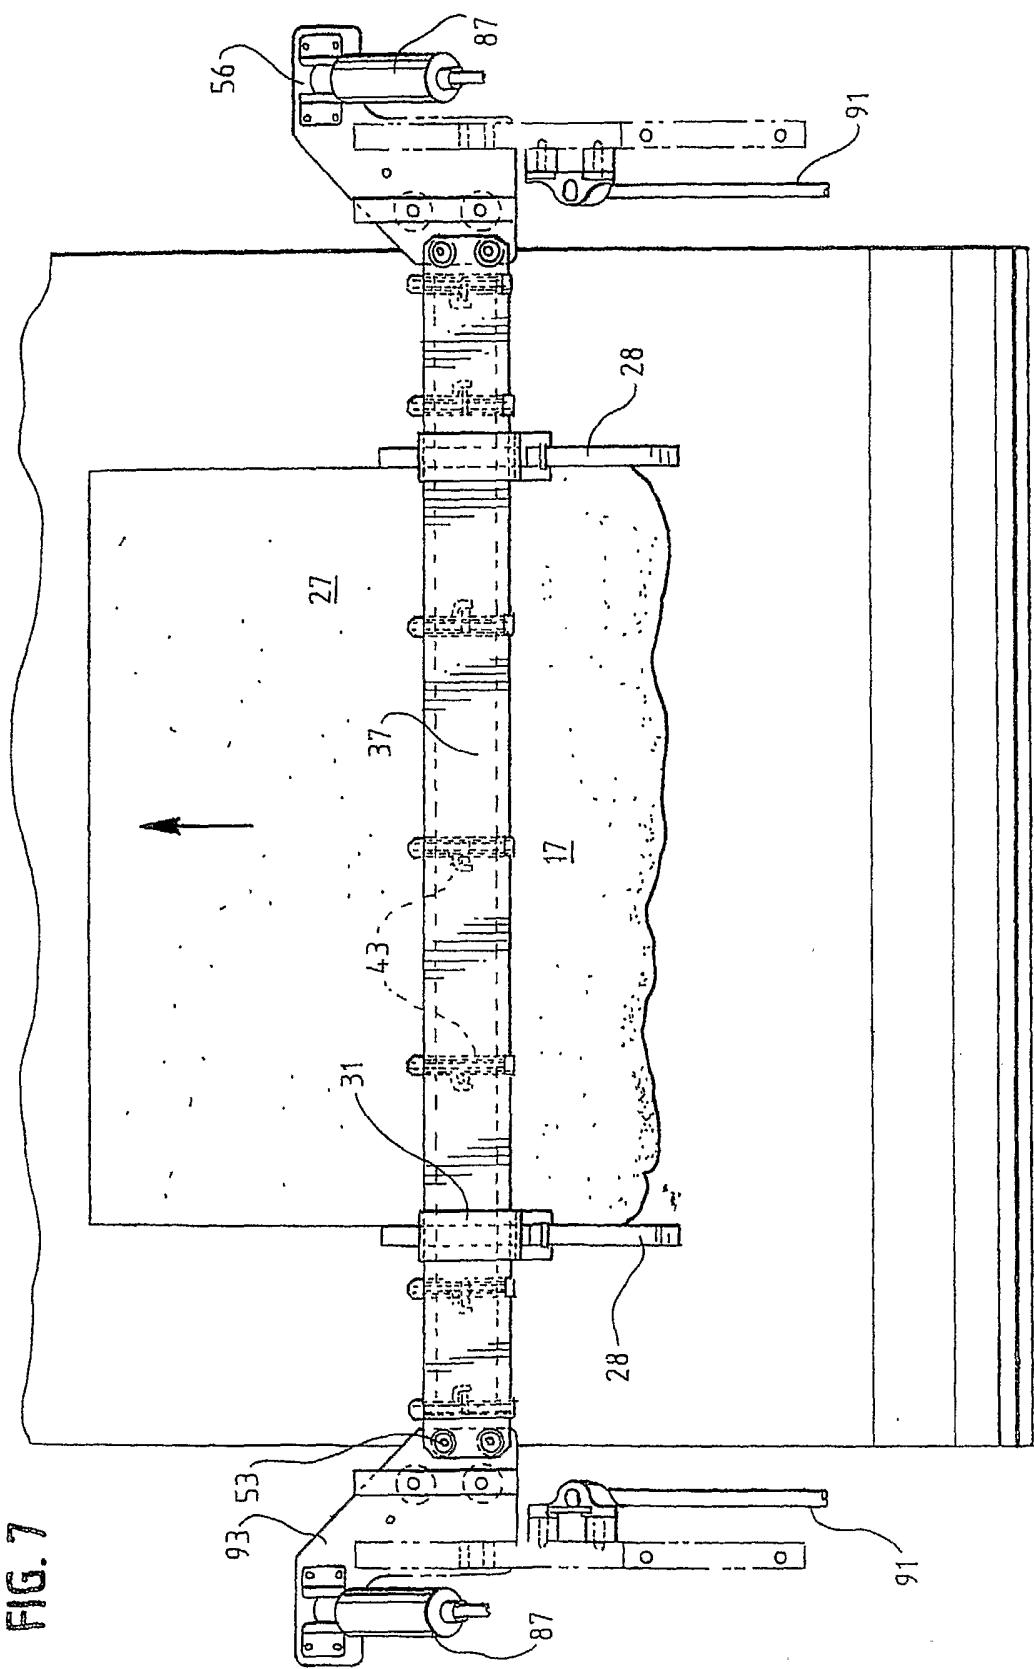


FIG. 7


6/10

FIG. 8

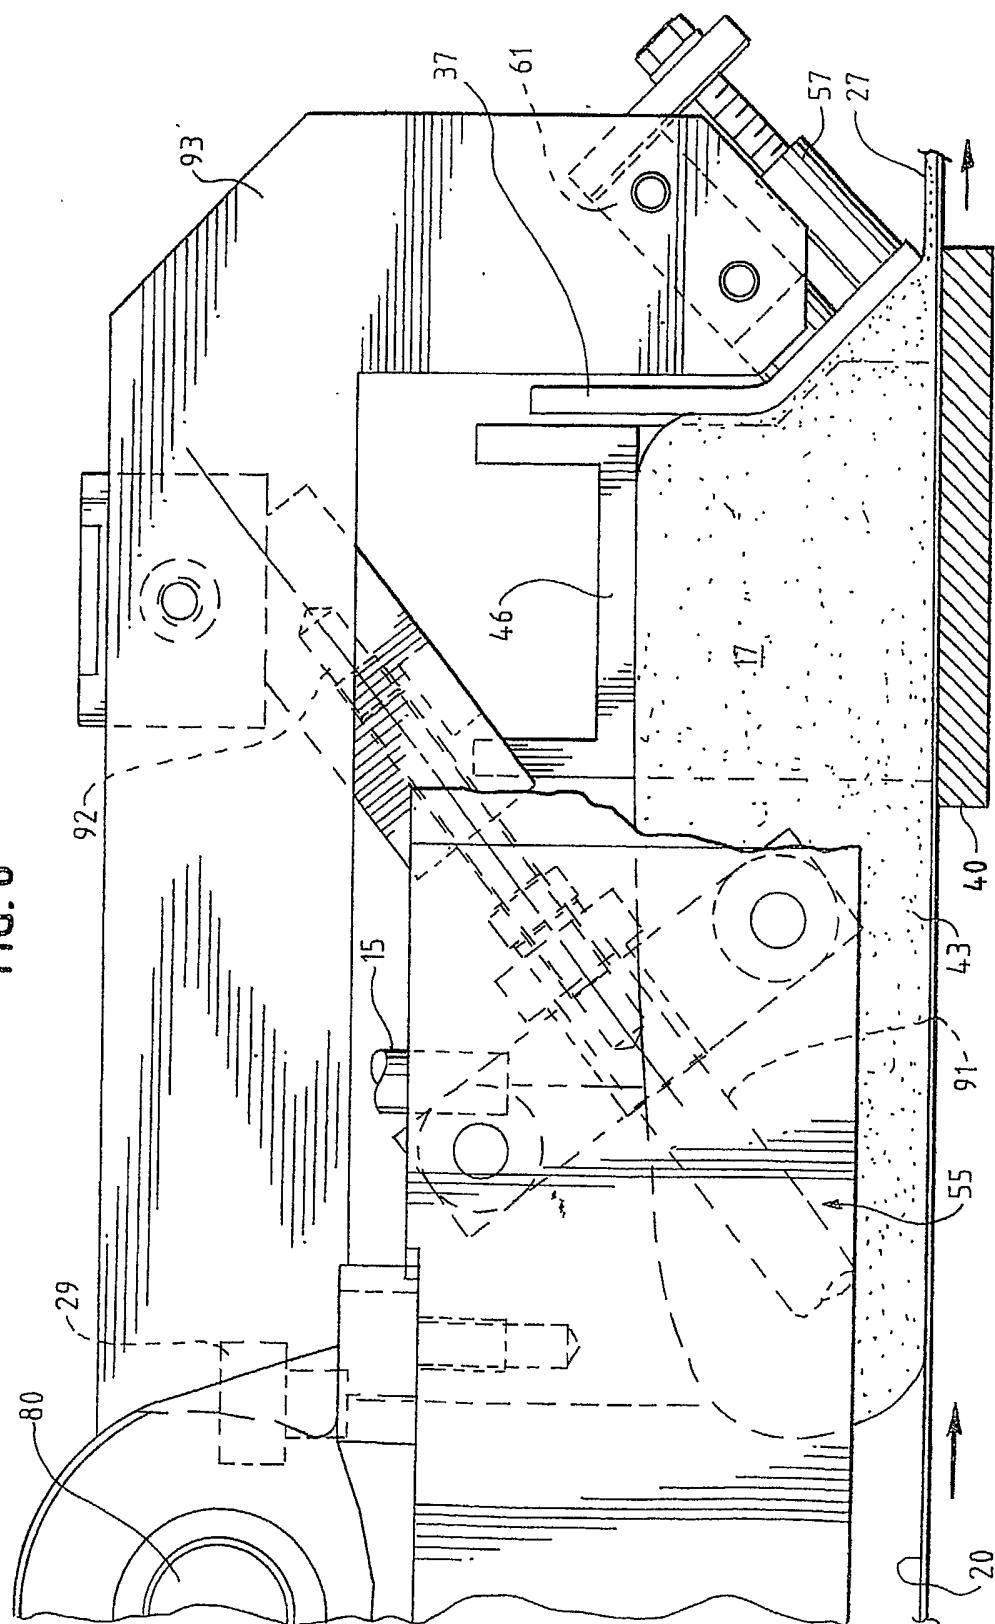

7/10

FIG. 9

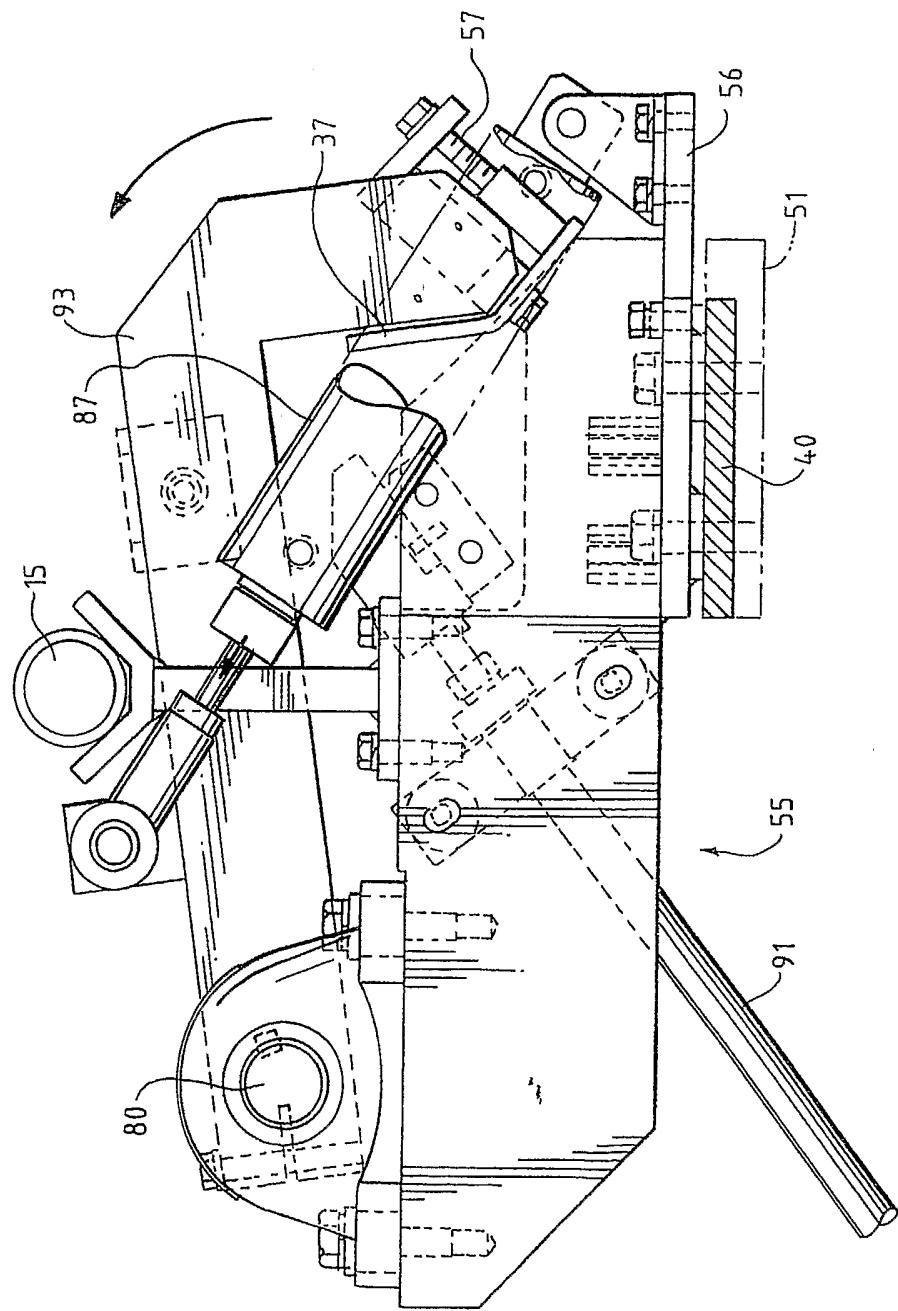

SUBSTITUTE SHEET (RULE 26)

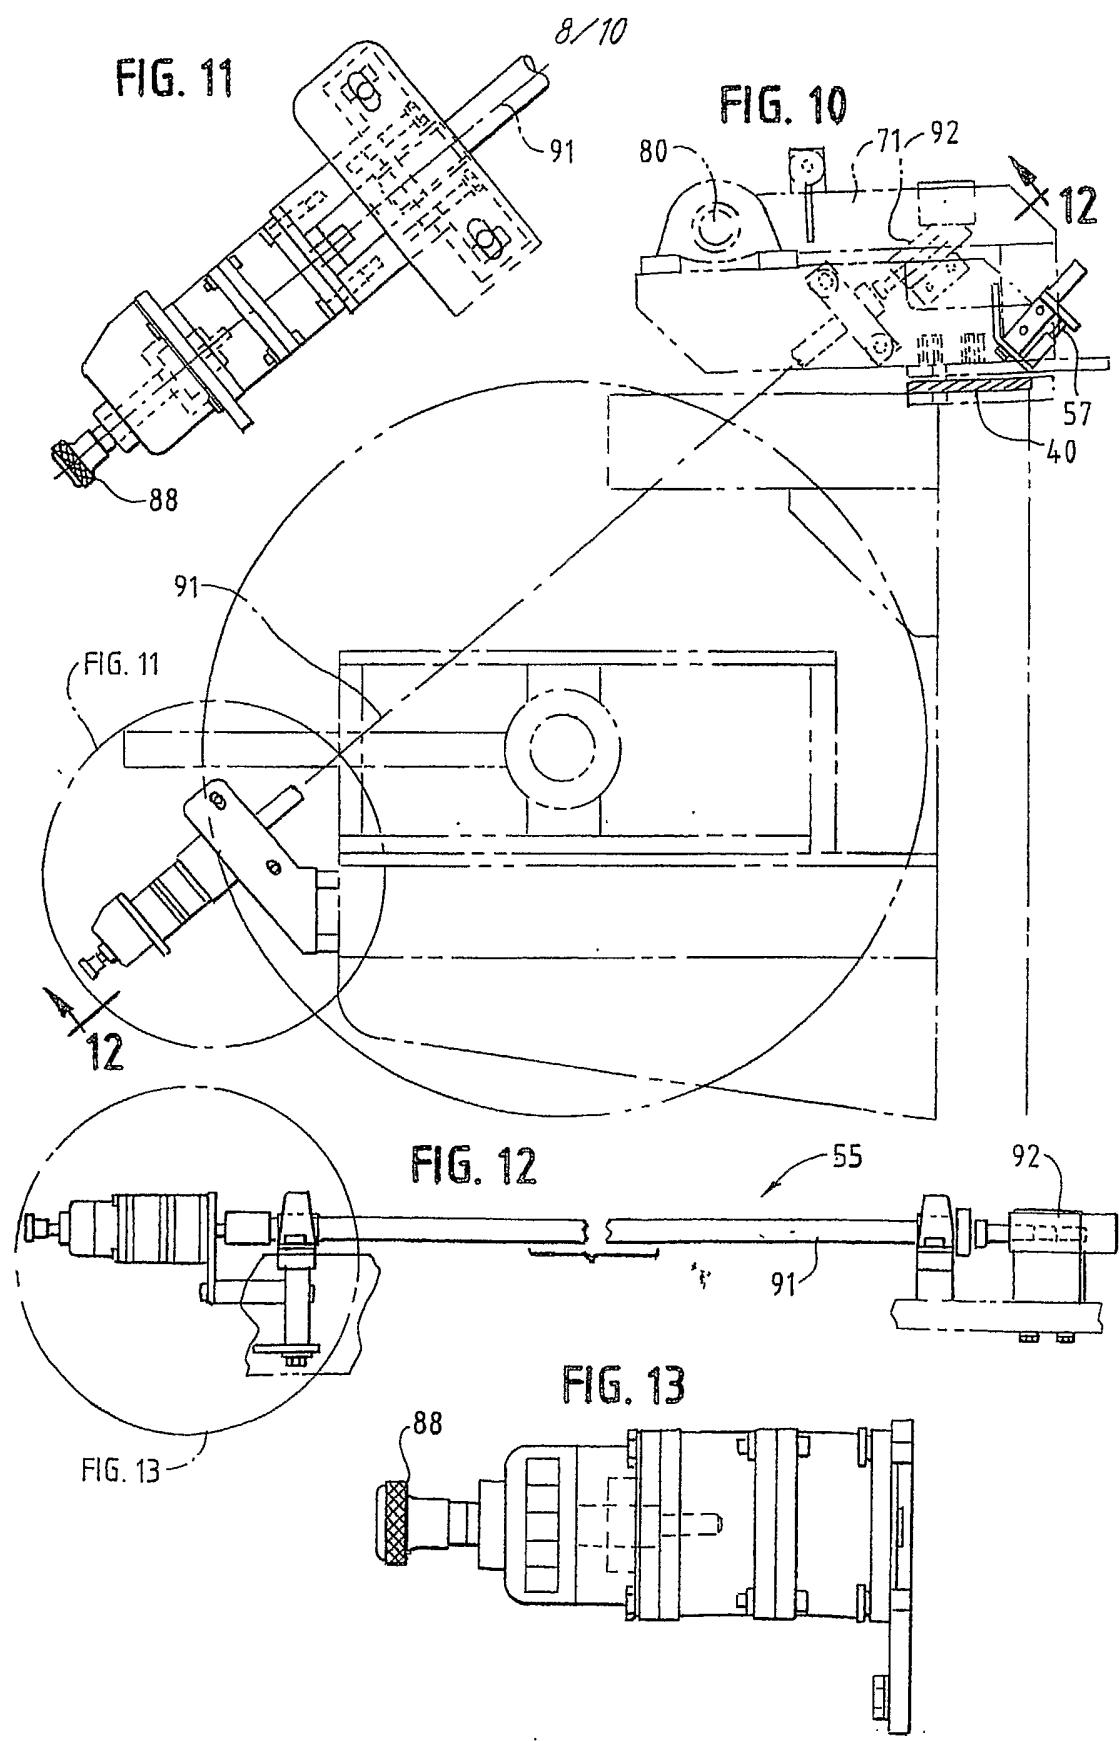


FIG. 14


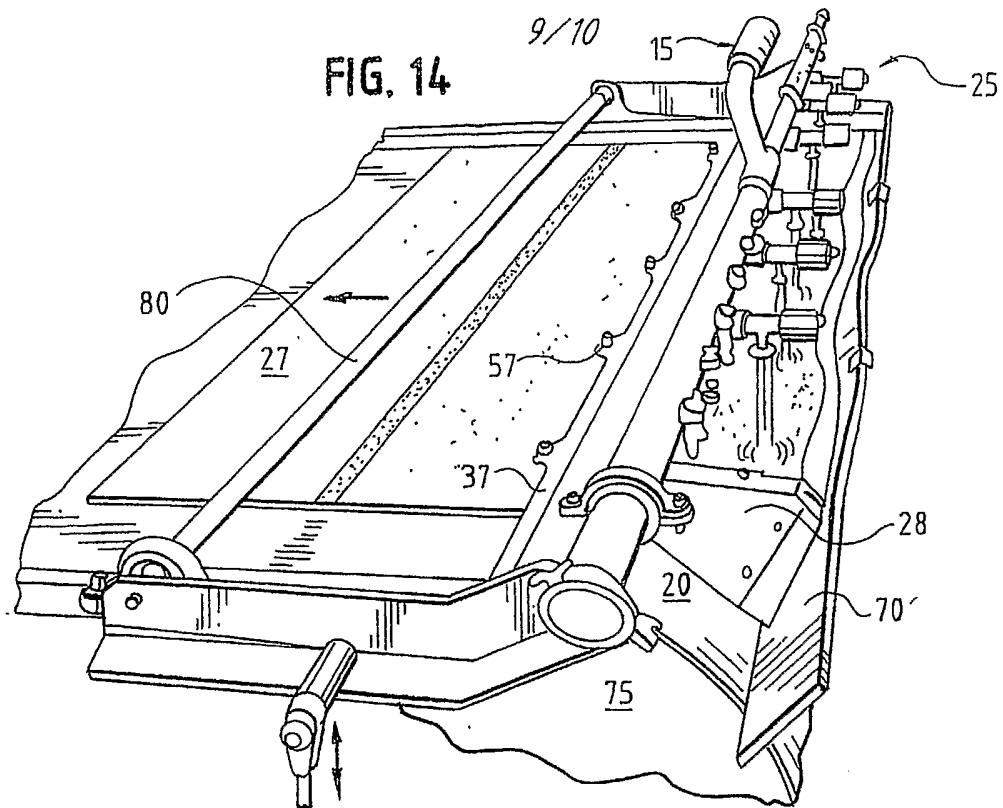


FIG. 15

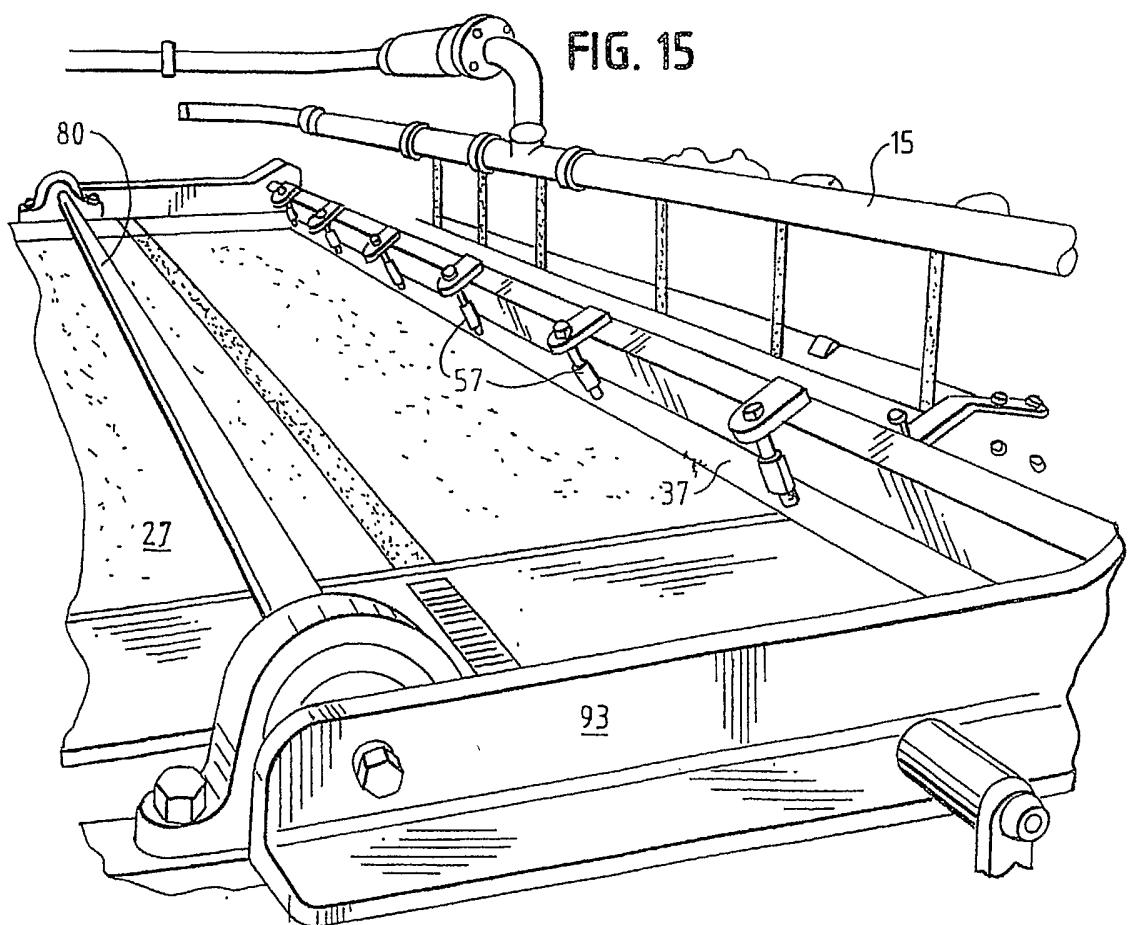

10/10

FIG. 16


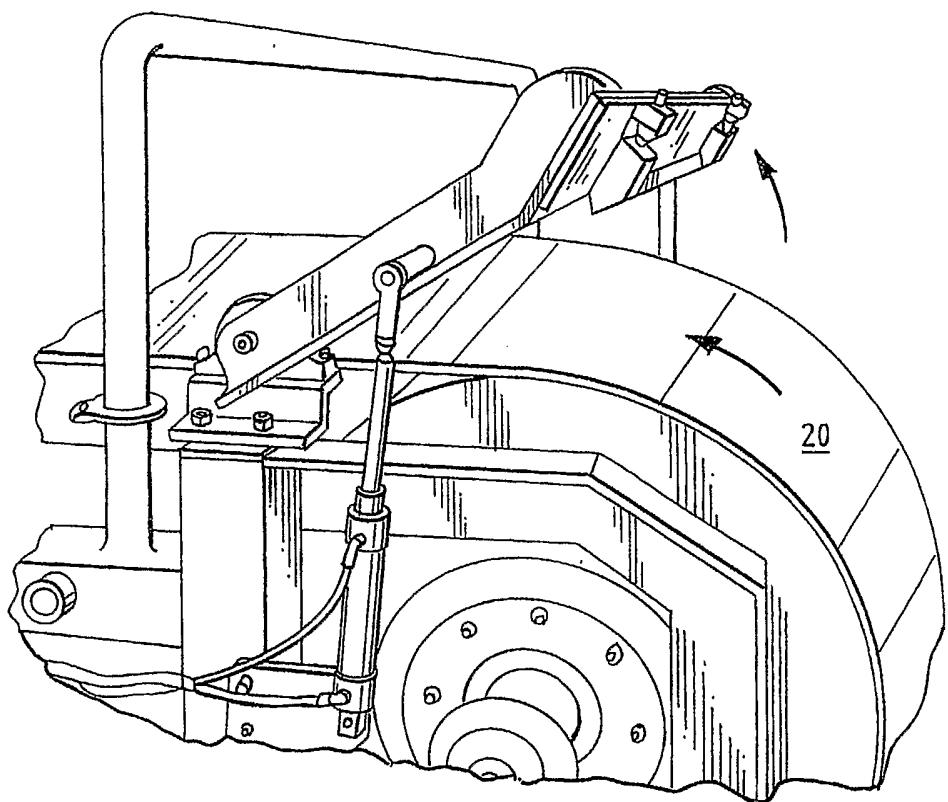


FIG. 17

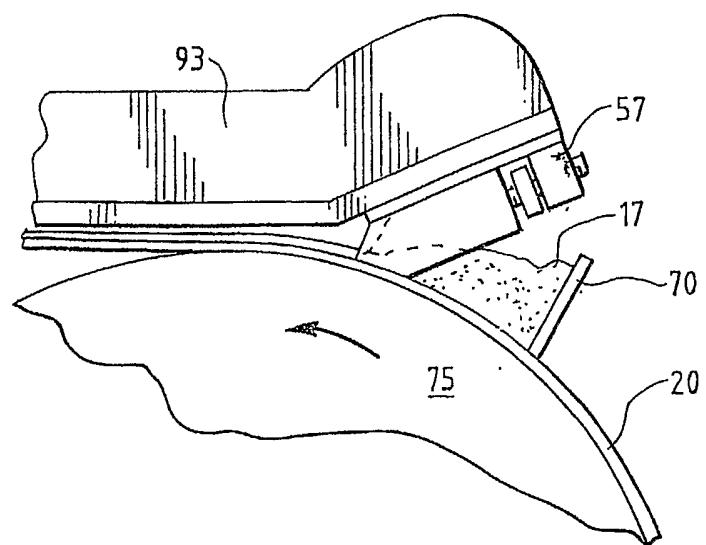

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/12953A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A01J27/04 A01J25/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A01J B65G B29C A23P A23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 790 242 A (DRIESSEN GERALD J) 13 December 1988 (1988-12-13)	1-6, 9-16, 18-20
Y	column 3, line 10 -column 7, line 29; figures 15,7,12 ---	7,8,17
Y	US 3 887 719 A (MILLER ROLAND E) 3 June 1975 (1975-06-03) column 1, line 33 -column 3, line 36; figure 1 ---	7,17
Y	WO 02 13621 A (SVEJKOVSKY PAUL A) 21 February 2002 (2002-02-21) page 9 -page 10; figure 1 ---	8
A	US 2 907 109 A (RICHARD PALMER JOHN) 6 October 1959 (1959-10-06) column 2, line 33 - line 72; figures 2,3 ---	9-11,15
		-/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

7 July 2003

14/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moeremans, B

INTERNATIONAL SEARCH REPORTInternational Application No
PCT/US 03/12953**C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 735 817 A (SMITH ROBERT M) 5 April 1988 (1988-04-05) column 2, line 49 -column 4, line 6; figure 1 ----- US 4 217 818 A (HAZEN GRETZ L) 19 August 1980 (1980-08-19) column 4, line 37-43; figures 1,2 -----	1,2,18, 19 9-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 03/12953

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 4790242	A 13-12-1988	NONE		
US 3887719	A 03-06-1975	AU 465581 B2 AU 3633671 A CA 971901 A1 DE 2161211 A1 FR 2117518 A5 GB 1370380 A JP 54021421 B		02-10-1975 07-06-1973 29-07-1975 06-07-1972 21-07-1972 16-10-1974 30-07-1979
WO 0213621	A 21-02-2002	US 2002022072 A1 AU 8313701 A WO 0213621 A1 US 2003017240 A1 US 2003000460 A1		21-02-2002 25-02-2002 21-02-2002 23-01-2003 02-01-2003
US 2907109	A 06-10-1959	NONE		
US 4735817	A 05-04-1988	GB 2179586 A ,B		11-03-1987
US 4217818	A 19-08-1980	US 4089243 A AU 512239 B2 AU 2433677 A CA 1056757 A1 CA 1057226 A2 DE 2719681 A1 DK 200077 A FR 2363985 A1 FR 2363984 A1 GB 1578478 A GB 1578479 A IE 44945 B1 IE 44944 B1 IT 1078185 B JP 1234490 C JP 52154573 A JP 59007292 B NL 7704764 A NZ 184018 A NZ 191198 A ZA 7702427 A		16-05-1978 02-10-1980 26-10-1978 19-06-1979 26-06-1979 17-11-1977 07-11-1977 07-04-1978 07-04-1978 05-11-1980 05-11-1980 19-05-1982 19-05-1982 08-05-1985 17-10-1984 22-12-1977 17-02-1984 08-11-1977 08-10-1980 08-10-1980 26-04-1978