



(51) International Patent Classification:
H04N 7/173 (2006.01)

(21) International Application Number:
PCT/IL2010/000319

(22) International Filing Date:
22 April 2010 (22.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
198607 6 May 2009 (06.05.2009) IL

(71) Applicant (for all designated States except US): **TV Terminal Ltd.** [IL/IL]; 157 Yigal Alon St., 67443 Tel-Aviv (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOLOBRODSKY, Oleg** [IL/IL]; 17/9 Sharet Street, 49522 Petach Tikva (IL). **DRORI, Gideon** [IL/IL]; 10 Ephud Street, 44810 Sha'arei Tikva (IL). **PETERBURG, Yitzhak** [IL/IL]; 92 Nahar Ha'yarden Street, 76805 Tal Shazar (IL). **PETERBURG, Moshe** [IL/IL]; 68 Lamerchav Street, 47226 Ramat Hasharon (IL).

(74) Agent: **INGEL, Gil**; Alef. Gimel. - Intellectual Property Consulting Ltd., P.O.Box 2079, 76120 Rehovot (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DEVICE AND METHOD FOR PROVIDING SERVICES TO A USER OF A TV SET

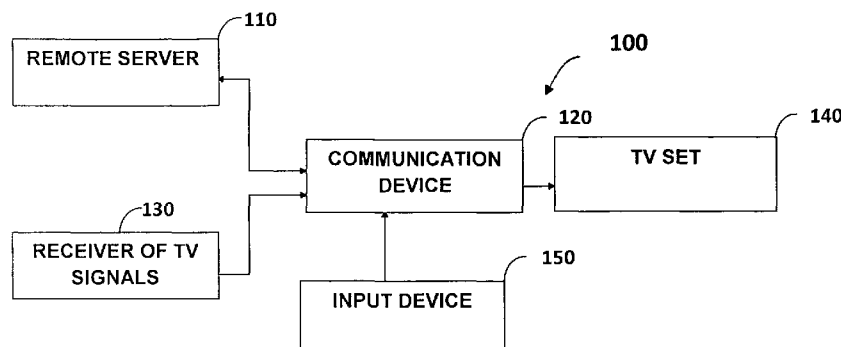


FIG. 1

(57) Abstract: A communication device is provided for enabling a TV viewer to transmit signals towards a service provider. The communication device comprises: a user interface adapted to receive input signal from the TV viewer; a transceiver adapted to communicate wirelessly with a service provider via a remote server; and a TV interface adapted to allow forwarding of signals received from a TV source and of signals received from a service provider, towards a TV device of the TV viewer. Preferably the signals received from both sources are displayed simultaneously within different viewing windows at the screen of the TV device.



Device and Method for Providing Services to a User of a TV Set

Field of the Invention

5 The present invention relates to communications and more particularly to method, apparatus and system for providing services to a television viewer.

Background of the Invention

10 When considering the percentage of the population that consumed Internet based services in various countries in early 2005, the difference between industrial countries and developing countries is clearly demonstrated. The penetration in the USA was 48%, in
15 Canada and Australia 46%, in Sweden 53%, in Germany 36%, in the UK 38%, in France 26%, in Spain 22%, whereas in Brazil 6%, in South Africa 1.5% and in Ethiopia, Ghana, Egypt and many other counties in Africa the percentage of the population consuming Internet based services is less
20 than 1% (source: globalEDGE -<http://globaleedge.msu.edu>). Although data connectivity in rural communities has been found to be a factor that increases social and economical benefits of the people living in these communities, developing countries still face many barriers in
25 providing Internet connectivity to the masses. For example, the lack of wire-line infrastructure in rural areas makes it difficult to deploy services traditionally provisioned via wire line broadband, and of course many households do not have computers.

30 The concept of receiving Internet web-content at the television set is relatively new but still known in the art as can be seen for example in WO 2008142472 which presents a converged communication system having the TV set as the main networked device for integrated content

search, delivery and consumption. Online content is delivered from the Internet to TV, by way that traditional TV broadcasts are conveyed together with multimedia and non multimedia data retrieved from online resources, are seamlessly integrated in one delivery channel and conveyed along that channel to TV viewers.

Even though that there are some references in the art for combining Internet with television broadcasts, they do not solve the problem where there is no infrastructure available for providing the subscriber with a return (upstream) channel through which he/she may forward communications towards a non-cable TV service provider, and particularly they are not aimed to provide the user of a TV apparatus with the option to use that apparatus for simultaneously watching TV broadcasts while being interactively connected to various Internet applications.

In addition, one of the drawbacks which providers of TV broadcasts via satellite are facing, is, their lack of ability to properly communicate with their subscribers in the upstream direction. Typically, when a subscriber wishes to enquire about a certain problem being experienced (e.g. reception quality), he/she will call by telephone a service center of the satellite service provider and will explain the problem to a representative at the service center, a process which consumes substantial human resources while still being limited in options that can be offered to the subscriber.

The present invention therefore seeks to provide a solution to overcome the above-mentioned problems.

Summary of the Invention

It is an object of the present invention to provide method and apparatus for providing a TV viewer with PC services.

5 It is another object of the present invention to provide a method and apparatus for enabling a TV viewer to retrieve requested information, even without having his/her premises connected to a wired/cable infrastructure.

10 It is another object of the present invention to provide a method and apparatus for combining television broadcasted signals with signals carrying information that was requested by the TV viewer, into an integrated signal and displaying the integrated signal at the
15 viewer's TV set (e.g. in the form of a display within a larger display, or two displays located side by side, etc.).

It is another object of the present invention to provide a method and apparatus for allowing easy shift
20 between displaying television broadcasted signals and displaying signals carrying information that was requested by the TV viewer.

It is still another object of the present invention to provide a method and apparatus that provide a viewer
25 of satellite TV broadcasting with means to communicate with the satellite TV service provider, other than calling the satellite TV service provider's call center.

It is another object of the present invention to provide a method and apparatus for providing updated PC
30 services to a TV viewer without requiring that the user would purchase a computer, maintain it and upgrade it every couple of years or so.

It is another object of the present invention to provide a method and apparatus for enabling a TV service

provider to unicast messages/video streams to a TV viewer.

According to a first embodiment of the present invention, there is provided a communication device (e.g. a communication box) adapted to enable a TV viewer to transmit signals, wherein the communication device comprising:

- (a) a user interface adapted to receive input signal from the TV viewer;
- 10 (b) a transceiver adapted to communicate wirelessly with a service provider via a remote server; and
- (c) a TV interface adapted to allow forwarding of signals received from a TV source and of signals received from a service provider, to a TV device of the TV viewer.

In accordance with another embodiment of the invention, the communication device further comprises an electronic mixer adapted to combine signals received from the Internet service provider via the transceiver with TV signals broadcasted from a TV source, and wherein the TV interface is further adapted to allow forwarding the combined signals. By this embodiment, the TV interface is adapted to forwarding of signals received either from a TV source or from a service provider or a combination thereof, to the TV device.

In other words, the present invention enables the viewer to watch TV broadcasts on his/her TV screen, or to practically turn this TV set (through the use of the present invention communication device) to a computer terminal, e.g. for surfing the Internet. Optionally, by integrating the signals arriving from the two different sources as explained hereinabove, the invention also enables to display an integrated signal at the screen of

the user's TV set, where the integrated signal being displayed, comprises a window for displaying the signal being broadcasted from a TV source by the service provider of the TV broadcasts, and a window for displaying data received through communications exchanged with the service provider of the Internet service, irrespective of the size of each of these two display windows. As will be appreciated, the two different service providers mentioned-above, may in fact be one service provider that provides both TV broadcasts and Internet content, but preferably, the two services will be provided in such a case along two different paths, more preferably, along two different paths, each comprising one or more links, and wherein at least one of the links comprised in one of these two paths is physically different from any link comprised in the other of the two paths.

According to another embodiment of the present invention, the transceiver is further adapted to transmit a request inputted by the TV viewer towards the remote server to enable the TV viewer to receive information from the remote server (whether the information is stored at that remote server or whether it would be retrieved from elsewhere).

According to a still another embodiment of the invention, the transceiver comprises a wireless (e.g. cellular) module that is adapted for use as a relaying means for the communication device described herein.

In accordance with another embodiment of the invention, the request comprises an indication for connecting the TV viewer to an Internet-based application residing at a second server.

By still another embodiment of the invention, the user interface is further adapted to receive signals

conveyed by a user device (e.g. an iPod), and wherein the electronic mixer is further adapted to combine the signals received from the user device with TV signals broadcasted from a TV source.

5 According to another embodiment, the transceiver is further adapted to transmit signals received from the user device towards said remote server.

 According to yet another embodiment of the present invention, the communication device further adapted to be
10 connected to at least one computer accessory (e.g. online camera, microphone etc.) to enable providing an enhanced surfing experience to the TV viewer.

 In accordance with yet another embodiment of the invention, the communication device further comprises
15 storage means. Preferably, the electronic mixer is further adapted to combine signals retrieved from the storage means with TV signals broadcasted from a TV source. Optionally, or in the alternative, the communication device is further adapted to enable displaying signals
20 retrieved from the storage means along with TV signals broadcasted from a TV source (e.g. so that the TV screen comprises the two displaying windows).

 By still another embodiment of the invention, the communication device further comprises a processor adapted
25 to determine if a quality of the TV signals being broadcasted from a TV source is less than a pre-defined threshold, and if in the affirmative, initiating conveyance of replacement signals for these low quality TV signals towards the communication device via the remote
30 server. The replacement signals may be the same broadcast that is being poorly received over the air, or in the alternative, could comprise different signals all together, whether these different signals are selected by the TV viewer, or not.

Although the communication device may be a stand-alone device operating parallel to the set-top box, still, according to another embodiment of the invention, the communication device is adapted to be contained in a set-top box of a TV service provider. In other words, when the
5 set-top box is provided to the TV viewer (e.g. by the TV service provider) it already includes all or some of the functionalities described above for the communication device.

10 According to another aspect of the invention, there is provided a method for providing a viewer of a TV device a capability to display data at the TV device, which method comprises the steps of:

- at a first server, receiving from a
15 communication device associated with the TV device an indication denoting a request for data, wherein the communication device is operative to communicate wirelessly with the first server;

- establishing a communication path between
20 the communication device and a source for the provisioning of the requested data via the first server;

- forwarding requested data towards the communication device, and

- displaying at the TV device, signals received
25 from a TV source and signals comprising the requested data.

According to another embodiment of the invention, the communication device is operative to enable simultaneous display of the requested data and the TV
30 broadcasts at the screen of the TV set, e.g. in the form of two separated windows, a picture within a picture or any other way that is known in the art *per se*.

In accordance with another embodiment of the invention, the requested data being forwarded in a form

that would allow its integration with TV broadcasts that are being received at the communication device, in order to enable displaying the integrated signal which comprises the requested information and the broadcasted signal, at the TV device, and wherein when the integrated signal is displayed at the TV device, neither of the signals received from a TV source nor signals comprising the requested information, are displayed at the TV device.

According to another embodiment of this aspect of the invention, the method provided further comprising a step whereby the first server retrieves information which relates to the capabilities of the communication device, to enable forwarding information to the communication device in a format that is compatible with the capabilities of the communication device, and in a format that would allow integrating the information carrying signals with the TV broadcasted signals for displaying the integrated signals at the TV device.

According to an embodiment of the invention, the requested information is provided as an answer to an inquiry generated by the viewer of the TV device and is forwarded to the TV broadcasting provider via the communication device and along a path which is at least partially physically different from the path along which the TV broadcasts are received at the communication device. For example, if the TV broadcasted signals are conveyed via satellite, the communications exchanged between the TV viewer and the satellite service provider can be carried out at least partially along a link of a cellular network.

By still another embodiment, the requested information is a member of the group consisting of: an Internet application, office software, community

services, stored personal information, any combination thereof, and the like.

In accordance with yet another embodiment, the method provided further comprising a step of receiving an indication about the quality of TV broadcasted signals being received at the communication device for display at the TV device, and in case that the quality of the TV broadcasted signals is less than a pre-defined threshold, forwarding replacement signals towards the communication device. Preferably, the replacement signals are essentially a copy of the TV broadcasted signals having a better signal quality.

By yet another embodiment, the method provided further comprises a step of creating a virtual client entity at the first server, wherein the virtual client entity represents the TV viewer and is operative to allow retrieval of the requested data, and wherein the communication path is established between the communication device and a source for the provisioning of the requested data via the virtual client entity residing at the first server.

According to another aspect of the invention there is provided a computer program product encoding a computer program stored on a non-transitory computer readable storage medium for executing a set of instructions by a computer system comprising one or more computer processors for carrying out a process for receiving an indication from a communication device associated with a TV device, wherein that indication indicates a request of the TV viewer to be provided with requested information, establishing a communication path between the communication device and a source for the requested information via the first server, and forwarding requested information towards the

communication device. Preferably, the requested information is forwarded in a form that would allow its integration with TV broadcasts that are being received at the communication device, in order to enable displaying
5 an integrated signal which comprises the requested information and the broadcasted signal, at the TV device, either as one combined signal or in two separated windows simultaneously being displayed at the TV screen.

By still another embodiment of this aspect of the
10 invention, the process further comprises a step of creating a virtual client entity, wherein the virtual client entity is associated with the communication device and is operative to enable retrieval of the requested information.

15

Brief description of the Drawings

FIG. 1 - presents a schematic view of the system of the present invention

FIG. 2 - presents an example of an integrated
20 transmission displayed at the TV set.

FIG. 3 - presents a flow chart of an embodiment of the present invention; and

FIG. 4 - illustrates a flow chart of another embodiment for carrying out the present invention.

25

Detailed Description of the Invention

For a more complete understanding of the present invention, reference is made to the following detailed description taken in conjunction with the accompanying
30 drawings.

Let us first consider FIG. 1, which presents a schematic view of system 100 constructed in accordance with an embodiment of the present invention.

The TV set 140 is the device which the subscriber typically uses for receiving TV broadcasts, whether such broadcasts are made via satellite, over the air or even via cables. A communication device 120 is connected to the TV set, typically (but not necessarily) by using a wired connection. At times when the TV viewer does not wish to interact while using remote server 110, this communication device may preferably be used simply to convey TV broadcasts received at TV signals' receiver 130. Such TV signals' receiver may be a TV antenna that receives TV broadcasts over the air, a satellite/cable set-top box or a VCR/DVD and the like. As will be appreciated by those skilled in the art the communication device 120 may either be connected serially to TV signals' receiver 130 or one may be comprised within the other. Either one of these configurations should be understood to be encompassed by the present invention.

The communication device is wirelessly connected to a remote server 110 to allow reception of communications directed for the viewer of the TV set. The wireless connection is preferably made by utilizing existing mobile infrastructure. In the alternative, the connection may be done through landline infrastructure for example cables or phone line. In order to enable receiving of broadcasted TV signals at communication device 120 through any one or more of the means discussed above antenna/set-top box/VCR/DVD etc., the communication device may have according to the present example an analog inlet and/or a digital one. Upon receiving the broadcasted signals at the communication device 120, they are transferred to TV set 140 and displayed at the screen of the TV set. However, at times when an integrated signal is to be displayed at the screen of the TV set, the broadcasted signal is displayed together with another

communication signal, one that is transmitted towards the viewer of the TV set. The latter communication signal is also received at communication device 120 (e.g. via the wireless transceiver) and the integration of the two
5 signals could be done by any method known in the art per se, e.g. PIP (picture-in-picture), modulation, etc.

The non-broadcasted signals that are received from remote sever 110, may optionally comprise communications for enabling the provisioning of PC services to the TV
10 viewer. The term "PC services" as used herein refers to any service that a regular PC user can receive while using his/her own PC. For example: access to the Internet and to Internet based applications (e.g. instant messaging, e-mail, social networks, paying bills,
15 banking, general information sites, government sites, etc.), office services such as writing documents, editing pictures etc., community services like on-line schooling, filling surveys, participating in events, agriculture information and the like.

20 A non limiting example of an integrated signal being displayed at the screen of the TV set is illustrated in FIG. 2, According to an embodiment of the present invention the TV viewer is able to configure/change the size and the location of the "personal" window (210)
25 within the TV display (220) wherein the information received in the communication signal for that specific viewer, is displayed. In addition, according to a preferred embodiment of the present invention the TV viewer has a shortcut key (or a combination of keys (e.g.
30 Alt+Tab) at the user interface of the communication device enabling him/her to switch from having a display of one signal e.g. TV broadcast at a certain channel at TV (220), to the other signal e.g. to enable him/her to chat with a friend in the Internet (210).

Reverting now to FIG. 1, according to a preferred embodiment of the present invention, a user interface 150 is comprised in communication device 120 to enable receiving the viewer inputs. The user interface is preferably designed to allow communication between communication device 120 and user input device 150. The user input device can be a keyboard possibly with a built in mouse, a remote control, etc. and it is preferably, but not necessarily, connected wirelessly to communication device 120 e.g. by using Bluetooth technology, WiFi, IR or any other applicable wire or wireless technology. The TV viewer enters his/her inputs via the user interface 150, and these inputs are being transmitted to the remote server (110) via communication device (120). In response to the TV viewer input, the remote server (110) forwards communications towards the communication device (120) where they are integrated with the signal being broadcasted at the same time on a TV channel and the integrated signal is displayed at the screen of TV set (140), thus giving the TV viewer a full experience of a real PC, with or without the option to simultaneously view a TV broadcast. According to an embodiment of the present invention the communication device is also provided with a USB port (not shown in the Figure), and the remote server (110) is adapted to remotely activate any USB device (e.g. a memory stick) connected to the communication device, in the same manner as a regular PC activates the USB device. By this embodiment, the communication device 120 is further adapted to receive signals from the USB device and integrate them with the communications forwarded from the remote server.

As mentioned above, data connectivity in rural communities is proven to increase the social and

economical benefit, but many developing countries do not have the appropriate infrastructure. This, taken in conjunction with the fact that for many households the cost of a computer is too expensive, may explain why the masses in these countries remain disconnected from the rest of the developing world. The following example illustrates a potential immediate influence on the life quality of a commoner in one of such rural communities. Let us take for example a family in a small village in one of Africa's remote and isolated regions, where there is no school in the nearby vicinity and no landline phone. The family acquires the communication device of the present invention and connects it to a television set they purchased some 10 years ago. Even though the television is old and the only broadcasts that the family can watch is with their improvised antenna, the signal received from the antenna is conveyed via the communication device and can be integrated with other communications in a manner described above. Once the communication box is operative, the family is connected to the remote server and it may start using some of options available: the children of the family may start attending classes in an on-line school, they may surf the Internet and communicate with friends and family relatives from other villages, they may receive information from the government regarding new benefits of which they could not have information prior to their connecting of the communication device, they can do some of their banking activities instead of going to the bank at the nearby city (which could be rather far away from their house), and above all their motivation to learn increases as knowledge became something accessible like it had never been before.

FIG. 3 demonstrates another possible implementation of an embodiment of the present invention. By this example, for the simplicity of the description, all the services attributed in the preceding examples to be provided via the remote server, are provided in this example via the same server that provides satellite television broadcasts, and will be referred to in this example as the service provider server. In addition, the service provider set-top box comprises all the functionalities attributed in the previous examples to the communication device, although the service provider may also offer to old subscribers, a communication device that connects to their set-top box in the same way described above. In step 310, the system operates while the TV viewer watches a soap opera on the television and at the same time has an open chat window with two of her friends. Suddenly the television broadcast is cut off (320). The TV viewer asks her friends, with whom she is still in a chat session, if their broadcast has also been cut off. When she is told that they are still watching the program, she sends a message (330) through the communication device (by using her user input device, e.g. a keyboard) to the service provider server, enquiring why she is unable to continue watching the broadcast. In response she receives a failure message from the service provider server (340) that due to bad weather conditions, the satellite broadcasts in her neighborhood has been disrupted. This message is received from the service provider server along a path used for conveying communications to the user, such as the chat messages with her friends. Since this communication is exchanged between the TV user and the service provider along a path that is different from the one used for broadcasting (i.e. via the satellite), for example a path

that extends at least partially along a cellular network, as this connection is not influenced by the satellite broadcasting mishap. Upon sending the failure message, the service provider server also sends to the TV viewer
5 the broadcasting schedule (350) for TV programs that are available on the Internet, so when the user chooses one of the programs, say the soap opera that was interrupted, the service provider server uploads the selected program and transmits it to the user's communication device and
10 from there to the TV set (360), through the cellular network. According to another embodiment of the present invention the service provider server is capable of determining if the quality of the TV signal being broadcasted is too low, and upon determining that this is
15 the case, to automatically start sending the requested program through the cellular network and towards the communication device/enhanced set-top box.

By this embodiment, the use of the communication device enables the TV viewer to send messages towards the
20 satellite service provider, and enables the TV viewer to receive uni-cast messages/video from the satellite service provider at his/her TV set, that are transmitted even along at least partially different path, which may even comprise links that extend through other media such
25 as a cellular network, a cable network or a wire network.

As will be appreciated by those skilled in the art, the example above illustrates a certain way for implementing the present invention. However, similar examples may be devised when the remote server and the
30 satellite service provider are two separate entities.

Now, let us consider FIG. 4 which illustrates a block diagram of an embodiment of the method according to the present invention. The first step (410) is transmitting an indication, a query or a command from a

user device that is connected either by wire (e.g. by a cable connected keyboard) or wirelessly (e.g. a remote control) to the communication device. The indication/command/query is then transmitted towards the remote server, indicating that the TV viewer wishes to receive a service as provided by the present invention (e.g. to receive Video on Demand (VOD) service), or wishes to pose a query to his/her TV provider. Next, the indication is received at the remote server (420). Preferably, the communication device maintains its connection with the first server for as long as the TV set is turned on, and whenever the TV viewer turns the TV on after having it turned off, the connection may be restored automatically.

The user of the TV set is then provided with a menu that is integrated by the communication device with the TV broadcast and displayed (e.g. in a small size window) onto the display of the TV screen (430). The menu presented, comprises a plurality of options enabling the provisioning of PC services to the TV viewer. The menu is presented in a user friendly way that allows the user eventually to choose which PC service he would like to use (e.g. instant messaging, e-mail, social networks, paying bills, banking, general information sites, government sites, writing documents, editing pictures, on-line schooling, filling surveys, participating in events, agriculture information and more. Information relating to the option selected by the TV viewer reaches the communication device and is then transmitted therefrom towards the first server (step 440) that will be responsible for complying with the option specified by the user's selection in step 430. The method described in this example may further optionally include an identifying step (425). Preferably, prior to sending the

indication for the first time, the user has registered as a user who is qualified to receive the service according to the present invention, and once registered - his/her personal information, identification details, personal PC settings etc. are stored in a database managed by the service provider (the identification step can be in any method that is known in the art per se). Once the user has been identified, the system (i.e. either at the first server, or the user's own communication device or at another system management server) becomes aware of the access permissions to which the user is allowed and the memory space assigned to that user.

In addition, the operating system of the communication device may be provided with one or more adds-on, such as certain graphical elements, e.g. animations, etc., but preferably not with client applications themselves. The advantage of having such adds-on is to reduce the load on the communication link extending between the communication device and the remote server. By this embodiment, these elements are stored at a memory of the communication device itself as the capacity required for storing such a graphical representation is typically about 5K whereas the memory required to store for example a Java client application is 128K. If indeed a library of graphical elements is stored at the communication device, then in response to the selection of the preferred option made by the user, the virtual client entity will instruct the operating system of the communication device, which image must be pulled from the memory and integrated with the broadcasted signal. In addition, if the process requires that icon(s) be incorporated, such icons may also be pulled from the communication device's graphical library (if stored) or be transmitted to the communication device

from the remote server, as the case may be. In the alternative, the graphical elements may be provided by the service provider upon a suitable request that would be initiated by the virtual client entity.

5 Let us now consider another embodiment of the invention, by which once the indication that is received at the remote server in step 420, a virtual managing client entity is generated (425) thereat. Thereafter, the virtual managing client entity is responsible for the
10 management of the non-broadcasted exchange of communications with the TV viewer. Preferably, the communication device maintains its connection with the virtual managing client entity for as long as the TV set is turned on. Whenever the TV viewer turns the TV on
15 after having it turned off, the connection may be restored automatically.

 Upon generating the virtual managing client entity and associating it with the communication device, the user of the TV set is provided with a menu as described
20 above in step 430. Information relating to the option selected by the TV viewer reaches the communication device and in this case is then transmitted towards the virtual managing client entity which initiates the generation of a virtual temporary client entity (step
25 445) that will be responsible for complying with the option specified by the user's selection in step 430. Since the virtual temporary client entity is an ad hoc entity generated for that specific session, once the session is terminated, the virtual temporary client
30 entity would cease to exist.

 It is to be understood that the above description only includes some embodiments of the invention and serves for its illustration. Numerous other ways of carrying out the disclosure provided by the present

invention may be devised by a person skilled in the art without departing from the scope of the invention, and are thus encompassed by the present invention.

Claims

1. A communication device adapted to enable a TV viewer to transmit signals, wherein said communication device comprising:

5 a user interface adapted to receive input signal from said TV viewer;

a transceiver adapted to communicate wirelessly with a service provider via a remote server; and

10 a TV interface adapted to allow forwarding of signals received from a TV source and of signals received from a service provider, towards a TV device of said TV viewer.

2. A communication device according to claim 1, further comprising an electronic mixer adapted to integrate signals received from said service provider via said transceiver with TV signals broadcasted from a TV source, wherein said TV interface is further adapted to allow forwarding said integrated signals.

20 3. A communication device according to claim 1, wherein said transceiver is further adapted to transmit a request inputted by said TV viewer towards said remote server to enable said TV viewer to receive information from said remote server.

25 4. A communication device according to claim 3, wherein said request comprises an indication for connecting the TV viewer to an Internet-based application residing at a second server.

30 5. A communication device according to claim 2, wherein said user interface is further adapted to receive signals conveyed by a user device, and wherein said electronic mixer is further adapted to integrate said signals

received from the user device with TV signals broadcasted from a TV source.

6. A communication device according to claim 5, wherein said transceiver further adapted to transmit signals received from said user device towards said remote server.

7. A communication device according to claim 1, further comprising storage means.

8. A communication device according to claim 7, wherein said electronic mixer is further adapted to integrate signals retrieved from said storage means with TV signals broadcasted from a TV source.

9. A communication device according to claim 1, further comprising a processor adapted to determine if a quality of said TV signals being broadcasted from a TV source is less than a pre-defined threshold, and if in the affirmative, initiating conveyance of replacement signals for said low quality TV signals towards said communication device via said remote server.

10. A communication device according to claim 1 and being adapted to be integrated in a set-top box of a TV service provider.

11. A method for providing a viewer of a TV device with a capability to display requested information at said TV device, which method comprises the steps of:

-at a first server, receiving from a communication device associated with said TV device an indication that indicates a request to be provided with information,

wherein said communication device is operative to communicate wirelessly with said first server;

-establishing a communication path between said communication device and a source for said requested

5 information via said first server;

-forwarding requested information towards said communication device, and

-enabling a display at said TV device of signals received from a TV source and of signals comprising said requested

10 information.

12. A method according to claim 11, wherein the requested information being forwarded in a form that would allow its integration with TV broadcasts that are

15 being received at said communication device, in order to

enable displaying the integrated signal which comprises the requested information and the broadcasted signal, at said TV device, and when said integrated signal is

displayed at said TV device, neither of the individual

20 signals received from a TV source nor signals comprising

said requested information, are displayed at said TV device.

13. A method according to claim 11, further comprising a

25 step whereby said first server retrieves information

which relates to the capabilities of said communication

device, to enable forwarding information to said

communication device in a format that is compatible with the capabilities of said communication device.

30

14. A method according to claim 11, wherein the requested information is a response to an inquiry

generated by the viewer of the TV device forwarded to the

TV broadcasting provider via said communication device

and along a path which is at least partially physically different from the path along which the TV broadcasts are received at said communication device.

5 15. A method according to claim 11, wherein at least a part of the path along which said requested information is conveyed towards said communication device is a wireless link of a wireless network.

10 16. A method according to claim 11, wherein the requested information is a member of the group consisting of: an Internet application, office software, community services, stored personal information.

15 17. A method according to claim 11, further comprising a step of receiving an indication which relates to a quality at which a TV broadcasted signal being received at the communication device for display at the TV device, and in case that the quality of said TV broadcasted
20 signals is less than a pre-defined threshold, forwarding replacement signals towards said communication device.

18. A method according to claim 17, wherein said replacement signals are essentially a copy of the TV
25 broadcasted signals having a better signal quality.

19. A method according to claim 11, further comprising a step of creating a virtual client entity at the first server, wherein said virtual client entity represents the
30 TV viewer and is operative to allow retrieval of the requested data, and wherein said communication path is established between the communication device and a source for the provisioning of the requested data via said virtual client entity residing at the first server.

20. A computer program product encoding a computer program stored on a non-transitory computer readable storage medium for executing a set of instructions by a computer system comprising one or more computer
5 processors for carrying out a process for receiving an indication from a communication device associated with a TV device, wherein that indication indicates a request of the TV viewer to be provided with requested information, enabling retrieval of the requested information,
10 establishing a communication path between the communication device and a source for the requested information via entity remote server, and forwarding requested information towards the communication device.

15 21. A computer program product according to claim 20, and wherein the requested information being forwarded in a form that would allow its integration with TV broadcasts that are being received at said communication
device, in order to enable displaying the integrated
20 signal at the TV device.

22. A computer program product according to claim 20, and wherein the process further comprises a step of creating a virtual client entity, wherein the virtual client
25 entity is associated with the communication device and is operative to enable retrieval of the requested information.

1/2

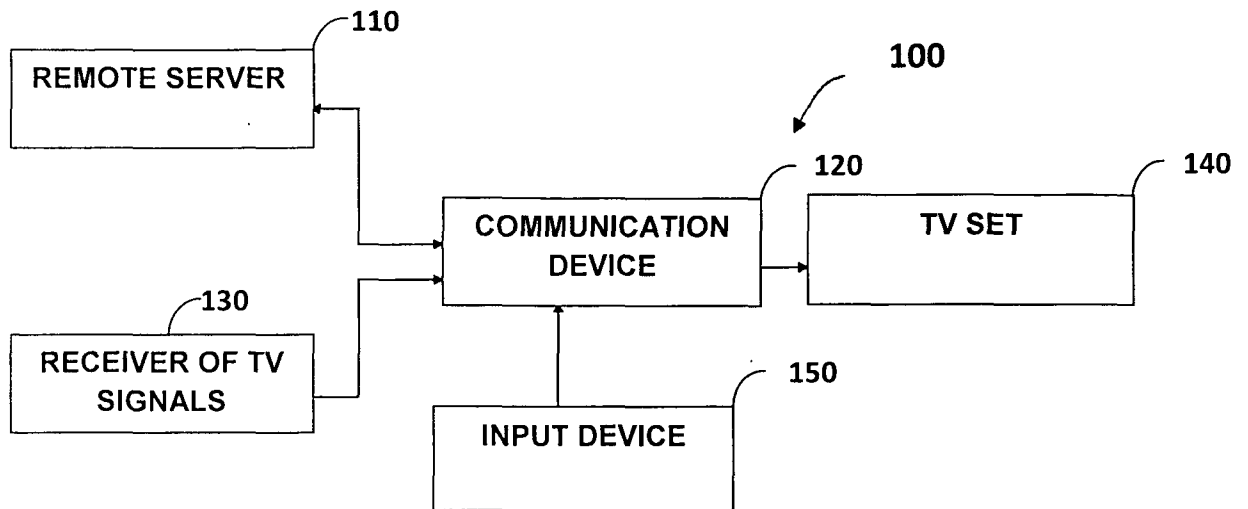


FIG. 1

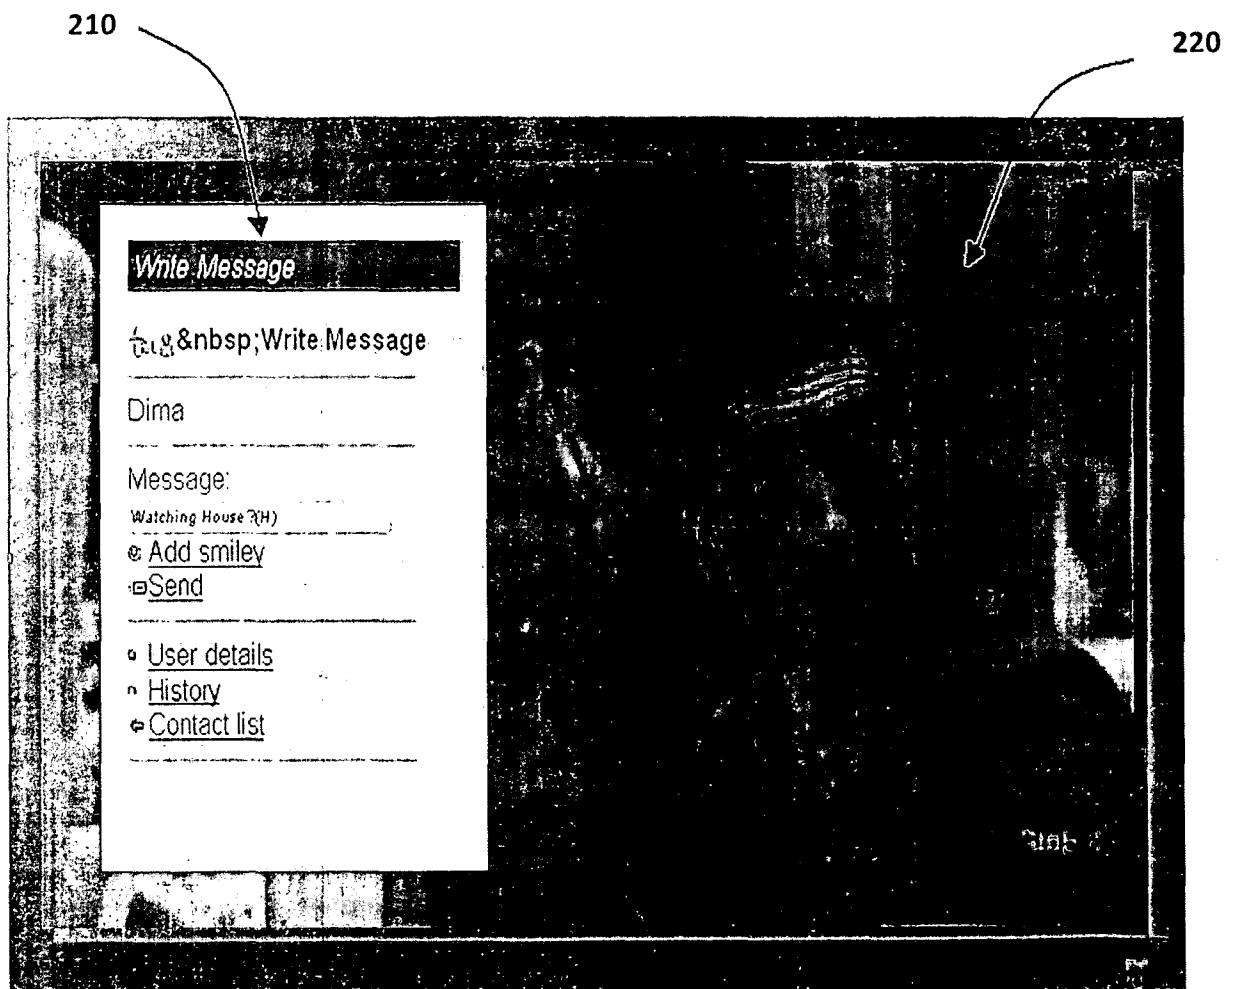


FIG. 2

2/2

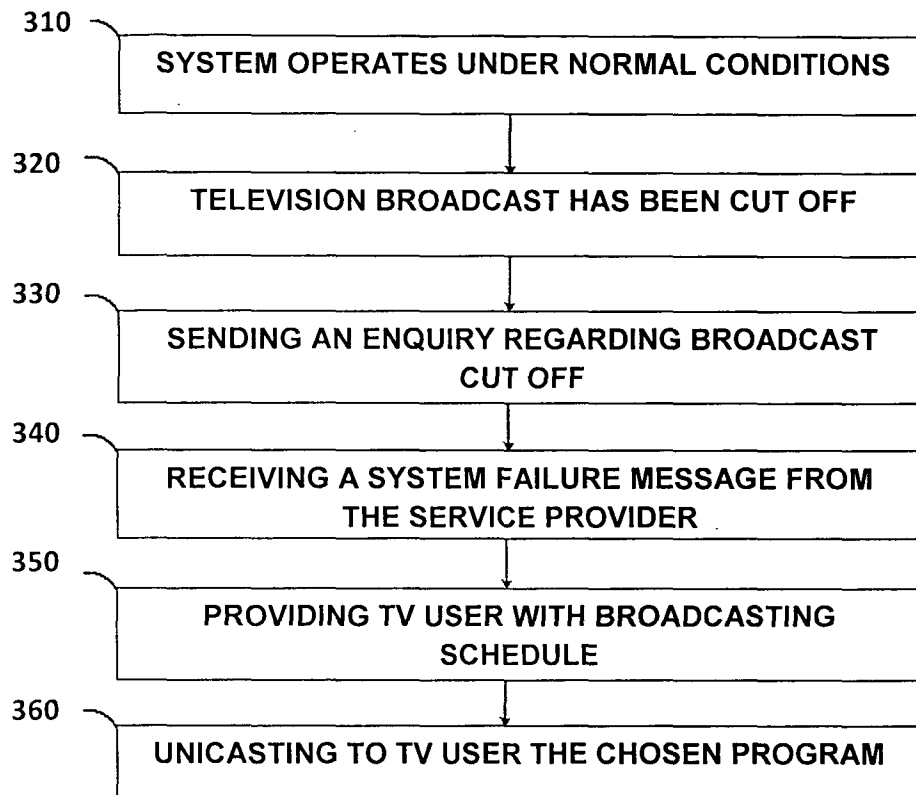


FIG. 3

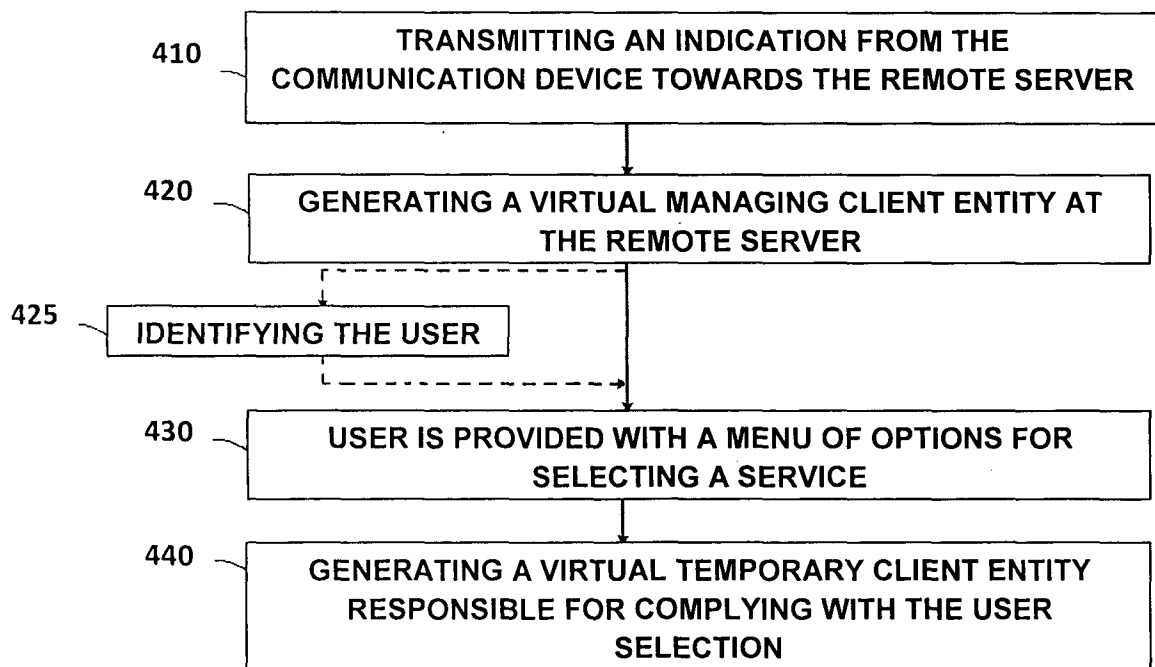


FIG. 4