

(12) **United States Patent**
Evans et al.

(10) **Patent No.:** **US 10,220,969 B2**
(45) **Date of Patent:** **Mar. 5, 2019**

(54) **DIRECT TO CONTAINER SYSTEM WITH ON-LINE WEIGHT CONTROL AND ASSOCIATED METHOD**

(71) Applicant: **Altria Client Services LLC**,
Richmond, VA (US)

(72) Inventors: **James D. Evans**, Chesterfield, VA (US); **Herbert Cary Longest**, Midlothian, VA (US); **Tamika S. Murrell**, Richmond, VA (US); **Robert V. Powell, Jr.**, Richmond, VA (US); **Jeremy Straight**, Midlothian, VA (US); **Jarrod Chalkley**, Mechanicsville, VA (US)

(73) Assignee: **Altria Client Services LLC**,
Richmond, VA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 652 days.

(21) Appl. No.: **13/967,181**

(22) Filed: **Aug. 14, 2013**

(65) **Prior Publication Data**
US 2014/0047804 A1 Feb. 20, 2014

Related U.S. Application Data
(60) Provisional application No. 61/683,034, filed on Aug. 14, 2012.

(51) **Int. Cl.**
B65B 5/10 (2006.01)
B65B 1/24 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **B65B 5/101** (2013.01); **B65B 1/24** (2013.01); **B65B 1/46** (2013.01); **B65B 5/061** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC B65B 5/101; B65B 5/08; B65B 5/061; B65B 1/24; B65B 1/46; B65B 29/00;
(Continued)

(56) **References Cited**
U.S. PATENT DOCUMENTS
2,395,898 A 3/1946 Mohr
2,669,813 A 2/1954 Irmscher
(Continued)


FOREIGN PATENT DOCUMENTS
DE 1024006 B 2/1958
EP 1415919 A1 5/2004
(Continued)

OTHER PUBLICATIONS
International Preliminary Report on Patentability of International Application No. PCT/US2013/054979 dated Feb. 26, 2015.
(Continued)

Primary Examiner — Thanh Truong
Assistant Examiner — Thomas Wittenschlaeger
(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, P.L.C.

(57) **ABSTRACT**
Systems and methods for manufacturing and inserting a pre-determined number of material-filled pouches into containers are disclosed. A system includes a pouch providing system comprising a plurality of lanes, wherein each one of the plurality of lanes includes a pouch making machine and a hold-back structure. The system also includes a conveyor system structured and arranged to move a plurality of containers into alignment with the plurality of lanes. The system further includes a controller structured and arranged to control the hold-back structure in each one of the plurality of lanes such that the pre-determined pouches are inserted into the plurality of containers when the plurality of containers are aligned with the plurality of lanes.

24 Claims, 12 Drawing Sheets

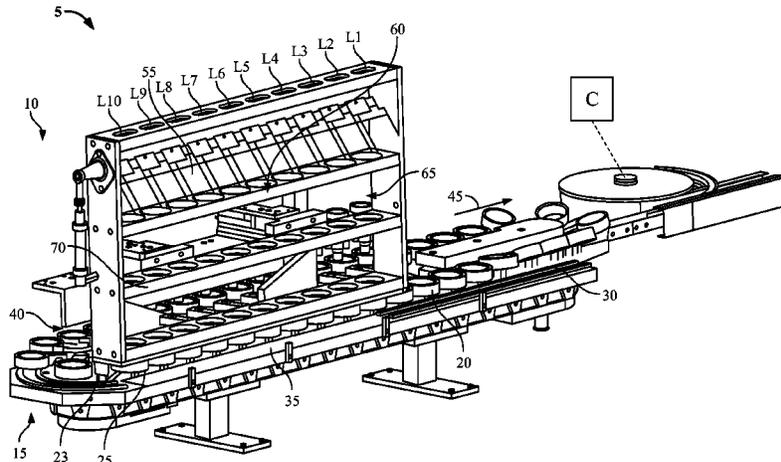

(51)	Int. Cl.		4,703,765 A *	11/1987	Paules	B65B 1/36
	<i>B65B 29/00</i>	(2006.01)				131/112
	<i>B65B 35/30</i>	(2006.01)	4,887,411 A *	12/1989	Rondeau	G05D 9/12
	<i>B65B 39/00</i>	(2006.01)				141/95
	<i>B65B 43/54</i>	(2006.01)	5,762,116 A *	6/1998	Moore	B65B 5/103
	<i>B65B 65/00</i>	(2006.01)				141/145
	<i>B65B 1/46</i>	(2006.01)	5,806,287 A *	9/1998	Trechsel	G01G 15/001
	<i>B65B 5/06</i>	(2006.01)				177/52
	<i>B65B 5/08</i>	(2006.01)	5,822,949 A *	10/1998	Naoi	B65B 9/213
	<i>B65B 37/10</i>	(2006.01)				53/546
	<i>B65B 9/20</i>	(2012.01)	6,516,939 B1	2/2003	Schmidt et al.	
			6,715,518 B2	4/2004	Finkowski et al.	
			7,032,743 B2	4/2006	Vorsteher et al.	
(52)	U.S. Cl.		2002/0046551 A1*	4/2002	Tisma	B65B 43/60
	CPC	<i>B65B 5/08</i> (2013.01); <i>B65B 29/00</i>				53/506
		(2013.01); <i>B65B 35/30</i> (2013.01); <i>B65B</i>				
		<i>39/007</i> (2013.01); <i>B65B 43/54</i> (2013.01);				
		<i>B65B 65/006</i> (2013.01); <i>B65B 9/20</i> (2013.01);				
		<i>B65B 37/10</i> (2013.01); <i>B65B 2220/18</i>				
		(2013.01)	2004/0020554 A1	2/2004	Smith et al.	
			2005/0217208 A1*	10/2005	Cicognani	B65B 5/08
						53/54
			2007/0062159 A1	3/2007	Medina et al.	
			2009/0113847 A1	5/2009	Monti	
			2009/0120828 A1	5/2009	Sanfilippo et al.	
			2009/0165425 A1	7/2009	Medina et al.	
			2009/0288375 A1*	11/2009	Pagani	B65B 1/08
						53/525
(58)	Field of Classification Search		2010/0059069 A1*	3/2010	Boldrini	B65B 1/363
	CPC	B65B 35/30; B65B 35/32; B65B 39/007;				131/112
		B65B 65/006; B65B 43/54; B65B 37/10;				
		B65B 2220/18; B65B 9/20				
	USPC	53/546, 170, 171, 202, 551, 152, 153,	2010/0101189 A1*	4/2010	Boldrini	B65B 1/16
		53/154, 449, 451, 443, 247, 248, 250,				53/451
		53/253, 260, 502	2010/0115886 A1*	5/2010	Takayama	B65B 5/061
						53/147
	See application file for complete search history.		2010/0133066 A1*	6/2010	Bassini	B65B 5/08
						198/460.1
(56)	References Cited		2011/0173933 A1	7/2011	Maheshwari et al.	

U.S. PATENT DOCUMENTS

2,712,408 A	7/1955	Weber	
2,851,063 A	9/1958	Leinhart	
2,901,209 A *	8/1959	Bardy	B65B 1/46
			141/144
3,206,062 A	9/1965	Rappaport	
3,357,155 A	12/1967	Carruthers	
3,424,209 A *	1/1969	Di Settembrini	B65B 43/54
			141/168
3,476,037 A	11/1969	Gorby	
3,484,813 A	12/1969	Davies	
3,490,391 A	1/1970	Vogt	
3,994,321 A *	11/1976	Eisenberg	B65B 39/145
			141/1
4,098,055 A	7/1978	Calvert	
4,363,204 A	12/1982	Ohude et al.	
4,494,582 A *	1/1985	Meyer	B65B 1/46
			141/100

FOREIGN PATENT DOCUMENTS

EP	2129581 B1	8/2013
FR	2666047 A1	2/1992
WO	02051704 A1	7/2002

OTHER PUBLICATIONS

International Search Report of International Application No. PCT/US2013/054979 dated Dec. 6, 2013.
 European Search Report of European Application No. 13751073 dated Oct. 11, 2016.
 Office Action; Communication pursuant to Article 94(3) EPC, issued in European Patent Application No. 13751073.1, dated Sep. 26, 2017.

* cited by examiner

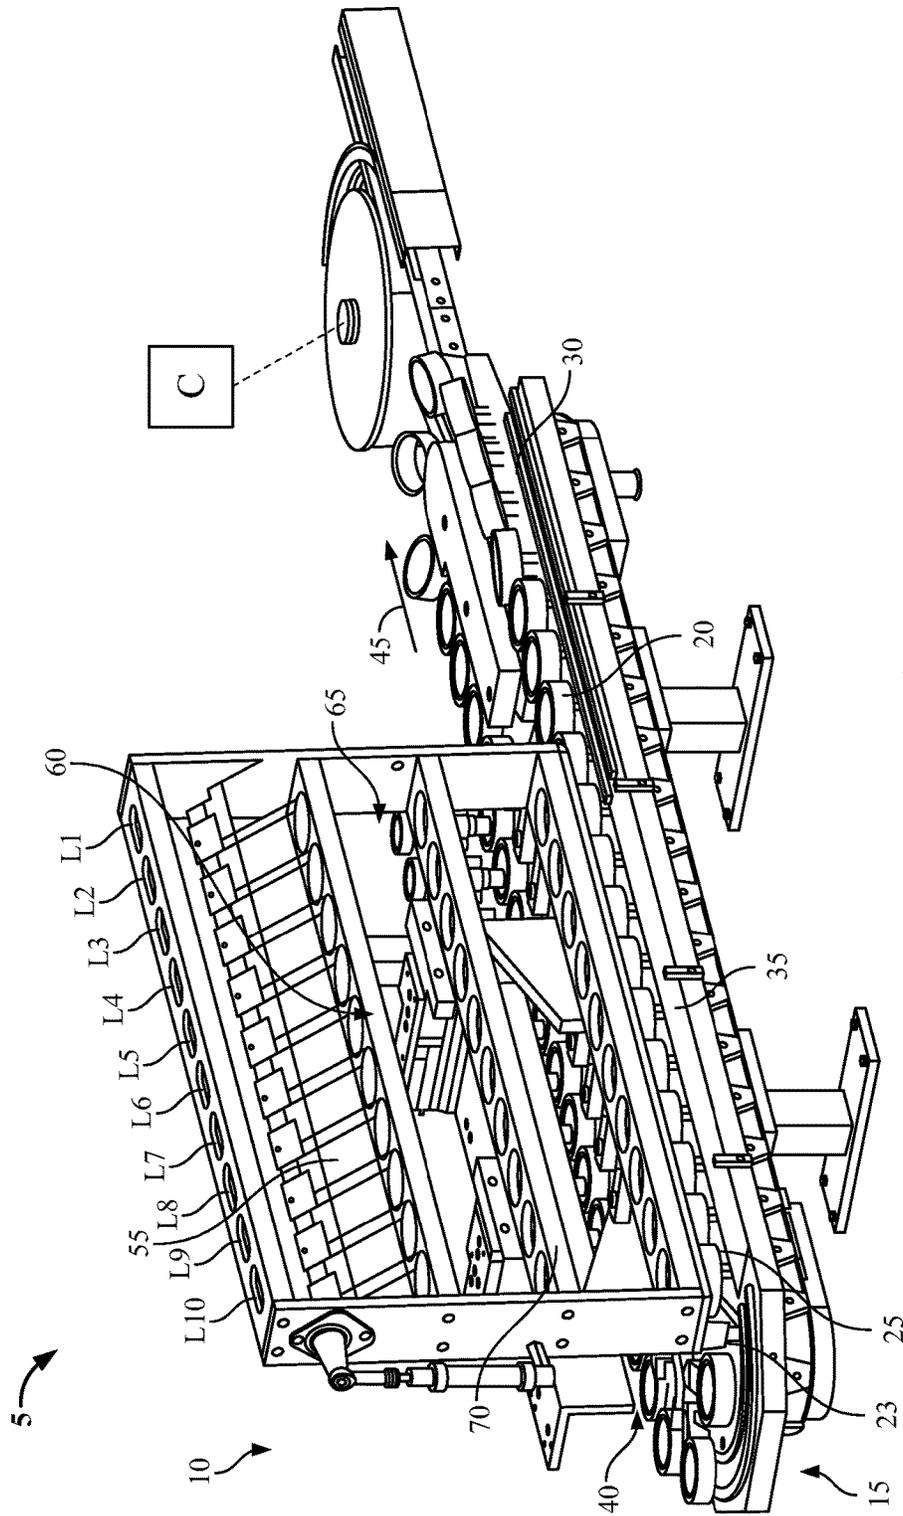


FIG. 1A

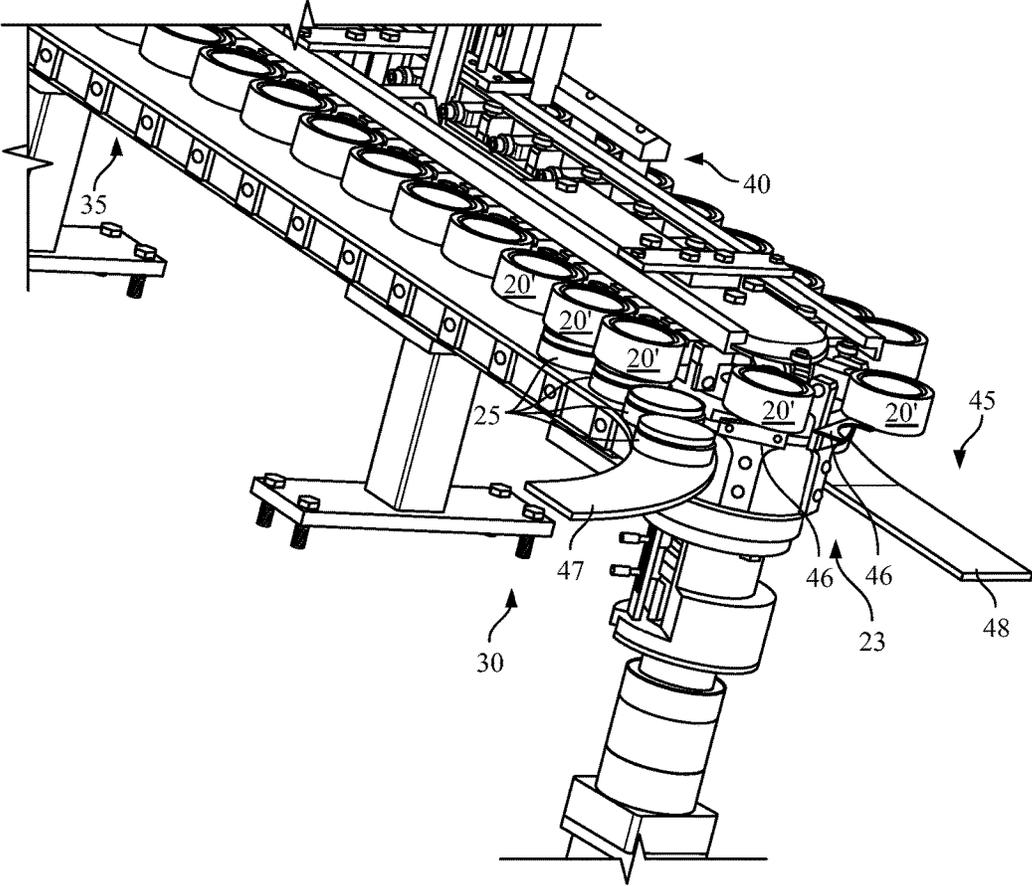


FIG. 1B

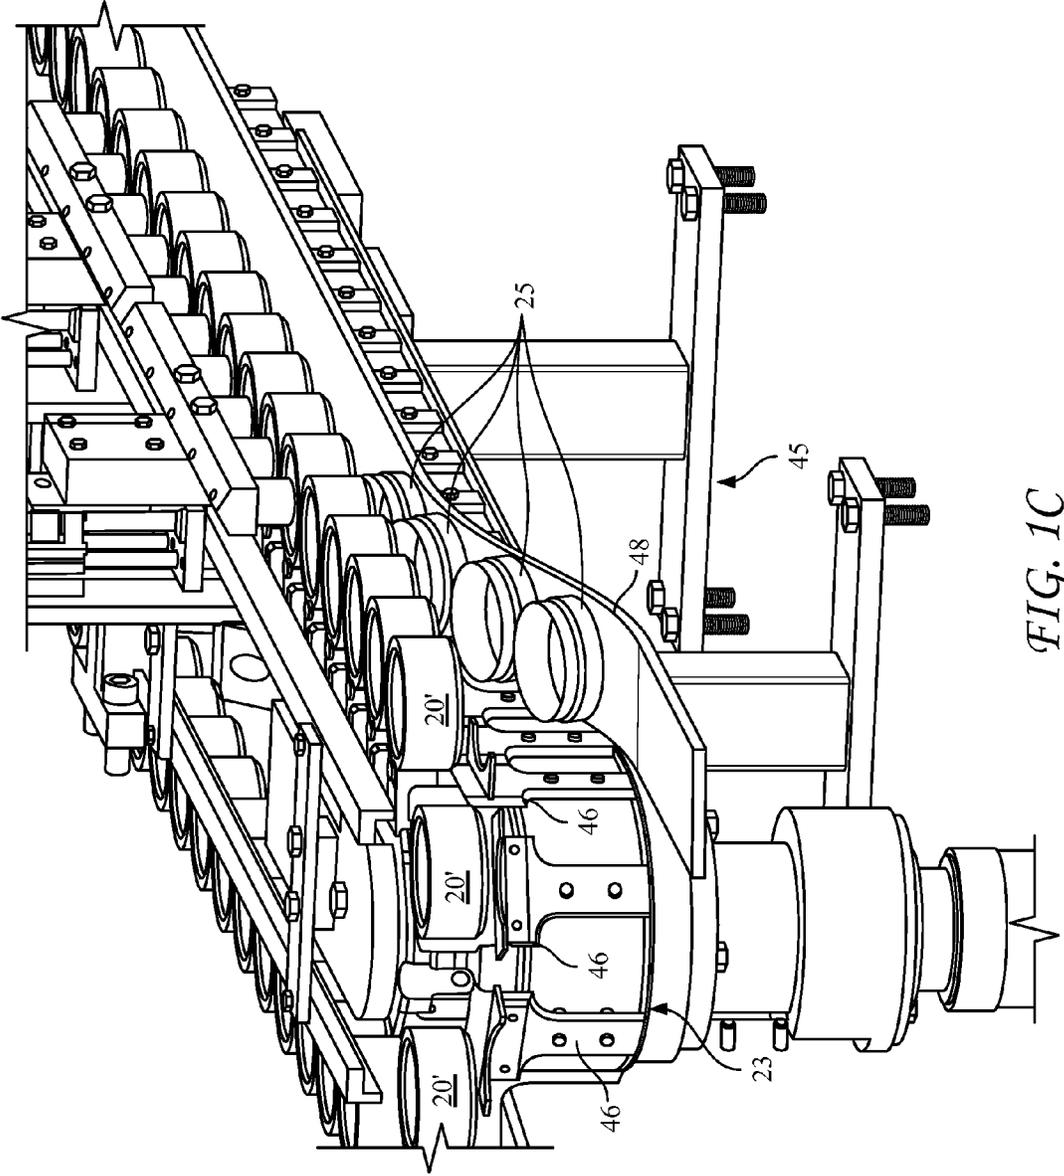


FIG. 1C

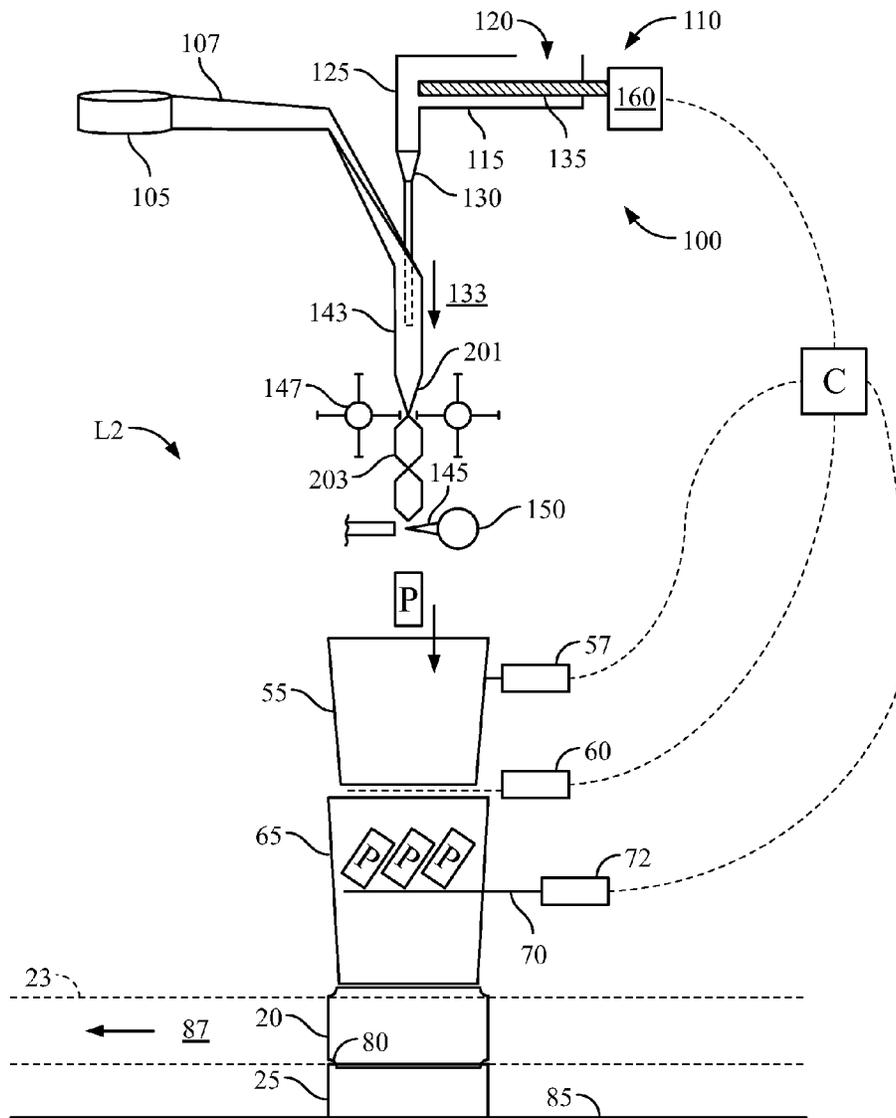


FIG. 2

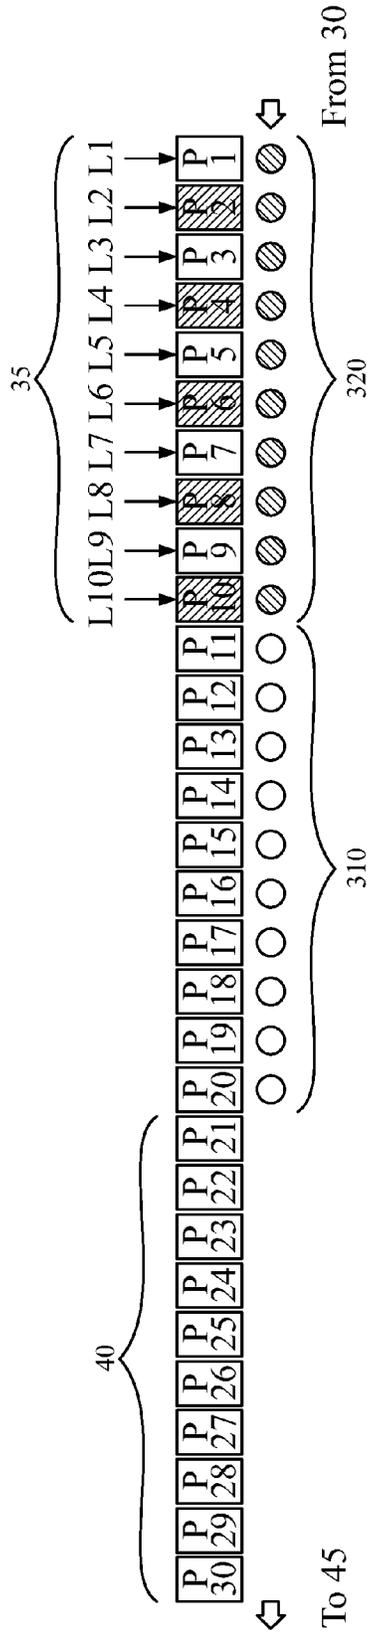


FIG. 5

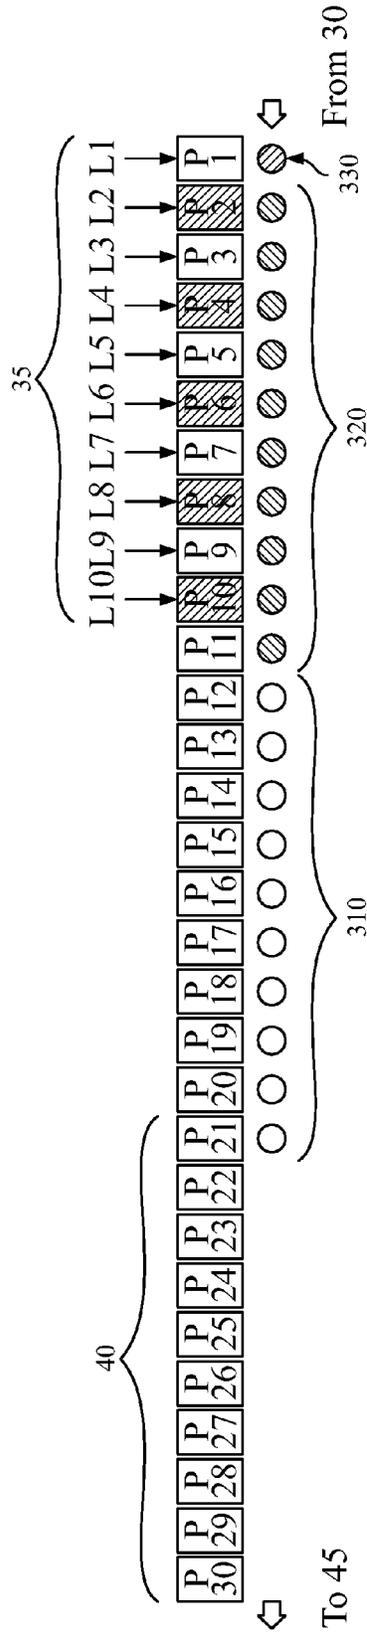


FIG. 6

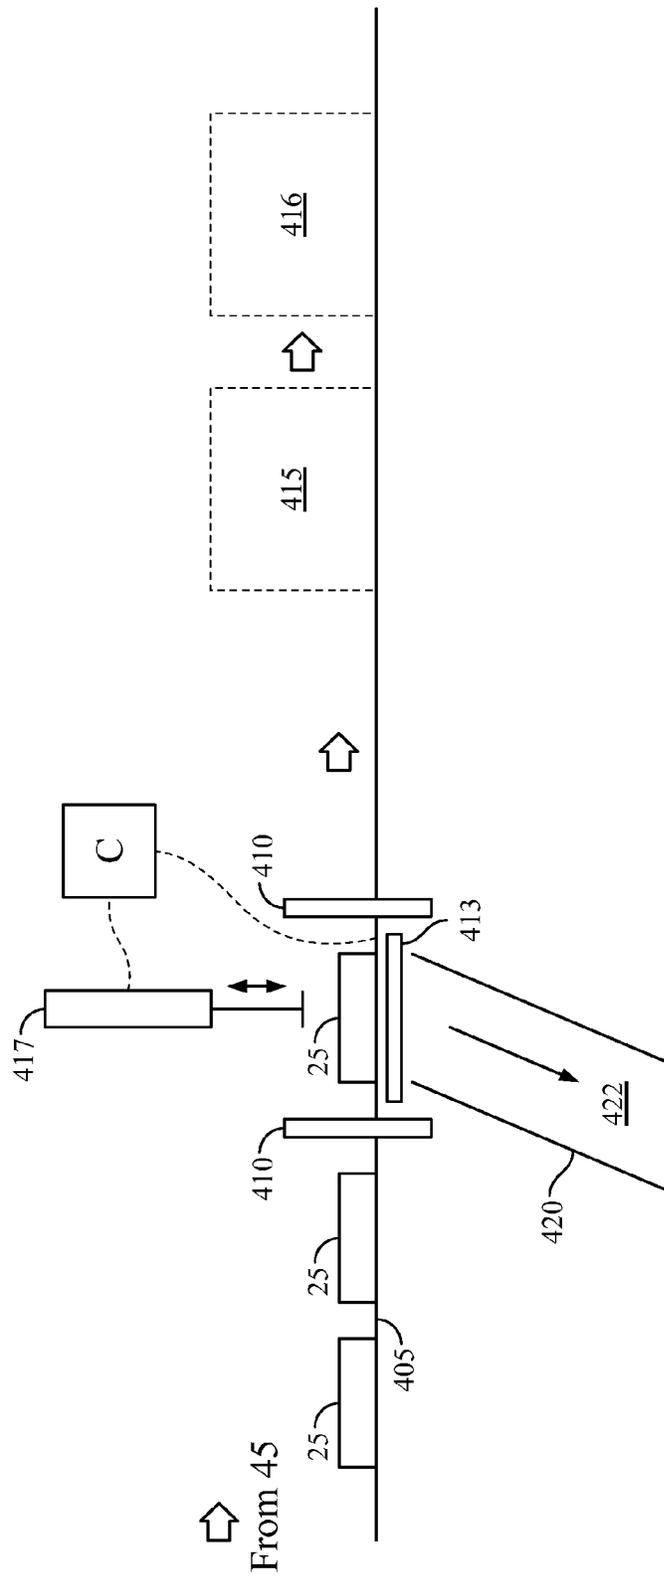


FIG. 9

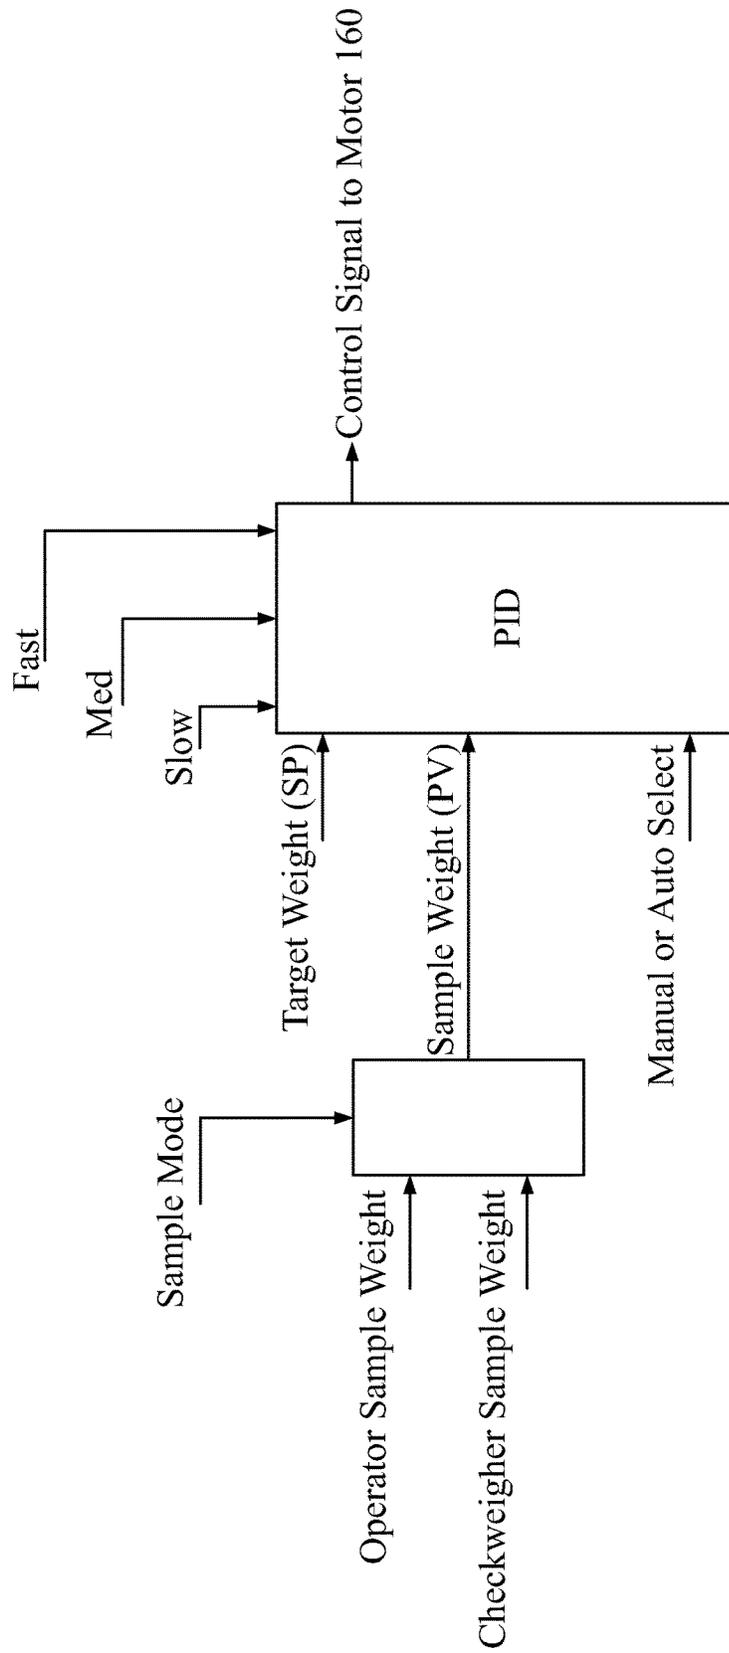
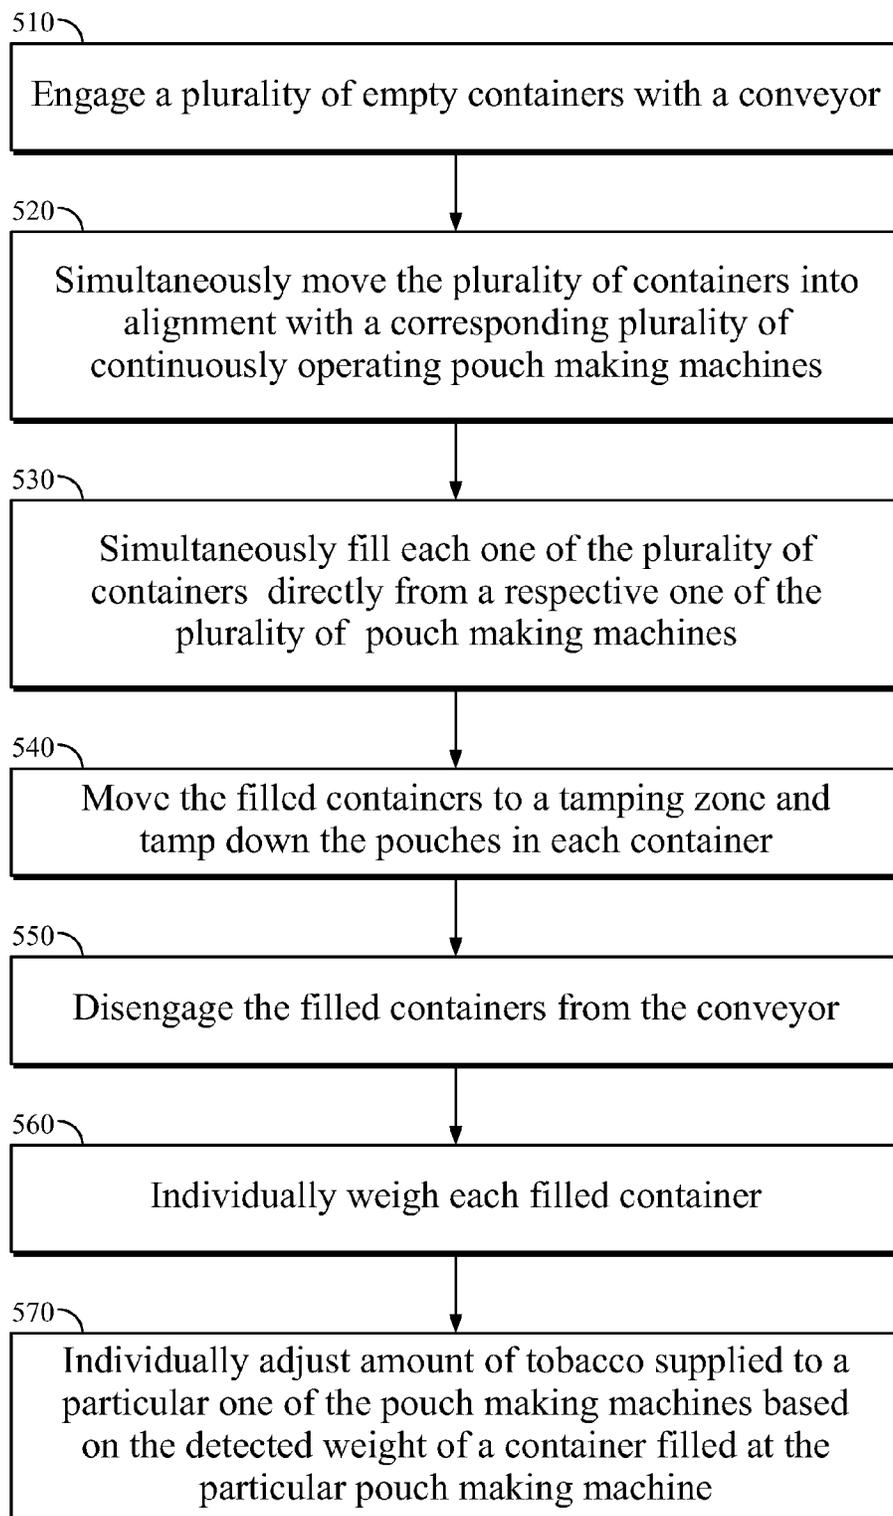


FIG. 10

*FIG. 11*

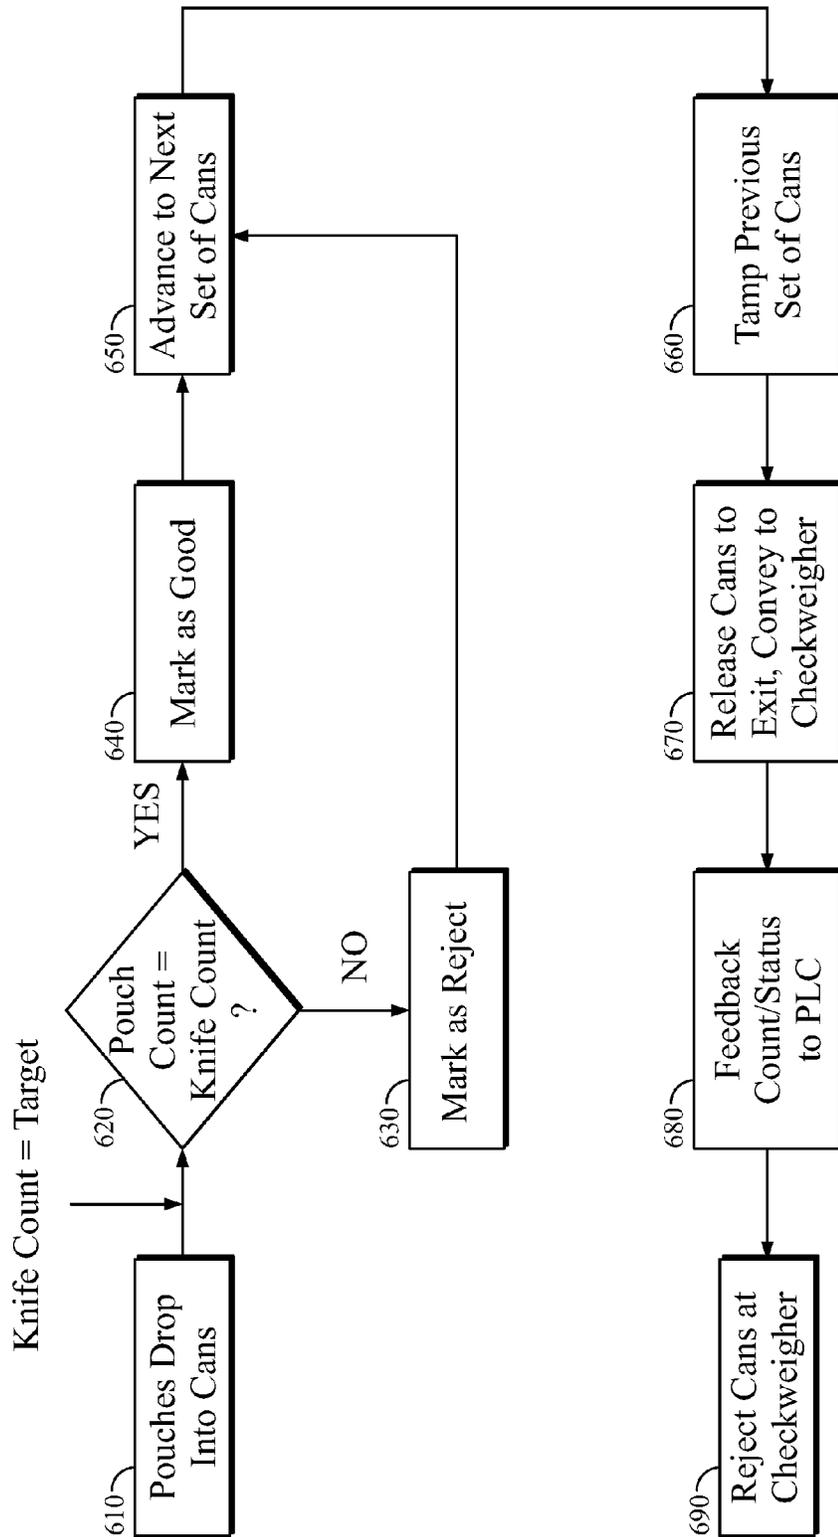


FIG. 12

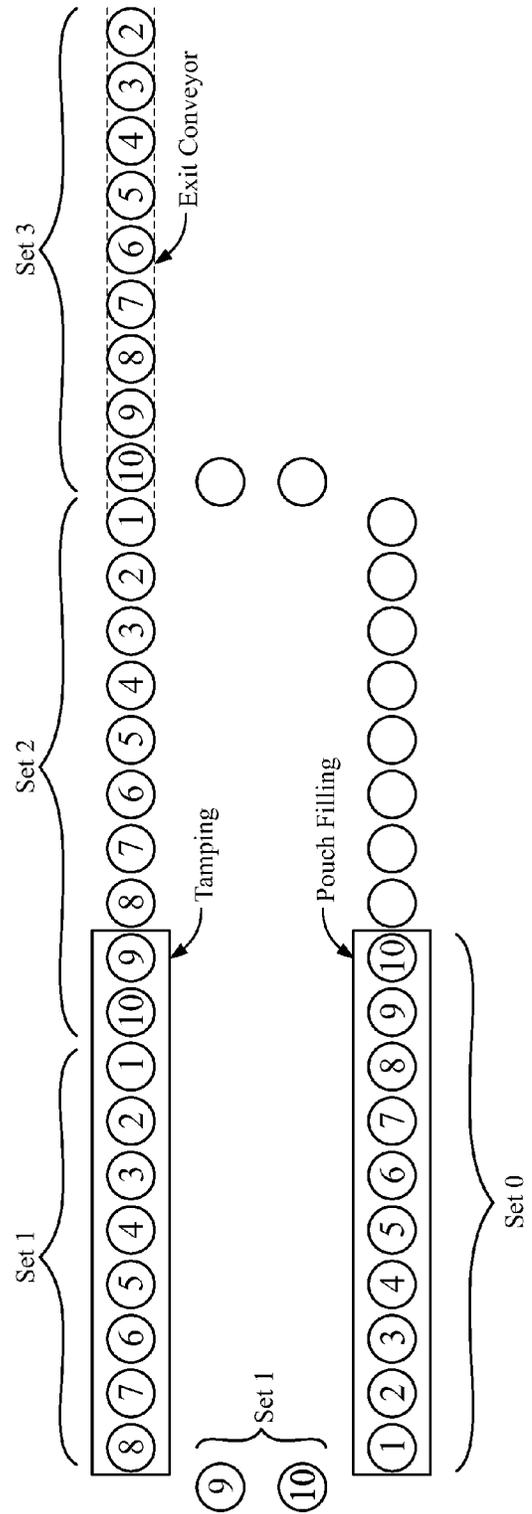


FIG. 13

1

DIRECT TO CONTAINER SYSTEM WITH ON-LINE WEIGHT CONTROL AND ASSOCIATED METHOD

RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application Ser. No. 61/683,034, filed on Aug. 14, 2012, the contents of which are hereby incorporated by reference in their entirety.

FIELD

This disclosure relates generally to systems and methods for filling containers with units of smokeless tobacco and, more particularly, to manufacturing and inserting pouches of smokeless tobacco into containers in a continuous operation with on-line weight control.

SUMMARY

Various forms of smokeless tobacco, including pouched smokeless tobacco (snus) are provided to the consumer in a lidded cylindrical container (e.g., a can) composed of metal, paperboard or plastic. Pouched snus may comprise an amount of tobacco encased in a paper case.

Heretofore, a large number of pouches were manufactured by plural pouch-making lanes and/or machines (e.g., pouchers) whose outputs were deposited together (e.g., co-mingled) in an intermediate holding bin. Such comingling can confound quality control. For example, with comingling, it may become impossible to determine which one of many pouchers caused a particular can to be over or under weight.

In accordance with aspects disclosed herein, there is a system and method for filling cans with pouches directly from a pouch-making machine, weighing the filled cans, and selectively adjusting the pouch-making machine based on the weighing. In embodiments, the system comprises a pouch-making machine having plural vertically-oriented lanes, each of which individually manufactures pouches filled with smokeless tobacco and inserts the pouches into a container (e.g., can) that may be sold to a consumer. Each lane may comprise an individual poucher and a transfer structure that guides completed pouches into a can positioned in the lane. The system may comprise a conveyor that controllably moves cans into alignment with the transfer structures of the plural lanes where each can is individually filled with pouches directly from a respective one of the lanes. In embodiments, the conveyor moves the filled cans to a tamping station and simultaneously moves a new set of empty cans into alignment with the transfer structures of the plural lanes. The system may incorporate a controllable hold-back structure in each of the transfer structures so that pouches may be continuously made even during movement of the cans by the conveyor. The system may also incorporate one or more sensors in each lane to accurately count the number of pouches inserted into each can.

In accordance with additional aspects disclosed herein, each can is weighed individually after being filled with pouches. In embodiments, the system is structured and arranged to associate each can with a respective one of the lanes, and to maintain this association through the can-weighing process. When a particular can is determined to be over or under weight via the can-weighing process, the association between the can and a particular lane may be used to adjust at least one manufacturing parameter of the

2

lane. For example, the rate of tobacco being supplied to the poucher of a particular lane may be selectively increased or decreased based on the weighing of a can that was filled at that particular lane.

According to a first aspect, there is a system for manufacturing and inserting tobacco-filled pouches into containers. The system includes a pouch providing system comprising a plurality of lanes, wherein each one of the plurality of lanes comprises a pouch making machine and a hold-back structure. The system also includes a conveyor system structured and arranged to move a plurality of containers into alignment with the plurality of lanes. The system further includes a controller structured and arranged to control the hold-back structure in each one of the plurality of lanes such that pouches are inserted into the plurality of containers when the plurality of containers are aligned with the plurality of lanes.

According to another aspect, there is a method for manufacturing and inserting tobacco-filled pouches into containers. The method includes: engaging a plurality of containers with a conveyor system; simultaneously moving the plurality of containers into alignment with a corresponding plurality of pouch making machines; inserting pouches directly from respective ones of the plurality of pouch making machines into respective ones of the plurality of containers; individually weighing each one of the plurality of containers after the inserting; and adjusting a rate of tobacco supplied to a respective one of the plurality of pouch making machines based on the weighing.

BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects are further described in the detailed description which follows, in reference to the noted plurality of drawings by way of non-limiting examples of embodiments, in which like reference numerals represent similar parts throughout the several views of the drawings.

FIG. 1A shows an exemplary system for manufacturing and inserting smokeless tobacco pouches into containers in accordance herewith;

FIGS. 1B and 10 show an alternative embodiment of aspects of the system;

FIG. 2 shows an exemplary lane of the system of FIG. 1A;

FIGS. 3-8 illustrate an exemplary operation of the system of FIG. 1A;

FIG. 9 shows an exemplary on-line weighing system in accordance herewith;

FIG. 10 depicts a block diagram of a control scheme in accordance herewith;

FIG. 11 shows a flow diagram of a method in accordance herewith;

FIG. 12 presents a sequencing diagram for an embodiment of a system and method in accordance herewith; and

FIG. 13 depicts how the containers transition to different stations on the conveyor from machine startup.

DETAILED DESCRIPTION

Various aspects will now be described with reference to specific forms selected for purposes of illustration. It will be appreciated that the spirit and scope of the apparatus, system and methods disclosed herein are not limited to the selected forms. Moreover, it is to be noted that the figures provided herein are not drawn to any particular proportion or scale, and that many variations can be made to the illustrated forms. Reference is now made to FIGS. 1-11, wherein like numerals are used to designate like elements throughout.

Each of the following terms written in singular grammatical form: “a,” “an,” and “the,” as used herein, may also refer to, and encompass, a plurality of the stated entity or object, unless otherwise specifically defined or stated herein, or, unless the context clearly dictates otherwise. For example, the phrases “a device,” “an assembly,” “a mechanism,” “a component,” and “an element,” as used herein, may also refer to, and encompass, a plurality of devices, a plurality of assemblies, a plurality of mechanisms, a plurality of components, and a plurality of elements, respectively.

Each of the following terms: “includes,” “including,” “has,” “having,” “comprises,” and “comprising,” and, their linguistic or grammatical variants, derivatives, and/or conjugates, as used herein, means “including, but not limited to.”

Throughout the illustrative description, the examples, and the appended claims, a numerical value of a parameter, feature, object, or dimension, may be stated or described in terms of a numerical range format.

It is to be fully understood that the stated numerical range format is provided for illustrating implementation of the forms disclosed herein, and is not to be understood or construed as inflexibly limiting the scope of the forms disclosed herein.

Moreover, for stating or describing a numerical range, the phrase “in a range of between about a first numerical value and about a second numerical value,” is considered equivalent to, and means the same as, the phrase “in a range of from about a first numerical value to about a second numerical value,” and, thus, the two equivalently meaning phrases may be used interchangeably.

It is to be understood that the various forms disclosed herein are not limited in their application to the details of the order or sequence, and number, of steps or procedures, and sub-steps or sub-procedures, of operation or implementation of forms of the method or to the details of type, composition, construction, arrangement, order and number of the system, system sub-units, devices, assemblies, sub-assemblies, mechanisms, structures, components, elements, and configurations, and, peripheral equipment, utilities, accessories, and materials of forms of the system, set forth in the following illustrative description, accompanying drawings, and examples, unless otherwise specifically stated herein. The apparatus, systems and methods disclosed herein can be practiced or implemented according to various other alternative forms and in various other alternative ways.

It is also to be understood that all technical and scientific words, terms, and/or phrases, used herein throughout the present disclosure have either the identical or similar meaning as commonly understood by one of ordinary skill in the art, unless otherwise specifically defined or stated herein. Phraseology, terminology, and, notation, employed herein throughout the present disclosure are for the purpose of description and should not be regarded as limiting.

This disclosure relates generally to systems and methods for filling containers with units of smokeless tobacco and, more particularly, to manufacturing and inserting pouches of smokeless tobacco into containers in a continuous operation with on-line weight control. According to aspects disclosed herein, a system includes plural pouch making machines that operate continuously and in parallel.

A conveyor system may be structured and arranged to simultaneously move plural empty containers into alignment with the plural pouch making machines, such that the respective containers are simultaneously filled with pouches directly from respective ones of the pouch making machines. The position of each container may be tracked

throughout the entire system, and each container may be associated with the particular one of the pouch making machines from which it was filled. Each container may be weighed after being filled, and at least one operational parameter of the pouch making machine associated with the weighed container may be adjusted based on the weight of the container independent of the other pouch making machines.

FIG. 1A shows an exemplary system 5 for manufacturing and inserting pouches into containers in accordance herewith. In embodiments, the system 5 includes a direct-to-container pouch providing system 10 and a conveyor system 15. The pouch providing system 10 controls the movement of individual pouches into a plurality of containers from a plurality of pouch making lanes or machines. The conveyor system 15 moves the containers to positions in alignment with the lanes of the pouch providing system 10 such that the manufactured pouches are inserted from the pouch providing system 10 directly into the container without comingling of the pouches. As described herein, the pouches are filled with an amount of smokeless tobacco and the containers are preferably cylindrical, disc cans, which, when fully loaded, contain a predetermined number of the pouches and are intended to be sold to consumers, although implementations are not limited to use with tobacco and aspects described herein can be used with any article in which a predetermined number of the articles are to be packaged in a single container.

According to aspects described herein, the pouch providing system 10 includes plural lanes L1, L2, . . . , LN, each of which constitutes a separate avenue for pouches to be manufactured and inserted directly into containers. In the non-limiting illustrative embodiment shown in FIG. 1A, the pouch providing system 10 includes ten lanes (L1-L10), although any suitable number of lanes may be used in implementations (such as by way of example, five lanes). Moreover, some of the lanes L1-L10 may be active while other ones of the lanes are inactive. In the non-limiting illustrative embodiment described herein, five of the lanes are active (e.g., lanes L2, L4, L6, L8, and L10) and five of the lanes are inactive (e.g., lanes L1, L3, L5, L7, and L9), although any suitable number of active and inactive lanes (including zero inactive lanes) may be used in implementations. Referring now to FIGS. 1A and 2, each active lane may include a sampling structure 55, one or more count sensors 60, a transfer structure 65, and a hold-back structure (or comb) 70.

Still referring to FIG. 1A, the conveyor system 15 selectively moves containers into alignment with the lanes L1-L10 for receiving the pouches. In embodiments, the conveyor system 15 includes a plurality of funnel cups 20 attached to a moveable carousel 23. Movement and stopping of the carousel 23 may be achieved by one or more suitable motors and/or actuators, which may be controlled by a controller “C”. The carousel 23, when moving, preferably moves all of the funnel cups 20 simultaneously. In implementations, the conveyor system 15 is structured and arranged such that each funnel cup 20 engages an empty container 25 at an input station 30. The funnel cup 20 is structured and arranged such that the funnel cup 20 and container 25 move together when engaged. In this manner, the carousel moves the empty container 25 via the funnel cup 20 from the input station 30 to a filling zone 35 where the container is filled with a predetermined number of pouches. Similarly, the carousel moves the filled container 25 via the funnel cup 20 from the filling zone 35 to a tamping zone 40, and then moves the filled and tamped container 25

5

from the tamping zone **40** to an outlet **45** where the funnel cup **20** disengages the container **25**.

In the embodiment depicted in FIG. 1A, each funnel cup **20** is pivotally connected to the carousel. Specifically, each funnel cup **20** is pivoted slightly upward (e.g., relative to a substantially horizontal position the funnel cup **20** exhibits at the filling zone **35** and tamping zone **40**) as the funnel cup **20** is moved toward the outlet **45** to disengage the funnel cup **20** from the container **25**. The funnel cup **20** remains in the upward pivoted position as it moves between the outlet **45** and the input station **30**. The funnel cup **20** pivots downward to the substantially horizontal position at the input station **30**. The downward pivoting causes the funnel cup **20** to engage an empty container **25** at the input station. The upward and downward pivoting of each funnel cup **20** may be accomplished in any suitable manner, including but not limited to the use of cams, inclined surfaces, actuators, etc. In a preferred embodiment, a procession of open ended cans is directed unto the input station **30** via an inclined ramp or other feed mechanism.

In another embodiment shown in FIGS. 1B and 10, each funnel cup **20'** has an integrated carrier fork **46** structured and arranged to engage one of the containers **25** and to carry (e.g., movably guide) the container **25** through the filling zone **35** (e.g., for the receipt of pouches) and tamping zone **40**. These funnel cups **20'** are solidly mounted to the carousel **23** and do not pivot to engage the container. Instead, at the input station **30**, each container **25** is cammed up (or otherwise elevated) to the bottom of a respective funnel cup **20'** via a slight inclined ramp **47** that guides the bottom of the container **25** to a point where the carrier fork **46** moves into engagement with the exterior of the container **25**. Once engaged by the carrier fork **46**, the container **25** is guided through the filling zone **35** and tamping zone **40** by the carrier fork **46** instead of by contact with the bottom of the funnel cup **20'**. As shown in FIG. 10, upon reaching the outlet **45**, the container **25** is lowered away from the funnel cup **20'** via a slight declined ramp **48**. The carrier fork **46** of the funnel cup **20'** continues to push the container **25** until the container is engaged on a take-away conveyor that leads to a downstream station, such as the on-line weigh station described in greater detail below with respect to FIG. 9.

The embodiment of FIGS. 1B and 10 minimizes funnel movement and wear, and allows for minimal contact between the funnel cups **20'** and the containers **25**. This is advantageous for use with containers having internal coatings (such as paraffin wax) since, with minimal funnel cup contact, such coatings (e.g., wax) do not build up on funnel that may impede the feeding capabilities of the pouches into the containers **25**. Moreover, the funnel cups **20'** being solidly mounted to the carousel **23** (e.g., without pivoting) results in a robust attachment point.

FIG. 2 shows exemplary components included in a single active lane and, thus, illustrates a lane (e.g., lane L2) of the system **5** of FIG. 1A. Referring to FIGS. 1 and 2, lane L2 includes a sampling structure **55**, one or more count sensors **60**, a transfer structure **65**, and a hold-back structure (comb) **70**. A pouch making machine (e.g., a poucher) **100** manufactures and delivers individual pouches "P" to the sampling structure **55**.

In embodiments, the sampling structure **55** comprises a tube, funnel, or other structure that receives pouches P from the poucher **100** and guides the pouches P to one of two locations. The sampling structure **55** may be pivoted between first and second positions. In the first position, an outlet of the sampling structure **55** is substantially aligned with an inlet of the transfer structure **65** such that pouches

6

P move (e.g., by gravity) from the sampling structure **55** to the transfer structure **65**. In the second position, the outlet of the sampling structure **55** is pivoted away from the inlet of the transfer structure **65** such that pouches are diverted to a reject/sample bin (not shown). The pivoting of the sampling structure **55** between the first and second positions may be manually controlled or may be automated (e.g., with an actuator). For example, the sampling structure **55** may be pivoted between the first and second positions by an actuator **57** that is controlled by the controller C, which may comprise a programmable computer device.

The transfer structure **65** may comprise a tube, funnel, or other structure that receives pouches P from the sampling structure **55** and guides the pouches P to the container **25** via the funnel cup **20**. The hold-back structure **70** may be provided at the transfer structure **65** and operates to selectively permit or prevent the passage of pouches P through the transfer structure **65**. For example, the hold-back structure **70** may be selectively moveable between first and second positions. In the first position, the hold-back structure **70** substantially blocks the transfer structure **65** such that pouches P can enter but cannot exit the transfer structure **65**. In the second position, the hold-back structure **70** is retracted and does not block the flow of pouches through the transfer structure **65** and, instead, permits any pouch P in the transfer structure **65** to fall into the container **25**.

The transfer structure **65** and hold-back structure **70** provide a mechanism for ensuring that pouches P are only directed to the container **25** when the container **25** is substantially aligned (e.g., vertically aligned) with the transfer structure **65**. As described in greater detail herein, the poucher **100** continuously produces pouches P, e.g., at a rate of about one pouch per second. Accordingly, the hold-back structure **70** may be closed (e.g., moved to the first position) when the carousel is moving containers between the lanes (e.g., L1-L10) of the system. The pouches P accumulate inside the transfer structure **65** when the hold-back structure **70** is in the first (e.g., closed) position, i.e., to avoid being dropped onto the conveyor system **15** when a container **25** is not in proper position for receiving the pouches. Subsequently, when the carousel **23** has moved the container **25** into substantial alignment with the transfer structure **65** and come to a stop, the hold-back structure **70** is moved from the first (closed) position to the second (open) position and any pouches P that have accumulated in the transfer structure **65** drop into the container **25**. Depending on the amount of time that the hold-back structure **70** is held in the second (open) position, other pouches P may pass through the transfer structure **65** and fall into the container **25** without accumulating in the transfer structure **65**. In this manner, the poucher **100** may be structured and arranged to continuously produce pouches P even while the conveyor system **15** is moving containers **25** within the system.

As such, hold-back structure **70** can be structured and arranged so as to block the transfer of pouches P during the period when a filled container **25** is being replaced by an empty container **25**. As may be appreciated, when configured in this manner, hold-back structure **70** does not serve to hold-back the entire predetermined number of pouches P that are intended for filling container **25**, but rather only those produced during the period when a filled container **25** is being replaced by an empty container **25**. As those skilled in the art will plainly recognize, however, hold-back structure **70** can be structured and arranged so as to block the transfer of the entire predetermined number of pouches P that are intended for filling container **25**, or any number in between. As such, in embodiments, the hold-back structure

may remain at its first, closed position until a predetermined number of pouches have accumulated.

In embodiments, the hold-back structure **70** comprises a gate having a number of finger-like members that are moved into and out of the transfer structure **65**. For example, the transfer structure **65** may comprise a cylindrical tube with a sidewall, and may have holes in the sidewall. The hold-back structure **70** may comprise a number of finger-like members aligned with and moveable through the holes, e.g., in a direction substantially perpendicular to the flow of pouches **P** through the transfer structure **65**. An actuator **72** that is controlled by the controller **C** may be used to selectively move the finger-like members of the hold-back structure **70** between the first (closed) position in which the finger like members are inside the transfer structure **65**, and the second (open) position in which the finger like members are not inside the transfer structure **65**. It is noted that the hold-back structure **70** is not limited to the finger-like members described herein, and any mechanism that controllably blocks and unblocks the transfer structure **65** may be used in implementations.

Still referring to FIG. 2, at least one count sensor **60** may be provided in the lane **L2** to detect a number of pouches **P** that have been inserted into the container **25** or, alternatively or in addition, may count the number of pouches **P** that have been delivered to the transfer structure **65** since the last release of pouches **P** by the hold-back structure **70**. The count sensor **60** may comprise, for example, a photo-eye structured and arranged to detect the passage of a pouch **P** between the sampling structure **55** and the transfer structure **65**. The count sensor **60** may communicate with the controller **C** such that the controller **C** may be configured to detect a number of pouches that have been inserted into the particular container.

As further illustrated in FIG. 2, the funnel cup **20** may comprise a hollow cylinder, the hollow interior of which guides pouches **P** from an outlet of the transfer structure **65** to the container **25**. In embodiments, the funnel cup **20** includes a lower portion, e.g., a shoulder **80**, which fits inside the container **25** and engages an interior wall of the container **25** for moving the container **25** through the system via the carousel **23**. For example, the funnel cup **20** and carousel **23** may cause the container to move (e.g., slide) along a surface **85** of the conveyor system **15**, e.g., as indicated by arrow **87**.

FIG. 2 also shows an exemplary poucher **100** associated with lane **L2**. In embodiments, the poucher **100** comprises a paper (or web) source **105** and a tobacco source **110**. The paper source **105** may comprise a spool (or bobbin) of paper **107** used in making the pouches **P**. The tobacco source **110** may comprise a bin **115** having an inlet **120** for receiving tobacco to the bin **115**, and an outlet **125** for removing tobacco from the bin **115**. A funnel **130** or other conduit may be provided at the outlet **125**. The poucher **100** may be structured and arranged to wrap the paper **107** around a forming section, adjacent a downstream end portion of the funnel **130** to form a tubular paper body **143** while the paper is drawn in a substantially vertical downward direction, e.g., as indicated by arrow **133**. The paper is drawn by the drawing action of the rotary cross-sealing bars **147**. A rotary tobacco feeder (extruder) **135** moves tobacco inside the bin **115** toward the outlet **125** and into the funnel **130**. In an embodiment, the tobacco feeder **135** is a twin screw feeder whose output is adjusted by controlling the amount of rotation of the screws for each feed cycle. The feed cycle is timed by controller **C** to deliver a predetermined charge of

tobacco at or about the time that the rotary cross-sealing bars **147** create a transverse seal across the tubular paper body **143**.

The seal establishes a partially formed, open-ended new pouch **201** (above the sealing bars) and completely closes the pouched structure **203** just below the sealing bars **147**. The partially formed open-ended new pouch **201** receives the timed charge of tobacco from the feeder **135** before being closed and sealed upon further rotation of the rotary sealing bars **147**. Individual pouches **P** are cut from the end of the cylindrical rod **140** at a predetermined rate, e.g., about one pouch **P** per second. After being cut, a pouch **P** falls (e.g., by gravity) into the sampling structure **55**. It is noted, however, that implementations are not limited to the pouchers **100** described herein, and any suitable poucher may be used to provide pouches **P** to the sampling structure **55**. A particularly suitable poucher may be obtained from Ropak Manufacturing Company, Inc. of Decatur, Ala., USA.

According to aspects described herein, the amount of tobacco discharged from the feeder **135** into the funnel **130** affects the amount of tobacco that is provided in each pouch **P**, which, in turn, affects the total amount of tobacco that is included in a single container **25**. For example, the feeder **135** may comprise a screw-type feeder used for discharging tobacco from the inlet **120** to the outlet **125** and into the funnel **130**. The screw of the feeder **135** may be rotated by a motor **160** that is controlled by the controller **C**. The output of the motor **160** may be increased increase the amount of rotation of the screw of the feeder **135**, which increases the flow rate (e.g., mass flow rate) per feed cycle of tobacco into the funnel **130**. Alternatively, the output of the motor **160** may be decreased to reduce the amount of rotation of the screw of the feeder **135**, to decrease the flow rate of tobacco per cycle into the funnel **130**. In lieu or in addition, the speed of the motor **160** may be adjusted to adjust feed rate per cycle.

The amount of tobacco into the funnel **130** affects the weight of each pouch **P** made in the poucher **100**, such that the feeder **135** may be controlled to affect the weight of the container **25** when a given number of pouches **P** are inserted into each container. In this manner, and as described in greater detail herein, a container **25** that is filled with a number of pouches at lane **L2** may be weighed at a location downstream of the outlet **45**, and the speed (and/or duration) of the feeder **135** at lane **L2** may be altered (e.g., increased or decreased) based on the weighing, e.g., to ensure that a desired amount of tobacco is being provided in subsequent containers filled at this lane.

FIG. 2 has been used to describe a single active lane **L2**. It should be understood, however, that each active lane in the pouch providing system **10** of FIG. 1A may be implemented in a manner similar to that described with respect to FIG. 2. In embodiments, each active lane is provided with a respective a sampling structure **55**, count sensor **60**, transfer structure **65**, hold-back structure **70**, and poucher **100**, such that pouches made by the poucher **100** are inserted directly into a container **25**. As used herein, the phrase 'inserted directly' may be construed to mean that a container **25** receives pouches **P** directly from a single poucher or lane **100**, and not from a plurality of different pouchers, e.g., the output of pouches from plural pouchers or lanes are not co-mingled. The hold-back structure **70** and feeder **135** in each lane, as well as the conveyor system **15**, may all be controlled by the controller **C** for coordinating the movement of the containers with the manufacturing and dropping of the pouches in each lane. In this manner, plural active lanes may be operating simultaneously and in parallel to one

another, continuously producing pouches and inserting the pouches directly into containers. Moreover, by providing a respective poucher in each active lane, the flow rate of tobacco in each active lane may be individually adjusted and controlled exclusively and independently of the other active lanes.

FIGS. 3-8 show block diagrams depicting an exemplary operation of the system 5 in accordance with aspects described herein. Positions P1, P2, . . . , P30 represent discrete positions where containers (e.g., containers 25) may be positioned by the conveyor system (e.g., conveyor system 15). Positions P1-P10 correspond to lanes L1-L10 in the filling zone 35. As described with respect to FIG. 1A, lanes L2, L4, L6, L8, and L10 are active lanes (e.g., similar to that shown in FIG. 2), and lanes L1, L3, L5, L7, and L9 are inactive lanes (e.g., do not provide pouches to containers). Positions P11-P20 are empty positions downstream of the filling zone 35. Positions P21-P30 correspond to tamping positions in the tamping zone 40. Although the positions P1-P30 are depicted in a linear fashion, it is understood that the conveyor system may have any desired shape, such as an uninterrupted, generally elliptical shape as shown in FIG. 1A.

As shown in FIG. 3, a first group 310 of ten containers 25 is moved into positions P1-P10, e.g., by the conveyor system moving funnel cups through the input zone 30 to engage empty containers and into the filling zone 35. The respective hold-back structures (e.g., hold-back structures 70) at lanes L2, L4, L6, L8, and L10 are moved to the closed position while the conveyor system advances the containers 25 into the filling zone 35 so that pouches P are retained during movement of the cans. The respective pouchers (e.g., pouchers 100) at lanes L2, L4, L6, L8, and L10 continue to produce pouches while the conveyor system advances the containers 25 into the filling zone 35. When the conveyor system has moved the group 310 to positions P1-P10, the conveyor system stops and the hold-back structures open to release any retained pouches P into a first subset of the containers of the group 310 and to allow additional pouches to be delivered according to a predetermined count.

When a predetermined number of pouches have been inserted into each container in the first subset of group 310, the hold-back structures are closed, and the conveyor system advances one position as shown in FIG. 4. Advancing one position moves the group 310 to positions P2-P11, such that the first subset of group 310 is taken out of alignment with the active lanes while a second subset of group 310 is simultaneously moved into alignment with the active lanes. Also, a first container of a second group 320 is simultaneously moved to position P1. After advancing the one position, the conveyor system stops and the hold-back structures open to allow filling of the second subset of containers of the group 310 with pouches.

After a predetermined number of pouches have been inserted into each container in the second subset of group 310, the hold-back structures are closed, and the conveyor system advances nine positions as shown in FIG. 5. The advancing of nine positions moves the first group 310 to positions P11-P20, which may be intermediate positions where no action is performed on the containers. The advancing of nine positions also simultaneously moves the second group 320 of containers into positions P1-P10. When the conveyor system has moved the second group 320 to positions P1-P10, the conveyor system stops, and the hold-back structures open to allow filling of a first subset of containers of the second group 320 with pouches.

When a predetermined number of pouches have been inserted into each container in the first subset of second group 320, the hold-back structures are closed, and the conveyor system advances one position as shown in FIG. 6. Advancing the one position moves the second group 320 to positions P2-P11, such that the first subset of the second group 320 is no longer aligned with the active lanes, and a second subset of containers of the second group 320 is aligned with the active lanes. The advancing one position also simultaneously moves the first group 310 to positions P12-P21, and also moves a first container of a third group 330 to position P1. After advancing the one position, the conveyor system stops and the hold-back structures open to allow filling of the second subset of containers of the second group 320 with pouches.

After a predetermined number of pouches have been inserted into each container in the second subset of the second group 320, the hold-back structures are closed, and the conveyor system advances nine positions as shown in FIG. 7. This is similar to the advancement described between FIG. 4 and FIG. 5, and simultaneously moves the first group 310 to positions P21-P30, the second group 320 to positions P11-P20, and a third group 330 to positions P1-P10. When the conveyor system has moved the third group 330 to positions P1-P10, the conveyor system stops, and the hold-back structures open to allow filling of a first subset of containers of the third group 330 with pouches.

Additionally, while the conveyor system is momentarily stopped in the position shown in FIG. 7, the containers in both subsets of the first group 310 are tamped at positions P21-P30. The tamping may comprise, for example, a respective linear actuator at each of positions P21-P30 that is controlled to push downward on the pouches in the containers in the tamping zone 40. A disc or other structural member may be attached to the lower end of each one of the linear actuator at positions P21-P30 for tamping the pouches downward into the respective containers. The tamping of the containers in the first group 310 may happen simultaneously with the filling of the first subset of containers of the third group 330.

Upon filling the first subset of the third group 330 and tamping the first group 310, the hold-back structures are closed and the conveyor system then advances another one position as shown in FIG. 8. This is similar to the advancement described between FIG. 5 and FIG. 6, and simultaneously moves the first group 310 to positions P22-P30, the second group 320 to positions P12-P21, the third group 330 to positions P2-P11, and a first container of a fourth group 340 to position P1. The conveyor system stops after this advancement of one position, and the hold-back structures open to fill a second subset of containers of the third group 330 with pouches.

The advancement of one position depicted in FIG. 8 also moves a leading container of the first group 310 out of the tamping zone 40. In embodiments, this one container is disengaged from its funnel cup and is conveyed through the outlet station 45 of the system. It should be understood that the next advancement of the conveyor system will be another nine-position advancement (e.g., similar to that described between FIG. 6 and FIG. 7), which will result in the remaining nine containers of the first group 310 being disengaged and conveyed through the outlet 45.

The flow of containers through the system as described with respect to FIGS. 3-8 is exemplary and is not intended to be limiting. Those skilled in the art will recognize that other movement schemes may be used with the system described herein for moving containers through the system

in order to fill the containers. For example, group sizes other than ten containers may be used. Also, there may be no inactive lanes in the filling zone. Moreover, there may be no empty positions between the filling zone and the tamping zone.

FIG. 9 shows an exemplary on-line weighing system in accordance herewith. In embodiments, the filled containers 25 are disengaged from the conveyor system and output from the system 5 at outlet 45 (e.g., as described with respect to FIG. 1). Downstream of the outlet 45, the containers are moved in single file to a weigh station 400 referred to as a checkweigher. The movement may be provided by any suitable conveyor 405 that extends between the outlet 45 and the weigh station 400, such as a belt, roller, or sliding conveyor. The outlet 45, conveyor 405, and weigh station 400 are structured and arranged such that the order of containers is preserved as the containers move from the outlet 45 to the weigh station 400.

According to aspects described herein, one or more selectively extendable and retractable gates 410 may be structured and arranged to temporarily stop a single container 25 on a sensor 413 at the weigh station 400. The sensor 413 may be configured to detect a weight of the filled container 25 and communicate this detected weight to the controller C.

When the controller C determines that the container 25 is satisfactory, then the controller C actuates the gate 410 to cause movement of the container 25 from the weigh station 400 to downstream processes, such as an optional, additional tamping process 415 (e.g., that further tamps down the pouches in container), and a lidding process 416 (e.g., that applies a lid to the container). On the other hand, when the controller C determines that a container is not satisfactory, then the controller C may cause a reject actuator 417 to divert the container 25 to a reject chute 420. The reject actuator 417 may comprise any suitable actuator that is capable of diverting the container 25, such as a pneumatic, hydraulic, or servo-type linear actuator with an extendable and retractable push rod that pushes the container off the weigh station 400 and into the reject chute 420, e.g., as indicated by arrow 422.

In exemplary embodiments, a container may be deemed satisfactory when it both: (i) contains an acceptable number of pouches, and (ii) has a weight within lower and upper limits. The number of pouches in the container may be determined using the count sensor 60. More specifically, since the order of the containers is preserved from the output 40 to the weigh station 400, the controller C may be programmed to associate a container 25 at the weigh station 400 with a particular filling event at a particular lane of the system 10. Thus, using the data from the count sensors 60 and the position data of each container 25 in the conveyor system 15, the controller C may be configured to determine a number of pouches in each respective container 25. Accordingly, the controller C may be programmed to compare the number of pouches in a container 25 to a predefined acceptable number, and reject the container 25 at weigh station 400 using reject actuator 417 when the number of pouches in the container does not equal the predefined acceptable number.

As already described herein, the sensor 413 may communicate data to the controller C indicating a weight of the container 25 that is located at the weigh station 400. The controller C may be programmed to compare the weight data to a predefined low threshold and a predefined high threshold. When the weight of the container 25 at the weigh station 400 is less than the low threshold or greater than the

high threshold, the controller C may actuate the reject actuator 417 to divert the container 25 to the reject chute 420.

It is noted that the reject scheme including reject actuator 417 and reject chute 420 are merely exemplary, and implementations are not limited to this particular scheme. For example, rather than diverting containers one at a time, a group of plural containers may be queued at a location downstream of the weigh station, and corresponding plural number of reject actuators may be selectively and individually actuated to reject one or more of the plural containers that were deemed unsatisfactory. The other ones of the plural containers that are not rejected are then passed to the downstream processes.

According to aspects described herein, the weight of the container 25 determined at weigh station 400 may be used as the basis for adjusting operation of the motor 160 of the poucher 100 in the lane where the particular container 25 was filled. Specifically, since the order of the containers is preserved from the output 40 to the weigh station 400, and since the position of each container is known at all times in the conveyor system 15, the controller C may be programmed to associate a container 25 at the weigh station 400 with a particular lane of the system 10. The controller C may further be programmed to adjust the output of the motor 160 of the poucher 100 in the particular lane based on the detected weight of the container 25 at the weigh station 400. For example, when the controller C determines from sensor 413 that the container 25 weighs less than the low threshold, the controller C may increase the output of the motor 160 during a feed cycle to increase the amount of tobacco that is contained in each pouch made by the particular poucher 100. Alternatively, when the controller C determines from sensor 413 that the container 25 weighs more than the high threshold, the controller C may decrease the output of the motor 160 to decrease the amount of tobacco that is contained in each pouch made by the particular poucher 100.

Preferably, a predetermined number of weight readings of cans from a given lane are averaged and the average value is compared to a nominal value before adjustment is made to the feed rate of the feeder 135 for that particular lane. Using an average weight reading avoids swings in feeder operation and achieves a smoother response to any tendency of the actual feed rate to move off nominal in any particular lane. Preferably, an average weight of three (3) cans is used, although a greater number is usable. All the while, if any member can within a set is above or below acceptable weight limits, that can is rejected, but its weight reading is used for control purposes.

In addition, the controller is configured to track and compare the magnitude of adjustments amongst the feeders 135 to anticipate a problem with one or more of the lanes that might require the attention of the operator or a shutdown of the machine. In one embodiment, each feed rate is monitored and compared to an average of all feed rates, and if any one feed rate (or more) is about 20% or more above or below the average, the machine is shut down and the errant lane identified to the operator for inspection for accumulation of material, clogs or electro-mechanical problems.

FIG. 10 depicts a block diagram of an exemplary PID (proportional-integral-differential) control algorithm that the controller C may use to adjust the output of the respective motors 160 based on the weight detected at the weigh station 400. In FIG. 10, the Operator Sample Weight is a manual pouch weight entered by the operator when the Sample Mode is selected as Manual. The Checkweigher

13

Sample Weight is a program that evaluates weight data received from the sensor **413** and provides control signals for the PID Control when the Sample Mode is selected as Auto. The Gain Schedule is a program that controls proportional and integral gain based on error (e.g., difference between the actual Sample Weight and a Target Weight), and is configured such that adjustment of the motor **160** is more aggressive when the detected Sample Weight is farther from the Target Weight and less aggressive when the detected Sample Weight is closer to the Target Weight. Fast, Medium, and Slow are threshold components for weight range evaluation. Control Output represents control signals that are transmitted to the particular motor **160** for adjusting the speed of the feeder **135**. It is noted that the control scheme described in FIG. **10** is merely exemplary, and embodiments may be implemented with other control schemes.

FIG. **11** shows a flow diagram of a method in accordance herewith. Methods in accordance herewith may be performed using the systems described with respect to FIGS. **1-10** and in a manner similar to that described with respect to those figures. The steps of FIG. **11** are described in part by referring to reference numbers associated with elements shown in the previous drawings. At step **510**, plural empty containers are engaged by a conveyor. This may comprise, for example, the carousel **23** moving the funnel cups **20** through the input zone **30** to grab empty containers **25**.

At step **520**, the plural containers are moved into alignment with a corresponding plural number of continuously operating pouch making machines. This may comprise, for example, the carousel **23** moving simultaneously moving the containers into alignment with the active lanes of the system **10**, in which each active lane includes a poucher **100** that continuously makes pouches at a substantially constant rate.

At step **530**, the plural containers are simultaneously filled. This may comprise, for example, opening the hold-back structure **70** of each active lane to drop accumulate pouches into the containers **25**, and to permit a number of pouches to drop directly from the pouchers **100** into the containers **25**. In embodiments, each container **25** receives pouches from only a single poucher **100**.

At step **540**, the filled containers are moved to a tamping zone and the contents of each container are tamped down inside the container. This may comprise, for example, the carousel **23** moving the filled containers **25** out of the filling zone **35** and into the tamping zone **40**, where the pouches are tamped down into the containers.

At step **550**, the filled containers are disengaged from the conveyor. This may comprise, for example, the carousel **23** moving the funnel cups **20** through the outlet **45**, where the funnel cups **20** disengage the filled containers. The filled containers may then be moved by another conveyor to the weigh station, with the order of the containers being maintained throughout.

At step **560**, each filled container is weighed individually. This may comprise, for example, moving each container individually onto a weight sensor **413**.

At step **570**, a rate of tobacco supplied to a particular one of the pouch making machines is individually adjusted based on the detected weight of a container that was filled at the particular pouch making machine. This may comprise, for example, detecting the weight of a particular container at step **560**, comparing the detected weight to a low and a high threshold, and using the detected weight value to establish and send a control signal to a variable speed motor **160** that drives a tobacco feeder **135** in the poucher **100** that was used to fill the particular container. Each one of the plural

14

pouchers **100** may be individually adjusted based on the detected weights exclusive of the other pouchers **100**.

Referring now to FIG. **12** a sequencing diagram for an embodiment of a system and method, in accordance herewith, is shown. At step **610**, after the pouches are formed with a longitudinal (fin) seal and the end seals, they advance to the knives where they are cut and separated. The programmable logic controller (PLC) program counts how many pouches have been cut by counting how many times the knives make a full revolution. At step **610**, this value is compared to the number of pouches detected by the pouch sensor. If the two values are equal, then, at step **610**, the container is marked as 'Good'. If the values are not equal, the container will be marked as an external reject, at step **630**, and will be rejected at step **690** by the checkweigher, regardless of its weight.

FIG. **13** depicts how the containers transition to different stations on the conveyor from machine startup. The container unit has 40 total cups, but holds three sets of 10 containers, plus some new empty containers from the container infeed before lane **10**, which consists of the set being filled, the set being evaluated for count, and the set ready to exit. As shown, Set 0 is the set being filled under lanes **1-10**. Set 1 is first set after filling, being evaluated for proper count at lanes **1-8**, and prior to the tamping section. Set 2 refers to a second set of containers after filling, with lane **9** and **10** being tamped, lanes **2-8** waiting for exit, and 1 exiting by itself only during the first time the container unit is loaded. Set 3 refers to a third set after filling. The containers exit in order 2, 3, 4, 5, 6, 7, 8, 9, 10, 1 and head towards the checkweigher (not shown).

In operation, each time the container conveyor moves in sets of 10 cups, for each cup that moves, the cup sensor and container sensor must both be on, seeing a cup and a container. Once a set of 10 containers is loaded, any containers missing from the newly loaded set will stop the machine for missing container(s). If this occurs, the hold back structure, or combs, holding pouches while the containers move, do not retract, keeping pouches from dropping on the container conveyor track. Should this occur, the operator must correct the container feed issue and restart the machine. The container unit will load 10 new empty containers. If any are detected missing, the machine stops again. If 10 containers are successfully loaded, then the hold back structure, or combs, will retract and pouches will drop into containers and production continues.

After a set of containers have been filled with pouches, the container conveyor advances them to be tamped. Each tamp head presses down into a container and packs the pouches tighter together. This is done to prevent pouches from sticking out of the containers. The number of times a set of containers is tamped can vary based on the speed that the machine is operating. As may be appreciated, the tamp heads must be up in order for the container conveyor to execute a move. When containers are being tamped, the tamp heads should be able to enter the containers with 1 millimeter of clearance between the outside of the tamp head and the container.

After the pouches are tamped they enter the exit conveyor which carries them to the checkweigher. Containers that have already been marked as "external rejects" will automatically be rejected. The remaining containers marked as "good" will be weighed on the checkweigher to determine if the pouch weights are within an acceptable range of weights. If they are, they will continue on the conveyor. If not, they will be rejected off of the checkweigher. When a container's weight is out of the accepted range, the checkweigher sends

15

needed adjustment information to the poucher which in turn adjusts its feed mechanism to produce tobacco pouches closer to a target pouch weight.

The particulars shown herein are by way of example and for purposes of illustrative discussion only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects. In this regard, no attempt is made to show structural details in more detail than is necessary for fundamental understanding, the description taken with the drawings making apparent to those skilled in the art how the several forms disclosed herein may be embodied in practice.

It is noted that the foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting. While aspects have been described with reference to an exemplary embodiment, it is understood that the words which have been used herein are words of description and illustration, rather than words of limitation. Changes may be made, within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the present disclosure in its aspects. Although aspects have been described herein with reference to particular means, materials, and/or embodiments, the present disclosure is not intended to be limited to the particulars disclosed herein; rather, it extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims.

What is claimed:

1. A system for manufacturing and inserting a pre-determined number of material-filled pouches into containers, the system comprising:

a pouch providing system comprising a plurality of lanes, wherein each one of the plurality of lanes comprises a pouch making machine and a hold-back structure;

a conveyor system structured and arranged to move a plurality of containers into alignment with the plurality of lanes, the conveyor system comprising a carousel, an inclined ramp for guiding the containers into alignment with a plurality of funnel cups attached to the carousel, each funnel cup including an integrated carrier fork structured and arranged to engage a respective one of the plurality of containers as it progresses up the inclined ramp, and to carry the container; and

a controller structured and arranged to control the hold-back structure in each one of the plurality of lanes such that a predetermined number of pouches are inserted into each of the plurality of containers when the plurality of containers are aligned with the plurality of lanes.

2. The system of claim 1, wherein:

the pouch making machines make the pouches at a substantially constant rate independent of a position of the plurality of containers; and

the pouches made by the pouch making machine in a respective one of the plurality of lanes are inserted directly into a respective container of the plurality of containers aligned with the respective lane.

3. The system of claim 2, wherein:

the hold-back structure is moveable between an open position and a closed position;

the open position permitting the pouches to be inserted into a respective container aligned with the respective lane; and

the closed position preventing the pouches from passing through the respective lane and causing the pouches to accumulate inside the respective lane while a full

16

container is removed and an empty container is brought into alignment with the respective lane.

4. The system of claim 3, wherein:

the controller is structured and arranged to move the hold-back structure to the closed position when the conveyor system is moving the plurality of containers; and

the controller is structured and arranged to move the hold-back structure to the open position when the plurality of containers are aligned with the plurality of lanes.

5. The system of claim 1, further comprising a weigh station structured and arranged to detect a weight of each one of the plurality of containers after the pouches are inserted into the plurality of containers.

6. The system of claim 5, wherein:

the pouch making machine of each one of the plurality of lanes comprises a tobacco feeder structured and arranged to control an amount of tobacco that is included in each of the pouches made by the pouch making machine; and

the controller is structured and arranged to adjust an output of the tobacco feeder in a respective lane of the plurality of lanes based on the detected weight of one of the containers that was filled at the respective lane.

7. The system of claim 5, wherein the controller is structured and arranged to:

compare the detected weight of a respective container of the plurality of containers to a low threshold and a high threshold; and

reject the respective container when the detected weight is less than the low threshold or greater than the high threshold.

8. The system of claim 1, wherein the conveyor system is structured and arranged to move the plurality of containers away from the plurality of lanes and into a tamping zone where tampers are structured and arranged to tamp the pouches inside of the plurality of containers.

9. The system of claim 1, wherein the conveyor system is structured and arranged to simultaneously move the plurality of containers away from the plurality of lanes and move a second plurality of containers into alignment with the plurality of lanes.

10. The system of claim 1, wherein:

the pouches include smokeless tobacco contained within a paper case; and

the containers comprise cylindrical containers structured and arranged to be sealed with a lid.

11. The system of claim 1, wherein:

each one of the plurality of lanes comprises a sampling structure and a transfer structure;

the transfer structure contains the hold-back structure; and the sampling structure is moveable between a first position in which the pouches made in a respective lane of the plurality of lanes are directed to the transfer structure and a second position in which the pouches made in the respective lane are directed away from the transfer structure.

12. The system of claim 1, wherein the controller is structured and arranged to control movement of the plurality of containers by moving and stopping of the carousel.

13. The system of claim 1, wherein each funnel cup is solidly mounted to said carousel and does not pivot to engage the container.

14. The system of claim 1, wherein each of the plurality of lanes comprises a count sensor structured and arranged to detect a count of the pouches released from the pouch

17

providing system that are to be inserted into a respective one of the plurality of containers; and

the controller is structured and arranged to reject the respective container when the detected count does not equal the predetermined number.

15. The system of claim 14, wherein the controller is structured and arranged to compare said count of released pouches to a detected number of pouch cutting operations and, if unequal, to reject the respective container.

16. A method for manufacturing and inserting material-filled pouches into containers, the method comprising:

engaging a plurality of containers with a conveyor system, the conveyor system comprising a carousel, an inclined ramp for guiding the plurality of containers into alignment with a plurality of funnel cups attached to the carousel, each funnel cup including an integrated carrier fork structured and arranged to engage a respective container of the plurality of containers as it progresses up the inclined ramp, and to carry the respective container;

simultaneously moving the plurality of containers into alignment with a corresponding plurality of pouch making machines;

inserting pouches directly from respective pouch making machines of the plurality of pouch making machines into respective containers of the plurality of containers; individually weighing each one of the plurality of containers after the inserting; and

adjusting a rate of material supplied to a respective pouch making machine of the plurality of pouch making machines based on the weighing, wherein said adjustment of the rate changes an amount of material included in pouches made by the respective pouch making machine.

17. The method of claim 16, wherein the adjusting the rate of material comprises adjusting a speed of a material feeder included in the respective pouch making machine exclusive of speeds of other material feeders included in other pouch making machines of the plurality of pouch making machines.

18

18. The method of claim 17, further comprising: comparing a detected weight of a respective container of the plurality of containers that received the pouches from the respective pouch making machine to a low threshold and a high threshold;

increasing a speed of the material feeder included in the respective pouch making machine when the detected weight is less than the low threshold; and decreasing the speed of the material feeder included in the respective pouch making machine when the detected weight is greater than the high threshold.

19. The method of claim 18, wherein the increasing the speed and the decreasing the speed are based on a proportional-integral-differential (PID) control.

20. The method claim 18, wherein said increasing and decreasing is based on an average weight of at least three containers from a respective pouch making machine.

21. The method of claim 16, wherein the controller is structured and arranged to compare current feed rates of each pouch making machine to determine whether a need to shut down a pouch making machine in response to said feed rate comparison exists.

22. The method of claim 16, further comprising: moving the plurality of containers out of alignment with the plurality of pouch making machines and into alignment with a plurality of tamping devices; and tamping the pouches in each one of the plurality of containers.

23. The method of claim 22, further comprising disengaging the plurality of containers from the conveyor system after the tamping and prior to the weighing.

24. The method of claim 16, further comprising: actuating a plurality of hold-back structures to a closed position such that the pouches accumulate in transfer structures during the moving of the plurality of containers; and

actuating the plurality of hold-back structures to an open position when the plurality of containers is aligned with the pouch making machines.

* * * * *